

LOT NUMBER	PHASE	HOUSE TYPE	REG. PLAN #	CLOSING DATE
46	2	The George (40-5E) Elev A	S-C-2007-004	12-Jul-16

INV# QTY

EXTRA CHANGE

CARPENTER / TRIM				
1,151	✓	1 - SUPPLY AND INSTALL UPGRADE BASEBOARDS AND TRIM THROUGHOUT PER COLOUR CHART		5846
07Jun16	Note:			

CERAMIC WALL TILES				
1,151	✓	1 - SUPPLY AND INSTALL UPGRADE WALL TILES FOR ENSUITE SHOWER STALL PER COLOUR CHART - LAY VERTICAL AND IN BRICK PATTERN		5847
07Jun16	Note:			

COUNTERTOPS				
1,151	✓	1 - SUPPLY AND INSTALL UPGRADE COUNTER TOP IN MASTER ENSUITE PER COLOUR CHART		5848
07Jun16	Note:			

FLOORING				
1,151	✓	1 - SUPPLY AND INSTALL STANDARD FLOOR TILE IN FOYER, POWDER ROOM (ADD IN MAIN HALL) LANDING TO BASEMENT, KITCHEN AND BREAKFAST ALL IN BRICK PATTERN, SELECTION PER COLOUR CHART		5849
07Jun16	Note:			
1,151	✓	1 - SUPPLY AND INSTALL UPGRADE HARDWOOD IN FAMILY ROOM, DINING ROOM AND DEN PER COLOUR CHART (FR		5850
07Jun16	Note:			
1,151	✓	1 - SUPPLY AND INSTALL HARDWOOD FLOORING FOR UPPER HALLWAY PER COLOUR CHART		5850
07Jun16	Note:			
1,151	✓	1 - SUPPLY AND INSTALL UPGRADE CARPET ON MAIN STAIRS		5850
07Jun16	Note:			

KITCHEN & BATHS				
1,151		1 - SUPPLY AND INSTALL GROUP III KITCHEN CABINETRY PER COLOUR CHART		NO W/O
07Jun16	Note:			
1,151	✓	1 - SUPPLY AND INSTALL QUARTZ STONE COUNTER TOP IN KITCHEN IN LIEU OF BUILDER'S STANDARD PER COLOUR COLOUR CHART		5848
07Jun16	Note:			
1,151	✓	1 - UPGRADE EDGE FOR KITCHEN COUNTER TOP TO 4CM PER COLOUR CHART		5848
07Jun16	Note:			
1,151	✓	1 - SUPPLY AND INSTALL BASE CORNER FOLDING DOOR FOR BASE CORNER CABINET IN KITCHEN		5851
07Jun16	Note:			
1,151	✓	1 - SUPPLY AND INSTALL 2 GLASS DOORS FOR UPPER CABINETRY IN KITCHEN PER PLAN - DOOR IS GOTHIC GLASS, INTERIOR IS WHITE :		5851
07Jun16	Note:			
1,151	✓	1 - PREPARE BASE CABINET FOR FARMERS SINK - SPECS TO FOLLOW	att'd	5852
07Jun16	Note:			
1,151	✓	1 - SUPPLY AND INSTALL TALL VANITY CABINETRY IN ENSUITE IN LIEU OF STANDARD HEIGHT		5851
07Jun16	Note:			

LOT NUMBER	PHASE	HOUSE TYPE	REG. PLAN #	CLOSING DATE
46	2	The George (40-5E) Elev A	S-C-2007-004	12-Jul-16

INV# QTY

EXTRA / CHANGE

KITCHEN & BATHS

1,151	✓ 1 -	UPGRADE DOOR HARDWARE FOR MAIN BATHROOM	VANITY	5851
07Jun16	Note:			
1,151	✓ 1 -	SUPPLY AND INSTALL VANITY BANK OF DRAWERS IN MASTER ENSUITE		5851
07Jun16	Note:			

MISCELLANEOUS

1,151	✓ 1 -			
07Jun16	Note:			

PLUMBING

1,151	✓ 1 -	SUPPLY AND INSTALL FIRECLAY WHITE FARMHOUSE FHK710-30 IN KITCHEN		5852
07Jun16	Note:			
1,151	✓ 1 -	SUPPLY AND INSTALL UPGRADE FAUCET IN KITCHEN TO BRANTFORD SINGLE HANDLE PULL DOWN KITCHEN FAUCET NO PLATE - SINGLE HOLE INSTALLATION IN SRS FINISH MODEL 7185		5852
07Jun16	Note:			
1,151	✓ 1 -	SUPPLY AND INSTALL UNDERMOUNT BASIN IN ENSUITE TO 4210CIY WHITE		5852
07Jun16	Note:			
1,151	✓ 1 -	SUPPLY AND INSTALL UPGRADE FAUCET FOR MASTER ENSUITE VANITY: MOEN VOSS SINGLE HANDLE SINGLE HOLE LAVATORY FAUCET IN CHROME MODEL 6903		5852
07Jun16	Note:			
1,151	✓ 1 -	SUPPLY AND INSTALL UPGRADE FAUCET FOR MASTER ENSUITE SHOWER STALL MOEN VOSS CHROME, WITH TOE TESTER MODEL 62320		5852
07Jun16	Note:			

STAIR / RAILING

1,151	✓ 1 -	SUPPLY AND INSTALL STANDARD PICKETTS ON MAIN STAIRCASE PAINTED WHITE SEMI-GLOSS WITH STAINED RAILING AND POSTS TO MATCH HARDWOOD FLOOR AS CLOSE AS POSSIBLE		5853
07Jun16	Note:			
1,151	✓ 1 -	UPGRADE POSTS ON MAIN STAIRCASE TO CR 180 - POSTS ARE STAINED TO MATCH FLOOR AS CLOSE AS POSSIBLE		5853
07Jun16	Note:			



building futures




* SEE SI
FLOOR
PLAN

Stage 2 Lot 46

Purchaser **BLAIR**

Date JUNE 9/16

CLARRINGTON
NORTHGLEN The George

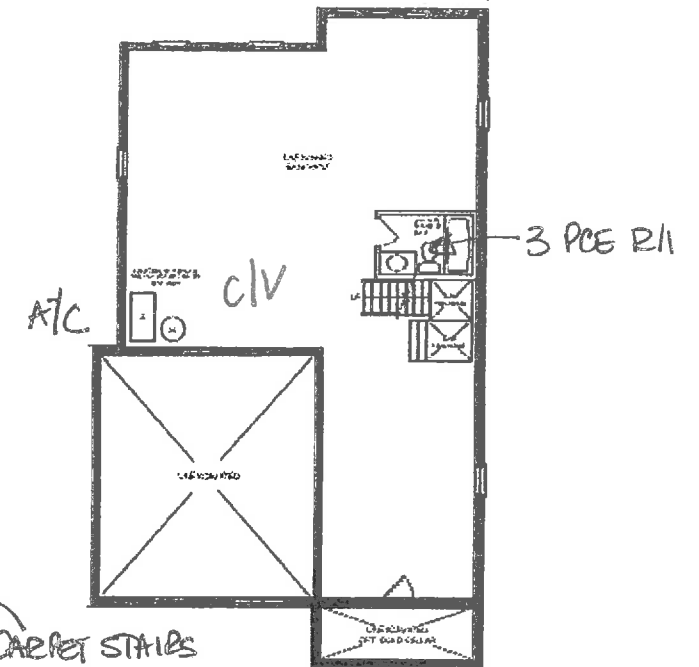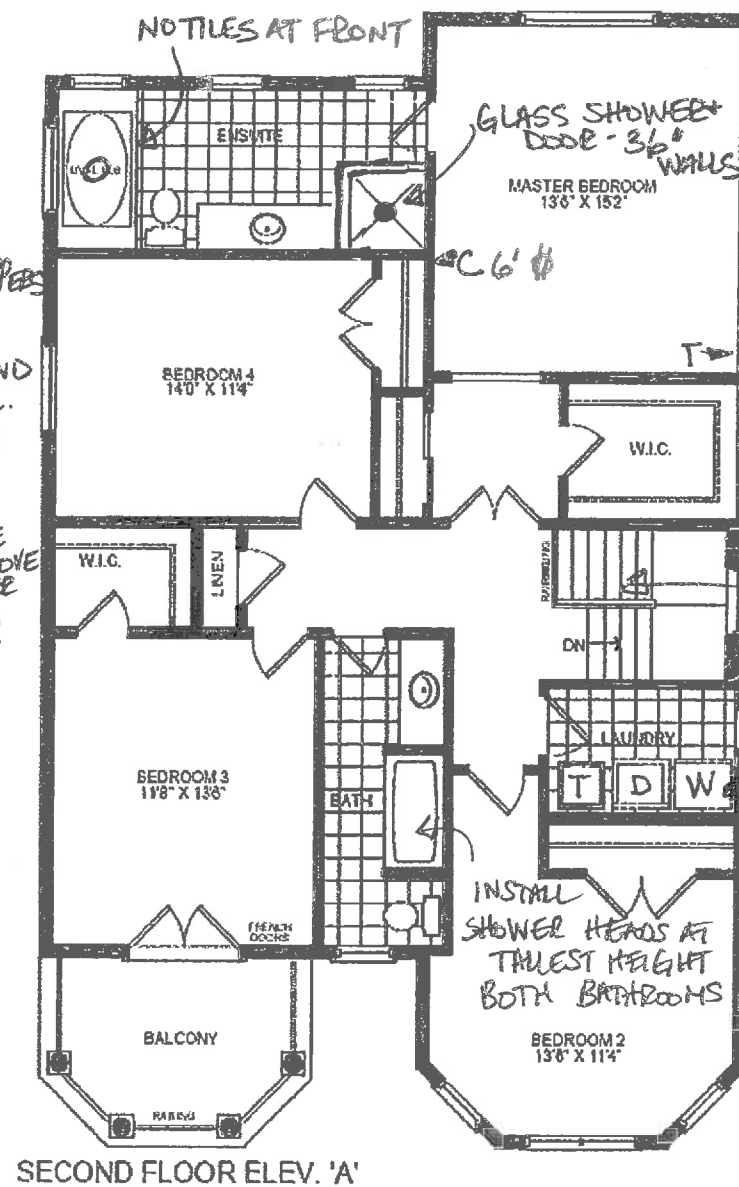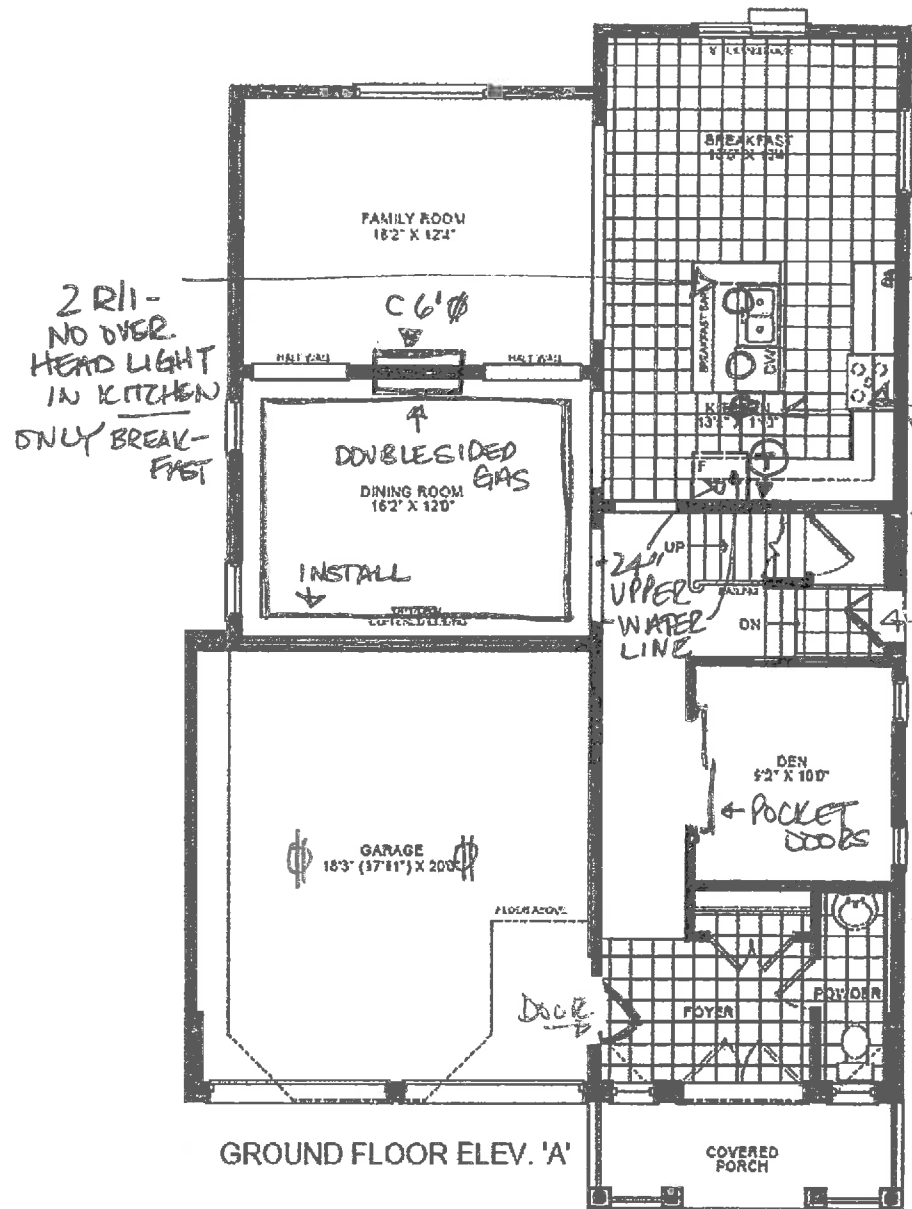

building features

- SMOOTH CEILINGS MAIN FLOOR
- 200 AMP
- 1" GAS PIPE

Renderings and floor plans are artist's concepts only. Room sizes and square footage shown are approximate and subject to change without notice, may not be drawn to scale. Illustration may show optional features which may not be included in the base price. Furnace, Hot Water Tank and door placement in the utility room is subject to change without notice. E. & O.E.




Stage 1 Lot 46

Purchaser BLAIR

Date FEB. 9/16

CORTINA

LOT 46

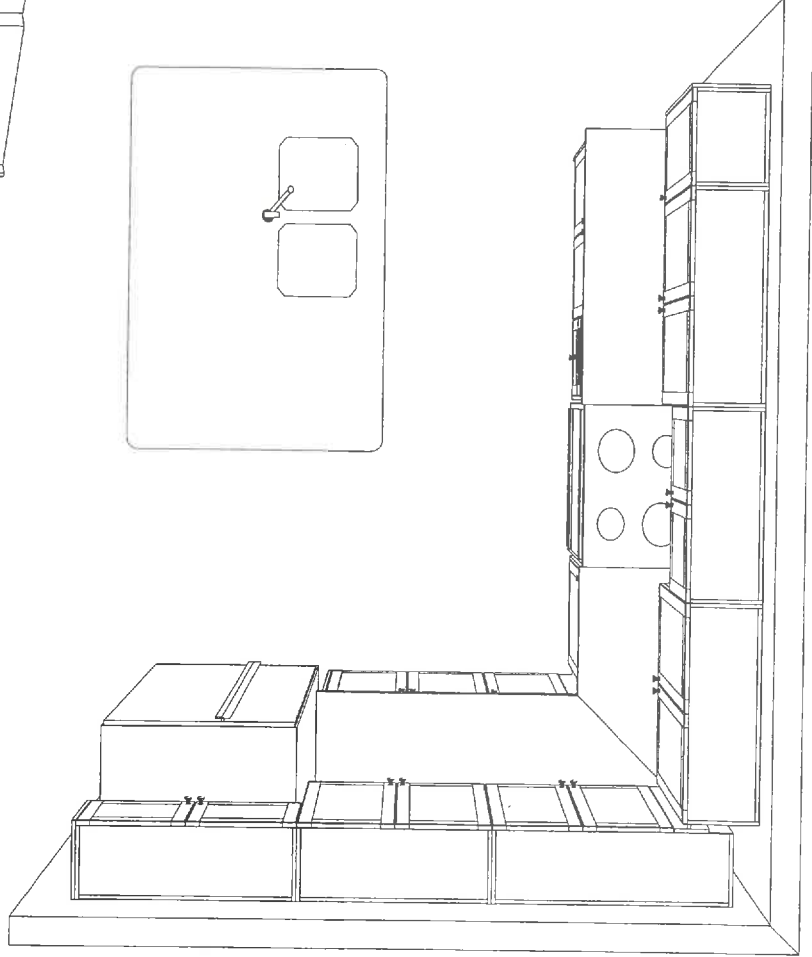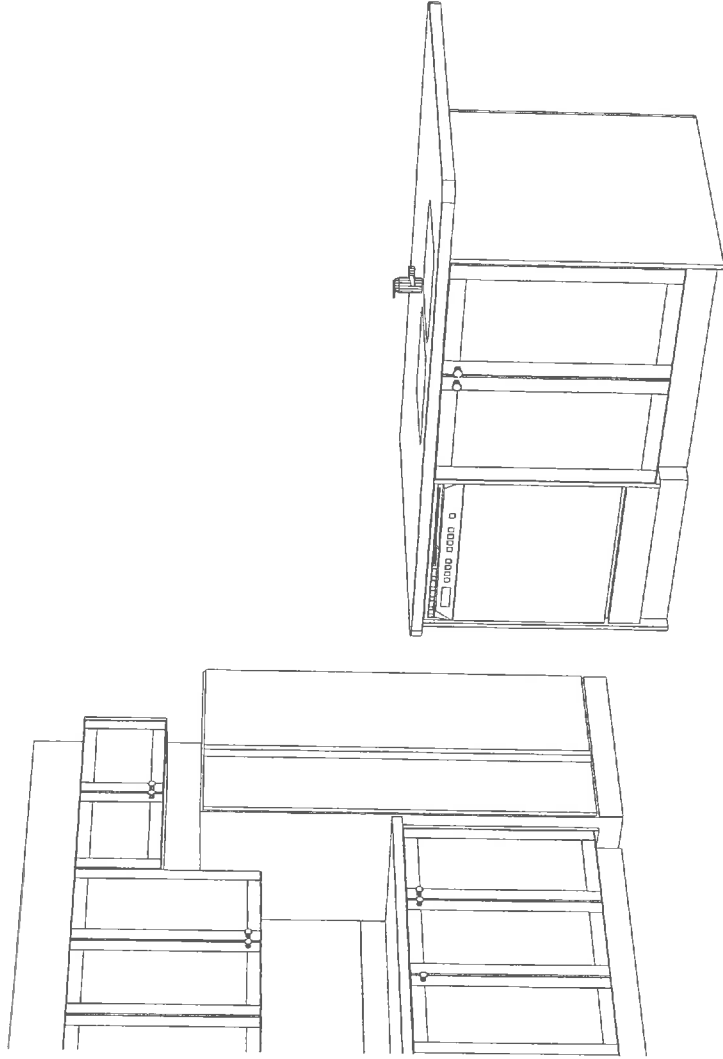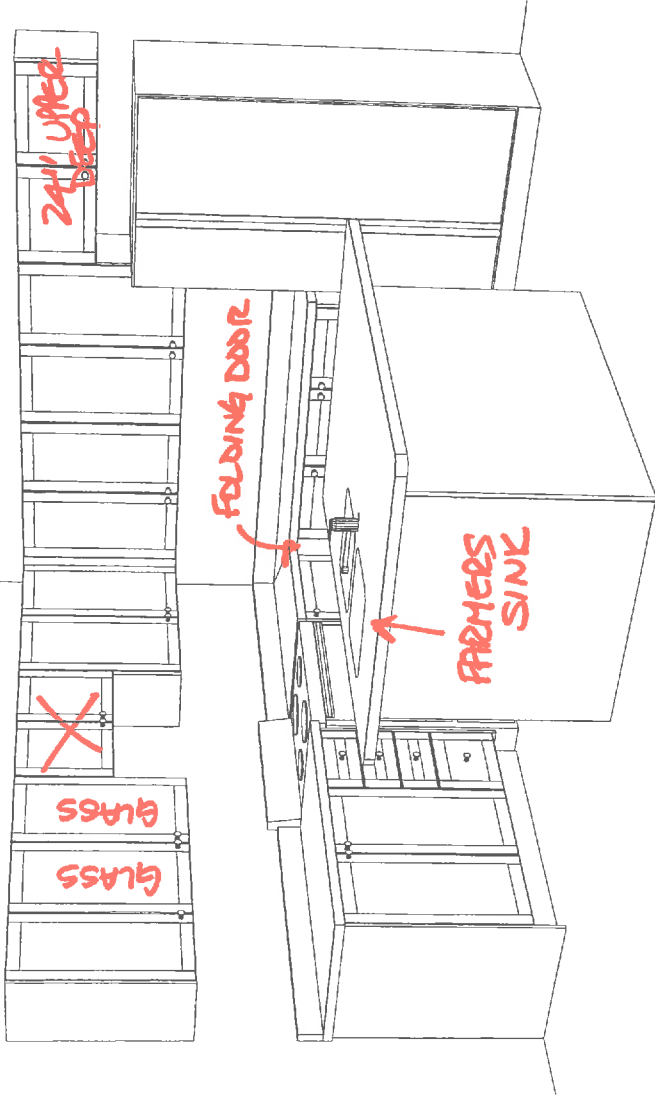

Note: This drawing is an artistic interpretation of the general appearance of the design. It is not meant to be an exact rendition. Generic doors are shown which may affect such things as hardware drilling and specific profiles/designs. .

CORTINA
KITCHENS INC.

Date: 11/04/13



CORTINA
ANT
RIVA

KITCHEN
SYSTEMS



SPECIFICATION SHEET

Product Family Sinks Product Fireclay White Series FARM HOUSE Model FHK710-30

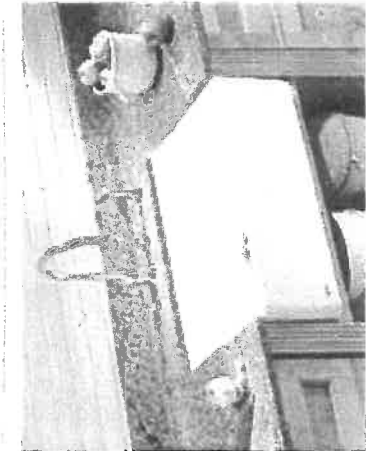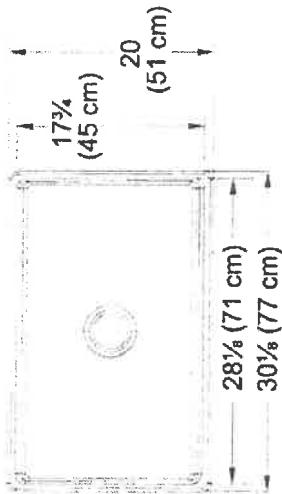

Product Information


Article Number	130.0079.638
Model Name	FHK710-30WH
Cabinet Size	30"
Waste Outlet Diameter	3 1/2"
Dimensions30 1/8"x20"x260 mm	
Bowl Size	28 1/8"x17 3/4"x8 1/4"
Apron depth	10 1/8"
Number of Bowls	1
Remarks FKS	Dimensions may vary by 2% (plus or minus) due to material attributes and firing process. Back and sides of sink are NOT finished. FRTWIST not suitable for Fireclay sinks.

CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

****Minimum, measured from narrowest point of opening.**

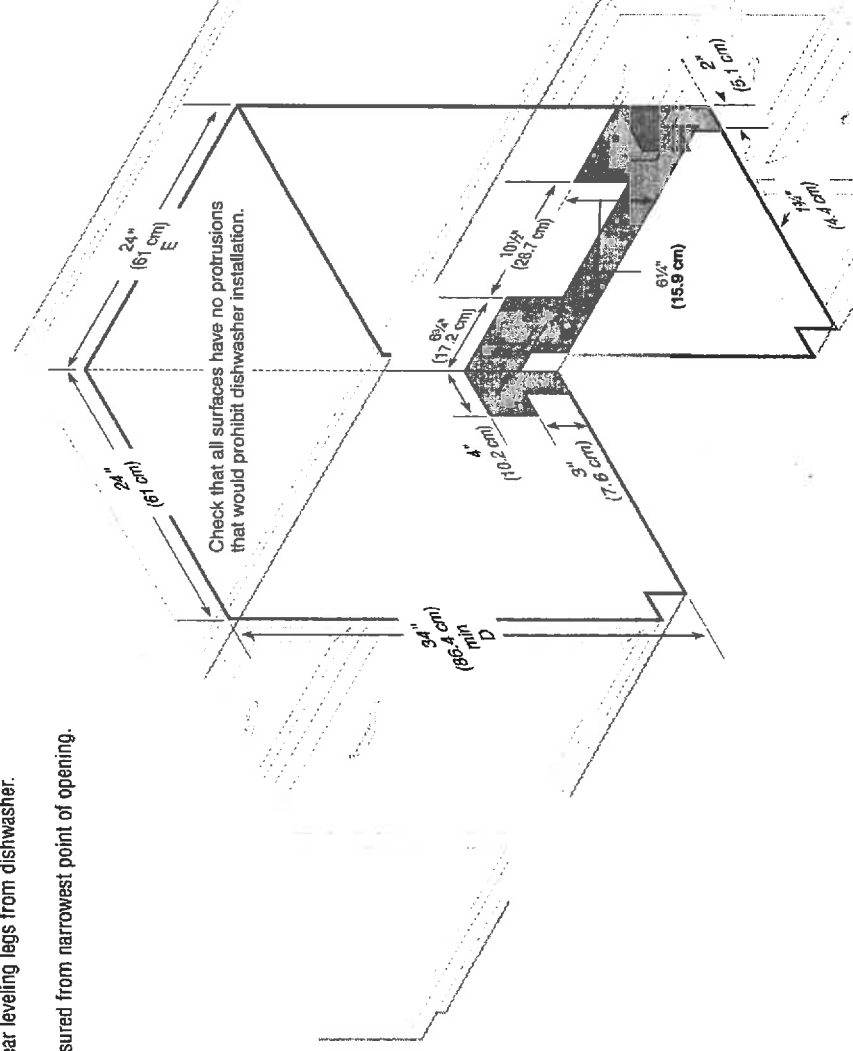

25

PRODUCT MODEL NUMBERS

KRFF507E
KRFF707E

KRFF607E

Electrical: A 115 volt, 60 Hz, AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.


NOTE: If the water pressure is less than what is required, the flow of water from the water dispenser could decrease or ice cubes could be hollow or irregular shaped.

Reverse Osmosis Water Supply:
IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).


Bottom Mount Refrigerator

PRODUCT DIMENSIONS

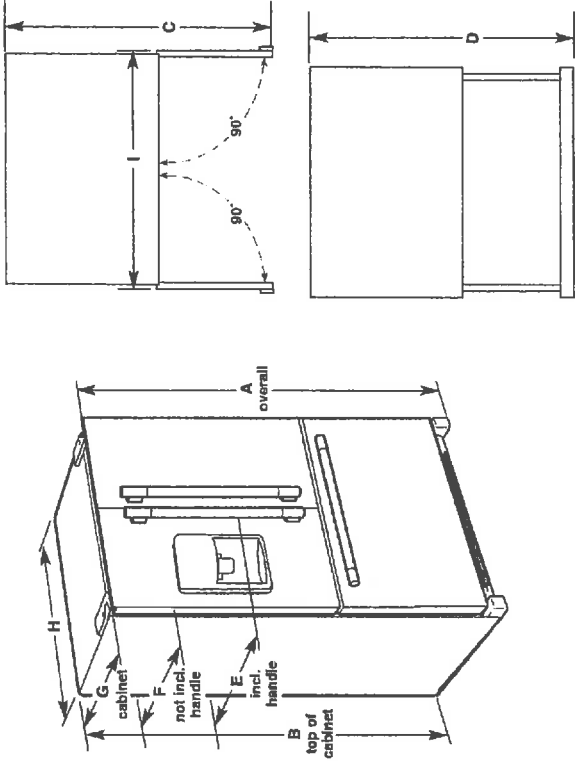

Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
26.8	70 3/4"	68 3/4"	49"	54 1/2"	36 3/4"	34"	29 1/4"	35 5/8"	39 3/8"

LOCATION REQUIREMENTS

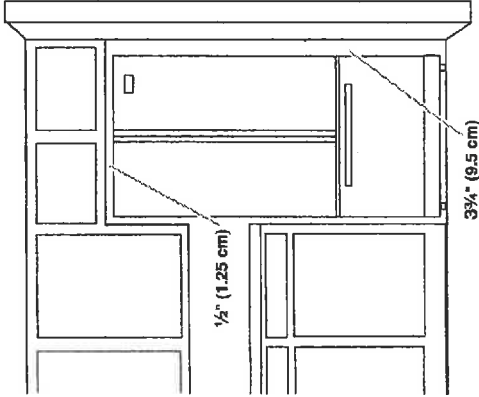

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) of space on each side and at the top. Allow for a 1" (2.54 cm) space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 3/4" (9.5 cm) minimum space between the refrigerator and wall to allow the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

all
SB

Mobile Home - Additional Installation Requirements

The installation of this range must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home Construction and Safety, Title 24, HUD Part 280). When such standard is not applicable, use the Standard for Manufactured Home Installations, ANSI A225.1/NFPA 501A or with local codes.

In Canada, the installation of this range must conform with the current standards CAN/CSA-A240-latest edition, or with local codes.


Mobile Home Installations Require:

- When this range is installed in a mobile home, it must be secured to the floor during transit. Any method of securing the range is adequate as long as it conforms to the standards listed above.

Product Dimensions

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

Model KSGB900

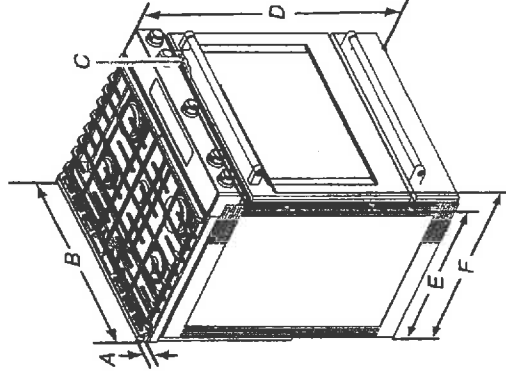

- A. 1 $\frac{3}{8}$ " (3.0 cm) height from cooktop to top of vent
- B. 29 $\frac{7}{8}$ " (75.9 cm)
- C. Model/serial/rating plate (located behind the oven door on the top right-hand side of the oven frame)
- D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed in all the way

- E. 28 $\frac{5}{8}$ " (71.9 cm) max. depth from front of console to back of range
- F. 28 $\frac{7}{8}$ " (73.3 cm) max. depth from handle to back of range

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

DP

ALZ

Cabinet Dimensions


Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

Range may be installed next to combustible walls with zero clearance.

NOTE: When installed in a slide-in cutout, the front of oven door may protrude beyond the base cabinet.

Slide-In Cutout

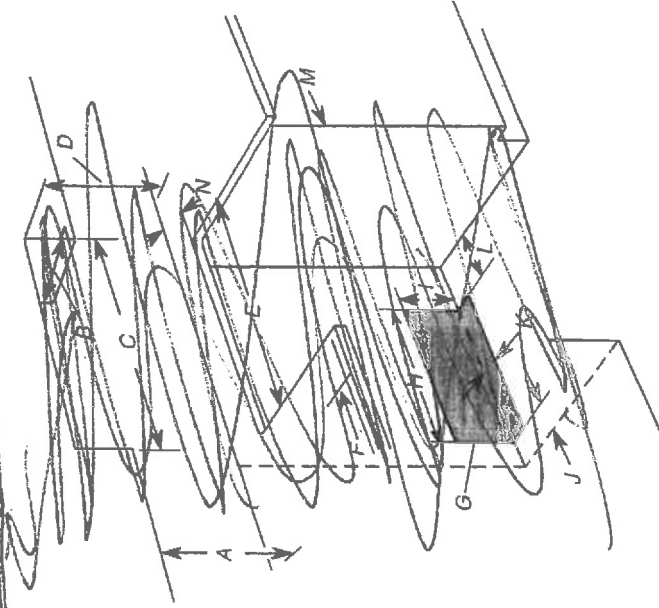


- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE*
- E. 30" (76.2 cm) min. opening width
- F. 3" (7.6 cm) min. clearance from both sides of range to side wall or other combustible material
- G. The shaded area is recommended for installation of rigid gas pipe and grounded outlet.
- H. 13 1/8" (33.3 cm)
- I. 7 1/8" (19.5 cm)
- J. 4 1/8" (12.2 cm)
- K. 3 1/8" (9.4 cm)
- L. 12" (30.5 cm)
- M. Cabinet door or hinges should not extend into the cutout.
- N. Remaining cutout depth should not exceed 2 1/4" (5.7 cm).

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is shielded by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Freestanding Cutout

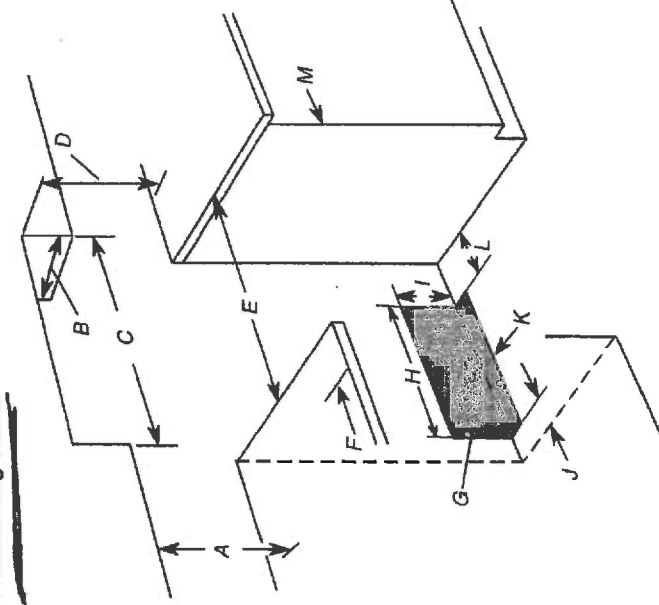

- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE*
- E. 30" (76.2 cm) min. opening width
- F. 3" (7.6 cm) min. clearance from both sides of range to side wall or other combustible material
- G. The shaded area is recommended for installation of rigid gas pipe and grounded outlet.
- H. 13 1/8" (33.3 cm)
- I. 7 1/8" (19.5 cm)
- J. 4 1/8" (12.2 cm)
- K. 3 1/8" (9.4 cm)
- L. 12" (30.5 cm)
- M. Cabinet door or hinges should not extend into the cutout.