



Specifications for Project

ESQUIRE FRESH - LOT 54 - SPECS FOR:

- BUILT IN FRIDGE
 - BUILT IN WALL OVEN
 - COOKTOP
- 16 pgs

Location

Vaughan

905-303-6909

Approved by Purchaser
Feb. 7/23 elm

i REMINDER: To ensure a smooth project it is the responsibility of the homeowner / purchaser of appliances for this project to share all the attached specifications to ensure the cabinet provider, contractor, or any other tradesperson have all the information required to complete their work accurately.

Specifications are subject to change. If any tradesperson has questions regarding the attached specifications please contact our sales associate.

Integrated Refrigerator Freezer, 36", Ice

Series 7 | Integrated
Panel Ready | Right Hinge




Choose a roomy refrigerator with ice maker. Fits flush with your custom cabinetry or with our stainless steel panels.

- ActiveSmart™ technology helps keep food fresher for longer by constantly maintaining the ideal temperature
- Customize with your own kitchen cabinetry or purchase our stainless steel door panel accessory
- Spacious bottom freezer with full extension drawer, and Internal ice maker with boost for busy times
- Can be fitted for a height of 80 or 84 inches

DIMENSIONS

Height	79 13/16"
Width	35 1/16"
Depth	23 3/4"

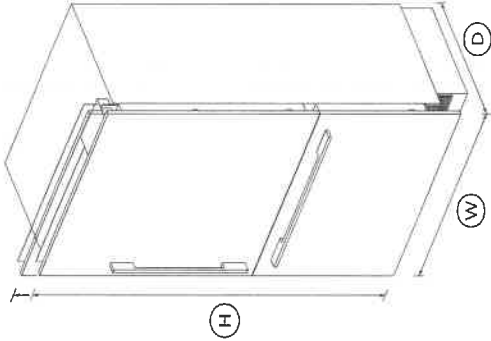

FEATURES & BENEFITS

ACTIVESMART™ FOODCARE

ActiveSmart™ Foodcare learns how you live. It's technology which understands how you use your refrigerator and adjusts temperature, airflow and humidity inside to help keep food fresher for longer.

CLEVER ENERGY

Your refrigerator adapts to daily use by cooling and defrosting only when needed. This means your refrigerator uses the energy it needs without compromising on food care.

COMPLEMENTARY DESIGN

With their premium handle styling and stainless steel finish, our refrigerators are designed to match the rest of Fisher & Paykel's kitchen appliance family.

ICE MAKER

Fresh ice is always available for you in a dedicated freezer bin. Simply turn it off to free up freezer space or during busy times, you can boost ice production by up to 30%.

EASY CLEANING

No more permanent dirty marks with our EZKleen feature for stainless steel refrigerators. Anti-fingerprint coating means you simply wipe clean any marks. Spill-safe secure glass shelves easily capture any drips or leaks.

SIMPLE STORAGE

This refrigerator is designed to make it simple for you to store, access and remove food. Storage bins give you full access inside when they're pulled open and can be easily removed to clean. Our flexible shelving also gives you more storage options.

EASY INSTALLATION

Our integrated products are easy to install, whether you are renovating your kitchen or designing a new one. Our refrigerators are designed for minimal gaps with adjustable front and rear feet to allow for uneven floors alongside adjustable door panels that can be customized to match your kitchen.

SPECIFICATIONS

Accessories

Contemporary round handle	AHS-ASBI-B
Contemporary square handle	RS36W
Joiner kit	RS80
Matching Replacement Water	FWC3
Professional round flush handle	AHP3RD36W
Professional round handle kit	AHCRS36W

Professional square handle kit	AHV2RS36W
Square fine aluminium handle	AHD5RD36W
Square fine black handle kit	AHD5RD36WB
Stainless steel door panel	80" Right hinge RD3680WR,

Capacity

Volume	16.8cu ft
Volume freezer	5.1cu ft
Volume refrigerator	11.7cu ft

Consumption

Energy rating	Energy star
Energy usage	534kWh/year

Features

Adjustable door shelves	6
Adjustable glass cantilevered	•
Adjustable glass shelves	3
Covered door shelves	2
Deli storage bins	1
Door alarm	•
Fruit and vegetable bins	2
LED lighting	•
SmartTouch control panel	•
Stackable bottle holders	4
Wi-Fi connectivity	•

Freezer Features

Automatic ice maker	•
Bottle chill	•

Drawer alarm	•
Fast freeze	•
Freezer bins	2
Ice Boost	•
LED lighting	•
Slide Out Pastry Tray	•

Performance

ActiveSmart™ Foodcare	•
Adaptive defrost	•
Frost free freezer	•
Humidity control system	•
Inverter controlled compressor	•
Sabbath mode	•

Power requirements

Rated current	10A
Supply frequency	60Hz
Supply voltage	115V

Product dimensions

Depth	23 3/4"
Height	79 13/16"
Width	35 1/16"

Product information

Unpackaged weight	327lbs
-------------------	--------

Warranty

Parts and labor	2 years
-----------------	---------

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, those dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. ? Fisher & Paykel Appliances Ltd 2020

Other product downloads available at fisherpaykel.com

- [↓](#) User Guide
- [↓](#) Energy Label
- [↓](#) Service & Warranty
- [↓](#) Installation Guide
- [↓](#) Installation Guide
- [↓](#) Install Guide - Water Filter Replacement
- [↓](#) Dual Installation Guide
- [↓](#) Data Sheet Integrated Fridge Freezer
- [↓](#) Planning Guide Integrated Fridge Freezer

24/7

A PEACE OF MIND SALE


24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 www.fisherpaykel.com


4 APPLIANCE AND CAVITY DIMENSIONS

IMPORTANT!

For ease of installation, ensure cavity width is consistent top to bottom and height is consistent left to right.

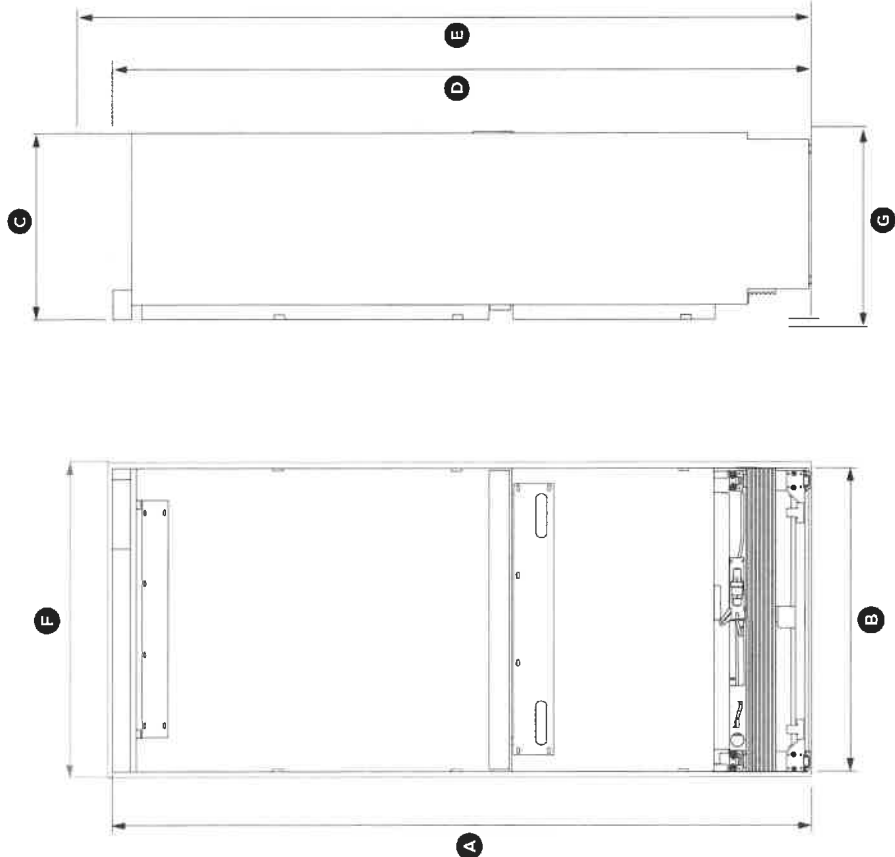

PLAN VIEW

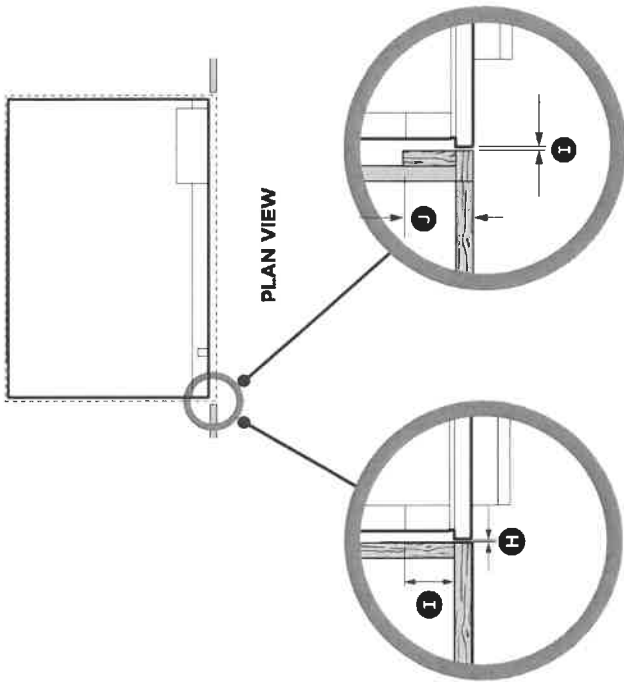

Flush install
Frameless: Finished return top and sides
Framed: Finished return top and sides

FRONT VIEW

APPLIANCE DIMENSIONS		Inches	mm
A	Overall height of appliance*	79 13/16"	2028
B	Overall width of appliance	35 1/16"	890
C	Overall depth of appliance (without door panels)	23 3/4"	606


PROFILE VIEW

CAVITY DIMENSIONS		Inches	mm
D	Overall height of cavity (for appliance using RD3680 door panel set)	80"	2032
E	Overall height of cavity (for appliance using RD3684 door panel set)	84"	2134
F	Overall width of cavity	36"	914
G	Overall depth of cavity	25"	635
H	Minimum cabinetry gap clearance from edge of appliance	3/16"	4
I	Minimum required finished return	min. 3 1/2"	min 89


* Includes mounted feet

5 CABINETY OPTIONS

FRAMELESS CABINETY
(Aligns the appliance with the cabinetry)

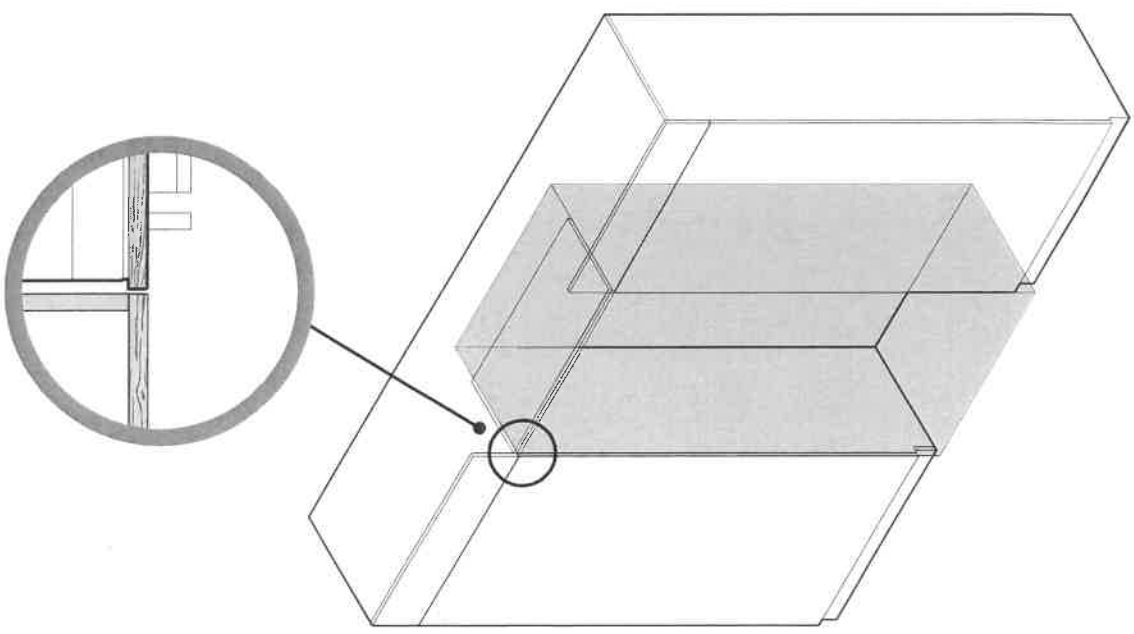


FRAMED CABINETY
(Aligns the appliance with the frame of the cabinetry)

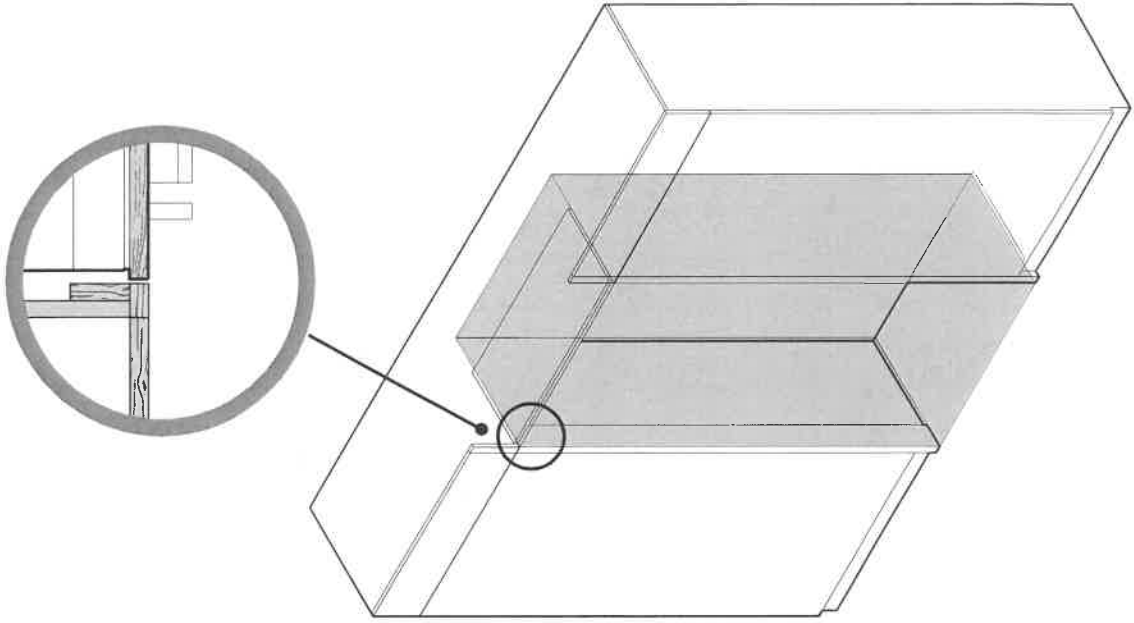

Note: Drawings are only for reference and not the actual cavity width of the cabinetry.

6 STAINLESS STEEL DOOR PANEL AND TOE KICK DIMENSIONS

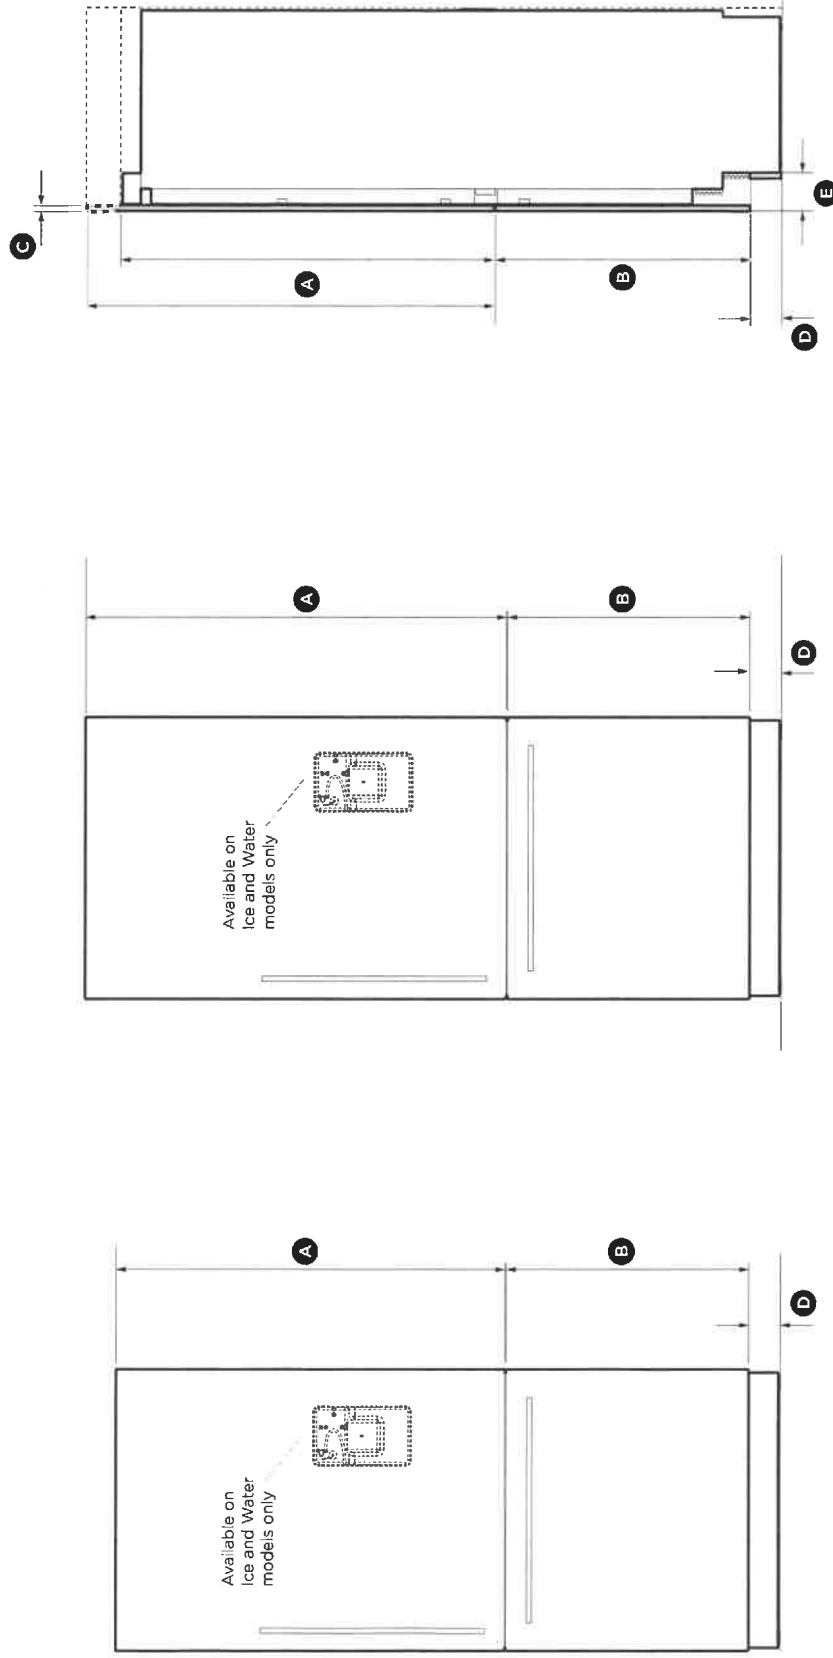

DOOR PANEL SET
RD3680/RD3680RU

DOOR PANEL SET
RD3684/RD3684RU

DOOR PANEL SETS DIMENSIONS			TOE KICK PANEL DIMENSIONS		
				Inches	mm
A	Height of top door panel		Height of toe kick panel	4"	102
B	Height of bottom drawer panel		Depth of toe kick (measured from front of door panels)	4 3/4"	120
C	Depth of appliance front panels (excluding handles)				

Note:


- Stainless steel toe kick, height 4" (102mm) is supplied with the appliance.
- Customers need to supply their own custom toe kick, height 4 - 6" (102 - 152mm).
- For toe kick greater than 4" (102mm), shorten the height of the bottom grille accordingly. Refer to 'Toe kick installation' for more information.

- Optional Fisher & Paykel Stainless steel front panels. Model no. RD3684/RD3680 (Non-water dispensing model) and model no. RD3684U/RD3680U (Ice and Water model).

7/16

7 CUSTOM DOOR PANEL AND TOE KICK DIMENSIONS

IMPORTANT!
Custom door/drawer panels are only
applicable for Ice only models.

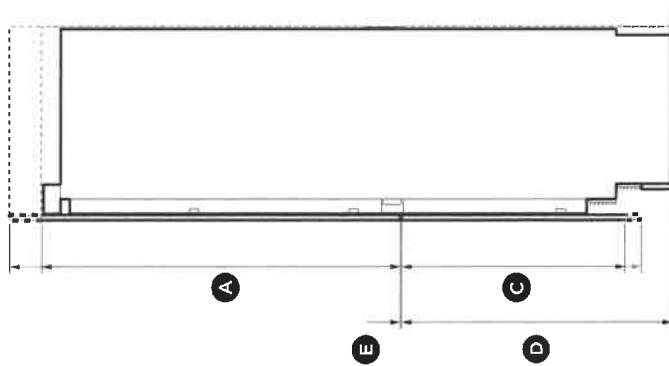


PROFILE VIEW

CUSTOM PANEL DIMENSIONS		Inches	mm
A	Height of top door panel	45 1/4 - 49 5/16"	1150 - 1252
B	Width of top door and bottom drawer panel	35 11/16"	906
C	Height of bottom drawer panel	28 3/8 - 30 3/8"	722 - 772
D	Height from bottom of appliance to top of bottom drawer panel	34 3/8"	874
E	Gap between top door panel and bottom drawer panel	3/16"	4
F	Height of toe kick panel*	4 - 6"	102 - 152
G	Depth of custom panels	5/8 - 1"	16 - 25
DOOR PANEL WEIGHT		lbs	kg
Maximum weight of top door panel (with handles)		44	20
Maximum weight of bottom drawer panel (with handles)		24 1/4	11



* Custom toe kick should be designed at 4 - 6" (102 - 152mm) relative to door/drawer panel height.

- Note:
- Custom door panels and toe kick must be supplied by the customer.
 - For toe kick greater than 4, shorten the height of the bottom grille accordingly. Refer to 'Toe kick installation' for more information.

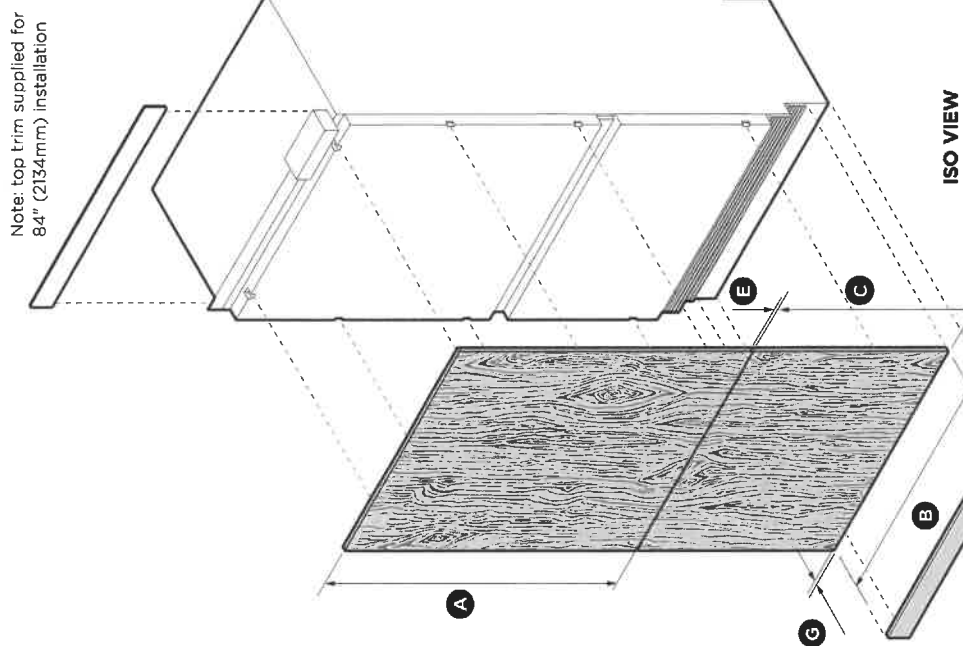

Note: top trim supplied for
84" (2134mm) installation

10 DOOR CLEARANCE

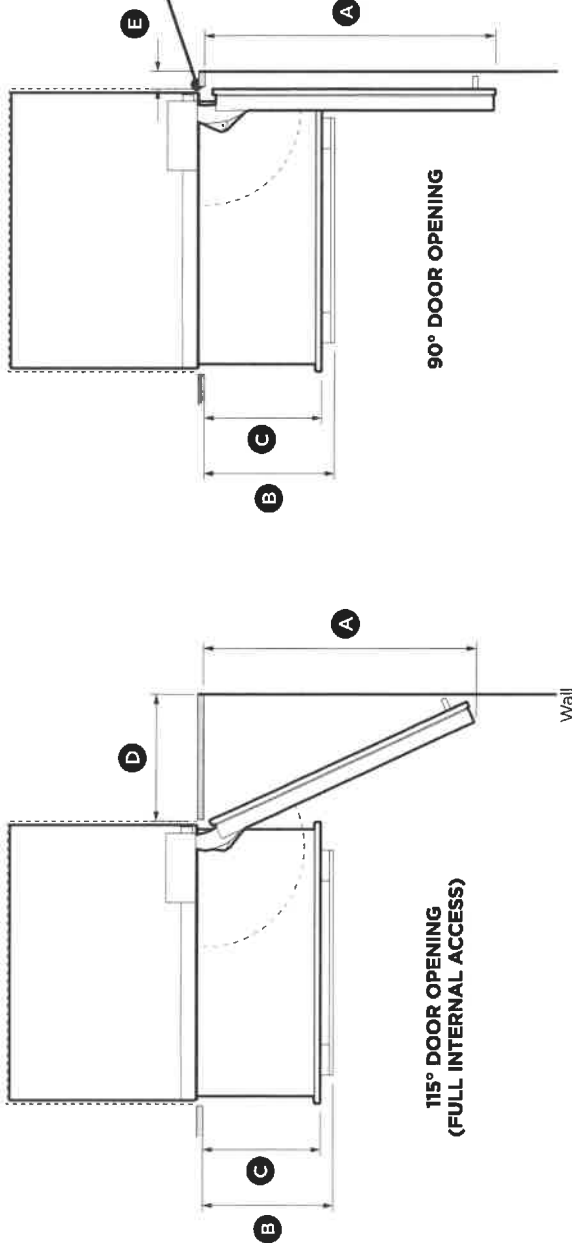

Insert hinge limiting pin

WARNING!

- Before opening the doors, ensure that the appliance is stable.
- Follow these steps to avoid risks that can cause serious injury or death.

For 90° door swing, a hinge limiting pin is supplied with your appliance. This pin fits in the boreholes of the top hinge.

- 1 Open door to 90°.
- 2 Insert the hinge limiting pin vertically into the bore hole.
 - Apply a gentle tap to the pin if it does not slide smoothly.

DOOR CLEARANCE DIMENSIONS

	Inches	mm
A Depth of door (widest opening) measured from front of door	37"	940
B Depth of drawer (open) measured from front of drawer, including handle	15 3/4"	400
C Depth of drawer (open) measured from front of drawer, excluding handle	14 3/16"	360
D Minimum door clearance* to adjacent wall (115° — full internal access)	16 1/8"	410
E Minimum door clearance* to adjacent wall (90° — reduced internal access)	4 5/16"	110

* Measured from front cabinetry edge.


11 ELECTRICAL AND PLUMBING

IMPORTANT!


- Electrical connection should be located in an adjacent cabinet to either side of the appliance or above the appliance cavity.
- We recommend to use an isolating switch that is easily accessible to the user after the appliance is installed.

WARNING!

- Electrical shock hazard. Assume all parts are live.
- Disconnect supply before servicing and installation.

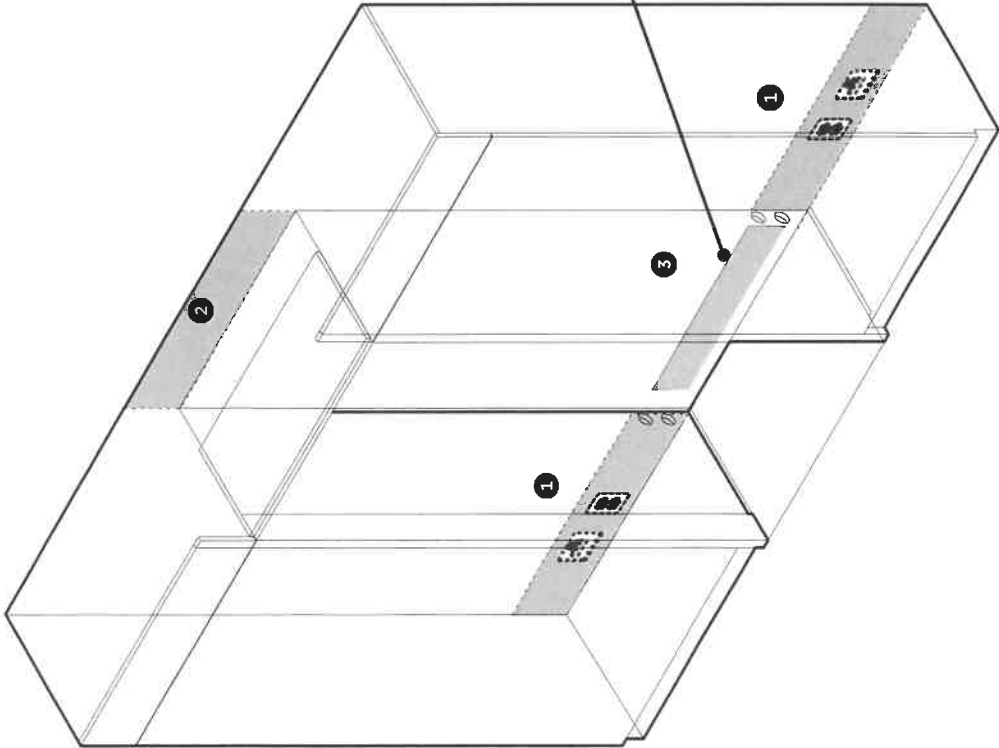

ELECTRICAL AND PLUMBING CONNECTIONS	
1	Recommended location for connections in adjacent area or unit
2	Alternative location for connections above the cavity
3	Alternative location for connections at rear of cavity

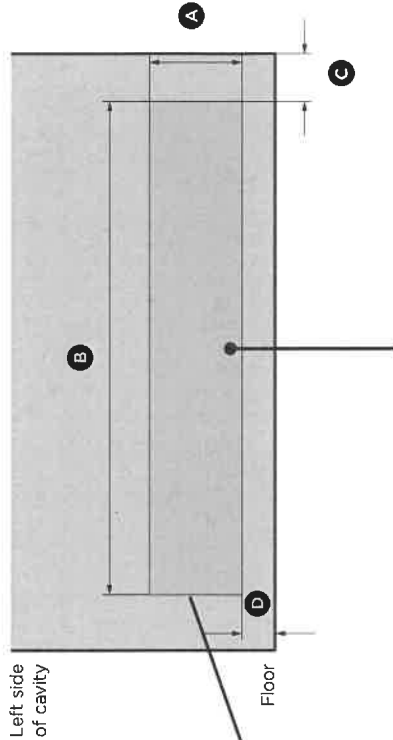


ELECTRICAL AND PLUMBING DIMENSIONS		Inches	mm
A	Overall height of supply area	5 5/8"	143
B	Overall width of supply area	29 3/4"	756
C	Distance from right side of cavity	2 7/8"	73
D	Distance from the floor	2"	51

Note: Dimensions are based on minimum depth of cavity

10/16

11 ELECTRICAL AND PLUMBING

Maximum distance of hose and power cord

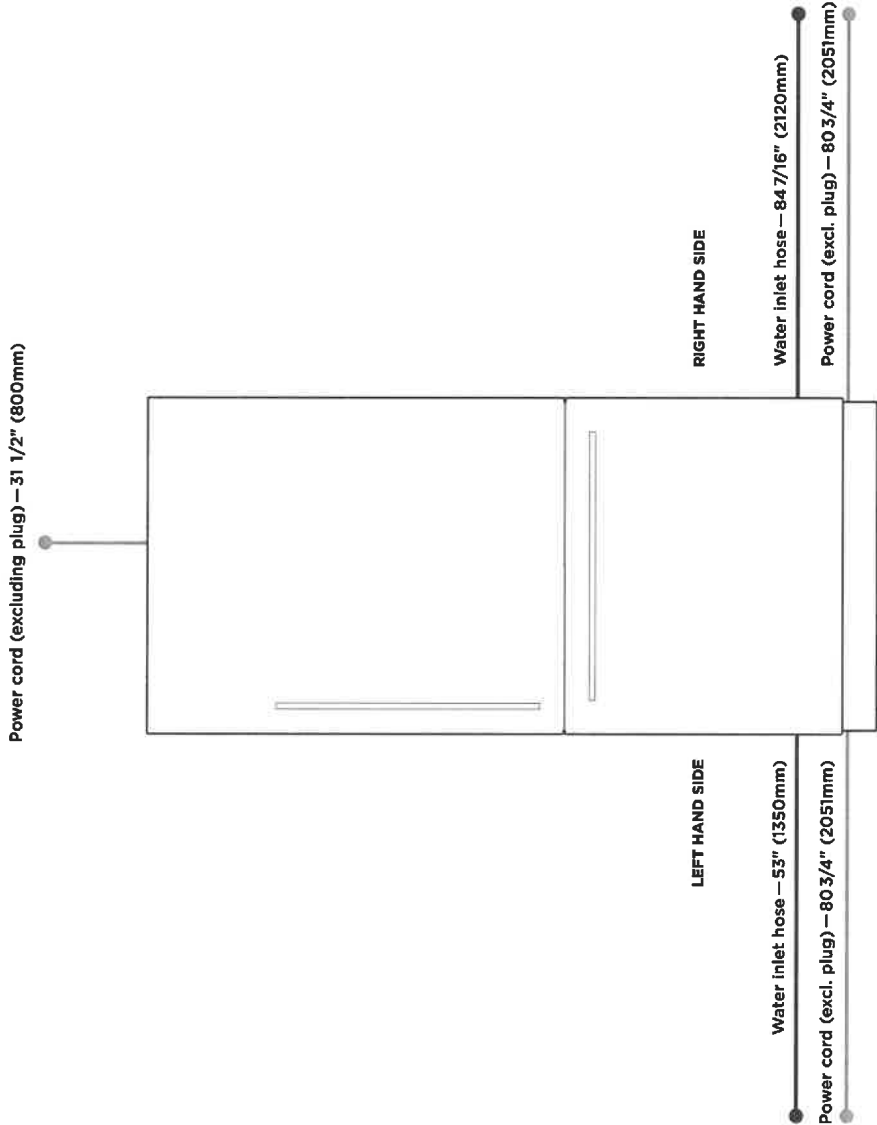

ELECTRICAL SPECIFICATIONS

Supply	115VAC, 60Hz
Service	10 amp circuit

PLUMBING SPECIFICATIONS

Supply	1/4" (6mm) comp. Stainless steel braided hose
Pressure	Minimum 22psi (150kPa) Maximum 120psi (827kPa) @ 68°F (20°C)

11/16

30" Electric Cooktop

800 Series – Black Frameless NET8069UC



BOSCH
Invented for life



NET8069UC
Black

Also available in:

Black with Stainless
Steel Frame

NET8069SUC

The 800 Series electric cooktop is sleek in design, and features SpeedBoost® which adds even more power to speed up the cooking process.

Features & Benefits

Bridge element accommodates oblong pans and many diameters of cookware.

The smooth ceramic glass surface makes cooking and cleaning especially easy.

SpeedBoost® offers shorter heat-up times for liquids.

PreciseSelect® offers 17 different direct cooking level settings.

Element Performance

Power of Front Left heating element	1,800 W
Power of Back Left heating element	1,800 W
Power of Back Right heating element	3,600 / 1,400 W
Power of Front Right heating element	1,200 W

Element Size

Dimension of Front Left heating element	7"
Dimension of Back Left heating element	7"
Dimension of Back Right heating element	9", 6"
Dimension of Front Right heating element	6"

Technical Details

Watts	8,300 W
Circuit breaker	40 A
Volts	208-240 V
Frequency	60 Hz
Plug type	No plug
Energy source	Electric

Dimensions & Weight

Overall appliance dimensions (HxWxD)	4" x 31" x 21 1/4"
Required cutout size (HxWxD)	4" x 28 7/8" x 20"
Minimum distance from counter front	2 1/4"
Minimum distance from rear wall	2"
Net weight	27 lbs

Accessories – Optional



HEZ390210
8" AutoChef® pan



HEZ390220
9" AutoChef® pan



HEZ390230
10" AutoChef® pan



Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

30" Electric Cooktop



800 Series – Black Frameless NET8069UC



BOSCH
Invented for life

13/16

Installation Details

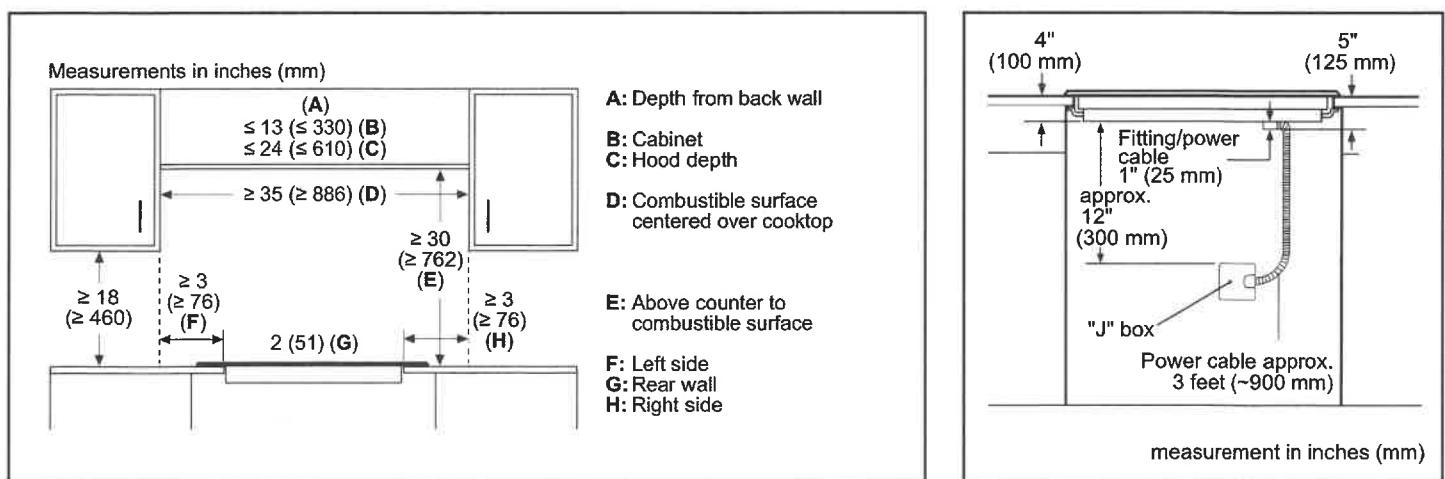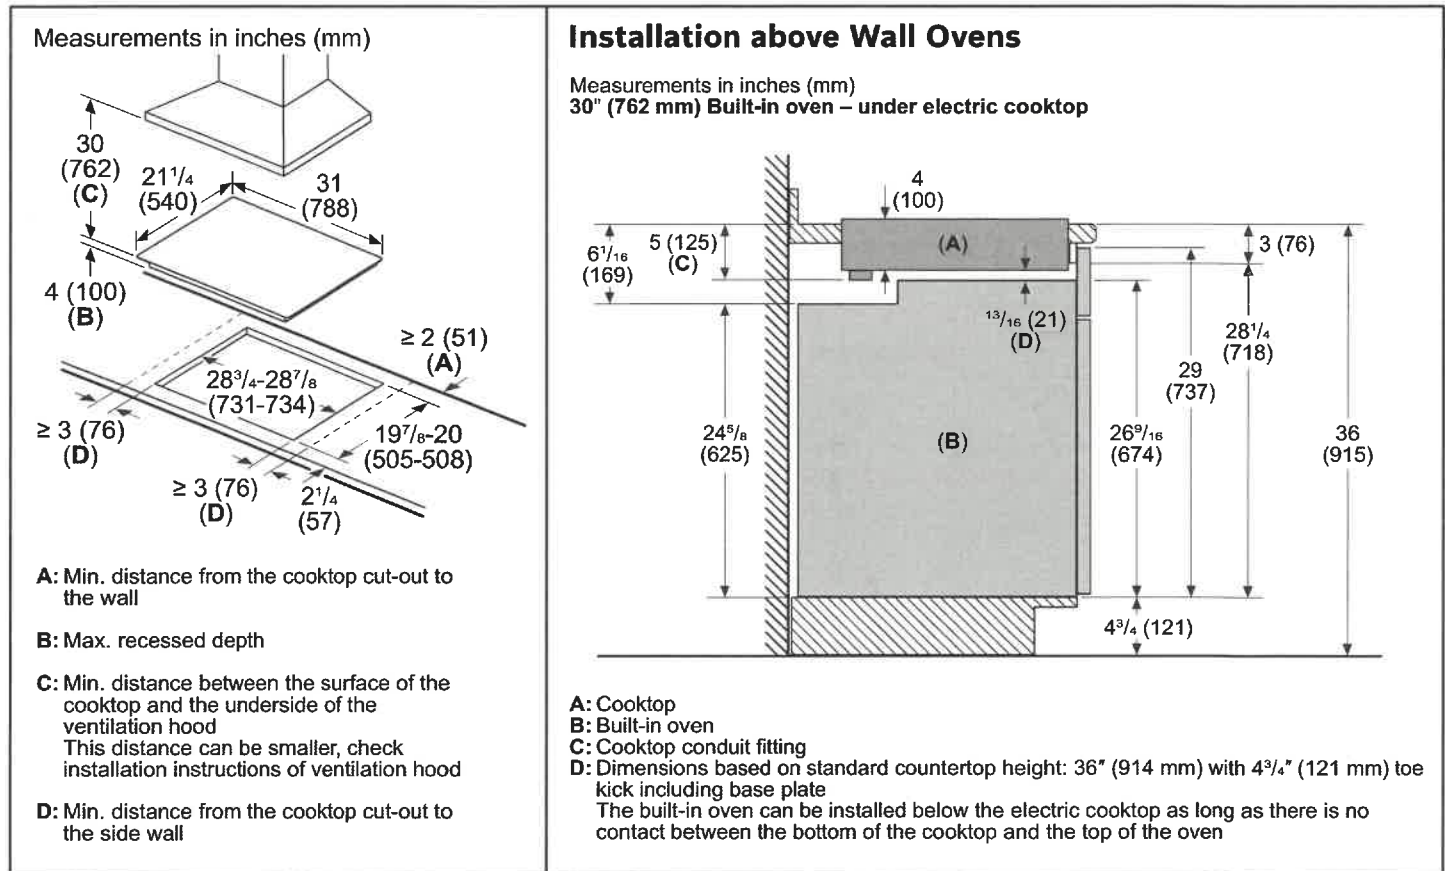

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

30" Speed Combination Oven

Benchmark® Series – Stainless Steel HBLP752UC



HBLP752UC
Stainless Steel

The Bosch speed combination oven allows for faster cooking results and features a QuietClose® door.

Features & Benefits

Cooks Faster than a traditional oven and can be used as a microwave.

Dampened hinges softly and quietly guide the QuietClose® door shut.

The color TFT control panel with SteelTouch® buttons is easy to use.

A full-extension telescopic rack offers safe access to the oven cavity.

The wall oven is designed to be installed flush with cabinetry.

General Properties

Cooking modes – upper cavity Speed oven; TFT display, 12 Auto Programs (including Auto Defrost, Melt Butter, Soften Ice Cream, Pizza), 9 Sensor Cook Programs, 9 SpeedChef® Programs, Hi & Lo Broil, European Convection, Keep Warm, Frozen Foods

Cooking modes – lower cavity Bake, Variable Broil (hi & low), Roast, Warm, Sabbath, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Pizza, Multi Rack Genuine European Convection, Convection Conversion, AutoProbe, Fast Preheat, EcoChef, Speed Convection (Frozen Foods)

Cleaning type – lower Self Clean

Telescopic rack 1

Illumination type LED (Upper) / Halogen (Lower)

Interior lights 1 Upper / 2 Lower

Oven Performance

Microwave power – upper cavity 1000 W

Bake / broil element wattages – upper cavity 600 / 1,750 W

Convection element wattages – upper cavity 1,700 W

Bake / broil element wattages – lower cavity 2,400 / 3,800 W

Convection element wattages – lower cavity 1700 W / 2000 W

Technical Details

Watts (W) 9,600 W

Circuit breaker (A) 40 A

Volts (V); Frequency (Hz) 240 / 208 V; 60 Hz

Power cord length (in) 50"

Plug type Fixed Connection, No Plug

Energy source Electric

Dimensions & Weight

Overall appliance dimensions (HxWxD)(in) 49" x 29 3/4" x 24 1/2"

Required cutout size – Standard (HxWxD) (in) 48 5/8" x 28 1/2" x 23 1/2"

Required cutout size – Flush (HxWxD) (in) 49 1/8" x 30" x 24 1/2"

Oven cavity size – upper 1.6 cu. ft.

Overall upper oven interior dimensions (HxWxD) (in.) 9 7/8" x 16 1/2" x 16 1/2"

Turntable – Metal Max. Cookware – upper 12 3/4" dia.

Turntable – Ceramic Max. Cookware – upper 12 1/2" dia.

Rack – Rectangular Cookware Max. – upper 15" x 12"

Oven cavity size – lower 4.6 cu. ft.

Overall lower oven interior dimensions (HxWxD) (in) 17 13/16" x 24 1/8" x 18"

Usable lower oven interior dimensions (HxWxD) (in) 12 5/16" x 23 1/4" x 15 1/4"


Net weight (lbs) 259 lbs

Accessories—Included

Upper Oven: Metal Turntable, Square rack, Ceramic Cooking Tray

Lower Oven: 1 Telescopic and 2 Standard Oven Racks, Temperature Probe, Broiler Pan

Accessories—Optional



HEZTR301
30" Telescopic Rack



Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

15/16

30" Speed Combination Oven


Benchmark® Series – Stainless Steel HBLP752UC




BOSCH
Invented for life



Installation Details

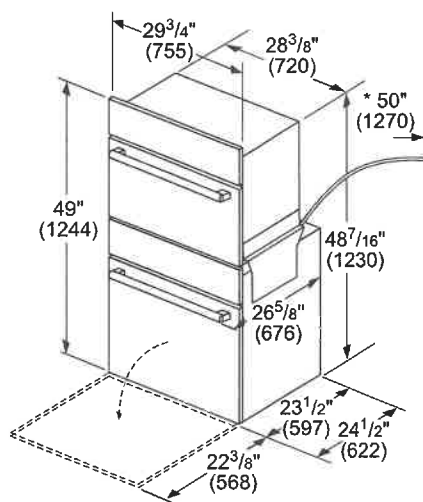


* Power cable 50" (1270 mm) from the lower oven.

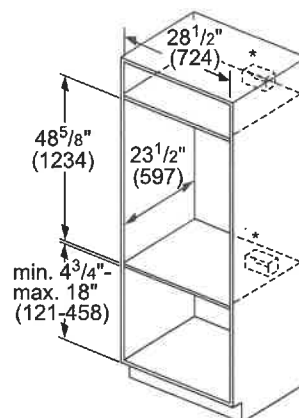


* Junction box may be installed above, below, or to the left or right of the unit within reach of the power cable


measurements in inches (mm)

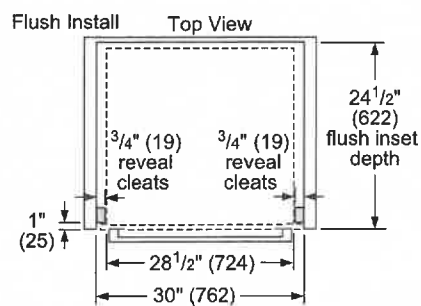

Side View

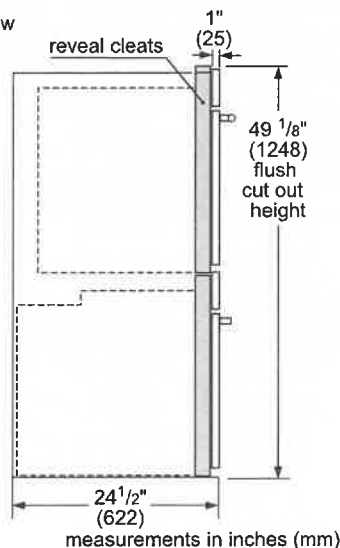

measurements in inches (mm)

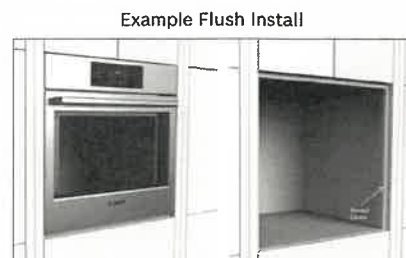

Single wall oven shown.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

06/20

30" Speed Combination Oven

Benchmark® Series – Stainless Steel HBLP752UC




BOSCH
Invented for life



Installation Details

Standard Installation
Combination Oven over Storage or Warming Drawer

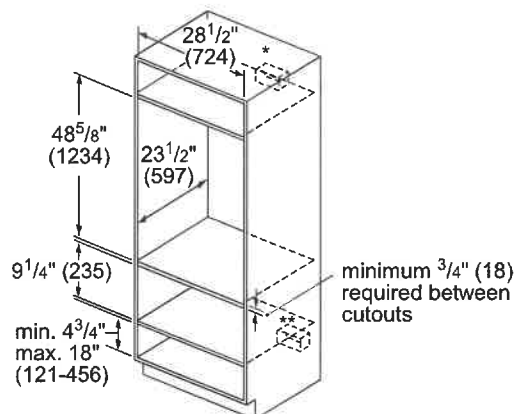


* Wall oven junction box may be located above or right or left of the unit within reach of the power conduit.

** Electrical hook up may be located below (depending on space) or next to the drawer within the reach of the power cord.

Measurements in inches (mm)

Flush Installation
Combination Oven over Storage or Warming Drawer

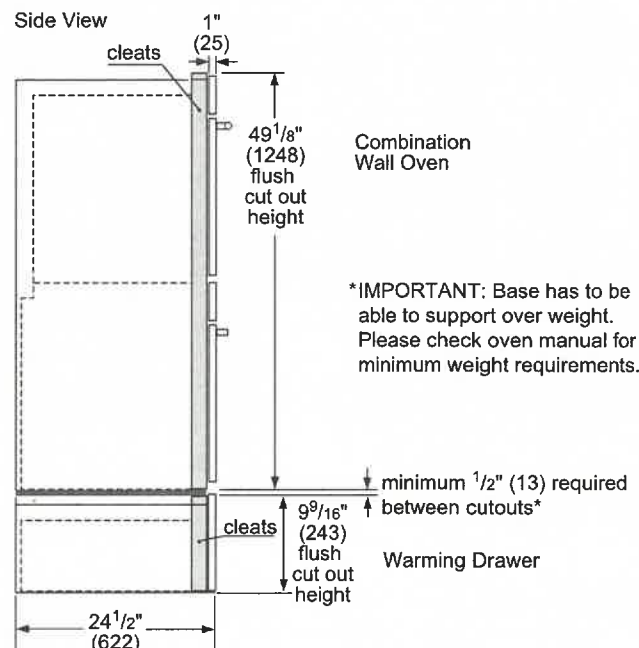

*IMPORTANT: Base has to be able to support over weight. Please check oven manual for minimum weight requirements.

Measurements in inches (mm)

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.