


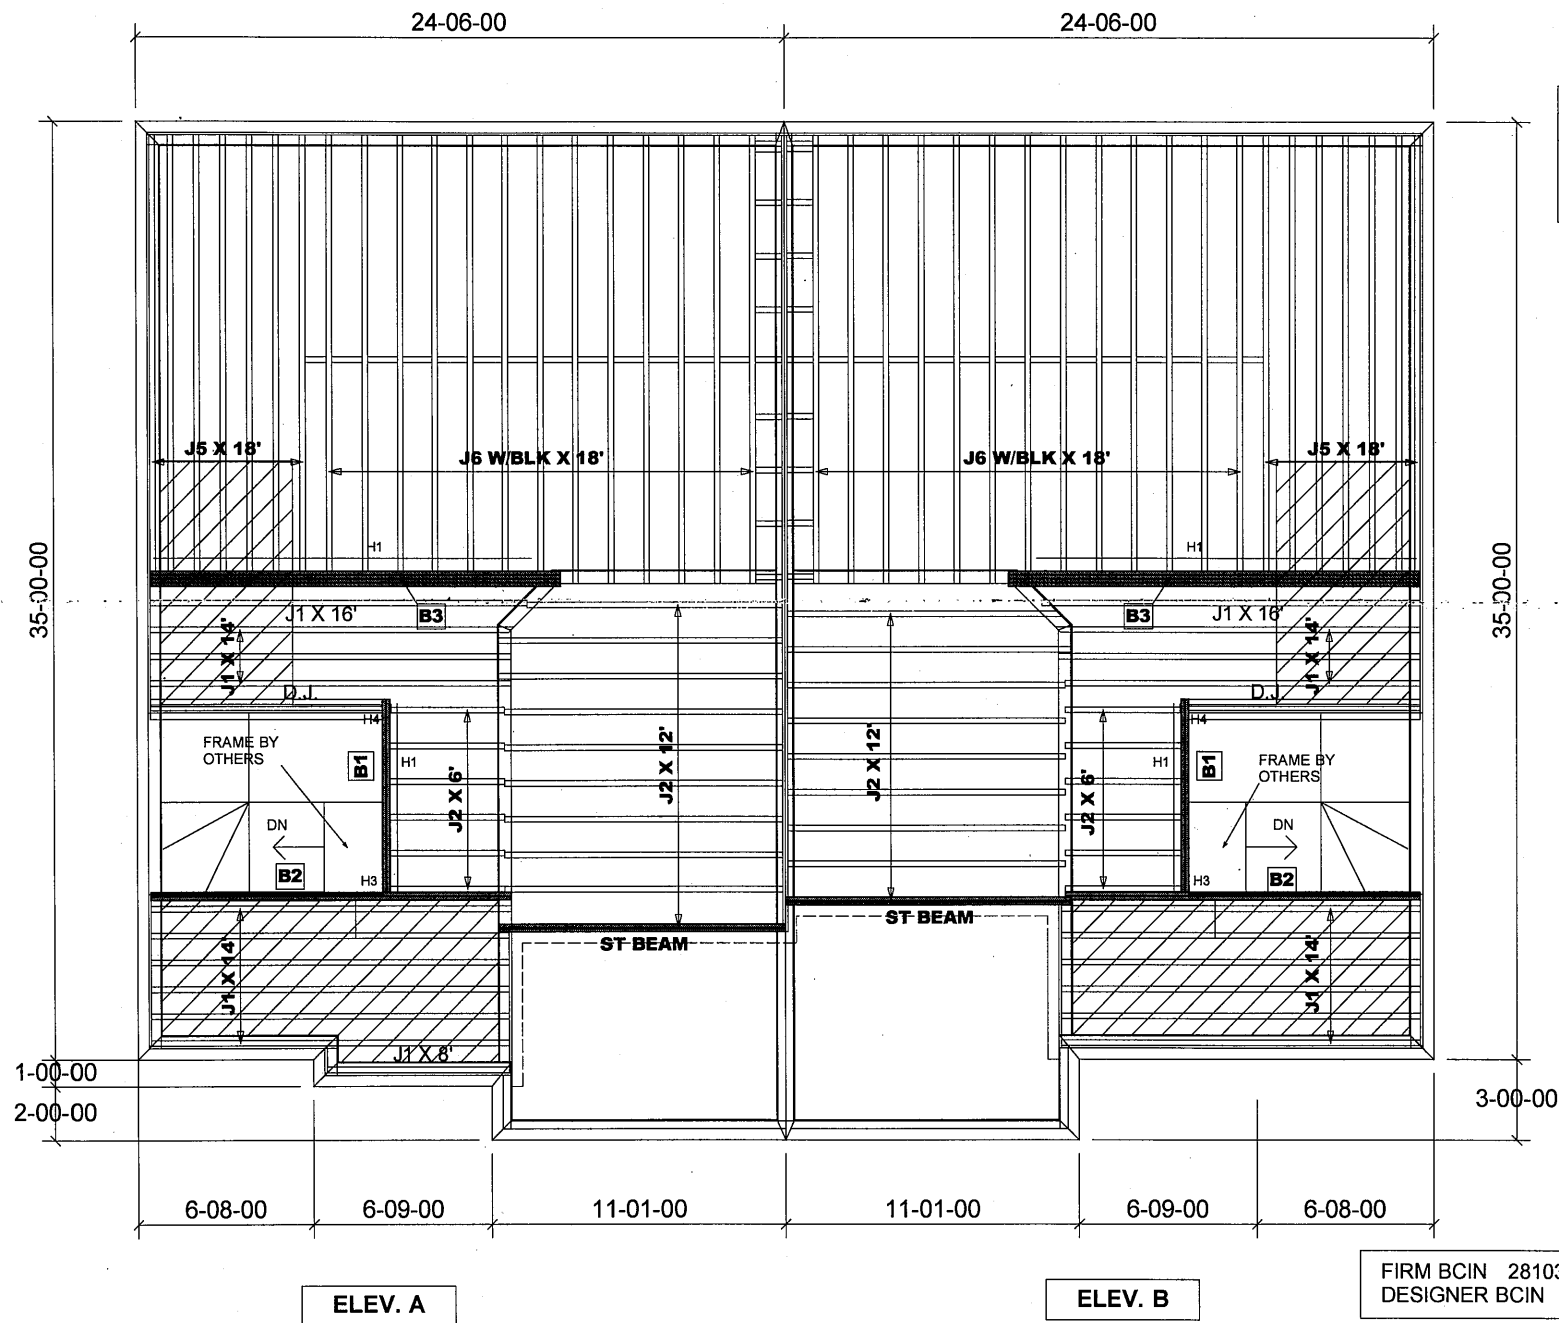

Products				
PlotID	Length	Product	Plies	Net Qty
B3	16-00-00	VERSALAM-10 2.0E	4	8
B2	14-00-00	VERSALAM-10 2.0E	2	4
B1	8-00-00	VERSALAM-10 2.0E	2	4

JOIST SCHEDULE

J1 - 9 1/2" NI-20 @ 12" O/C
 J2 - 9 1/2" NI-20 @ 16" O/C
 J5 - 9 1/2" NI-40X @ 12" O/C
 J6 - 9 1/2" NI-40X @ 16" O/C

BLK - W/MID-SPAN BLOCKING

SUBFLOOR - 5/8" NAILED & GLUED

HANGER SCHEDULE

H1-----LT259 (TM)
 H3-----HGUS410(FM)
 H4-----MIT39.5-2 (TM)

NOTE:

TM-----TOP MOUNT HANGERS
 FM-----FACE MOUNT HANGERS

Ceramic Tile



RIMBOARD

1- 1/8" X 9 1/2" O.S.B.

APP - AS PER PLAN
 BBO - BEAM BY OTHERS

JOIST SPACING UNDER CERAMIC TILE IS 12" O.C.

Second Floor Framing

Do not scale - refer to architectural plans for dimensions

MODEL: SD - 1

FIRM BCIN 28103
 DESIGNER BCIN 23991

JT: 39002/103050
 LI: 310415(244615)


Builder: Gold Park
 Project: Mclaughlin and Mayfield

Location: Brampton
 Date: July 3, 2019

Designer: NL
 Sheet: 1 of 4

Alpa Roof Trusses Inc.
 Maple, Ontario

Salesperson: Derek
 Home Lumber

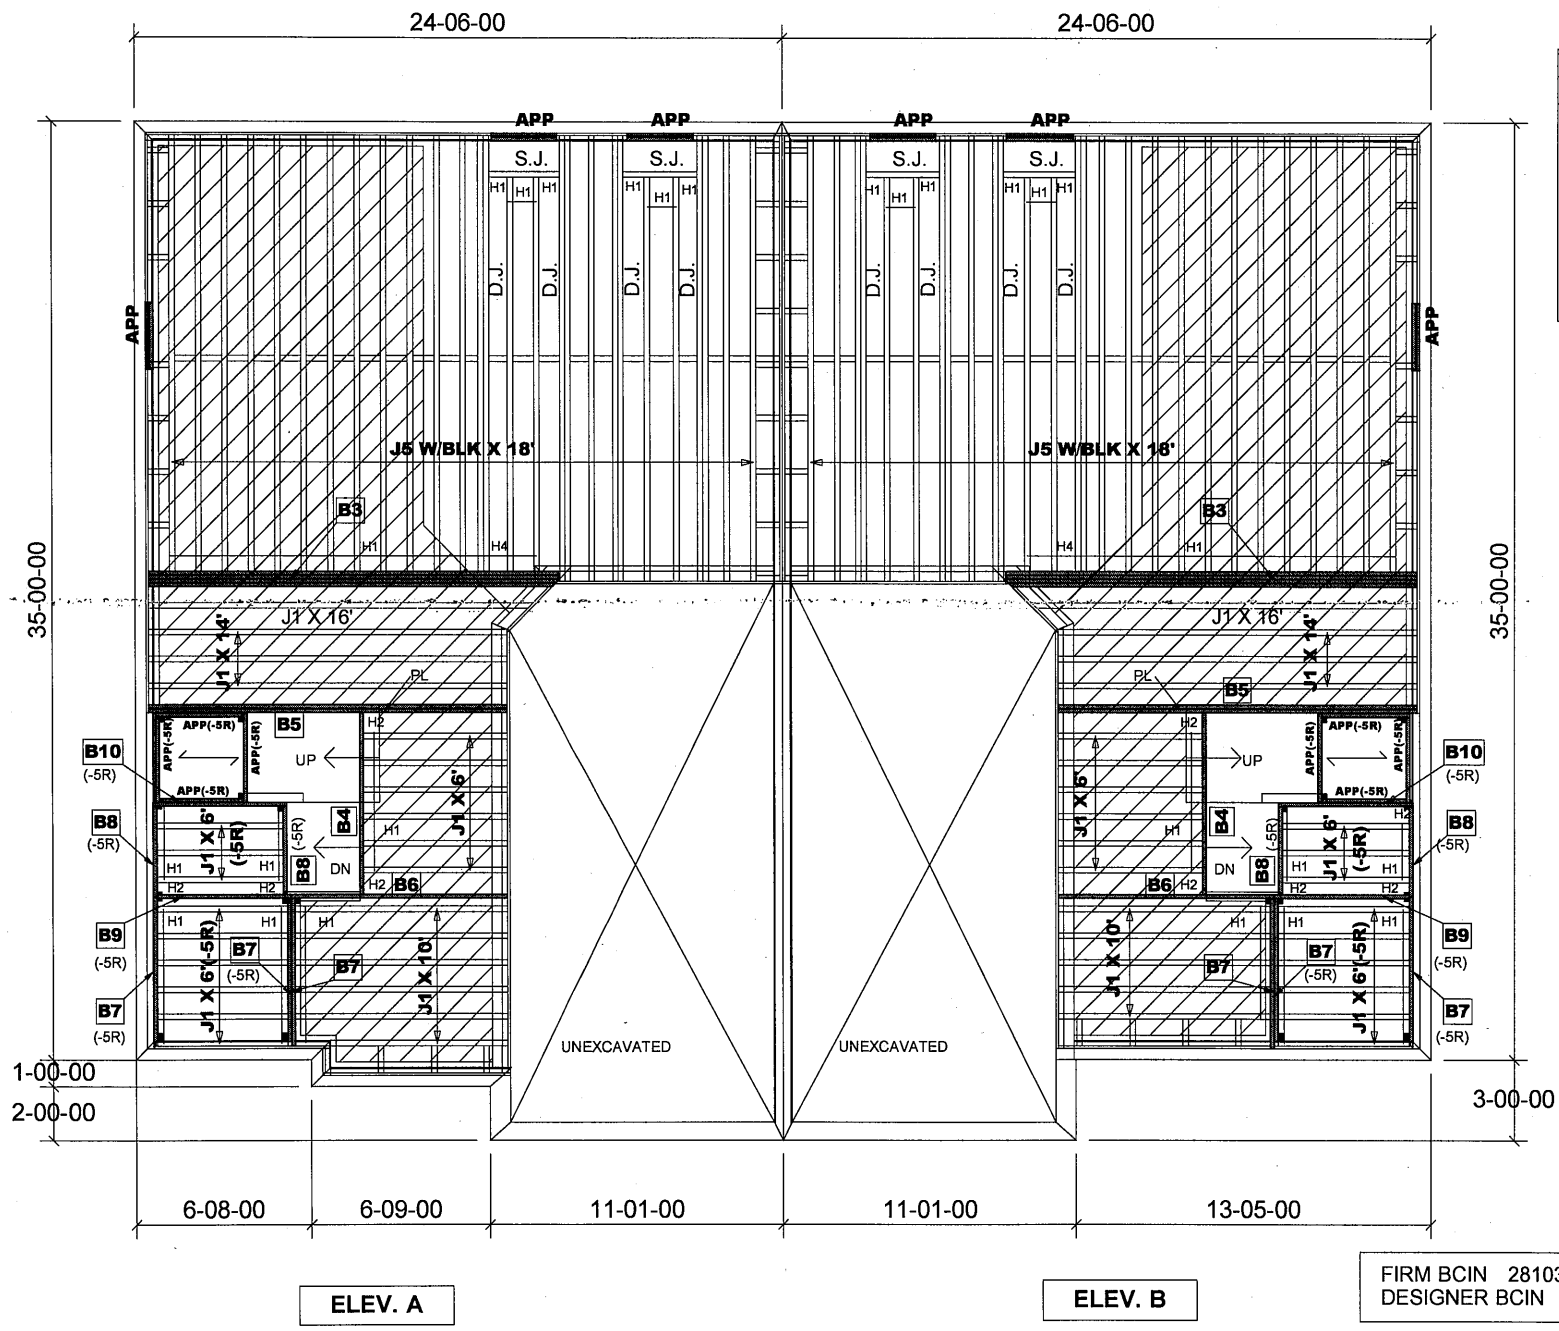

Products				
PlotID	Length	Product	Plies	Net Qty
B3	16-00-00	VERSALAM-10 2.0E	4	8
B5	14-00-00	VERSALAM-10 2.0E	2	4
B6	9-00-00	VERSALAM-10 2.0E	1	2
B4	7-00-00	VERSALAM-10 2.0E	1	2
B10	6-00-00	VERSALAM-10 2.0E	1	2
B7	6-00-00	VERSALAM-10 2.0E	1	6
B9	6-00-00	VERSALAM-10 2.0E	1	2
B8	4-00-00	VERSALAM-10 2.0E	1	4

JOIST SCHEDULE

J1 - 9 1/2" NI-20 @ 12" O/C
J5 - 9 1/2" NI-40X @ 12" O/C

BLK - W/MID-SPAN BLOCKING

SUBFLOOR - 5/8" NAILED & GLUED

HANGER SCHEDULE

H1-----LT259 (TM)
H2-----HUS1.81/10(FM)

NOTE:
TM-----TOP MOUNT HANGERS
FM-----FACE MOUNT HANGERS

Ceramic Tile

RIMBOARD
1- 1/8" X 9 1/2" O.S.B.

APP - AS PER PLAN
BBO - BEAM BY OTHERS

JOIST SPACING UNDER CERAMIC TILE IS 12" O.C.


1- 2X6 SPF#2 Squash Block req'd on one side of each joist under interior load bearing walls. Multiple Squash Blocks are req'd under concentrated loads.

First Floor Framing

Do not scale - refer to architectural plans for dimensions

FIRM BCIN 28103
DESIGNER BCIN 23991

MODEL: SD - 1

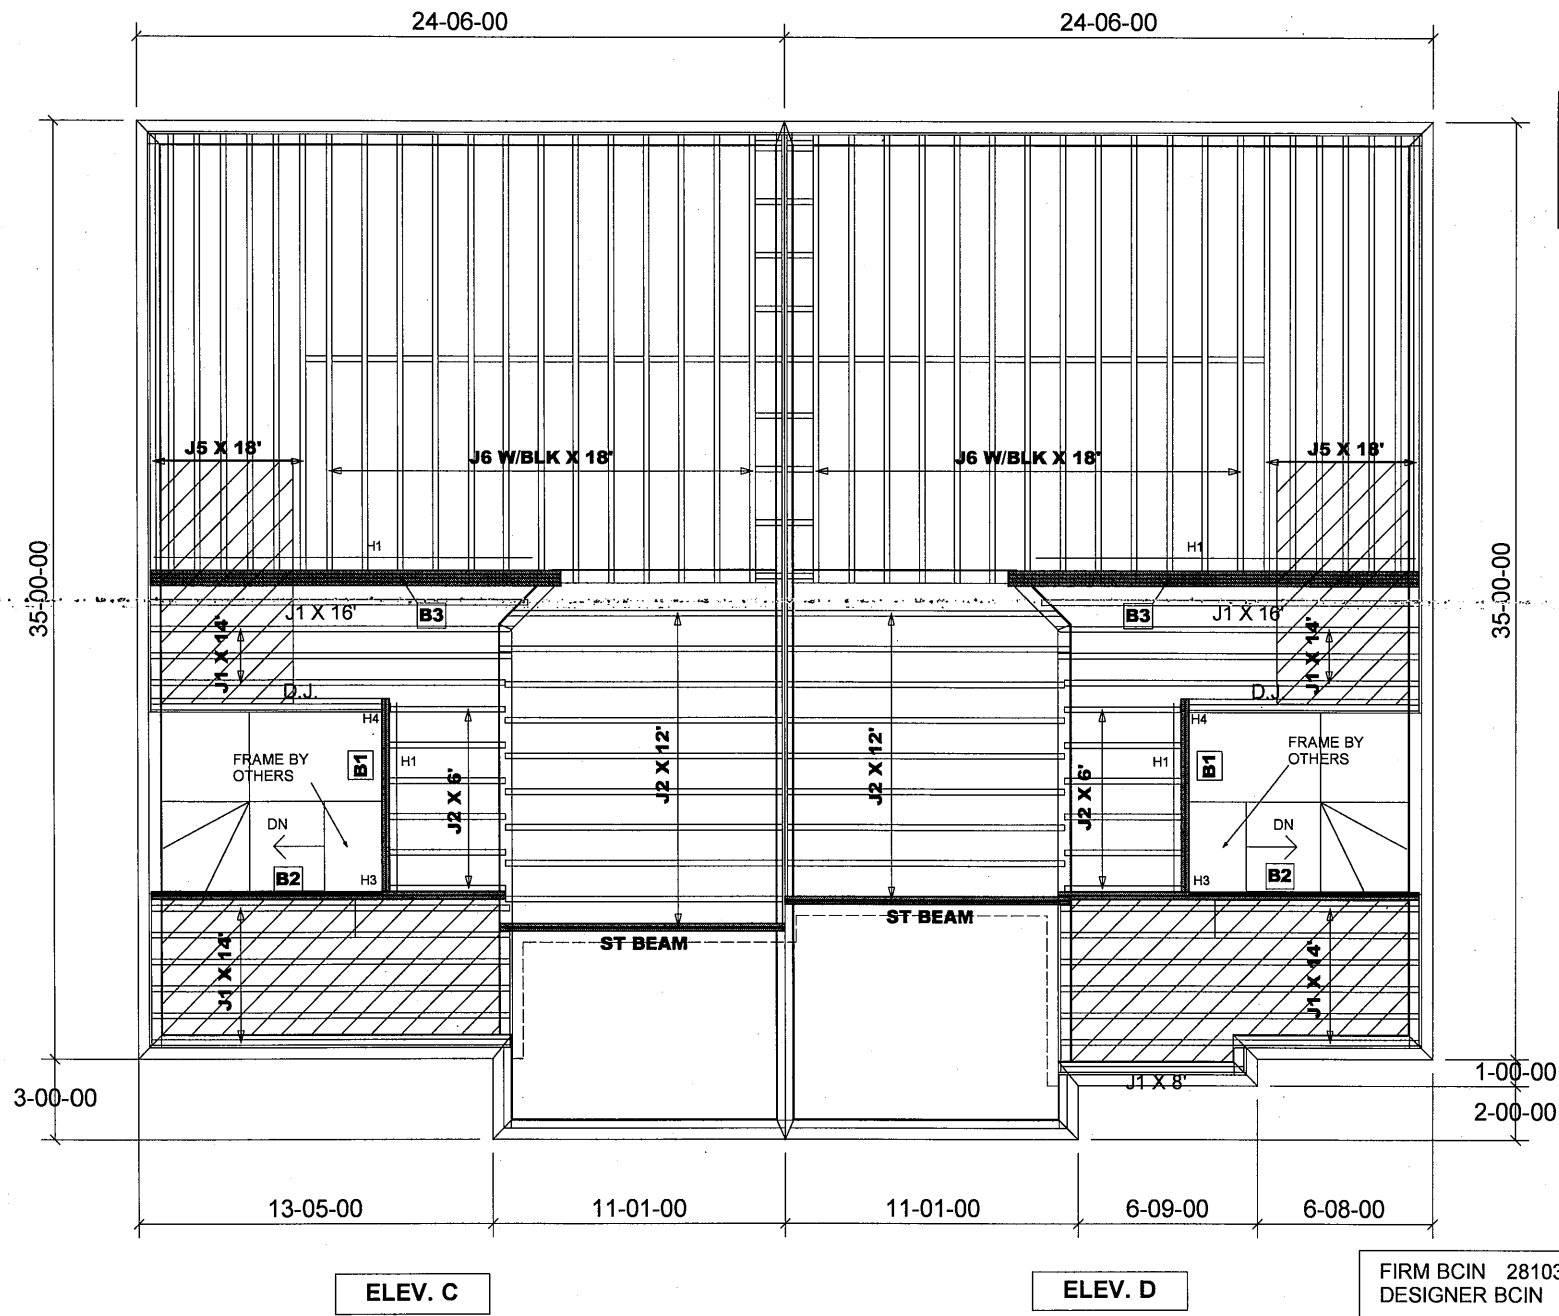

Products				
PlotID	Length	Product	Plies	Net Qty
B3	16-00-00	VERSALAM-10 2.0E	4	8
B2	14-00-00	VERSALAM-10 2.0E	2	4
B1	8-00-00	VERSALAM-10 2.0E	2	4

JOIST SCHEDULE

J1 - 9 1/2" NI-20 @ 12" O/C
 J2 - 9 1/2" NI-20 @ 16" O/C
 J5 - 9 1/2" NI-40X @ 12" O/C
 J6 - 9 1/2" NI-40X @ 16" O/C

BLK - W/MID-SPAN BLOCKING

SUBFLOOR - 5/8" NAILED & GLUED

HANGER SCHEDULE

H1-----LT259 (TM)
 H3-----HGUS410(FM)
 H4-----MIT39.5-2 (TM)


NOTE:

TM-----TOP MOUNT HANGERS
 FM-----FACE MOUNT HANGERS

RIMBOARD

1- 1/8" X 9 1/2" O.S.B.

Ceramic Tile



APP - AS PER PLAN
 BBO - BEAM BY OTHERS

JOIST SPACING UNDER CERAMIC TILE IS 12" O.C.

Second Floor Framing

Do not scale - refer to architectural plans for dimensions

FIRM BCIN 28103
 DESIGNER BCIN 23991

MODEL: SD - 1

JT: 39002/103050

Builder: Gold Park

Location: Brampton

Designer: NL

Alpa Roof Trusses Inc.

Salesperson: Derek

LI: 310415(244615)


Project: Mclaughlin and Mayfield

Date: July 3, 2019

Sheet: 3 of 4

Maple, Ontario

Home Lumber

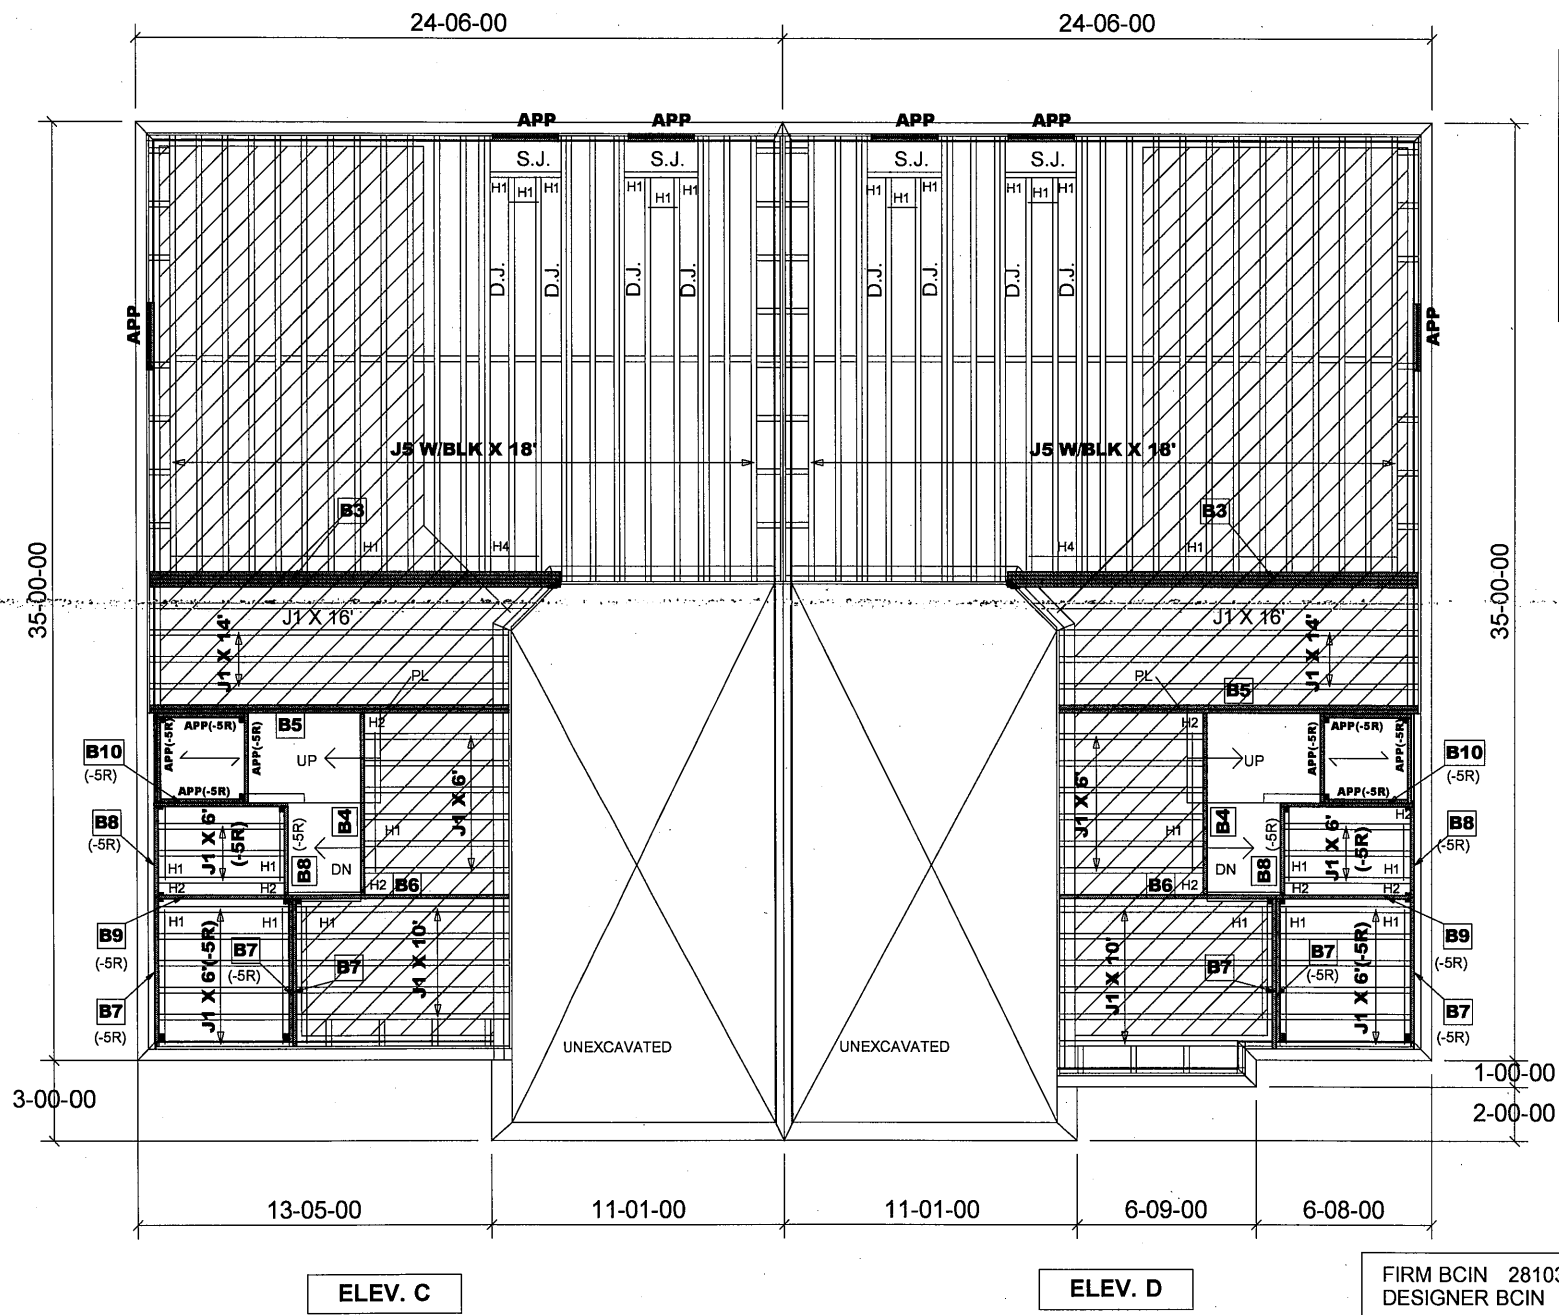

Products				
PlotID	Length	Product	Plies	Net Qty
B3	16-00-00	VERSALAM-10 2.0E	4	8
B5	14-00-00	VERSALAM-10 2.0E	2	4
B6	9-00-00	VERSALAM-10 2.0E	1	2
B4	7-00-00	VERSALAM-10 2.0E	1	2
B10	6-00-00	VERSALAM-10 2.0E	1	2
B7	6-00-00	VERSALAM-10 2.0E	1	6
B9	6-00-00	VERSALAM-10 2.0E	1	2
B8	4-00-00	VERSALAM-10 2.0E	1	4

JOIST SCHEDULE

J1 - 9 1/2" NI-20 @ 12" O/C
J5 - 9 1/2" NI-40X @ 12" O/C

BLK - W/MID-SPAN BLOCKING

SUBFLOOR - 5/8" NAILED & GLUED

HANGER SCHEDULE

H1 -----LT259(TM)
H2 -----HUS1.81/10(FM)

NOTE:
TM -----TOP MOUNT HANGERS
FM -----FACE MOUNT HANGERS

RIMBOARD

1- 1/8" X 9 1/2" O.S.B.

Ceramic Tile

JOIST SPACING UNDER CERAMIC TILE IS 12" O.C.

1- 2X6 SPF#2 Squash Block req'd on one side of each joist under interior load bearing walls. Multiple Squash Blocks are req'd under concentrated loads.

First Floor Framing

Do not scale - refer to architectural plans for dimensions

FIRM BCIN 28103
DESIGNER BCIN 23991

MODEL: SD - 1