



GROUND FLOOR PLAN ELEV 'A' & 'B'

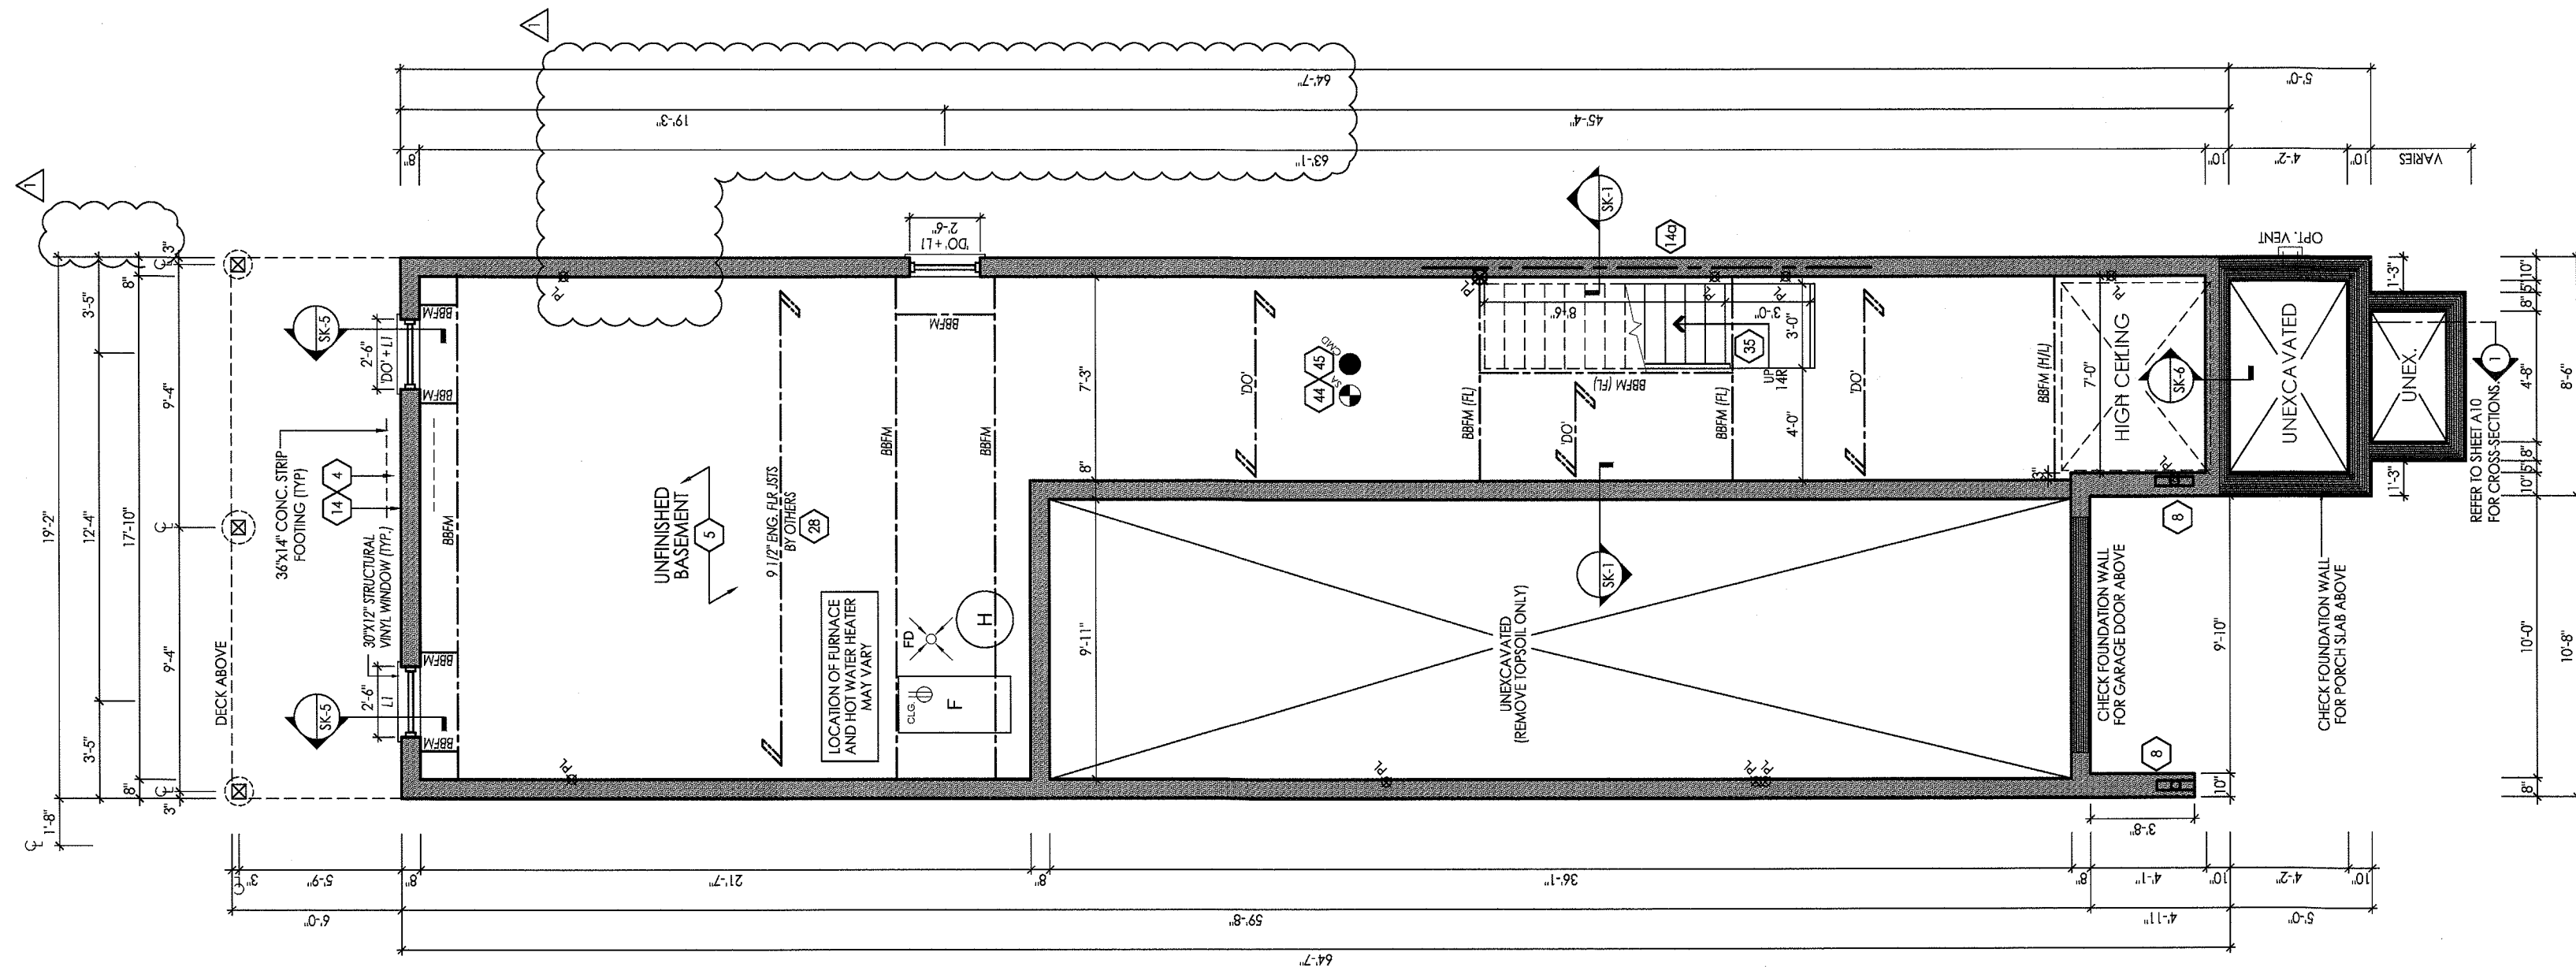

BASEMENT FLOOR PLAN ELEV 'A' & 'B'



I, JULIO PINZON DECLARE THAT I HAVE REVIEWED AND TAKEN DESIGN RESPONSIBILITY FOR THE DESIGN WORK ON BEHALF OF RN DESIGN LTD. UNDER DIVISION C, PART-3 SUBSECTION-3.2.4 OF THE BUILDING CODE. I AM QUALIFIED AND THE FIRM IS REGISTERED IN THE APPROPRIATE CLASSES / CATEGORIES.

QUALIFIED DESIGNER BCIN: 38688
FIRM BCIN: 26995
DATE: 11.11.2016

SIGNATURE: _____



MAR 04 2016

FOR STRUCTURAL ONLY EXCLUDING
ENGINEERED ROOF TRUSS, FLOOR
JOIST & FLOOR LVL BEAM DESIGNS

It is the builder's complete responsibility to ensure that all plans submitted for approval fully comply with the Architectural Guidelines and all applicable regulations and requirements including zoning provisions and any provisions in the subdivision agreement. The Control Architect is not responsible in any way for examining or approving site (lotting) plans or working drawings with respect to any zoning or building code or permit matter or that any house can be properly built or located on its lot.

This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the City of VAUGHAN.

ARCHITECTURAL REVIEW & APPROVAL
FEB 29 2016
John G. Williams Limited, Architect

#	revisions	date	dwn	chk
1	ISSUED FOR CLIENT REVIEW	30-Jan-15	RU	RPA
2	REVISED AS PER FLOOR & TRUSSES COORD.	10-Jun-15	RPA	D.H.
3	REMOVED FIREPLACE LOG PROJECTION ON SIDE OF HOUSE	14-Dec-15	CR	CR
4	REVISED AS PER CLIENT COMMENTS	16-Dec-15	CR	CR
5	REVISED AS PER ENGINEER COMMENTS	24-FEB-16	JP	JP
6	ISSUED FOR PERMIT	24-FEB-16	JP	JP

client	Gold Park Homes
project	Huntington & Nashville Kleinburg
model	25-7
project #	14043
scale	
page	

SIGNATURE: _____



It is the builder's complete responsibility to ensure that all plans submitted for approval fully comply with the Architectural Guidelines and all applicable regulations and requirements, including zoning provisions and any provisions in the subdivision agreement. The Control Architect is not responsible in any way for examining or approving site (lotting) plans or working drawings with respect to any zoning or building code or permit matter or that any house can be properly built or located on its lot.

This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the City of VAUGHAN.

ARCHITECTURAL REVIEW & APPROVAL

FEB 29 2011

John G. Williams Limited, Architect

#	revisions	date	dwn	chk
1	ISSUED FOR CLIENT REVIEW	30-Jan-15	BU	RPA
2	CONFIRMED ROOF TRUSS LAYOUT FOR EL. 'A'	1-Jun-15	RPA	DJH
3	REVISED AS PER FLOOR & TRUSSES COORD.	10-Jun-15	RPA	DJH
4	REMOVED FIREPLACE JOG PROJECTION ON SIDE OF HOUSE	14-Dec-15	CR	CR
5	REVISED AS PER CLIENT COMMENTS	16-Dec-15	CR	CR
6	UPDTED LAYOUT OF MAIN FLOOR FORTHER & REVISED STAIRS AS PER CLIENT COMMENTS	2-Feb-16	ES	JP
7	REVISED AS PER ENGINEER COMMENTS	24-Feb-16	ES	JP
8	ISSUED FOR PERMIT	24-Feb-16	JP	JP

client

project


model

project #


scale

page

A2

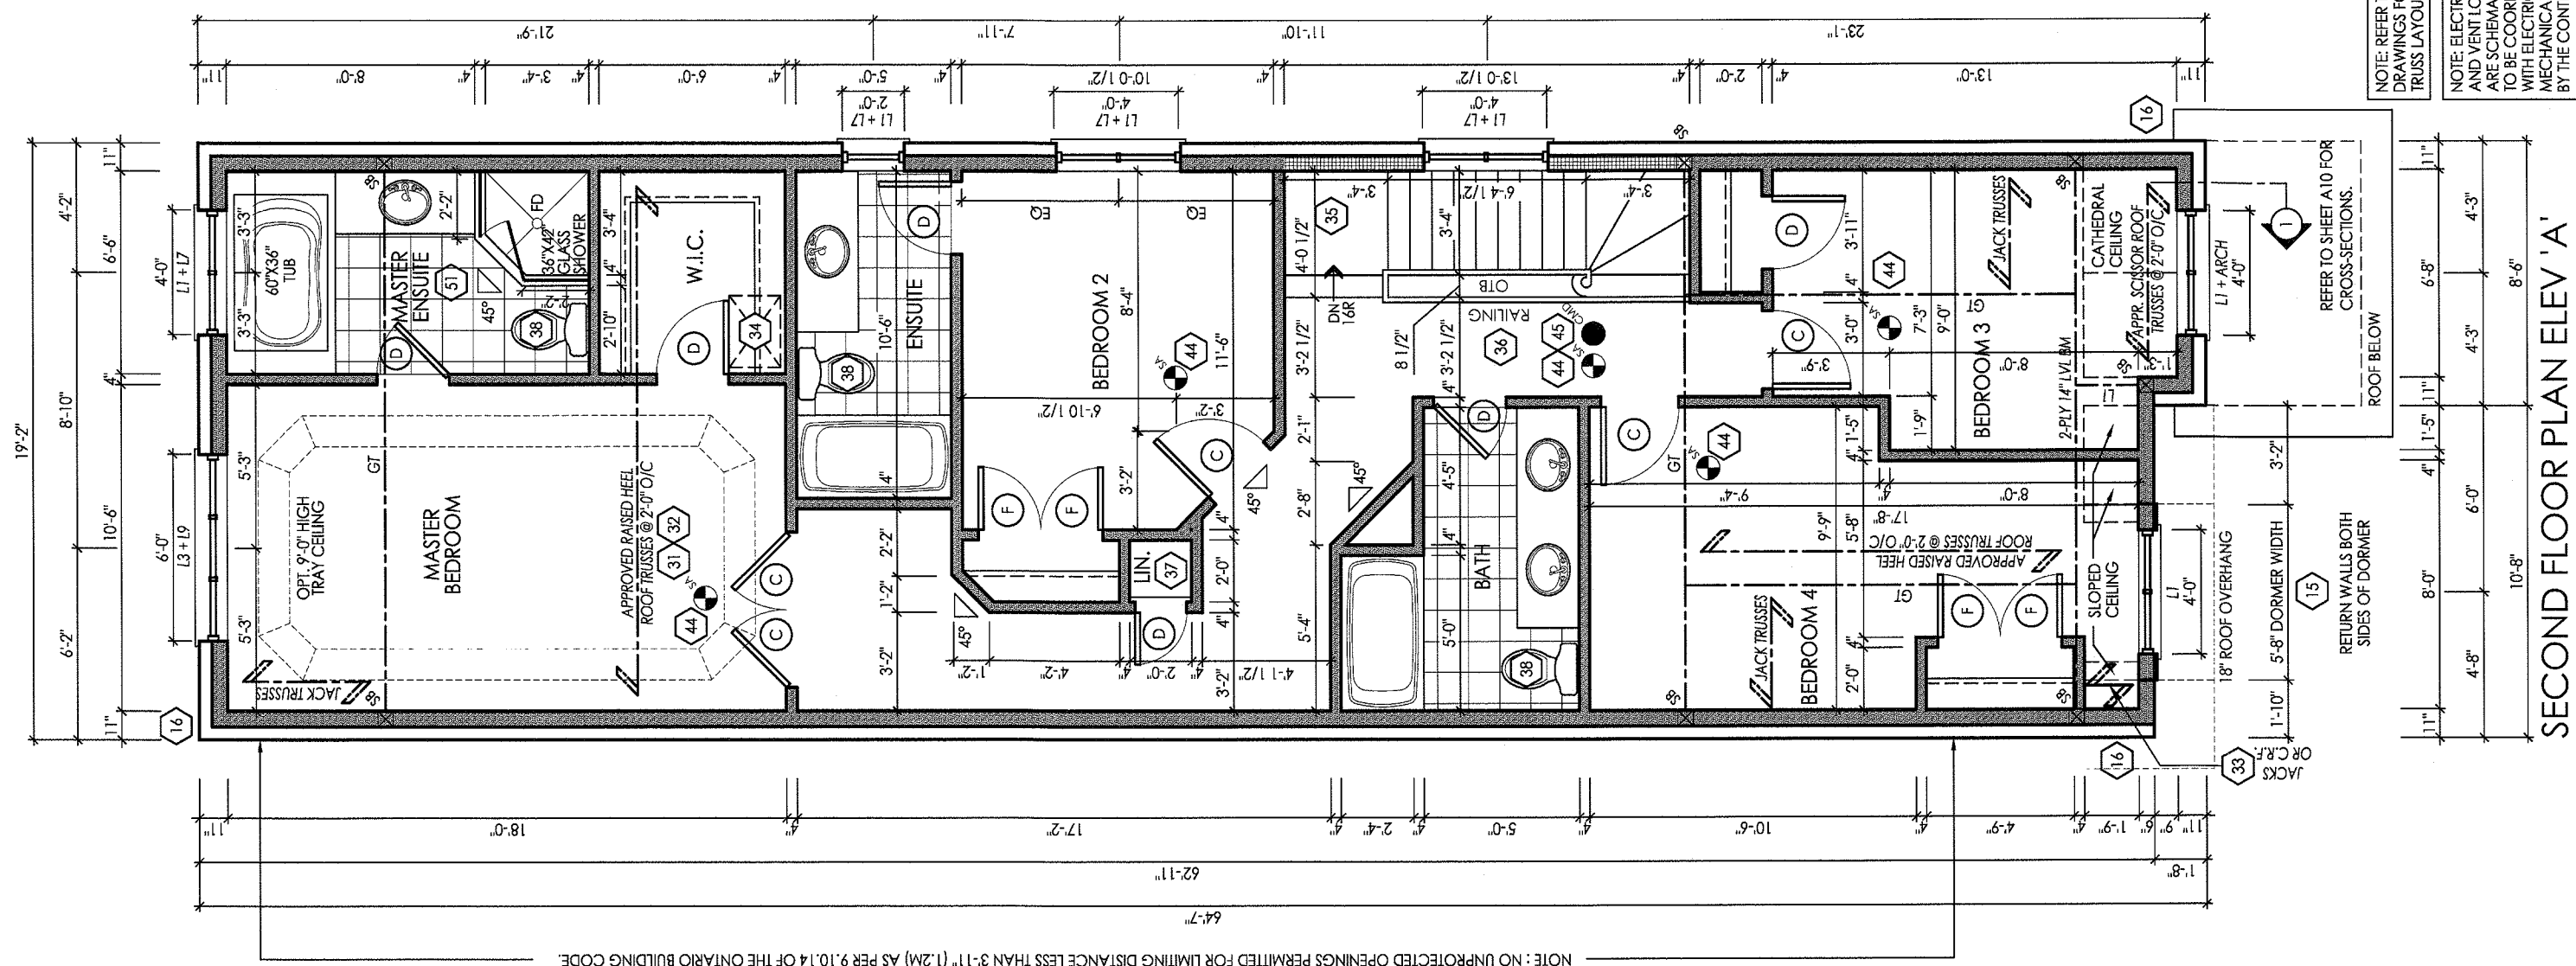


NOTE: NO UNPROTECTED OPENINGS PERMITTED FOR LIMITING DISTANCE LESS THAN 3'-1" (1.2M) AS PER 9.10.14 OF THE ONTARIO BUILDING CODE.

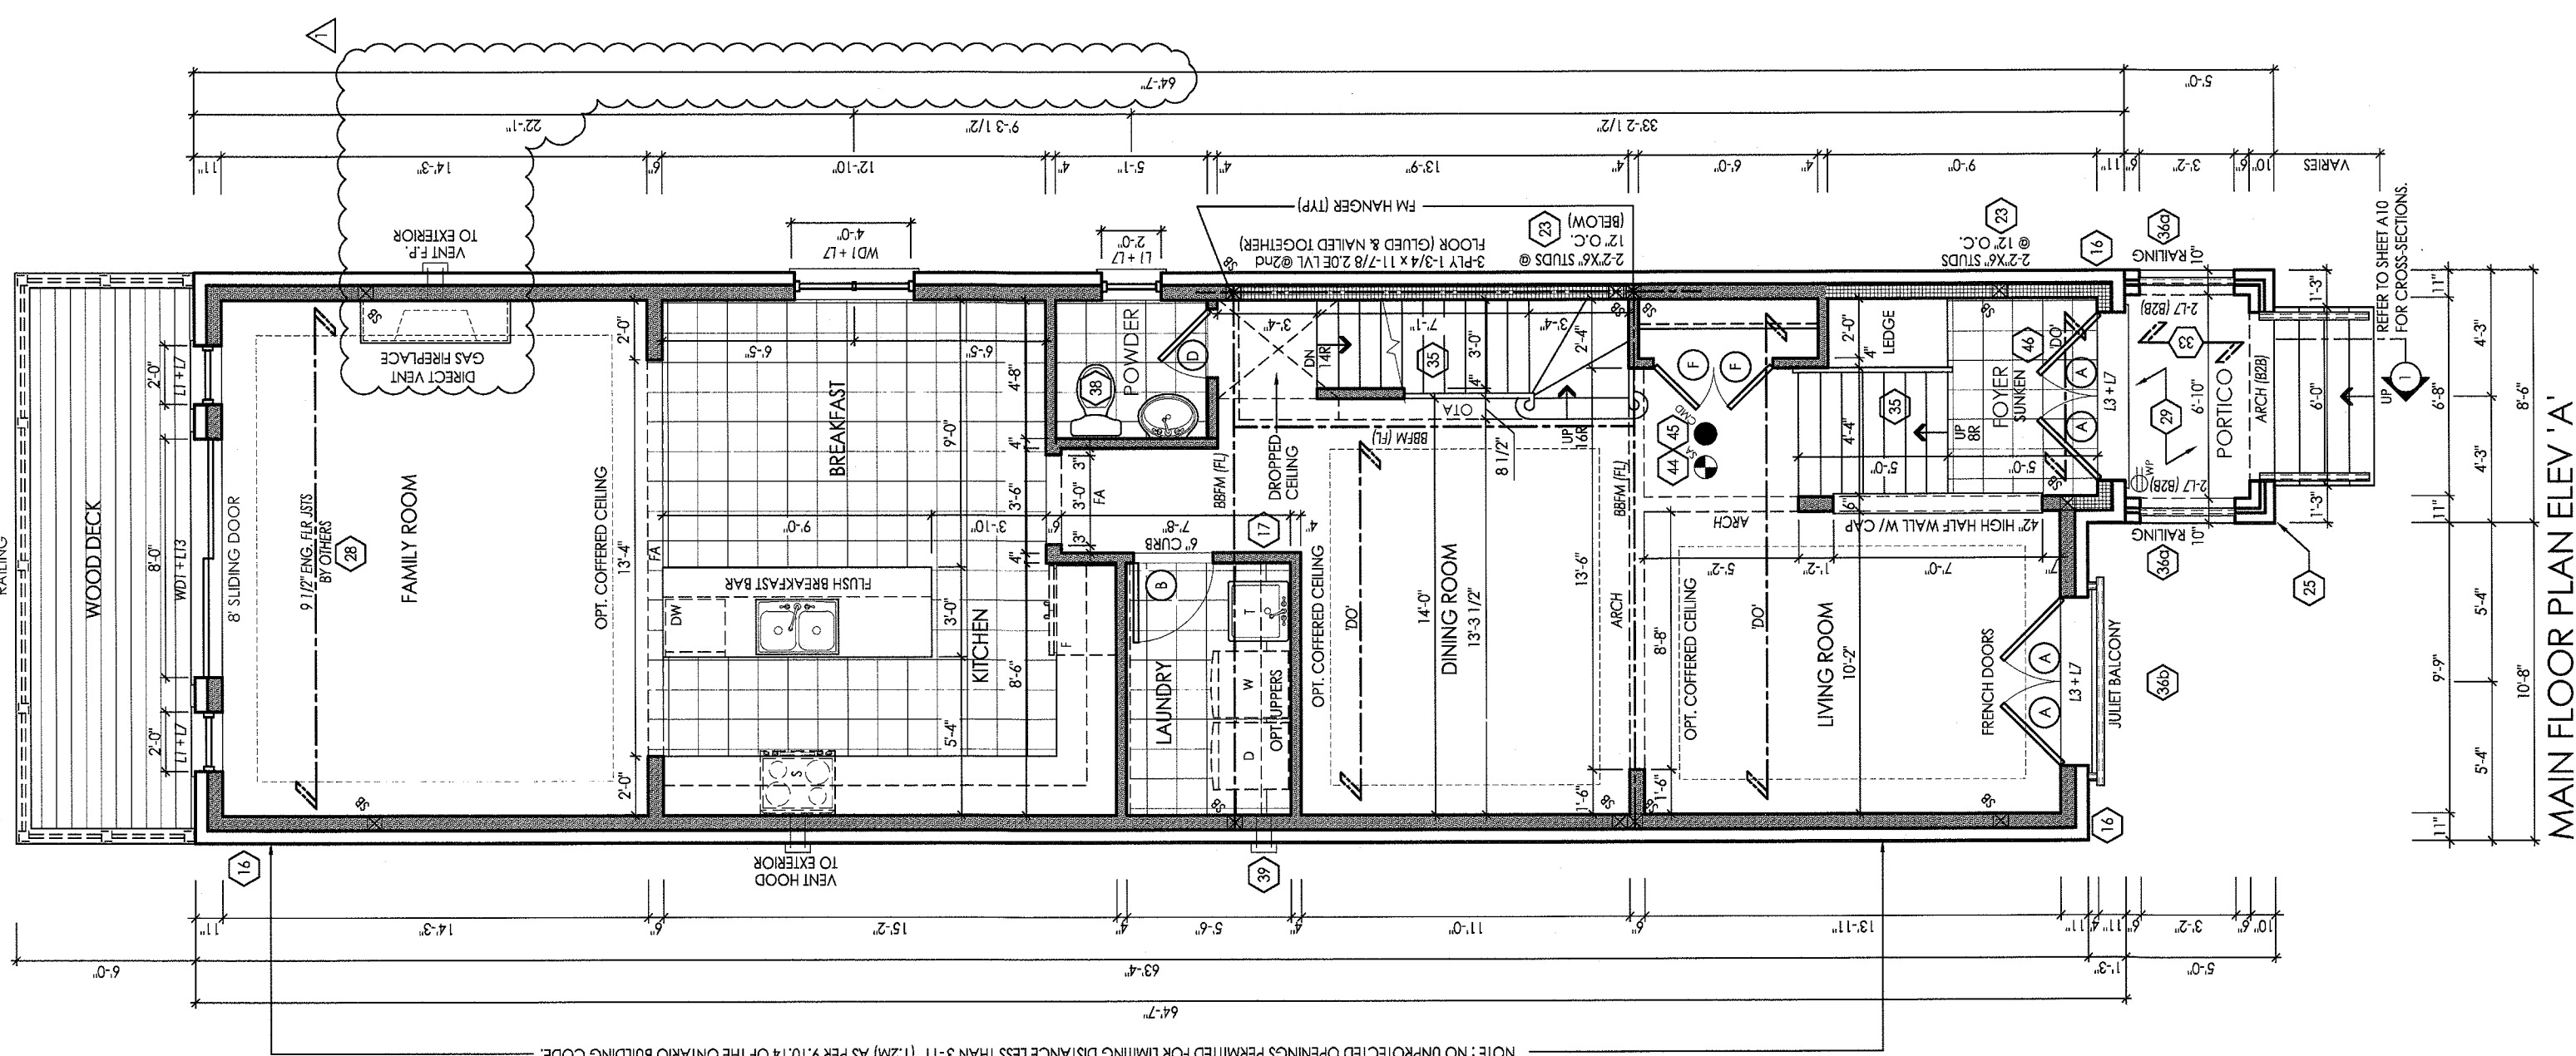

NOTE: NO UNPROTECTED OPENINGS PERMITTED FOR LIMITING DISTANCE LESS THAN 3'-11" (1.2M) AS PER 9.10.14 OF THE ONTARIO BUILDING CODE. -

QUALIFIED DESIGNER BCIN: 38688
FIRM BCIN: 26995
DATE: 11.17.2012
SIGNATURE: [Signature]



This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the City of

ARCHITECTURAL REVIEW & APPROVAL
FEB 29 2016
© Williams Limited Architects

#	revisions	date	dwn	ch
1	ISSUED FOR CLIENT REVIEW	30-Jan-15	BU	RP
2	REVISED AS PER FLOOR & TRUSSES COORD.	10-Jun-15	RPA	DJ
3	REMOVED PREFRAME JOG PROJECTION ON SIDE OF HOUSE	14-Dec-15	CR	C
4	REVISED AS PER CLIENT COMMENTS	16-Dec-15	CR	C
5	SHIFTED LOCATION OF MAIN FLOOR POWDER & REVISED STAIRS AS PER CLIENT COMMENTS	24-Feb-16	ES	JL
6	REVISED AS PER ENGINEER COMMENTS	24-Feb-16	JP	JL
7	ISSUED FOR PERMIT	24-Feb-16	JP	JL

client	Gold Park Homes
project	Huntington & Nashville Kleinburg
model	25-7
project #	14043
scale	
page	



SIGNATURE: _____

ARCHITECTURAL REVIEW & APPROVAL
FEB 29 2016
John G. Williams Limited, Architect

client

project

model

scale

page


A4

QUALIFIED DESIGNER BCIN: 38688
FIRM BCIN: 26995
DATE: 11.17.12
SIGNATURE: [Signature]

ARCHITECTURAL REVIEW & APPROVAL
FEB 29 2016
John G. Williams Limited, Architect

[illegible]


A5

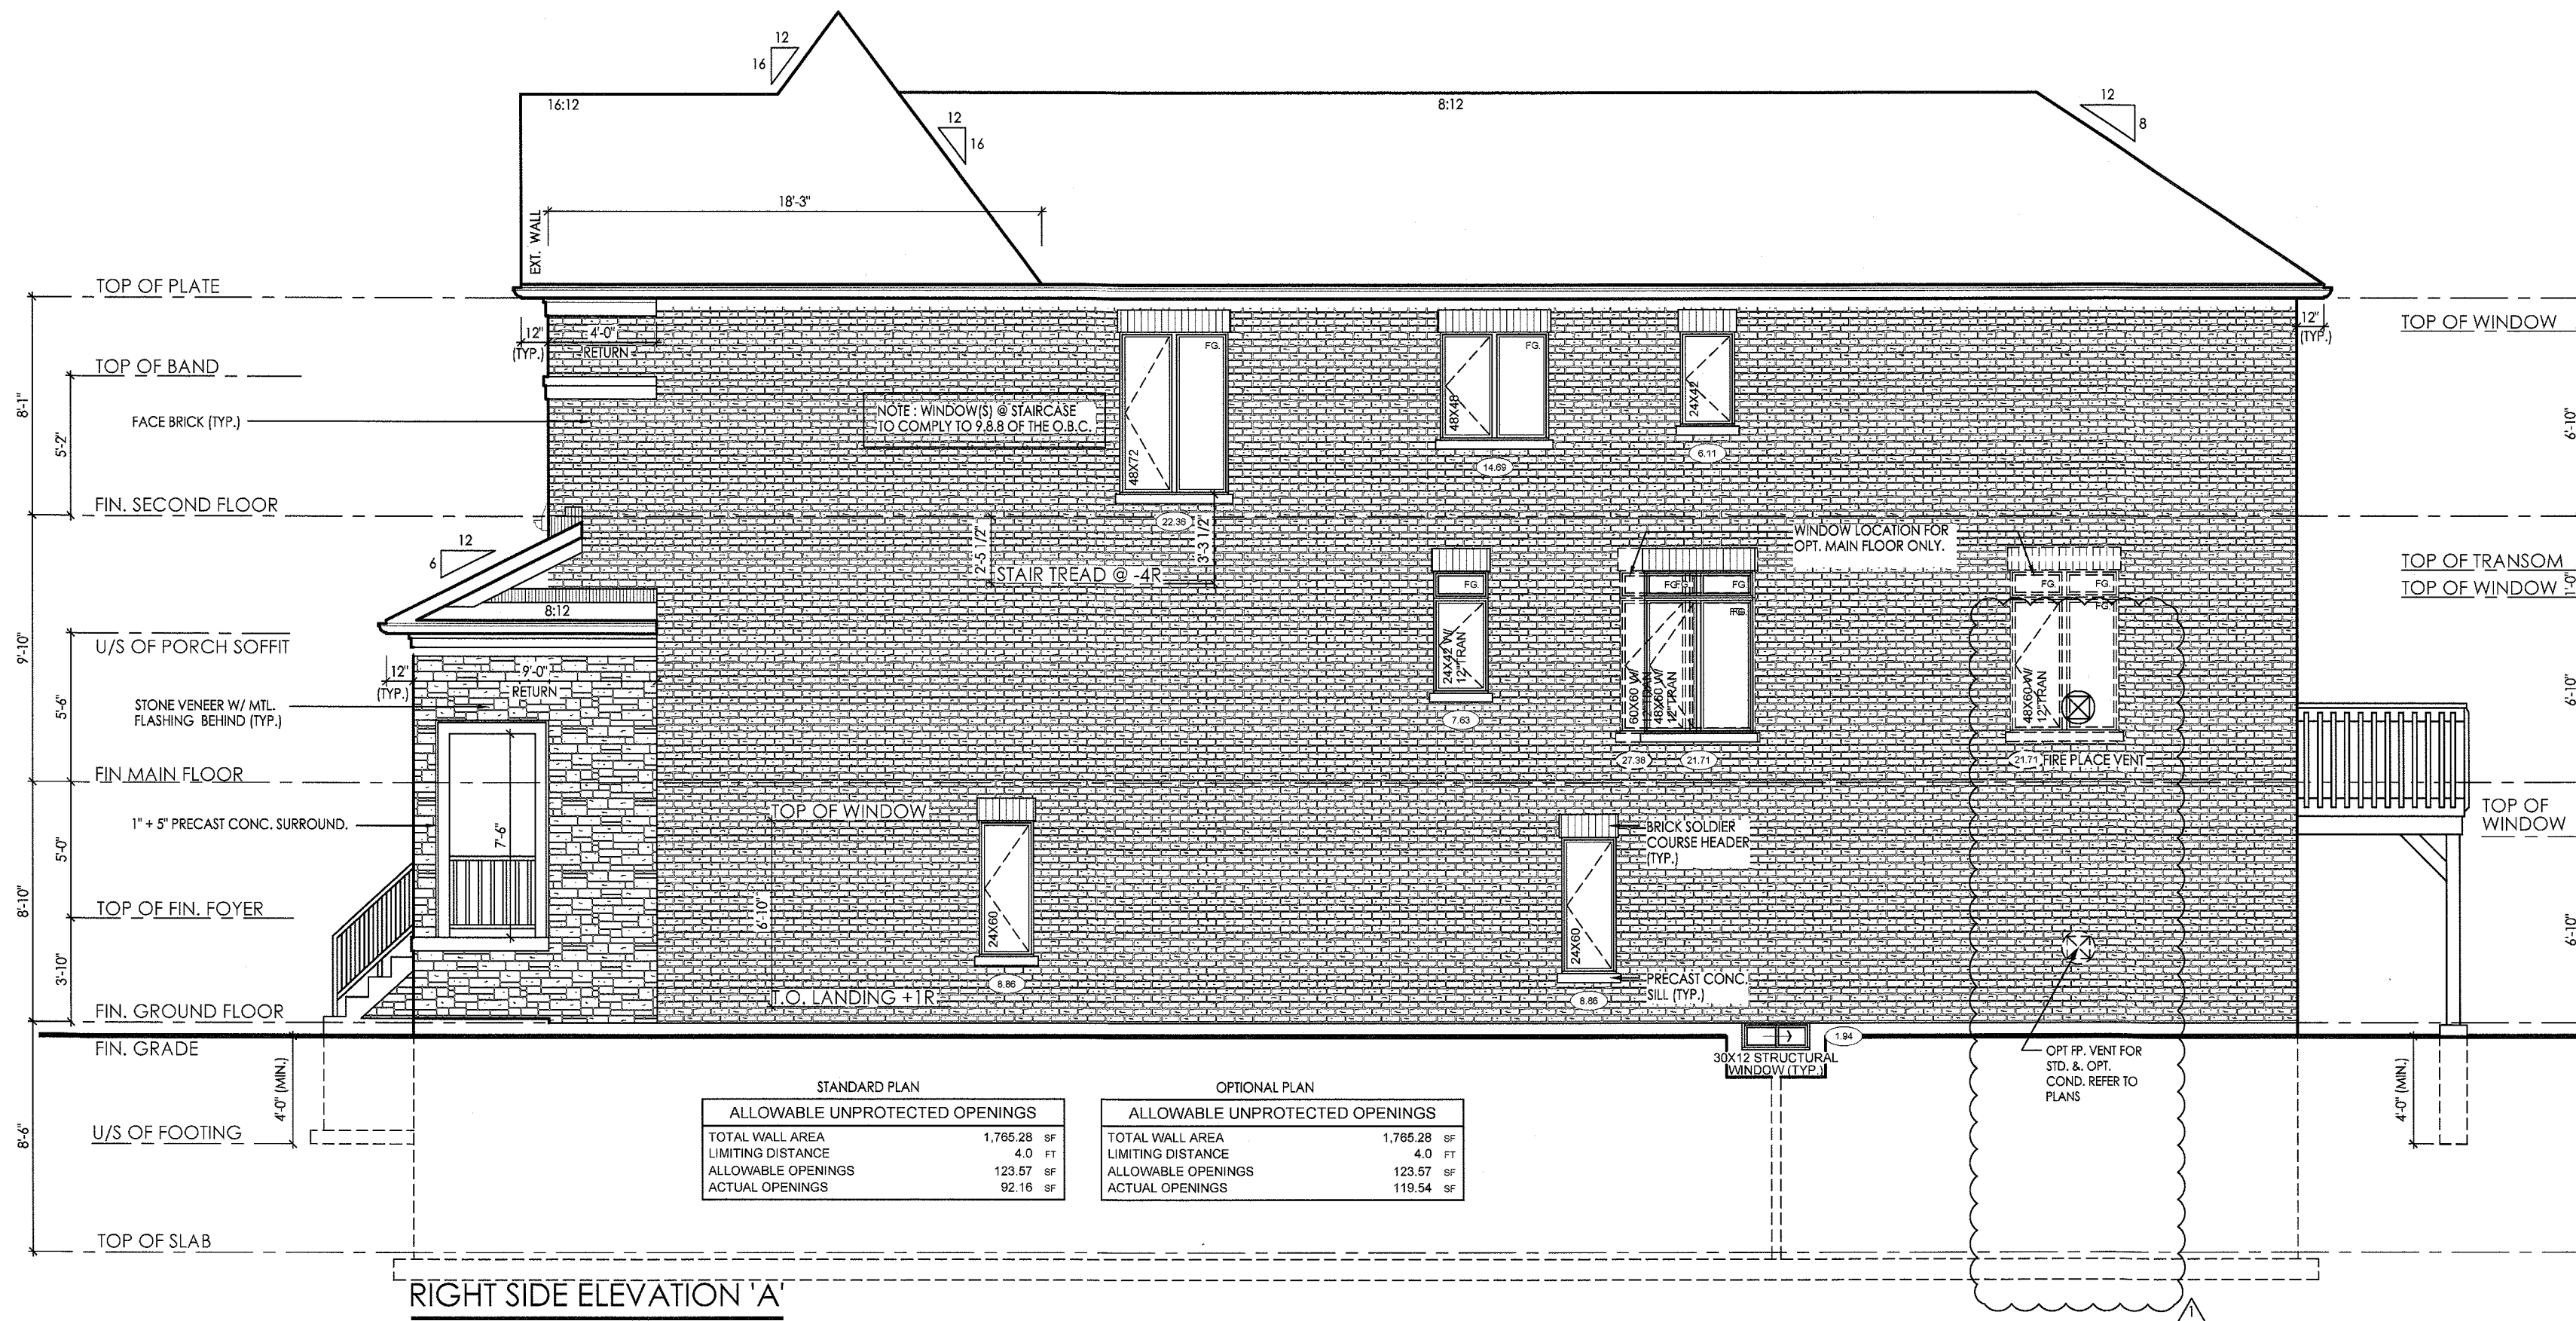

QUALIFIED DESIGNER BCIN: 117 38688
FIRM BCIN: 26995

SIGNATURE:

117 38688
26995



This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the City of VALIUGHAN

ARCHITECTURAL REVIEW & APPROVAL

FEB 29 2016

John G. Williams Limited, Architects

[illegible]

client

Gold Park
Homes

project

Huntington &
Nashville
Kleinburg

model

25-7


project #

14043

scale

page


A6



I, JULIO PINZON DECLARE THAT I HAVE REVIEWED AND TAKEN DESIGN RESPONSIBILITY FOR THE DESIGN WORK ON BEHALF OF **RN DESIGN LTD.** UNDER DIVISION C, PART 3 SUBSECTION 3.2.4 OF THE BUILDING CODE. I AM QUALIFIED AND THE FIRM IS REGISTERED IN THE APPROPRIATE CLASSES / CATEGORIES.

QUALIFIED DESIGNER BCIN: 38688
FIRM BCIN: 26995
DATE: 1.17.16

SIGNATURE: _____

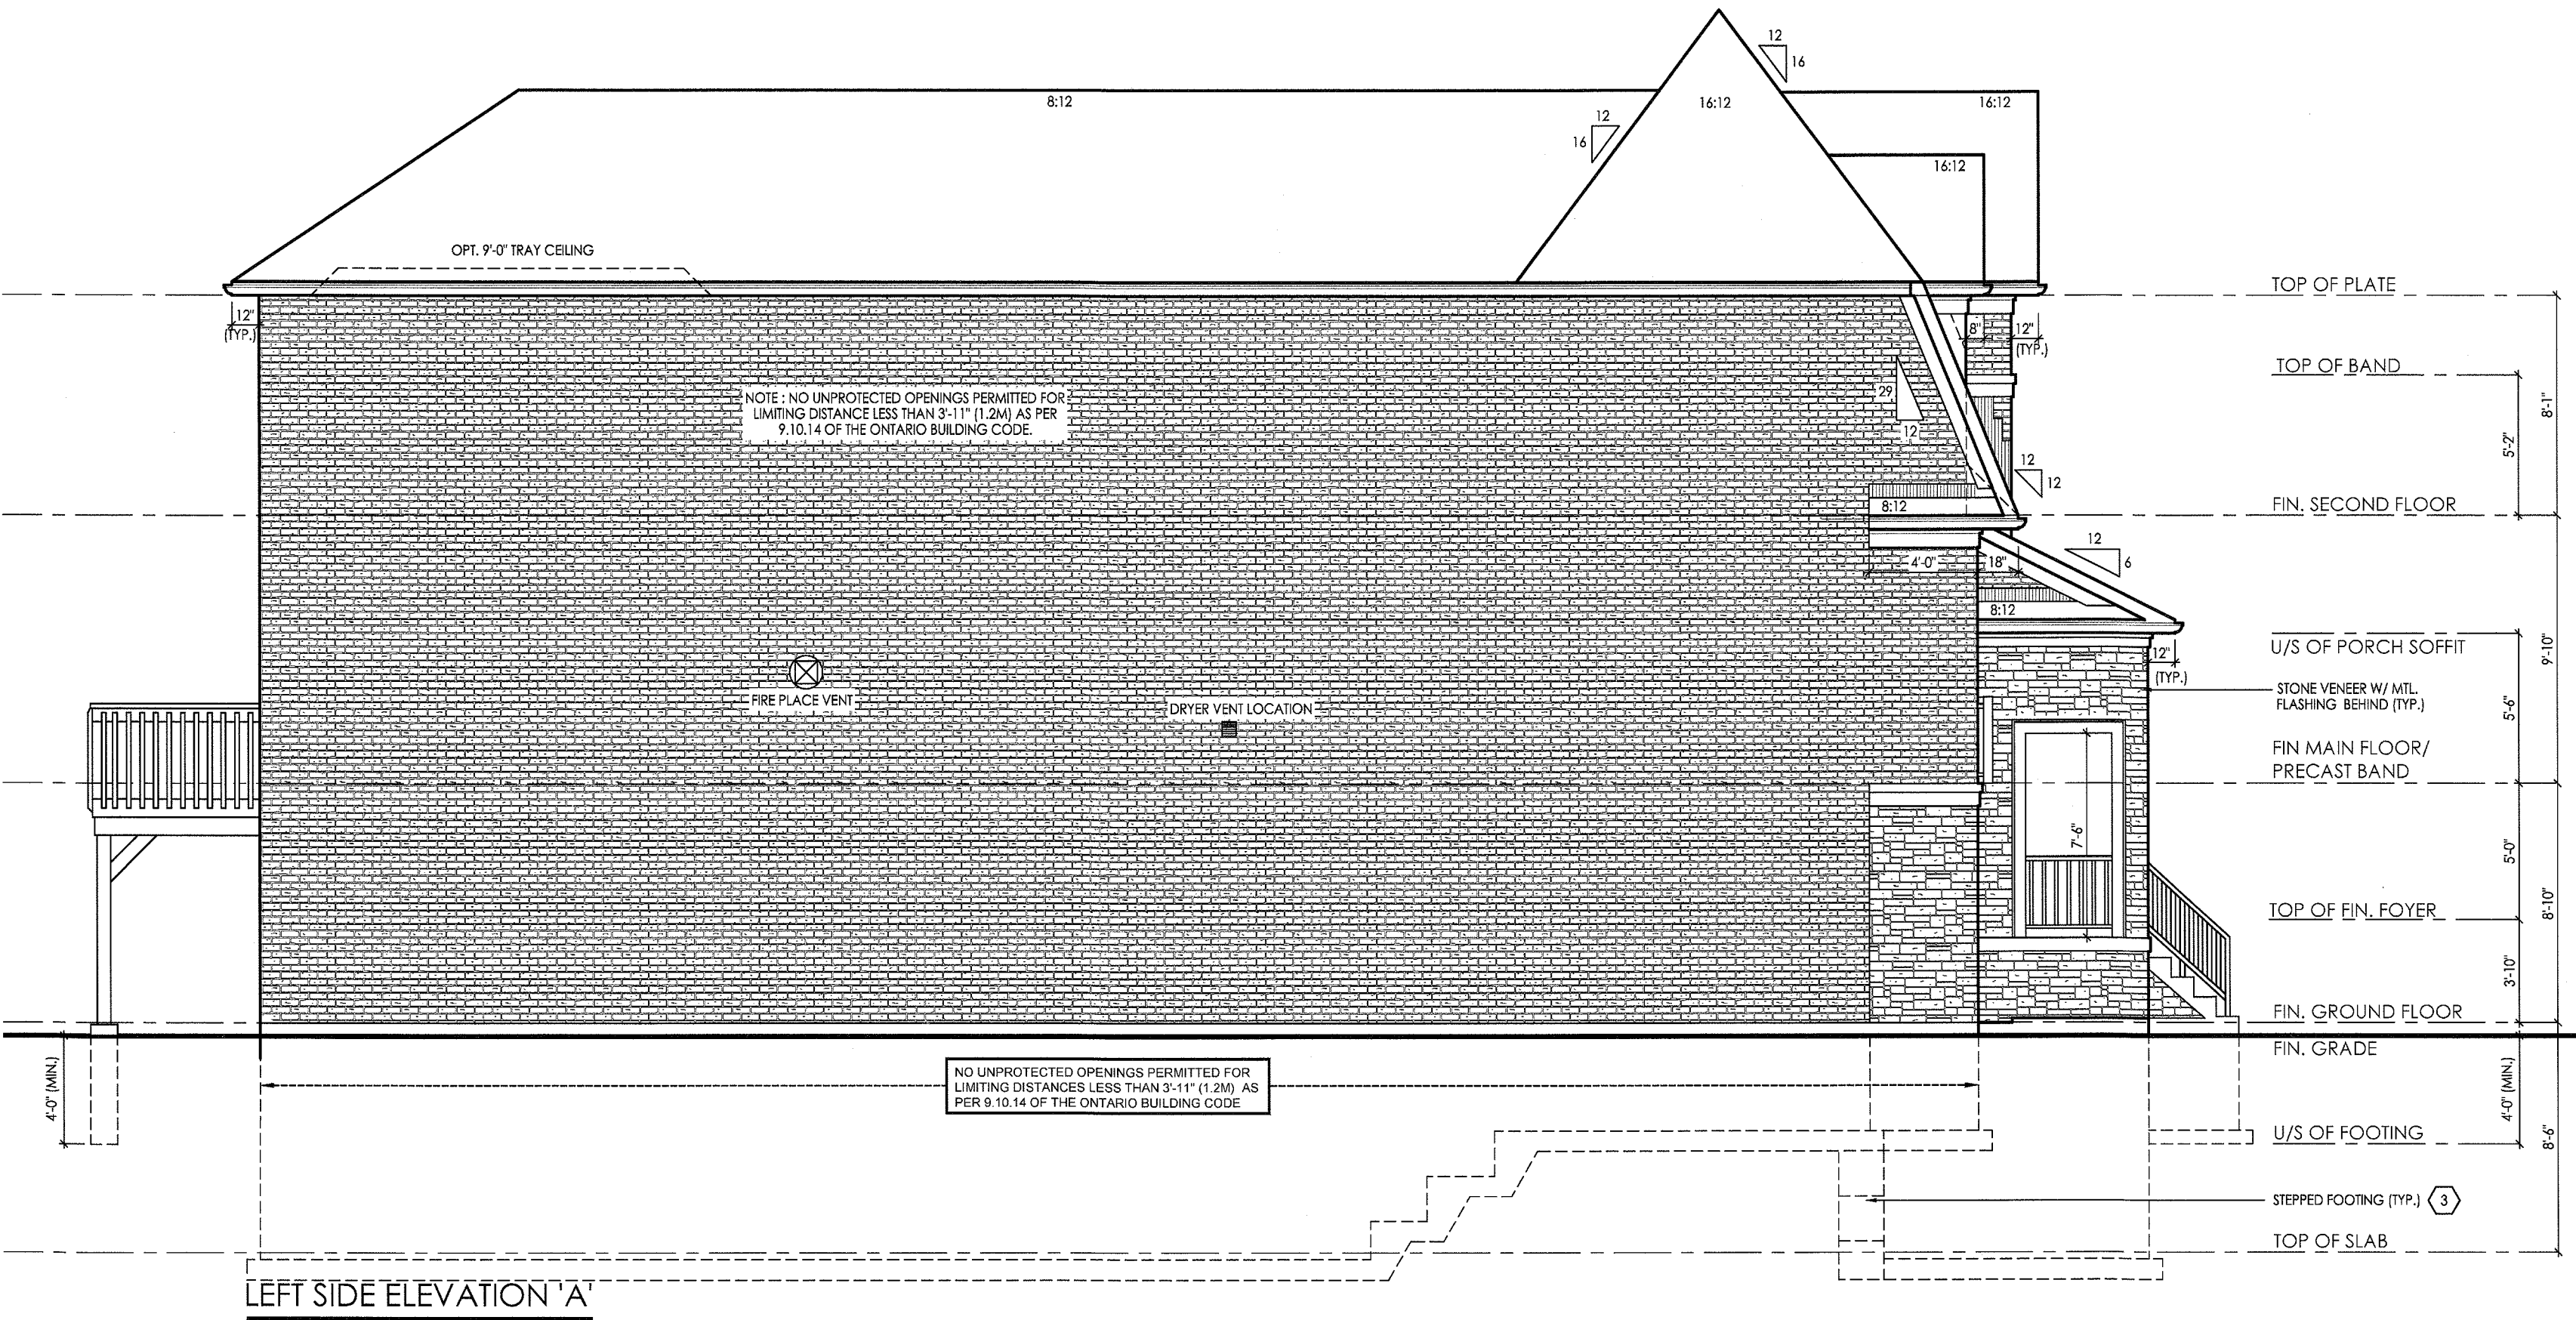


It is the builder's complete responsibility to ensure that all plans submitted for approval fully comply with the Architectural Guidelines and all applicable regulations and requirements including zoning provisions and any provisions in the subdivision agreement. The Control Architect is not responsible in any way for examining or approving site (lotting) plans or working drawings with respect to any zoning or building code or permit matter or that any house can be properly built or located on its lot.

This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the City of VAUGHAN.

ARCHITECTURAL REVIEW & APPROVAL
FEB 29 2016
John G. Williams Limited, Architect

#	revisions	date	dwn	chk
1	ISSUED FOR CLIENT REVIEW	30-Jan-15	BU	RPA
2	REVISED AS PER CLIENT COMMENTS	16-Dec-15	CR	CR
3	ISSUED FOR PERMIT	24-FEB-16	JP	JP
4				
5				
6				
7				
8				
9				
10				
11				
12				

client	Gold Park Homes
project	Huntington & Nashville Kleinburg
model	25-7
project #	14043
scale	
page	A7

QUALIFIED DESIGNER BCIN:	38488
FIRM BCIN:	26995
DATE:	
	
SIGNATURE:	

ARCHITECTURAL REVIEW & APPROVAL
FEB 29 2016
John G. Williams Limited, Architect


client	
Gold Park Homes	
project	
Huntington & Nashville Kleinburg	
model	
25-7	
project #	
14043	
scale	
page	



I, JULIO PINZON DECLARE THAT I HAVE REVIEWED AND TAKEN DESIGN RESPONSIBILITY FOR THE DESIGN WORK ON BEHALF OF RN DESIGN LTD. UNDER DIVISION C, PART 3 SUBSECTION 3.2.4 OF THE BUILDING CODE. I AM QUALIFIED AND THE FIRM IS REGISTERED IN THE APPROPRIATE CLASSES / CATEGORIES.

QUALIFIED DESIGNER BCIN: 38688
FIRM BCIN: 26995
DATE: 1.1.17

SIGNATURE: _____

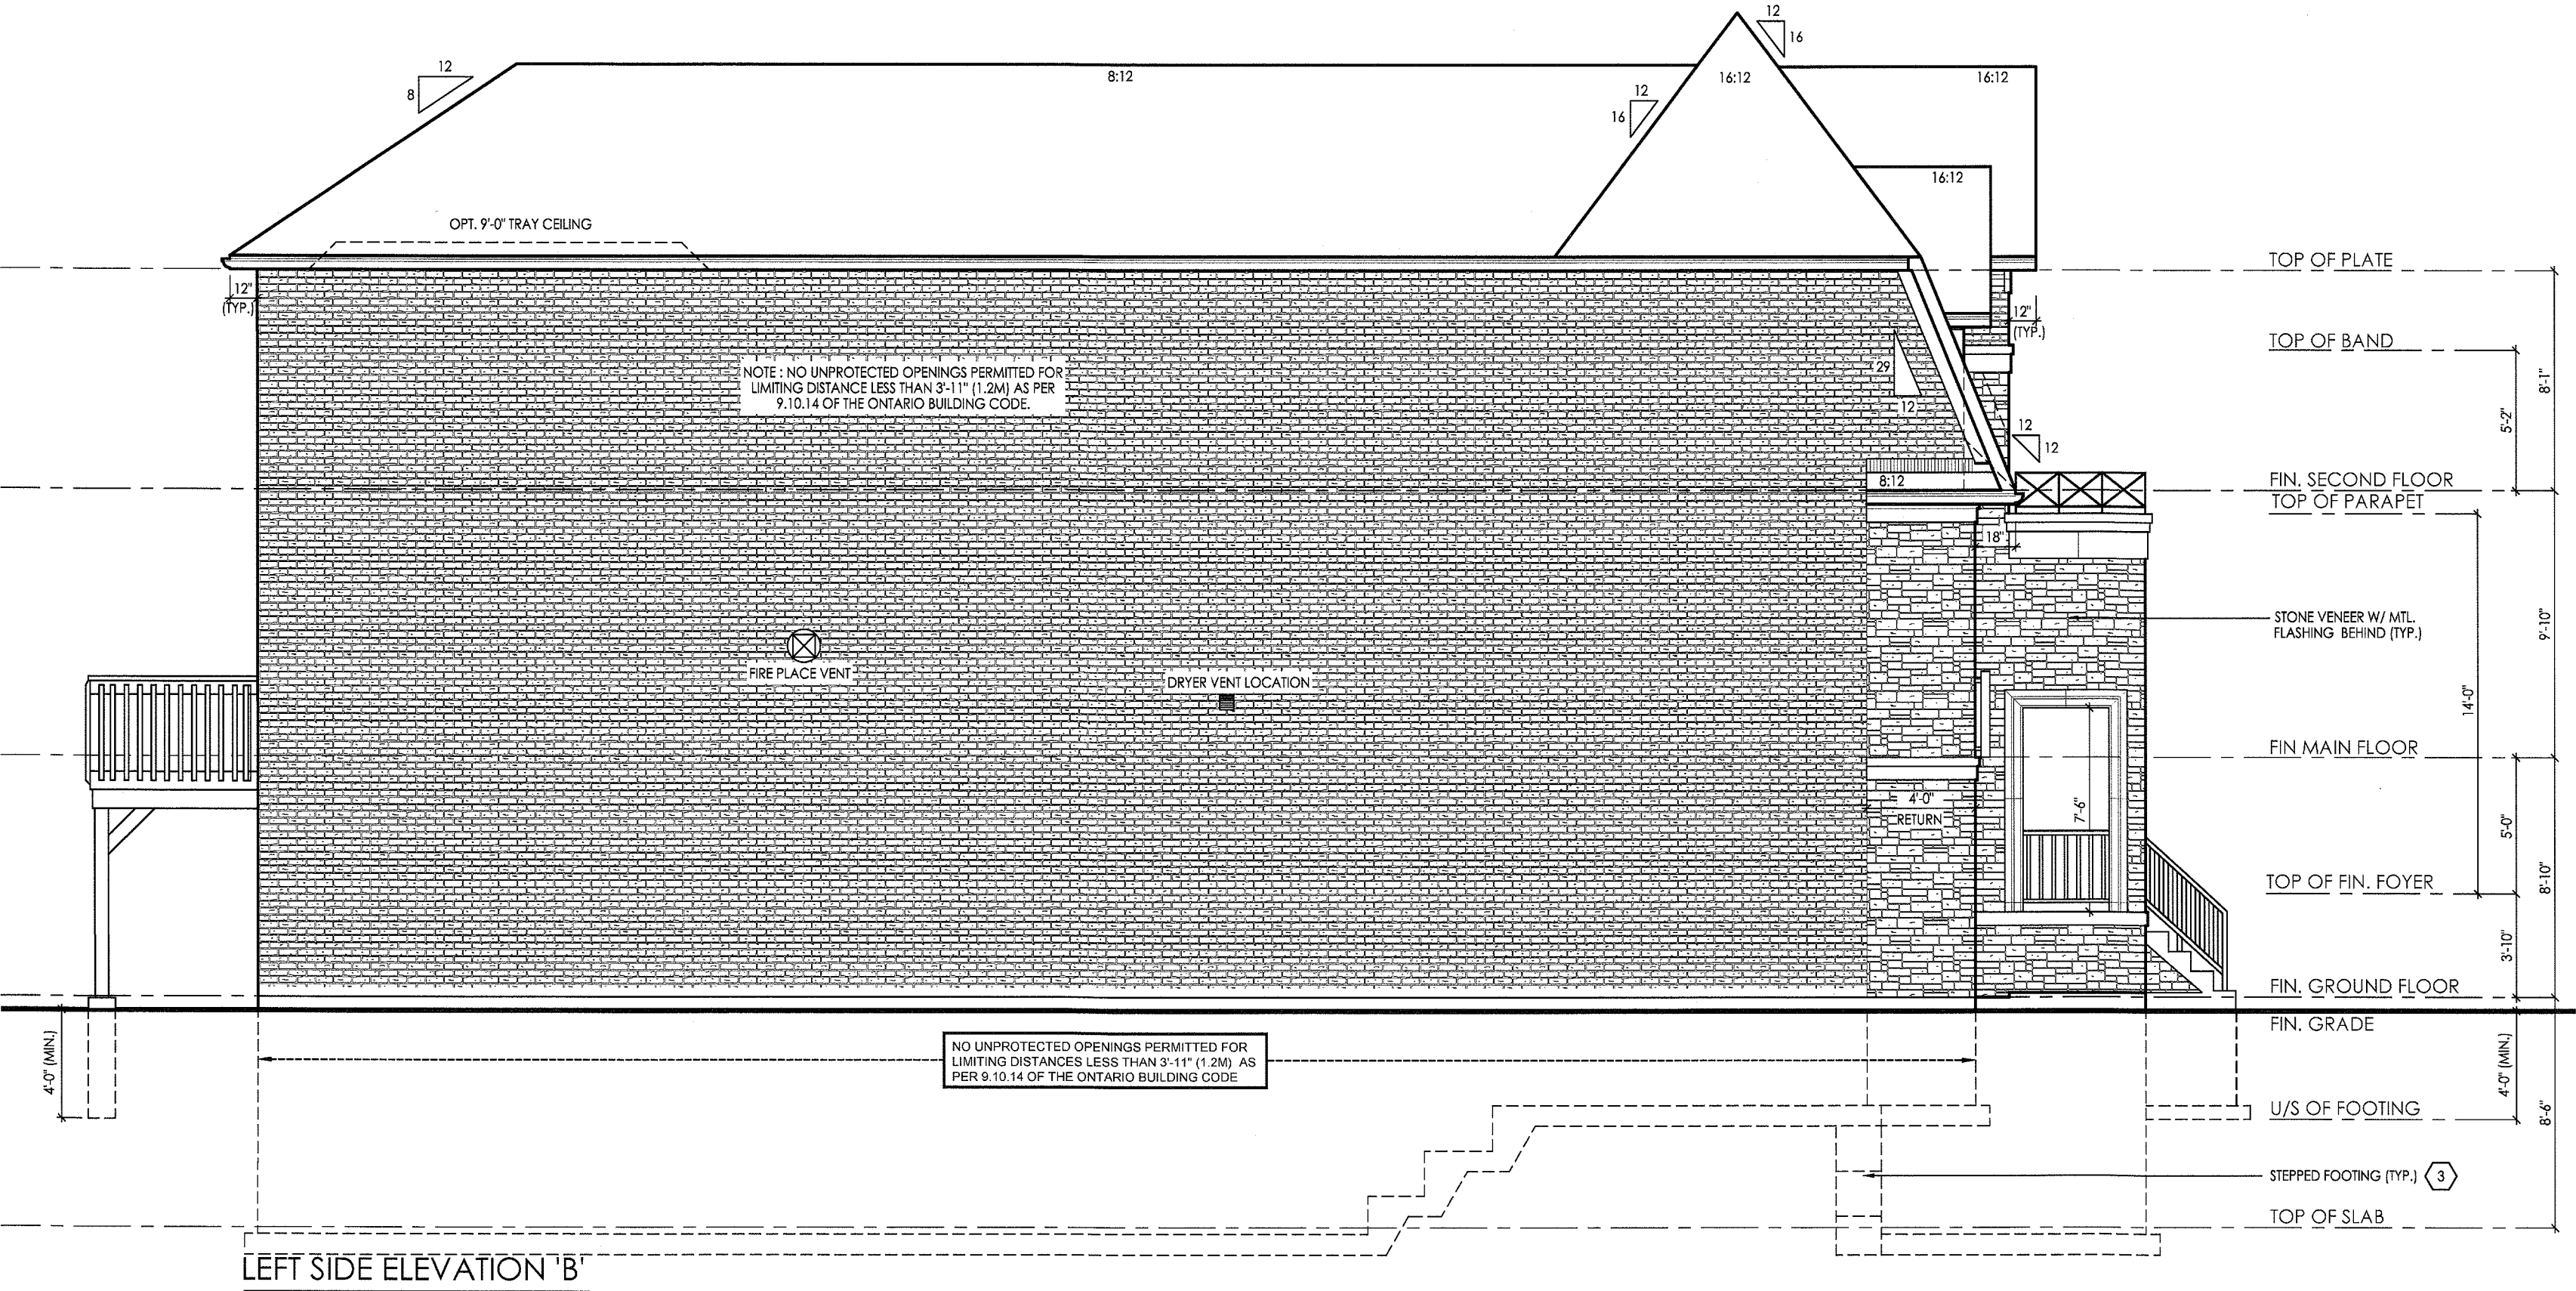

It is the builder's complete responsibility to ensure that all plans submitted for approval fully comply with the Architectural Guidelines and all applicable regulations and requirements including zoning provisions and any provisions in the subdivision agreement. The Control Architect is not responsible in any way for examining or approving site (lotting) plans or working drawings with respect to any zoning or building code or permit matter or that any house can be properly built or located on its lot.

This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the City of VAUGHAN.

ARCHITECTURAL REVIEW & APPROVAL

FEB 29 2016

John G. Williams Limited, Architect

#	revisions	date	dwn	chk
1	ISSUED FOR CLIENT REVIEW	30-Jan-15	BU	RPA
2	REVISED AS PER CLIENT COMMENTS	16-Dec-15	CR	CR
3	ISSUED FOR PERMIT	24-FEB-16	JP	JP
4				
5				
6				
7				
8				
9				
10				
11				
12				

client

Gold Park
Homes

project

Huntington &
Nashville
Kleinburg

model

25-7

project #

14043

scale

page

31 TYPICAL ROOF:

- O.B.C. 9.26.
- NO. 210 (30.9KG/m2) ASPHALT SHINGLES
- FOR ROOFS BETWEEN 4:12 & 8:12 PITCH PROVIDE EAVES PROTECTION TO EXTEND UP THE ROOF SLOPE MIN. 2'-11" (600mm) FROM EDGE TO A LINE NOT LESS THAN 12" (300mm) PAST THE INSIDE FACE OF EXTERIOR WALL.
- EAVES PROTECTION LAID BENEATH STARTER STRIP.
- EAVE PROTECTION NOT REQUIRED OVER UNHEATED SPACES.
- STARTER STRIP AS PER O.B.C. 9.26.7.2.
- STARTER STRIP NOT REQUIRED AS PER O.B.C. 9.26.7.2.(3)
- 3/8" (10mm) PLYWOOD SHEATHING OR OSB (0-2 GRADE) WITH "H" CLIPS
- APPROVED WOOD TRUSSES @ 24" (600mm) O.C. (REFER TO MANUFACTURER'S LAYOUT)
- TRUSS BRACING AS PER TRUSS MANUFACTURER
- EAVES TROUGH ON PREFINISHED FASCIA AND VENTED SOFFIT (VINYL OR ALUMINUM)
- ATTIC VENTILATION 1:300 OF INSULATED CEILING AREA WITH, 50% AT SOFFIT.

- WALL TO CEILING & WALL TO FLOOR AIR/VAPOUR BARRIER JOINT
- OVERLAP BARRIER BY 4" MIN AND MECHANICALLY SEALED
- or TO BE SEALED WITH CONTINUOUS CAULKING SEALANT

SEALANT

18 BRICK VENEER CONSTRUCTION (TYPICAL):

- O.B.C. 9.23.
- 3-1/2" (90mm) FACE BRICK OR 4" (100mm) STONE @ 38-1" (11m) MAX. HEIGHT
- MIN. 0.03" (0.76mm) THICK, 7/8" (22mm) WIDE CORROSION RESISTANT STRAPS @ MAX. 15 3/4" (400mm) O.C. HORIZONTAL & 23 5/8" (600mm) O.C. VERTICAL SPACING
- PROVIDE WEEP HOLES @ 2'-7" (800mm) O.C. @ BTM. COURSE & OVER OPENINGS
- BASE FLASHING UP TO 5 7/8" (150mm) BEHIND WALL SHEATHING MEMBRANE (O.B.C. 9.20.13.6.(2))
- BRICK OR STONE SILLS UNDER OPENINGS, FLASHING UNDER
- 1" (25mm) AIR SPACE
- WALL SHEATHING MEMBRANE AS PER O.B.C. 9.27.3.2
- 1/4" (6mm) PLYWOOD (EXTERIOR TYPE) OR EQUIVALENT AS PER O.B.C. 9.23.16
- 2" X 6" (38mmX 140mm) WOOD STUDS @ 16" (400mm) O.C.
- MIN. R22 (RSI 3.87) INSULATION (ZONE 1, O.B.C. T.2.1.1.2.A.)
- CONTINUOUS AIR/VAPOUR BARRIER IN CONFORMANCE W/ O.B.C. 9.25.3 & 9.25.4.

- A/B MECHANICALLY SEALED OR PROVIDE CONTINUOUS SEALANT AT OVERLAPPED JOINTS IN AIR/VAPOUR BARRIER (TYP)

SEALANT

- HEADER WRAP IS TO EITHER OVERLAP AIR/VAPOUR BARRIER BY 4" OR TO BE SEALED WITH CONTINUOUS CAULKING SEALANT (TYP)

26 SILL PLATE:

- O.B.C. 9.23.7.
- 2" X 6" (38mm X 140mm) PLATE
- 1/2" (12.7mm) DIA. ANCHOR BOLTS @ 7'-10" (2400mm) O.C. FASTENED TO PLATE W/ NUTS AND WASHERS
- SHALL BE EMBEDDED NOT LESS THAN 4" (100mm) INTO FDN. WALL.
- SILL PLATE TO BE CAULKED, OR PLACED ON A LAYER OF MINERAL WOOL, NOT LESS THAN 1" (25mm) THICK BEFORE COMPRESSION, OR FOAM GASKET, OR PLACED ON FULL BED OF MORTAR.

- METAL FLASHING TO EXTEND UP BEHIND BRICK MIN 6"

2 TYPICAL STRIP FOOTING: (EXTERIOR BEARING WALLS)

- O.B.C. 9.15.3 & 9.15.3.6
- 3 STOREY STUD - 26" X 9" (660mmX 230mm)
- BASED ON 10'-11/4" (9m) MAX. SUPPORTED JOIST LENGTH
- MIN. 2200psi (15MPa) CONCRETE AFTER 28 DAYS
- SHALL REST ON UNDISTURBED SOIL, ROCK OR COMPACTED GRANULAR FILL W/ MIN. 29psi (200kPa) BEARING CAPACITY
- FTG. TO HAVE CONTINUOUS KEY
- FTG. SIZES MAY BE REDUCED FOR SOILS W/ GREATER BEARING CAPACITY (AS PER SOILS ENGINEERING REPORT)

32 CEILING:

- R50 (RSI 8.8) INSULATION
- CONTINUOUS AIR/VAPOUR BARRIER IN CONFORMANCE W/ O.B.C. 9.25.3 & 9.25.4.
- 1/2" (12.7mm) GYPSUM BOARD W/ PAINTED CEILING OR
- 5/8" (15.9mm) GYPSUM BOARD W/ TEXTURED CEILING (O.B.C. T.9.29.5.3.)

28 FLOOR ASSEMBLY:

- O.B.C. 9.23.14.3, 9.23.14.4
- 5/8" (15.9mm) WAFERBOARD (R-1 GRADE) OR EQUIVALENT
- FLOOR JOISTS AS PER FLOOR PLANS

14 FOUNDATION WALL:

- O.B.C. 9.15.4.2.
- FOR WALLS NOT EXCEEDING 8'-2" (2500mm) IN Laterally Supported Height.
- 8" (200mm) SOLID 2200psi (15MPa) CONCRETE
- MAX. UNSUPPORTED HEIGHT OF 3'-11" (1200mm) & MAX. SUPPORTED HEIGHT OF 7'-0" (2150mm) MEASURED FROM GRADE TO FINISHED BASEMENT FLOOR.
- FOR WALLS NOT EXCEEDING 9'-0" (2750mm) IN Laterally Supported Height.
- 10" (250mm) SOLID 2200psi (15MPa) CONCRETE
- MAX. UNSUPPORTED HEIGHT OF 4'-7" (1400mm) & MAX. SUPPORTED HEIGHT OF 8'-6" (2600mm) MEASURED FROM GRADE TO FINISHED BASEMENT FLOOR.
- LATERAL SUPPORT PROVIDED BY ANCHORED SILL PLATE TO JOISTS.
- FOR CONDITIONS EXCEEDING THESE MAXIMUMS AN ALTERNATIVE IN CONFORMANCE TO O.B.C. T.9.15.4.1 SHALL BE USED OR IT SHALL BE DESIGNED UNDER O.B.C. - PART 4
- WALL SHALL EXTEND A MIN. 5 7/8" (150mm) ABOVE GRADE
- INSULATE W/ R12 (RSI 2.11) FROM UNDERSIDE OF SUBFLOOR TO NOT MORE THAN 8" (200mm) ABOVE FINISHED FLOOR OF BASEMENT (ZONE 1, O.B.C. T.2.1.1.2.A.)
- BACK FILL W/ NON-FROST SUSCEPTIBLE SOIL

REDUCTION OF THICKNESS:

- O.B.C. 9.15.4.7.
- WHERE THE TOP OF THE FOUNDATION WALL IS REDUCED IN THICKNESS TO ALLOW MASONRY FACING, THE MIN. REDUCED THICKNESS SHALL NOT BE LESS THAN 3-1/2" (90mm) THICK.
- TIE TO FACING MATERIAL WITH METAL TIES SPACED MAX. @ 7 7/8" (200mm) VERTICALLY
- O.C. & 2'-11" (600mm) HORIZONTALLY.
- FILL SPACE BETWEEN WALL AND FACING SOLID W/ MORTAR
- WHERE WALL IS REDUCED FOR JOISTS, THE REDUCED THICKNESS SHALL BE MAX. 13-3/4" (350mm) HIGH & MIN. 3-1/2" (90mm) THICK

DAMP-PROOFING & WATERPROOFING:

- DAMP-PROOF THE EXTERIOR FACE OF WALL BELOW GRADE AS PER O.B.C. 9.13.2.
- WHERE INSULATION EXTENDS TO MORE THAN 4'-9" (1450mm) BELOW GRADE, A FDN. WALL DRAINAGE LAYER SHALL BE PROVIDED IN CONFORMANCE TO O.B.C. 9.14.2.1.(2) (4)
- FINISHED BASEMENTS SHALL HAVE INTERIOR DAMP-PROOFING EXTENDING FROM SLAB TO GRADE LEVEL & SHALL CONFORM TO O.B.C. 9.13.3.3.(3)
- WHERE HYDROSTATIC PRESSURE OCCURS, FDN. WALLS SHALL BE WATERPROOFED AS PER O.B.C. 9.13.3.
- WALLS THAT ARE WATERPROOFED DO NOT REQUIRE DAMP-PROOFING.

SEALANT


5 BASEMENT SLAB:

- O.B.C. 9.13 & 9.16.
- 3" (75mm) CONCRETE SLAB
- 2200psi (15MPa) AFTER 28 DAYS - O.B.C. 9.16.4.5.
- DAMP-PROOF BELOW SLAB W/ MIN. 0.008" (0.15mm) POLYETHYLENE OR TYPE 'S' ROLL ROOFING W/ 4" (100mm) LAPPED JOINTS.
- DAMP-PROOFING MAY BE OMITTED IF CONCRETE HAS MIN. 3600psi (25MPa) COMPRESSIVE STRENGTH AFTER 28 DAYS
- 4" (100mm) OF COURSE GRANULAR MATERIAL
- PROVIDE BOND BREAKING MATERIAL BETWEEN SLAB & FTG.
- WHERE SLAB IS REQUIRED TO BE WATERPROOFED IT SHALL CONFORM TO O.B.C. 9.13.3.
- FLOOR DRAIN PER O.B.C. 9.31.4.4
- R10 (RSI 1.78) INSULATION AT PERIMETER OF SLAB WHERE GRADE IS WITHIN 23'-1/2" (600mm) OF BASEMENT SLAB EDGE. INSULATION TO EXTEND TO NOT LESS THAN 23'-1/2" (600mm) BELOW EXTERIOR GRADE LEVEL (O.B.C. SB-12 - 2.1.1.6.(5))
- UNLESS IT CAN BE DEMONSTRATED THAT SOIL GAS DOES NOT CONSTITUTE A PROBLEM, SOIL GAS CONTROL SHALL CONFORM TO SUPPLEMENTARY STANDARD (O.B.C. SB-9)


- PROVIDE CONTINUOUS SEALANT BETWEEN CONC SLAB AND FOUNDATION WALL

TYPICAL EXTERIOR WALL SECTION- BRICK

SCALE: 3/4"= 1'-0"

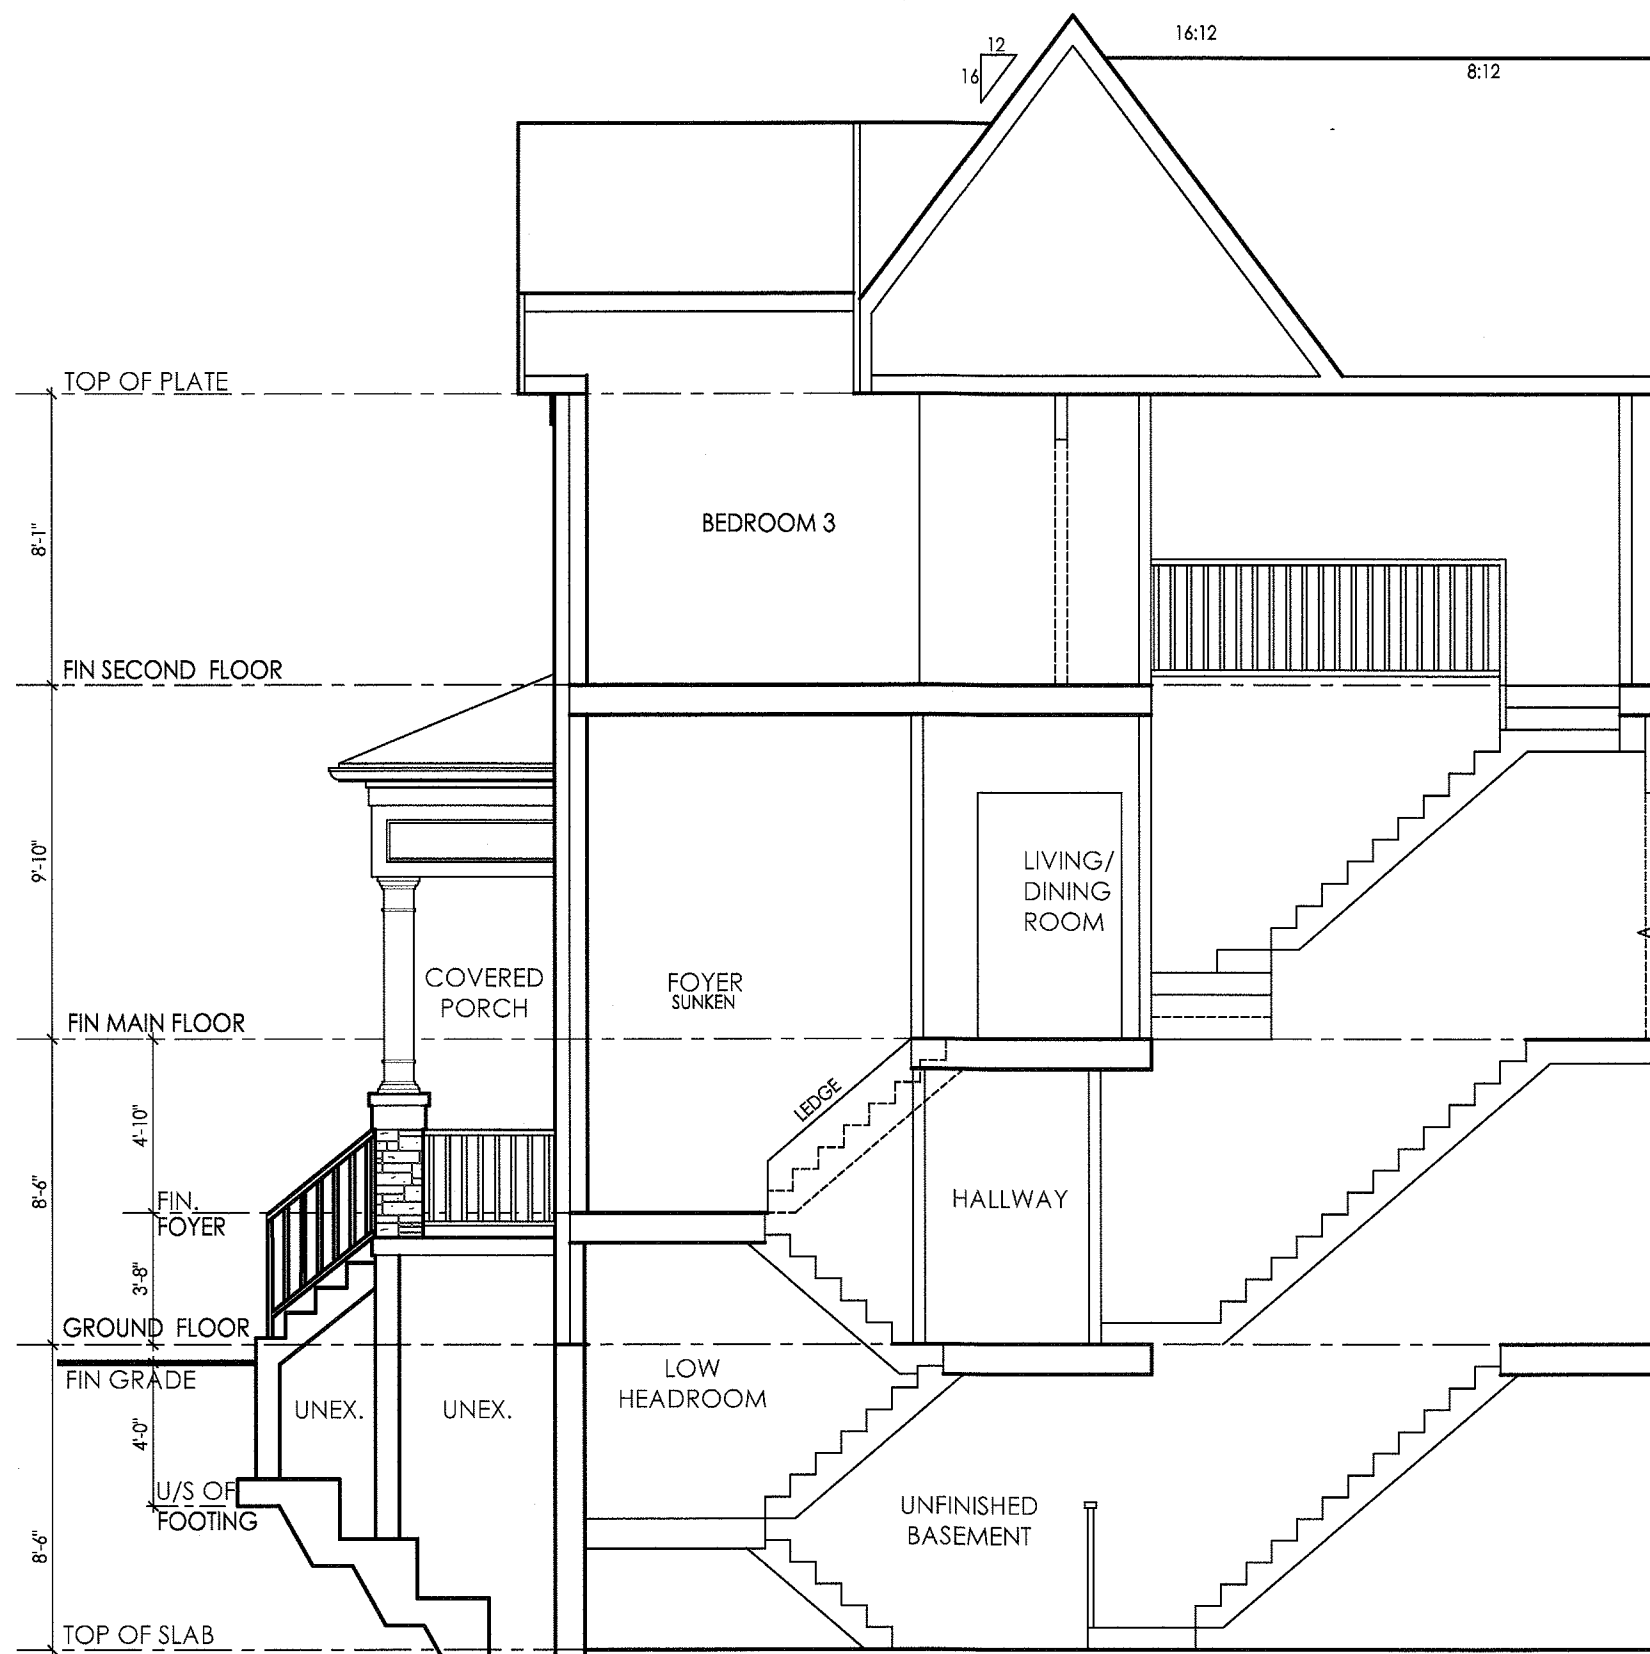


STAIR CROSS-SECTION

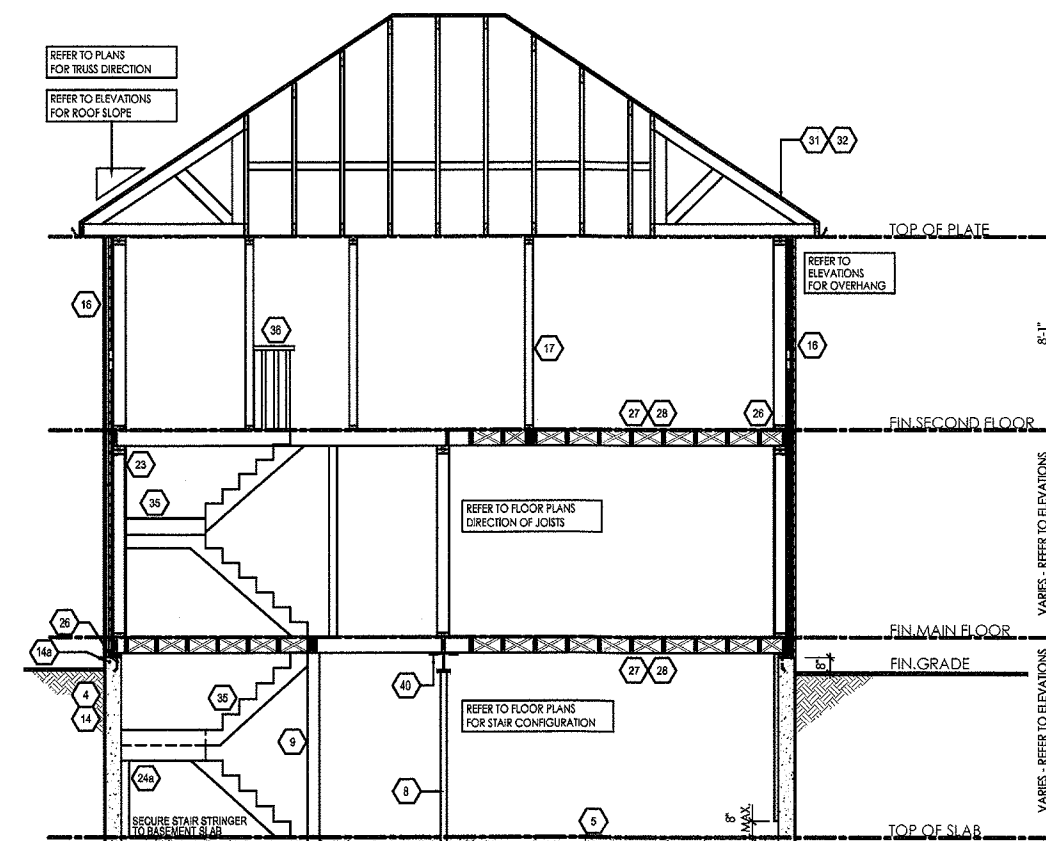

TYPICAL CROSS-SECTION

SCALE: N.T.S.

RN design
Imagine • Inspire • Create



I, JULIO PINZON DECLARE THAT I HAVE REVIEWED AND TAKEN DESIGN RESPONSIBILITY FOR THE DESIGN WORK ON BEHALF OF RN DESIGN LTD. UNDER DIVISION C-PART-3 SUBSECTION 3.2.4 OF THE BUILDING CODE. I AM QUALIFIED AND THE FIRM IS REGISTERED IN THE APPROPRIATE CLASSES / CATEGORIES.

QUALIFIED DESIGNER BCIN: 38688
FIRM BCIN: 26995
DATE: 1.1.16

SIGNATURE:

#	revisions	date	dwn	chk
1	ISSUED FOR CLIENT REVIEW	30-Jan-15	BU	RPA
2	ISSUED FOR PERMIT	24-FEB-16	JP	JP
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				

client

Gold Park
Homes

project

Huntington &
Nashville
Kleinburg

model

25-7

project #

14043

scale

page

A10