


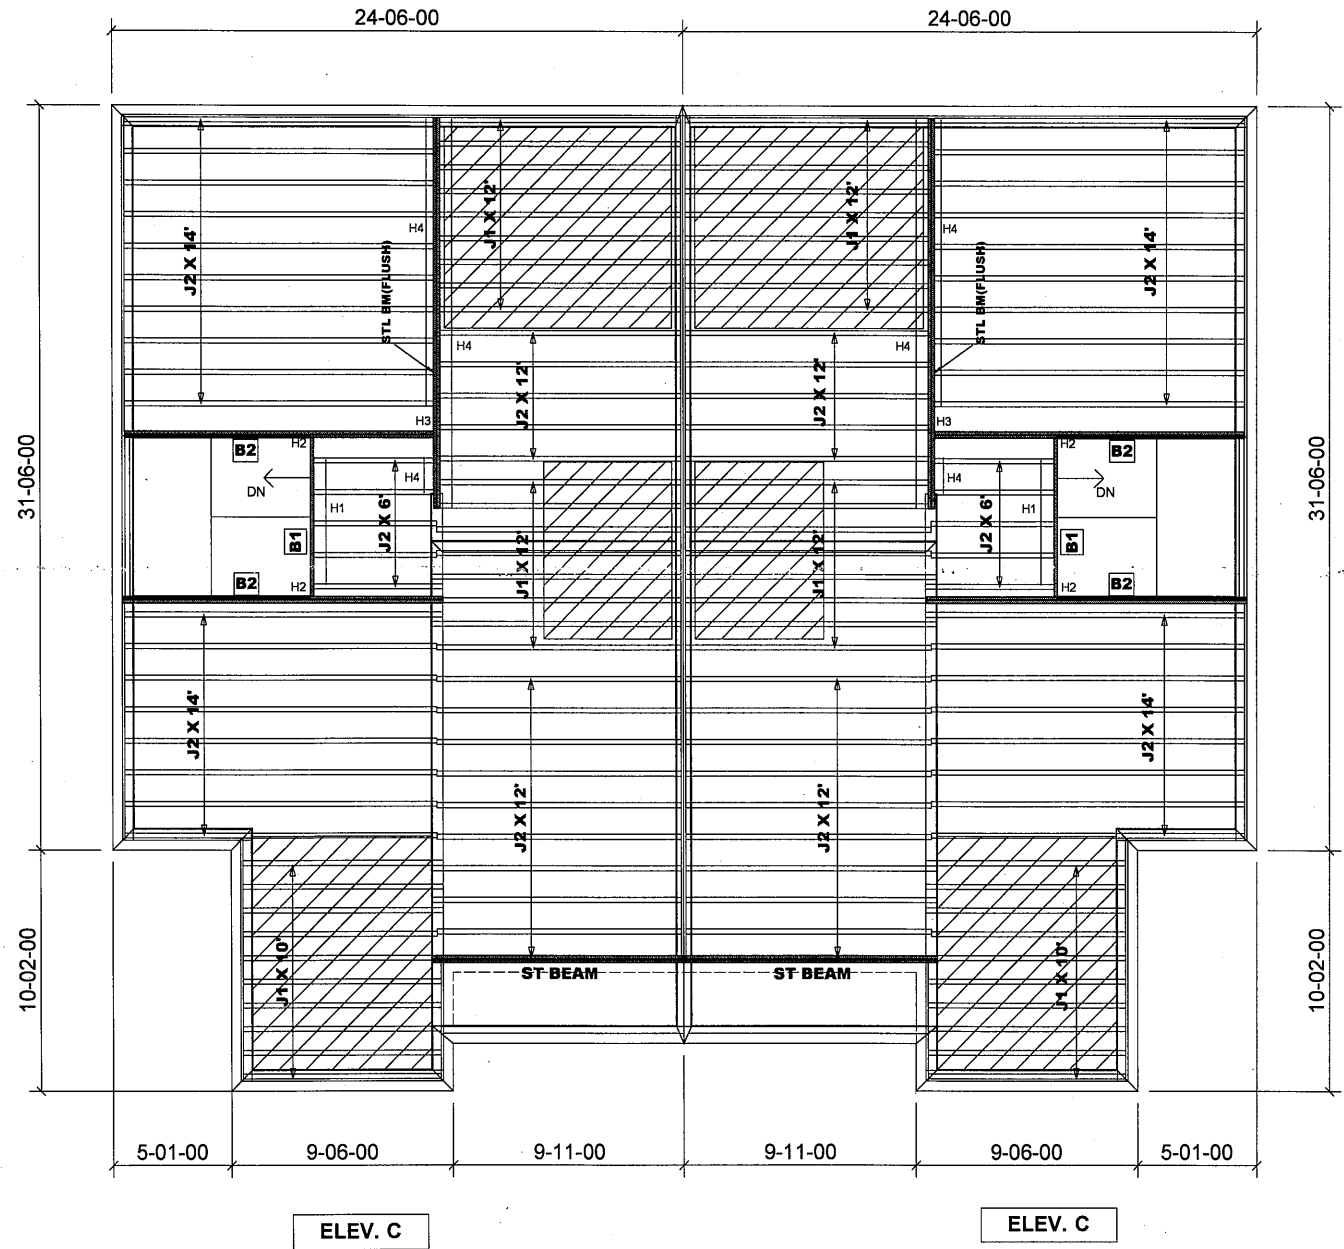

Products				
PlotID	Length	Product	Plies	Net Qty
B2	14-00-00	VERSALAM-10 2.0E	2	8
B1	7-00-00	VERSALAM-10 2.0E	1	2

JOIST SCHEDULE

J1 - 9 1/2" NI-20 @ 12" O/C
 J2 - 9 1/2" NI-20 @ 16" O/C

SUBFLOOR - 5/8" NAILED & GLUED

HANGER SCHEDULE

H1-----LT259 (TM)
 H2-----HUS1.81/10(FM)
 H3-----HGUS410(FM)
 H4-----LF259 (FM)


NOTE:
 TM -----TOP MOUNT HANGERS
 FM-----FACE MOUNT HANGERS

RIMBOARD

1- 1/8" X 9 1/2" O.S.B.

APP - AS PER PLAN
 BBO - BEAM BY OTHERS

JOIST SPACING UNDER CERAMIC TILE IS 12" O.C.




Second Floor Framing

Do not scale - refer to architectural plans for dimensions

MODEL: SD - 2

FIRM BCIN 28103
 DESIGNER BCIN 23991

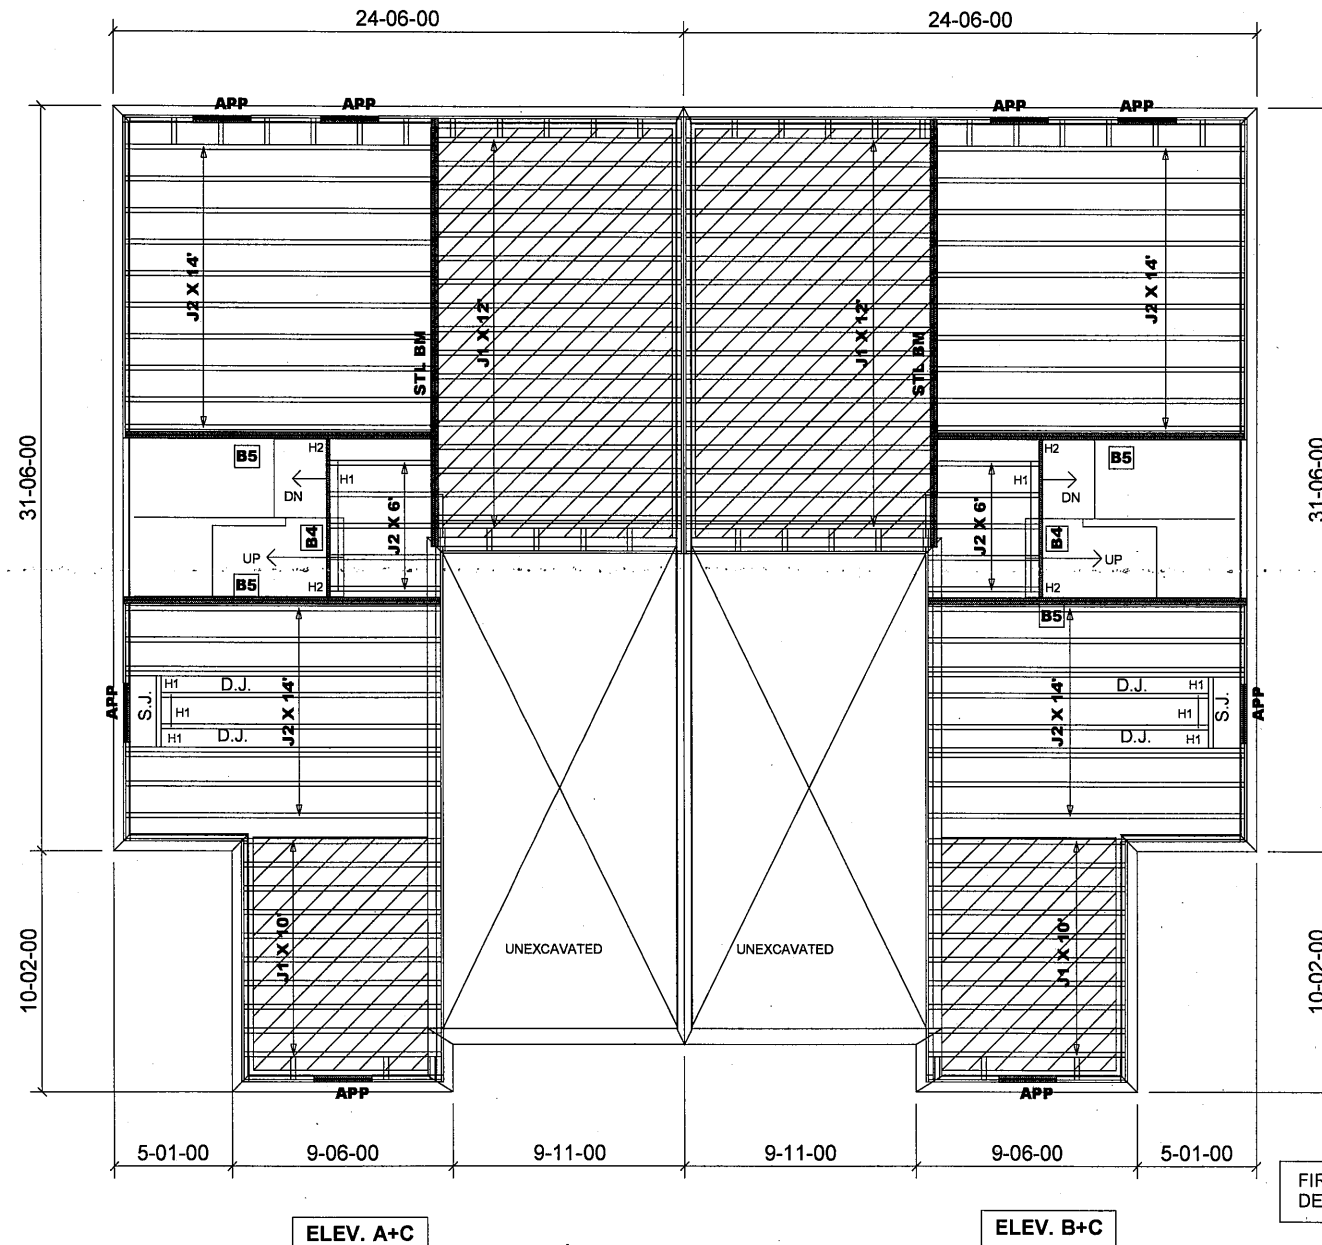

Products				
PlotID	Length	Product	Plies	Net Qty
B5	14-00-00	VERSALAM-10 2.0E	2	8
B4	7-00-00	VERSALAM-10 2.0E	1	2

JOIST SCHEDULE

J1 - 9 1/2" NI-20 @ 12" O/C
J2 - 9 1/2" NI-20 @ 16" O/C

SUBFLOOR - 5/8" NAILED & GLUED

HANGER SCHEDULE

H1-----LT259 (TM)
H2-----HUS1.81/10(FM)

NOTE:

TM-----TOP MOUNT HANGERS
FM-----FACE MOUNT HANGERS

RIMBOARD

1- 1/8" X 9 1/2" O.S.B.

APP - AS PER PLAN

BBO - BEAM BY OTHERS

JOIST SPACING UNDER CERAMIC TILE IS 12" O.C.

1- 2X6 SPF#2 Squash Block req'd on one side of each joist under interior load bearing walls. Multiple Squash Blocks are req'd under concentrated loads.

First Floor Framing

Do not scale - refer to architectural plans for dimensions

FIRM BCIN 28103
DESIGNER BCIN 23991

MODEL: SD - 2
W W.O.D. CONDITION

JT: 39002/103050

Builder: Gold Park

Location: Brampton

Designer: NL

Alpa Roof Trusses Inc.

Salesperson: Derek

LI: 310416(244616)


Project: Mclaughlin and Mayfield


Date: July 3, 2019

Sheet: 4 of 8

Maple, Ontario

Home Lumber



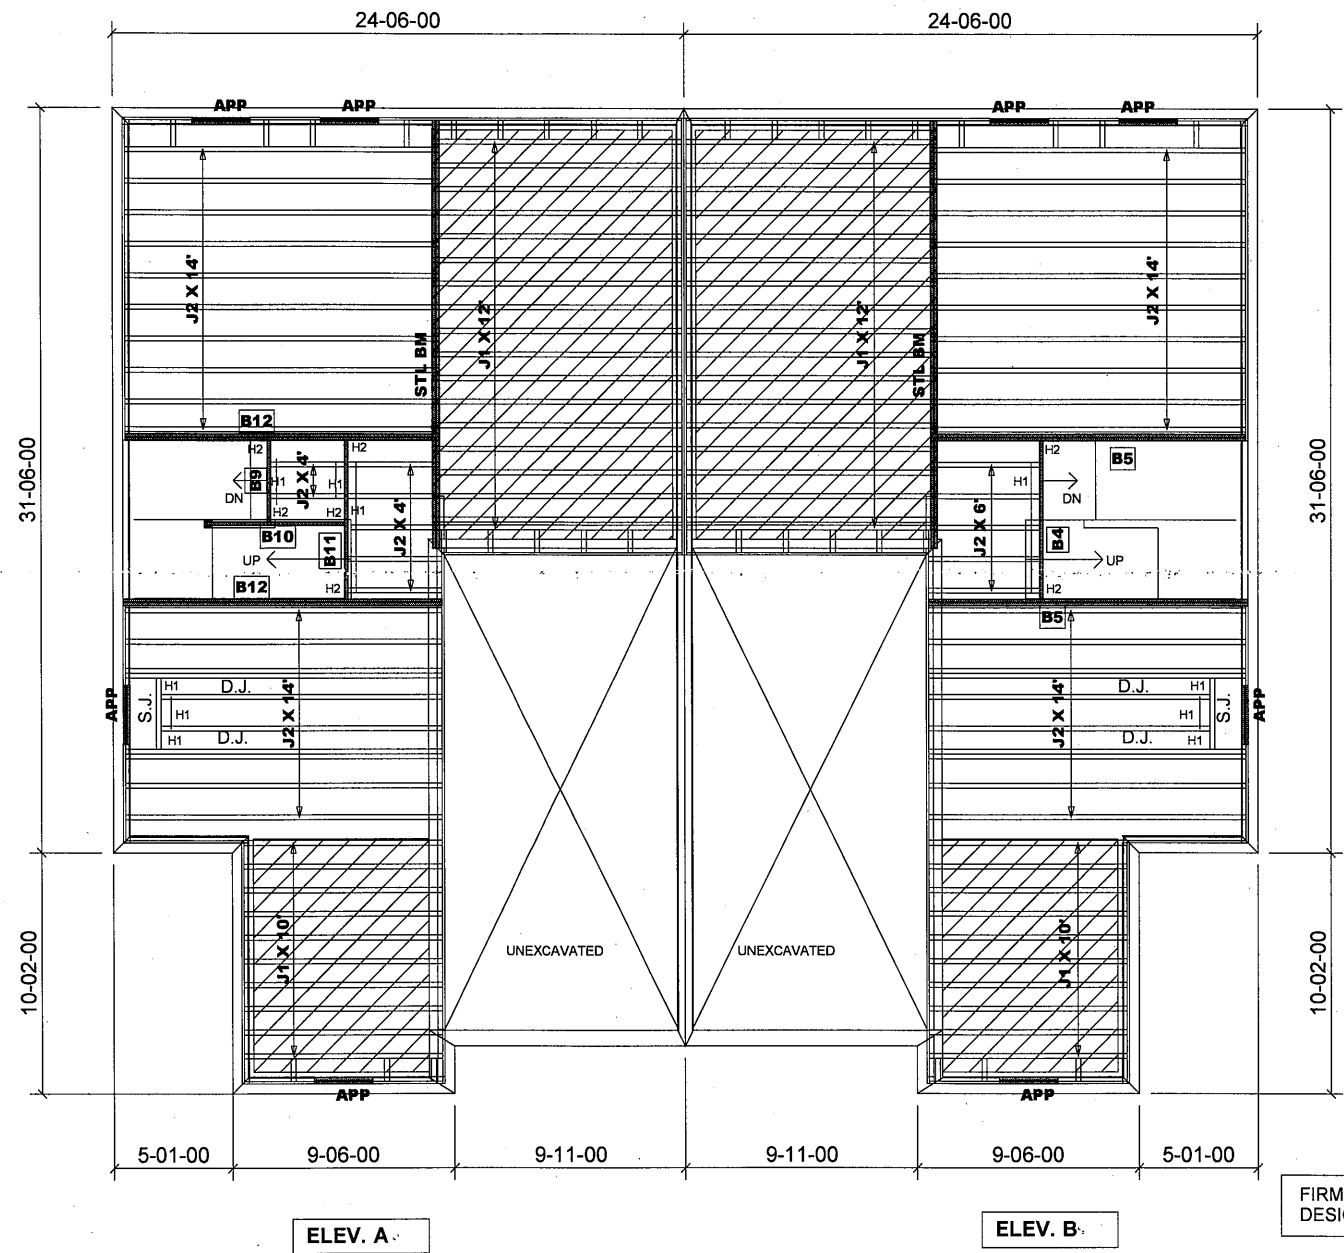

Products				
PlotID	Length	Product	Plies	Net Qty
B12	14-00-00	VERSALAM-10 2.0E	2	4
B5	14-00-00	VERSALAM-10 2.0E	2	4
B10	7-00-00	VERSALAM-10 2.0E	1	1
B11	7-00-00	VERSALAM-10 2.0E	1	1
B4	7-00-00	VERSALAM-10 2.0E	1	1
B9	4-00-00	VERSALAM-10 2.0E	1	1

JOIST SCHEDULE

J1 - 9 1/2" NI-20 @ 12" O/C
 J2 - 9 1/2" NI-20 @ 16" O/C

SUBFLOOR - 5/8" NAILED & GLUED

HANGER SCHEDULE

H1-----LT259 (TM)
 H2-----HUS1.81/10(FM)

NOTE:
 TM -----TOP MOUNT HANGERS
 FM-----FACE MOUNT HANGERS


RIMBOARD

1- 1/8" X 9 1/2" O.S.B.

APP - AS PER PLAN
 BBO - BEAM BY OTHERS

JOIST SPACING UNDER CERAMIC TILE IS 12" O.C.

1- 2X6 SPF#2 Squash Block req'd on one side of each joist under interior load bearing walls. Multiple Squash Blocks are req'd under concentrated loads.




First Floor Framing

Do not scale - refer to architectural plans for dimensions

FIRM BCIN 28103
 DESIGNER BCIN 23991

MODEL: SD - 2
W/OPT. SIDE DOOR(EL.A)

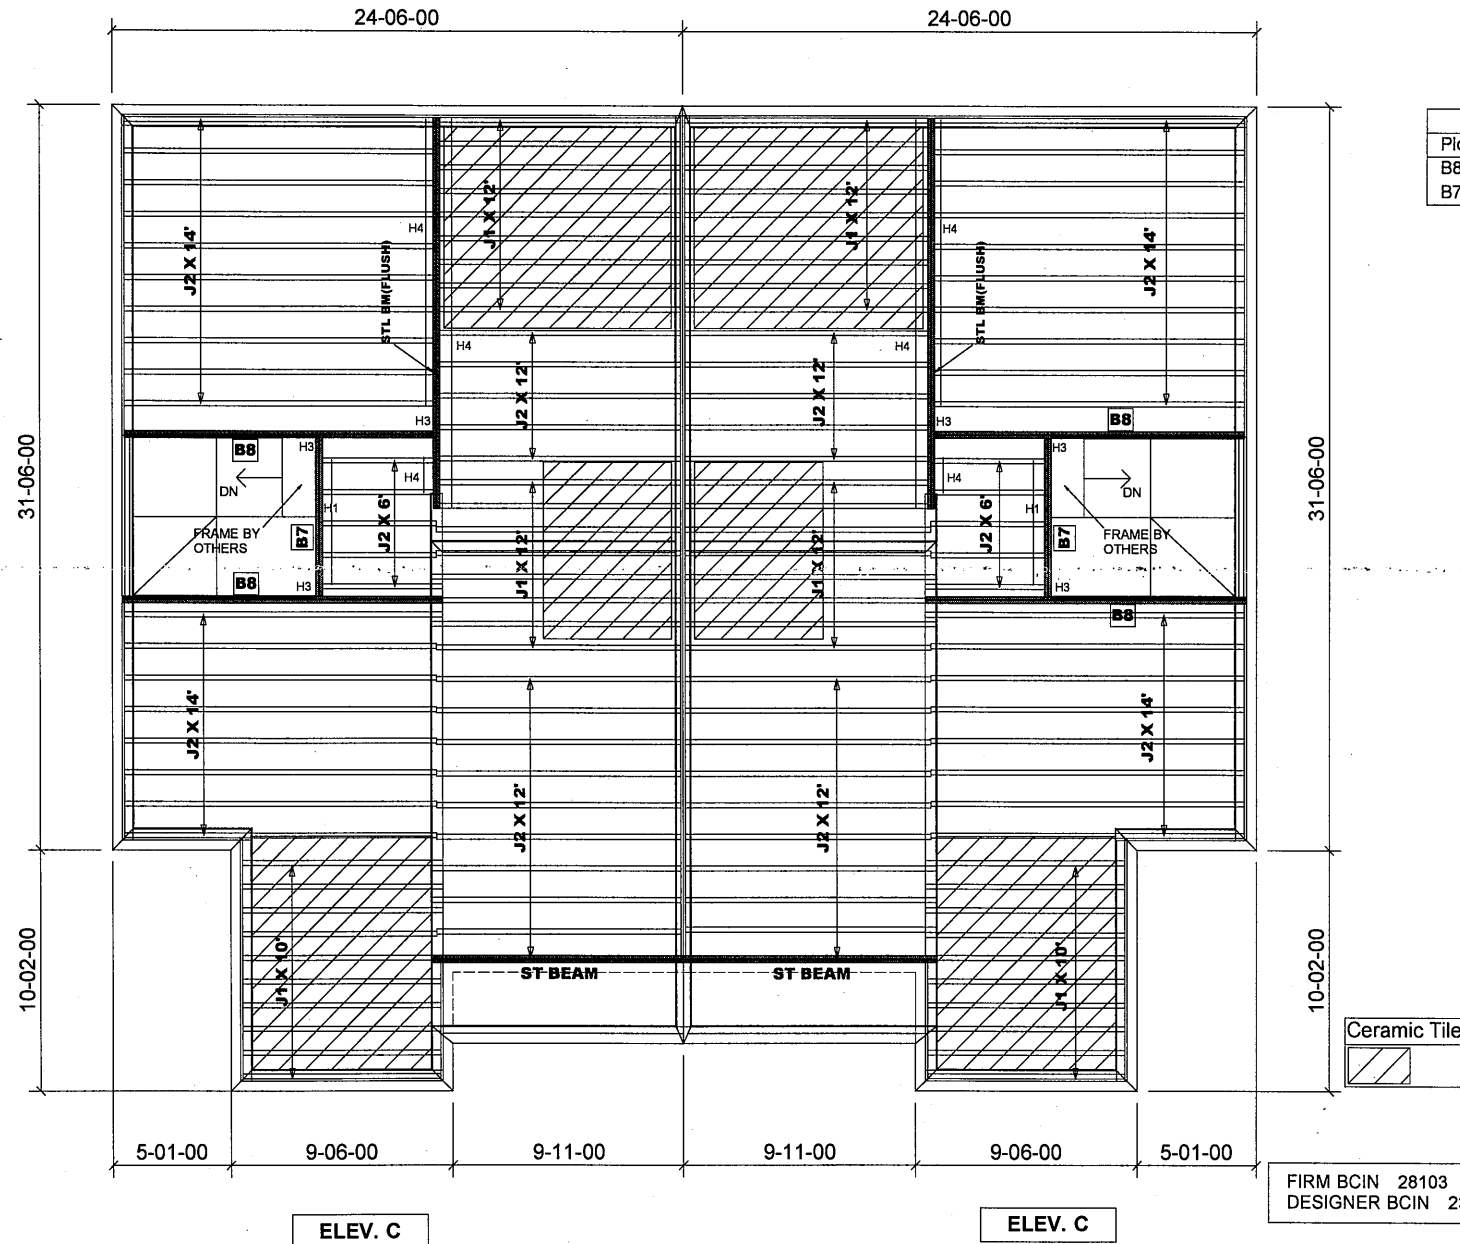

Products				
PlotID	Length	Product	Plies	Net Qty
B8	14-00-00	VERSALAM-10 2.0E	2	8
B7	7-00-00	VERSALAM-10 2.0E	2	4

JOIST SCHEDULE

J1 - 9 1/2" NI-20 @ 12" O/C
J2 - 9 1/2" NI-20 @ 16" O/C

SUBFLOOR - 5/8" NAILED & GLUED

HANGER SCHEDULE

H1-----LT259 (TM)
H2-----HUS1.81/10(FM)
H3-----HGUS410(FM)
H4-----LF259 (FM)

NOTE:

TM -----TOP MOUNT HANGERS
FM-----FACE MOUNT HANGERS

RIMBOARD

1- 1/8" X 9 1/2" O.S.B.

APP - AS PER PLAN
BBO - BEAM BY OTHERS

JOIST SPACING UNDER CERAMIC TILE IS 12" O.C.

Second Floor Framing

Do not scale - refer to architectural plans for dimensions

FIRM BCIN 28103
DESIGNER BCIN 23991

MODEL: SD - 2
W/OPT. SIDE DOOR

JT: 39002/103050
LI: 310416(244616)


Builder: Gold Park
Project: Mclaughlin and Mayfield

Location: Brampton
Date: July 4, 2019

Designer: NL
Sheet: 7 of 8

Alpa Roof Trusses Inc.
Maple, Ontario

Salesperson: Derek
Home Lumber

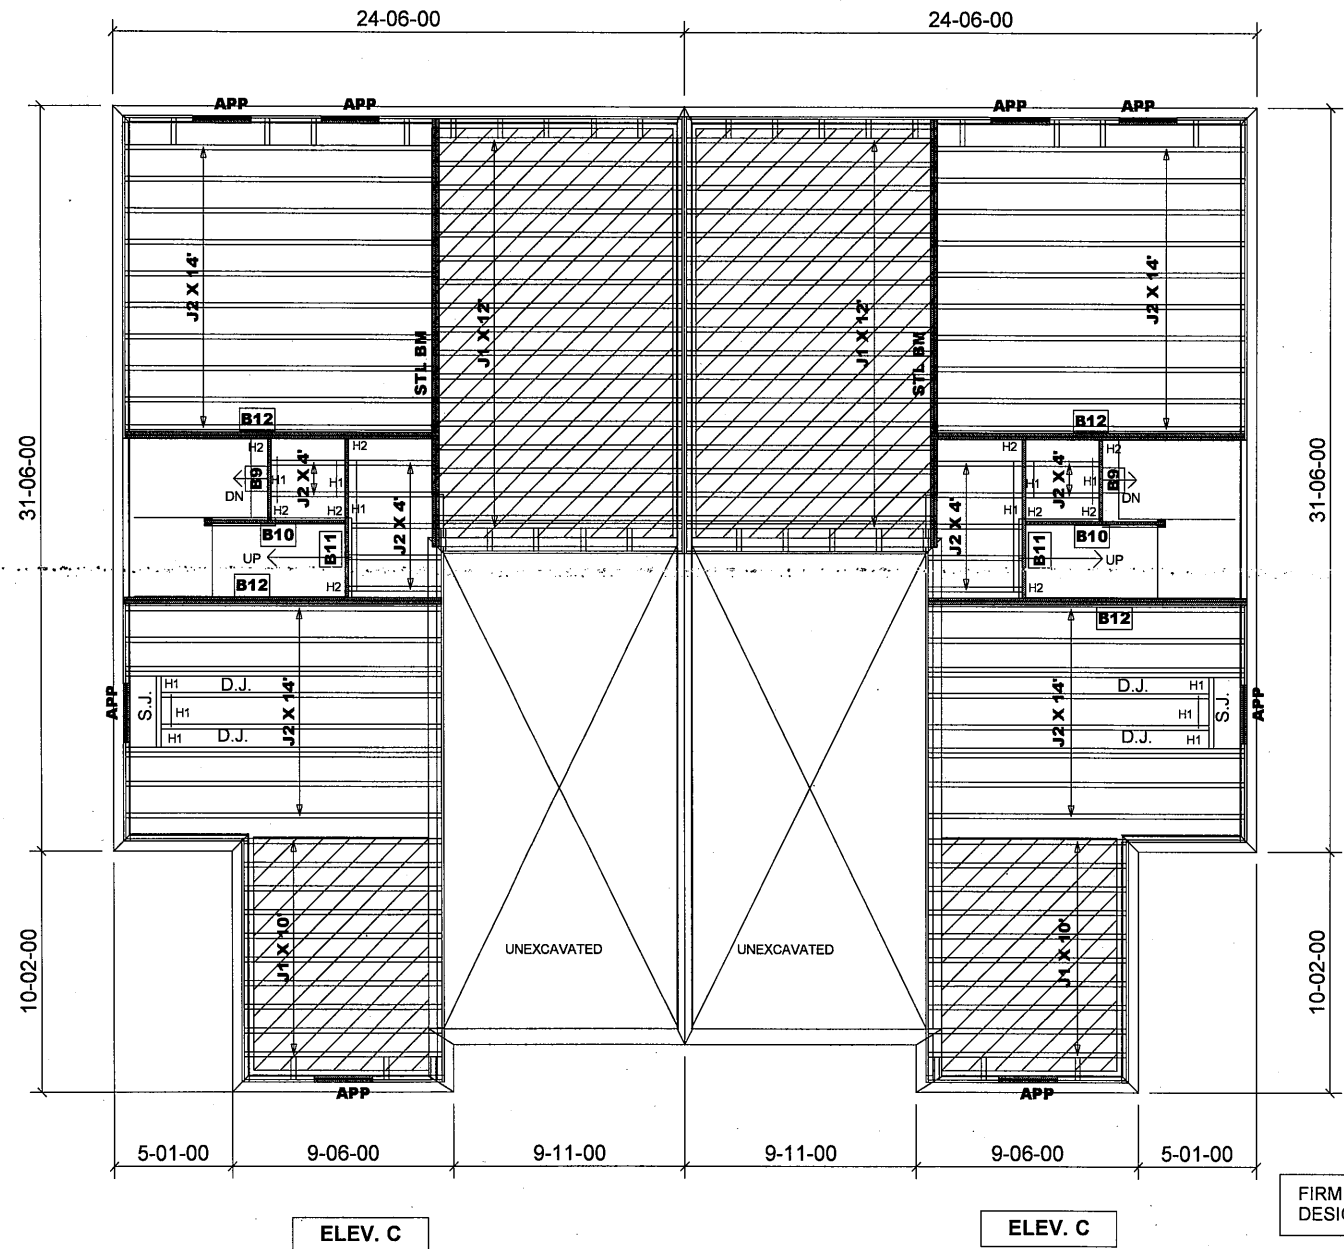

Products				
PlotID	Length	Product	Plies	Net Qty
B12	14-00-00	VERSALAM-10 2.0E	2	8
B10	7-00-00	VERSALAM-10 2.0E	1	2
B11	7-00-00	VERSALAM-10 2.0E	1	2
B9	4-00-00	VERSALAM-10 2.0E	1	2

JOIST SCHEDULE

J1 - 9 1/2" NI-20 @ 12" O/C
 J2 - 9 1/2" NI-20 @ 16" O/C

SUBFLOOR - 5/8" NAILED & GLUED

HANGER SCHEDULE

H1-----LT259 (TM)
 H2-----HUS1.81/10(FM)

NOTE:
 TM -----TOP MOUNT HANGERS
 FM-----FACE MOUNT HANGERS


RIMBOARD

1- 1/8" X 9 1/2" O.S.B.

APP - AS PER PLAN
 BBO - BEAM BY OTHERS

JOIST SPACING UNDER CERAMIC TILE IS 12" O.C.

1- 2X6 SPF#2 Squash Block req'd on one side of each joist under interior load bearing walls. Multiple Squash Blocks are req'd under concentrated loads.




First Floor Framing

Do not scale - refer to architectural plans for dimensions

FIRM BCIN 28103
 DESIGNER BCIN 23991

**MODEL: SD - 2
 W/OPT. SIDE DOOR**

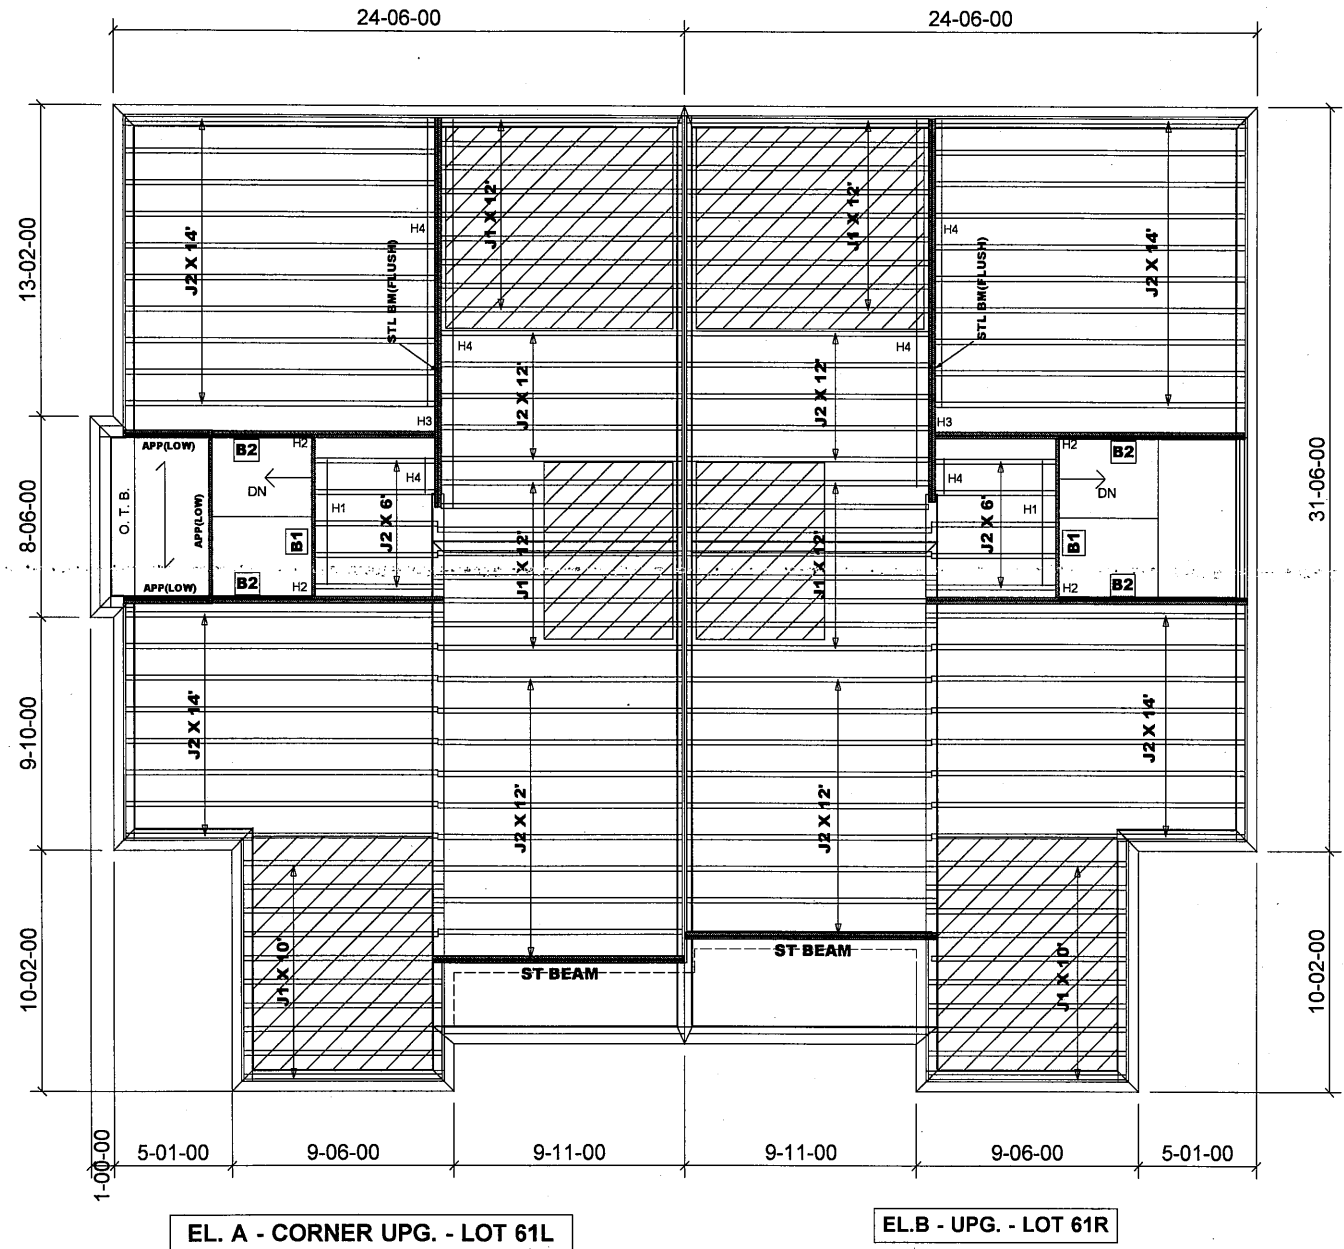

Products				
PlotID	Length	Product	Plies	Net Qty
B2	14-00-00	VERSALAM-10 2.0E	2	8
B1	7-00-00	VERSALAM-10 2.0E	1	2

JOIST SCHEDULE

J1 - 9 1/2" NI-20 @ 12" O/C
 J2 - 9 1/2" NI-20 @ 16" O/C

SUBFLOOR - 5/8" NAILED & GLUED

HANGER SCHEDULE

H1-----LT259 (TM)
 H2-----HUS1.81/10(FM)
 H3-----HGUS410(FM)
 H4-----LF259 (FM)

NOTE:
 TM -----TOP MOUNT HANGERS
 FM-----FACE MOUNT HANGERS

RIMBOARD

1- 1/8" X 9 1/2" O.S.B.

APP - AS PER PLAN
 BBO - BEAM BY OTHERS


JOIST SPACING UNDER CERAMIC TILE IS 12" O.C.

Second Floor Framing

Do not scale - refer to architectural plans for dimensions

MODEL: SD - 2

FIRM BCIN 28103
 DESIGNER BCIN 23991

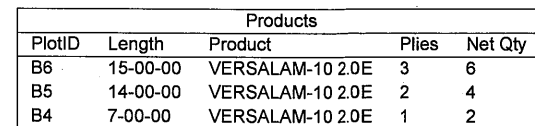

J1 - 9 1/2" NI-20 @ 12" O/C
J2 - 9 1/2" NI-20 @ 16" O/C

H1-----LT259 (TM)
H2-----HUS1.81/10(FM)

TM-----TOP MOUNT HANGERS
FM-----FACE MOUNT HANGERS

APP - AS PER PLAN
BBO - BEAM BY OTHERS


1- 2X6 SPF#2 Squash Block req'd on one side of each joist under interior load bearing walls. Multiple Squash Blocks are req'd under concentrated loads.

Ceramic Tile	
--------------	--

Do not scale - refer to architectural plans for dimensions

MODEL: SD - 2

FIRM BCIN 28103
DESIGNER BCIN 23991

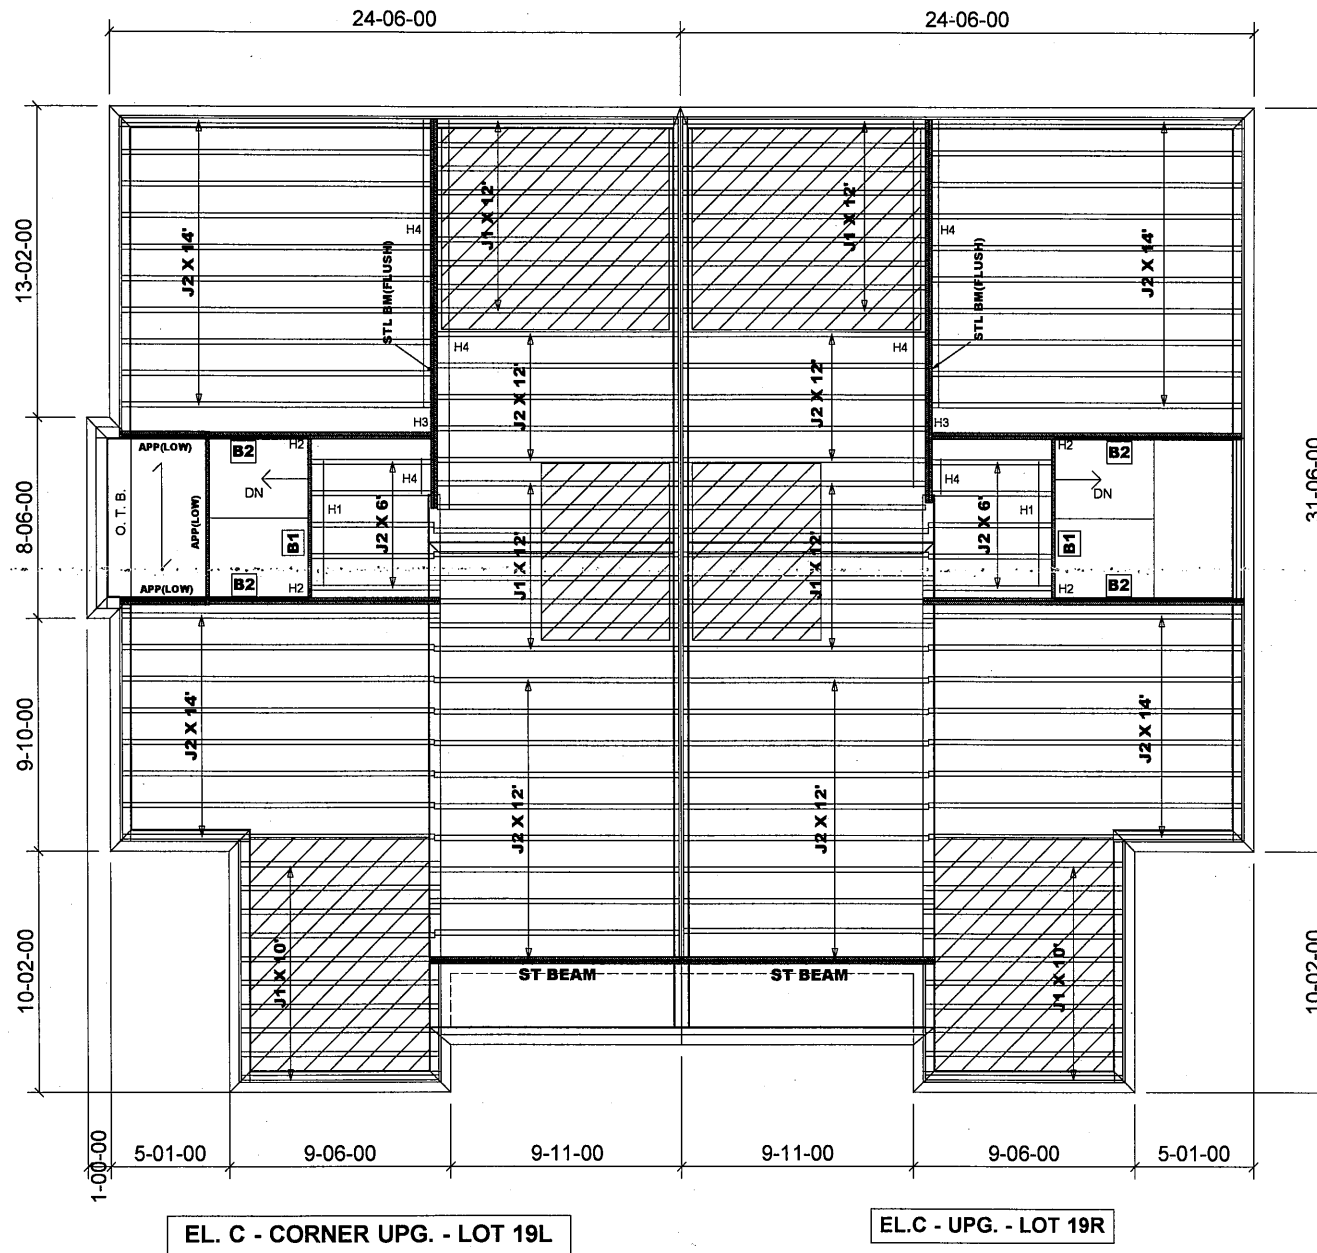

Products				
PlotID	Length	Product	Plies	Net Qty
B2	14-00-00	VERSALAM-10 2.0E	2	8
B1	7-00-00	VERSALAM-10 2.0E	1	2

JOIST SCHEDULE

J1 - 9 1/2" NI-20 @ 12" O/C
J2 - 9 1/2" NI-20 @ 16" O/C

SUBFLOOR - 5/8" NAILED & GLUED

HANGER SCHEDULE

H1 ----- LT259 (TM)
H2 ----- HUS1.81/10(FM)
H3 ----- HGUS410(FM)
H4 ----- LF259 (FM)

NOTE:


TM ----- TOP MOUNT HANGERS
FM ----- FACE MOUNT HANGERS

RIMBOARD

1- 1/8" X 9 1/2" O.S.B.

APP - AS PER PLAN
BBO - BEAM BY OTHERS

JOIST SPACING UNDER CERAMIC TILE IS 12" O.C.



Second Floor Framing

Do not scale - refer to architectural plans for dimensions

MODEL: SD - 2

FIRM BCIN 28103
DESIGNER BCIN 23991

JT: 39002/103050
LI: 310416(244616)


Builder: Gold Park
Project: Mclaughlin and Mayfield

Location: Brampton
Date: July 4, 2019

Designer: NL
Sheet: 1 of 2

Alpa Roof Trusses Inc.
Maple, Ontario

Salesperson: Derek
Home Lumber

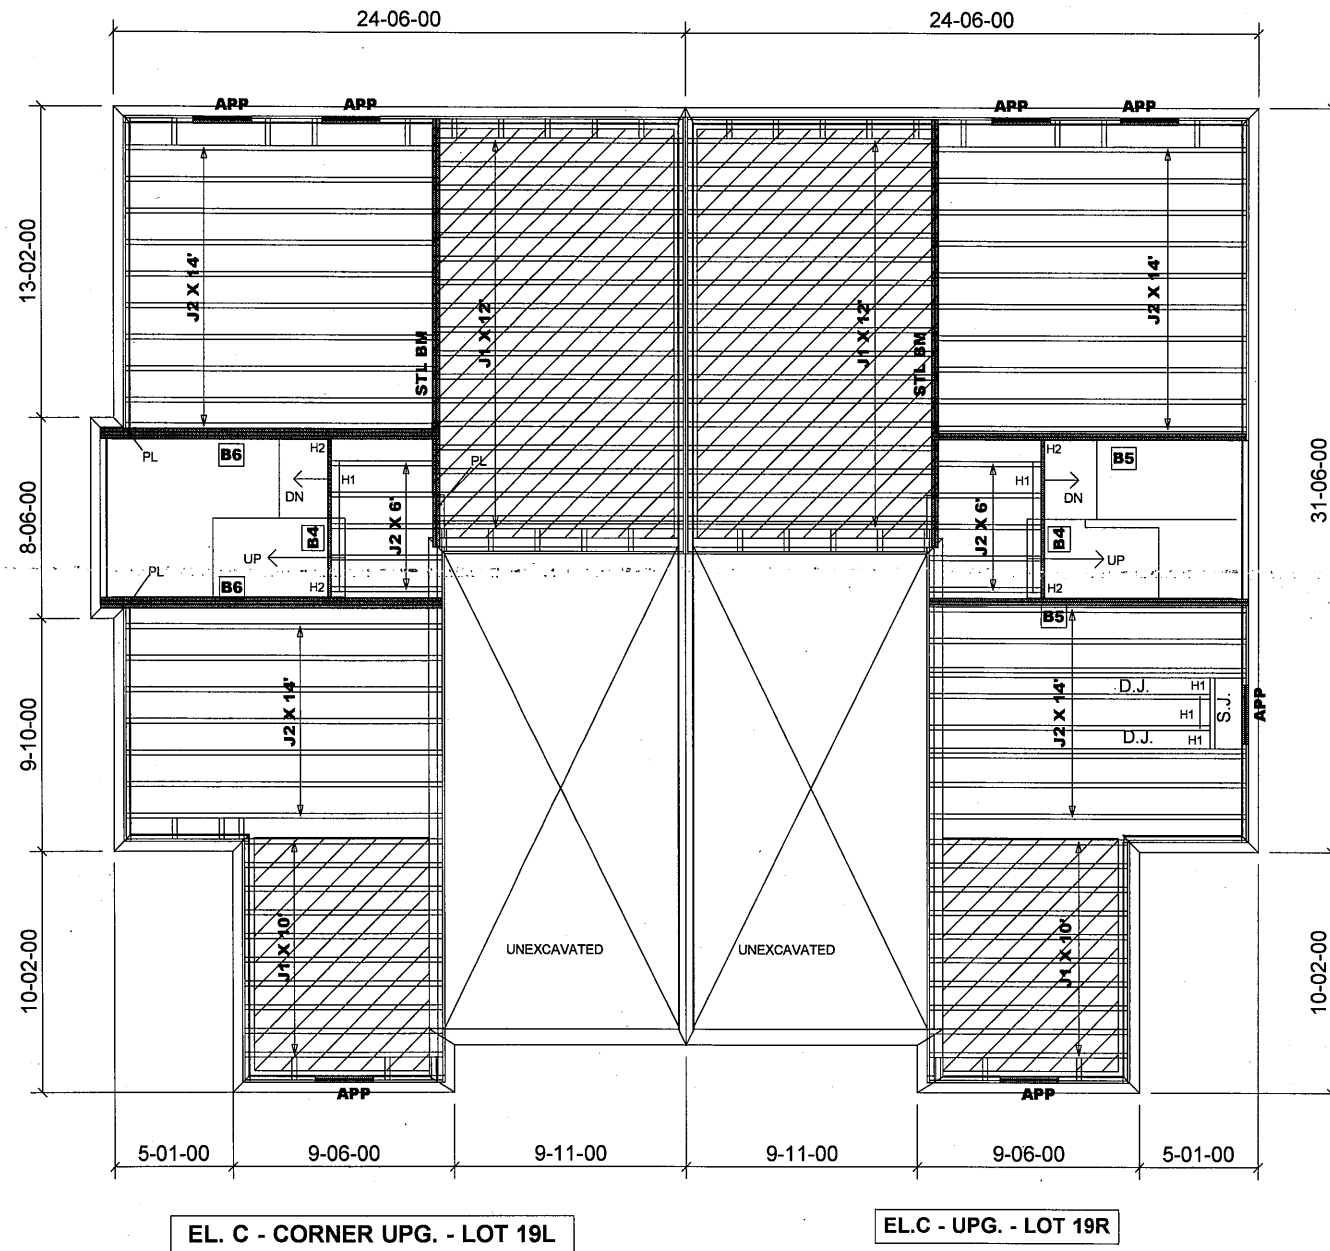

Products				
PlotID	Length	Product	Plies	Net Qty
B6	15-00-00	VERSALAM-10 2.0E	3	6
B5	14-00-00	VERSALAM-10 2.0E	2	4
B4	7-00-00	VERSALAM-10 2.0E	1	2

JOIST SCHEDULE

J1 - 9 1/2" NI-20 @ 12" O/C
J2 - 9 1/2" NI-20 @ 16" O/C

SUBFLOOR - 5/8" NAILED & GLUED

HANGER SCHEDULE

H1-----LT259 (TM)
H2-----HUS1.81/10(FM)

NOTE:

TM-----TOP MOUNT HANGERS
FM-----FACE MOUNT HANGERS

RIMBOARD

1- 1/8" X 9 1/2" O.S.B.

APP - AS PER PLAN
BB0 - BEAM BY OTHERS

JOIST SPACING UNDER CERAMIC TILE IS 12" O.C.

1- 2X6 SPF#2 Squash Block req'd on one side of each joist under interior load bearing walls. Multiple Squash Blocks are req'd under concentrated loads.

First Floor Framing

Do not scale - refer to architectural plans for dimensions

MODEL: SD - 2

FIRM BCIN 28103
DESIGNER BCIN 23991

JT: 39002/103050

Builder: Gold Park

Location: Brampton

Designer: NL

Alpa Roof Trusses Inc.

Salesperson: Derek

LI: 310416(244616)

Project: Mclaughlin and Mayfield

Date: July 4, 2019

Sheet: 2 of 2

Maple, Ontario

Home Lumber