

30" (76.2 CM) AND 36" (91.4 CM) GAS BUILT-IN COOKTOP

BE2-93

PRODUCT MODEL NUMBERS

KCGS350E	KCGS950E	MGC9530D	WCG75US0D
KCGS356E	KCGS956E	MGC9536D	WCG97US0D
KCGS550E	MGC7430D	WCG51US0D	WCG97US6D
KCGS556E	MGC7536D	WCG51US6D	

GAS SUPPLY REQUIREMENTS

Type of Gas

Natural Gas:

- This cooktop is factory set for use with Natural gas. If converting to LP gas, see the "LP Gas Conversion" instructions provided in the package containing literature. The model/serial rating plate located on the underside of the cooktop base has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP Gas Conversion:

Conversion must be done by a qualified service technician.

No attempt shall be made to convert the cooktop from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See the Gas Conversion instructions provided in the package containing literature.

Gas Supply Line

- Provide a gas supply line of 3/4" (1.9 cm) rigid pipe to the cooktop location. A smaller size pipe on longer runs may result in insufficient gas supply. Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON<sup>®</sup> tape. With LP gas, piping or tubing size should be 1/2" minimum. Usually, LP gas suppliers determine the size and materials used in the system.


Flexible metal appliance connector:

- If local codes permit, use a 1/2" or 3/4" I.D. flexible stainless steel tubing gas connector, designed by CSA to connect the cooktop to the rigid gas supply line.



- A 1/2" male pipe thread is needed for connection to the female pipe threads of the inlet to the cooktop pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the cooktop.

- Must include a shutoff valve:  
The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the cooktop opening, such as an adjacent cabinet. It must be accessible without removing the cooktop, and it should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the cooktop.



A. Gas supply line  
B. Shutoff valve "open" position  
C. To cooktop

<sup>1</sup> TEFLON is a registered trademark of E.I. Du Pont De Nemours and Company.

ELECTRICAL REQUIREMENTS

- A 120 volt, 60 Hz, AC only, 15-amp, fused electrical circuit is required. A time-delay fuse or circuit breaker is also recommended. It is recommended that a separate circuit serving only this cooktop be provided.
- Electronic ignition systems operate within wide voltage limits, but proper grounding and polarity are necessary. Check that the outlet provides 120-volt power and is correctly grounded.

KCGS956ESS

July/8/2019



July 17/2019

*[Signature]*


# SINGLE WALL OVENS

Dimensions - shown in inches


MODEL NO.	30-INCH KOSES00E KOST100E	27-INCH KOSES07E KOST107E	24-INCH KOSCS
<b>PRODUCT DIMENSIONS</b>			
Recessed Width (A)	28 1/4 max.	25 1/4 max.	22 1/4 max.
Overall Height (B)	28 1/4 max.	28 3/4 max.	29 max.
Overall Width (C)	30	27	23 1/4
Recessed Depth (D)	23 1/4 max.	23 1/4 max.	23 1/4 max.
Recessed Height (E)	26 1/4	26 1/4	27 1/2
<b>OVEN CAVITY DIMENSIONS</b>			
Width	25	22	19
Height	18	18	16
Depth	19	19	17 1/4
<b>CUTOUT DIMENSIONS</b>			
Width (F)	28 1/2	25 1/2	22 1/2
Height (G)	28*	28*	27 1/4 min.
Depth (H)	24	24	23 1/4 min.

\*Recommended cutout height. Will fit cutout height from 26 1/4" to 29 1/4"


## PRODUCT DIMENSIONS



**Important Installation Information**  
 Regarding Flush Install  
 Flush install requires a special kit.  
 See page X-4 for Flush Install Kit Part Number.  
 Regarding the Steam Function  
 The steam function on this oven is configured for direct plumbing to a nearby water supply. Included with the product are the water filter housing, one water filter, a small section of copper tubing at the back of the oven, and a water supply union to attach the copper tubing to the water supply line. Water supply lines are not included. The water filtration system should be installed upright and adjacent to the oven near the cold water supply pipe under the kitchen sink.  
 See Installation Instructions for complete details.




## CUTOUT DIMENSIONS

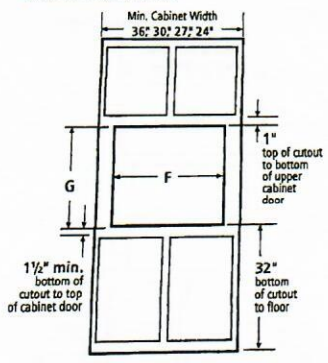

## LOCATION REQUIREMENTS

Electrical supply junction box should be located 3" maximum below the support surface when the oven is installed in a wall cabinet. A 1" minimum diameter hole should have been drilled in the right rear or left rear corner of the support surface to pass the appliance cable through to the junction box.  
 NOTE: For undercounter installation, it is recommended that the junction box be located in the adjacent right or left cabinet. If you are installing the junction box on rear wall behind oven, the junction box must be recessed and located in the upper or lower right or left corner of the cabinet; otherwise, the oven will not fit into the cabinet opening.

## Undercounter



Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

KitchenAid

X-12


Dimensions  
Cooking



## BUILT-IN MICROWAVE OVENS


### PRODUCT DIMENSIONS

KMBP100E, KMBP107E



- A. KMBP100E: 25 1/4" recessed width  
KMBP107E: 25 1/4" recessed width
- B. 18 1/4" overall height
- C. KMBP100E: 29 1/4" overall width  
KMBP107E: 25 1/4" overall width
- D. 21 1/2" overall depth
- E. 17 1/4" recessed height

### SPACER KIT DIMENSIONS




The included microwave oven spacer kit will allow the microwave oven to be installed in a 17 1/4"-17 3/4" maximum cutout height.

- A. KMBP100E: 29 1/4" overall width  
KMBP107E: 25 1/4" overall width

An optional microwave oven spacer kit is available that will allow the microwave oven to be installed in a 19"-19 1/4" maximum cutout height.  
KMBP100E: Model W10469903  
KMBP107E: Model W10469901

### CUTOUT DIMENSIONS



- A. KMBP100E: 30" min. cabinet width  
KMBP107E: 27" min. cabinet width
- B. 18 1/4" height from bottom of cutout to bottom of upper cabinet door
- C. 40" bottom of cutout to floor (recommended)
- D. KMBP100E: 28 1/4" cutout width  
KMBP107E: 25 1/4" cutout width
- E. 1 1/4" min. bottom of cutout to top of cabinet door
- F. 17 1/4" recommended cutout height\*
- G. 21 1/2" min. cutout depth
- \*Will fit cutout height from 17 1/4" to 17 3/4"

### LOCATION REQUIREMENTS

Electrical supply junction box should be located 3" maximum below the support surface when the microwave oven is installed in a wall cabinet. A 1" minimum diameter hole should have been drilled in the right rear or left rear corner of the support surface to pass the appliance cable through to the junction box.

### Regarding Flush Install

Flush Install requires a special kit.

See page X-4 for Flush Install Kit Part Number.

Dimensions  
Cooking




Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

KitchenAid


X-29



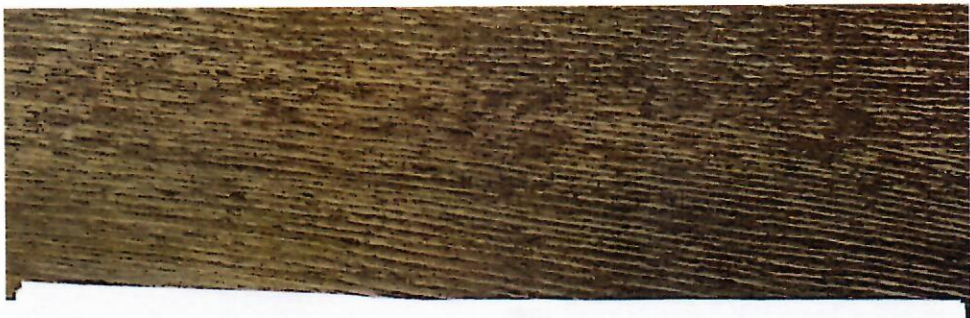


## BUILT-IN MICROWAVE OVENS

### PRODUCT DIMENSIONS KMBP100E, KMBP107E



- A. KMBP100E: 25 1/4" recessed width  
KMBP107E: 25 1/4" recessed width
- B. 18 1/4" overall height
- C. KMBP100E: 28 1/2" overall width  
KMBP107E: 28 1/2" overall width
- D. 21 1/2" overall depth
- E. 17 1/4" recessed height

### SPACER KIT DIMENSIONS




The included microwave oven spacer kit will allow the microwave oven to be installed in a 17 1/4"-17 3/4" maximum cutout height.

- A. KMBP100E: 29 1/4" overall width  
KMBP107E: 26 1/4" overall width

An optional microwave oven spacer kit is available that will allow the microwave oven to be installed in a 19"-19 3/4" maximum cutout height.  
KMBP100E: Model W10469903  
KMBP107E: Model W10469901

### CUTOUT DIMENSIONS



- A. KMBP100E: 30" min. cabinet width  
KMBP107E: 27" min. cabinet width
  - B. 18 1/4" height from bottom of cutout to bottom of upper cabinet door
  - C. 40" bottom of cutout to floor (recommended)
  - D. KMBP100E: 28 1/2" cutout width  
KMBP107E: 25 1/2" cutout width
  - E. 1 1/2" min. bottom of cutout to top of cabinet door
  - F. 17 1/4" recommended cutout height\*
  - G. 21 1/2" min. cutout depth
- \*Will fit cutout height from 17 3/8" to 17 3/4"

### LOCATION REQUIREMENTS

Electrical supply junction box should be located 3" maximum below the support surface when the microwave oven is installed in a wall cabinet. A 1" minimum diameter hole should have been drilled in the right rear or left rear corner of the support surface to pass the appliance cable through to the junction box.

### Regarding Flush Install

Flush install requires a special kit.  
See page X-4 for Flush Install Kit Part Number.

Dimensions  
Cooking



Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

KitchenAid


X-2



Scanned by CamScanner


## BUILT-IN MICROWAVE OVENS (CONTINUED)

PRODUCT DIMENSIONS  
KMBS104E




- A. 21 1/4" recessed width
  - B. 18" overall height\*
  - C. 23 1/4" overall width\*
  - D. 18 1/4" recessed depth
  - E. 17 1/2" recessed height
- \*Measurements include front facing of microwave oven.

### CUTOUT DIMENSIONS



- A. 24" installation: 22 1/4"  $\pm$  3/4" width
- 27" installation: 25 1/4"  $\pm$  3/4" width
- 30" installation: 25 1/4" min.-28 3/4" max. width
- B. 17 1/2" height
- C. 21 1/4" depth with flush receptacle or with non-flush receptacle located in far corner
- D. 26 1/4" depth with non-flush receptacle



- a. Microwave oven
- b. Non-flush receptacle
- c. Flush receptacle
- d. Non-flush receptacle located in upper right or upper left hand corner

Regarding Flush Install  
Flush install requires a special kit.  
See page X-4 for Flush Install Kit Part Number.

Dimensions  
Cooking

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

KitchenAid

X-30

