It is the builder's complete responsibility to ensure that all plans submitted for approval fully comply with the Architectural Guidelines and all applicable regulations and requirements including zoning provisions and any provisions in the subdivision agreement. The Control Architect is not responsible in any way for examining or approving site (lotting) plans or working drawings with respect to any zoning or building code or permit matter or that any house can be properly built or located on its lot.

This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the City of BRAMPTON.

JOHN G. WILLIAMS LTD., ARCHITECT AND APPR APPROVED BY: DATE: FEB 12, 2020 This stamp certifies compliance with the applicable Design Guidelines only and bears no further professional responsibility.

BLK 162




(PER UNIT) INTERNAL GARAGE WIDTH: INTERNAL GARAGE LENGTH: GARAGE DOOR WIDTH:

BLK 1

NOTE: BUILDER TO VERIFY LOCATION OF ALL HYDRANTS, STREET LIGHTS, TRANSFORMERS AND OTHER SERVICES. IF MIN. DIMENSIONS ARE NOT MAINTAINED BUILDER IS TO RELOCATE AT HIS OWN EXPENSI

BUILDING STATISTICS REG. PLAN No. 43M-2039 R1F-9.0-2452 LOT 132 LOT NUMBER LOT AREA(m $)^2$ 313.2 BLDG AREA(m) 2 N/A LOT COVERAGE(%) N/A No. OF STOREYS 10.7 MEAN HEIGHT(m) N/A PEAK HEIGHT(m) DECK LINE(m) N/A

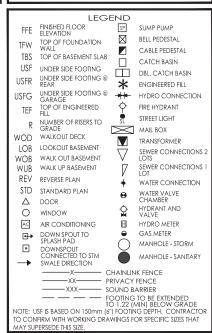

NO.	DESCRIPTION	DATE	DWN	СН
1	ISSUED FOR REVIEW	04-FEB-20	DJH	
2	REVISED PER ENG COMM - FINAL	10-FEB-20	DJH	

DRIANT FOOTING NOTE:

THE RESPONSIBILITY OF THE BUILDER TO VERIFY FROM THE

HIRECTURAL DRAWINGS BEFORE CONSTRUCTION, WHETHER

HIROMAL THICKNESS MAY BE REQUIRED.

T GRADING PLANS ASSUME A TBS TO USF DISTANCE OF 0.23, BASED

HOOTING THICKNESS UP TO 6".

ADDITIONAL FOOTING THICKNESS IS REQUIRED THE USF IS TO BE

FEEDE BY THE FOLLOWING AMOUNTS:

LIP TO 9" FOOTING, LOWER USF BY 0.07

FOOTING, LOWER USF BY 0.13 FOOTING, LOWER USF BY 0.13 FOOTING, LOWER USF BY 0.13 FOOTING, LOWER USF BY 0.18 FOOTING, LOWER USF BY 0.18



WWW.RNDESIGN.COM T:905-738-3177 WWW.THEPLUSGROUP.CA

DESIGN RESPONSIBILITY FOR THE DESIGN WORK ON BEHALF OF RN DESIGN IDJUNDER DIVISION C.PART-3 SUBSECTION-3.2.4 OF THE BUILDING CODE. JAM QUALIFIED AND THE FIRM IS REGISTERED IN THE APPROPRIATE CLASSES / CATEGORIES.

QUALIFIED DESIGNER BCIN: 20888


GOLD PARK HOMES

MCLAUGHLIN AND MAYFIELD-PH2 BRAMPTON, ON

DRAWING

SITE PLAN

DRAWN BY	SCALE			
DJH	1:250			
PROJECT No.	LOT NUMBER			
19037 (13098 Ph.2)	LOT 132			

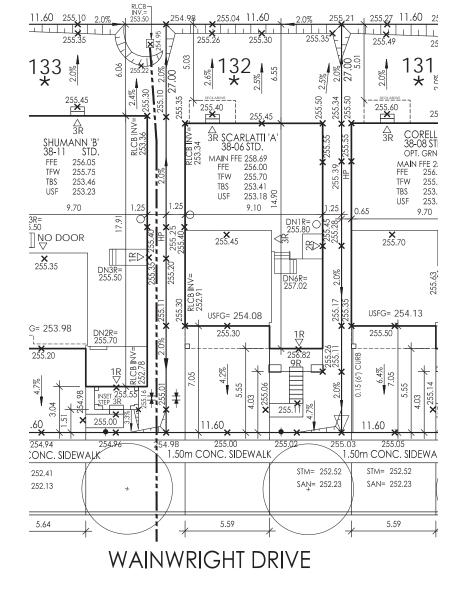

BLK 162

URBANTECH NOTES:

 No final utility location information at this time. Urbantech will not be responsible for future changes to design. Builder should notify purchaser's that street hardware and above ground utility furniture may be added or removed rom their frontages.

2) Builder to lower underside of footings where adjacent to RLCB leads. Exact depth to be determined on site during footing excavation

3) Builder to stake out driveway curb depressions at time of curb installation.

4) Builder to verify location of all hydrants, street lights, transformers and all er services. If min. dimensions are not maintained as per City standards, builder is to relocate at his own expense.

conflict prior to footing excavation.

6) Final fence design have not been provided at this time. Purchaser to be advised that actual fencing details may not be as shown on this plan.

URBANTECH CONSULTING

We certify that the proposed grades at the lot corners are correct, and that the lot grading of the subject lot is in conformity to the approved subdivision grading plans and City standards.

REVIEWED BY: MW DATE: Feb 11/20



It is the builder's complete responsibility to ensure that all plans submitted for approval fully comply with the Architectural Guidelines and all applicable regulations and requirements including zoning provisions and any provisions in the subdivision agreement. The Control Architect is not responsible in any way for examining or approving site (lotting) plans or working drawings with respect to any zoning or building code or permit matter or that any house can be properly built or located on its lot.

This is to certify that these plans comply with the applicable Architectural Design Guidelines approved by the City of BRAMPTON.


JOHN G. WILLIAMS LTD., ARCHITECT ARCHITECTURAL CONTROL REVIEW APPROVED BY: DATE: FEB 12, 2020



(PER UNIT) INTERNAL GARAGE WIDTH: INTERNAL GARAGE LENGTH: GARAGE DOOR WIDTH:

NOTE: BUILDER TO VERIFY LOCATION OF ALL HYDRANTS, STREET LIGHTS, TRANSFORMERS AND OTHER SERVICES. IF MIN. DIMENSIONS ARE NOT MAINTAINED BUILDER IS TO RELOCATE AT HIS OWN EXPENSI

BUILDING STATISTICS 43M-2039 R1F-9.0-2452 LOT 133 LOT NUMBER LOT AREA(m $)^2$ 313.2 BLDG AREA(m) 2 N/A LOT COVERAGE(%) N/A No. OF STOREYS MEAN HEIGHT(m) N/A PEAK HEIGHT(m) N/A

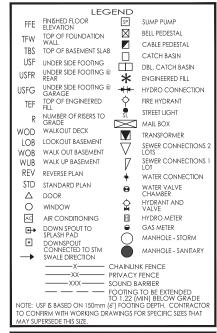

NO.	DESCRIPTION	DATE	DWN	СН
1	ISSUED FOR REVIEW	04-FEB-20	DJH	
2	REVISED PER ENG COMM - FINAL	10-FEB-20	DJH	

ORTANT FOOTING NOTE:

5 THE RESPONSIBILITY OF THE BUILDER TO VERIFY FROM THE
2-HIECTURAL DRAWINGS BEFORE CONSTRUCTION, WHETHER
2-DITIONAL THICKNESS MAY BE REQUIRED.
2-DITIONAL THICKNESS MAY BE REQUIRED.
3-DITIONAL THICKNESS WIP TO 6".
4-DOTING THICKNESS IS PEQUIRED THE USF IS TO BE
WERED BY THE FOLLOWING AMOUNTS:

UP TO 9" FOOTING, LOWER USF BY 0.07

10" FOOTING, LOWER USF BY 9.10

10" FOOTING, LOWER USF BY 9.10

DESIGN

WWW.RNDESIGN.COM T:905-738-3177 WWW.THEPLUSGROUP.CA

I, DANIEL HAMNINEN DECLARE THAT I HAVE REVIEWED AND TAKEN DESIGN RESPONSIBILITY FOR THE DESIGN WORK ON BEHALF OF RN DESIGN LTD. UNDER DIVISION C, PART-3 SUBSECTION-3.2.4 OF THE BUILDING CODE. I AM QUALIFIED AND THE FIRM IS REGISTERED IN THE APPROPRIATE CLASSES / CATEGORIES.


QUALIFIED DESIGNER BCIN: 20888 FIRM BCIN: 26995 DATE; FEB-14-2020

GOLD PARK HOMES

MCLAUGHLIN AND MAYFIELD-PH2 BRAMPTON, ON

SITE PLAN

DRAWN BY	SCALE
DJH	1:250
PROJECT No.	LOT NUMBER
19037 (13098 Ph.2)	LOT 133

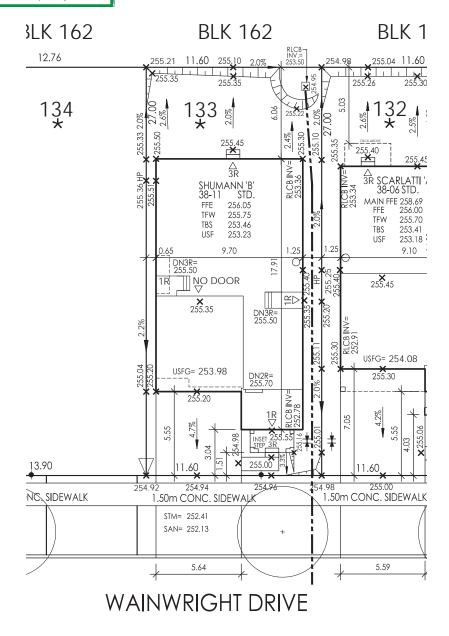

URBANTECH NOTES:

No final utility location information at this time. Urbantech will not be responsible for future changes to design. Builder should notify purchaser's that street hardware and above ground utility furniture may be added or removed

Builder to lower underside of footings where adjacent to RLCB leads. Exact depth to be determined on site during footing excavation.

3) Builder to stake out driveway curb depressions at time of curb installation.

4) Builder to verify location of all hydrants, street lights, transformers and all other services. If min. dimensions are not maintained as per City standards, builder is to relocate at his own expense.

6) Final fence design have not been provided at this time. Purchaser to be advised that actual fencing details may not be as shown on this plan.

URBANTECH CONSULTING

We certify that the proposed grades at the lot corners are correct, and that the lot grading of the subject lot is in conformity to the approved subdivision grading plans and City standards.

REVIEWED BY: <u>MW</u> DATE: <u>Feb</u> 11/20

