



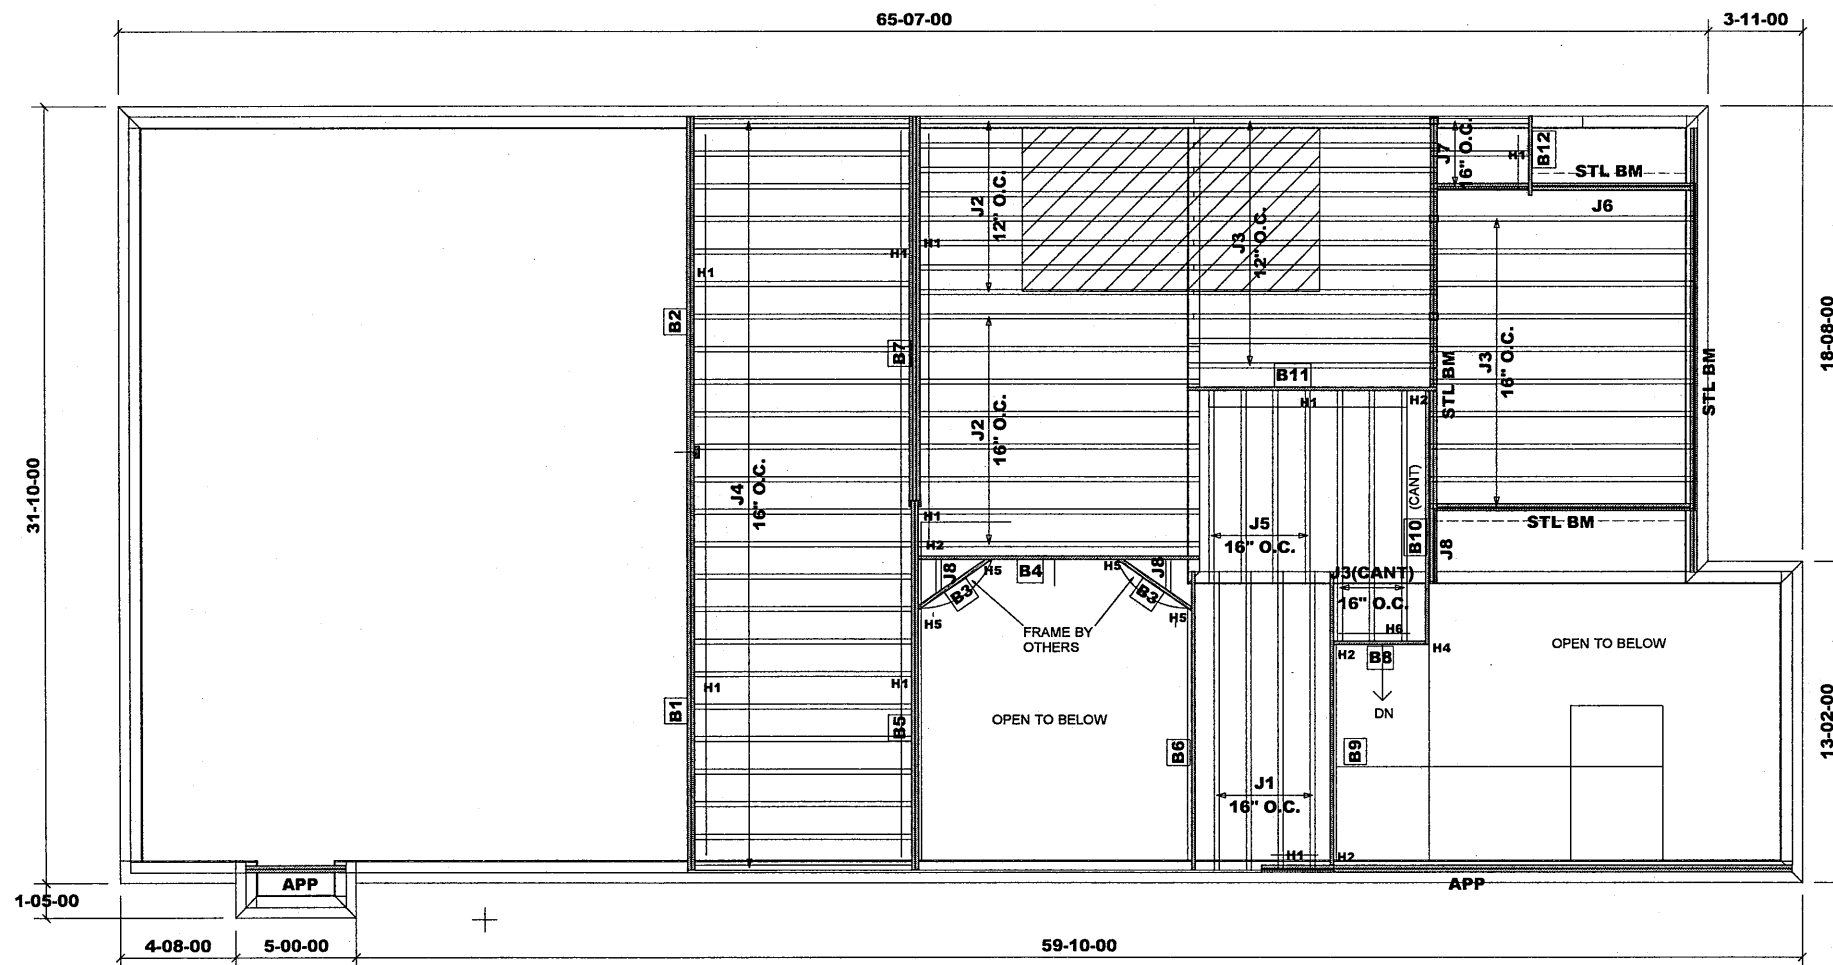

Products					
PlotID	Length	Product	Plies	Net Qty	Fab Type
J1	13-00-00	11 7/8" NI-20	1	4	FF
J2	12-00-00	11 7/8" NI-20	1	16	FF
J3	11-00-00	11 7/8" NI-20	1	24	FF
J4	9-00-00	11 7/8" NI-20	1	24	FF
J5	8-00-00	11 7/8" NI-20	1	4	FF
J6	7-00-00	11 7/8" NI-20	1	1	FF
J7	5-00-00	11 7/8" NI-20	1	3	FF
J8	3-00-00	11 7/8" NI-20	1	3	FF
B1	18-00-00	VERSALAM-12 2.0E	2	2	FF
B5	16-00-00	VERSALAM-12 2.0E	2	2	FF
B7	16-00-00	VERSALAM-12 2.0E	3	3	FF
B2	14-00-00	VERSALAM-12 2.0E	2	2	FF
B6	13-00-00	VERSALAM-12 2.0E	1	1	FF
B9	13-00-00	VERSALAM-12 2.0E	1	1	FF
B4	12-00-00	VERSALAM-12 2.0E	1	1	FF
B10	11-00-00	VERSALAM-12 2.0E	1	1	FF
B11	11-00-00	VERSALAM-12 2.0E	1	1	FF
B12	4-00-00	VERSALAM-12 2.0E	1	1	FF
B3	4-00-00	VERSALAM-12 2.0E	1	2	FF
B8	4-00-00	VERSALAM-12 2.0E	1	1	FF

HANGER SCHEDULE	
H1	LT251188 (TM)
H2	HUS1.81/10(FM)
H4	HU9X(FM)
H5	LS90(FM)
H6	HU310(FM)
NOTE:	
TM	TOP MOUNT HANGERS
FM	FACE MOUNT HANGERS

RIMBOARD	
1- 1/8" X 11 7/8" O.S.B.	
SUBFLOOR - 3/4" NAILED & GLUED	
APP	AS PER PLAN
BBO	BEAM BY OTHERS



Ceramic tile application as per O.B.C. 9.30.6

Provide I-Joist Blocking between cantilevered joists (along bearing) and rimboard closure at ends.

Blocking panels are required over all interior supports
Squash blocks are required under concentrated loads.


REVISION: March 10, 2020

MODEL: UNIT 4000 - EL.A

Second Floor Framing

Do not scale - refer to architectural plans for dimensions

SE007385 - SE00740

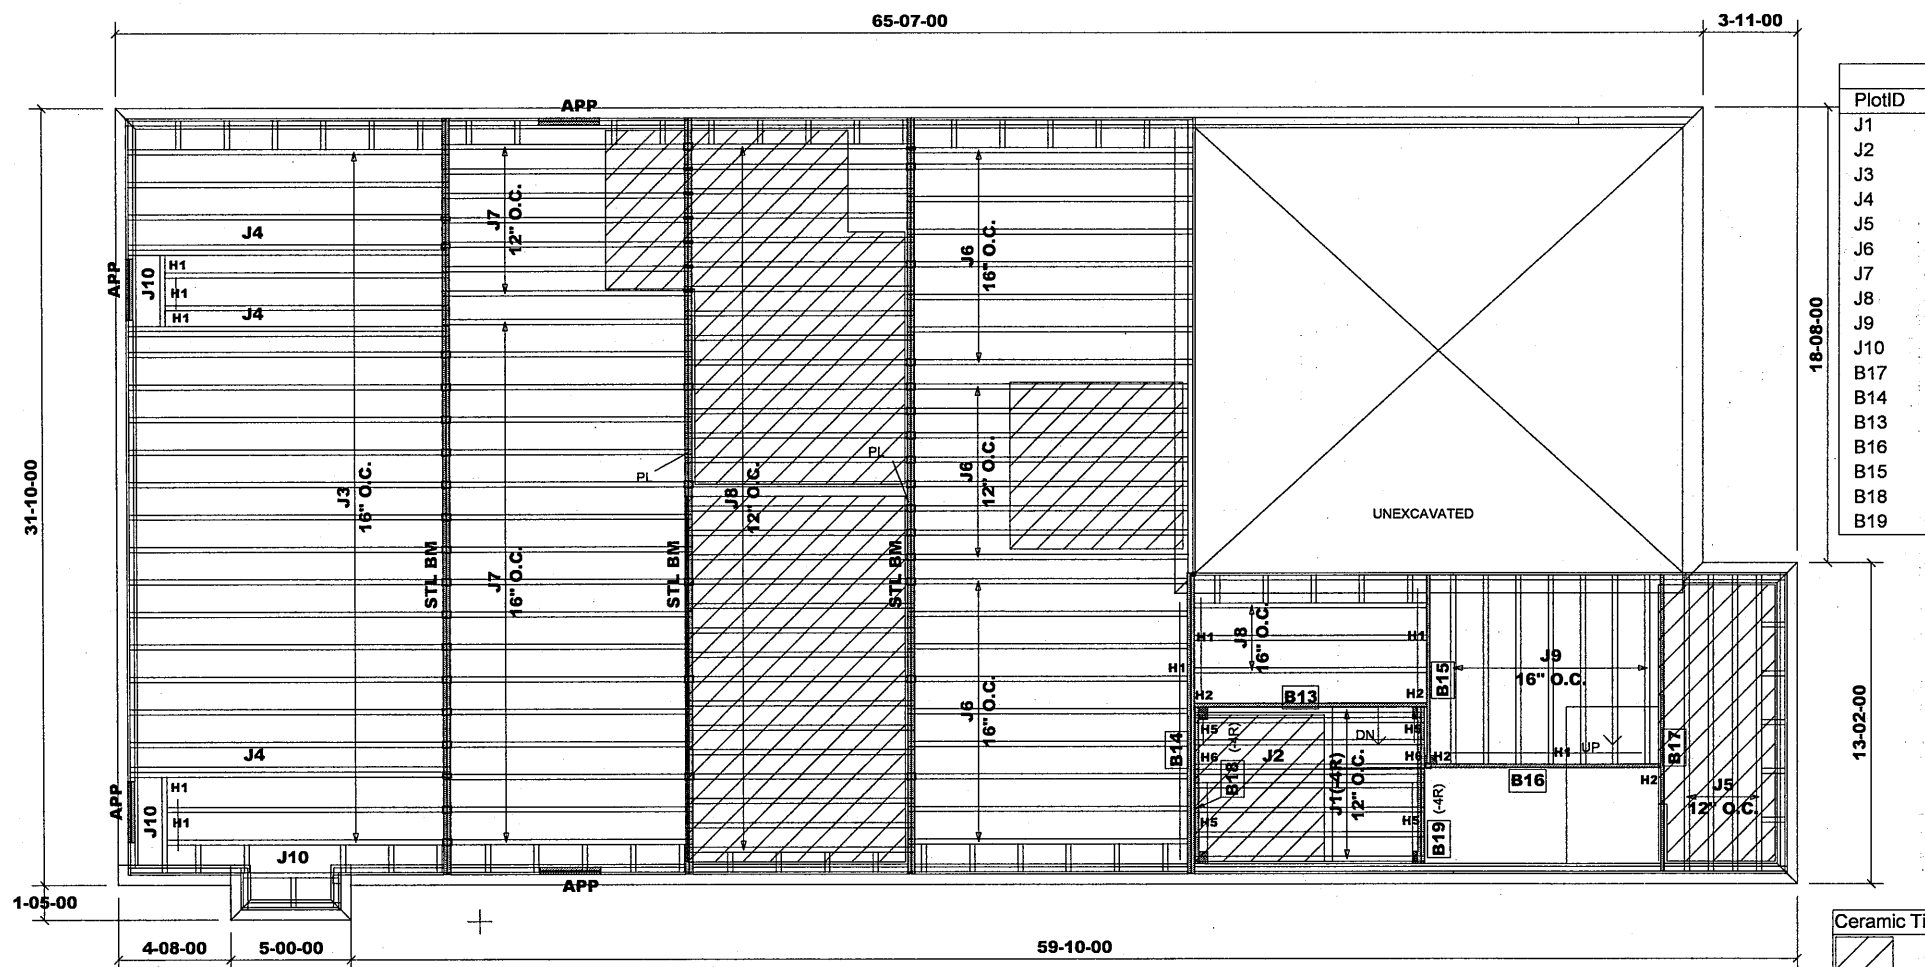

Products					
PlotID	Length	Product	Plies	Net Qty	Fab Type
J1	10-00-00	9 1/2" NI-20	1	7	FF
J2	10-00-00	9 1/2" NI-20	2	2	FF
J3	14-00-00	11 7/8" NI-20	1	20	FF
J4	14-00-00	11 7/8" NI-20	2	6	FF
J5	13-00-00	11 7/8" NI-20	1	4	FF
J6	12-00-00	11 7/8" NI-20	1	25	FF
J7	11-00-00	11 7/8" NI-20	1	24	FF
J8	10-00-00	11 7/8" NI-20	1	33	FF
J9	8-00-00	11 7/8" NI-20	1	7	FF
J10	4-00-00	11 7/8" NI-20	1	3	FF
B17	13-00-00	VERSALAM-12 2.0E	1	1	FF
B14	13-00-00	VERSALAM-12 2.0E	2	2	FF
B13	10-00-00	VERSALAM-12 2.0E	1	1	FF
B16	10-00-00	VERSALAM-12 2.0E	1	1	FF
B15	8-00-00	VERSALAM-12 2.0E	1	1	FF
B18	7-00-00	VERSALAM-10 2.0E	1	1	FF
B19	7-00-00	VERSALAM-10 2.0E	2	2	FF

HANGER SCHEDULE

H1 — LT251188 (TM)
H2 — HUS1.81/10(FM)
H5 — LT259(TM)
H6 — MIT39.5-2(TM)

NOTE:

TM — TOP MOUNT HANGERS
FM — FACE MOUNT HANGERS

RIMBOARD

1- 1/8" X 9 1/2" O.S.B.
1- 1/8" X 11 7/8" O.S.B.

SUBFLOOR - 3/4" NAILED & GLUED

APP - AS PER PLAN
BBO - BEAM BY OTHERS

Ceramic tile application as per O.B.C. 9.30.6

Blocking panels are required over all interior supports
Squash blocks are required under concentrated loads.

REVISION: March 10, 2020

MODEL: UNIT 4000 - EL.A+B
+ W.O.D. CONDITION

+ 9' CEILING BSM T

First Floor Framing

Do not scale - refer to architectural plans for dimensions

JT/PL: 45147/105729

Builder: Gold Park

Location: Vaughan

Designer: NL

Alpa Roof Trusses Inc.

Salesperson: Derek

LI: 318264(290674)


Project: Pine Valley

Date: November 17, 2017

Sheet: 2 of 9

Maple, Ontario

Home Lumber

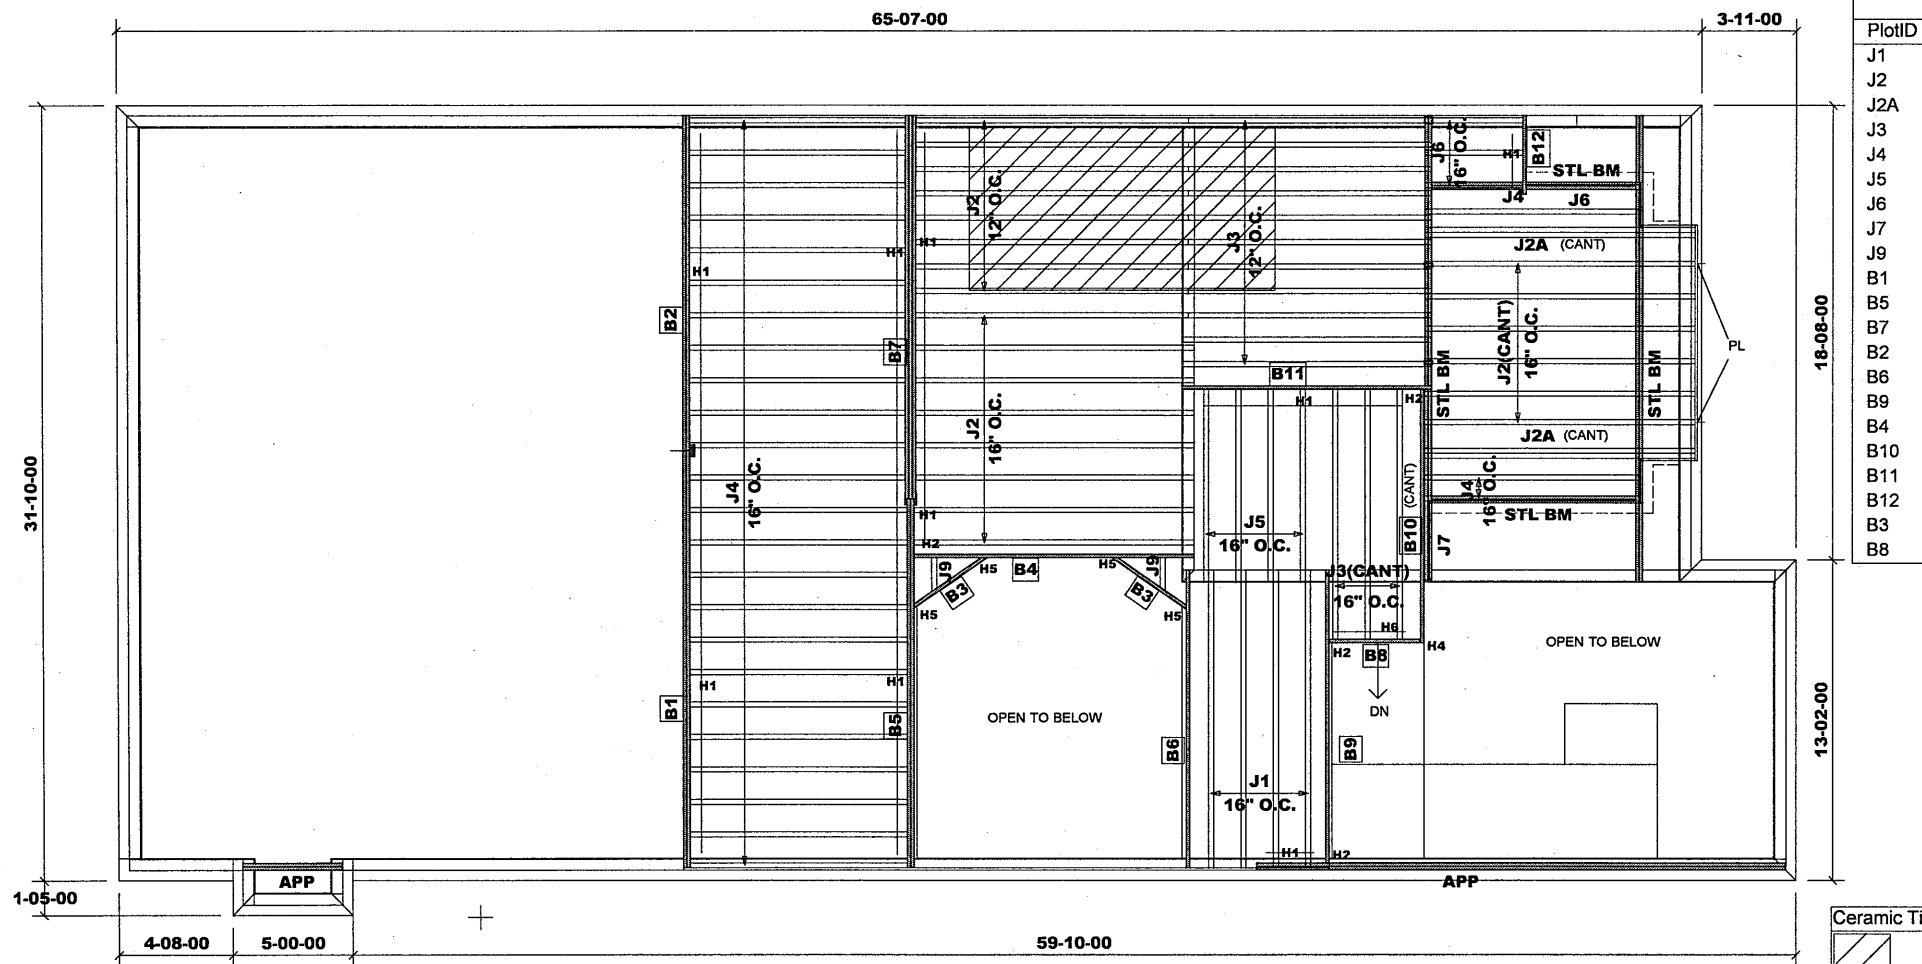

Products					
PlotID	Length	Product	Plies	Net Qty	Fab Type
J1	13-00-00	11 7/8" NI-20	1	4	FF
J2	12-00-00	11 7/8" NI-20	1	22	FF
J2A	12-00-00	11 7/8" NI-20	2	4	FF
J3	11-00-00	11 7/8" NI-20	1	14	FF
J4	9-00-00	11 7/8" NI-20	1	27	FF
J5	8-00-00	11 7/8" NI-20	1	4	FF
J6	5-00-00	11 7/8" NI-20	1	4	FF
J7	4-00-00	11 7/8" NI-20	1	1	FF
J9	3-00-00	11 7/8" NI-20	1	2	FF
B1	18-00-00	VERSALAM-12 2.0E	2	2	FF
B5	16-00-00	VERSALAM-12 2.0E	2	2	FF
B7	16-00-00	VERSALAM-12 2.0E	3	3	FF
B2	14-00-00	VERSALAM-12 2.0E	2	2	FF
B6	13-00-00	VERSALAM-12 2.0E	1	1	FF
B9	13-00-00	VERSALAM-12 2.0E	1	1	FF
B4	12-00-00	VERSALAM-12 2.0E	1	1	FF
B10	11-00-00	VERSALAM-12 2.0E	1	1	FF
B11	11-00-00	VERSALAM-12 2.0E	1	1	FF
B12	4-00-00	VERSALAM-12 2.0E	1	1	FF
B3	4-00-00	VERSALAM-12 2.0E	1	2	FF
B8	4-00-00	VERSALAM-12 2.0E	1	1	FF

HANGER SCHEDULE

H1-----LT251188 (TM)
H2-----HUS1.81/10(FM)
H4-----HU9X(FM)
H5-----LS90(FM)
H6-----HU310(FM)

NOTE:

TM-----TOP MOUNT HANGERS
FM-----FACE MOUNT HANGERS

RIMBOARD

1- 1/8" X 11 7/8" O.S.B.
SUBFLOOR - 3/4" NAILED & GLUED

APP - AS PER PLAN
BBO - BEAM BY OTHERS

Ceramic tile application as per O.B.C. 9.30.6

Provide I-Joist Blocking between cantilevered joists (along bearing) and rimboard closure at ends.

Blocking panels are required over all interior supports
Squash blocks are required under concentrated loads.

REVISION: March 10, 2020

MODEL: UNIT 4000 - EL.B

Second Floor Framing

Do not scale - refer to architectural plans for dimensions

JT/PL: 45147/105729

Builder: Gold Park

Location: Vaughan

Designer: NL

Alpa Roof Trusses Inc.

Salesperson: Derek

LI: 318264(290674)


Project: Pine Valley

Date: November 17, 2017

Sheet: 3 of 9

Maple, Ontario

Home Lumber

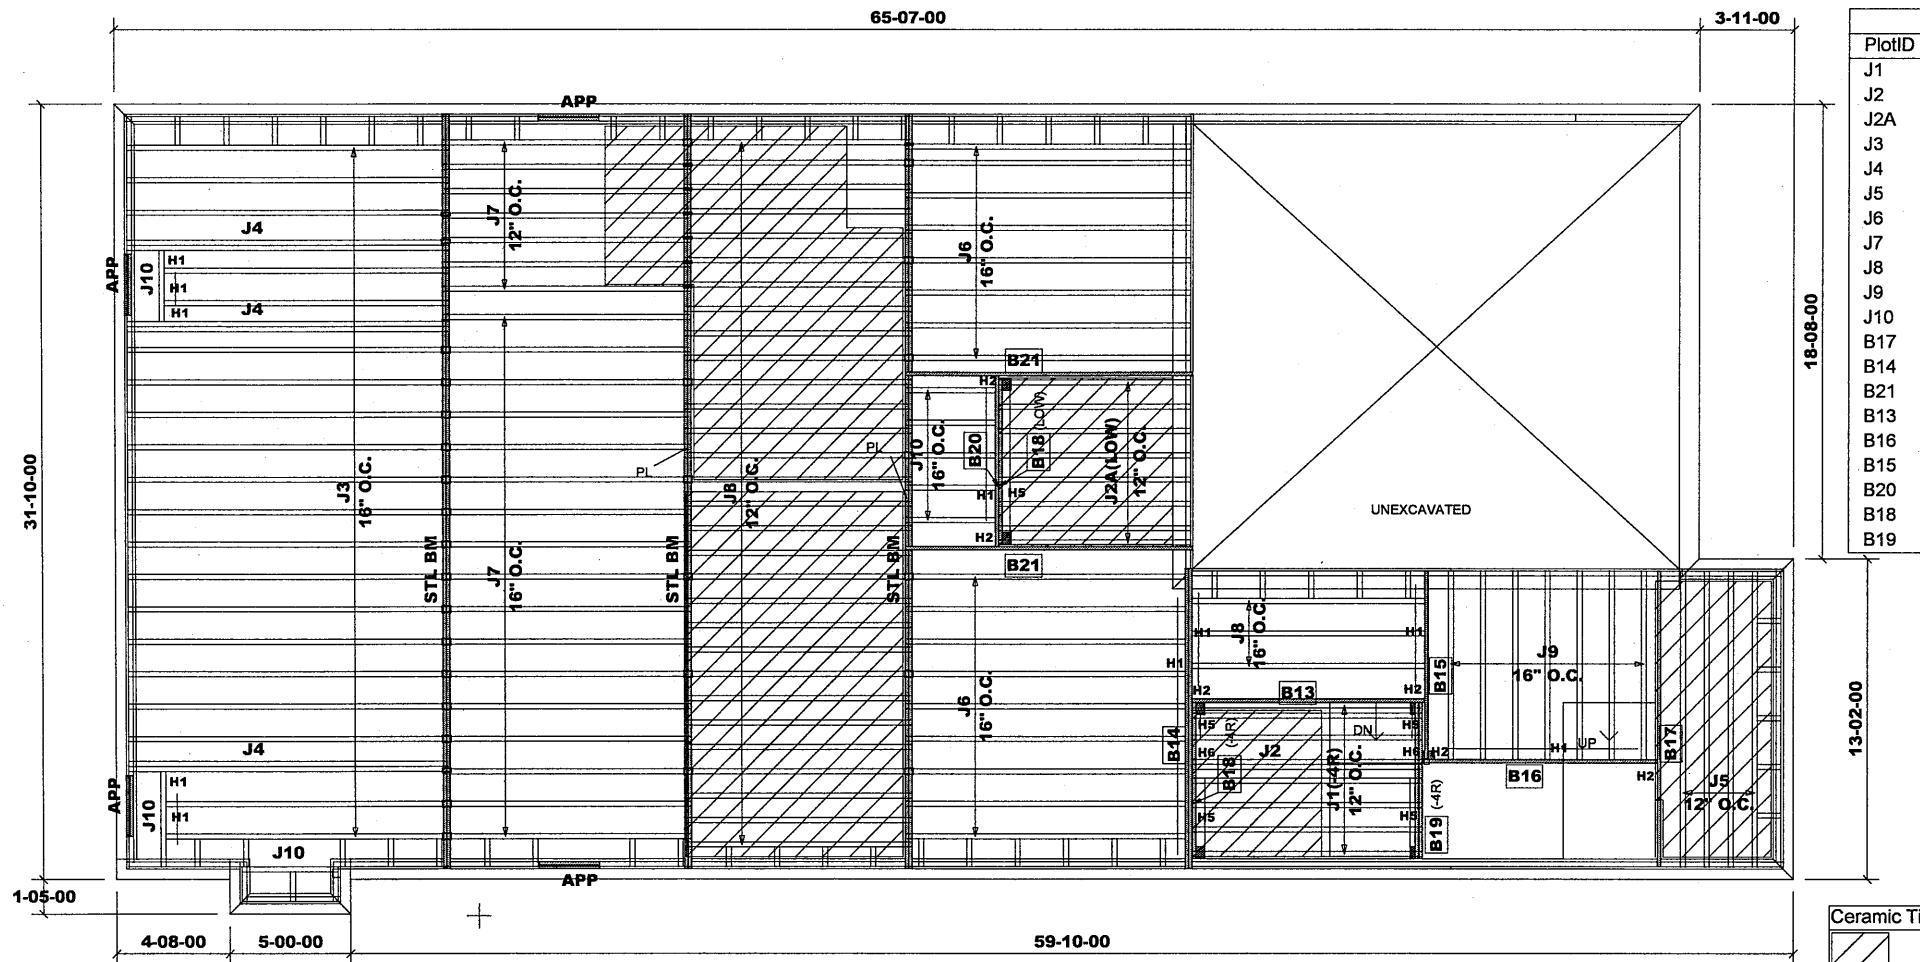

Products					
PlotID	Length	Product	Plies	Net Qty	Fab Type
J1	10-00-00	9 1/2" NI-20	1	7	FF
J2	10-00-00	9 1/2" NI-20	2	2	FF
J2A	8-00-00	9 1/2" NI-20	1	8	FF
J3	14-00-00	11 7/8" NI-20	1	20	FF
J4	14-00-00	11 7/8" NI-20	2	6	FF
J5	13-00-00	11 7/8" NI-20	1	4	FF
J6	12-00-00	11 7/8" NI-20	1	17	FF
J7	11-00-00	11 7/8" NI-20	1	24	FF
J8	10-00-00	11 7/8" NI-20	1	33	FF
J9	8-00-00	11 7/8" NI-20	1	7	FF
J10	4-00-00	11 7/8" NI-20	1	8	FF
B17	13-00-00	VERSALAM-12 2.0E	1	1	FF
B14	13-00-00	VERSALAM-12 2.0E	2	2	FF
B21	12-00-00	VERSALAM-12 2.0E	1	2	FF
B13	10-00-00	VERSALAM-12 2.0E	1	1	FF
B16	10-00-00	VERSALAM-12 2.0E	1	1	FF
B15	8-00-00	VERSALAM-12 2.0E	1	1	FF
B20	8-00-00	VERSALAM-12 2.0E	1	1	FF
B18	7-00-00	VERSALAM-10 2.0E	1	2	FF
B19	7-00-00	VERSALAM-10 2.0E	2	2	FF

HANGER SCHEDULE	
H1	LT251188 (TM)
H2	HUS1.81/10(FM)
H5	LT259(TM)
H6	MIT39.5-2(TM)
NOTE:	
TM	TOP MOUNT HANGERS
FM	FACE MOUNT HANGERS
RIMBOARD	
1-	1/8" X 9 1/2" O.S.B.
1-	1/8" X 11 7/8" O.S.B.
SUBFLOOR - 3/4" NAILED & GLUED	
APP	AS PER PLAN
BBO	BEAM BY OTHERS

Ceramic tile application as per O.B.C. 9.30.6

Blocking panels are required over all interior supports

Squash blocks are required under concentrated loads.

REVISION: March 10, 2020


MODEL: UNIT 4000 - EL.A+B

W/SUNKEN LAUNDRY

+ 9' CEILING BSMT

First Floor Framing

Do not scale - refer to architectural plans for dimensions

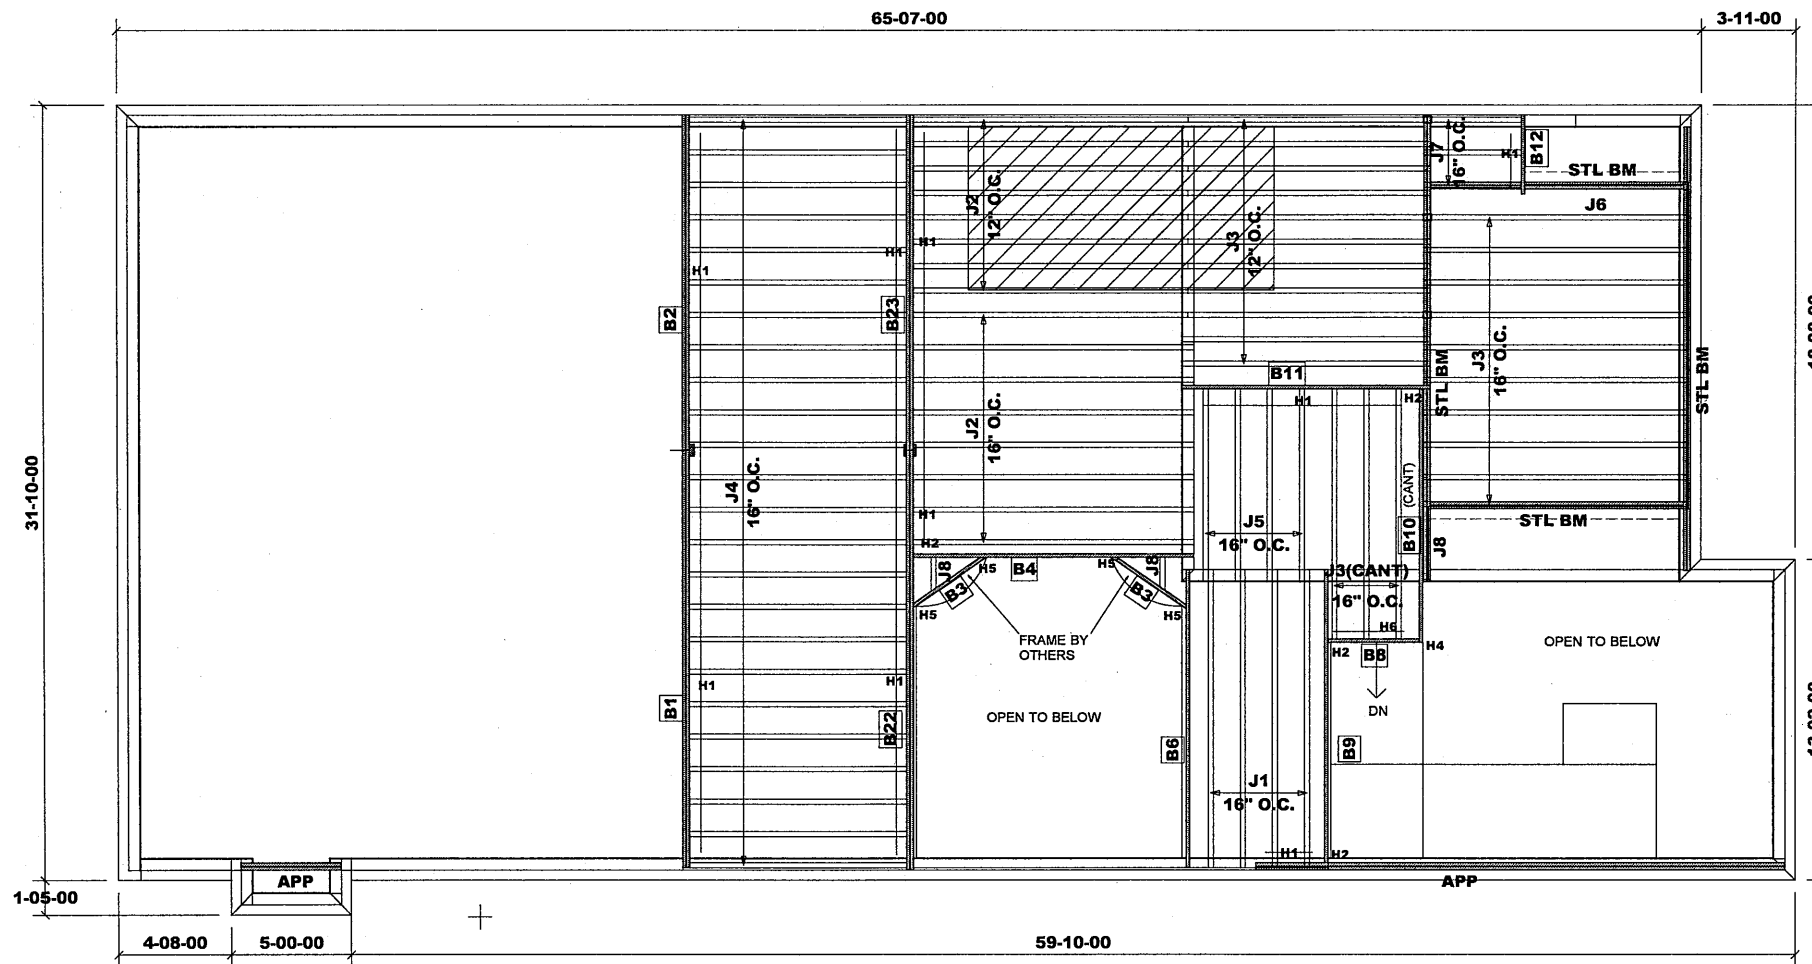

Products					
PlotID	Length	Product	Plies	Net Qty	Fab Type
J1	13-00-00	11 7/8" NI-20	1	4	MFD
J2	12-00-00	11 7/8" NI-20	1	16	MFD
J3	11-00-00	11 7/8" NI-20	1	24	MFD
J4	9-00-00	11 7/8" NI-20	1	24	MFD
J5	8-00-00	11 7/8" NI-20	1	4	MFD
J6	7-00-00	11 7/8" NI-20	1	1	MFD
J7	5-00-00	11 7/8" NI-20	1	3	MFD
J8	3-00-00	11 7/8" NI-20	1	3	MFD
B1	18-00-00	VERSALAM-12 2.0E	2	2	MFD
B22	18-00-00	VERSALAM-12 2.0E	2	2	MFD
B2	14-00-00	VERSALAM-12 2.0E	2	2	MFD
B23	14-00-00	VERSALAM-12 2.0E	2	2	MFD
B6	13-00-00	VERSALAM-12 2.0E	1	1	MFD
B9	13-00-00	VERSALAM-12 2.0E	1	1	MFD
B4	12-00-00	VERSALAM-12 2.0E	1	1	MFD
B10	11-00-00	VERSALAM-12 2.0E	1	1	MFD
B11	11-00-00	VERSALAM-12 2.0E	1	1	MFD
B12	4-00-00	VERSALAM-12 2.0E	1	1	MFD
B3	4-00-00	VERSALAM-12 2.0E	1	2	MFD
B8	4-00-00	VERSALAM-12 2.0E	1	1	MFD

HANGER SCHEDULE


H1-----LT251188 (TM)
H2-----HUS1.81/10(FM)
H4-----HU9X(FM)
H5-----LS90(FM)
H6-----HU310(FM)

NOTE:

TM-----TOP MOUNT HANGERS
FM-----FACE MOUNT HANGERS

RIMBOARD

1- 1/8" X 11 7/8" O.S.B.
SUBFLOOR - 3/4" NAILED & GLUED
APP - AS PER PLAN
BBO - BEAM BY OTHERS



Ceramic tile application as per O.B.C. 9.30.6

Provide I-Joist Blocking between cantilevered joists (along bearing) and rimboard closure at ends.

Blocking panels are required over all interior supports
Squash blocks are required under concentrated loads.

REVISION: March 10, 2020

MODEL: UNIT 4000 - EL.A
W/OPT. 1ST FLOOR

Second Floor Framing

Do not scale - refer to architectural plans for dimensions

JT/PL: 45147/105729

Builder: Gold Park

Location: Vaughan

Designer: NL

Alpa Roof Trusses Inc.

Salesperson: Derek

LI: 318264(290674)


Project: Pine Valley

Date: June 28, 2018

Sheet: 5 of 9

Maple, Ontario


Home Lumber

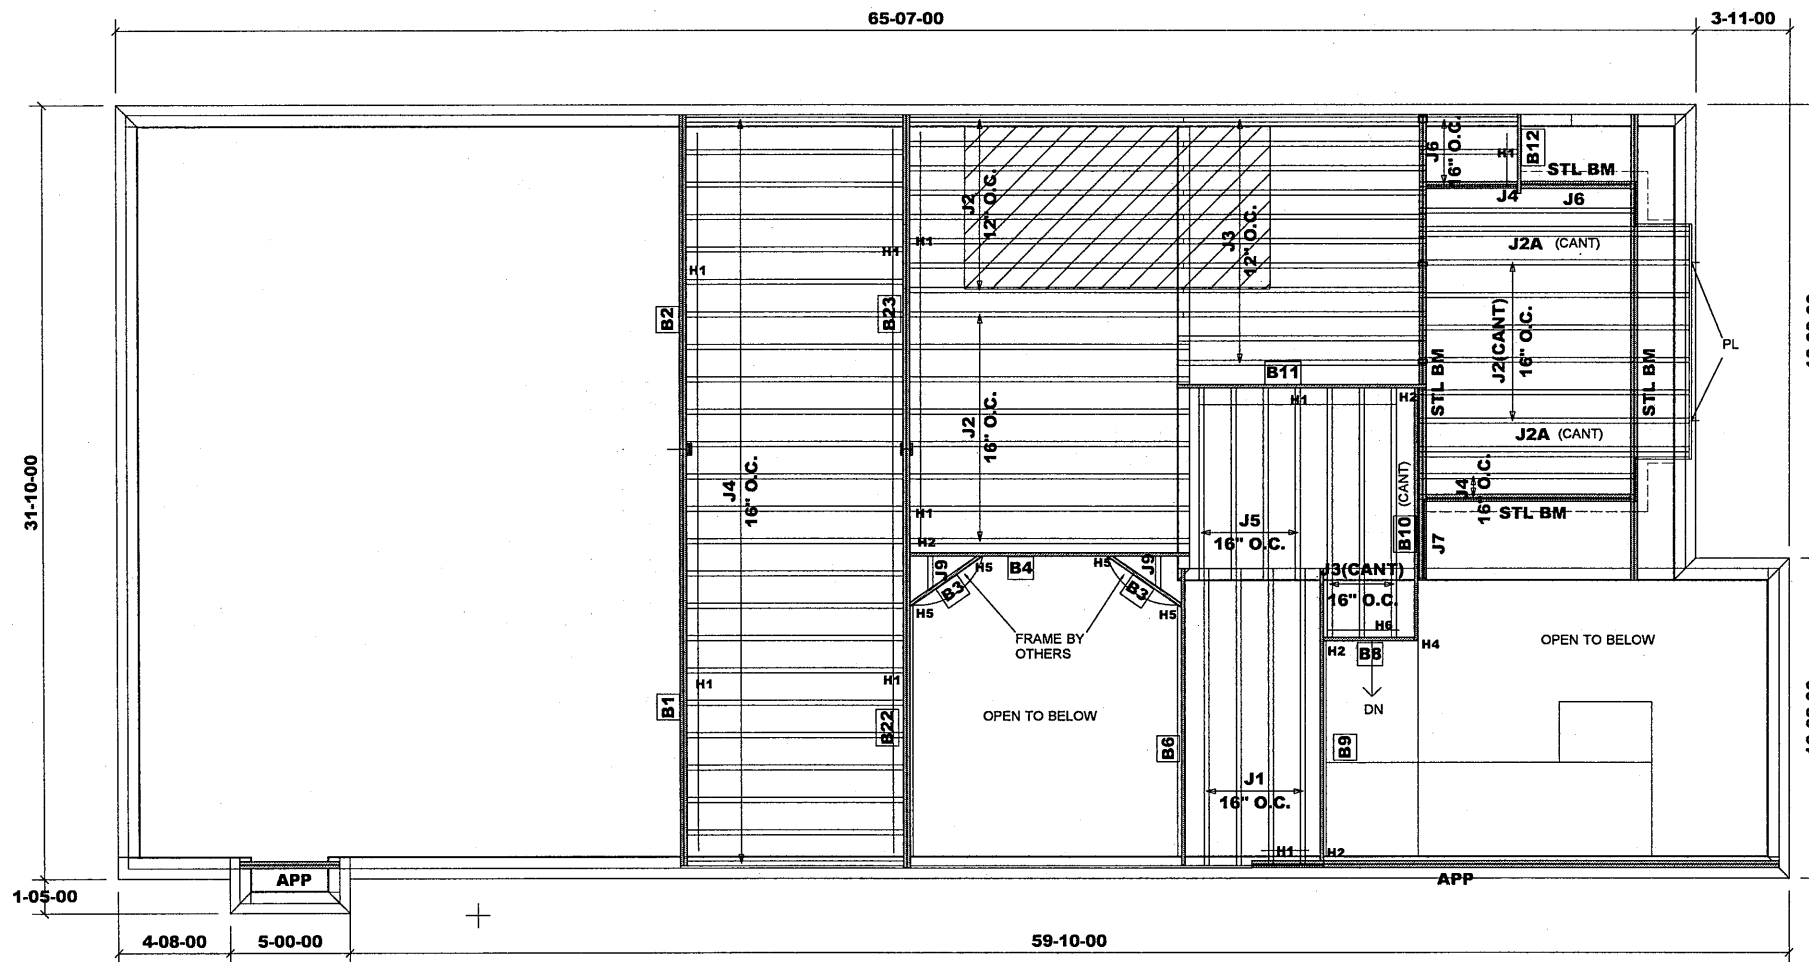

Products					
PlotID	Length	Product	Plies	Net Qty	Fab Type
J1	13-00-00	11 7/8" NI-20	1	4	MFD
J2	12-00-00	11 7/8" NI-20	1	22	MFD
J2A	12-00-00	11 7/8" NI-20	2	4	MFD
J3	11-00-00	11 7/8" NI-20	1	14	MFD
J4	9-00-00	11 7/8" NI-20	1	27	MFD
J5	8-00-00	11 7/8" NI-20	1	4	MFD
J6	5-00-00	11 7/8" NI-20	1	4	MFD
J7	4-00-00	11 7/8" NI-20	1	1	MFD
J9	3-00-00	11 7/8" NI-20	1	2	MFD
B1	18-00-00	VERSALAM-12 2.0E	2	2	MFD
B22	18-00-00	VERSALAM-12 2.0E	2	2	MFD
B2	14-00-00	VERSALAM-12 2.0E	2	2	MFD
B23	14-00-00	VERSALAM-12 2.0E	2	2	MFD
B6	13-00-00	VERSALAM-12 2.0E	1	1	MFD
B9	13-00-00	VERSALAM-12 2.0E	1	1	MFD
B4	12-00-00	VERSALAM-12 2.0E	1	1	MFD
B10	11-00-00	VERSALAM-12 2.0E	1	1	MFD
B11	11-00-00	VERSALAM-12 2.0E	1	1	MFD
B12	4-00-00	VERSALAM-12 2.0E	1	1	MFD
B3	4-00-00	VERSALAM-12 2.0E	1	2	MFD
B8	4-00-00	VERSALAM-12 2.0E	1	1	MFD

HANGER SCHEDULE	
H1	LT251188 (TM)
H2	HUS1.81/10(FM)
H4	HU9X(FM)
H5	LS90(FM)
H6	HU310(FM)
NOTE:	
TM	TOP MOUNT HANGERS
FM	FACE MOUNT HANGERS


RIMBOARD
1- 1/8" X 11 7/8" O.S.B.
SUBFLOOR - 3/4" NAILED & GLUED
APP - AS PER PLAN
BBO - BEAM BY OTHERS



Ceramic tile application as per O.B.C. 9.30.6
Provide I-Joist Blocking between cantilevered joists (along bearing) and rimboard closure at ends.
Blocking panels are required over all interior supports
Squash blocks are required under concentrated loads.

REVISION: March 10, 2020
MODEL: UNIT 4000 - EL.B
W/OPT. 1ST FLOOR

Second Floor Framing
Do not scale - refer to architectural plans for dimensions

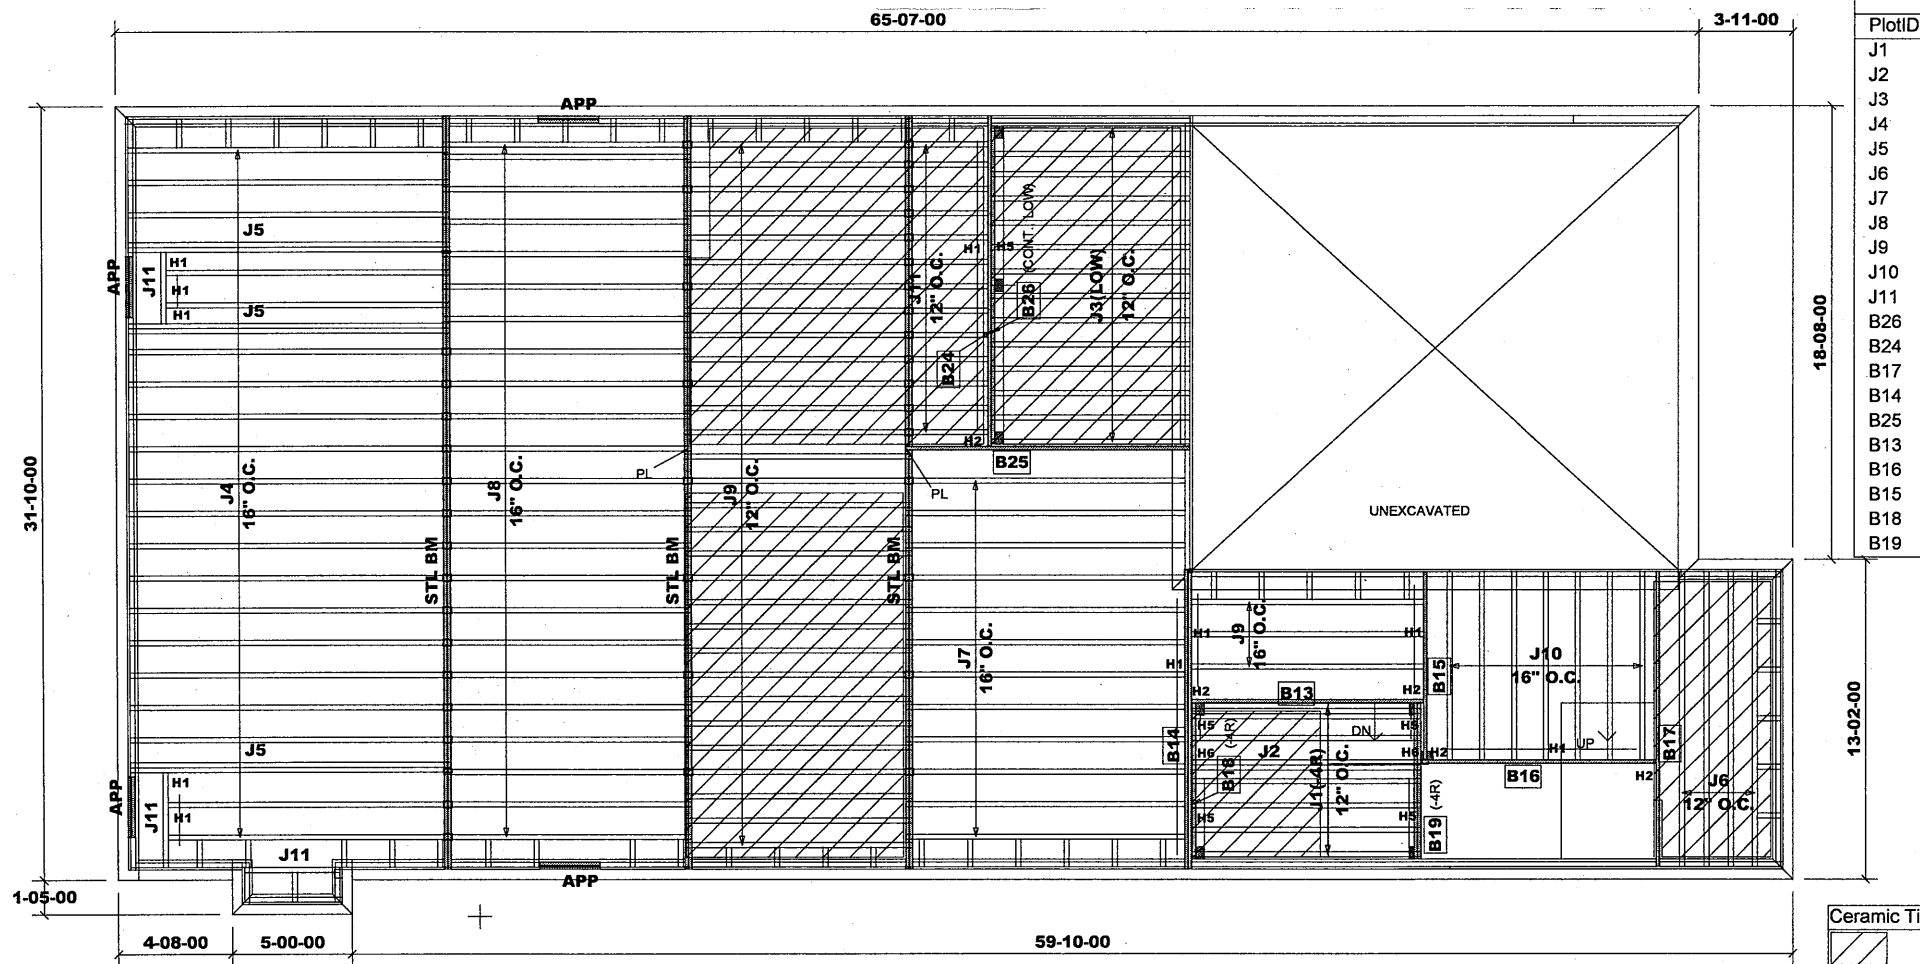

Products					
PlotID	Length	Product	Plies	Net Qty	Fab Type
J1	10-00-00	9 1/2" NI-20	1	7	MFD
J2	10-00-00	9 1/2" NI-20	2	2	MFD
J3	9-00-00	9 1/2" NI-20	1	14	MFD
J4	14-00-00	11 7/8" NI-20	1	20	MFD
J5	14-00-00	11 7/8" NI-20	2	6	MFD
J6	13-00-00	11 7/8" NI-20	1	4	MFD
J7	12-00-00	11 7/8" NI-20	1	12	MFD
J8	11-00-00	11 7/8" NI-20	1	23	MFD
J9	10-00-00	11 7/8" NI-20	1	33	MFD
J10	8-00-00	11 7/8" NI-20	1	7	MFD
J11	4-00-00	11 7/8" NI-20	1	16	MFD
B26	14-00-00	VERSALAM-10 2.0E	1	1	MFD
B24	14-00-00	VERSALAM-12 2.0E	1	1	MFD
B17	13-00-00	VERSALAM-12 2.0E	1	1	MFD
B14	13-00-00	VERSALAM-12 2.0E	2	2	MFD
B25	12-00-00	VERSALAM-12 2.0E	1	1	MFD
B13	10-00-00	VERSALAM-12 2.0E	1	1	MFD
B16	10-00-00	VERSALAM-12 2.0E	1	1	MFD
B15	8-00-00	VERSALAM-12 2.0E	1	1	MFD
B18	7-00-00	VERSALAM-10 2.0E	1	1	MFD
B19	7-00-00	VERSALAM-10 2.0E	2	2	MFD

HANGER SCHEDULE	
H1	LT251188 (TM)
H2	HUS1.81/10(FM)
H5	LT259(TM)
H6	MIT39.5-2(TM)

NOTE:
 TM TOP MOUNT HANGERS
 FM FACE MOUNT HANGERS

RIMBOARD	
1-	1/8" X 9 1/2" O.S.B.
1-	1/8" X 11 7/8" O.S.B.
SUBFLOOR - 3/4" NAILED & GLUED	
APP	AS PER PLAN
BBO	BEAM BY OTHERS

Ceramic tile application as per O.B.C. 9.30.6

Blocking panels are required over all interior supports
 Squash blocks are required under concentrated loads.

REVISION: March 10, 2020

MODEL: UNIT 4000 - EL.A+B
 W/OPT. 1ST FL.(SUNKEN)

+ 9' CEILING BSMT

First Floor Framing

Do not scale - refer to architectural plans for dimensions

JT/PL: 45147/105729

LI: 318264(290674)

Builder: Gold Park

Project: Pine Valley

Location: Vaughan

Date: June 28, 2018

Designer: NL


Sheet: 8 of 9

Alpa Roof Trusses Inc.

Maple, Ontario

Salesperson: Derek

Home Lumber

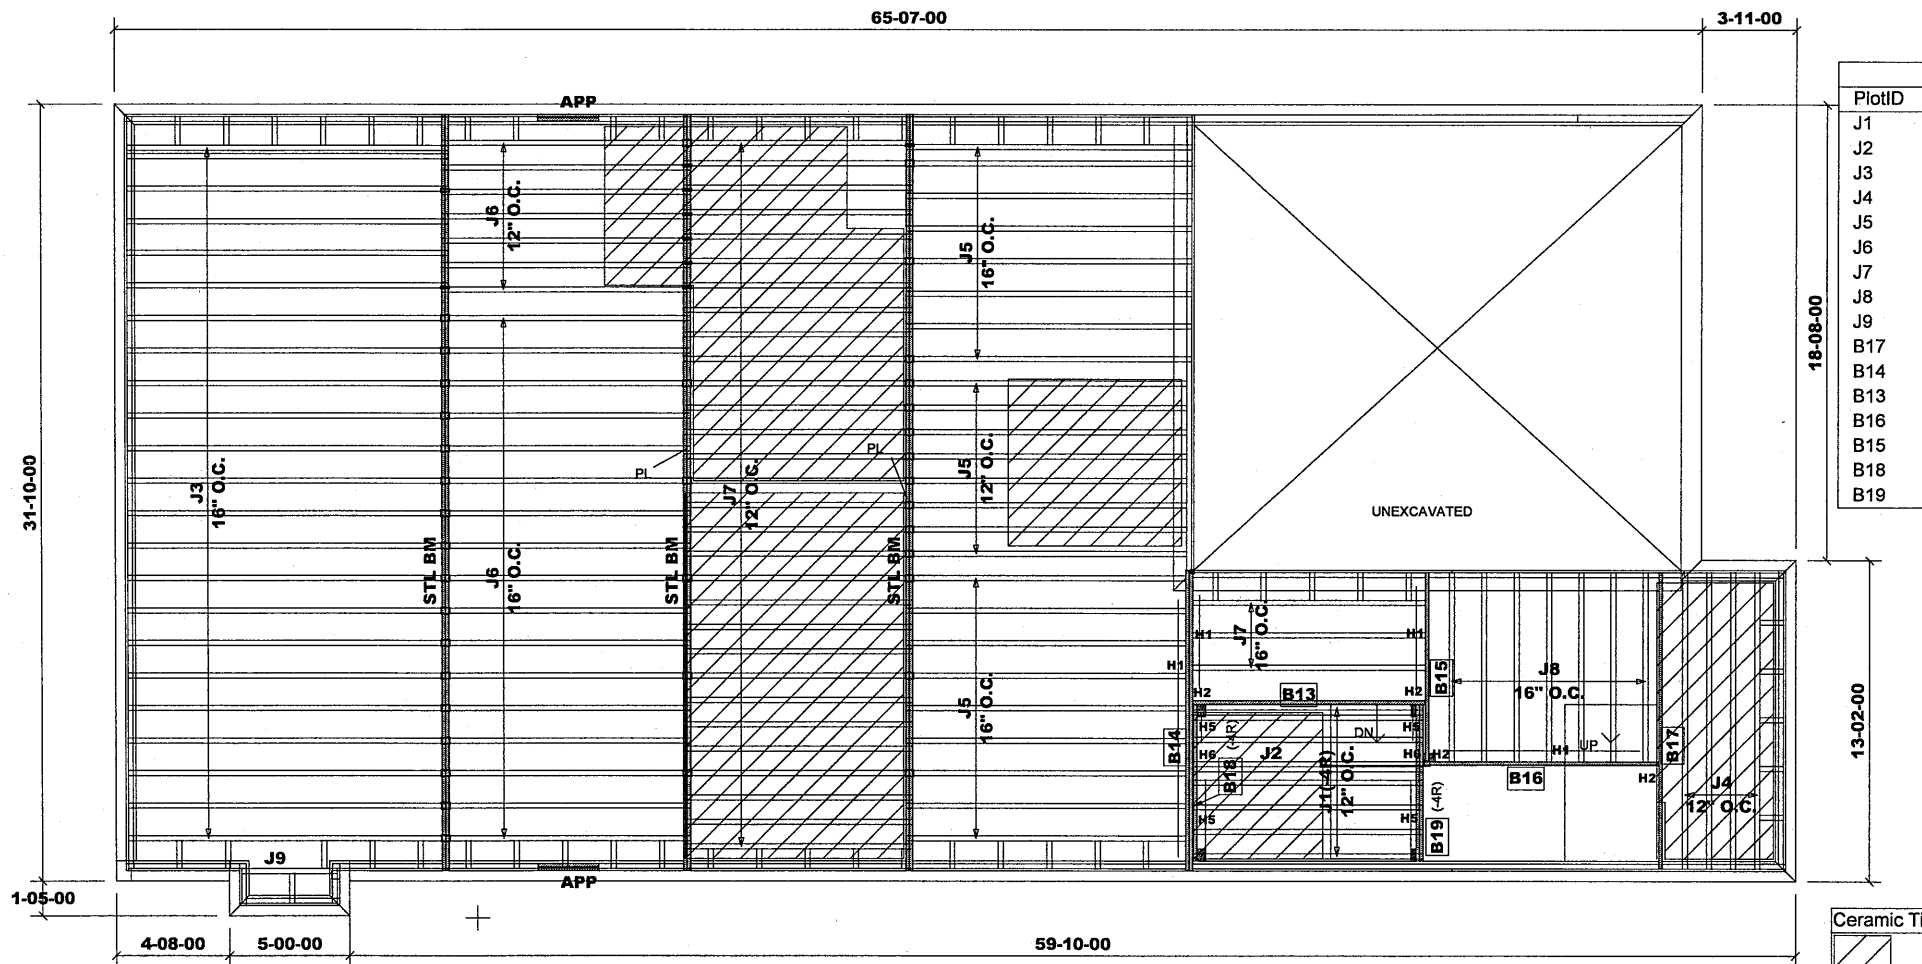

Products					
PlotID	Length	Product	Plies	Net Qty	Fab Type
J1	10-00-00	9 1/2" NI-20	1	7	FF
J2	10-00-00	9 1/2" NI-20	2	2	FF
J3	14-00-00	11 7/8" NI-20	1	23	FF
J4	13-00-00	11 7/8" NI-20	1	4	FF
J5	12-00-00	11 7/8" NI-20	1	25	FF
J6	11-00-00	11 7/8" NI-20	1	24	FF
J7	10-00-00	11 7/8" NI-20	1	33	FF
J8	8-00-00	11 7/8" NI-20	1	7	FF
J9	4-00-00	11 7/8" NI-20	1	1	FF
B17	13-00-00	VERSALAM-12 2.0E	1	1	FF
B14	13-00-00	VERSALAM-12 2.0E	2	2	FF
B13	10-00-00	VERSALAM-12 2.0E	1	1	FF
B16	10-00-00	VERSALAM-12 2.0E	1	1	FF
B15	8-00-00	VERSALAM-12 2.0E	1	1	FF
B18	7-00-00	VERSALAM-10 2.0E	1	1	FF
B19	7-00-00	VERSALAM-10 2.0E	2	2	FF

HANGER SCHEDULE	
H1	LT251188 (TM)
H2	HUS1.81/10(FM)
H5	LT259(TM)
H6	MIT39.5-2(TM)

NOTE:
 TM — TOP MOUNT HANGERS
 FM — FACE MOUNT HANGERS

RIMBOARD	
1-	1/8" X 9 1/2" O.S.B.
1-	1/8" X 11 7/8" O.S.B.

SUBFLOOR - 3/4" NAILED & GLUED

APP - AS PER PLAN
 BBO - BEAM BY OTHERS

Ceramic tile application as per O.B.C. 9.30.6

Blocking panels are required over all interior supports
 Squash blocks are required under concentrated loads.

MODEL: UNIT 4000 - EL.A+B
 W/ L.O.D. & W.O.B. COND.
 + 9' CEILING BSMT

First Floor Framing

Do not scale - refer to architectural plans for dimensions

JT/PL: 45147/105729

Builder: Gold Park

Location: Vaughan

Designer: NL

Alpa Roof Trusses Inc.

Salesperson: Derek

LI: 318264(290674)

Project: Pine Valley

Date: March 11, 2020

Sheet: 9 of 9

Maple, Ontario

Home Lumber

B01 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: Second Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

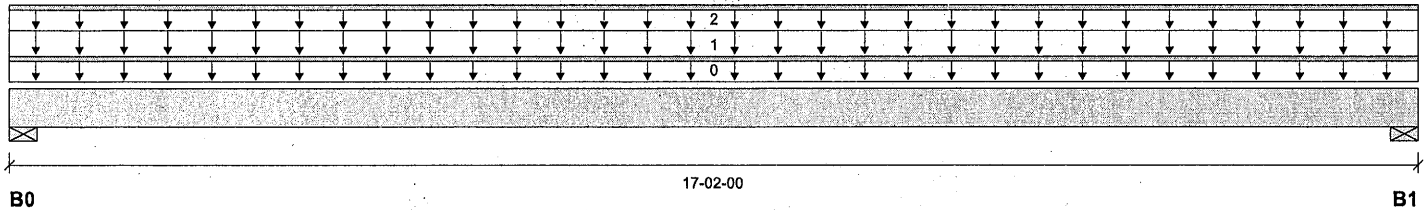
Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	1635 / 0	1233 / 0		
B1, 3"	1627 / 0	1227 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	17-02-00	Top		12			00-00-00
1		Unf. Area (lb/ft²)	L	00-00-00	17-02-00	Top	40	15			04-09-00
2		Unf. Lin. (lb/ft)	L	00-00-00	17-02-00	Top		60			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	16276 ft-lbs	35392 ft-lbs	46.0%	1	08-07-04
End Shear	3399 lbs	14464 lbs	23.5%	1	01-03-06
Total Load Deflection	L/333 (0.604")	n/a	72.2%	4	08-07-04
Live Load Deflection	L/583 (0.344")	n/a	61.7%	5	08-07-04
Max Defl.	0.604"	n/a	60.4%	4	08-07-04
Span / Depth	16.9				


Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 3-1/2"	3993 lbs	53.0%	26.7%	Spruce-Pine-Fir
B1	Wall/Plate 3" x 3-1/2"	3974 lbs	61.5%	31.0%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4

NAIL ONE PLY TO ANOTHER WITH 3-1/2" SPIRAL NAILS @ 12" O/C,
 STAGGERED IN 2 ROWS

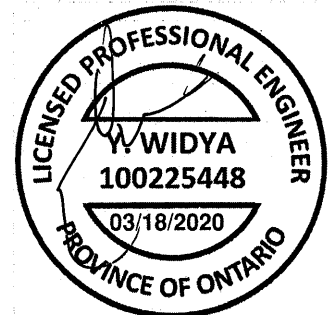

B02 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: Second Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

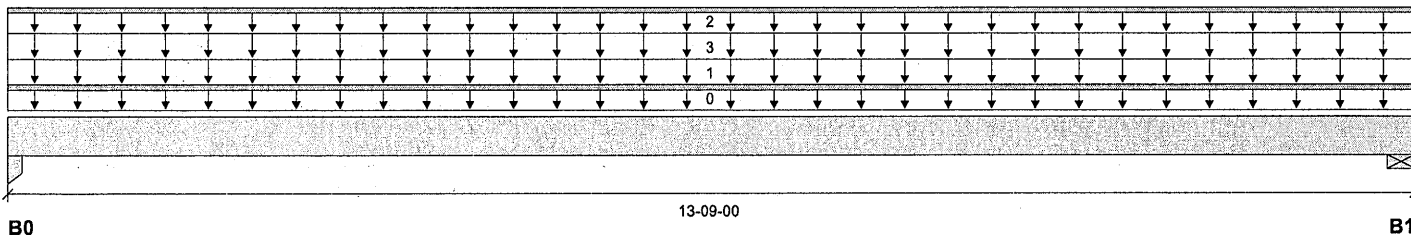

Total Horizontal Product Length = 13-09-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3"	1302 / 0	2182 / 0	1799 / 0	
B1, 3-1/2"	1310 / 0	2195 / 0	1810 / 0	

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	13-09-00	Top		12			00-00-00
1		Unf. Area (lb/ft²)	L	00-00-00	13-09-00	Top	40	15			04-09-00
2		Unf. Lin. (lb/ft)	L	00-00-00	13-09-00	Top		60			n/a
3		Unf. Area (lb/ft²)	L	00-00-00	13-09-00	Top		14	21		12-06-00

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	21813 ft-lbs	35392 ft-lbs	61.6%	5	06-10-04
End Shear	5511 lbs	14464 lbs	38.1%	5	01-02-14
Total Load Deflection	L/295 (0.542")	n/a	81.3%	11	06-10-04
Live Load Deflection	L/516 (0.31")	n/a	69.8%	15	06-10-04
Max Defl.	0.542"	n/a	54.2%	11	06-10-04
Span / Depth	13.5				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Column 3" x 3-1/2"	6728 lbs	36.9%	52.5%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 3-1/2"	6769 lbs	89.8%	45.3%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4

NAIL ONE PLY TO ANOTHER WITH 3-1/2" SPIRAL NAILS @ 12" O/C,
 STAGGERED IN 2 ROWS



B03 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: Second Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

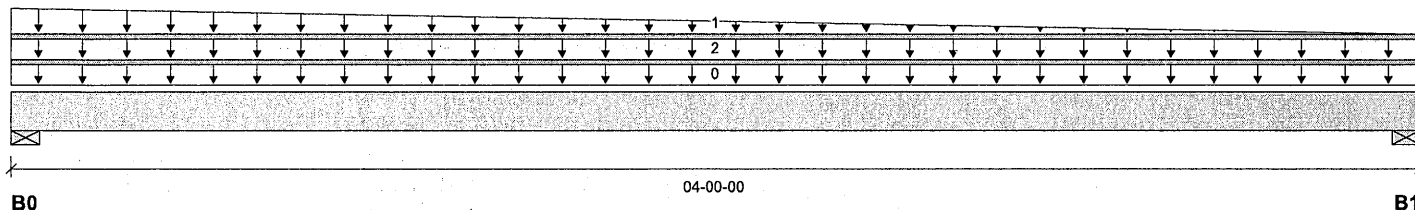
Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	135 / 0	63 / 0		
B1, 3-1/2"	105 / 0	51 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	04-00-00	Top		6			00-00-00
1		Trapezoidal (lb/ft)	L	00-00-00	04-00-00	Top	40	15			n/a
2		Unf. Lin. (lb/ft)	L	00-00-00	04-00-00	Top	0	0			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	197 ft-lbs	17696 ft-lbs	1.1%	1	01-10-15
End Shear	148 lbs	7232 lbs	2.0%	1	01-03-06
Total Load Deflection	L/999 (0.001")	n/a	n/a	4	02-00-00
Live Load Deflection	L/999 (0")	n/a	n/a	5	02-00-00
Max Defl.	0.001"	n/a	n/a	4	02-00-00
Span / Depth	3.6				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	280 lbs	7.4%	3.8%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	222 lbs	5.9%	3.0%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4


Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJST™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007387

B04 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: Second Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

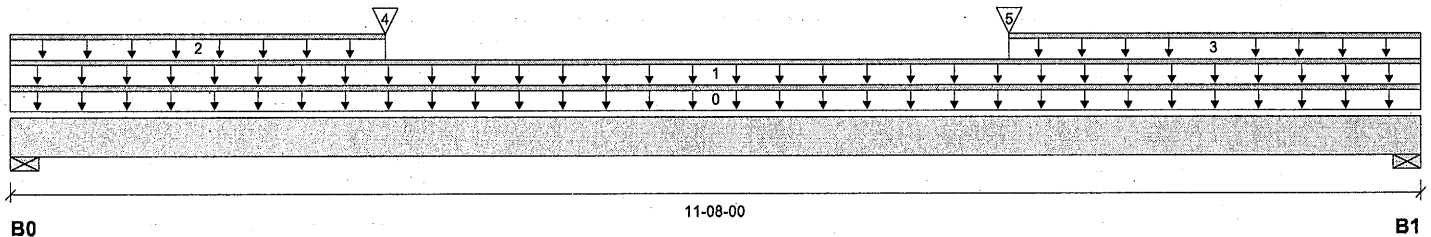

Total Horizontal Product Length = 11-08-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	393 / 0	217 / 0		
B1, 3-1/2"	392 / 0	216 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	11-08-00	Top		6			00-00-00
1		Unf. Lin. (lb/ft)	L	00-00-00	11-08-00	Top	27	14			n/a
2		Unf. Lin. (lb/ft)	L	00-00-00	03-01-00	Top	40	15			n/a
3		Unf. Lin. (lb/ft)	L	08-03-00	11-08-00	Top	40	15			n/a
4		Conc. Pt. (lbs)	L	03-01-00	03-01-00	Top	105	51			n/a
5		Conc. Pt. (lbs)	L	08-03-00	08-03-00	Top	105	51			n/a


Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	2059 ft-lbs	17696 ft-lbs	11.6%	1	05-11-14
End Shear	675 lbs	7232 lbs	9.3%	1	01-03-06
Total Load Deflection	L/999 (0.071")	n/a	n/a	4	05-09-15
Live Load Deflection	L/999 (0.045")	n/a	n/a	5	05-09-15
Max Defl.	0.071"	n/a	n/a	4	05-09-15
Span / Depth	11.3				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	860 lbs	22.8%	11.5%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	859 lbs	22.8%	11.5%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4

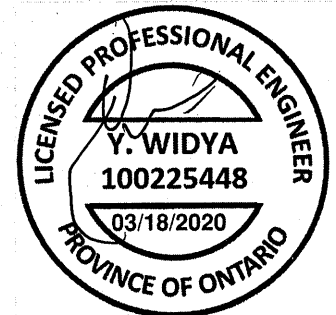
Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007388



Boise Cascade

**Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****PASSED****B05 (Floor Beam)**

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: Second Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

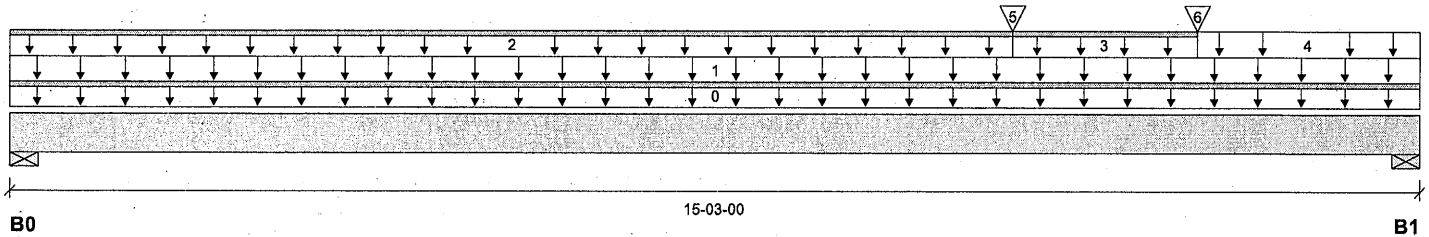

Total Horizontal Product Length = 15-03-00

Reaction Summary (Down / Uplift) (lbs)


Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	1602 / 0	1131 / 0		
B1, 3"	2457 / 0	1314 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	15-03-00	Top	12				00-00-00
1		Unf. Area (lb/ft²)	L	00-00-00	15-03-00	Top	40	15			04-09-00
2		Unf. Lin. (lb/ft)	L	00-00-00	10-10-00	Top		60			n/a
3		Unf. Lin. (lb/ft)	L	10-10-00	12-10-00	Top	27	14			n/a
4		Unf. Area (lb/ft²)	L	12-10-00	15-03-00	Top	40	15			06-00-00
5		Conc. Pt. (lbs)	L	10-10-00	10-10-00	Top	135	63			n/a
6		Conc. Pt. (lbs)	L	12-10-00	12-10-00	Top	393	217			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	14833 ft-lbs	35392 ft-lbs	41.9%	1	08-03-09
End Shear	4261 lbs	14464 lbs	29.5%	1	14-00-02
Total Load Deflection	L/409 (0.435")	n/a	58.7%	4	07-10-03
Live Load Deflection	L/676 (0.263")	n/a	53.3%	5	07-10-03
Max Defl.	0.435"	n/a	43.5%	4	07-10-03
Span / Depth	15.0				

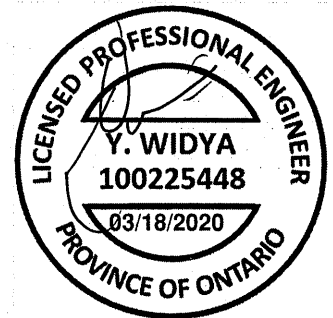**Bearing Supports**

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 3-1/2"	3817 lbs	50.7%	25.5%	Spruce-Pine-Fir
B1	Wall/Plate 3" x 3-1/2"	5329 lbs	82.5%	41.6%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Design meets User specified (1") Maximum Total load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 4

NAIL ONE PLY TO ANOTHER WITH 3-1/2" SPIRAL NAILS @ 12" O/C,
STAGGERED IN 2 ROWS

SE007389

B06 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: Second Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

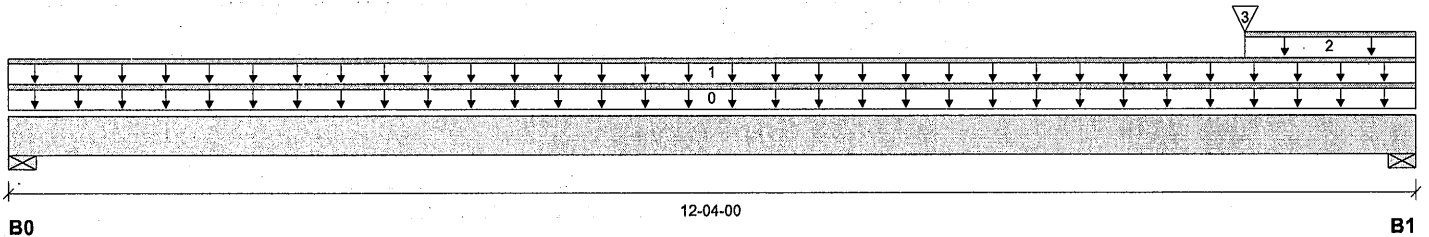

Total Horizontal Product Length = 12-04-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	183 / 0	501 / 0		
B1, 3-1/2"	326 / 0	570 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	12-04-00	Top		6			00-00-00
1		Unf. Lin. (lb/ft)	L	00-00-00	12-04-00	Top	27	74			n/a
2		Unf. Lin. (lb/ft)	L	10-10-00	12-04-00	Top	27	14			n/a
3		Conc. Pt. (lbs)	L	10-10-00	10-10-00	Top	135	63			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	2039 ft-lbs	11502 ft-lbs	17.7%	0	06-02-08
End Shear	629 lbs	4701 lbs	13.4%	0	11-00-10
Total Load Deflection	L/999 (0.107")	n/a	n/a	4	06-02-08
Live Load Deflection	L/999 (0.031")	n/a	n/a	5	06-04-04
Max Defl.	0.107"	n/a	n/a	4	06-02-08
Span / Depth	12.0				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	702 lbs	28.6%	14.4%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	798 lbs	32.6%	16.4%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4


Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007390

B07 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: Second Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

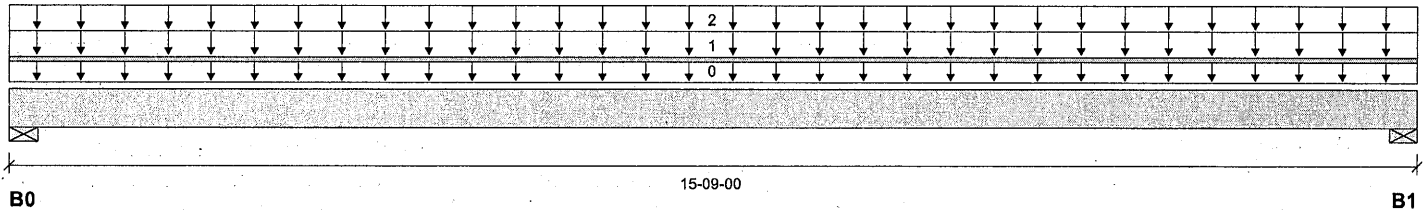
Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3"	3377 / 0	1644 / 0		
B1, 3-1/2"	3395 / 0	1653 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	15-09-00	Top		18			00-00-00
1		Unf. Area (lb/ft²)	L	00-00-00	15-09-00	Top	40	15			04-09-00
2		Unf. Area (lb/ft²)	L	00-00-00	15-09-00	Top	40	20			06-00-00

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	26645 ft-lbs	55212 ft-lbs	48.3%	1	07-10-04
End Shear	5997 lbs	21696 lbs	27.6%	1	01-02-14
Total Load Deflection	L/339 (0.543")	n/a	70.8%	4	07-10-04
Live Load Deflection	L/504 (0.365")	n/a	71.4%	5	07-10-04
Max Defl.	0.543"	n/a	54.3%	4	07-10-04
Span / Depth	15.5				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3" x 5-1/4"	7121 lbs	73.5%	37.1%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 5-1/4"	7159 lbs	63.3%	31.9%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4

NAIL ONE PLY TO ANOTHER WITH 3-1/2" SPIRAL NAILS @ 6" O/C,
 STAGGERED IN 2 ROWS



B08 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: Second Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

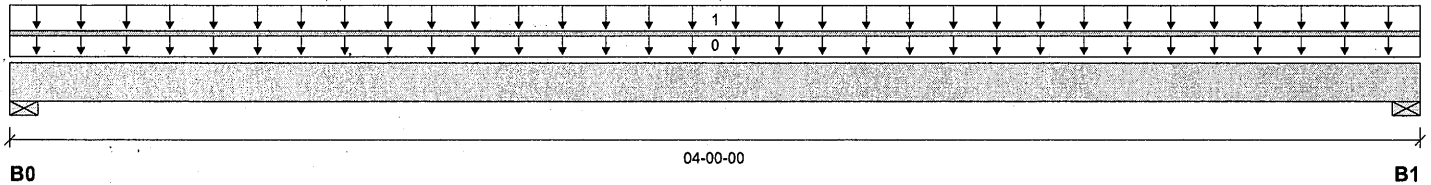
Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	360 / 0	147 / 0		
B1, 3-1/2"	360 / 0	147 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	04-00-00	Top	1.00	0.65	1.00	1.15	00-00-00
1		Unf. Area (lb/ft²)	L	00-00-00	04-00-00	Top	40	15			04-06-00

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	567 ft-lbs	17696 ft-lbs	3.2%	1	02-00-00
End Shear	260 lbs	7232 lbs	3.6%	1	01-03-06
Total Load Deflection	L/999 (0.002")	n/a	n/a	4	02-00-00
Live Load Deflection	L/999 (0.001")	n/a	n/a	5	02-00-00
Max Defl.	0.002"	n/a	n/a	4	02-00-00
Span / Depth	3.6				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	724 lbs	19.2%	9.7%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	724 lbs	19.2%	9.7%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4


Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJST™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007392

B09 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: Second Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

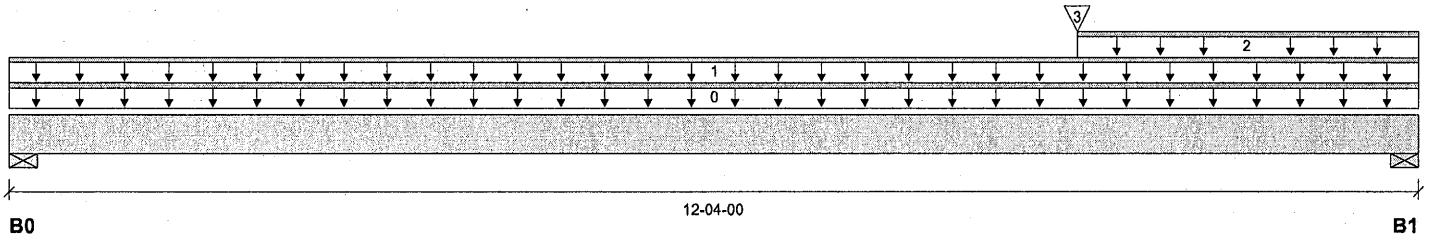

Total Horizontal Product Length = 12'-0"

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	259 / 0	532 / 0		
B1, 3-1/2"	515 / 0	644 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	12-04-00	Top		6			00-00-00
1		Unf. Lin. (lb/ft)	L	00-00-00	12-04-00	Top	27	74			n/a
2		Unf. Lin. (lb/ft)	L	09-04-00	12-04-00	Top	27	14			n/a
3		Conc. Pt. (lbs)	L	09-04-00	09-04-00	Top	360	147			n/a

Controls Summary


	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	3716 ft-lbs	17696 ft-lbs	21.0%	1	07-05-06
End Shear	1322 lbs	7232 lbs	18.3%	1	11-00-10
Total Load Deflection	L/992 (0.144")	n/a	24.2%	4	06-05-04
Live Load Deflection	L/999 (0.057")	n/a	n/a	5	06-06-12
Max Defl.	0.144"	n/a	14.4%	4	06-05-04
Span / Depth	12.0				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	745 lbs	30.4%	15.3%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	1577 lbs	41.8%	21.1%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4

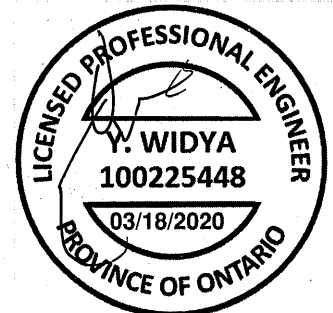
Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJST™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007393

B10 (Floor Beam)

Dry | 2 spans | L cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: Second Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

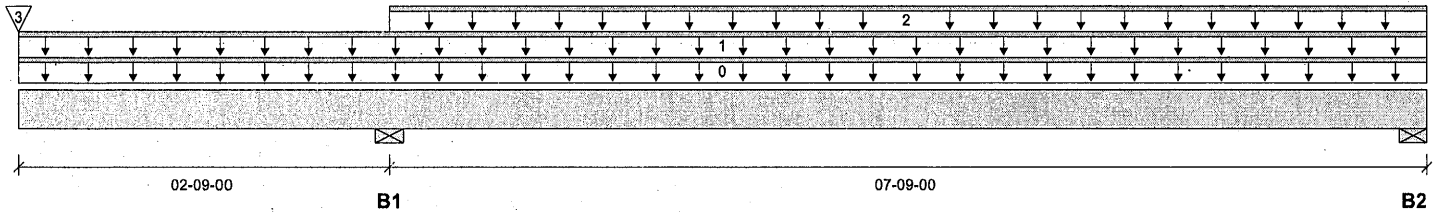
Reaction Summary (Down / Uplift) (lbs)


Bearing	Live	Dead	Snow	Wind
B1, 3-1/2"	783 / 0	394 / 0		
B2, 3-1/2"	215 / 145	72 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	10-06-00	Top	1.00	0.65	1.00	1.15	00-00-00
1		Unf. Lin. (lb/ft)	L	00-00-00	10-06-00	Top	27	14			n/a
2		Unf. Lin. (lb/ft)	L	02-09-00	10-06-00	Top	27	14			n/a
3		Conc. Pt. (lbs)	L	00-00-00	00-00-00	Top	360	147			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	599 ft-lbs	17696 ft-lbs	3.4%	3	07-01-10
Neg. Moment	-2238 ft-lbs	-17696 ft-lbs	12.6%	1	02-09-00
End Shear	255 lbs	7232 lbs	3.5%	3	09-02-10
Cont. Shear	830 lbs	7232 lbs	11.5%	1	01-07-06
Total Load Deflection	2xL/1998 (0.046")	n/a	n/a	9	00-00-00
Live Load Deflection	2xL/1998 (0.036")	n/a	n/a	12	00-00-00
Total Neg. Defl.	L/999 (-0.015")	n/a	n/a	9	05-08-10
Max Defl.	-0.015"	n/a	n/a	9	05-08-10
Cant. Max Defl.	0.046"	n/a	n/a	9	00-00-00
Span / Depth	7.6				

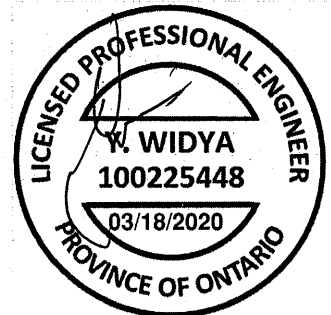
Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B1	Wall/Plate 3-1/2" x 1-3/4"	1666 lbs	44.2%	22.3%	Spruce-Pine-Fir
B2	Wall/Plate 3-1/2" x 1-3/4"	413 lbs	11.0%	5.5%	Spruce-Pine-Fir
B2	Uplift	153 lbs			

Cautions

Uplift of 153 lbs found at bearing B2.

B11 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: Second Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

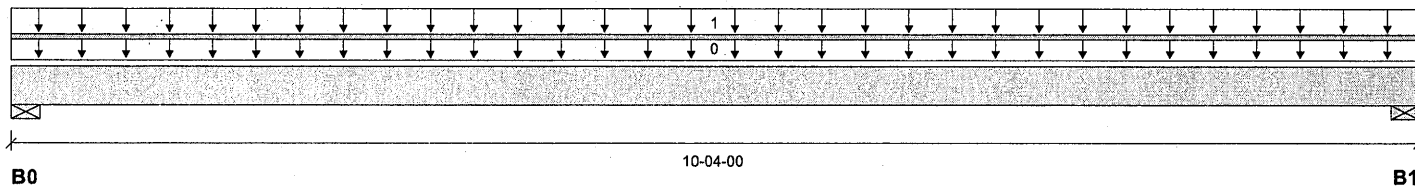

Total Horizontal Product Length = 10-04-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	982 / 0	399 / 0		
B1, 3-1/2"	982 / 0	399 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	10-04-00	Top	1.00	0.65	1.00	1.15	00-00-00
1		Unf. Area (lb/ft²)	L	00-00-00	10-04-00	Top	40	15			04-09-00

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	4651 ft-lbs	17696 ft-lbs	26.3%	1	05-02-00
End Shear	1483 lbs	7232 lbs	20.5%	1	01-03-06
Total Load Deflection	L/999 (0.117")	n/a	n/a	4	05-02-00
Live Load Deflection	L/999 (0.083")	n/a	n/a	5	05-02-00
Max Defl.	0.117"	n/a	n/a	4	05-02-00
Span / Depth	10.0				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	1972 lbs	52.3%	26.4%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	1972 lbs	52.3%	26.4%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4


Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJST™, ALLJOIST®, BC RIM BOARD™, BC®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007395

B12 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: Second Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

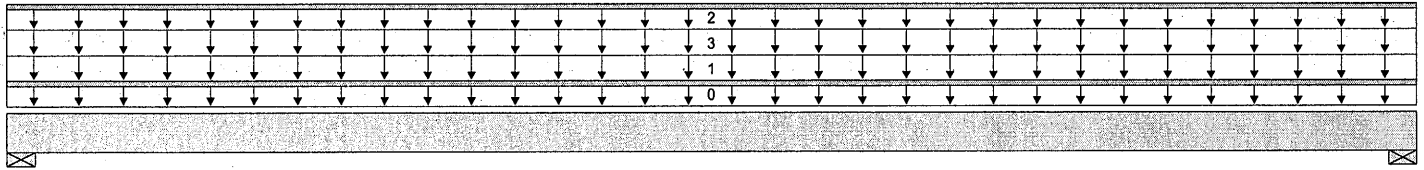

B0

03-03-00

B1

Total Horizontal Product Length = 03-03-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	141 / 0	353 / 0	290 / 0	
B1, 3-1/2"	141 / 0	353 / 0	290 / 0	

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	03-03-00	Top		6			00-00-00
1		Unf. Area (lb/ft²)	L	00-00-00	03-03-00	Top	40	15			02-02-00
2		Unf. Lin. (lb/ft)	L	00-00-00	03-03-00	Top		60			n/a
3		Unf. Area (lb/ft²)	L	00-00-00	03-03-00	Top		14	21		08-06-00

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	610 ft-lbs	17696 ft-lbs	3.4%	5	01-07-08
End Shear	215 lbs	7232 lbs	3.0%	5	01-03-06
Total Load Deflection	L/999 (0.001")	n/a	n/a	11	01-07-08
Live Load Deflection	L/999 (0.001")	n/a	n/a	15	01-07-08
Max Defl.	0.001"	n/a	n/a	11	01-07-08
Span / Depth	2.8				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	1018 lbs	27.0%	13.6%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	1018 lbs	27.0%	13.6%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4


Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007396

B13 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: First Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

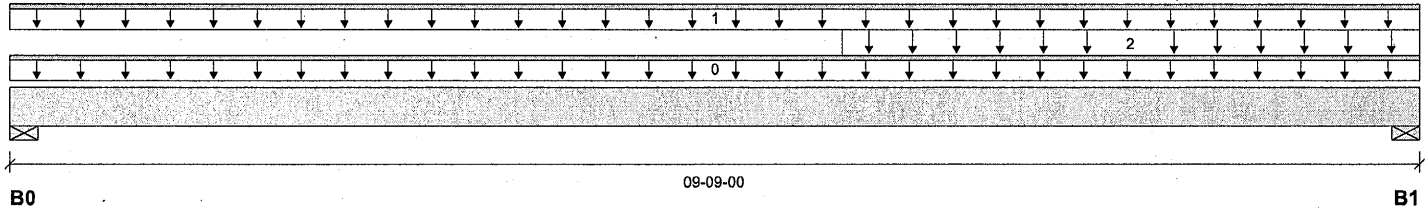
Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	178 / 0	407 / 0		
B1, 3-1/2"	326 / 0	463 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	09-09-00	Top	1.00	0.65	1.00	1.15	00-00-00
1		Unf. Lin. (lb/ft)	L	00-00-00	09-09-00	Top	27	74			n/a
2		Unf. Area (lb/ft²)	L	05-09-00	09-09-00	Top	40	15			01-06-00

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	1323 ft-lbs	11502 ft-lbs	11.5%	0	05-00-10
End Shear	736 lbs	7232 lbs	10.2%	1	08-05-10
Total Load Deflection	L/999 (0.047")	n/a	n/a	4	04-11-12
Live Load Deflection	L/999 (0.017")	n/a	n/a	5	05-00-10
Max Defl.	0.047"	n/a	n/a	4	04-11-12
Span / Depth	9.4				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	570 lbs	23.3%	11.7%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	1067 lbs	28.3%	14.3%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4


Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJST™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007397

B14 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: First Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

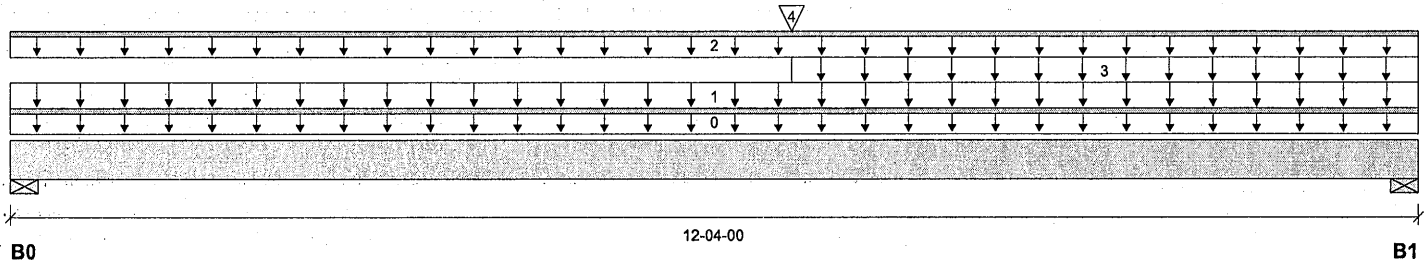

Total Horizontal Product Length = 12-04-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	1793 / 0	1268 / 0		
B1, 3-1/2"	2445 / 0	1550 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	12-04-00	Top		12			00-00-00
1		Unf. Area (lb/ft²)	L	00-00-00	12-04-00	Top	40	15			06-00-00
2		Unf. Lin. (lb/ft)	L	00-00-00	12-04-00	Top		60			n/a
3		Unf. Area (lb/ft²)	L	06-10-00	12-04-00	Top	40	15			05-00-00
4		Conc. Pt. (lbs)	L	06-10-00	06-10-00	Top	178	407			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/ Resistance	Case	Location
Pos. Moment	15106 ft-lbs	35392 ft-lbs	42.7%	1	06-10-00
End Shear	4380 lbs	14464 lbs	30.3%	1	11-00-10
Total Load Deflection	L/525 (0.272")	n/a	45.7%	4	06-03-12
Live Load Deflection	L/899 (0.158")	n/a	40.0%	5	06-03-12
Max Defl.	0.272"	n/a	27.2%	4	06-03-12
Span / Depth	12.0				



Bearing Supports	Dim. (LxW)	Demand	Demand/ Resistance Support	Demand/ Resistance Member	Material
B0	Wall/Plate 3-1/2" x 3-1/2"	4274 lbs	56.7%	28.6%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 3-1/2"	5605 lbs	74.4%	37.5%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4

NAIL ONE PLY TO ANOTHER WITH 3-1/2" SPIRAL NAILS @ 12" O/C,
 STAGGERED IN 2 ROWS

B15 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: First Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

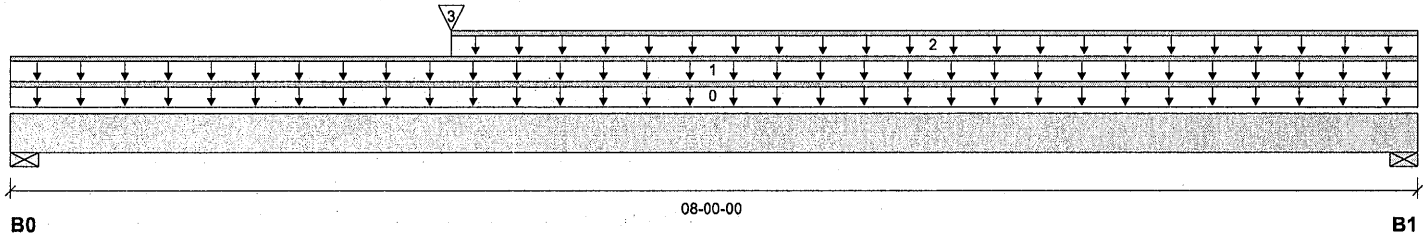

Total Horizontal Product Length = 08-00-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	386 / 0	429 / 0		
B1, 3-1/2"	305 / 0	271 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	08-00-00	Top		6			00-00-00
1		Unf. Lin. (lb/ft)	L	00-00-00	08-00-00	Top	27	14			n/a
2		Unf. Lin. (lb/ft)	L	02-06-00	08-00-00	Top	27	14			n/a
3		Conc. Pt. (lbs)	L	02-06-00	02-06-00	Top	326	463			n/a


Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	2329 ft-lbs	17696 ft-lbs	13.2%	1	02-06-00
End Shear	1031 lbs	7232 lbs	14.3%	1	01-03-06
Total Load Deflection	L/999 (0.032")	n/a	n/a	4	03-09-01
Live Load Deflection	L/999 (0.015")	n/a	n/a	5	03-09-13
Max Defl.	0.032"	n/a	n/a	4	03-09-01
Span / Depth	7.6				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	1115 lbs	29.6%	14.9%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	796 lbs	21.1%	10.6%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4

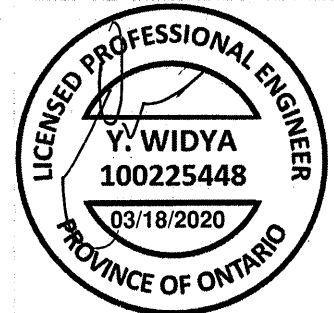
Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJST™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007399

B16 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: First Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

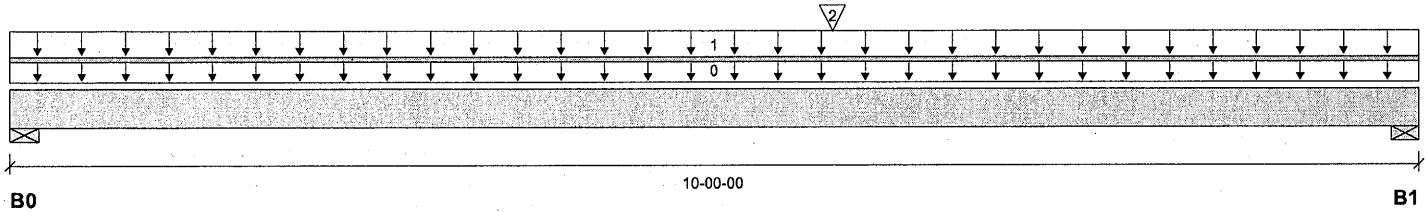
Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	1089 / 0	439 / 0		
B1, 3-1/2"	1211 / 0	485 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	10-00-00	Top		6			00-00-00
1		Unf. Area (lb/ft²)	L	00-00-00	10-00-00	Top	40	15			04-00-00
2		Conc. Pt. (lbs)	L	05-10-00	05-10-00	Top	700	263			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	6747 ft-lbs	17696 ft-lbs	38.1%	1	05-10-00
End Shear	2009 lbs	7232 lbs	27.8%	1	08-08-10
Total Load Deflection	L/787 (0.145")	n/a	30.5%	4	05-01-07
Live Load Deflection	L/999 (0.104")	n/a	n/a	5	05-01-07
Max Defl.	0.145"	n/a	14.5%	4	05-01-07
Span / Depth	9.6				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	2182 lbs	57.9%	29.2%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	2422 lbs	64.3%	32.4%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4


Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007400

B17 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: First Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

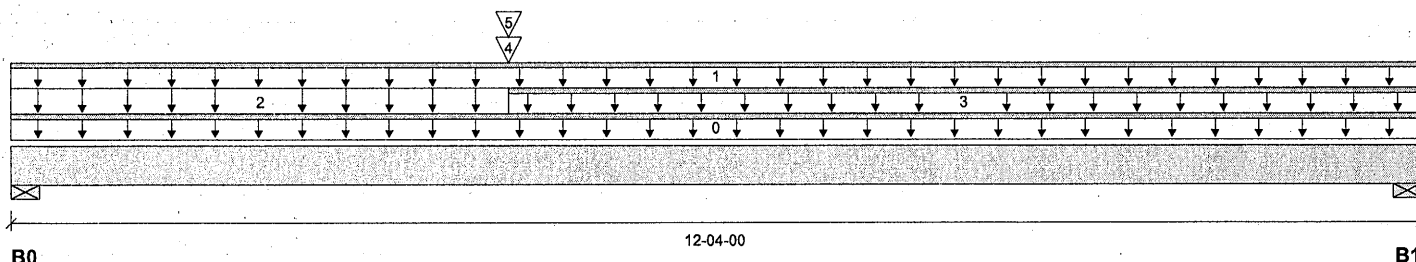

Total Horizontal Product Length = 12-04-00

Reaction Summary (Down / Uplift) (lbs)


Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	1473 / 0	1013 / 0		
B1, 3-1/2"	863 / 0	786 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	12-04-00	Top		6			00-00-00
1		Unf. Lin. (lb/ft)	L	00-00-00	12-04-00	Top	27	74			n/a
2		Unf. Area (lb/ft²)	L	00-00-00	04-04-00	Top	40	15			02-02-00
3		Unf. Lin. (lb/ft)	L	04-04-00	12-04-00	Top	27	14			n/a
4		Conc. Pt. (lbs)	L	04-04-00	04-04-00	Top	200	75			n/a
5		Conc. Pt. (lbs)	L	04-04-00	04-04-00	Top	1211	485			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	11351 ft-lbs	17696 ft-lbs	64.1%	1	04-04-00
End Shear	3077 lbs	7232 lbs	42.5%	1	01-03-06
Total Load Deflection	L/387 (0.368")	n/a	62.0%	4	05-09-10
Live Load Deflection	L/657 (0.217")	n/a	54.8%	5	05-09-10
Max Defl.	0.368"	n/a	36.8%	4	05-09-10
Span / Depth	12.0				

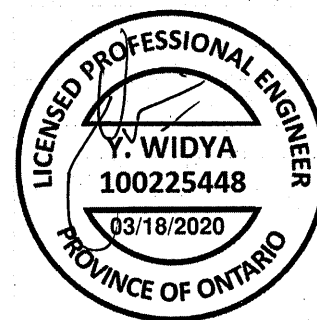

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	3475 lbs	92.2%	46.5%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	2278 lbs	60.4%	30.5%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4

B18 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: First Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

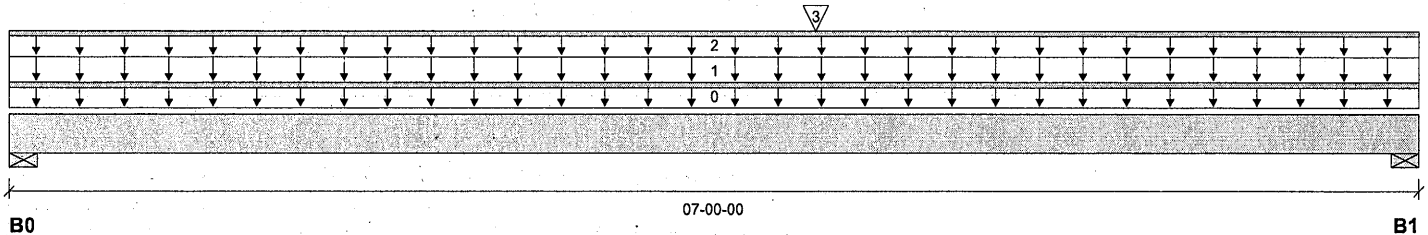

Total Horizontal Product Length = 07-00-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	867 / 0	658 / 0		
B1, 3-1/2"	928 / 0	687 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	07-00-00	Top		5			00-00-00
1		Unf. Area (lb/ft²)	L	00-00-00	07-00-00	Top	40	20			05-00-00
2		Unf. Lin. (lb/ft)	L	00-00-00	07-00-00	Top		60			n/a
3		Conc. Pt. (lbs)	L	04-00-00	04-00-00	Top	395	192			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	3973 ft-lbs	11610 ft-lbs	34.2%	1	04-00-00
End Shear	1703 lbs	5785 lbs	29.4%	1	05-11-00
Total Load Deflection	L/999 (0.083")	n/a	n/a	4	03-06-08
Live Load Deflection	L/999 (0.048")	n/a	n/a	5	03-06-08
Max Defl.	0.083"	n/a	n/a	4	03-06-08
Span / Depth	8.3				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	2124 lbs	56.4%	28.4%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	2251 lbs	59.7%	30.1%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4


Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJST™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007402

B19 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: First Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

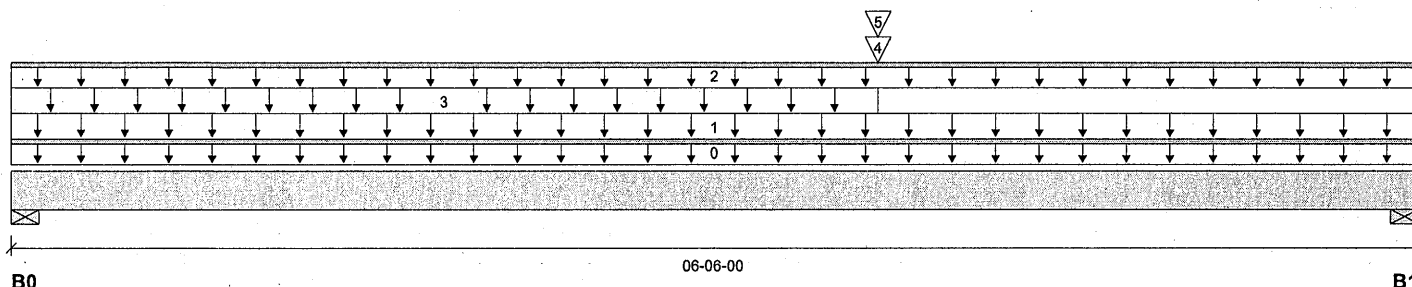

Total Horizontal Product Length = 06-06-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	1844 / 0	1016 / 0		
B1, 3-1/2"	1790 / 0	1007 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	06-06-00	Top	1.00	0.65	1.00	1.15	00-00-00
1		Unf. Area (lb/ft²)	L	00-00-00	06-06-00	Top	40	20			05-00-00
2		Unf. Lin. (lb/ft)	L	00-00-00	06-06-00	Top		60			n/a
3		Unf. Area (lb/ft²)	L	00-00-00	04-00-00	Top	40	15			06-00-00
4		Conc. Pt. (lbs)	L	04-00-00	04-00-00	Top	900	338			n/a
5		Conc. Pt. (lbs)	L	04-00-00	04-00-00	Top	474	222			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	7368 ft-lbs	23220 ft-lbs	31.7%	1	04-00-00
End Shear	3388 lbs	11571 lbs	29.3%	1	05-05-00
Total Load Deflection	L/999 (0.064")	n/a	n/a	4	03-03-04
Live Load Deflection	L/999 (0.042")	n/a	n/a	5	03-04-05
Max Defl.	0.064"	n/a	n/a	4	03-03-04
Span / Depth	7.6				


Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 3-1/2"	4036 lbs	53.6%	27.0%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 3-1/2"	3943 lbs	52.3%	26.4%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.

Design meets Code minimum (L/360) Live load deflection criteria.

Design meets User specified (1") Maximum Total load deflection criteria.

Calculations assume member is fully braced.

Resistance Factor phi has been applied to all presented results per CSA O86.

BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.

Design based on Dry Service Condition.

Importance Factor : Normal Part code : Part 4

 NAIL ONE PLY TO ANOTHER WITH 3-1/2" SPIRAL NAILS @ 12" O/C,
 STAGGERED IN 2 ROWS

SE007403



Single 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP

PASSED

B20 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: First Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

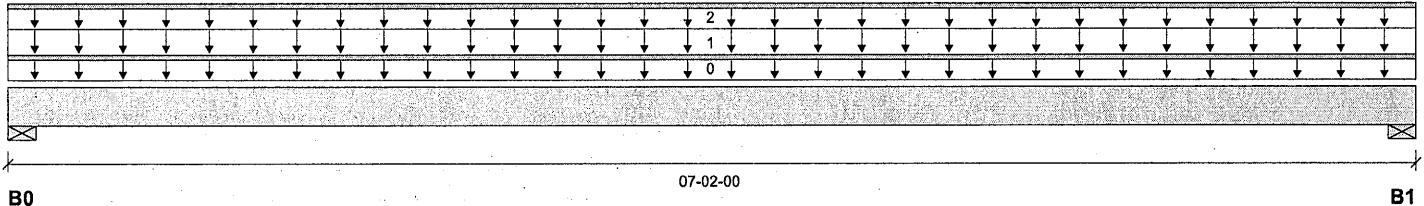

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	323 / 0	358 / 0		
B1, 3-1/2"	323 / 0	358 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	07-02-00	Top		6			00-00-00
1		Unf. Area (lb/ft²)	L	00-00-00	07-02-00	Top	40	15			02-03-00
2		Unf. Lin. (lb/ft)	L	00-00-00	07-02-00	Top		60			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	1461 ft-lbs	17696 ft-lbs	8.3%	1	03-07-00
End Shear	598 lbs	7232 lbs	8.3%	1	01-03-06
Total Load Deflection	L/999 (0.018")	n/a	n/a	4	03-07-00
Live Load Deflection	L/999 (0.008")	n/a	n/a	5	03-07-00
Max Defl.	0.018"	n/a	n/a	4	03-07-00
Span / Depth	6.8				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	931 lbs	24.7%	12.5%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	931 lbs	24.7%	12.5%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4



Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJST™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007404

B21 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: First Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

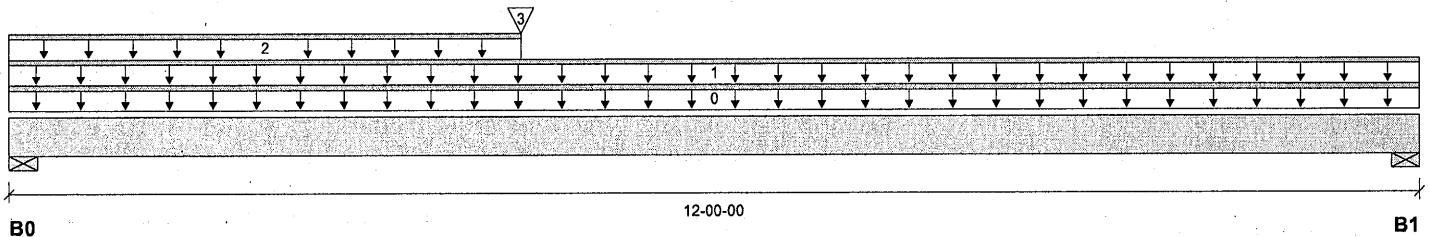

Total Horizontal Product Length = 12-00-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	467 / 0	761 / 0		
B1, 3-1/2"	297 / 0	618 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	12-00-00	Top		6			00-00-00
1		Unf. Lin. (lb/ft)	L	00-00-00	12-00-00	Top	27	74			n/a
2		Unf. Lin. (lb/ft)	L	00-00-00	04-04-00	Top	27	14			n/a
3		Conc. Pt. (lbs)	L	04-04-00	04-04-00	Top	323	358			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	4924 ft-lbs	17696 ft-lbs	27.8%	1	04-04-00
End Shear	1398 lbs	7232 lbs	19.3%	1	01-03-06
Total Load Deflection	L/837 (0.166")	n/a	28.7%	4	05-08-12
Live Load Deflection	L/999 (0.061")	n/a	n/a	5	05-08-12
Max Defl.	0.166"	n/a	16.6%	4	05-08-12
Span / Depth	11.7				

Bearing Supports	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	1653 lbs	43.9%	22.1%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	865 lbs	35.3%	17.8%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4


Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJS™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007405



Boise Cascade

**Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****PASSED****B22 (Floor Beam)**

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: Second Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

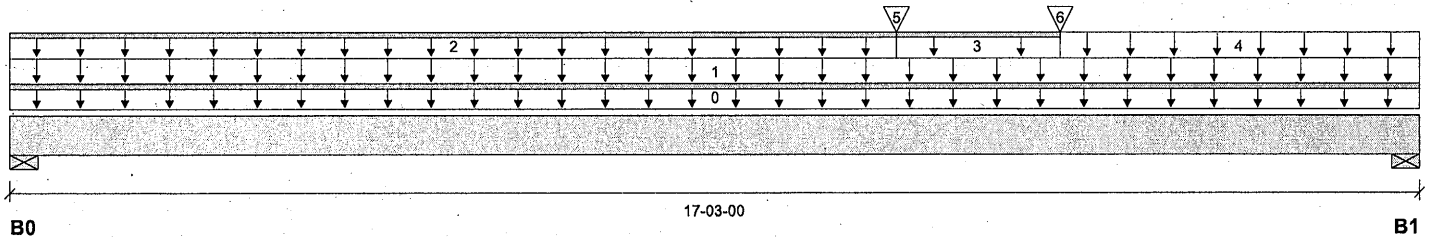

Total Horizontal Product Length = 17-03-00

Reaction Summary (Down / Uplift) (lbs)


Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	1936 / 0	1304 / 0		
B1, 3"	2984 / 0	1488 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	17-03-00	Top		12			00-00-00
1		Unf. Area (lb/ft²)	L	00-00-00	17-03-00	Top	40	15			04-09-00
2		Unf. Lin. (lb/ft)	L	00-00-00	10-10-00	Top		60			n/a
3		Unf. Lin. (lb/ft)	L	10-10-00	12-10-00	Top	27	14			n/a
4		Unf. Area (lb/ft²)	L	12-10-00	17-03-00	Top	40	15			06-00-00
5		Conc. Pt. (lbs)	L	10-10-00	10-10-00	Top	135	63			n/a
6		Conc. Pt. (lbs)	L	12-10-00	12-10-00	Top	393	217			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	21111 ft-lbs	35392 ft-lbs	59.6%	1	09-07-10
End Shear	5268 lbs	14464 lbs	36.4%	1	16-00-02
Total Load Deflection	L/256 (0.79")	n/a	93.8%	4	08-10-11
Live Load Deflection	L/409 (0.493")	n/a	87.9%	5	08-10-11
Max Defl.	0.79"	n/a	79.0%	4	08-10-11
Span / Depth	17.0				

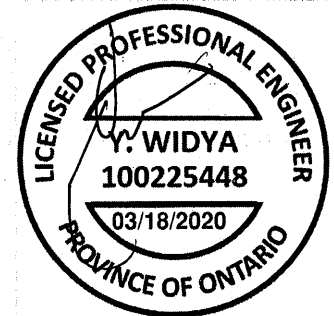**Bearing Supports**

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 3-1/2"	4533 lbs	60.2%	30.3%	Spruce-Pine-Fir
B1	Wall/Plate 3" x 3-1/2"	6336 lbs	98.1%	49.5%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4

NAIL ONE PLY TO ANOTHER WITH 3-1/2" SPIRAL NAILS @ 12" O/C,
 STAGGERED IN 2 ROWS

SE007406



Boise Cascade

**Double 1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP****PASSED****B23 (Floor Beam)**

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: Second Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

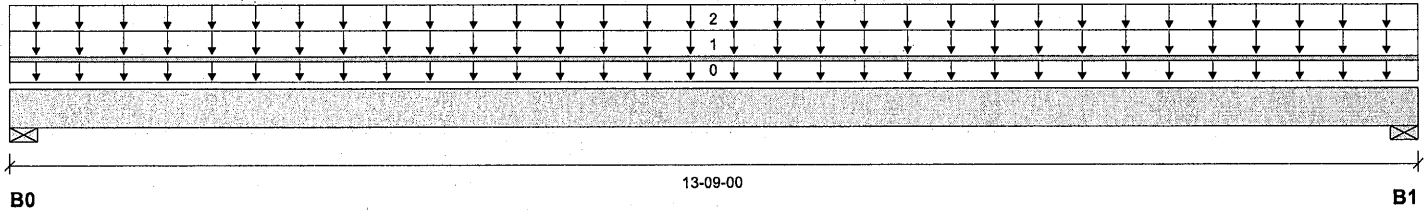

Total Horizontal Product Length = 13-09-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3"	2947 / 0	1393 / 0		
B1, 3-1/2"	2965 / 0	1402 / 0		

Load Summary


Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	13-09-00	Top	1.00	0.65	1.00	1.15	
1		Unf. Area (lb/ft²)	L	00-00-00	13-09-00	Top	40	15			00-00-00
2		Unf. Area (lb/ft²)	L	00-00-00	13-09-00	Top	40	20			04-09-00

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	19980 ft-lbs	35392 ft-lbs	56.5%	1	06-10-04
End Shear	5048 lbs	14464 lbs	34.9%	1	01-02-14
Total Load Deflection	L/347 (0.461")	n/a	69.2%	4	06-10-04
Live Load Deflection	L/511 (0.313")	n/a	70.4%	5	06-10-04
Max Defl.	0.461"	n/a	46.1%	4	06-10-04
Span / Depth	13.5				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3" x 3-1/2"	6163 lbs	95.4%	48.1%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 3-1/2"	6200 lbs	82.3%	41.5%	Spruce-Pine-Fir

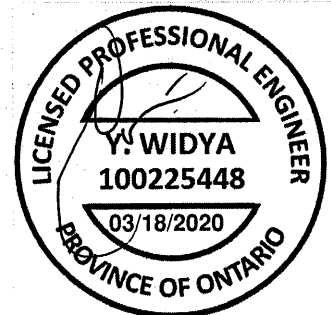**Notes**

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4

NAIL ONE PLY TO ANOTHER WITH 3-1/2" SPIRAL NAILS @ 12" O/C,
 STAGGERED IN 2 ROWS

SE007407

B24 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: First Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

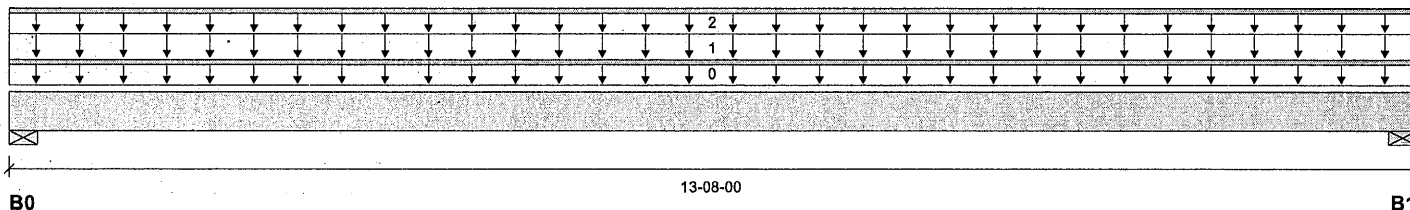

Total Horizontal Product Length = 13-08-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	478 / 0	690 / 0		
B1, 3-1/2"	478 / 0	690 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live 1.00	Dead 0.65	Snow 1.00	Wind 1.15	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	13-08-00	Top		6			00-00-00
1		Unf. Area (lb/ft²)	L	00-00-00	13-08-00	Top	40	20			01-09-00
2		Unf. Lin. (lb/ft)	L	00-00-00	13-08-00	Top		60			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	5043 ft-lbs	17696 ft-lbs	28.5%	1	06-10-00
End Shear	1284 lbs	7232 lbs	17.8%	1	01-03-06
Total Load Deflection	L/661 (0.24")	n/a	36.3%	4	06-10-00
Live Load Deflection	L/999 (0.098")	n/a	n/a	5	06-10-00
Max Defl.	0.24"	n/a	24.0%	4	06-10-00
Span / Depth	13.3				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	1580 lbs	41.9%	21.1%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	1580 lbs	41.9%	21.1%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4


Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJST™, ALLJOIST®, BC RIM BOARD™, BC®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007408


B25 (Floor Beam)

Dry | 1 span | No cant.

March 18, 2020 08:50:32

 BC CALC® Member Report
 Build 7555

 Job name: 45147 (4000)
 Address: Pine Valley
 City, Province, Postal Code: Vaughan, ON
 Builder: Gold Park
 Code reports: CCMC 12472-R

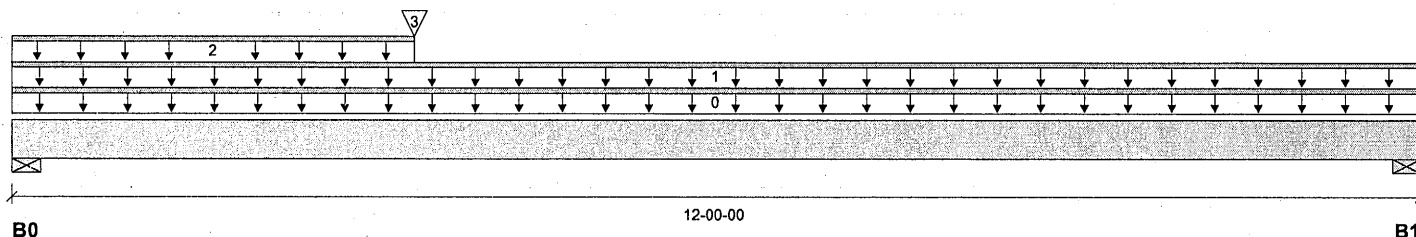 File name: 318264
 Description: First Floor Framing
 Specifier:
 Designer: NL
 Company: Alpa Roof Trusses


Total Horizontal Product Length = 12-00-00

Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	588 / 0	1021 / 0		
B1, 3-1/2"	306 / 0	677 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	12-00-00	Top		6			00-00-00
1		Unf. Lin. (lb/ft)	L	00-00-00	12-00-00	Top	27	74			n/a
2		Unf. Lin. (lb/ft)	L	00-00-00	03-05-00	Top	27	14			n/a
3		Conc. Pt. (lbs)	L	03-05-00	03-05-00	Top	478	690			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	3794 ft-lbs	11502 ft-lbs	33.0%	0	03-06-06
End Shear	1261 lbs	4701 lbs	26.8%	0	01-03-06
Total Load Deflection	L/719 (0.193")	n/a	33.4%	4	05-08-06
Live Load Deflection	L/999 (0.067")	n/a	n/a	5	05-07-00
Max Defl.	0.193"	n/a	19.3%	4	05-08-06
Span / Depth	11.7				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	1430 lbs	58.4%	29.4%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	948 lbs	38.7%	19.5%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4


Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJST™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007409

B26 (Floor Beam)

Dry | 2 spans | No cant.

March 18, 2020 08:50:32

BC CALC® Member Report

Build 7555

Job name: 45147 (4000)

File name: 318264

Address: Pine Valley

Description: First Floor Framing

City, Province, Postal Code: Vaughan, ON


Specifier:

Builder: Gold Park

Designer: NL

Code reports: CCMC 12472-R

Company: Alpa Roof Trusses

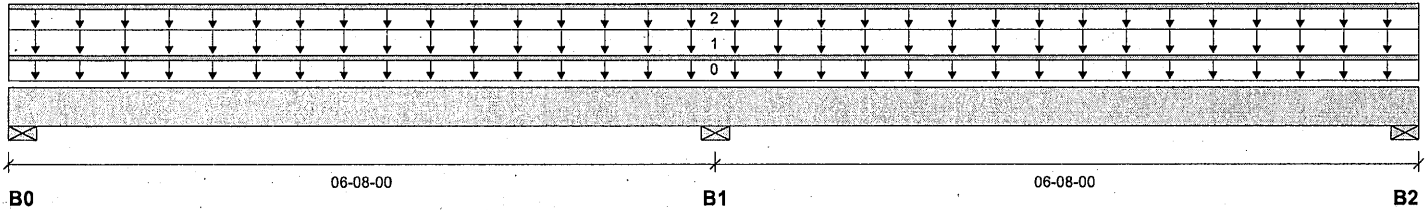
Reaction Summary (Down / Uplift) (lbs)

Bearing	Live	Dead	Snow	Wind
B0, 3-1/2"	518 / 68	396 / 0		
B1, 3-1/2"	1368 / 0	1206 / 0		
B2, 3-1/2"	518 / 68	396 / 0		

Load Summary

Tag	Description	Load Type	Ref.	Start	End	Loc.	Live	Dead	Snow	Wind	Tributary
0	Self-Weight	Unf. Lin. (lb/ft)	L	00-00-00	13-04-00	Top	1.00	0.65	1.00	1.15	00-00-00
1		Unf. Area (lb/ft²)	L	00-00-00	13-04-00	Top	40	20			04-03-00
2		Unf. Lin. (lb/ft)	L	00-00-00	13-04-00	Top		60			n/a

Controls Summary

	Factored Demand	Factored Resistance	Demand/Resistance	Case	Location
Pos. Moment	1548 ft-lbs	11610 ft-lbs	13.3%	2	02-10-12
Neg. Moment	-2291 ft-lbs	-11610 ft-lbs	19.7%	1	06-08-00
End Shear	792 lbs	5785 lbs	13.7%	2	01-01-00
Cont. Shear	1365 lbs	5785 lbs	23.6%	1	05-08-12
Total Load Deflection	L/999 (0.028")	n/a	n/a	9	03-01-06
Live Load Deflection	L/999 (0.018")	n/a	n/a	12	03-03-02
Total Neg. Defl.	L/999 (-0.003")	n/a	n/a	9	07-09-00
Max Defl.	0.028"	n/a	n/a	9	03-01-06
Span / Depth	8.1				

Bearing Supports

	Dim. (LxW)	Demand	Demand/Resistance Support	Demand/Resistance Member	Material
B0	Wall/Plate 3-1/2" x 1-3/4"	1272 lbs	33.7%	17.0%	Spruce-Pine-Fir
B1	Wall/Plate 3-1/2" x 1-3/4"	3559 lbs	94.4%	47.6%	Spruce-Pine-Fir
B2	Wall/Plate 3-1/2" x 1-3/4"	1272 lbs	33.7%	17.0%	Spruce-Pine-Fir

Notes

Design meets Code minimum (L/240) Total load deflection criteria.
 Design meets Code minimum (L/360) Live load deflection criteria.
 Design meets User specified (1") Maximum Total load deflection criteria.
 Calculations assume member is fully braced.
 Resistance Factor phi has been applied to all presented results per CSA O86.
 BC CALC® analysis is based on Canadian Limit States Design, as per NBCC 2015 and CSA O86.
 Design based on Dry Service Condition.
 Importance Factor : Normal Part code : Part 4


Disclosure

Use of the Boise Cascade Software is subject to the terms of the End User License Agreement (EULA). Completeness and accuracy of input must be reviewed and verified by a qualified engineer or other appropriate expert to assure its adequacy, prior to anyone relying on such output as evidence of suitability for a particular application. The output here is based on building code-accepted design properties and analysis methods. Installation of Boise Cascade engineered wood products must be in accordance with current Installation Guide and applicable building codes. To obtain Installation Guide or ask questions, please call (800)232-0788 before installation.

BC CALC®, BC FRAMER®, AJST™, ALLJOIST®, BC RIM BOARD™, BCI®, BOISE GLULAM™, BC FloorValue®, VERSA-LAM®, VERSA-RIM PLUS®,

SE007410

Maximum Floor Spans – M4.1, L/360

Design Criteria

Spans:	Simple span
Loads:	Live load = 40 psf and dead load = 20 psf
Deflection limits:	L/360 under live load and L/240 under total load
Sheathing:	3/4 in. nailed-glued oriented strand board (OSB) sheathing



Maximum Floor Spans

Joist depth	Joist series	Bare On centre spacing				1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-11"	15'-0"	14'-6"	13'-5"	16'-5"	15'-5"	14'-6"	13'-5"
	NI-40x	17'-0"	16'-0"	15'-5"	14'-10"	17'-5"	16'-5"	15'-10"	14'-11"
	NI-60	17'-2"	16'-2"	15'-7"	14'-11"	17'-7"	16'-7"	16'-0"	15'-4"
	NI-80	18'-3"	17'-1"	16'-5"	15'-9"	18'-8"	17'-5"	16'-9"	16'-1"
11-7/8"	NI-20	17'-11"	16'-11"	16'-3"	15'-8"	18'-7"	17'-5"	16'-10"	16'-1"
	NI-40x	19'-4"	17'-11"	17'-3"	16'-7"	19'-11"	18'-6"	17'-9"	17'-0"
	NI-60	19'-7"	18'-2"	17'-6"	16'-9"	20'-2"	18'-9"	17'-11"	17'-2"
	NI-80	21'-1"	19'-6"	18'-6"	17'-7"	21'-7"	20'-0"	19'-0"	18'-0"
	NI-90	21'-6"	19'-10"	18'-11"	17'-11"	22'-0"	20'-4"	19'-5"	18'-4"
14"	NI-40x	21'-5"	19'-11"	18'-11"	18'-0"	22'-1"	20'-7"	19'-7"	18'-7"
	NI-60	21'-10"	20'-2"	19'-3"	18'-3"	22'-6"	20'-10"	19'-11"	18'-10"
	NI-80	23'-5"	21'-7"	20'-7"	19'-5"	24'-0"	22'-3"	21'-2"	20'-0"
	NI-90	23'-10"	22'-1"	21'-0"	19'-10"	24'-5"	22'-7"	21'-6"	20'-4"
16"	NI-60	23'-9"	22'-0"	21'-0"	19'-10"	24'-6"	22'-9"	21'-8"	20'-7"
	NI-80	25'-6"	23'-7"	22'-5"	21'-2"	26'-2"	24'-3"	23'-1"	21'-10"
	NI-90	26'-0"	24'-0"	22'-10"	21'-6"	26'-7"	24'-8"	23'-5"	22'-2"

Joist depth	Joist series	Mid-span blocking with 1x4 inch strap On centre spacing				Mid-span blocking and 1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	17'-1"	15'-5"	14'-6"	13'-5"	17'-1"	15'-5"	14'-6"	13'-5"
	NI-40x	18'-8"	17'-6"	16'-7"	14'-11"	19'-2"	17'-8"	16'-7"	14'-11"
	NI-60	18'-11"	17'-8"	16'-10"	15'-7"	19'-5"	18'-0"	16'-10"	15'-7"
	NI-80	20'-3"	18'-10"	17'-11"	17'-2"	20'-8"	19'-3"	18'-4"	17'-5"
11-7/8"	NI-20	20'-3"	18'-8"	17'-6"	16'-1"	20'-7"	18'-8"	17'-6"	16'-1"
	NI-40x	21'-10"	20'-4"	19'-0"	17'-0"	22'-5"	20'-10"	19'-0"	17'-0"
	NI-60	22'-1"	20'-7"	19'-8"	18'-7"	22'-8"	21'-2"	20'-3"	18'-8"
	NI-80	23'-8"	22'-0"	20'-11"	19'-10"	24'-1"	22'-6"	21'-6"	20'-4"
	NI-90	24'-1"	22'-5"	21'-4"	20'-2"	24'-7"	22'-11"	21'-10"	20'-8"
14"	NI-40x	24'-5"	22'-9"	20'-11"	18'-8"	25'-1"	22'-11"	20'-11"	18'-8"
	NI-60	24'-10"	23'-2"	22'-1"	20'-10"	25'-6"	23'-10"	22'-9"	21'-4"
	NI-80	26'-6"	24'-8"	23'-6"	22'-2"	27'-1"	25'-3"	24'-1"	22'-9"
	NI-90	27'-0"	25'-1"	23'-11"	22'-7"	27'-6"	25'-8"	24'-6"	23'-2"
16"	NI-60	27'-3"	25'-5"	24'-3"	22'-11"	28'-0"	26'-2"	25'-0"	23'-1"
	NI-80	29'-1"	27'-1"	25'-9"	24'-4"	29'-8"	27'-9"	26'-5"	25'-0"
	NI-90	29'-7"	27'-6"	26'-2"	24'-9"	30'-2"	28'-2"	26'-10"	25'-5"

Notes:

1. The tabulated clear spans are based on CSA O86-14 and NBC 2015, and are applicable to residential floor construction meeting the above design criteria.
2. For multiple-span applications, the end spans shall be 40% or more of the adjacent span.
3. Minimum bearing length shall be 1-3/4 inch for end bearings, and 3-1/2 inches for intermediate bearings.
4. Bearing stiffeners are not required when I-joists are used in accordance with this table, except as required for hangers.
5. Nordic I-joists are listed in CCMC Evaluation Report 13032-R and APA Product Report PR-L274C.

The construction details for residential designs are prone to changes.

Details released after April 2014 supersedes N-C301


Installation must comply with latest documentation on I-Joist and other Nordic products from the <http://nordic.ca/>

This document does not constitute a record of the structural integrity of the building nor suitability of the design assumptions made. Nordic Structures is responsible only for the structural adequacy of its component based on the design criteria and loadings shown on the calculation sheets.

(Nordic Request 1810-095)

NORDIC ENGINEERED WOOD

INSTALLATION GUIDE FOR RESIDENTIAL FLOORS

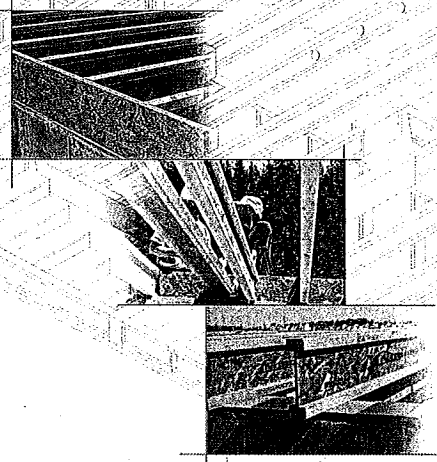

Distributed by:



SAFETY AND CONSTRUCTION PRECAUTIONS



Do not walk on I-joists until fully fastened and braced, or serious injuries can result.



Never stack building materials over unfastened I-joists. Once sheathed, do not over-stress I-joist with concentrated loads from building materials.

WARNING

I-joists are not stable until completely installed, and will not carry any load until fully braced and sheathed.

Avoid Accidents by Following these Important Guidelines:

1. Brace and nail each I-joist as it is installed, using hangers, blocking panels, rim board, and/or cross-bridging at joist ends. When I-joists are applied continuously over interior supports and a load-bearing wall is planned at that location, blocking will be required at the interior support.
2. When the building is completed, the floor sheathing will provide lateral support for the top flanges of the I-joists. Until this sheathing is applied, temporary bracing, often called struts, or temporary sheathing must be applied to prevent I-joist rollover or buckling.
 - Temporary bracing or struts must be 1x4 inch minimum, at least 8 feet long and spaced no more than 8 feet on centre, and must be secured with a minimum of two 2-1/2" nails fastened to the top surface of each I-joist. Nail the bracing to a lateral restraint at the end of each bay. Lap ends of adjoining bracing over at least two I-joists.
 - Or, sheathing (temporary or permanent) can be nailed to the top flanges of the first 4 feet of I-joists at the end of the bay.
3. For cantilevered I-joists, brace top and bottom flanges, and brace ends with closure panels, rim board, or cross-bridging.
4. Install and fully nail permanent sheathing to each I-joist before placing loads on the floor system. Then, stack building materials over beams or walls only.
5. Never install a damaged I-joist.

Improper storage or installation, failure to follow applicable building codes, failure to follow span ratings for Nordic I-joists, failure to follow allowable hole sizes and locations, or failure to use web stiffeners when required can result in serious accidents. Follow these installation guidelines carefully.

STORAGE AND HANDLING GUIDELINES

1. Bundle wrap can be slippery when wet. Avoid walking on wrapped bundles.
2. Store, stack, and handle I-joists vertically and level only.
3. Always stack and handle I-joists in the upright position only.
4. Do not store I-joists in direct contact with the ground and/or flammable.
5. Protect I-joists from weather, and use spacers to separate bundles.
6. Bundled units should be kept intact until time of installation.
 - Pick I-joists in bundles as shipped by the supplier.
 - Orient the bundles so that the webs of the I-joists are vertical.
 - Pick the bundles at the 5th points, using a spreader bar if necessary.
8. Do not handle I-joists in a horizontal orientation.
9. NEVER USE OR TRY TO REPAIR A DAMAGED I-JOIST.




INSTALLING NORDIC I-JOISTS


1. Before laying out floor system components, verify that I-joist flange widths match hanger widths. If not, contact your supplier.
2. Except for cutting to length, I-joist flanges should never be cut, drilled, or notched.
3. Install I-joists so that top and bottom flanges are within 1/2 inch of true vertical alignment.
4. I-joists must be anchored securely to supports before floor sheathing is attached, and supports for multiple-span joists must be level.
5. Minimum bearing lengths: 1-3/4 inches for end bearings and 3-1/2 inches for intermediate bearings.
6. When using hangers, seat I-joists firmly in hanger bottoms to minimize settlement.
7. Leave a 1/16-inch gap between the I-joist end and a header.
8. Concentrated loads greater than those that can normally be expected in residential construction should only be applied to the top surface of the top flange. Normal concentrated loads include track lighting fixtures, audio equipment and security cameras. Never suspend unbraced or heavy loads from the I-joist's bottom flange. Whenever possible, suspend all concentrated loads from the top of the I-joist. Or, attach the load to blocking that has been securely fastened to the I-joist webs.
9. Never install I-joists where they will be permanently exposed to weather, or where they will remain in direct contact with concrete or masonry.
10. Restrain ends of floor joists to prevent rollover. Use rim board, rim joists or I-joist blocking panels.
11. For I-joists installed over and beneath bearing walls, use full depth blocking panels, rim board, or squash blocks (cripple members) to transfer gravity loads through the floor system to the wall or foundation below.
12. Due to shrinkage, common framing lumber set on edge may never be used as blocking or rim boards. I-joist blocking panels or other engineered wood products – such as rim board – must be cut to fit between the I-joists, and an I-joist-compatible depth selected.
13. Provide permanent lateral support of the bottom flange of all I-joists at interior supports of multiple-span joists. Similarly, support the bottom flange of all cantilevered I-joists at the end support next to the cantilever extension. In the completed structure, the gypsum wallboard ceiling provides this lateral support. Until the final finished ceiling is applied, temporary bracing or struts must be used.
14. If square-edge panels are used, edges must be supported between I-joists with 2x4 blocking. Glue panels to blocking to minimize squeaks. Blocking is not required under structural finish flooring, such as wood strip flooring, or if a separate underlayment layer is installed.
15. Nail spacing: Space nails installed to the flange's top face in accordance with the applicable building code requirements or approved building plans.

FIGURE 1
TYPICAL NORDIC I-JOIST FLOOR FRAMING AND CONSTRUCTION DETAILS

Some framing requirements such as erection bracing and blocking panels have been omitted for clarity.

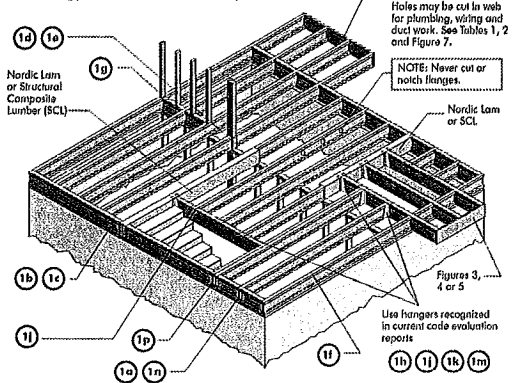


All nails shown in the above details are assumed to be common wire nails unless otherwise noted. 3" (0.125" dia.) common spiral nails may be substituted for 2-1/2" (0.120" dia.) common wire nails. Framing lumber assumed to be Spruce-Pine-Fir No. 2 or better. Individual components not shown to scale for clarity.

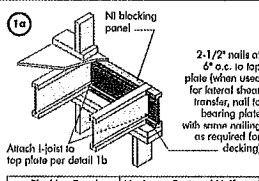


Blocking Panel or Rim Joist	Maximum Factored Uniform Vertical Load* (plf)
Ni Joists	3,300

*The uniform vertical load is limited to a joist depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

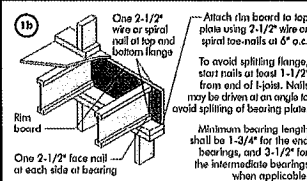


Blocking Panel or Rim Joist	Maximum Factored Uniform Vertical Load* (plf)
1-1/8" Rim Board Plus	8,090

*The uniform vertical load is limited to a rim board depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.



Blocking Panel or Rim Joist	Maximum Factored Uniform Vertical Load* (plf)
Ni Joists	3,300

*The uniform vertical load is limited to a joist depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

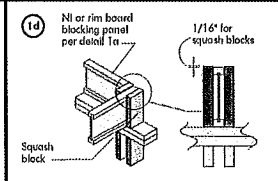

Pair of Squash Blocks	Maximum Factored Uniform Vertical Load* (plf)
2x Lumber	5,500
1-1/8" Rim Board Plus	4,300

*The uniform vertical load is limited to a joist depth of 16 inches or less and is based on standard term load duration. It shall not be used in the design of a bending member, such as joist, header, or rafter. For concentrated vertical load transfer, see detail 1d.

The construction details for residential designs are prone to changes.

Details released after April 2014 supersedes N-C301

Installation must comply with latest documentation on I-Joist and other Nordic products from the <http://nordic.ca/>

This document does not constitute a record of the structural integrity of the building nor suitability of the design assumptions made. Nordic Structures is responsible only for the structural adequacy of its component based on the design criteria and loadings shown on the calculation sheets.

MAXIMUM FLOOR SPANS

- Maximum clear spans applicable to single-span or multiple-span residential floor construction with a design live load of 40 psf and dead load of 15 psf. The ultimate limit states are based on the factored loads of 1.35L + 1.25D. The serviceability limit states include the consideration for floor vibration and a live load deflection limit of L/480. For multiple-span applications, the end spans shall be 40% or more of the adjacent span.
- Spans are based on a composite floor with glued-nailed oriented strand board (OSB) sheathing with a minimum thickness of 5/8 inch for a joist spacing of 19.2 inches or less, or 3/4 inch for joist spacing of 24 inches. Adhesive shall meet the requirements given in C085-71.26 Standard. No concrete topping or bridging element was assumed. Increased spans may be achieved with the use of gypsum and/or a row of blocking at mid-span.
- Minimum bearing length shall be 1-3/4 inches for the end bearings, and 3-1/2 inches for the intermediate bearings.
- Bearing stiffeners are not required when I-joists are used with the spans and spacings given in this table, except as required for hangers.
- This span chart is based on uniform loads. For applications with other than uniform loads, an engineering analysis may be required based on the use of the design properties.
- Tables are based on Unit States Design per CAN/CSA C085-07 Standard, and NBC 2010.
- SI units conversion: 1 inch = 25.4 mm
1 foot = 0.305 m

MAXIMUM FLOOR SPANS FOR NORDIC I-JOISTS


SINGLE AND MULTIPLE SPANS

Joist Depth	Joist Series	Simple spans				Multiple spans			
		On centre spacing				On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	Ni-20	15'-1"	14'-2"	13'-3"	12'-5"	16'-3"	15'-4"	14'-5"	13'-7"
	Ni-40x	16'-1"	15'-2"	14'-3"	13'-5"	17'-3"	16'-4"	15'-5"	14'-7"
	Ni-60	16'-3"	15'-4"	14'-5"	13'-7"	17'-5"	16'-6"	15'-7"	14'-9"
	Ni-80	17'-1"	16'-2"	15'-3"	14'-5"	18'-1"	17'-2"	16'-3"	15'-5"
11-7/8"	Ni-20	16'-11"	15'-0"	14'-1"	13'-3"	17'-3"	16'-4"	15'-5"	14'-7"
	Ni-40x	18'-1"	17'-0"	16'-1"	15'-3"	19'-3"	18'-4"	17'-5"	16'-7"
	Ni-60	18'-4"	17'-3"	16'-4"	15'-6"	20'-3"	19'-4"	18'-5"	17'-7"
	Ni-80	19'-6"	18'-0"	17'-4"	16'-6"	21'-6"	20'-7"	19'-8"	18'-10"
14"	Ni-20	19'-9"	18'-3"	17'-4"	16'-6"	21'-9"	20'-10"	19'-11"	19'-3"
	Ni-40x	20'-2"	18'-7"	17'-10"	17'-11"	22'-3"	20'-11"	19'-12"	19'-4"
	Ni-60	20'-4"	18'-9"	17'-11"	18'-0"	22'-5"	20'-12"	19'-10"	19'-5"
	Ni-80	21'-1"	19'-1"	18'-1"	18'-2"	22'-7"	20'-11"	19'-10"	19'-5"
16"	Ni-20	21'-7"	20'-0"	19'-1"	18'-2"	23'-10"	22'-1"	21'-1"	21'-10"
	Ni-40x	21'-11"	20'-3"	19'-4"	18'-5"	24'-3"	22'-5"	21'-5"	22'-2"
	Ni-60	22'-3"	20'-8"	19'-9"	19'-9"	24'-9"	22'-10"	21'-10"	22'-7"
	Ni-80	22'-7"	20'-11"	19'-11"	20'-0"	25'-0"	23'-1"	22'-0"	22'-9"

CCMC EVALUATION REPORT 13032-R

I-JOIST HANGERS

- Hangers shown illustrate the three most commonly used metal hangers to support I-joists.
- All nailing must meet the hanger manufacturer's recommendations.
- Hangers should be selected based on the joist depth, flange width and load capacity based on the maximum spans.
- Web stiffeners are required when the sides of the hangers do not laterally brace the top flange of the I-joist.




WEB STIFFENERS

RECOMMENDATIONS:

- A bearing stiffener is required in all engineered applications with factored reactions greater than shown in the I-joist properties table found in the I-joist Construction Guide (C101). The gap between the stiffener and the flange is at the top.
- A bearing stiffener is required when the I-joist is supported in a hanger and the sides of the hanger do not extend up to, and support, the top flange. The gap between the stiffener and flange is at the top.
- A load stiffener is required at locations where a factored concentrated load greater than 2,370 lbs is applied to the top flange between supports, or in the case of a cantilever, anywhere between the cantilever tip and the support. These values are for standard term load duration, and may be adjusted for other load durations as permitted by the code. The gap between the stiffener and the flange is at the bottom.

SI units conversion: 1 inch = 25.4 mm


FIGURE 2
WEB STIFFENER INSTALLATION DETAILS

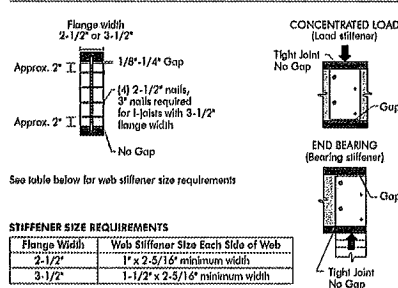

STIFFENER SIZE REQUIREMENTS

Flange Width	Web Stiffener Size Each Side of Web
2-1/2"	1" x 2-5/16" minimum width
3-1/2"	1-1/2" x 2-5/16" minimum width

NORDIC I-JOIST SERIES

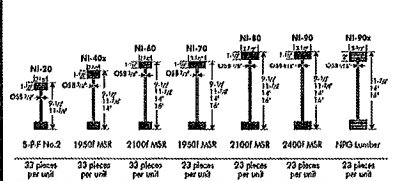

Chantiers Chibougon Ltd. harvests its own trees, which enables Nordic products to adhere to strict quality control procedures throughout the manufacturing process. Every phase of the operation, from forest to the finished product, reflects our commitment to quality.

Nordic Engineered Wood I-Joists use only finger-jointed black spruce lumber in their flanges, ensuring consistent quality, superior strength, and longer span carrying capacity.

(Nordic Request 1810-095)



1a Transfer load from above to bearing below. Install squish blocks per detail 1d. Match bearing area of blocks below to peak above.

1b Use single I-joist for loads up to 3,300 plf, double I-joists for loads up to 6,600 plf (filler block not required). Attach I-joist to top plate using 2-1/2" nails at 6" o.c.

1c Load bearing wall above shall align vertically with the bearing below. Other conditions, such as offset bearing walls, are not covered by this detail.

1d Backer block (use if longer load exceeds 360 lbs) Before installing a backer block to a double I-joist, drive three additional 3" nails through the webs and filler block where the backer block will fit. Clinch. Install backer right to top flange. Use twelve 3" nails, clinched when possible. Maximum factored resistance for hanger for this detail = 1,620 lbs.

1e Double I-joist header

1f Top- or face-mount hanger

1g Filler block per detail 1p

1h Backer block required (both sides for face-mount hangers)

1i For hanger capacity see hanger manufacturer's recommendations. Verify double I-joist capacity to support concentrated loads.

1j Backer blocks (Blocks must be long enough to permit required nailing without spilling)

Flange Width	Material Thickness Required*	Minimum Depth**
2-1/2"	1"	5-1/2"
3-1/2"	1-1/2"	7-1/4"

* Minimum grade for backer block material shall be S-P-F No. 2 or better for solid sawn lumber and wood structural panels conforming to CAN/CSA-C0325 or CAN/CSA-C0437 Standard.

** For face-mount hangers use nail joist depth minus 3-1/4" for joists with 1-1/2" thick flanges. For 2" thick flanges use nail depth minus 4-1/4".

1k Nordic Lumber or SCL

1l Top- or face-mount hanger installed per manufacturer's recommendations

1m Top-mount hanger installed per manufacturer's recommendations

1n Multiple I-joist header with full depth filler block shown. Nordic Lumber or SCL headers may also be used. Vary double I-joist capacity to support concentrated loads.

1o Do not bowl-cut joist beyond inside face of wall

1p Filler block

1q Filler block requirements for double I-joist construction

Flange Size	Joist Depth	Filler Block Size
9-1/2"	2-1/8" x 6"	3" x 6"
11-7/8"	2-1/8" x 8"	3" x 8"
14"	2-1/8" x 10"	3" x 10"
16"	2-1/8" x 12"	3" x 12"
9-1/2"	3" x 6"	3" x 6"
11-7/8"	3" x 8"	3" x 8"
14"	3" x 10"	3" x 10"
16"	3" x 12"	3" x 12"
11-7/8"	3" x 7"	3" x 7"
14"	3" x 9"	3" x 9"
16"	3" x 11"	3" x 11"

1r Lumber 2x4 min., extend block to face of adjacent web. Two 2-1/2" spigot nails from each web to lumber piece, alternate on opposite side.

1s One 2-1/2" nails at top and bottom flange. Two 2-1/2" nails from each web to lumber piece. 2x4 min. (1/8" gap minimum). Two 2-1/2" nails from each web to lumber piece. One 2-1/2" nails one side only. 2-1/2" nails at 6" o.c.

1t Notes: In some local codes, blocking is prescriptively required in the first joist space (or first and second joist space) next to the starter joist. Where required, see local code requirements for spacing of the blocking. All nails are common spiral in this detail.

The construction details for residential designs are prone to changes.

Details released after April 2014 supersedes N-C301


Installation must comply with latest documentation on I-Joist and other Nordic products from the <http://nordic.ca/>

This document does not constitute a record of the structural integrity of the building nor suitability of the design assumptions made. Nordic Structures is responsible only for the structural adequacy of its component based on the design criteria and loadings shown on the calculation sheets.


(Nordic Request 1810-095)



CANTILEVER DETAILS FOR BALCONIES (NO WALL LOAD)

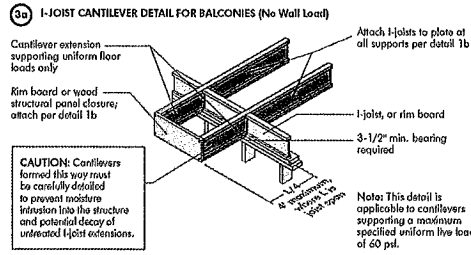

3b LUMBER CANTILEVER DETAIL FOR BALCONIES (No Wall Load)

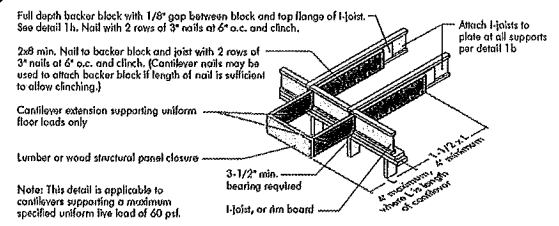

CANTILEVER DETAILS FOR VERTICAL BUILDING OFFSET (CONCENTRATED WALL LOAD)



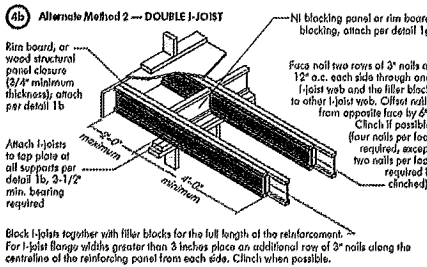


FIGURE 4 (continued)

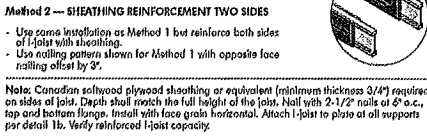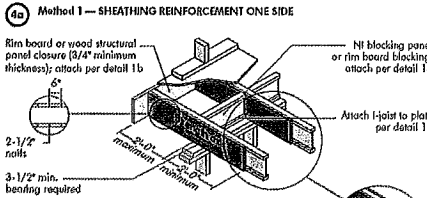

CANTILEVER REINFORCEMENT METHODS ALLOWED

Joint Depth (in.)	Roof Truss Span (ft)	ROOF LOADING (UNFACTORED)							
		LL = 30 psf, DL = 15 psf				LL = 40 psf, DL = 15 psf			
		Joint Spacing (in.)				Joint Spacing (in.)			
		12	16	19.2	24	12	16	19.2	24
9-1/2	26	N	N	1	2	N	1	2	X
	28	N	N	1	X	N	1	2	X
	30	N	1	1	X	N	1	2	X
	32	N	1	2	X	N	2	X	X
	34	N	1	2	X	N	2	X	X
11-7/8	26	N	1	2	X	N	1	2	X
	28	N	1	2	X	N	1	2	X
	30	N	1	2	X	N	1	2	X
	32	N	1	2	X	N	1	2	X
	34	N	1	2	X	N	1	2	X
14	26	N	1	2	X	N	1	2	X
	28	N	1	2	X	N	1	2	X
	30	N	1	2	X	N	1	2	X
	32	N	1	2	X	N	1	2	X
	34	N	1	2	X	N	1	2	X
16	26	N	1	2	X	N	1	2	X
	28	N	1	2	X	N	1	2	X
	30	N	1	2	X	N	1	2	X
	32	N	1	2	X	N	1	2	X
	34	N	1	2	X	N	1	2	X

- N = No reinforcement required.
 - 1 = NI reinforced with 3/4" wood structural panel on one side only.
 - 2 = NI reinforced with 3/4" wood structural panel on both sides, or double I-joist.
 - X = Try a deeper joist or closer spacing.
2. Maximum design load shall be 15 psf roof dead load, 55 psf floor total load, and 80 psf wall load. Wall load is based on 3'-0" maximum width window or door openings.
- For larger openings, or multiple 3'-0" wide openings spaced less than 6'-0" o.c., additional joints beneath the opening's cripple studs may be required.
3. Table applies to joists 12" to 24" o.c. that meet the floor span requirements for a design live load of 40 psf and dead load of 15 psf, and a live load deflection limit of L/480. Use 12" o.c. requirements for lesser spacing.
4. For conventional roof construction using a ridge beam, the Roof Truss Span column above is equivalent to the distance between the supporting wall and the ridge beam. When the roof is framed using a ridge beam, the Roof Truss Span is equivalent to the distance between the supporting walls as if a truss is used.
5. Cantilevered joints supporting glider trusses or roof beams may require additional reinforcing.

BRICK CANTILEVER DETAILS FOR VERTICAL BUILDING OFFSET (CONCENTRATED WALL LOAD)




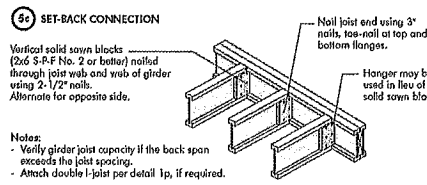


FIGURE 5 (continued)

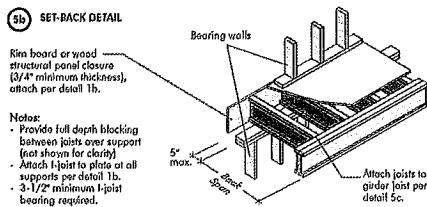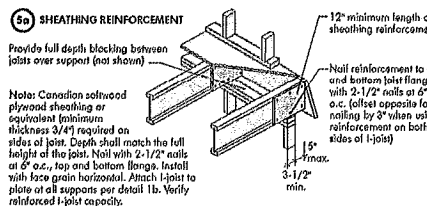

BRICK CANTILEVER REINFORCEMENT METHODS ALLOWED

Joint Depth (in.)	Roof Truss Span (ft)	ROOF LOADING (UNFACTORED)							
		LL = 30 psf, DL = 15 psf				LL = 40 psf, DL = 15 psf			
		Joint Spacing (in.)				Joint Spacing (in.)			
		12	16	19.2	24	12	16	19.2	24
9-1/2	26	1	X	X	X	2	X	X	X
	28	1	X	X	X	2	X	X	X
	30	1	X	X	X	2	X	X	X
	32	2	X	X	X	2	X	X	X
	34	2	X	X	X	2	X	X	X
11-7/8	26	1	X	X	X	2	X	X	X
	28	1	X	X	X	2	X	X	X
	30	1	X	X	X	2	X	X	X
	32	1	X	X	X	2	X	X	X
	34	1	X	X	X	2	X	X	X
14	26	1	X	X	X	2	X	X	X
	28	1	X	X	X	2	X	X	X
	30	1	X	X	X	2	X	X	X
	32	1	X	X	X	2	X	X	X
	34	1	X	X	X	2	X	X	X
16	26	1	X	X	X	2	X	X	X
	28	1	X	X	X	2	X	X	X
	30	1	X	X	X	2	X	X	X
	32	1	X	X	X	2	X	X	X
	34	1	X	X	X	2	X	X	X

- N = No reinforcement required.
 - 1 = NI reinforced with 3/4" wood structural panel on one side only.
 - 2 = NI reinforced with 3/4" wood structural panel on both sides, or double I-joist.
 - X = Try a deeper joist or closer spacing.
2. Maximum design load shall be 15 psf roof dead load, 55 psf floor total load, and 80 psf wall load. Wall load is based on 3'-0" maximum width window or door openings.
- For larger openings, or multiple 3'-0" wide openings spaced less than 6'-0" o.c., additional joints beneath the opening's cripple studs may be required.
3. Table applies to joists 12" to 24" o.c. that meet the floor span requirements for a design live load of 40 psf and dead load of 15 psf, and a live load deflection limit of L/480. Use 12" o.c. requirements for lesser spacing.
4. For conventional roof construction using a ridge beam, the Roof Truss Span column above is equivalent to the distance between the supporting wall and the ridge beam. When the roof is framed using a ridge beam, the Roof Truss Span is equivalent to the distance between the supporting walls as if a truss is used.
5. Cantilevered joints supporting glider trusses or roof beams may require additional reinforcing.

The construction details for residential designs are prone to changes.

Details released after April 2014 supersedes N-C301

Installation must comply with latest documentation on I-Joist and other Nordic products from the <http://nordic.ca/>

This document does not constitute a record of the structural integrity of the building nor suitability of the design assumptions made. Nordic Structures is responsible only for the structural adequacy of its component based on the design criteria and loadings shown on the calculation sheets.

WEB HOLES

RULES FOR CUTTING HOLES AND DUCT CHASE OPENINGS:

- The distance between the inside edge of the support and the centreline of any hole or duct chase opening shall be in compliance with the requirements of Table 1 or 2, respectively.
- I-Joist top and bottom flanges must NEVER be cut, notched, or otherwise modified.
- Whenever possible, field-cut holes should be centred on the middle of the web.
- The maximum size hole or the maximum depth of a duct chase opening that can be cut into an I-Joist web shall equal the clear distance between the flanges of the I-Joist minus 1/4 inch. A minimum of 1/8 inch shall always be maintained between the top or bottom of the hole or opening and the adjacent I-Joist flange.
- The sides of square holes or longest sides of rectangular holes should not exceed 3/4 of the diameter of the maximum round hole permitted at that location.
- Where more than one hole is necessary, the distance between adjacent hole edges shall exceed twice the diameter of the largest round hole or twice the size of the largest square hole (or twice the length of the largest side of the largest rectangular hole or duct chase opening) and each hole and duct chase opening shall be sized and located in compliance with the requirements of Tables 1 and 2, respectively.
- A knockout is NOT considered a hole, may be utilized anywhere it occurs, and may be ignored for purposes of calculating minimum distances between holes and/or duct chase openings.
- Holes measuring 1-1/2 inches or smaller shall be permitted anywhere in a confined section of a joist. Holes of greater size may be permitted subject to verification.
- A 1-1/2 inch hole or smaller can be placed anywhere in the web provided that it meets the requirements of rule number 6 above.
- All holes and duct chase openings shall be cut in a workman-like manner in accordance with the restrictions listed above and as illustrated in Figure 7.
- Limit three maximum size holes per span, of which one may be a duct chase opening.
- A group of round holes at approximately the same location shall be permitted if they meet the requirements for a single round hole circumscribed around them.

TABLE 1
LOCATION OF CIRCULAR HOLES IN JOIST WEBS
Simple or Multiple Span for Dead Loads up to 15 psf and Live Loads up to 40 psf

Joist Depth	Joist Series	Minimum distance from inside face of any support to centre of hole (8 in.)												Span adjustment factor
		2	3	4	5	6	7	8	9	10	11	12	13	
9-1/2"	N100	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N140	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N170	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N200	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
11-7/8"	N100	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N140	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N170	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N200	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
14"	N100	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N140	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N170	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N200	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
16"	N100	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N140	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N170	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N200	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0

1. Above table may be used for I-Joist spacing of 24 inches on centre or less.
2. Hole location distance is measured from inside face of support to centre of hole.
3. Distances in this chart are based on uniformly loaded joists.

OPTIONAL:


The above table is based on the I-Joist used at their maximum span. If the I-Joists are placed at less than their full maximum span (see Maximum Floor Span), the minimum distance from the centreline of the hole to the face of any support (D) as given above may be reduced as follows:

$$\text{Reduced } D = \frac{\text{Actual Span}}{\text{Maximum Span}} \times D$$

Where:

- Reduced = Distance from the inside face of any support to centre of hole, reduced for less than maximum span applications (D).
- Actual = The actual measured span distance between the inside faces of supports (S).
- Maximum = The maximum span distance between the inside faces of supports (S).
- Span Adjustment Factor given in this table.
- If Actual is greater than 1, use 1 in the above calculation for Actual.

FIGURE 7
FIELD-CUT HOLE LOCATOR

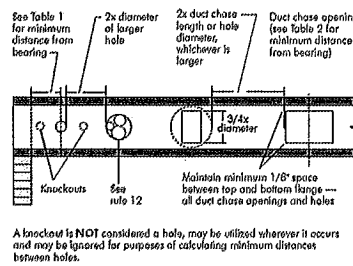

Knockouts are predrilled holes provided for the contractor's convenience to install electrical or small plumbing lines. They are 1-1/2 inches in diameter, and are spaced 15 inches on centre along the length of the I-Joist. Where possible, it is preferable to use knockouts instead of field-cut holes.

Never drill, cut or notch the flange, or over-cut the web.

Holes in webs should be cut with a sharp saw.

TABLE 2
DUCT CHASE OPENING SIZES AND LOCATIONS — Simple Span Only

Joist Depth	Joist Series	Minimum distance from inside face of any support to centre of opening (8 in.)												Span adjustment factor
		2	3	4	5	6	7	8	9	10	11	12	13	
9-1/2"	N100	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N140	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N170	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N200	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
11-7/8"	N100	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N140	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N170	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N200	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
14"	N100	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N140	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N170	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N200	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
16"	N100	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N140	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N170	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0
	N200	0.7	1.2	1.7	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.7	6.2	1.0

1. Above table may be used for I-Joist spacing of 24 inches on centre or less.
2. Duct chase opening location distance is measured from inside face of support to centre of opening.
3. The above table is based on simple span joists only. For other applications, contact your local distributor.
4. Distances are based on uniform loaded floor joists but must meet the span requirements for a design live load of 40 psf and dead load of 15 psf, and a live load deflection limit of L/400. For other applications, contact your local distributor.

INSTALLING THE GLUED FLOOR SYSTEM

- Wipe any mud, dirt, water, or ice from I-Joist flanges before gluing.
- Snap a chalk line across the I-joists four feet from the wall for panel edge alignment and as a boundary for spreading glue.
- Spread only enough glue to lay one or two panels at a time, or follow specific recommendations from the glue manufacturer.
- Lay the first panel with tongue side to the wall, and nail in place. This protects the tongue of the next panel from damage when tapped into place with a block and sledgehammer.
- Apply a continuous line of glue (about 1/4-inch diameter) to the top flange of a single I-Joist. Apply glue in a wavy pattern on wide areas, such as with double I-joists.
- Apply two lines of glue on I-joists where panel ends butt to assure proper gluing of each end.
- After the first row of panels is in place, spread glue in the groove of one or two panels at a time before laying the next row. Glue line may be continuous or spaced, but avoid squeeze-out by applying a thinner line (1/8 inch) than used on I-Joist flanges.
- Tap the second row of panels into place, using a block to protect groove edges.
- Stagger and joints in each succeeding row of panels. A 1/8-inch space between all end joints and 1/8 inch at all edges, including T&G edges, is recommended. (Use a spacer block or an 1/8" common nail to assure accurate and consistent spacing.)
- Complete all nailing of each panel before glue sets. Check the manufacturer's recommendations for cure time. (Warm weather accelerates glue setting.) Use 2" ring- or screw-shank nails for panels 3/4-inch thick or less, and 2-1/2" ring- or screw-shank nails for thicker panels. Space nails per the table below. Closer nail spacing may be required by some codes, or for diaphragm construction. The finished deck can be walked on right away and will carry construction loads without damage to the glue bond.

FASTENERS FOR SHEATHING AND SUBFLOORING⁽¹⁾

Maximum Joist Spacing (in.)	Minimum Panel Thickness (in.)	Nail Size and Type				Maximum Spacing of Fasteners	
		Common Wire or Spiral Nails	Ring Threaded Nails or Screws	Staples		Edges	Interior Supports
16	5/8	2"	1-3/4"	2"		6"	12"
20	5/8	2"	1-3/4"	2"		6"	12"
24	3/4	2"	1-3/4"	2"		6"	12"

- Fasteners of sheathing and subflooring shall conform to the above table.
- Staples shall not be less than 1/16-inch in diameter or thickness, with not less than a 3/8-inch crown driven with the crown parallel to framing.
- Flooring screws shall not be less than 1/8-inch in diameter.
- Special conditions may impose heavy traffic and concentrated loads that require construction in excess of the minimums shown.
- Use only adhesives conforming to CAN/CSB-71.26 Standard, Adhesives for Field-Gluing Plywood to Lumber Framing for Floor System, applied in accordance with the manufacturer's recommendations. If OSB panels with sealed surfaces and edges are to be used, use only solvent-based glues check with panel manufacturer.


Ref.: NBC-CNBC, National Building Code of Canada 2010, Table 9.23.3.5.

IMPORTANT NOTE:


Floor sheathing must be field glued to the I-Joist flanges in order to achieve the maximum spans shown in this document. If sheathing is nailed only, I-Joist spans must be verified with your local distributor.

RIM BOARD INSTALLATION DETAILS

(a) ATTACHMENT DETAILS WHERE RIM BOARDS ABUT

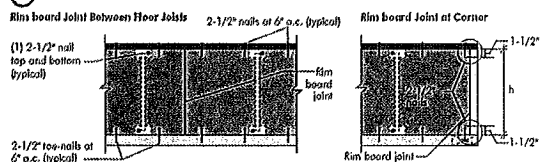

(b) TOE-NAIL CONNECTION AT RIM BOARD

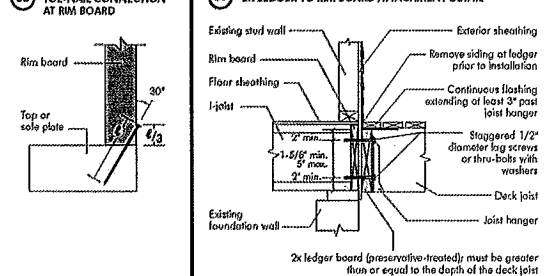


DIAMANTIER

PRODUCT WARRANTY

Chantier Diamantier warrants that, in accordance with our specifications, Nordic products are free from manufacturing defect in material and workmanship.

Furthermore, Chantier Diamantier warrants that our products, when utilized in accordance with our building and installation instructions, will meet or exceed our specifications for the lifetime of the structure.

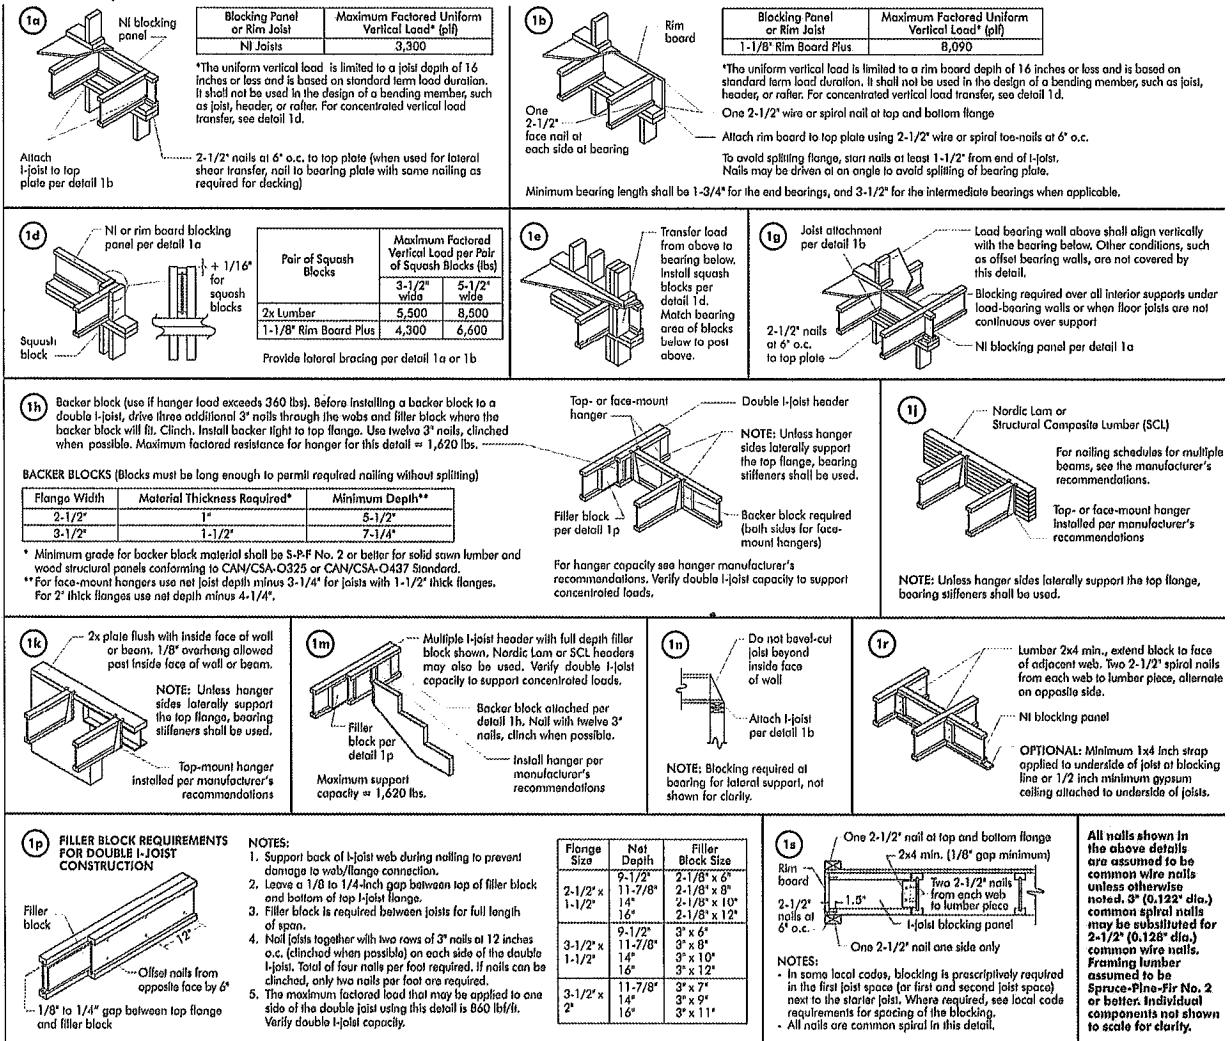


WEB STIFFENERS

RECOMMENDATIONS:

- A bearing stiffener is required in all engineered applications with factored reactions greater than shown in the I-joist properties table found in the I-joist Construction Guide (C101). The gap between the stiffener and the flange is at the top.
- A bearing stiffener is required when the I-joist is supported in a hanger and the sides of the hanger do not extend up to, and support, the top flange. The gap between the stiffener and flange is at the top.
- A load stiffener is required at locations where a factored concentrated load greater than 2,370 lbs is applied to the top flange between supports, or in the case of a cantilever, anywhere between the cantilever tip and the support. These values are for standard term load duration, and may be adjusted for other load durations as permitted by the code. The gap between the stiffener and the flange is at the bottom.


FIGURE 2

WEB STIFFENER INSTALLATION DETAILS

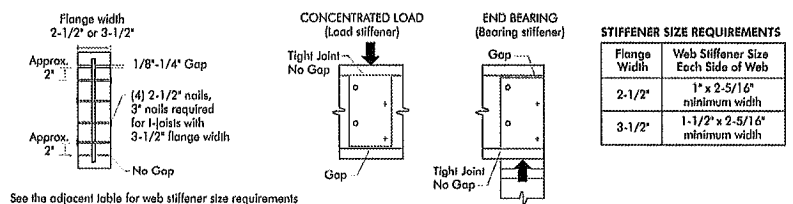


CANTILEVER DETAILS FOR VERTICAL BUILDING OFFSET

Method 1 — SHEATHING REINFORCEMENT ONE SIDE

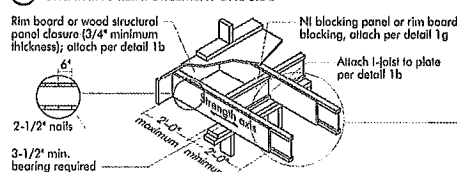

NOTE: Canadian softwood plywood sheathing or equivalent (minimum thickness 3/4") required on sides of joist. Depth shall match the full height of the joist. Nail with 2-1/2" nails at 6" o.c., top and bottom flange. Install with face grain horizontal. Attach I-joist to plate at all supports per detail 1b. Verify reinforced I-joist capacity.

Method 2 — SHEATHING REINFORCEMENT TWO SIDES



RIM BOARD INSTALLATION DETAILS

8a ATTACHMENT DETAILS WHERE RIM BOARDS ABUT

Rim Board Joint Between Floor Joists

(1) 2-1/2" nail top and bottom (typical)

2-1/2" nails at 6" o.c. (typical)

Rim board joint

2-1/2" toe-nails at 6" o.c. (typical)

Rim board joint at Corner

2-1/2" nails

1-1/2"

1-1/2"

8b TOE-NAIL CONNECTION AT RIM BOARD

Rim board

Top or sole plate

30°

t/3

The construction details for residential designs are prone to changes.

Details released after September 2013 supersedes N-303

Installation must comply with latest documentation on I-Joist and other Nordic products from the <http://nordic.ca/>

This document does not constitute a record of the structural integrity of the building nor suitability of the design assumptions made. Nordic Structures is responsible only for the structural adequacy of its component based on the design criteria and loadings shown on the calculation sheets.

