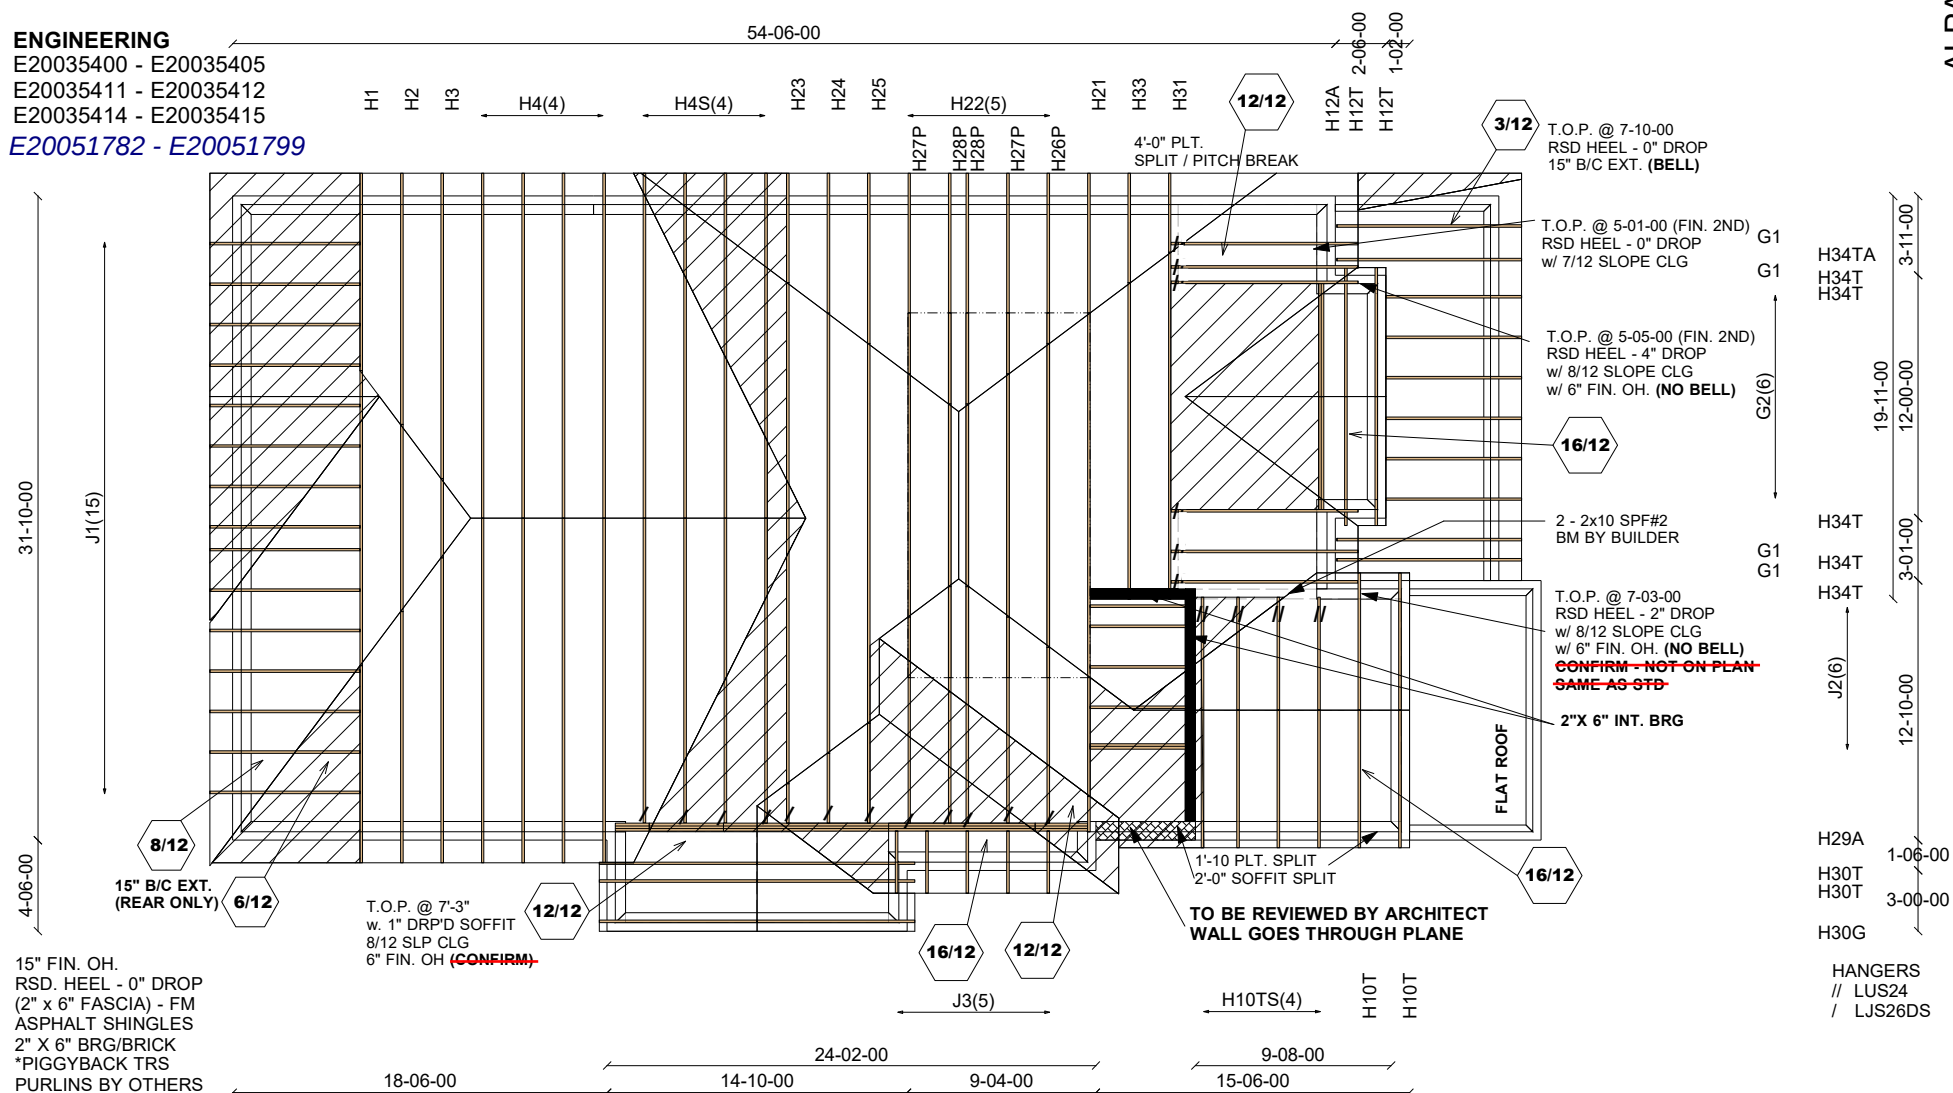


ENGINEERING

E20035400 - E20035405

E20035411 - E20035412

E20035414 - E20035415

E20051782 - E20051799

ALL CONVENTIONAL FRAMING TO CONFORM WITH PART 9 O.B.C. LATEST EDITION. ROOF RAFTERS THAT CROSS OVER TRUSSES TO BE 2X4 SPF #2 @ 24" O.C WITH A VERT. POST TO THE TRUSS UNDERNEATH AT EACH CROSS POINT. VERT. POSTS LONGER THAN 6' TO HAVE LATERAL BRACING SO THAT THE DISTANCE BETWEEN END POINTS & BETWEEN ROWS OF BRACING DOES NOT EXCEED 6'

Mitek V. 8.2.0

CONVENTIONAL
FRAMING BY
OTHERS

Job Track: **45147**Layout ID: **318932**Plan Log: **106268**

Builder / Location:

GOLD PARK HOMES / VAUGHANProject: **PINE VALLEY**

Date: 2020-04-13

Designer: AMANDA

Model / Elevation:

4003**/ A LOT 134**

THESE DRAWINGS CONSTITUTE THE PROPERTY OF ALPA ROOF TRUSSES INC., SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY ALPA ROOF TRUSSES INC AND WILL BE RETRACTED BY ALPA ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE.

EWP DESIGN INC.

(905) 832-2250

FAX (905) 832-0286

RESPONSIBILITIES AND SPECIFICATIONS

RESPONSIBILITIES

1. EWP DESIGN INC. is responsible for the design of trusses as individual components.
2. It is the responsibility of others to ascertain that the design loads utilized on each drawing meet or exceed the actual dead load imposed by the structure, the live load imposed by the intended use and the snow load imposed by local building code or authorities with jurisdictions.
3. All dimensions are to be verified by the owner, contractor, architect or other authorities with jurisdictions before truss fabrication.
4. EWP DESIGN INC. bears no responsibility for the erection of trusses. Persons erecting trusses are cautioned to seek professional advice regarding the temporary and permanent bracing for the system. Bracing shown on EWP DESIGN INC. drawing is specified for the truss as a component only and forms an integral part of the truss design.
5. It is the truss manufacturer's responsibility to ensure that trusses are manufactured in conformance with specifications of EWP DESIGN INC. as outlined below.

SPECIFICATIONS

1. Trusses designed by EWP DESIGN INC. conform to the relevant section of the Ontario Building Code of Canada (Part 9 or Part 4) or to the Canadian code for farm buildings, whichever applies to the building type, as indicated on the EWP DESIGN INC. drawings, and conform to the design procedures established by the Truss Plate Institute of Canada. Unit stresses used for truss designs are as per the edition of CSA-O86 shown on EWP DESIGN INC. drawings.
2. Lumber is to be the size, species and grade as specified on EWP DESIGN INC. drawings.
3. Moisture content of lumber shall not exceed 19% in service unless specified otherwise.
4. Metal connector plates shall be applied to both faces of truss at each joint and shall be positioned as specified.
5. Top chords of trusses are assumed to be continuously braced laterally by roof sheathing or by purlins at intervals not exceeding 12.5 times the thickness of top chord member.
6. Bottom chords shall be laterally braced at intervals not exceeding 3M (10') o.c., where rigid ceiling is not applied directly to the underside of chords.


THESE DRAWINGS CONSTITUTE THE PROPERTY OF EWP DESIGN INC., SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY THE ALPA LUMBER GROUP, AND WILL BE RETRACTED BY EWP DESIGN INC. IF UTILIZED FOR ANY OTHER PURPOSE.

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318485	G1		1	TRUSS DESC. JT 45147	E20035400

Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Wed Mar 25 09:05:31 2020 Page 1

ID:??oTPPHJwqVXP?L7M2YoomnyCODA-I95rD3eiVeUBi8HPNhX3o W66tGkUCzJyypDvzXSPY

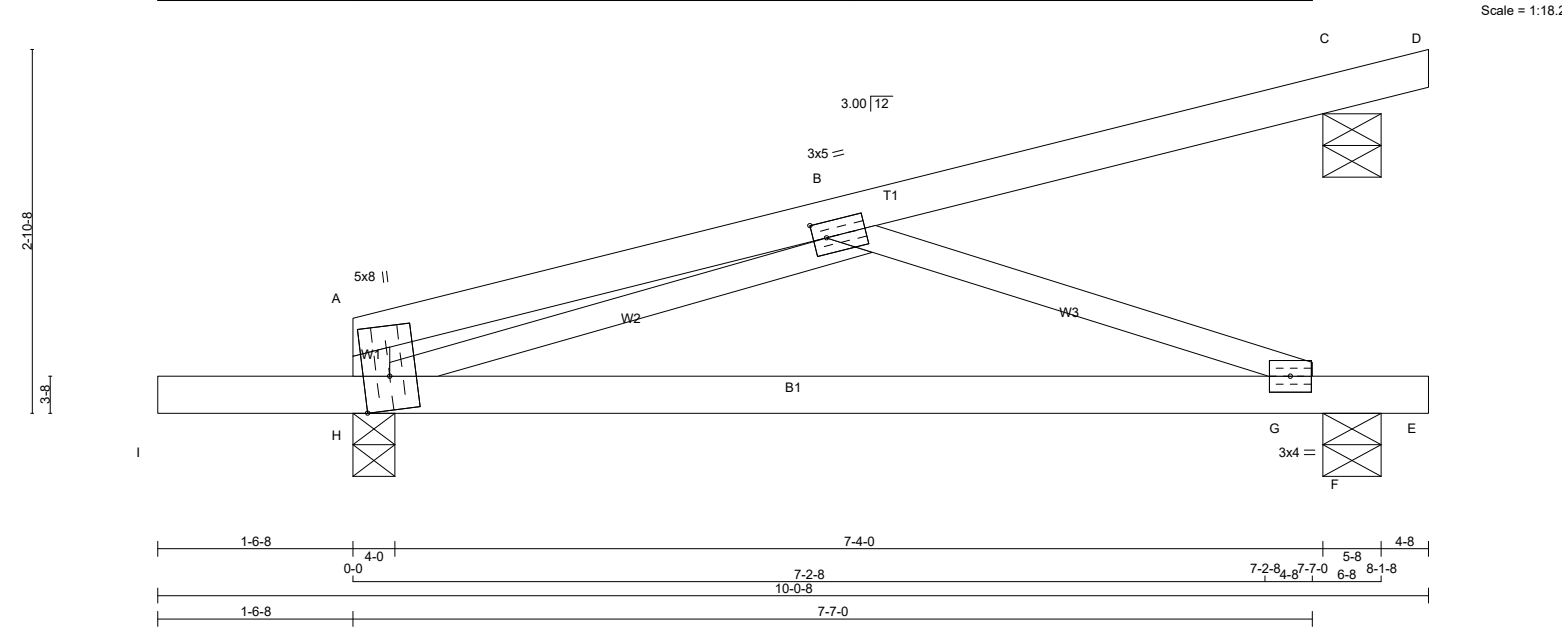

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. A - D 2x4 DRY No.2 SPF H - A 2x4 DRY No.2 SPF I - E 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF DRY: SEASONED LUMBER.					DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS <table><tr><th></th><th colspan="2">FACTORED GROSS REACTION</th><th colspan="2">MAXIMUM FACTORED GROSS REACTION</th><th>INPUT BRG</th><th>REQRD BRG</th></tr><tr><th>JT</th><th>VERT</th><th>HORZ</th><th>DOWN</th><th>HORZ</th><th>UPLIFT</th><th>IN-SX</th><th>IN-SX</th></tr><tr><td>H</td><td>529</td><td>0</td><td>529</td><td>0</td><td>0</td><td>4-0</td><td>1-8</td></tr><tr><td>F</td><td>263</td><td>0</td><td>263</td><td>0</td><td>0</td><td>5-8</td><td>1-8</td></tr><tr><td>C</td><td>179</td><td>0</td><td>179</td><td>0</td><td>0</td><td>5-8</td><td>5-8</td></tr></table>								FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG	JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	H	529	0	529	0	0	4-0	1-8	F	263	0	263	0	0	5-8	1-8	C	179	0	179	0	0	5-8	5-8	DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF		
	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG																																															
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX																																														
H	529	0	529	0	0	4-0	1-8																																														
F	263	0	263	0	0	5-8	1-8																																														
C	179	0	179	0	0	5-8	5-8																																														

PLATES (table is in inches)


JT	TYPE	PLATES	W	LEN	Y	X
A						
A	TMBMVW1**n	MT20	5.0	8.0	Edge	
B	TMWW-t	MT20	3.0	5.0	1.50	1.25
G	BMW-t	MT20	3.0	4.0		
H						

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



Scale = 1:14.0




DRY: SEASONED LUMBER.

A	TMBMV1+p	MT20	3.0	6.0
---	----------	------	-----	-----

JSI GRIP= 0.13 (A) (INPUT = 0.90)
JSI METAL= 0.04 (A) (INPUT = 1.00)


JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318485	H1		1	TRUSS DESC. JT 45147	E20035402

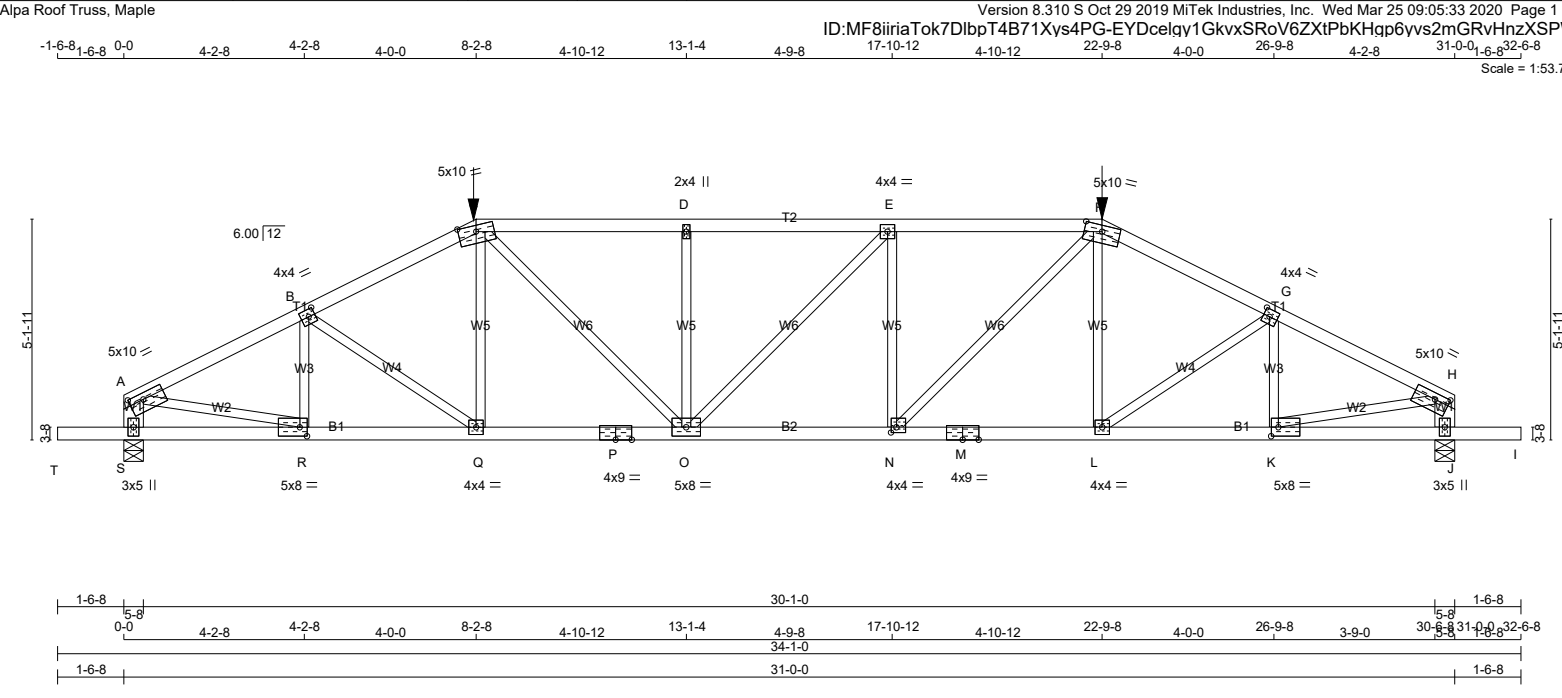

TOTAL WEIGHT = 128 LB									
[M]									
LUMBER									
N. L. G. A. RULES									
CHORDS SIZE									
LUMBER									
DESCR.									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									
SPF									

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



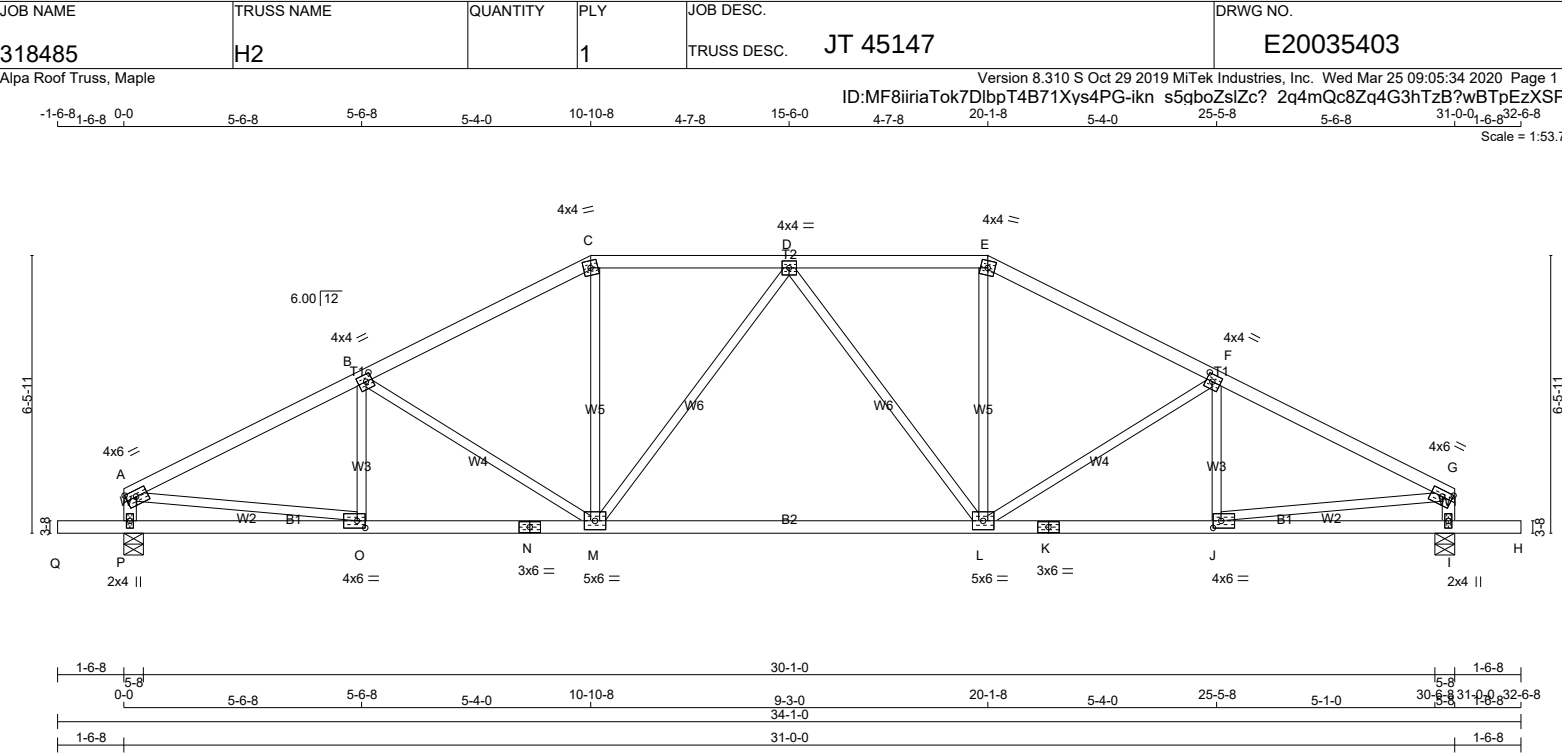

LUMBER				
N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF
C - E	2x4	DRY	No.2	SPF
E - G	2x4	DRY	No.2	SPF
P - A	2x4	DRY	No.2	SPF
I - G	2x4	DRY	No.2	SPF
Q - N	2x4	DRY	No.2	SPF
N - K	2x4	DRY	No.2	SPF
K - H	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN
A	TMVW-t	MT20	4.0	6.0
B	TMVW-t	MT20	4.0	4.0
C	TTW-m	MT20	4.0	4.0
D	TMVW-t	MT20	4.0	4.0
E	TTW-m	MT20	4.0	4.0
F	TMVW-t	MT20	4.0	4.0
G	TMVW-t	MT20	4.0	6.0
H	BMV1+p	MT20	2.0	4.0
I	BMVW-t	MT20	4.0	6.0
J	BMVW-t	MT20	4.0	6.0
K	BS-t	MT20	3.0	6.0
L	BMVW-t	MT20	5.0	6.0
M	BMVW-t	MT20	5.0	6.0
N	BS-t	MT20	3.0	6.0
O	BMVW-t	MT20	4.0	6.0
P	BMV1+p	MT20	2.0	4.0

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
P	1644	0	1644	0	0
I	1644	0	1644	0	0

UNFACTORED REACTIONS		1ST LCASE	MAX./MIN. COMPONENT REACTIONS	DEAD	SOIL
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND
P	1172	715 / 0	0 / 0	0 / 0	457 / 0
I	1172	715 / 0	0 / 0	0 / 0	457 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) P, I
 TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.23 FT.
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.
 ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING		TOTAL LOAD CASES: (4)	
CHORDS		MEMB.	
FR-TO	MEMB.	FR-TO	MEMB.
A-B	-2244 / 0	-78.0 -78.0 0.37 (1)	4.23
B-C	-1949 / 0	-78.0 -78.0 0.34 (1)	4.51
C-D	-1731 / 0	-78.0 -78.0 0.24 (1)	4.83
D-E	-1731 / 0	-78.0 -78.0 0.24 (1)	4.83
E-F	-1949 / 0	-78.0 -78.0 0.34 (1)	4.51
F-G	-2244 / 0	-78.0 -78.0 0.37 (1)	4.23
P-A	-1447 / 0	0.0 0.0 0.15 (1)	6.79
I-G	-1447 / 0	0.0 0.0 0.15 (1)	6.79
Q-P	0 / 0	-96.5 -96.5 0.16 (1)	10.00
P-O	0 / 0	-18.5 -18.5 0.13 (4)	10.00
O-N	0 / 2026	-18.5 -18.5 0.46 (1)	10.00
N-M	0 / 2026	-18.5 -18.5 0.46 (1)	10.00
M-L	0 / 1892	-18.5 -18.5 0.44 (1)	10.00
L-K	0 / 2026	-18.5 -18.5 0.46 (1)	10.00
K-J	0 / 2026	-18.5 -18.5 0.46 (1)	10.00
J-I	0 / 0	-18.5 -18.5 0.13 (4)	10.00
I-H	0 / 0	-96.5 -96.5 0.16 (1)	10.00

DESIGN CRITERIA

SPECIFIED LOADS:			
TOP CH.	LL	=	21.0 PSF
	DL	=	6.0 PSF
BOT CH.	LL	=	0.0 PSF
	DL	=	7.4 PSF
TOTAL LOAD = 34.4 PSF			

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
 - PART 9 OF BCBC 2018, ABC 2019
 - PART 9 OF OBC 2012 (2019 AMENDMENT)
 - CSA 086-14
 - TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.03")
 CALCULATED VERT. DEFL.(LL) = L/999 (0.09")
 ALLOWABLE DEFL.(TL)= L/360 (1.03")
 CALCULATED VERT. DEFL.(TL) = L/999 (0.28")

CANTILEVER DEFLECTION:
 ALLOWABLE DEFL.(LL)= L/120 (0.19")
 CALCULATED VERT. DEFL.(LL) = L/999 (0.01")
 ALLOWABLE DEFL.(TL)= L/120 (0.19")
 CALCULATED VERT. DEFL.(TL) = L/999 (0.01")

CSI: TC=0.37/1.00 (F-G:1), BC=0.46/1.00 (M-O:1), WB=0.46/1.00 (A-O:1), SSI=0.18/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LBS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES			
PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
650 371	1747 788	1987 1873	

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (J) (INPUT = 0.90)
 JSI METAL= 0.63 (N) (INPUT = 1.00)

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Wed Mar 25 09:05:36 2020 Page 1

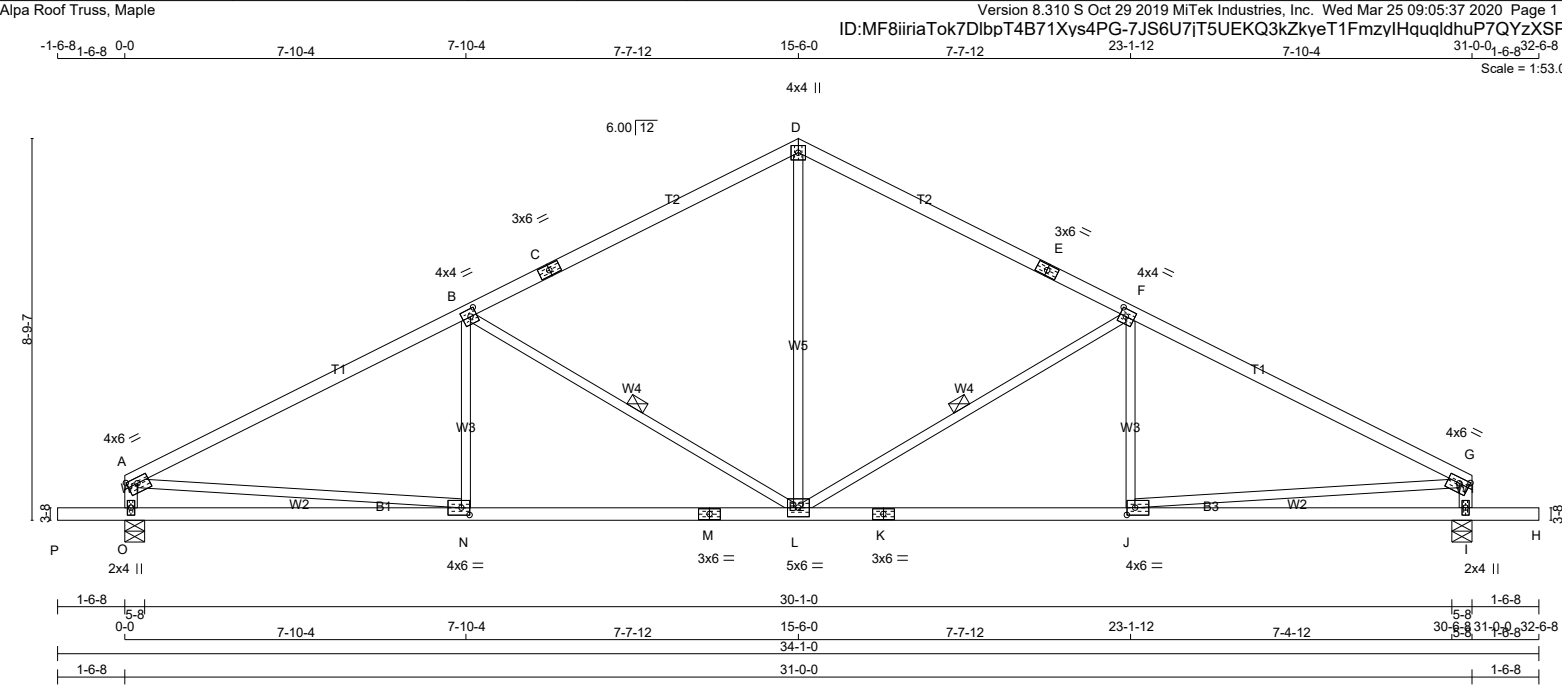


PLATE ROTATION TOL. = 5.0 Deg

JSI GRIP= 0.87 (N) (INPUT = 0.90)

JSI METAL= 0.70 (M) (INPUT = 1.0)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318485	H4		1	TRUSS DESC. JT 45147	E20035405



LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - C	2x4	DRY	No.2
C - D	2x4	DRY	No.2
D - E	2x4	DRY	No.2
E - G	2x4	DRY	No.2
O - A	2x4	DRY	No.2
I - G	2x4	DRY	No.2
P - M	2x4	DRY	No.2
M - K	2x4	DRY	No.2
K - H	2x4	DRY	No.2
ALL WEBS EXCEPT	2x3	DRY	No.2
SPF			
DRY: SEASONED LUMBER.			

PLATES (table is in inches)			
JT	TYPE	PLATES	W LEN Y X
A	TMVW-t	MT20	4.0 6.0 1.50 2.75
B	TMWW-t	MT20	4.0 4.0 2.00 1.75
C	TS-t	MT20	3.0 6.0
D	TTW+p	MT20	4.0 4.0
E	TS-t	MT20	3.0 6.0
F	TMVW-t	MT20	4.0 4.0 2.00 1.75
G	TMVW-t	MT20	4.0 6.0 1.50 2.75
I	BMV1+p	MT20	2.0 4.0
J	BMWW-t	MT20	4.0 6.0 2.00 2.25
K	BS-t	MT20	3.0 6.0
L	BMWWW-t	MT20	5.0 6.0
M	BS-t	MT20	3.0 6.0
N	BMWW-t	MT20	4.0 6.0 2.00 2.25
O	BMV1+p	MT20	2.0 4.0

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	UPLIFT	IN-SX
O	1644	0	1644	0	5-8
I	1644	0	1644	0	5-8

UNFACTORED REACTIONS		1ST LCASE	MAX./MIN. COMPONENT REACTIONS	DEAD	SOIL
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND
O	1172	715 / 0	0 / 0	0 / 0	457 / 0
I	1172	715 / 0	0 / 0	0 / 0	457 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) O, I

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.64 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF F-L, B-L.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED VERT. LOAD LC1 (LC)	UNBRACED LENGTH
FR-TO		FROM	TO	FR-TO			
A-B	-2233 / 0	-78.0	-78.0 0.83 (1)	L-D	0 / 929	0.21 (1)	
B-C	-1572 / 0	-78.0	-78.0 0.70 (1)	L-F	-760 / 0	0.42 (1)	
C-D	-1572 / 0	-78.0	-78.0 0.70 (1)	J-F	-30 / 109	0.04 (4)	
D-E	-1572 / 0	-78.0	-78.0 0.70 (1)	B-L	-760 / 0	0.42 (1)	
E-F	-1572 / 0	-78.0	-78.0 0.70 (1)	N-B	-30 / 109	0.04 (4)	
F-G	-2233 / 0	-78.0	-78.0 0.83 (1)	A-N	0 / 2035	0.46 (1)	
O-A	-1435 / 0	0.0	0.0 0.14 (1)	J-G	0 / 2035	0.46 (1)	
I-G	-1435 / 0	0.0	0.0 0.14 (1)				
P-O	0 / 0	-96.5	-96.5 0.16 (1)				
O-N	0 / 0	-18.5	-18.5 0.26 (4)				
N-M	0 / 2026	-18.5	-18.5 0.46 (1)				
M-L	0 / 2026	-18.5	-18.5 0.46 (1)				
L-K	0 / 2026	-18.5	-18.5 0.46 (1)				
K-J	0 / 2026	-18.5	-18.5 0.46 (1)				
J-I	0 / 0	-18.5	-18.5 0.26 (4)				
I-H	0 / 0	-96.5	-96.5 0.16 (1)				

DESIGN CRITERIA

SPECIFIED LOADS:			
TOP CH.	LL	=	21.0 PSF
	DL	=	6.0 PSF
BOT CH.	LL	=	0.0 PSF
	DL	=	7.4 PSF
TOTAL LOAD = 34.4 PSF			

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.03")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.10")
ALLOWABLE DEFL.(TL)= L/360 (1.03")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.22")

CANTILEVER DEFLECTION:
ALLOWABLE DEFL.(LL)= L/120 (0.19")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/120 (0.19")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01")

CSI: TC=0.83/1.00 (F-G:1) , BC=0.46/1.00 (J-L:1) , WB=0.46/1.00 (G-J:1) , SSI=0.26/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .


NAIL VALUES			
PLATE GRIP(DRY) SHEAR	SECTION (PSI)	(PLI)	(PLI)
	MAX MIN	MAX MIN	MAX MIN
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.85 (N) (INPUT = 0.90)
JSI METAL= 0.62 (M) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318485	H10T		1	TRUSS DESC. JT 45147	E20035411

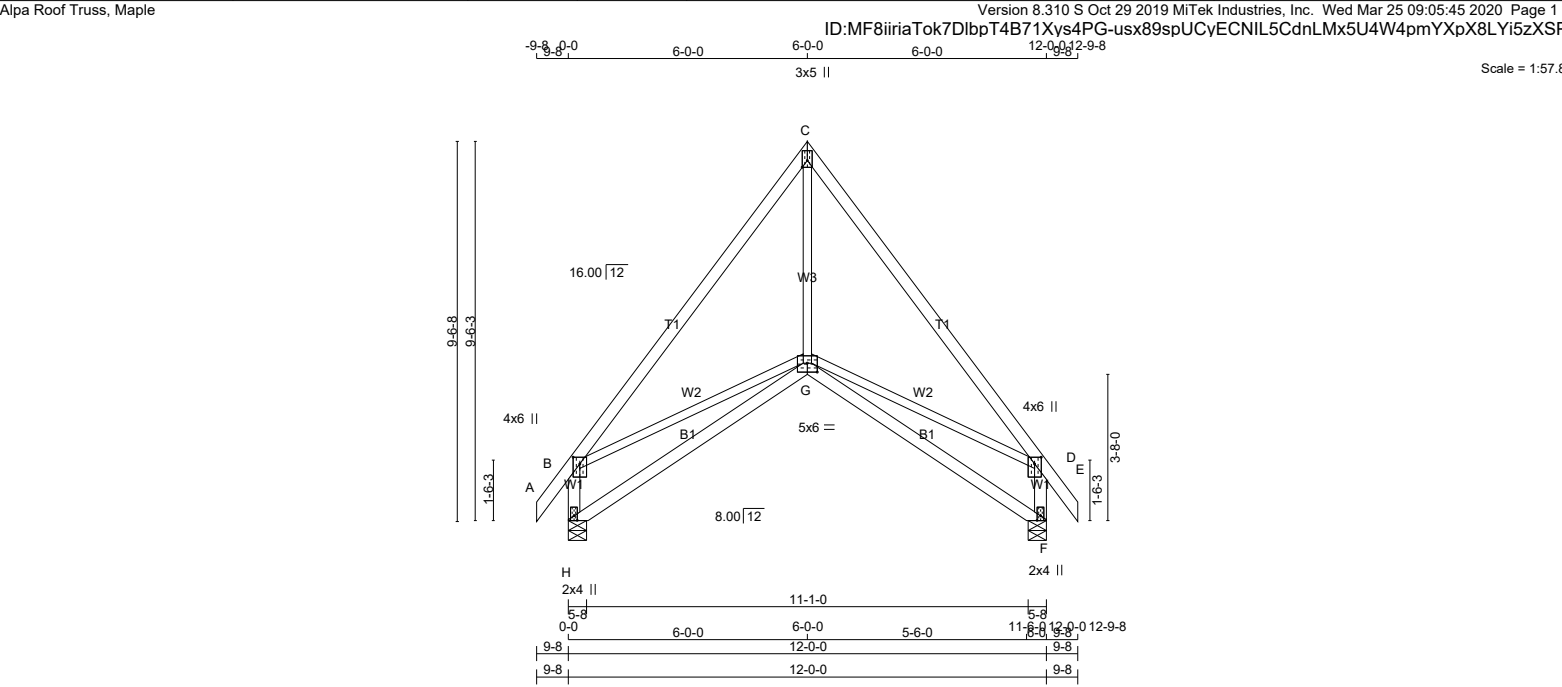

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
A - C	2x4	DRY	2100F 1.8E	SPF
C - E	2x4	DRY	2100F 1.8E	SPF
H - B	2x4	DRY	No.2	SPF
F - D	2x4	DRY	No.2	SPF
H - G	2x4	DRY	No.2	SPF
G - F	2x4	DRY	No.2	SPF

ALL WEBS	2x3	DRY	No.2	SPF
EXCEPT				
DRY: SEASONED LUMBER.				

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	6.0	2.00 2.00
C	TTW+p	MT20	3.0	5.0	2.00 Edge
D	TMVW+p	MT20	4.0	6.0	2.00 2.00
F	BMV1+p	MT20	2.0	4.0	Edge
G	BBWWW-p	MT20	5.0	6.0	2.75 3.00
H	BMV1+p	MT20	2.0	4.0	Edge

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT DOWN	REQRD BRG IN-SX
JT	VERT				
H	650	0	650	0	5-8 1-8
F	650	0	650	0	5-8 1-8

UNFACTORED REACTIONS							
1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
H	462	290 / 0	0 / 0	0 / 0	0 / 0	172 / 0	0 / 0
F	462	290 / 0	0 / 0	0 / 0	0 / 0	172 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H, F

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING					TOTAL LOAD CASES: (4)				
C H O R D S					W E B S				
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX (LC)		
FR-TO		FROM	TO		FR-TO				
A- B	0 / 28	-78.0	-78.0 0.03 (1)	10.00	G- C	0 / 385	0.09 (1)		
B- C	-533 / 0	-78.0	-78.0 0.24 (1)	6.25	B- G	0 / 348	0.08 (1)		
C- D	-533 / 0	-78.0	-78.0 0.24 (1)	6.25	G- D	0 / 348	0.08 (1)		
D- E	0 / 28	-78.0	-78.0 0.03 (1)	10.00					
H- B	-594 / 0	0.0	0.0 0.07 (1)	7.81					
F- D	-594 / 0	0.0	0.0 0.07 (1)	7.81					
H- G	0 / 0	-18.5	-18.5 0.20 (4)	10.00					
G- F	0 / 0	-18.5	-18.5 0.20 (4)	10.00					

DESIGN CRITERIA

SPECIFIED LOADS:			
TOP CH.	LL	=	21.0 PSF
	DL	=	6.0 PSF
BOT CH.	LL	=	0.0 PSF
	DL	=	7.4 PSF
TOTAL LOAD	=		34.4 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.40")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/360 (0.40")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.08")

CSI: TC=0.24/1.00 (B-C:1) , BC=0.20/1.00 (G-H:4) , WB=0.09/1.00 (C-G:1) , SSI=0.11/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES				
PLATE	GRIP(DRY)	SHEAR	SECTION	
	(PSI)	(PLI)	(PLI)	
	MAX MIN	MAX MIN	MAX MIN	
MT20	650 371	1747 788	1987 1873	

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.73 (H) (INPUT = 0.90)
JSI METAL= 0.29 (F) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318485	H10TS		1	TRUSS DESC. JT 45147	E20035412

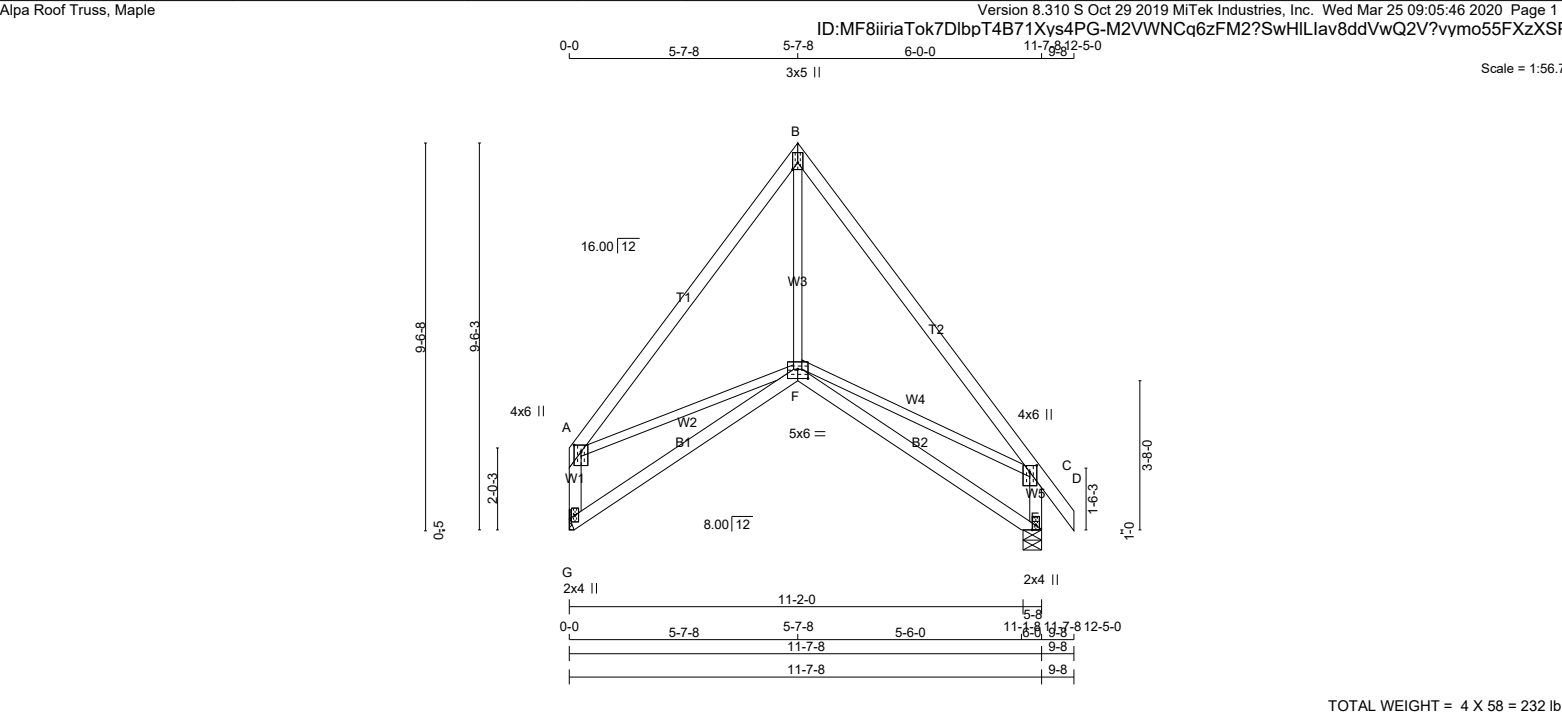


LUMBER										DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER										DESIGN CRITERIA									
N. L. G. A. RULES										BEARINGS										SPECIFIED LOADS:									
CHORDS SIZE LUMBER DESCR.																				TOP CH. LL = 21.0 PSF									
A - B 2x4 DRY No.2 SPF										FACTORED MAXIMUM FACTORED INPUT REQD										DL = 6.0 PSF									
B - D 2x4 DRY 2100F 1.8E SPF										GROSS REACTION GROSS REACTION BRG BRG										BOT CH. LL = 0.0 PSF									
G - A 2x4 DRY No.2 SPF										JT VERT HORZ DOWN HORZ UPLIFT IN-SX IN-SX										DL = 7.4 PSF									
E - C 2x4 DRY No.2 SPF										G 561 0 561 0 0 MECHANICAL										TOTAL LOAD = 34.4 PSF									
G - F 2x4 DRY No.2 SPF										E 632 0 632 0 0 5-8 1-8																			
F - E 2x4 DRY No.2 SPF																													
ALL WEBS 2x3 DRY No.2 SPF										A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT G. MINIMUM BEARING LENGTH AT JOINT G = 1-8.																			
EXCEPT																													
DRY: SEASONED LUMBER.																				THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015									
																				THIS DESIGN COMPLIES WITH:									
																				- PART 9 OF BCBC 2018 , ABC 2019									
																				- PART 9 OF OBC 2012 (2019 AMENDMENT)									
																				- CSA 086-14									
																				- TPIC 2014									
																				(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD									
																				ALLOWABLE DEFL.(LL)= L/360 (0.39")									
																				CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")									
																				ALLOWABLE DEFL.(TL)= L/360 (0.39")									
																				CALCULATED VERT. DEFL.(TL) = L/ 999 (0.08")									
																				CSI: TC=0.33/1.00 (A-B:1) , BC=0.20/1.00 (E-F:4) , WB=0.08/1.00 (B-F:1) , SSI=0.11/1.00 (B-C:1)									
																				DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10									
																				COMPANION LIVE LOAD FACTOR = 1.00									
																				TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .									
																				NAIL VALUES									
																				PLATE GRIP(DRY) SHEAR SECTION									
																				(PSI) (PLI) (PLI)									
																				MAX MIN MAX MIN MAX MIN									
																				MT20 650 371 1747 788 1987 1873									
																				PLATE PLACEMENT TOL. = 0.250 inches									
																				PLATE ROTATION TOL. = 5.0 Deg.									
																				JSI GRIP= 0.70 (E) (INPUT = 0.90)									
																				JSI METAL= 0.28 (E) (INPUT = 1.00)									

PLATES (table is in inches)									
JT	TYPE	PLATES	W	LEN	Y	X			
A	TMVW+p	MT20	4.0	6.0	2.00	2.00			
B	TTW+p	MT20	3.0	5.0	2.00	Edge			
C	TMVW+p	MT20	4.0	6.0	2.00	2.00			
E	BMV1+p	MT20	2.0	4.0	Edge				
F	BBWWW-p	MT20	5.0	6.0	2.75	3.00			
G	BMV1+p	MT20	2.0	4.0					

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2									
									

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318485	H12A		2	TRUSS DESC. JT 45147	E20035414

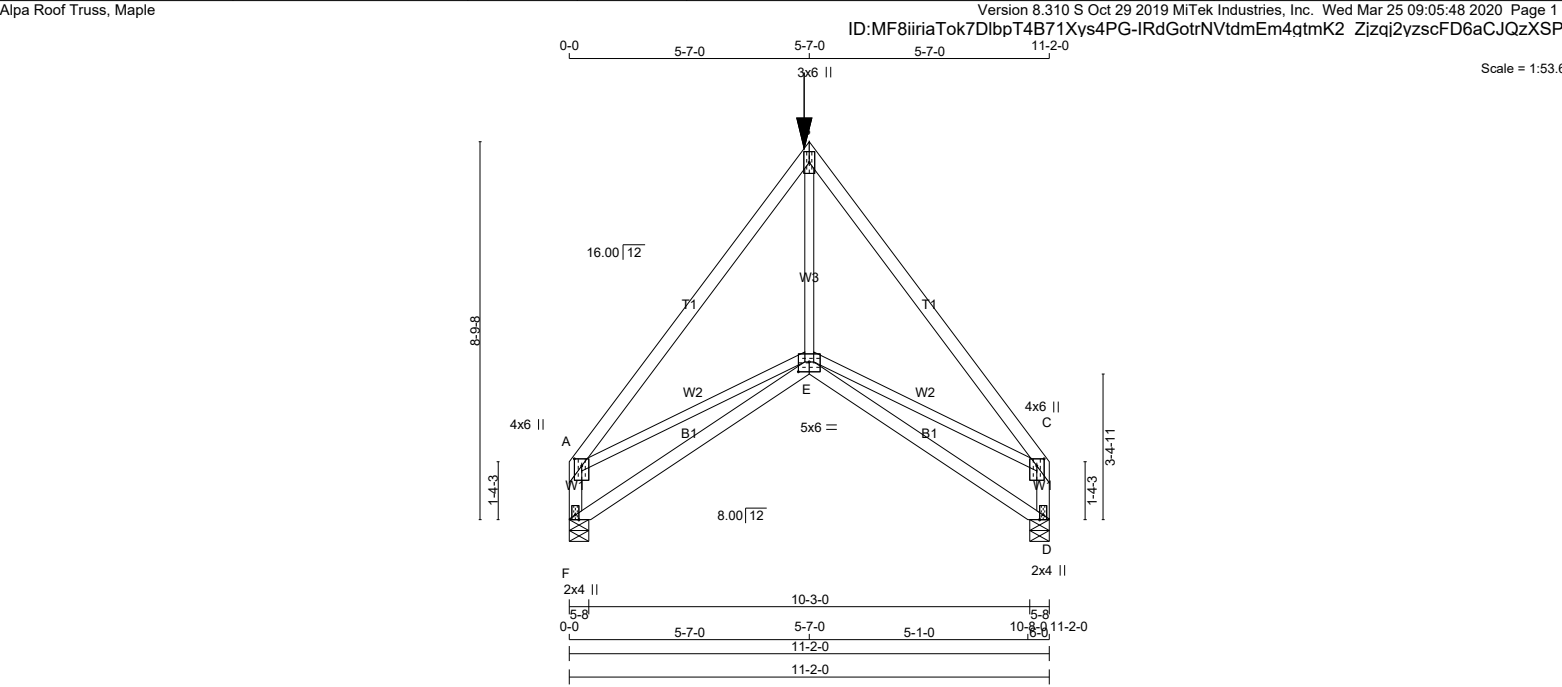

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER		DESCR.
A - B	2x4	DRY	No.2	SPF
B - C	2x4	DRY	No.2	SPF
F - A	2x4	DRY	No.2	SPF
D - C	2x4	DRY	No.2	SPF
F - E	2x4	DRY	No.2	SPF
E - D	2x4	DRY	No.2	SPF

ALL WEBS EXCEPT	2x3	DRY	No.2	SPF
-----------------	-----	-----	------	-----

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
A- B	12	SIDE(61.0)
B- C	12	SIDE(61.0)
F- A	12	TOP
D- C	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
F- E	12	SIDE(61.9)
E- D	12	SIDE(61.9)
WEBS : (0.122"x3") SPIRAL NAILS		
E- B	6	SIDE(123.8)
2x3	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
F	1840	0	1840	0	0
D	1840	0	1840	0	0

UNFACTORED REACTIONS		1ST LCASE	MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL	
F	1303	847 / 0	0 / 0	0 / 0	0 / 0	455 / 0	0 / 0	
D	1303	847 / 0	0 / 0	0 / 0	0 / 0	455 / 0	0 / 0	

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, D

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.73 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS		WEBS	
MEMB.	MAX. FACTORED FORCE (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)
FR-TO	FROM TO	FR-TO	FROM TO
A- B	-2156 / 0	E- B	0 / 2073
B- C	-2156 / 0	A- E	0 / 1414
F- A	-1373 / 0	E- C	0 / 1414
D- C	-1373 / 0		
F- E	0 / 0		
E- D	0 / 0		

FACTORED CONCENTRATED LOADS (LBS)		FACE	DIR.	TYPE	HEEL	CONN.
JT	LOC.	LC1	MAX-	MAX+		
B	5-7-0	-188	-210	---	FRONT	VERT
B	5-7-0	-755	-755	---	FRONT	VERT

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:			
TOP CH.	LL	=	21.0 PSF
	DL	=	6.0 PSF
BOT CH.	LL	=	0.0 PSF
	DL	=	7.4 PSF
TOTAL LOAD		=	34.4 PSF

SPACING = 24.0 IN./C

GIRDER TYPE: CStdGirder
START DISTANCE = 0-0
START SPAN CARRIED = 8-2-0
END DISTANCE = 11-2-0
END SPAN CARRIED = 8-2-0
END WALL WIDTH = 0-0
APPLIED TO FRONT SIDE OF BOTTOM CHORD.
- ADDTL LOADS BASED ON 55 % OF GSL.

*** NON STANDARD GIRDER ***
ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.37")
CALCULATED DEFL.(LL) = L/ 999 (0.13")
ALLOWABLE DEFL.(TL)= L/360 (0.37")
CALCULATED VERT. DEFL.(TL) = L/ 477 (0.28")

CSI: TC=0.34/1.00 (A-B:1) , BC=0.49/1.00 (E-F:1) , WB=0.26/1.00 (B-E:1) , SS=0.17/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES				
PLATE GRIP(DRY)	SHEAR	SECTION		
(PSI)	(PLI)	(PLI)		
MAX MIN	MAX MIN	MAX MIN		
MT20	650 371	1747 788	1987 1873	

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318485	H12A		2	TRUSS DESC. JT 45147	E20035414(2)

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW+p	MT20	4.0	6.0	2.00	2.00
B	TTW+p	MT20	3.0	6.0		
C	TMVW+p	MT20	4.0	6.0	2.00	2.00
D	BMV1+p	MT20	2.0	4.0	Edge	
E	BBWWW-p	MT20	5.0	6.0	2.75	3.00
F	BMV1+p	MT20	2.0	4.0	Edge	


Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

JSI GRIP= 0.84 (D) (INPUT = 0.90)
JSI METAL= 0.36 (C) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318485	H12T		1	TRUSS DESC. JT 45147	E20035415

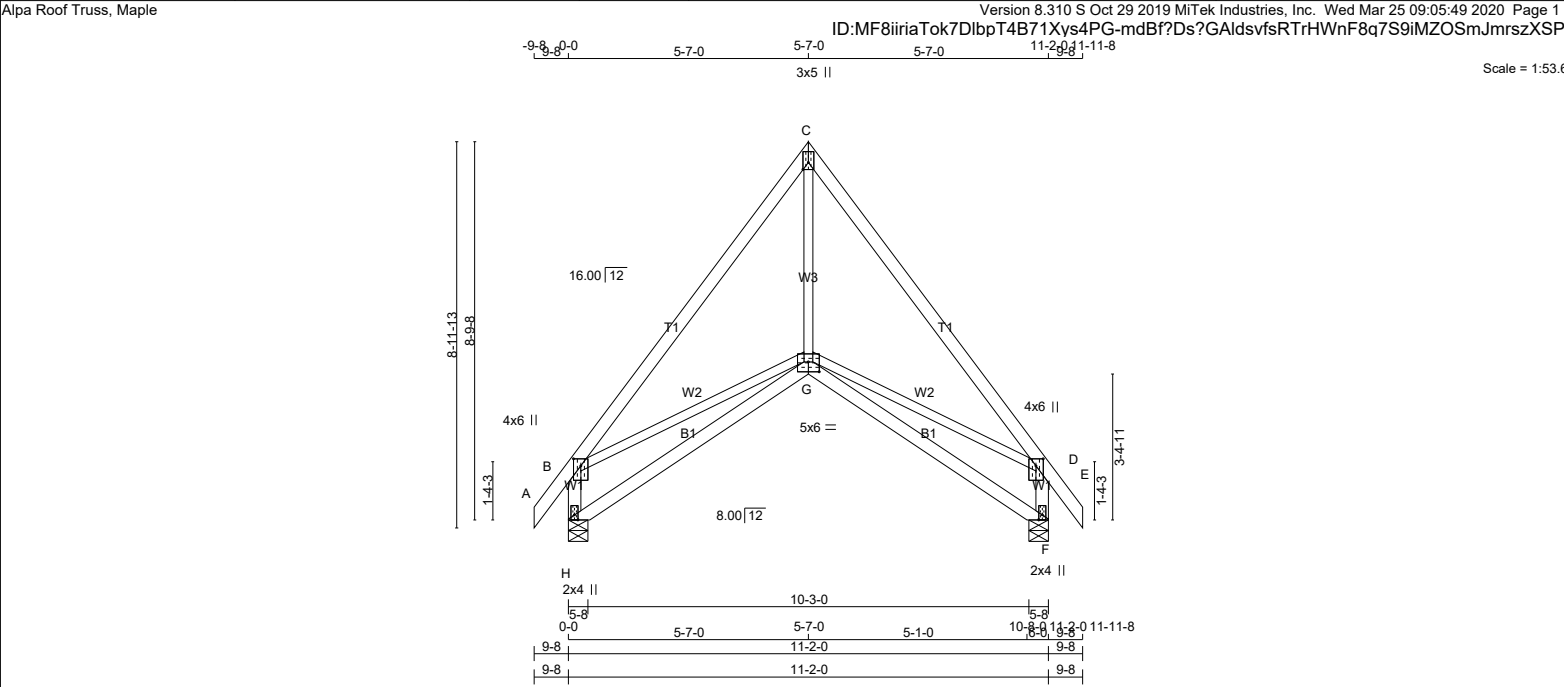

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER A - C 2x4 DRY No.2 C - E 2x4 DRY No.2 H - B 2x4 DRY No.2 F - D 2x4 DRY No.2 H - G 2x4 DRY No.2 G - F 2x4 DRY No.2 ALL WEBS 2x3 DRY No.2 EXCEPT DRY: SEASONED LUMBER.				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS FACTORED GROSS REACTION JT VERT HORZ H 609 0 F 609 0 MAXIMUM FACTORED GROSS REACTION DOWN HORZ UPLIFT H 609 0 0 F 609 0 0 INPUT BRG IN-SX H 5-8 1-8 F 5-8 1-8 REQRD BRG IN-SX H 1-8 F 1-8 UNFACTORED REACTIONS 1ST LCASE JT COMBINED SNOW LIVE PERM.LIVE WIND DEAD SOIL H 433 273 / 0 0 / 0 0 / 0 0 / 0 161 / 0 0 / 0 F 433 273 / 0 0 / 0 0 / 0 0 / 0 161 / 0 0 / 0 BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H, F BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. LOADING TOTAL LOAD CASES: (4) CHORDS MEMB. MAX. FACTORED FORCE (LBS) VERT. LOAD (PLF) MAX. FACTORED FORCE (LBS) MAX. FACTORED FORCE (LBS) FR-TO FROM TO LENGTH FR-TO A-B 0 / 28 -78.0 -78.0 0.05 (1) 10.00 G-C 0 / 369 0.08 (1) B-C -503 / 0 -78.0 -78.0 0.32 (1) 6.25 B-G 0 / 329 0.07 (1) C-D -503 / 0 -78.0 -78.0 0.32 (1) 6.25 G-D 0 / 330 0.07 (1) D-E 0 / 28 -78.0 -78.0 0.05 (1) 10.00 H-B -558 / 0 0.0 0.0 0.06 (1) 7.81 F-D -558 / 0 0.0 0.0 0.06 (1) 7.81 H-G 0 / 0 -18.5 -18.5 0.17 (4) 10.00 G-F 0 / 0 -18.5 -18.5 0.17 (4) 10.00 WEBS MEMB. MAX. FACTORED FORCE (LBS) MAX. FACTORED FORCE (LBS) FR-TO FROM TO LENGTH FR-TO A-B 0 / 28 -78.0 -78.0 0.05 (1) 10.00 G-C 0 / 369 0.08 (1) B-C -503 / 0 -78.0 -78.0 0.32 (1) 6.25 B-G 0 / 329 0.07 (1) C-D -503 / 0 -78.0 -78.0 0.32 (1) 6.25 G-D 0 / 330 0.07 (1) D-E 0 / 28 -78.0 -78.0 0.05 (1) 10.00 H-B -558 / 0 0.0 0.0 0.06 (1) 7.81 F-D -558 / 0 0.0 0.0 0.06 (1) 7.81 H-G 0 / 0 -18.5 -18.5 0.17 (4) 10.00 G-F 0 / 0 -18.5 -18.5 0.17 (4) 10.00				DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF CBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD ALLOWABLE DEFL.(LL)= L/360 (0.37") CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01") ALLOWABLE DEFL.(TL)= L/360 (0.37") CALCULATED VERT. DEFL.(TL) = L/ 999 (0.07") CSI: TC=0.32/1.00 (B-C:1) , BC=0.17/1.00 (G-H:4) , WB=0.08/1.00 (C-G:1) , SSI=0.10/1.00 (B-C:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.68 (F) (INPUT = 0.90) JSI METAL= 0.27 (H) (INPUT = 1.00)			
--	--	--	--	--	--	--	--	--	--	--	--

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318932	H4S	4	1	TRUSS DESC. JT 45147	E20051782

Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Fri May 15 09:38:11 2020 Page 1


ID:KXqgzscD4uG5CTEOs4LGSuzSPyV-HA0ZpTGsCpt6YQoKtbVwR?sTxxNwKNx5nwT5bozGJ2w

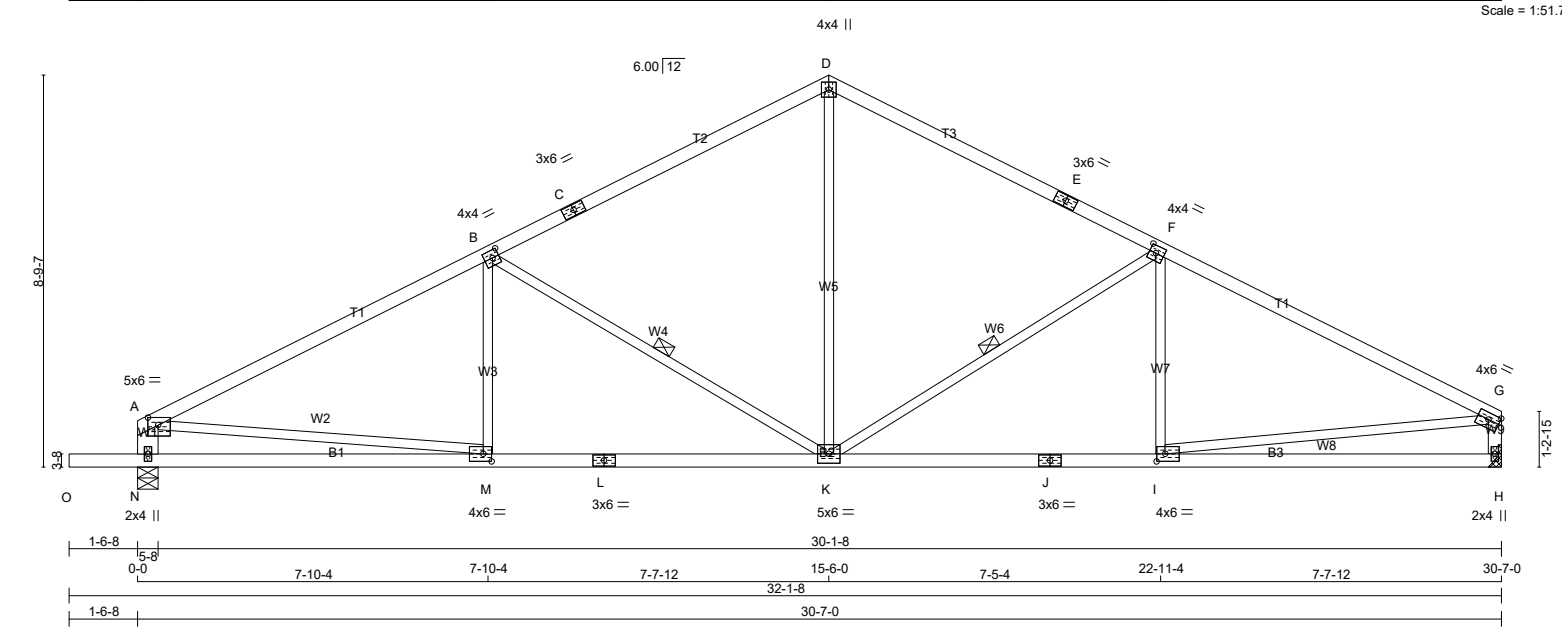

LUMBER										DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER										DESIGN CRITERIA									
N. L. G. A. RULES										BEARINGS										SPECIFIED LOADS:									
CHORDS SIZE LUMBER DESCR.										FACTORED GROSS REACTION MAXIMUM FACTORED GROSS REACTION INPUT REQRD										TOP CH. LL = 21.0 PSF									
A - C 2x4 DRY No.2 SPF										JT VERT HORZ DOWN HORZ UPLIFT IN-SX IN-SX										DL = 6.0 PSF									
C - D 2x4 DRY No.2 SPF										N 1624 0 1624 0 0 5-8 1-11										BOT CH. LL = 0.0 PSF									
D - E 2x4 DRY No.2 SPF										H 1475 0 1475 0 0 0 MECHANICAL										DL = 7.4 PSF									
E - G 2x4 DRY No.2 SPF										A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H. MINIMUM BEARING LENGTH AT JOINT H = 1-10.										TOTAL LOAD = 34.4 PSF									
N - A 2x6 DRY No.2 SPF										UNFACTORED REACTIONS										SPACING = 24.0 IN. C/C									
H - G 2x4 DRY No.2 SPF										1ST LCASE MAX./MIN. COMPONENT REACTIONS										THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015									
O - L 2x4 DRY No.2 SPF										JT COMBINED SNOW LIVE PERM.LIVE WIND DEAD SOIL										THIS DESIGN COMPLIES WITH:									
L - J 2x4 DRY No.2 SPF										N 1158 707 / 0 0 / 0 0 / 0 0 / 0 451 / 0 0 / 0										- PART 9 OF BCBC 2018 , ABC 2019									
J - H 2x4 DRY No.2 SPF										H 1052 642 / 0 0 / 0 0 / 0 0 / 0 410 / 0 0 / 0										- PART 9 OF OBC 2012 (2019 AMENDMENT)									
ALL WEBS 2x3 DRY No.2 SPF										BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N										- CSA 086-14									
EXCEPT										BRACING										- TPIC 2014									
DRY: SEASONED LUMBER.										TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.67 FT.										(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD									
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.										ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.										ALLOWABLE DEFL.(LL)= L/360 (1.02")									
1 LATERAL BRACE(S) AT 1/2 LENGTH OF B-K, F-K.										END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW										CALCULATED VERT. DEFL.(LL) = L/ 999 (0.10")									
LOADING										TOTAL LOAD CASES: (4)										ALLOWABLE DEFL.(TL)= L/360 (1.02")									
CHORDS										WEBS										CALCULATED VERT. DEFL.(TL) = L/ 999 (0.21")									
MEMB. MAX. FACTORED FORCE (LBS)										MEMB. MAX. FACTORED FORCE (LBS)										CANTILEVER DEFLECTION:									
FR-TO										FR-TO										ALLOWABLE DEFL.(LL)= L/120 (0.19")									
A-B -2196 / 0										A-B -26 / 111										CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")									
B-C -1531 / 0										B-K -764 / 0										ALLOWABLE DEFL.(TL)= L/120 (0.19")									
C-D -1531 / 0										K-D 0 / 898										CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01")									
D-E -1530 / 0										K-F -677 / 0										CSI: TC=0.82/1.00 (A-B:1) , BC=0.46/1.00 (K-M:4) ,									
E-F -1530 / 0										I-F -81 / 86										WB=0.45/1.00 (A-M:1) , SSI=0.26/1.00 (A-B:1)									
F-G -2104 / 0										A-M 0 / 2001										DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10									
N-A -1415 / 0										I-G 0 / 1924										COMP=1.10 SHEAR=1.10 TENS= 1.10									
H-G -1417 / 0																				COMPANION LIVE LOAD FACTOR = 1.00									
O-N 0 / 0																				AUTOSOLVE RIGHT HEEL ONLY									
N-M 0 / 0																				TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .									
M-L 0 / 1993																				NAIL VALUES									
L-K 0 / 1993																				PLATE GRIP(DRY) SHEAR SECTION									
K-J 0 / 1910																				(PSI) (PLI) (PLI)									
J-I 0 / 1910																				MAX MIN MAX MIN MAX MIN									
I-H 0 / 0																				MT20 650 371 1747 788 1987 1873									
LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2																				PLATE PLACEMENT TOL. = 0.250 inches									
																				PLATE ROTATION TOL. = 5.0 Deg.									
																				JSI GRIP= 0.89 (G) (INPUT = 0.90)									
																				JSI METAL= 0.63 (L) (INPUT = 1.00)									

Y. WIDYA
100225448
05/15/2020
PROVINCE OF ONTARIO

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318932	H22	5	1	TRUSS DESC. JT 45147	E20051784

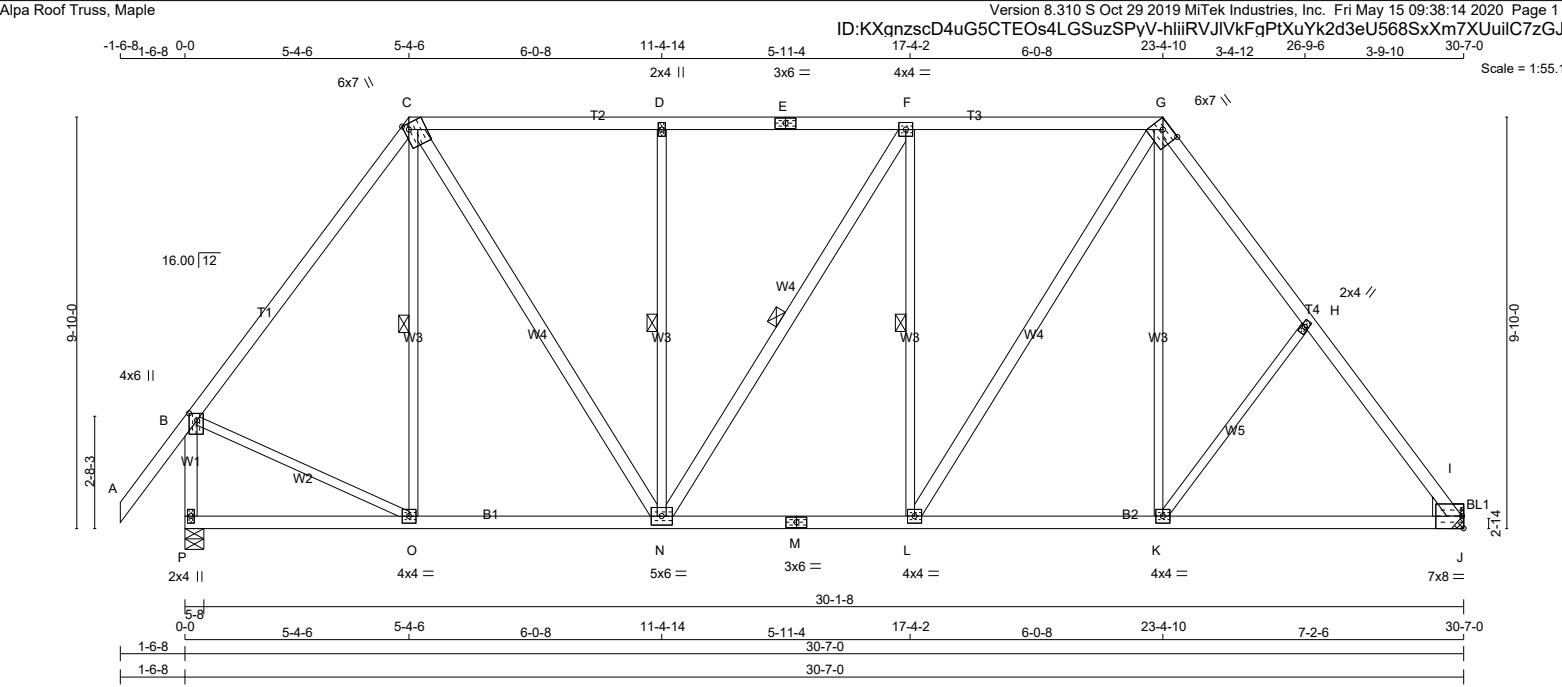

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
A - C	2x4	DRY	No.2	SPF
C - E	2x4	DRY	No.2	SPF
E - G	2x4	DRY	No.2	SPF
G - I	2x4	DRY	No.2	SPF
P - B	2x4	DRY	No.2	SPF
P - M	2x4	DRY	No.2	SPF
M - I	2x4	DRY	No.2	SPF
BEARING BLOCKS				
BL1	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT				
C - N	2x4	DRY	No.2	SPF
N - F	2x4	DRY	No.2	SPF
L - G	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
B	TMVW+p	MT20	4.0	6.0 2.00 2.25
C	TTWW+m	MT20	6.0	7.0 Edge 1.50
D	TMW+w	MT20	2.0	4.0
E	TS-t	MT20	3.0	6.0
F	TMWW-t	MT20	4.0	4.0
G	TTWW-h	MT20	6.0	7.0 2.00 4.25
H	TMW+w	MT20	2.0	4.0
I	TBMK1*-I	MT20	7.0	8.0 Edge
K, L, O				
K	BMWW-t	MT20	4.0	4.0
M	BS-t	MT20	3.0	6.0
N	BMWWW-t	MT20	5.0	6.0
P	BMV1+p	MT20	2.0	4.0

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	REQRD
		GROSS REACTION	GROSS REACTION	BRG	BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
I	1532	0	1532	0	0
P	1666	0	1666	0	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT I. MINIMUM BEARING LENGTH AT JOINT I = 1-11.

UNFACTORED REACTIONS

1ST LCASE	MAX./MIN. COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
I	1098	638 / 0	0 / 0	0 / 0	0 / 0	461 / 0	0 / 0
P	1191	707 / 0	0 / 0	0 / 0	0 / 0	484 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) P

BRACING

FOR SECTION C-G, MAX. PURLIN SPACING = 2.00 FT.
FOR OTHER SECTIONS, TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.02 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-O, D-N, F-N, F-L.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRAC LENGTH	FACTORED MAX. CSI (LC)
FR-TO		FROM TO		FR-TO			
A-B	0 / 52	-78.0 -78.0	0.15 (1)	O-C	-187 / 0	10.00	0.12 (1)
B-C	-1224 / 0	-78.0 -78.0	0.35 (1)	C-N	0 / 879	5.44	0.14 (1)
C-D	-1201 / 0	-85.5 -85.5	0.38 (1)	N-D	-551 / 0	2.00	0.36 (1)
D-E	-1201 / 0	-85.5 -85.5	0.34 (1)	N-F	-98 / 0	2.00	0.07 (1)
E-F	-1201 / 0	-85.5 -85.5	0.34 (1)	L-F	-470 / 0	2.00	0.31 (1)
F-G	-1252 / 0	-85.5 -85.5	0.38 (1)	L-G	0 / 680	2.00	0.11 (1)
G-H	-1508 / 0	-78.0 -78.0	0.15 (1)	K-G	0 / 294	5.22	0.07 (1)
H-I	-1666 / 0	-78.0 -78.0	0.16 (1)	K-H	-221 / 0	5.02	0.14 (1)
P-B	-1627 / 0	0.0 0.0	0.23 (1)	B-O	0 / 793	6.48	0.18 (1)
I-J	0 / 0	-15.0 -15.0	0.00 (4)			10.00	
P-O	0 / 0	-18.5 -18.5	0.14 (4)			10.00	
O-N	0 / 729	-18.5 -18.5	0.22 (4)			10.00	
N-M	0 / 1253	-18.5 -18.5	0.26 (1)			10.00	
M-L	0 / 1253	-18.5 -18.5	0.26 (1)			10.00	
L-K	0 / 888	-18.5 -18.5	0.30 (4)			10.00	
K-I	0 / 1018	-18.5 -18.5	0.31 (4)			10.00	

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	21.0	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD	=	34.4	PSF	

SPACING = 24.0 IN./C

LOADING IN HIGHEST FLAT SECTION BASED ON PIGGYBACK TRUSS WITH SLOPES OF 6.00/12 AND -6.00/12 AND RESPECTIVE WALL HEIGHTS OF 0-0 AND 0-0 AND AN ADDITIONAL DEAD LOAD OF 3.0 P.S.F.

LOADING IN OTHER FLAT SECTIONS BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.01")
CALCULATED VERT. DEFL.(LL) = L/999 (0.04")
ALLOWABLE DEFL.(TL)= L/360 (1.01")
CALCULATED VERT. DEFL.(TL) = L/999 (0.10")

CSI: TC=0.38/1.00 (F-G:1) , BC=0.31/1.00 (I-K:4) , WB=0.36/1.00 (D-N:1) , SSI=0.24/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LBS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.85 (B) (INPUT = 0.90)
JSI METAL= 0.45 (B) (INPUT = 1.00)

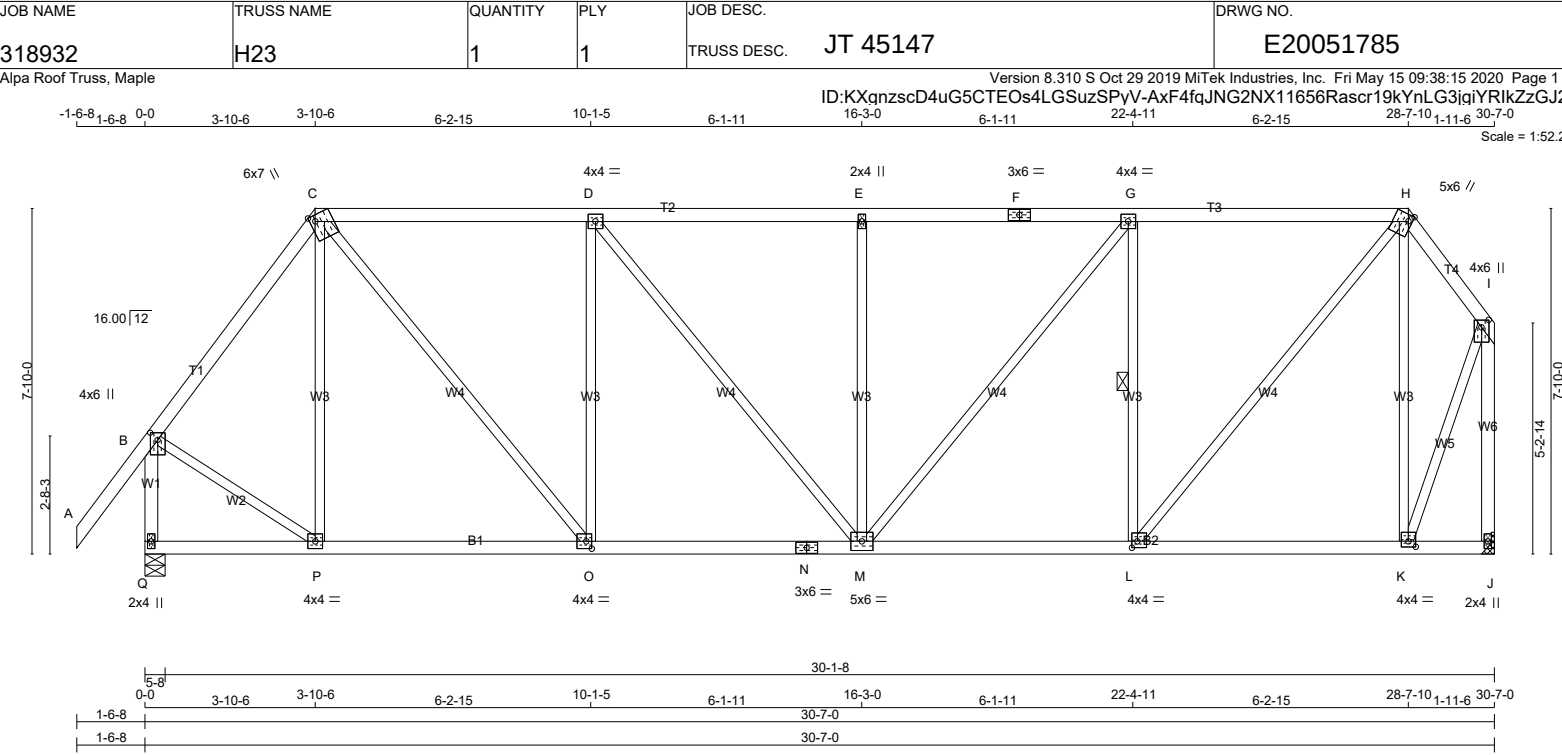

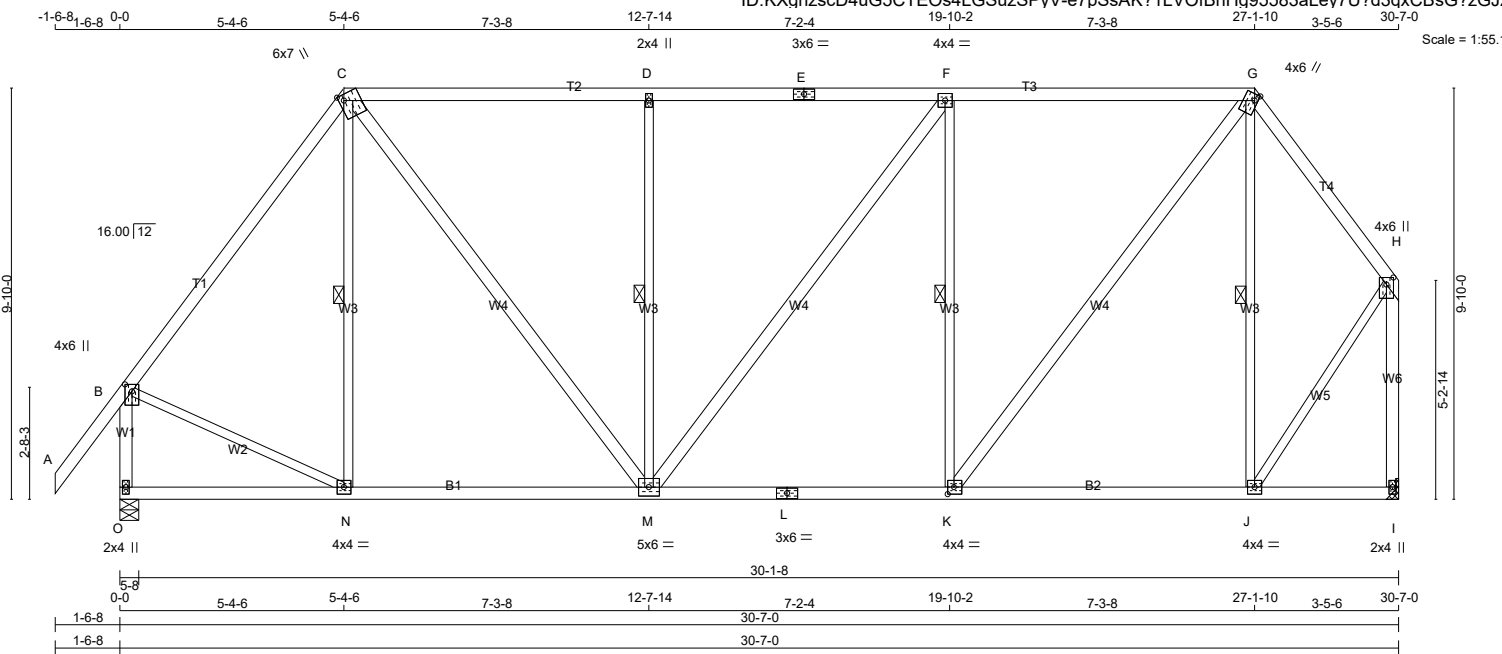

TOTAL WEIGHT = 167 lb

LUMBER				
N	L	G	A	RULES
CHORDS	SIZE		LUMBER	DESCR
A - C	2x4	DRY	No.2	SPF
C - E	2x4	DRY	No.2	SPF
E - G	2x4	DRY	No.2	SPF
G - H	2x4	DRY	No.2	SPF
O - B	2x4	DRY	No.2	SPF
I - H	2x4	DRY	No.2	SPF
O - L	2x4	DRY	No.2	SPF
L - I	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF
C - M	2x4	DRY	No.2	SPF
M - F	2x4	DRY	No.2	SPF
K - G	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

J	T	TYPE	PLATES	W	LEN	Y	X
B	T	TMVW+p	MT20	4.0	6.0	2.00	2.00
C	D	TTWW+m	MT20	6.0	7.0	Edge 1.50	
D	B	TMW+w	MT20	2.0	4.0		
E	F	TS-t	MT20	3.0	4.0		
F	E	TMWV-t	MT20	4.0	6.0		
G	H	TTWW+m	MT20	4.0	6.0	1.75	1.00
H	G	TMWV+p	MT20	4.0	6.0	2.00	2.00
I	J	BMV1+p	MT20	2.0	4.0		
J	I	BMVW-t	MT20	4.0	4.0		
K	M	BMVW-t	MT20	4.0	4.0	2.00	1.75
L	M	BS-t	MT20	3.0	6.0		
M	L	BMVWWW-t	MT20	5.0	6.0		
N	O	BMVW-t	MT20	4.0	4.0		
O	N	BMV1+p	MT20	2.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

FACTORED GROSS REACTION			MAXIMUM FACTORED GROSS REACTION			INPUT BRG	REQD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
O	1604	0	1604	0	0	5-8	2-6
I	1475	0	1475	0	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT I. MINIMUM BEARING LENGTH AT JOINT I = 1-10.

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
I	1141	712 / 0	0 / 0	0 / 0	0 / 0	430 / 0	0 / 0
O	1052	642 / 0	0 / 0	0 / 0	0 / 0	410 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) O

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.89 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-N, D-M, F-K, G-J.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

C H O R D S				W E B S			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED			MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)
		VERT. LOAD (PLF)	LC1	MAX. UNBRAC. CSI (LC)			
FR-TO		FROM	TO	LENGTH	FR-TO		
A-B	0 / 52	-78.0	-78.0	0.15 (1)	10.00	N-C	-162 / 30 0.11 (1)
B-C	-1168 / 0	-78.0	-78.0	0.52 (1)	5.32	C-M	0 / 822 0.13 (1)
C-D	-1196 / 0	-78.0	-78.0	0.66 (1)	4.91	M-D	-611 / 0 0.40 (1)
D-E	-1197 / 0	-78.0	-78.0	0.66 (1)	4.89	M-F	0 / 114 0.02 (1)
E-F	-1197 / 0	-78.0	-78.0	0.66 (1)	4.89	K-F	-704 / 0 0.46 (1)
F-G	-1128 / 0	-78.0	-78.0	0.66 (1)	5.01	K-G	0 / 1060 0.17 (1)
G-H	-820 / 0	-78.0	-78.0	0.18 (1)	6.25	J-G	-553 / 0 0.36 (1)
O-B	-1568 / 0	0.0	0.0	0.23 (1)	6.58	B-N	0 / 757 0.17 (1)
I-H	-1460 / 0	0.0	0.0	0.76 (1)	6.77	J-H	0 / 827 0.19 (1)
O-N	0 / 0	-18.5	-18.5	0.17 (4)	10.00		
N-M	0 / 696	-18.5	-18.5	0.25 (4)	10.00		
M-L	0 / 1128	-18.5	-18.5	0.30 (4)	10.00		
L-K	0 / 1128	-18.5	-18.5	0.30 (4)	10.00		
K-J	0 / 483	-18.5	-18.5	0.24 (4)	10.00		
J-I	0 / 0	-18.5	-18.5	0.14 (4)	10.00		

DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL =	21.0	PSF
		DL =	6.0	PSF
BOT	CH.	LL =	0.0	PSF
		DL =	7.4	PSF
TOTAL LOAD		=	34.4	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE
OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.02")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.05")
ALLOWABLE DEFL.(TL)= L/360 (1.02")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.11")

CSI: TC=0.76/1.00 (H-I:1), BC=0.30/1.00 (K-M:4),
WB=0.46/1.00 (F-K:1), SSI=0.27/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES					
PLATE	GRIP(DRY)		SHEAR		SECTION
	(PSI)		(PLI)		(PLI)
	MAX	MIN	MAX	MIN	MAX MIN
MT20	650	371	1747	788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (K) (INPUT = 0.90)
JSI METAL= 0.45 (B) (INPUT = 1.00)

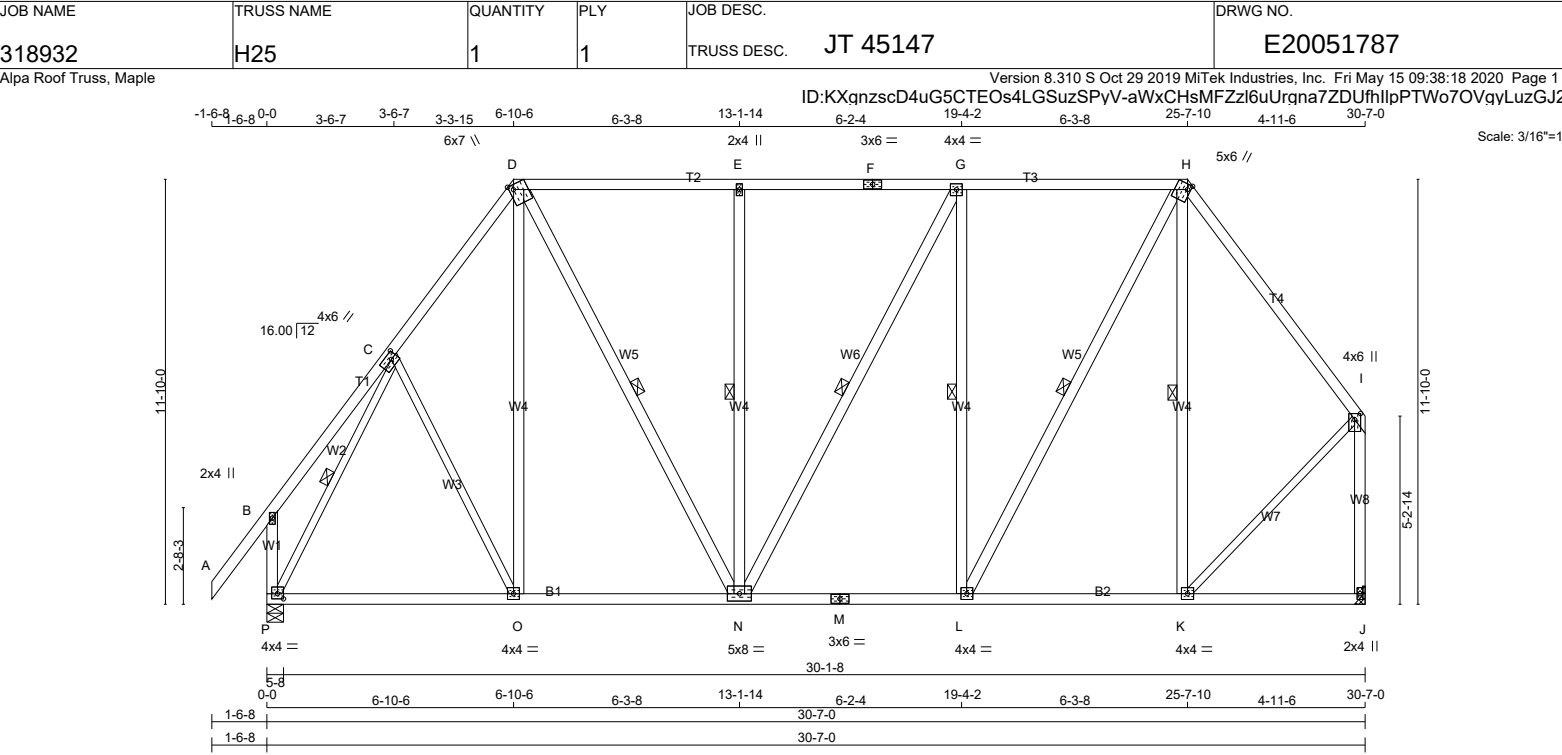

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2
D - F	2x4	DRY	No.2
F - H	2x4	DRY	No.2
H - I	2x4	DRY	No.2
P - B	2x4	DRY	No.2
J - I	2x4	DRY	No.2
P - M	2x4	DRY	No.2
M - J	2x4	DRY	No.2
ALL WEBS EXCEPT	2x4	DRY	No.2
C - O	2x3	DRY	No.2
P - C	2x3	DRY	No.2
K - I	2x3	DRY	No.2
DRY: SEASONED LUMBER.			

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
B	TMV+p	MT20	2.0	4.0
C	TMWW-t	MT20	4.0	6.0 2.00 2.00
D	TTWW+m	MT20	6.0	7.0 Edge 1.50
E	TMW+w	MT20	2.0	4.0
F	TS-t	MT20	3.0	6.0
G	TMWW-t	MT20	4.0	4.0
H	TTWW+m	MT20	5.0	6.0 1.75 1.00
I	TMVW+p	MT20	4.0	6.0 2.00 2.00
J	BMV1+p	MT20	2.0	4.0
K, L, O				
K	BMWW-t	MT20	4.0	4.0
M	BS-t	MT20	3.0	6.0
N	BMWWW-t	MT20	5.0	8.0
P	BMVW1-t	MT20	4.0	4.0 1.75 2.00
Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.				

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQRD	
		GROSS REACTION		GROSS REACTION		BRG		BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	IN-SX	IN-SX
P	1604	0	1604	0	0	5-8	1-12		
J	1475	0	1475	0	0	MECHANICAL			

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT J. MINIMUM BEARING LENGTH AT JOINT J = 1-10.

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
P	1141	712 / 0	0 / 0	0 / 0	0 / 0	430 / 0	0 / 0
J	1052	642 / 0	0 / 0	0 / 0	0 / 0	410 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) P

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.62 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF D-N, E-N, G-N, G-L, H-L, H-K, C-P.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.		MAX. FACTORED		MEMB.		MAX. FACTORED	
		FORCE (LBS)	VERT. LOAD (PLF)			FORCE (LBS)	MAX. CSI (LC)
FR-TO		FROM TO		FR-TO		FROM TO	
A-B	0 / 52	-78.0	-78.0 0.15 (1)	10.00	C-O	0 / 73	0.02 (4)
B-C	0 / 24	-78.0	-78.0 0.14 (1)	10.00	O-D	0 / 103	0.03 (4)
C-D	-1182 / 0	-78.0	-78.0 0.17 (1)	5.69	D-N	0 / 617	0.10 (1)
D-E	-988 / 0	-78.0	-78.0 0.45 (1)	5.63	N-E	-525 / 0	0.40 (1)
E-F	-988 / 0	-78.0	-78.0 0.46 (1)	5.62	N-G	0 / 102	0.02 (1)
F-G	-988 / 0	-78.0	-78.0 0.46 (1)	5.62	L-G	-618 / 0	0.47 (1)
G-H	-939 / 0	-78.0	-78.0 0.46 (1)	5.73	L-H	0 / 836	0.13 (1)
H-I	-910 / 0	-78.0	-78.0 0.40 (1)	5.97	K-H	-402 / 0	0.30 (1)
P-B	-230 / 0	0.0	0.0 0.03 (1)	7.81	P-C	-1475 / 0	0.57 (1)
J-I	-1440 / 0	0.0	0.0 0.75 (1)	6.81	K-I	0 / 750	0.17 (1)
P-O	0 / 656	-18.5	-18.5 0.27 (4)	10.00			
O-N	0 / 692	-18.5	-18.5 0.27 (4)	10.00			
N-M	0 / 940	-18.5	-18.5 0.23 (4)	10.00			
M-L	0 / 940	-18.5	-18.5 0.23 (4)	10.00			
L-K	0 / 538	-18.5	-18.5 0.19 (4)	10.00			
K-J	0 / 0	-18.5	-18.5 0.14 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL =	21.0	PSF
	DL =	6.0	PSF
BOT CH.	LL =	0.0	PSF
	DL =	7.4	PSF
TOTAL LOAD	=	34.4	PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.02")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.04")
ALLOWABLE DEFL.(TL)= L/360 (1.02")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.09")

CSI: TC=0.75/1.00 (I-J:1), BC=0.27/1.00 (N-O:4), WB=0.57/1.00 (C-P:1), SSI=0.23/1.00 (G-H:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.87 (H) (INPUT = 0.90)
JSI METAL= 0.36 (M) (INPUT = 1.00)

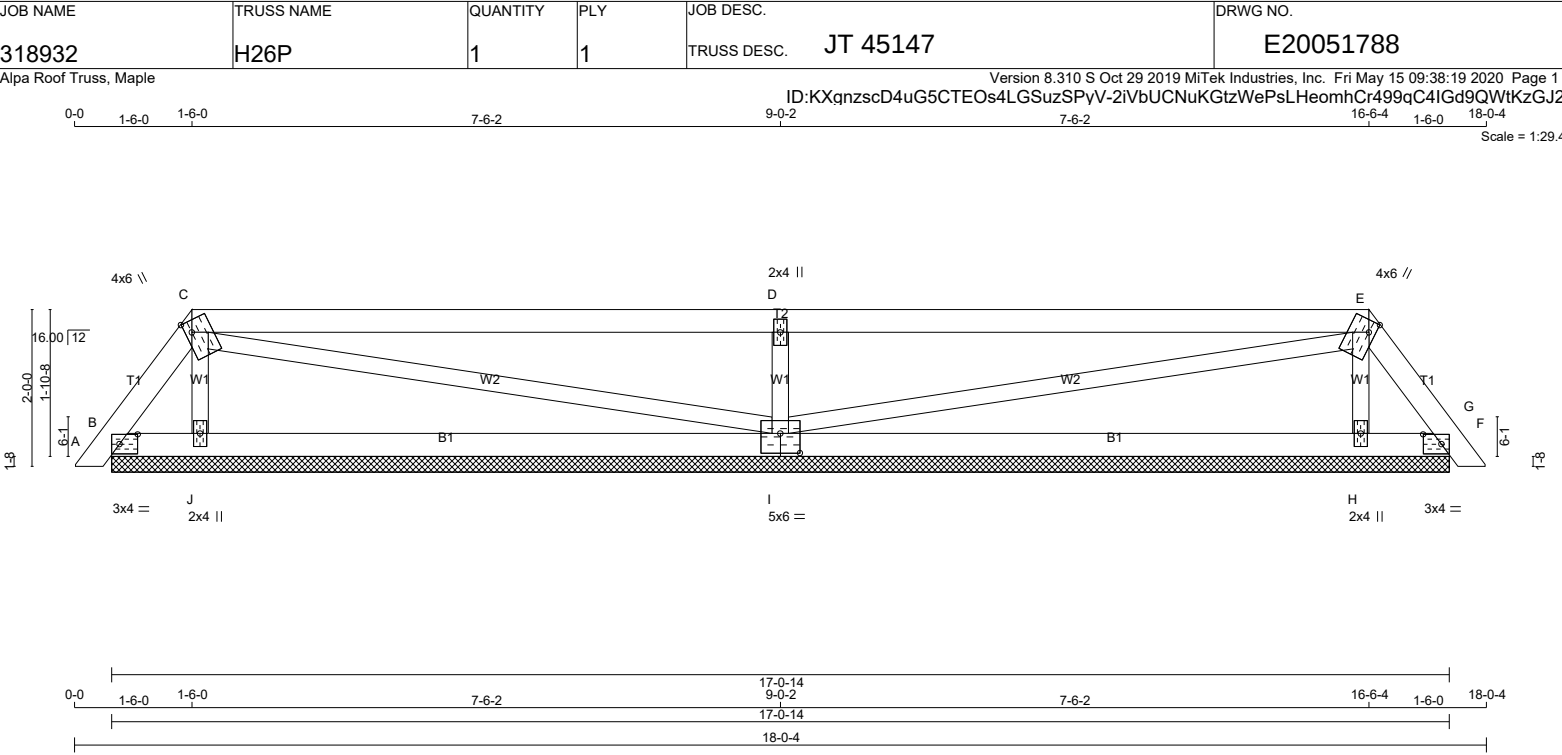

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY No.2	SPF
C - E	2x4	DRY No.2	SPF
E - G	2x4	DRY No.2	SPF
B - I	2x4	DRY No.2	SPF
I - F	2x4	DRY No.2	SPF

ALL WEBS 2x3 DRY No.2 SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMB1-I	MT20	3.0	4.0	1.50	2.75
C	TTWW+m	MT20	4.0	6.0	1.75	1.00
D	TMW+w	MT20	2.0	4.0		
E	TTWW+m	MT20	4.0	6.0	1.75	1.00
F	TMB1-I	MT20	3.0	4.0	1.50	2.75
H	BMW1+w	MT20	2.0	4.0		
I	BSWWW1-I	MT20	5.0	6.0	3.00	3.00
J	BMW1+w	MT20	2.0	4.0		

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
	VERT	HORZ	DOWN	HORZ
B	43	0	43	0
J	386	0	386	0
I	845	0	845	0
H	386	0	386	0
F	43	0	43	0

VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH

PROVIDE ANCHORAGE AT BEARING JOINT B FOR 150 LBS FACTORED UPLIFT
PROVIDE ANCHORAGE AT BEARING JOINT F FOR 150 LBS FACTORED UPLIFT

UNFACTORED REACTIONS

JT	1ST LCASE	SNOW	LIVE	PERM LIVE	WIND	DEAD	SOIL
B	20	70 / 0	0 / 0	0 / 0	0 / 0	0 / -50	0 / 0
J	288	105 / 0	0 / 0	0 / 0	0 / 0	183 / 0	0 / 0
I	597	397 / 0	0 / 0	0 / 0	0 / 0	199 / 0	0 / 0
H	288	105 / 0	0 / 0	0 / 0	0 / 0	183 / 0	0 / 0
F	20	70 / 0	0 / 0	0 / 0	0 / 0	0 / -50	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, J, I, H, F

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1 CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX UNBRACED LENGTH	FACTORED MAX CSI (LC)
FR-TO		FROM TO		FR-TO			
A-B	0 / 10	-78.0 -78.0	0.01 (1)	J-C	-195 / 0	10.00	0.03 (1)
B-C	-75 / 0	-78.0 -78.0	0.01 (1)	C-I	-16 / 0	6.25	0.02 (1)
C-D	-13 / 0	-78.0 -78.0	0.75 (1)	I-D	-732 / 0	6.25	0.11 (1)
D-E	-13 / 0	-78.0 -78.0	0.75 (1)	I-E	-16 / 0	6.25	0.02 (1)
E-F	-75 / 0	-78.0 -78.0	0.01 (1)	H-E	-195 / 0	6.25	0.03 (1)
F-G	0 / 10	-78.0 -78.0	0.01 (1)			10.00	
B-J	0 / 42	-18.5 -18.5	0.26 (4)			10.00	
J-I	0 / 29	-18.5 -18.5	0.26 (4)			10.00	
I-H	0 / 29	-18.5 -18.5	0.26 (4)			10.00	
H-F	0 / 42	-18.5 -18.5	0.26 (4)			10.00	

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 21.0 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.75/1.00 (C-D:1), BC=0.26/1.00 (B-J:4), WB=0.11/1.00 (D-I:1), SSI=0.29/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY) (PSI)	SHEAR (PLI)	SECTION (PLI)
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.79 (I) (INPUT = 0.90)
JSI METAL= 0.36 (I) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318932	H27P	2	1	TRUSS DESC. JT 45147	E20051789


Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Fri May 15 09:38:20 2020 Page 1

ID:KXqzscD4uG5CTEOs4LGSuzSPyV-Wv3ziYNW5a?7o 2v 91Jvk43ZXsxW3Qsp93PmzGJ2n

0-03-0-03-0-06-0-29-0-26-0-215-0-53-0-018-0-4

Scale = 1:29.4

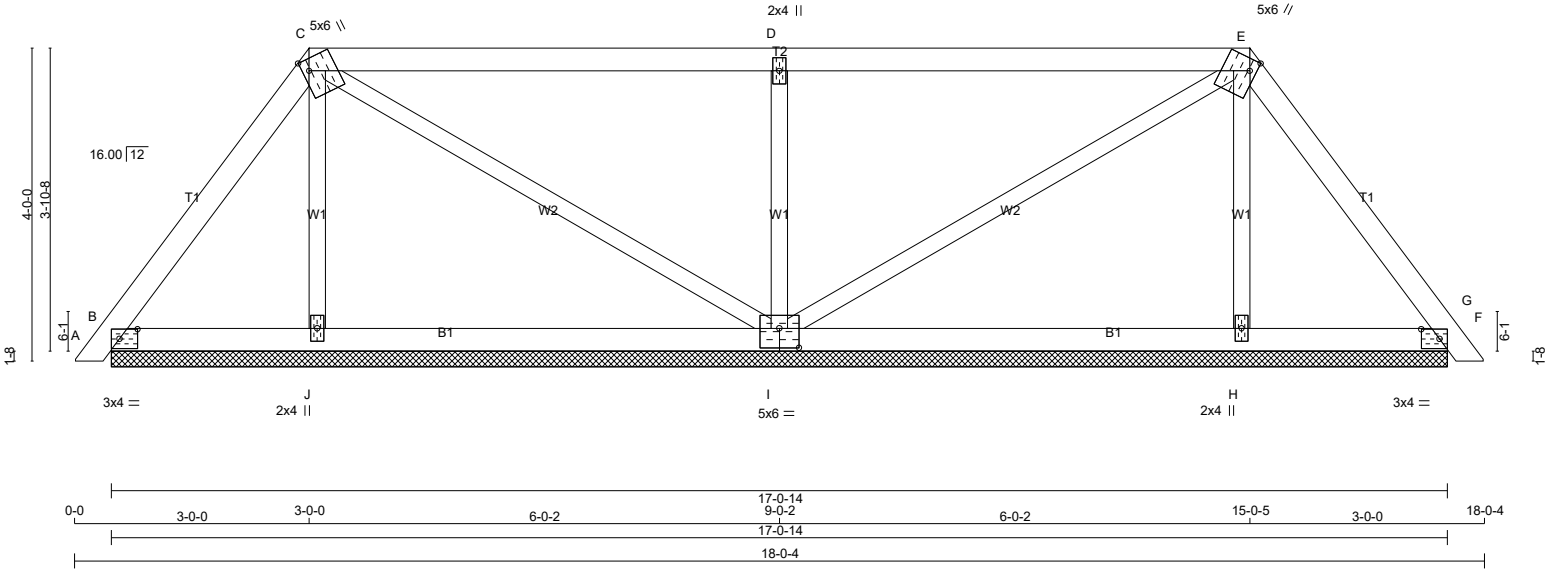

TOTAL WEIGHT = 2 X 63 = 127 lb

[M]

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2 SPF
C - E	2x4	DRY	No.2 SPF
E - G	2x4	DRY	No.2 SPF
B - I	2x4	DRY	No.2 SPF
I - F	2x4	DRY	No.2 SPF
ALL WEBS	2x3	DRY	No.2 SPF
DRY: SEASONED LUMBER.			

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMB1-I	MT20	3.0	4.0	1.50 2.75
C	TTWW+m	MT20	5.0	6.0	1.75 1.00
D	TMW+w	MT20	2.0	4.0	
E	TTWW+m	MT20	5.0	6.0	1.75 1.00
F	TMB1-I	MT20	3.0	4.0	1.50 2.75
H	BMW1+w	MT20	2.0	4.0	
I	BSWWW1-I	MT20	5.0	6.0	3.00 3.00
J	BMW1+w	MT20	2.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQRD	
		GROSS REACTION		GROSS REACTION		BRG		BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX		
B	204	0	204	0	0	17-0-14 (8-6-7)6-9			
J	286	0	286	0	0	17-0-14 (8-6-7)6-9			
I	722	0	722	0	0	17-0-14 (8-6-7)6-9			
H	286	0	286	0	0	17-0-14 (8-6-7)6-9			
F	204	0	204	0	0	17-0-14 (8-6-7)6-9			

VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH

UNFACTORED REACTIONS

1ST LCASE		MAX/MIN. COMPONENT REACTIONS							
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL		
B	142	109 / 0	0 / 0	0 / 0	0 / 0	32 / 0	0 / 0		
J	210	93 / 0	0 / 0	0 / 0	0 / 0	117 / 0	0 / 0		
I	509	341 / 0	0 / 0	0 / 0	0 / 0	168 / 0	0 / 0		
H	210	93 / 0	0 / 0	0 / 0	0 / 0	117 / 0	0 / 0		
F	142	109 / 0	0 / 0	0 / 0	0 / 0	32 / 0	0 / 0		

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, J, I, H, F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.		MAX. FACTORED	FACTORED	MEMB.		MAX. FACTORED	FACTORED
		FORCE (LBS)	VERT. LOAD LC1 (PLF)			FORCE (LBS)	MAX CSI (LC)
FR-TO			FROM TO	FR-TO			
A-B		0 / 10	-78.0 -78.0 0.01 (1)	J-C		-173 / 0	0.04 (1)
B-C		-95 / 0	-78.0 -78.0 0.09 (1)	C-I		-47 / 0	0.04 (1)
C-D		-9 / 0	-78.0 -78.0 0.48 (1)	I-D		-585 / 0	0.14 (1)
D-E		-9 / 0	-78.0 -78.0 0.48 (1)	I-E		-47 / 0	0.04 (1)
E-F		-95 / 0	-78.0 -78.0 0.09 (1)	H-E		-173 / 0	0.04 (1)
F-G		0 / 10	-78.0 -78.0 0.01 (1)				
B-J		0 / 55	-18.5 -18.5 0.15 (4)				
J-I		0 / 50	-18.5 -18.5 0.15 (4)				
I-H		0 / 50	-18.5 -18.5 0.15 (4)				
H-F		0 / 55	-18.5 -18.5 0.15 (4)				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL	=	21.0	PSF
		DL	=	6.0	PSF
BOT	CH.	LL	=	0.0	PSF
		DL	=	7.4	PSF
TOTAL LOAD		=	34.4	PSF	

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.48/1.00 (D-E:1) , BC=0.15/1.00 (F-H:4) , WB=0.14/1.00 (D-I:1) , SSI=0.23/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES			
PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.67 (I) (INPUT = 0.90)
JSI METAL= 0.31 (I) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318932	H28P	2	1	TRUSS DESC. JT 45147	E20051790

Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Fri May 15 09:38:22 2020 Page 1

ID:KXqzscD4uG5CTEOs4LGSuzSPyV-SHAj7EPmcBGYN68R0PCVOKqTrND?PP3iJ7eAUfzGJ2

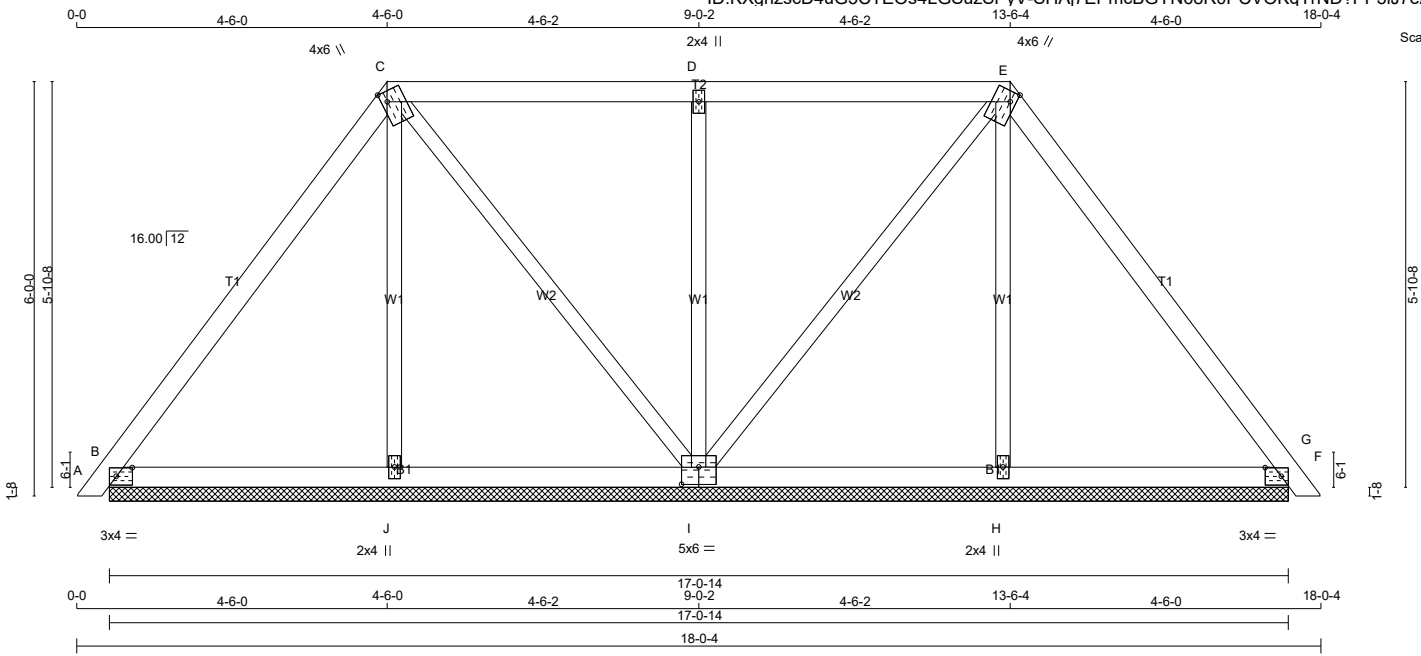

TOTAL WEIGHT = 2 X 71 = 142 lb

LUMBER				
N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF
C - E	2x4	DRY	No.2	SPF
E - G	2x4	DRY	No.2	SPF
B - I	2x4	DRY	No.2	SPF
I - F	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMB1-I	MT20	3.0	4.0	1.50 2.75
C	TTWW+m	MT20	4.0	6.0	1.75 1.00
D	TMW+w	MT20	2.0	4.0	
E	TTWW+m	MT20	4.0	6.0	1.75 1.00
F	TMB1-I	MT20	3.0	4.0	1.50 2.75
H	BMW1+w	MT20	2.0	4.0	
I	BSWWW1-I	MT20	5.0	6.0	3.00 3.00
J	BMW1+w	MT20	2.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	IN-SX	IN-SX
B	290	0	290	0	0	17-0-14 (8-6-7)9-8			
J	245	0	245	0	0	17-0-14 (8-6-7)9-8			
I	634	0	634	0	0	17-0-14 (8-6-7)9-8			
H	245	0	245	0	0	17-0-14 (8-6-7)9-8			
F	290	0	290	0	0	17-0-14 (8-6-7)9-8			

VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH

UNFACTORED REACTIONS

1ST LCASE		MAX/MIN. COMPONENT REACTIONS		PERM. LIVE		WIND		DEAD		SOIL	
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL	PERM. LIVE	WIND	DEAD	SOIL
B	203	141 / 0	0 / 0	0 / 0	0 / 0	63 / 0	0 / 0	0 / 0	0 / 0	63 / 0	0 / 0
J	180	79 / 0	0 / 0	0 / 0	0 / 0	101 / 0	0 / 0	0 / 0	0 / 0	101 / 0	0 / 0
I	445	308 / 0	0 / 0	0 / 0	0 / 0	138 / 0	0 / 0	0 / 0	0 / 0	138 / 0	0 / 0
H	180	79 / 0	0 / 0	0 / 0	0 / 0	101 / 0	0 / 0	0 / 0	0 / 0	101 / 0	0 / 0
F	203	141 / 0	0 / 0	0 / 0	0 / 0	63 / 0	0 / 0	0 / 0	0 / 0	63 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, J, I, H, F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 10	-78.0 -78.0	0.01 (1)	10.00	J-C	-146 / 0	0.08 (1)
B-C	-96 / 0	-78.0 -78.0	0.22 (1)	6.25	C-I	-86 / 0	0.08 (1)
C-D	0 / 1	-78.0 -78.0	0.27 (1)	10.00	I-D	-439 / 0	0.23 (1)
D-E	0 / 1	-78.0 -78.0	0.27 (1)	10.00	I-E	-86 / 0	0.08 (1)
E-F	-96 / 0	-78.0 -78.0	0.22 (1)	6.25	H-E	-146 / 0	0.08 (1)
F-G	0 / 10	-78.0 -78.0	0.01 (1)	10.00			
B-J	0 / 56	-18.5 -18.5	0.10 (4)	10.00			
J-I	0 / 53	-18.5 -18.5	0.10 (4)	10.00			
I-H	0 / 53	-18.5 -18.5	0.10 (4)	10.00			
H-F	0 / 56	-18.5 -18.5	0.10 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 21.0 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.27/1.00 (C-D:1), BC=0.10/1.00 (B-J:4), WB=0.23/1.00 (D-I:1), SSI=0.17/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.62 (C) (INPUT = 0.90)
JSI METAL= 0.28 (I) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318932	H29A	1	3	TRUSS DESC. JT 45147	E20051791

Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Fri May 15 09:42:37 2020 Page 1

ID:KXqnzscD4uG5CTEOs4LGSuzSPyV-VL57eQUIZYOMT18RSTGID5u1E93 fd1FylvAxNzGJ m

Scale = 1:37.5

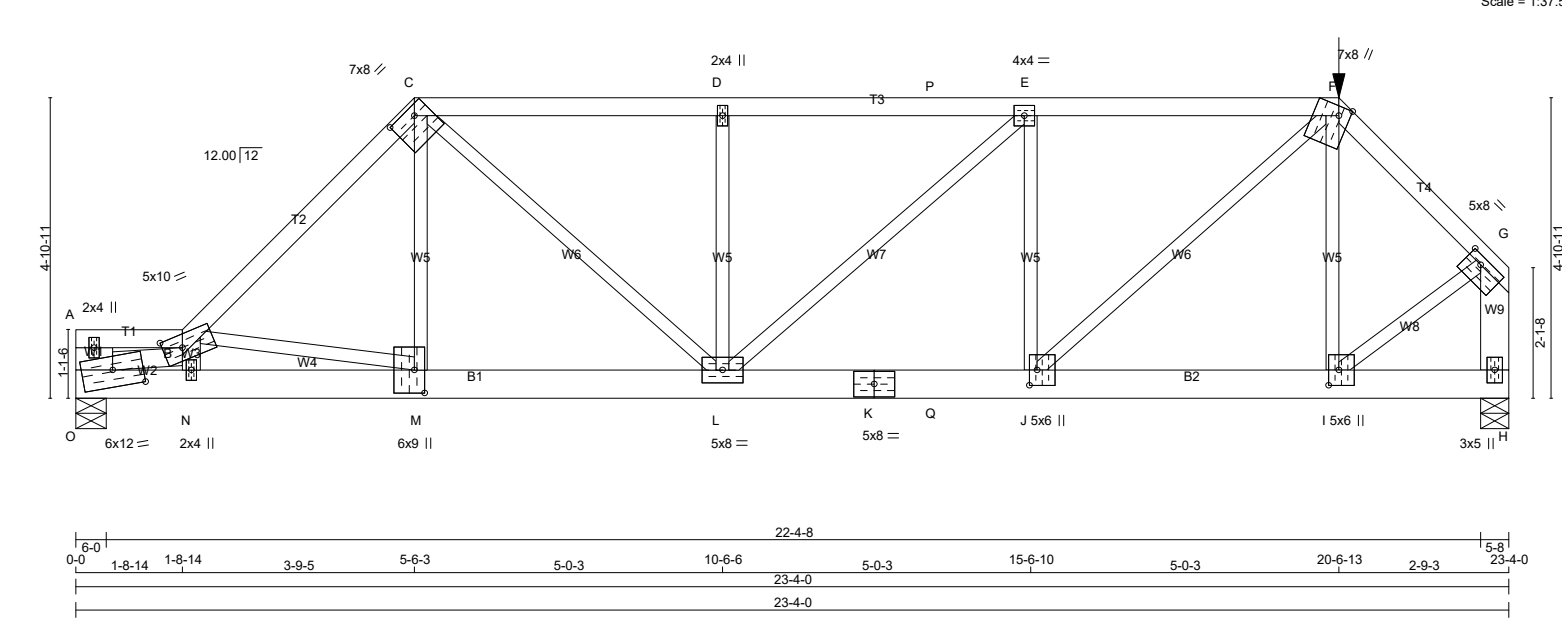

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
O - A	2x8	DRY	No.2
A - B	2x4	DRY	No.2
B - C	2x4	DRY	No.2
C - F	2x4	DRY	No.2
F - G	2x4	DRY	No.2
H - G	2x6	DRY	No.2
O - K	2x6	DRY	1650F 1.5E
K - H	2x6	DRY	1650F 1.5E
ALL WEBS	2x3	DRY	No.2
EXCEPT			
O - B	2x4	DRY	No.2
N - B	2x4	DRY	No.2

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 3 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
O - A	2	12
A - B	1	12
B - C	1	12
C - F	1	12
F - G	1	12
H - G	2	12
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
O - K	2	6
K - H	2	6
WEBS : (0.122"x3") SPIRAL NAILS		
2x3	1	6
2x4	1	6

STAGGER NAILS BY HALF THE SURFACE SPACING IN ADJACENT PLIES.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
O	9174	0	9174	0	6-0
H	9197	0	9197	0	5-8

UNFACTORED REACTIONS		1ST LCASE	MAX./MIN. COMPONENT REACTIONS
JT	COMBINED	SNOW	LIVE
O	6541	3992 / 0	0 / 0
H	6557	4004 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) O, H

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.27 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING		TOTAL LOAD CASES: (4)			
CHORDS		MAX. FACTORED		WEBS	
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	MAX LC1 (LC)	MEMB.	FORCE (LBS)
FR-TO		FROM	TO	FR-TO	
O - A	-68 / 0	0.0	0.0 0.00 (1)	O - B	-18440 / 0
A - B	0 / 0	-78.0	-78.0 0.01 (1)	N - B	-749 / 0
B - C	-12644 / 0	-78.0	-78.0 0.35 (1)	B - M	-8115 / 0
C - D	-12007 / 0	-78.0	-78.0 0.33 (1)	M - C	0 / 5933
D - P	-12007 / 0	-78.0	-78.0 0.31 (1)	C - L	0 / 3928
P - E	-12007 / 0	-79.6	-79.6 0.31 (1)	L - D	-339 / 0
E - F	-10873 / 0	-79.6	-79.6 0.29 (1)	L - E	0 / 1526
F - G	-7543 / 0	-78.0	-78.0 0.11 (1)	J - E	-1385 / 0
H - G	-8594 / 0	0.0	0.0 0.22 (1)	J - F	0 / 7468
O - N	0 / 17074	-707.9	-707.9 0.85 (1)	I - F	0 / 65
N - M	0 / 16924	-707.9	-707.9 0.85 (1)	I - G	0 / 6156
M - L	0 / 9078	-707.9	-707.9 0.51 (1)		
L - K	0 / 10872	-707.9	-707.9 0.47 (1)		
K - Q	0 / 10872	-707.9	-707.9 0.47 (1)		
Q - J	0 / 10872	-708.2	-708.2 0.47 (1)		
J - I	0 / 5305	-708.2	-708.2 0.33 (1)		
I - H	0 / 0	-708.2	-708.2 0.18 (1)		

FACTORED CONCENTRATED LOADS (LBS)		JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
F	20-6-13	-21	-21	---	FRONT	VERT	TOTAL	---	C1		

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	21.0	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD	=	34.4	PSF	

SPACING = 24.0 IN./C/C

LOADING IN ALL FLAT SECTIONS BASED ON A SLOPE OF 2.00/12 MINIMUM

GIRDER TYPE: CSIdGirder
START DISTANCE = 0-0
START SPAN CARRIED = 30-7-0
END DISTANCE = 23-4-0
END SPAN CARRIED = 30-7-0
END WALL WIDTH = 0-0
APPLIED TO FRONT SIDE OF BOTTOM CHORD.
- ADDTL LOADS BASED ON 55 % OF GSL.

GIRDER TYPE: CPrimeHip
LEFT SETBACK = 0-0
RIGHT SETBACK = 2-9-3
END SETBACK = 2-1-0
END WALL WIDTH = 0-0
CORNER FRAMING TYPE: CONVENTIONAL
END JACK TYPE: CONVENTIONAL
APPLIED TO FRONT SIDE
- ADDTL LOADS BASED ON 55 % OF GSL.
LOADS APPLIED TO FIRST 9-4-0 OF SPAN MEASURED FROM THE RIGHT.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.78")
CALCULATED VERT. DEFL.(LL) = L/999 (0.15")
ALLOWABLE DEFL.(TL)= L/360 (0.78")
CALCULATED VERT. DEFL.(TL) = L/977 (0.29")

CSI: TC=0.35/1.00 (B-C:1) , BC=0.85/1.00 (N-O:1) , WB=0.69/1.00 (B-M:1) , SSI=0.52/1.00 (M-N:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE LEFT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318932	H29A	1	3	TRUSS DESC. JT 45147	E20051791(2)

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMV+p	MT20	2.0	4.0		
B	TTWWW-m	MT20	5.0	10.0	2.50	3.75
C	TTWW-h	MT20	7.0	8.0	1.75	5.00
D	TMW+w	MT20	2.0	4.0		
E	TMWW-t	MT20	4.0	4.0		
F	TTWW+m	MT20	7.0	8.0	Edge	2.25
G	TMVW-t	MT20	5.0	8.0	1.50	3.00
H	BMV1+p	MT20	3.0	5.0		
I	BMWW+t	MT20	5.0	6.0	3.00	2.00
J	BMWW+t	MT20	5.0	6.0	3.00	1.50
K	BS-t	MT20	5.0	8.0		
L	BMWWW-t	MT20	5.0	8.0		
M	BMWW+t	MT20	6.0	9.0	4.50	2.00
N	BMW+w	MT20	2.0	4.0		
O	BMVW1m	MT20	6.0	12.0	3.25	6.00

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.87 (J) (INPUT = 0.90)
JSI METAL= 0.98 (B) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318932	H30G	1	1	TRUSS DESC. JT 45147	E20051792

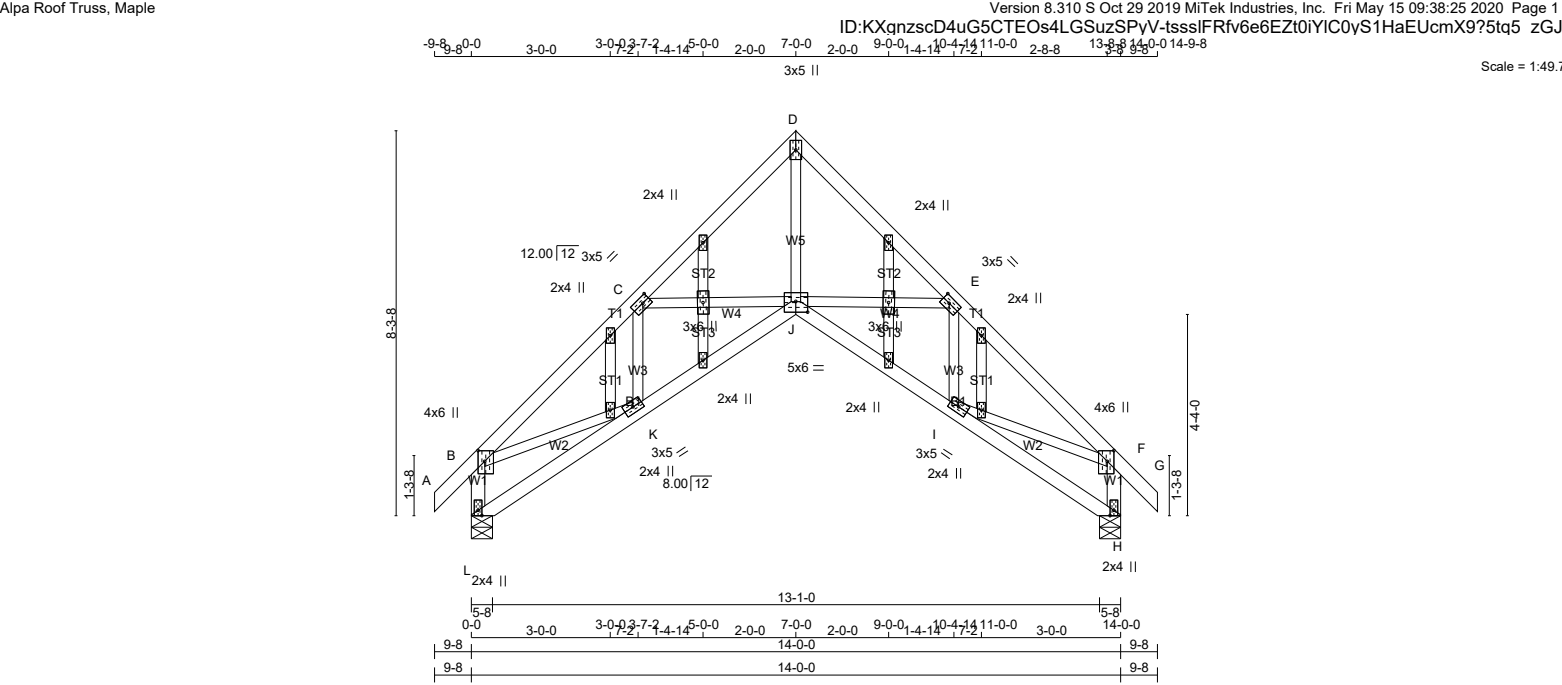

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2
D - G	2x4	DRY	No.2
L - B	2x4	DRY	No.2
H - F	2x4	DRY	No.2
L - J	2x4	DRY	No.2
J - H	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
EXCEPT			
ALL GABLE WEBS	2x3	DRY	No.2
DRY: SEASONED LUMBER.			
GABLE STUDS SPACED AT	2'-0" OC.		

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
B	TMVW+p	MT20	4.0	6.0 2.75 1.75
C	TMWW-t	MT20	3.0	5.0 1.50 2.00
D	TTW+p	MT20	3.0	5.0
E	TMWW-t	MT20	3.0	5.0 1.50 2.00
F	TMVW+p	MT20	4.0	6.0 2.75 1.75
H	BMV1+p	MT20	2.0	4.0 Edge
I	BMWW-t	MT20	3.0	5.0
I, K, N, O, P, Q, R, T				
I	NP+w	MT20	2.0	4.0
J	BBWWW-p	MT20	5.0	6.0 2.75 3.00
K	BMWW-t	MT20	3.0	5.0
L	BMV1+p	MT20	2.0	4.0 Edge
M, M, S, S				
M				
M	WMWW+t	MT20	3.0	6.0
S	WMWW+t	MT20	3.0	6.0
Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.				

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS			
	FACTORED	MAXIMUM FACTORED	INPUT
	GROSS REACTION	GROSS REACTION	BRG
JT	VERT	HORZ	DOWN
L	745	0	745
H	745	0	745

UNFACTORED REACTIONS			
	1ST LCASE	MAX /MIN. COMPONENT REACTIONS	
JT	COMBINED	SNOW	LIVE
L	530	331 / 0	0 / 0
H	530	331 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) L, H

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.93 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING			
TOTAL LOAD CASES: (4)			
CHORDS			
	MAX. FACTORED	FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	MAX. CS1 (LC)
FR-TO		FROM TO	LENGTH
A - B	0 / 25	-78.0 -78.0	0.05 (1)
B - C	-1090 / 0	-78.0 -78.0	0.13 (1)
C - D	-955 / 0	-78.0 -78.0	0.12 (1)
D - E	-955 / 0	-78.0 -78.0	0.12 (1)
E - F	-1090 / 0	-78.0 -78.0	0.13 (1)
F - G	0 / 25	-78.0 -78.0	0.05 (1)
L - B	-715 / 0	0.0 0.0	0.08 (1)
H - F	-715 / 0	0.0 0.0	0.08 (1)
L - K	0 / 4	-18.5 -18.5	0.05 (4)
K - J	0 / 941	-18.5 -18.5	0.18 (1)
J - I	0 / 941	-18.5 -18.5	0.18 (1)
I - H	0 / 4	-18.5 -18.5	0.05 (4)

DESIGN CRITERIA

SPECIFIED LOADS:			
TOP CH.	LL	=	21.0 PSF
	DL	=	6.0 PSF
BOT CH.	LL	=	0.0 PSF
	DL	=	7.4 PSF
TOTAL LOAD	=	34.4	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.47")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.04")
ALLOWABLE DEFL.(TL)= L/360 (0.47")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.07")

CSI: TC=0.13/1.00 (B-C:1) , BC=0.18/1.00 (J-K:1) , WB=0.25/1.00 (D-J:1) , SSI=0.09/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES			
PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.87 (L) (INPUT = 0.90)
JSI METAL= 0.46 (B) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318932	H30T	2	1	TRUSS DESC. JT 45147	E20051793

Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Fri May 15 09:38:26 2020 Page 1

ID:KXqzscD4uG5CTEOs4LGSuzSPyV-L2QEybSHqQmzrSCFFGRY9 C1 aiLDnIElcNdQzGJ2h

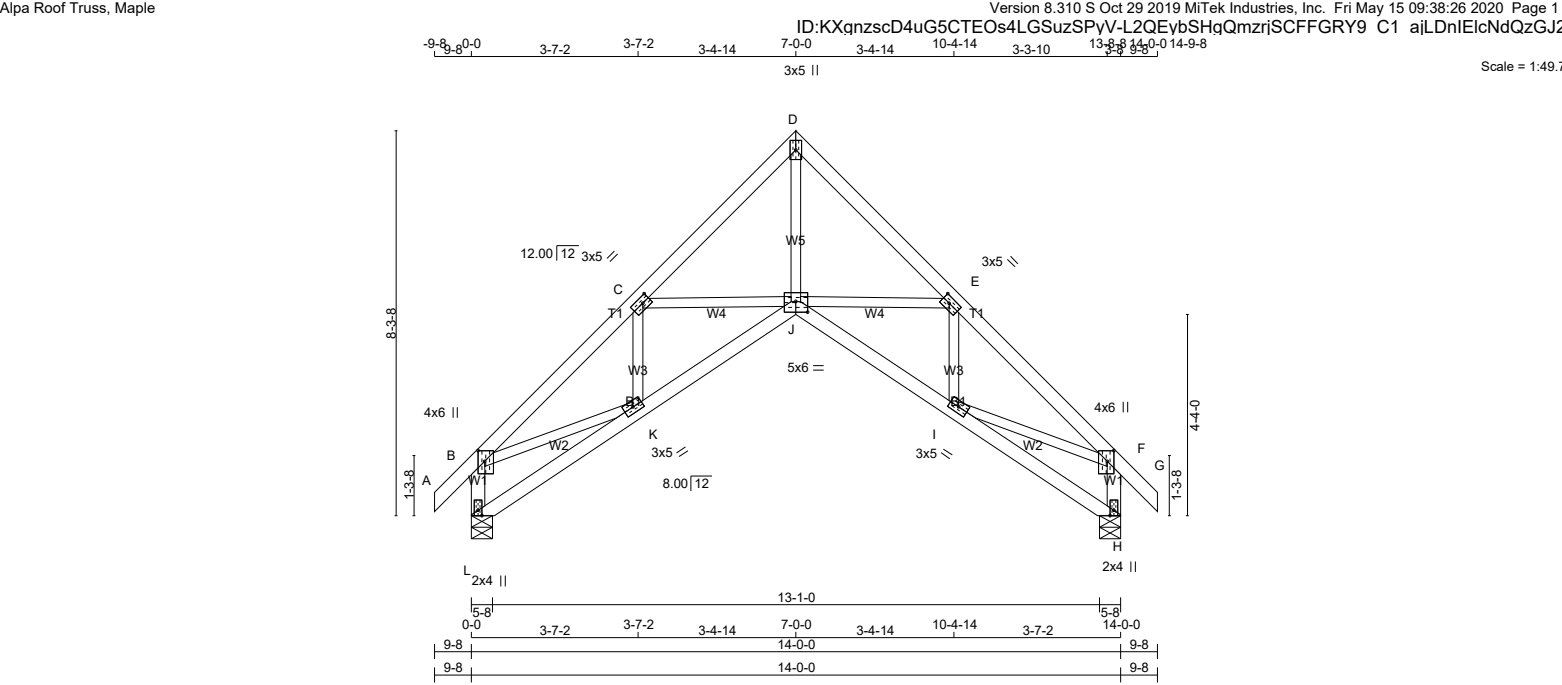

TOTAL WEIGHT = 2 X 65 = 129 lb

[M][F]

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - D	2x4	DRY	No.2
D - G	2x4	DRY	No.2
L - B	2x4	DRY	No.2
H - F	2x4	DRY	No.2
L - J	2x4	DRY	No.2
J - H	2x4	DRY	No.2

ALL WEBS	2x3	DRY	No.2
EXCEPT			

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	6.0	2.75 1.75
C	TMWW-t	MT20	3.0	5.0	1.50 2.00
D	TTW+p	MT20	3.0	5.0	
E	TMWW-t	MT20	3.0	5.0	1.50 2.00
F	TMVW+p	MT20	4.0	6.0	2.75 1.75
H	BMV1+p	MT20	2.0	4.0	Edge
I	BMWW-t	MT20	3.0	5.0	
J	BBWW-p	MT20	5.0	6.0	2.75 3.00
K	BMWW-t	MT20	3.0	5.0	
L	BMV1+p	MT20	2.0	4.0	Edge

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
L	745	0	745	0	0
H	745	0	745	0	0

UNFACTORED REACTIONS		1ST LCASE	MAX /MIN. COMPONENT REACTIONS	DEAD	SOIL
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND
L	530	331 / 0	0 / 0	0 / 0	0 / 0
H	530	331 / 0	0 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) L, H

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.93 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 25	-78.0 -78.0	0.05 (1)	10.00	J-D	0 / 1115	0.25 (1)
B-C	-1090 / 0	-78.0 -78.0	0.13 (1)	5.93	B-K	0 / 824	0.19 (1)
C-D	-955 / 0	-78.0 -78.0	0.12 (1)	6.23	K-C	-200 / 0	0.03 (1)
D-E	-955 / 0	-78.0 -78.0	0.12 (1)	6.23	I-E	-200 / 0	0.03 (1)
E-F	-1090 / 0	-78.0 -78.0	0.13 (1)	5.93	I-F	0 / 824	0.19 (1)
F-G	0 / 25	-78.0 -78.0	0.05 (1)	10.00	C-J	-124 / 0	0.03 (1)
L-B	-715 / 0	0.0 0.0	0.08 (1)	7.81	J-E	-124 / 0	0.03 (1)
H-F	-715 / 0	0.0 0.0	0.08 (1)	7.81			
L-K	0 / 4	-18.5 -18.5	0.05 (4)	10.00			
K-J	0 / 941	-18.5 -18.5	0.18 (1)	10.00			
J-I	0 / 941	-18.5 -18.5	0.18 (1)	10.00			
I-H	0 / 4	-18.5 -18.5	0.05 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 21.0 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.47")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.04")
ALLOWABLE DEFL.(TL)= L/360 (0.47")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.07")

CSI: TC=0.13/1.00 (B-C:1), BC=0.18/1.00 (J-K:1), WB=0.25/1.00 (D-J:1), SSI=0.09/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.87 (L) (INPUT = 0.90)
JSI METAL= 0.46 (B) (INPUT = 1.00)

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Fri May 15 09:56:05 2020 Page 1
ID:KXqnzscD4uG5CTEOs4LGSuzSPyV-rnvaDiGYHoBjOTvko9mnzULyLtvnz1kAl0ewlYzGlo8




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318932	H33	1	1	TRUSS DESC. JT 45147	E20051795

Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Fri May 15 09:38:29 2020 Page 1

ID:KXqnzscD4uG5CTEOs4LGSuzSPyV-ld6NbdU9zL8YiBAnxNq8AocXVBY9YQtkwjr2ElzGJ2e

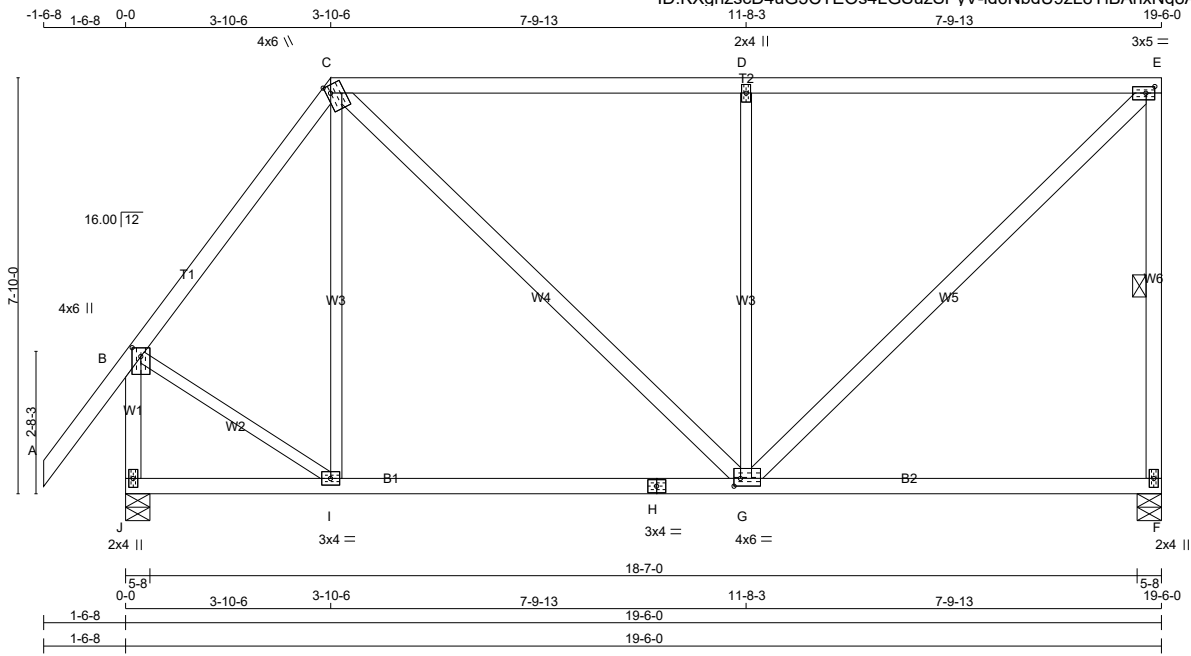

TOTAL WEIGHT = 101 lb

LUMBER				
N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF
C - E	2x4	DRY	No.2	SPF
F - E	2x4	DRY	No.2	SPF
J - B	2x4	DRY	No.2	SPF
J - H	2x4	DRY	No.2	SPF
H - F	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF
C - G	2x4	DRY	No.2	SPF
G - E	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
B	TMVW+p	MT20	4.0	6.0 2.00 2.00
C	TTWW+m	MT20	4.0	6.0 1.75 1.00
D	TMW+w	MT20	2.0	4.0
E	TMVW-t	MT20	3.0	5.0 1.50 2.00
F	BMV1+p	MT20	2.0	4.0
G	BMVWW-t	MT20	4.0	6.0 1.75 1.50
H	BS-t	MT20	3.0	4.0
I	BMVW-t	MT20	3.0	4.0
J	BMV1+p	MT20	2.0	4.0

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	IN-SX	IN-SX
F	941	0	941	0	0	5-8	1-8		
J	1070	0	1070	0	0	5-8	1-9		

UNFACTORED REACTIONS		1ST LCASE		MAX./MIN. COMPONENT REACTIONS	
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND
F	671	409 / 0	0 / 0	0 / 0	0 / 0
J	760	479 / 0	0 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, J

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.13 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-F.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. LC1 (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 52	-78.0 -78.0	0.15 (1)	10.00	I-C	-114 / 37	0.13 (1)
B-C	-670 / 0	-78.0 -78.0	0.22 (1)	6.25	C-G	0 / 387	0.06 (1)
C-D	-677 / 0	-78.0 -78.0	0.88 (1)	5.13	G-D	-756 / 0	0.87 (1)
D-E	-678 / 0	-78.0 -78.0	0.88 (1)	5.13	G-E	0 / 941	0.15 (1)
F-E	-883 / 0	0.0 0.0	0.24 (1)	6.25	B-I	0 / 462	0.10 (1)
J-B	-1049 / 0	0.0 0.0	0.15 (1)	7.68			
J-I	0 / 0	-18.5 -18.5	0.14 (4)	10.00			
I-H	0 / 398	-18.5 -18.5	0.33 (4)	10.00			
H-G	0 / 398	-18.5 -18.5	0.33 (4)	10.00			
G-F	0 / 0	-18.5 -18.5	0.29 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:		
TOP CH.	LL =	21.0 PSF
	DL =	6.0 PSF
BOT CH.	LL =	0.0 PSF
	DL =	7.4 PSF
TOTAL LOAD	=	34.4 PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.65")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.02")
ALLOWABLE DEFL.(TL)= L/360 (0.65")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.10")

CSI: TC=0.88/1.00 (D-E:1), BC=0.33/1.00 (G-I:4), WB=0.87/1.00 (D-G:1), SSI=0.30/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES				
PLATE	GRIP(DRY)	SHEAR	SECTION	
(PSI)	(PLI)	(PLI)		
MAX MIN	MAX MIN	MAX MIN		
MT20	650	371	1747	788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.84 (E) (INPUT = 0.90)
JSI METAL= 0.28 (B) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Fri May 15 09:56:06 2020 Page 1



TOTAL WEIGHT = 5 X 47 = 236 lb

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	2.0	4.0		
C	TMWW-t	MT20	3.0	4.0	1.50	1.75
D	TMV+p	MT20	2.0	4.0		
E	BVMW1+i	MT20	3.0	8.0	3.00	0.50
F	BMVW1-p	MT20	3.0	4.0	1.25	2.00

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 3'-8".

1ST CASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
F	496	231 / 0	0 / 0	0 / 0	0 / 0	266 / 0	0 / 0
E	408	162 / 0	0 / 0	0 / 0	0 / 0	246 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRAC	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED MAX CSI (LC)
FR-TO		FROM TO		LENGTH	FR-TO		
F-B	-237 / 0	0.0	0.0 0.03 (1)	7.81	F-C	-373 / 0	0.30 (1)
A-B	0 / 45	-78.0	-78.0 0.18 (1)	10.00	C-E	-214 / 0	0.07 (1)
B-C	0 / 26	-78.0	-78.0 0.23 (1)	10.00			
C-D	-25 / 0	-78.0	-78.0 0.22 (1)	6.25			
E-D	-119 / 0	0.0	0.0 0.08 (1)	7.81			
F-E	0 / 237	-64.8	-64.8 0.62 (4)	10.00			

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED
BY USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

TOP	CH.	LL	=	21.0	PSF
		DL	=	6.0	PSF
BOT	CH.	LL	=	0.0	PSF
		DL	=	7.4	PSF
TOTAL LOAD			=	34.4	PSF

*** NON STANDARD GIRDER ***
ADDT'L USER-DEFINED LOADS APPLIED TO ALL
LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.26")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.26")
CALCULATED VERT. DEFL.(TL) = L/ 556 (0.17")

CSI: TC=0.23/1.00 (B-C:1) , BC=0.62/1.00 (E-F:4) ,
WB=0.30/1.00 (C-F:1) , SSI=0.25/1.00 (E-F:4)

DOL LUMBER=0.94 NAIL=0.94 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

PLATE	GRIP(DRY)		SHEAR		SECTION	
	(PSI)		(PLI)		(PLI)	
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.77 (F) (INPUT = 0.90)
JSI METAL= 0.16 (E) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318932	H34TA	1	1	TRUSS DESC. JT 45147	E20051797

Alpa Roof Truss, Maple

ID:KXqnzscD4uG5CTEOs4LGSuzSPyV-i0D7?JWPVYOGyUKA2oscFDi2B?EU0TL1O1K8lezGJ2c

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Fri May 15 09:38:31 2020 Page 1

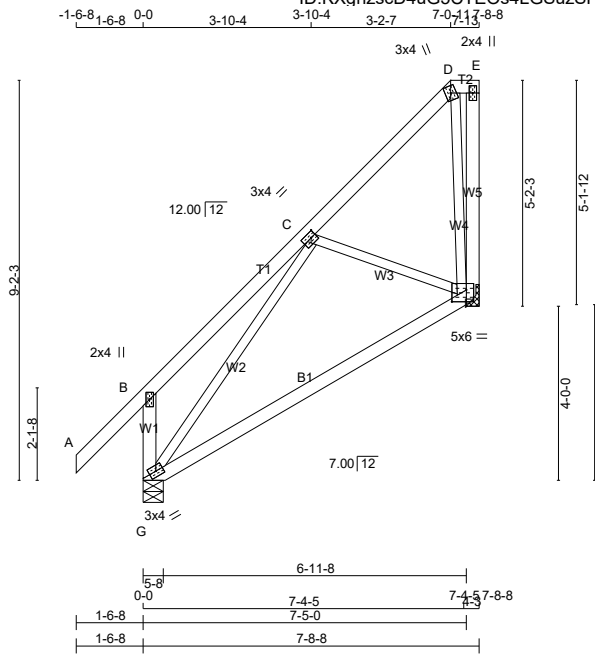

TOTAL WEIGHT = 44 lb

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY No.2	SPF
D - E	2x4	DRY No.2	SPF
F - E	2x4	DRY No.2	SPF
G - B	2x4	DRY No.2	SPF
G - F	2x4	DRY No.2	SPF
ALL WEBS	2x3	DRY No.2	SPF
DRY: SEASONED LUMBER.			

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMV+p	MT20	2.0	4.0	
C	TMWW-t	MT20	3.0	4.0	1.50 1.50
D	TTW+m	MT20	3.0	4.0	
E	TMV+p	MT20	2.0	4.0	
F	BVMWW1-p	MT20	5.0	6.0	3.25 4.00
G	BMVW1-t	MT20	3.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM	FACTORED	INPUT	REQRD
		GROSS REACTION	GROSS REACTION	DOWN	BRG	BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX
F	372	0	372	0	0	MECHANICAL
G	500	0	500	0	5-8	1-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 3-8.

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
F	265	162 / 0	0 / 0	0 / 0	0 / 0	103 / 0	0 / 0
G	354	231 / 0	0 / 0	0 / 0	0 / 0	123 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) G

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.		FORCE	FACTORED	MEMB.		FORCE	FACTORED
		(LBS)	VERT. LOAD			(LBS)	MAX
			(PLF)				CSI (LC)
			MAX				UNBRAC
			CSI (LC)				LENGTH
FR-TO		FROM	TO	FR-TO			
A-B	0 / 45	-78.0	-78.0 0.15 (1)	10.00	G-C	-356 / 0	0.29 (1)
B-C	0 / 22	-78.0	-78.0 0.16 (1)	10.00	C-F	-188 / 0	0.05 (1)
C-D	-46 / 0	-78.0	-78.0 0.12 (1)	6.25	D-F	-105 / 0	0.04 (1)
D-E	0 / 0	-78.0	-78.0 0.01 (1)	10.00			
F-E	-25 / 0	0.0	0.0 0.01 (1)	7.81			
G-B	-243 / 0	0.0	0.0 0.03 (1)	7.81			
G-F	0 / 224	-18.5	-18.5 0.33 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL	=	21.0	PSF
		DL	=	6.0	PSF
BOT	CH.	LL	=	0.0	PSF
		DL	=	7.4	PSF
TOTAL LOAD		=	34.4	PSF	

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.26")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.26")
CALCULATED VERT. DEFL.(TL) = L/ 502 (0.18")

CSI: TC=0.16/1.00 (B-C:1), BC=0.33/1.00 (F-G:4), WB=0.29/1.00 (C-G:1), SSI=0.10/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.71 (C) (INPUT = 0.90)
JSI METAL= 0.15 (G) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318932	J2	6	1	TRUSS DESC. JT 45147	E20051798

Alpa Roof Truss, Maple

ID:KXqnzscD4uG5CTEOs4LGSuzSPyV-ACnVDeX2GGW7ZevMcWNroQEAPPdcl ABch3ir4zGJ2b

Scale = 1:53.4

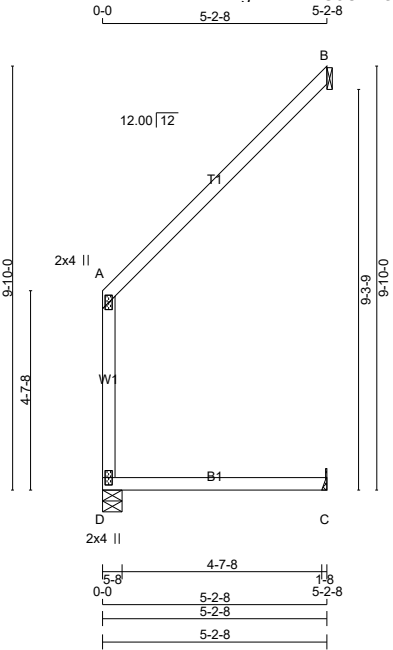

TOTAL WEIGHT = 6 X 19 = 117 lb

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	DRY	LUMBER	DESCR.
D - A	2x4	DRY	No.2	SPF
A - B	2x4	DRY	No.2	SPF
D - C	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMV+p	MT20	2.0	4.0	
D	BMV1+p	MT20	2.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG
	VERT	HORZ	DOWN	HORZ		
D	251	0	251	0	5-8	1-8
B	191	0	191	0	1-8	1-8
C	60	0	60	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT C. MINIMUM BEARING LENGTH AT JOINT C = 1-8.

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) B

UNFACTORED REACTIONS

JT	1ST LCASE	MAX./MIN. COMPONENT REACTIONS					
		COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD
D	179	109 / 0	0 / 0	0 / 0	0 / 0	70 / 0	0 / 0
B	132	101 / 0	0 / 0	0 / 0	0 / 0	31 / 0	0 / 0
C	47	8 / 0	0 / 0	0 / 0	0 / 0	39 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) D

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	FACTORED LC1 MAX CSI (LC)	MEMB. UNBRAC LENGTH	FR-TO	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)
D-A	-215 / 0	0.0	0.0 0.10 (1)	7.81			
A-B	-9 / 0	-78.0	-78.0 0.33 (1)	10.00			
D-C	0 / 0	-18.5	-18.5 0.15 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:			
TOP	CH.	LL	= 21.0 PSF
		DL	= 6.0 PSF
BOT	CH.	LL	= 0.0 PSF
		DL	= 7.4 PSF
TOTAL LOAD		=	34.4 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.02")
ALLOWABLE DEFL.(TL)= L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.06")

CSI: TC=0.33/1.00 (A-B:1) , BC=0.15/1.00 (C-D:4) ,
WB=0.00/1.00 (n/a:0) , SSI=0.12/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES				
PLATE	GRIP(DRY)	SHEAR	SECTION	
	(PSI)	(PLI)	(PLI)	
	MAX	MIN	MAX	MIN
MT20	650	371	1747	1987

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.16 (A) (INPUT = 0.90)
JSI METAL= 0.11 (A) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Fri May 15 09:38:33 2020 Page 1



TOTAL WEIGHT = 5 X 11 = 53 lb

DRY: SEASONED LUMBER.

PLATES (table is in inches)

	FACTORED		MAXIMUM FACTORED			INPUT	REQD
	GROSS REACTION		GROSS REACTION			BRG	BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
E	273	0	273	0	0	5-8	1-8
C	3	0	3	0	-46	1-8	1-8
D	0	0	12	0	-7	1-8	1-8

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C , D

PROVIDE ANCHORAGE AT BEARING JOINT C FOR 150 LBS FACTORED	UPLIFT
PROVIDE ANCHORAGE AT BEARING JOINT D FOR 150 LBS FACTORED	UPLIFT

UNFACTORED REACTIONS

1ST LCASE MAX./MIN. COMPONENT REACTIONS

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED

LOADING

TOTAL LOAD CASES: (5)

CHORDS					WEBS				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)		
FR-TO		FROM TO			FR-TO				
E-B	-245 / 0	0.0	0.0	0.04 (5)		7.81			
A-B	0 / 52	-78.0	-78.0	0.15 (1)		10.00			
B-C	-45 / 0	-78.0	-78.0	0.12 (1)		6.25			
E-D	0 / 0	-18.5	-18.5	0.03 (5)		10.00			

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

PATTERN-LOADING CHECK APPLIED TO THIS TRUSS

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL	=	21.0	PSF
		DL	=	6.0	PSF
BOT	CH.	LL	=	0.0	PSF
		DL	=	7.4	PSF
TOTAL LOAD				=	34.4 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.00")

CSI: TC=0.15/1.00 (A-B:1) , BC=0.03/1.00 (D-E:5) ,
WB=0.00/1.00 (n/a:0) , SSI=0.06/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY) (PSI)		SHEAR (PLI)		SECTION (PLI)	
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.21 (B) (INPUT = 0.90)
JSI METAL= 0.12 (B) (INPUT = 1.00)

LUS – Double Shear Joist Hangers



All LUS hangers have double shear nailing. This patented innovation distributes the load through two points on each joist nail for greater strength. It also allows the use of fewer nails, faster installation and the use of common nails for all connections.

Material: 18 gauge

Finish: G90 galvanized

Design:


- Factored resistances are in accordance with CSA O86-14.
- Uplift resistances have been increased 15%. No further increase is permitted.
- Wood shear is not considered in the factored resistances given. The specifier must ensure that the joist and header capacities are capable of withstanding these loads.

Installation:


- Use all specified fasteners.
- Nails: 16d = 0.162" dia. x 3½" long common wire, 10d = 0.148" x 3" long common wire.
- Double shear nails must be driven at an angle through the joist or truss into the header to achieve the table loads.
- Not designed for welded or nailer applications.

Options:

- These hangers cannot be modified




Typical LUS Installation

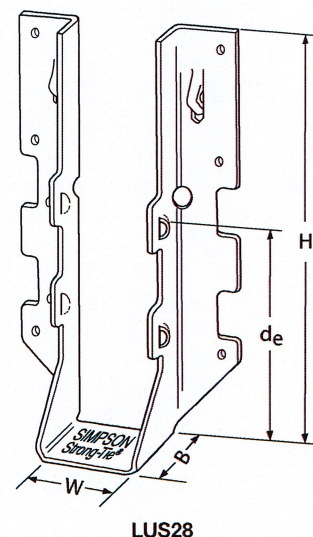


LUS28

Model No.	Ga.	Dimensions (in.)				Fasteners		Factored Resistance (lb.)			
		W	H	B	d _e ¹	Face	Joist	D.Fir-L		S-P-F	
								Uplift (K _p =1.15)	Normal (K _p =1.00)	Uplift (K _p =1.15)	Normal (K _p =1.00)
LUS24	18	1½	3½	1¾	1 15/16	(4) 10d	(2) 10d	710	1630	645	1155
LUS24-2	18	3½	3½	2	1 13/16	(4) 16d	(2) 16d	835	2020	590	1435
LUS26	18	1½	4¾	1¾	3½	(4) 10d	(4) 10d	1420	2170	1290	1630
LUS26-2	18	3½	4¾	2	4	(4) 16d	(4) 16d	1720	2595	1545	1920
LUS26-3	18	4½	4¾	2	3¼	(4) 16d	(4) 16d	1720	2595	1545	2340
LUS28	18	1½	6½	1¾	3¾	(6) 10d	(6) 10d	1420	2520	1290	1790
LUS28-2	18	3½	7	2	4	(6) 16d	(4) 16d	1720	3325	1545	2575
LUS28-3	18	4½	6¼	2	3¼	(6) 16d	(4) 16d	1720	3325	1545	2375
LUS210	18	1½	7 15/16	1¾	3¾	(8) 10d	(4) 10d	1420	2785	1290	2210
LUS210-2	18	3½	9	2	6	(8) 16d	(6) 16d	2580	4500	2320	3195
LUS210-3	18	4½	8¾	2	5¼	(8) 16d	(6) 16d	2580	3345	2320	2375

1. d_e is the distance from the seat of the hanger to the highest joist nail.



Dome Double Shear Nailing prevents tabs breaking off (available on some models).
U.S. Patent 5,603,580



Double Shear Nailing Top View.



LIMIT STATES DESIGN

This technical bulletin is effective until June 30, 2022, and reflects information available as of April 1, 2020. This information is updated periodically and should not be relied upon after June 30, 2022. Contact Simpson Strong-Tie for current information and limited warranty or see strongtie.com.

© 2020 Simpson Strong-Tie Company Inc.

T-SPECLUS20 3/20 exp. 6/22

(800) 999-5099
strongtie.com

HUS/LJS – Double Shear Joist Hangers



All hangers have double shear nailing. This patented innovation distributes the load through two points on each joist nail for greater strength. It also allows the use of fewer nails, faster installation and the use of common nails for all connections. Do not bend or remove tabs.

Material: See table

Finish: G90 galvanized

Design:


- Factored resistances are in accordance with CSA O86 -14.
- Uplift resistances have been increased 15%. No further increase is permitted.
- Wood shear is not considered in the factored resistances given. The specifier must ensure that the joist and header capacities are capable of withstanding these loads.

Installation:


- Use all specified fasteners
- Nails: 16d = 0.162" dia. x 3½" long common wire
- Double shear nails must be driven at an angle through the joist or truss into the header to achieve the table loads
- Not designed for welded or nailer applications

Options:


- See current catalogue for options




LJS26DS




HUS210
(HUS26, HUS28, similar)



Typical LJS26DS
Installation




Typical HUS
Installation




Typical HUS Installation
(Truss Designer to provide fastener
quantity for connecting multiple
members together)

Model No.	Ga.	Dimensions (in.)				Fasteners		Factored Resistance (lb.)			
		W	H	B	d _e ¹	Face	Joist	D.Fir-L		S-P-F	
								Uplift (K ₀ =1.15) lb.	Normal (K ₀ =1.00) lb.	Uplift (K ₀ =1.15) lb.	Normal (K ₀ =1.00) lb.
LJS26DS	18	1½	5	3½	4⅞	(16) 16d	(6) 16d	2055	4265	1460	4115
HUS26	16	1⅝	5⅞	3	3½	(14) 16d	(6) 16d	2705	4940	2065	3875
HUS28	16	1⅝	7⅜	3	6⅜	(22) 16d	(8) 16d	3605	5365	2675	4345
HUS210	16	1⅝	9⅜	3	7⅜	(30) 16d	(10) 16d	4505	5795	4010	4740
HUS1.81/10	16	1⅜	9	3	8	(30) 16d	(10) 16d	4505	6450	4010	5200


1. d_e is the distance from the seat of the hanger to the highest joist nail.



Dome Double Shear Nailing prevents tabs breaking off (available on some models).
U.S. Patent 5,603,580



Double Shear Nailing Side View. Do not bend tab back.



Double Shear Nailing Top View.




LIMIT
STATES
DESIGN

This technical bulletin is effective until June 30, 2022, and reflects information available as of April 1, 2020. This information is updated periodically and should not be relied upon after June 30, 2022. Contact Simpson Strong-Tie for current information and limited warranty or see strongtie.com.

© 2020 Simpson Strong-Tie Company Inc.

T-SPECHUS20 3/20 exp. 6/22

(800) 999-5099
strongtie.com

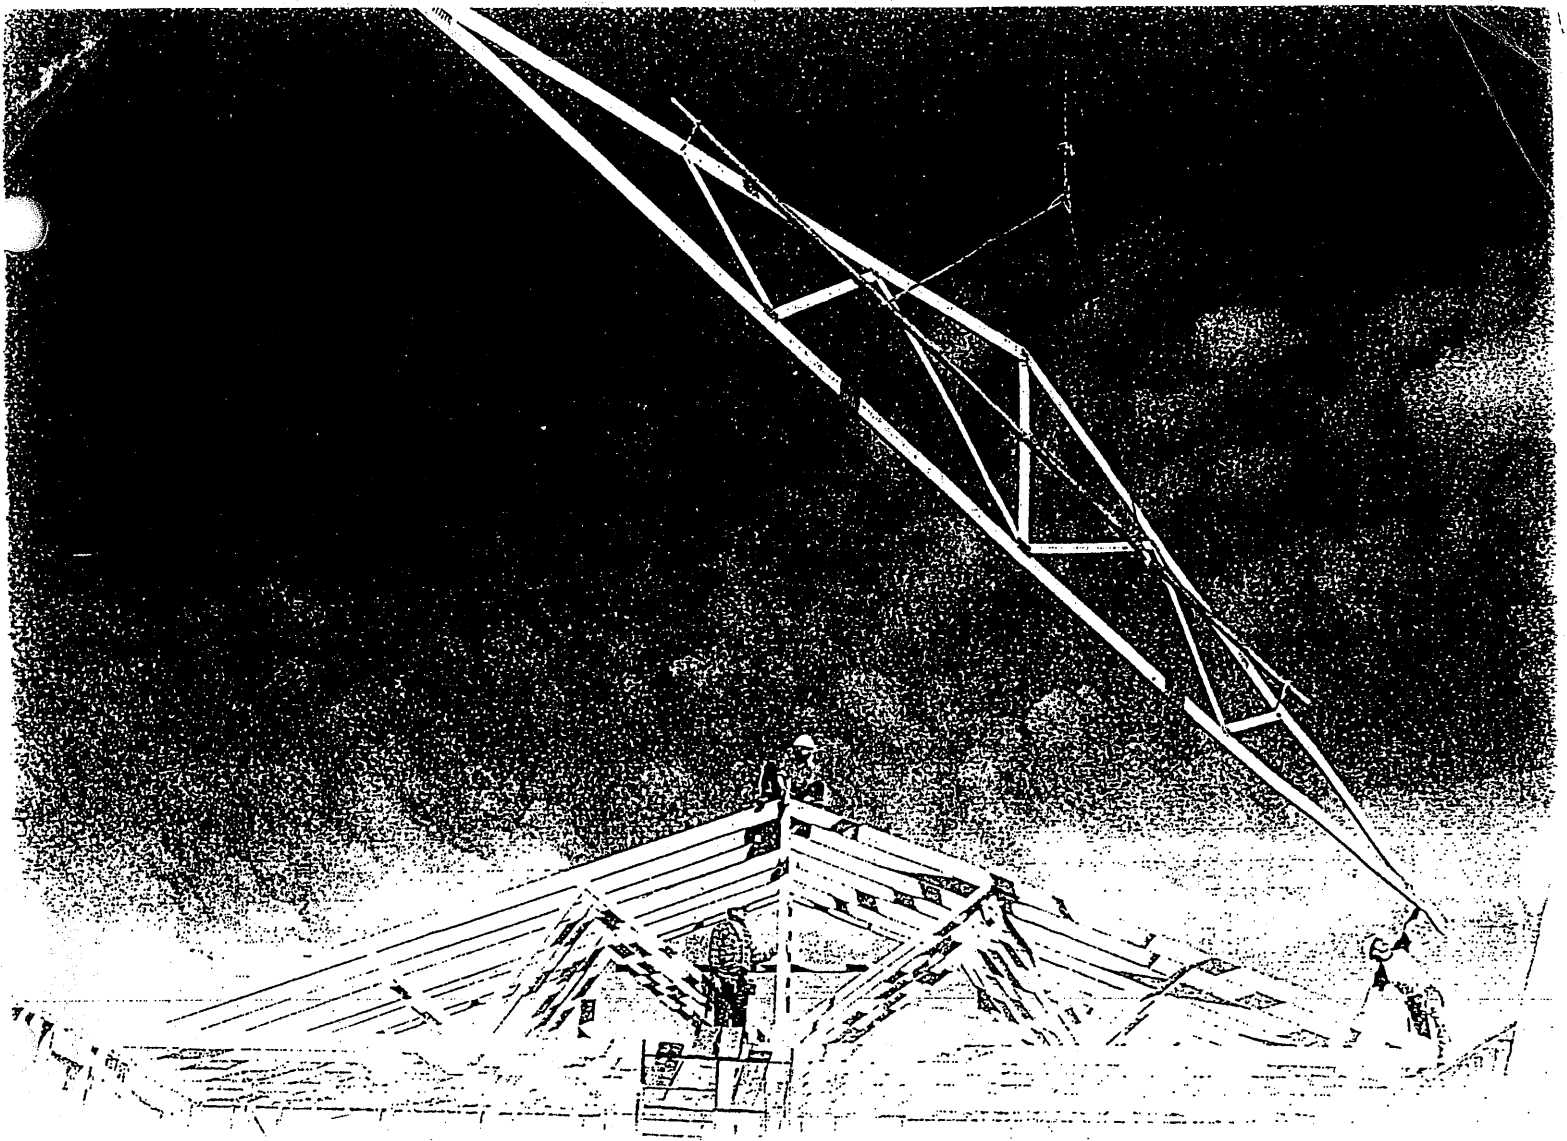


Wood Truss Installation

**A Guide to proper handling, erecting and bracing
metal plate connected wood trusses**

Table of Content

Warning.....	4
1 Unloading & Lifting.....	5
2 Job Site Handling.....	5
3 Hoisting.....	6
4 Beginning the Erection Process.....	7
5 Erection Tolerance.....	8
6 Bracing.....	8
7 Bracing Requirements for 3 Planes of Roof.....	9
8 Stacking Materials.....	10
Caution Notes.....	11

Warning



General

Familiarity with the Construction Design Documents, the Truss Design Drawings, and Truss Placement Plans (if required by the Construction Design Documents) is required to properly erect, brace, and connect the trusses to the building system.

All of the care and quality involved in the design and manufacture of wood trusses can be jeopardized if the trusses are not properly handled, erected, and braced.

The consequences of improper handling, erecting, and bracing may be a collapse of the structure, which at best is a substantial loss of time and materials, and at worst is a loss of life. The majority of truss accidents occur during truss installation and not as a result of improper design or manufacture.

Prior to truss erection, the builder/erector shall meet with the erection crew for a safety and planning meeting, making sure each crew member understands his or her roles and responsibilities during the erection process.

Temporary Erection Bracing

Trusses are not marked in any way to identify the frequency, or location of temporary erection bracing.

All temporary bracing shall comply with the latest edition of *Commentary and Recommendations for Handling, Installing & Bracing Metal Plate Connected Wood Trusses* (HIB), published by the Truss Plate Institute, and/or as specified in the Construction Design Documents prepared by the building designer.

Permanent Truss Bracing

Permanent bracing for the roof or floor trusses is the responsibility of the building designer and should be shown on the Construction Design Documents. Permanent bracing locations for individual compression members of a wood truss are shown on the Truss Design Drawings, and shall be installed by the building or erection contractor. This bracing is needed for the proper performance of individual trusses within the roof or floor system. The design and connection of the bracing to the truss and then to the overall building system is the responsibility of the building designer, and is in addition to the permanent bracing plan, which is also specified by the building designer.

Special Design Requirements


Special design requirements, such as wind bracing, portal bracing, seismic bracing, diaphragms, shear walls, or other load transfer elements and their connections to wood trusses must be considered separately by the building designer, who shall determine size, location, and method of connections for all bracing as needed to resist these forces.

1

Unloading & Lifting

Never handle trusses flat

Beginning with the unloading process, and throughout all phases of construction, care must be taken to avoid lateral bending of trusses, which can cause damage to the lumber and metal connector plates at the joints.





Avoid lateral bending

- Use special care in windy weather.
- If using a crane within 10 feet of an electric line, contact the local power company.
- If using a crane within 5 miles of an airport, contact the airport 30 days prior to erection to learn about any safety regulations that must be followed.


2

Job Site Handling

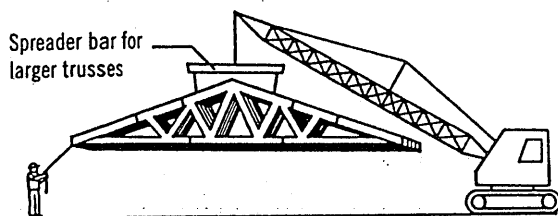


All trusses should be picked up at the top chords in a vertical position only

Proper banding and smooth ground allow for unloading of trusses without damage. This should be done as close to the building site as possible to minimize handling. Do not break banding until installation begins. Hand erection of trusses is allowed, provided excessive lateral bending is prevented.




Do not store unbraced bundles upright

If trusses are stored vertically they shall be braced in a manner that will prevent tipping or topping. Generally cutting of the banding is done just prior to installation.



Do not store on uneven ground

If trusses are stored horizontally, blocking should be used on eight to ten foot centers, or as required, to minimize lateral bending and moisture gain.




Care should be exercised when removing banding to avoid damaging trusses.


During long term storage, trusses shall be protected from the environment in a manner that provides for adequate ventilation of the trusses. If tarpaulins or other material is used, the ends shall be left open for ventilation. Plastic is not recommended, since it can trap moisture.

3 Hoisting


All trusses that are erected one at a time shall be held safely in position by the erection equipment until such time as all necessary bracing has been installed and the ends of the trusses are securely fastened to the building.




Avoid lateral bending

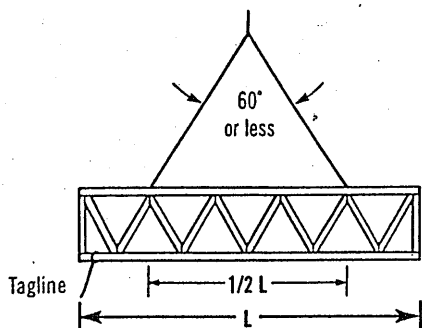


$L \leq 30'$

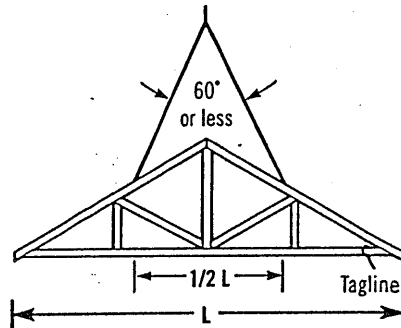


Truss sling is acceptable where these criteria are met.

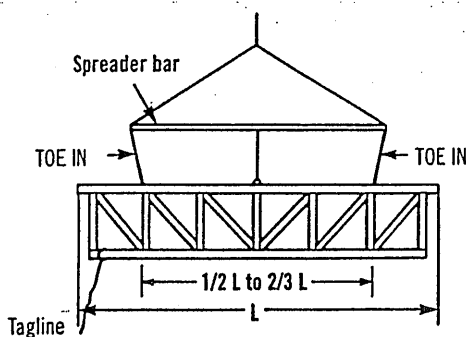


$30' < L \leq 60'$

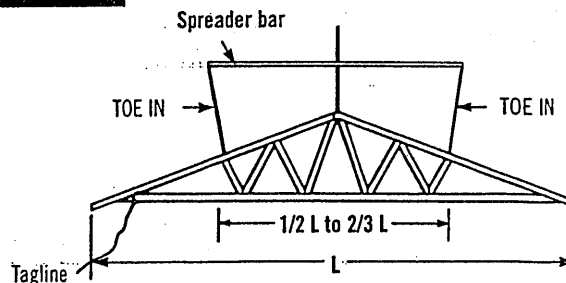

Use spreader bar in all other cases. It should be noted that the lines from the ends of the spreader bar "TOE IN"; if these lines should "TOE OUT" the truss may fold in half.

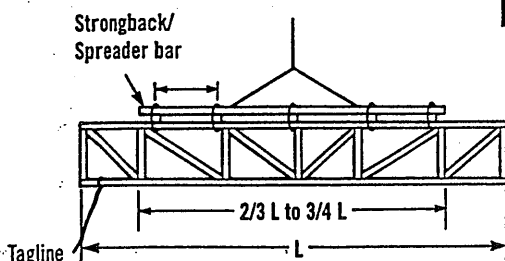

$L > 60'$

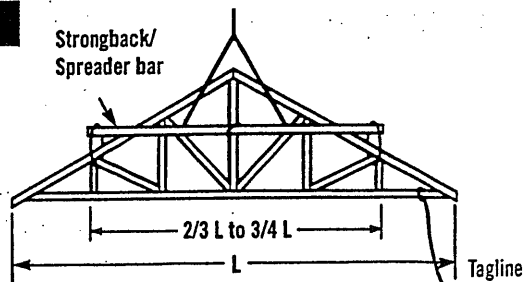


For lifting trusses with spans in excess of 60 feet, it is recommended that a strongback/spreader bar be used as illustrated. The strongback/spreader bar should be attached to the top chord and web members at intervals of approximately 10 feet. Further, the strongback/spreader bar should be at or above the mid-height of the truss to prevent overturning. The strongback/spreader bar can be of any material with sufficient strength to safely carry the weight of the truss and sufficient rigidity to adequately resist bending of the truss.

4 Beginning the Erection Process

It is important for the builder or erection contractor to provide substantial bracing for the first truss erected. The two or more trusses making up the rest of the first set are tied to and rely upon the first truss for stability. Likewise, after this first set of trusses is adequately cross-braced, the remaining trusses installed rely upon this first set for stability. Thus, the performance of the truss bracing system depends to a great extent on how well the first group of trusses is braced.

Ground Brace - Exterior




One satisfactory method ties the first unit of trusses off to a series of braces that are attached to a stake driven into the ground and securely anchored. The ground brace itself should be supported as shown below or it is apt to buckle. Additional ground braces in the opposite direction, inside the building, are also recommended.

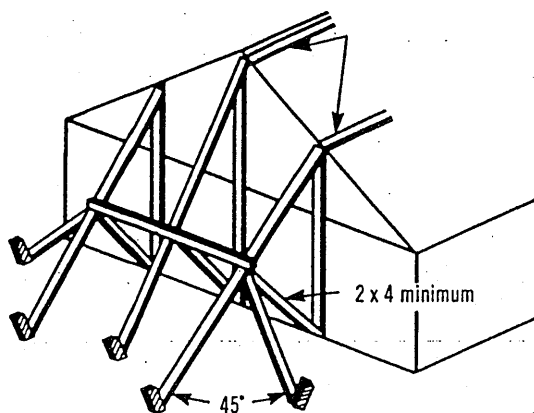

Note: Locate ground braces for first truss directly in line with all rows of top chord continuous lateral bracing (either temporary or permanent).

Ground Brace - Interior

Another satisfactory method where height of building or ground conditions prohibit bracing from the exterior is to tie the first truss rigidly in place from the interior at the floor level, provided the floor is substantially completed and capable of supporting the ground bracing forces. Securely fasten the first truss to the middle of the building. Brace the bracing similar to exterior ground bracing shown at left. Set trusses from the middle toward the end of the building. Properly cross-brace the first set of trusses before removing floor braces and setting remaining trusses.

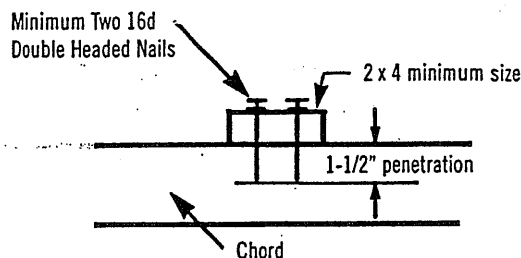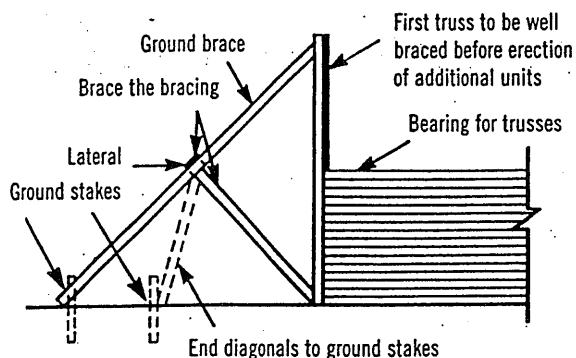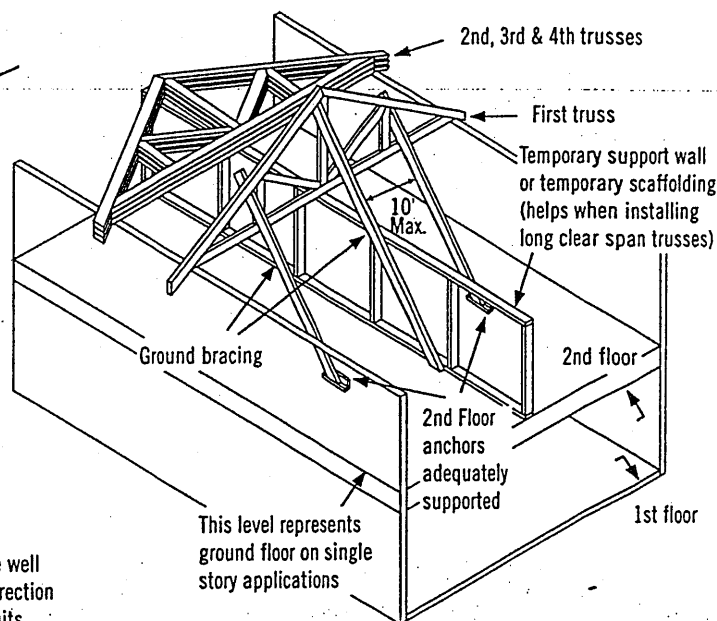


Inadequate size of bracing material or inadequate fastening is a major cause of erection dominoing.


5 Erection Tolerance

Complying with erection tolerances is critical to achieving an acceptable roof or floor line, and to accomplishing effective bracing. Setting trusses within tolerance the first time will prevent the need for the hazardous practice of respacing or adjusting trusses when roof sheathing or roof purlins are installed. Trusses leaning or bowing can cause nails to miss the top chords when sheathing is applied, and create cumulative stresses on the bracing, which is a frequent cause of dominoing.


When sheathing, make sure nails are driven into the top chord of the trusses.

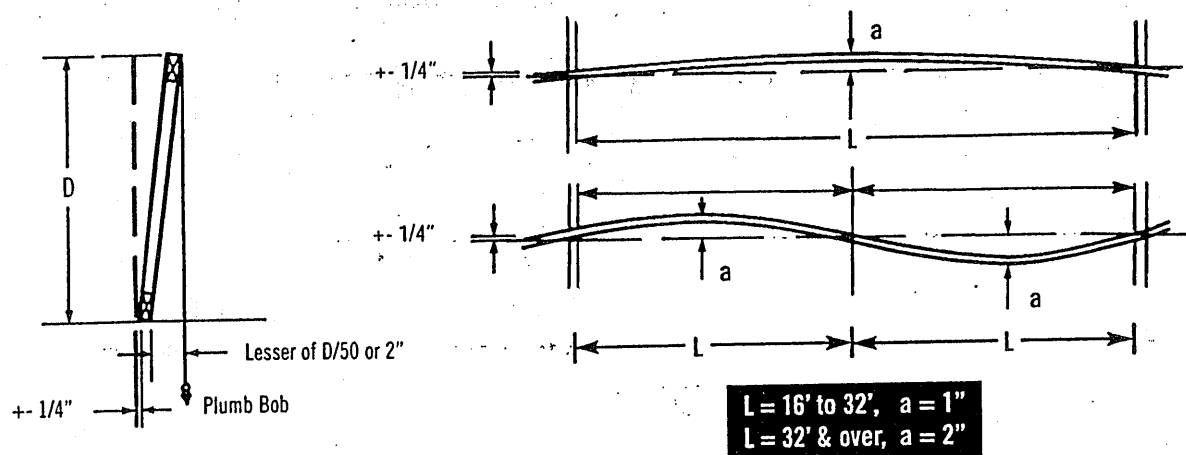

6 Bracing




Do not install trusses on temporarily connected supports



Do not walk on unbraced trusses



Do not walk on trusses or gable ends lying flat




Nails in withdrawal (parallel to force)

All anchors, hangers, tie-downs, seats, bearing ledgers, etc., that are part of the supporting structure shall be accurately and properly placed and permanently attached before truss installation begins. No trusses shall ever be installed on anchors or ties that have temporary connections to the supporting structure.

Nailing scabs to the end of the building to brace the first truss is not recommended.

All nailing of bracing should be done so that nails are driven perpendicular to the direction of force, as shown at right.




Well nailed (perpendicular to force)

7 Bracing Requirements for 3 Planes of Roof

Temporary erection bracing must be applied to three planes of the roof system to ensure stability: Plane 1) Top Chord (sheathing), Plane 2) Bottom Chord (ceiling plane), and Plane 3) Web Member plane or vertical plane perpendicular to trusses.

1) Top Chord Plane

Most important to the builder or erection contractor is bracing in the plane of the top chord. Truss top chords are susceptible to lateral buckling before they are braced or sheathed.

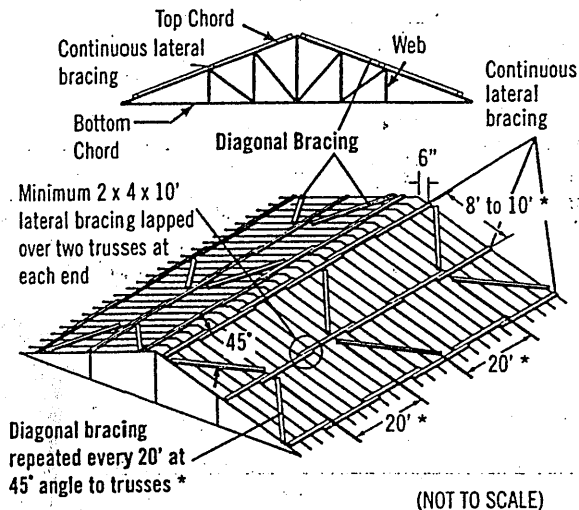


Exact spacing between trusses should be maintained as bracing is installed to avoid the hazardous practice of removing bracing to adjust spacing. This act of "adjusting spacing" can cause trusses to topple if connections are removed at the wrong time.

3) Web Member Plane

"X" bracing, as shown, is critical in preventing trusses from leaning or dominoing. Repeat as shown to create a succession of rigid units.


X-bracing should be installed on vertical web members wherever possible, at or near lateral bracing. Plywood or OSB may be substituted for X-bracing.

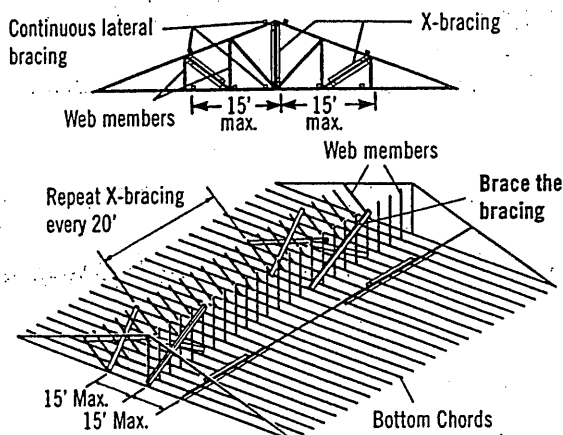

Note: Top chords and some web members are not shown, in order to make drawings more readable.


2) Bottom Chord Plane

In order to hold proper spacing on the bottom chord, temporary bracing is recommended on the top of the bottom chord.

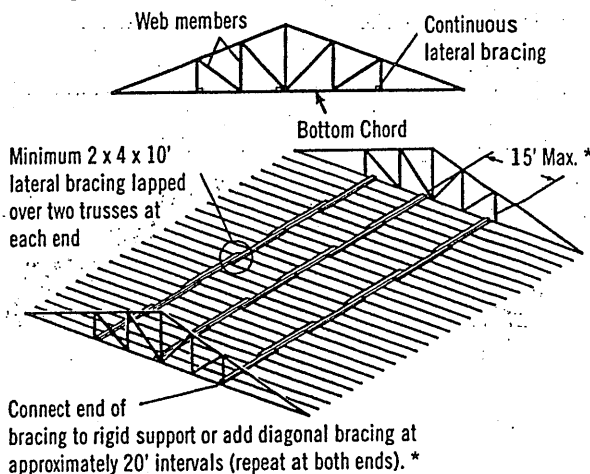


* Long spans, heavy loads or other spacing configurations may require closer spacing between lateral bracing and closer intervals between diagonals. Consult the building designer or HIB and DSB (Recommended Design Specification for Temporary Bracing of Metal-Plate Connected Wood Trusses) for details.

Diagonal or cross-bracing is very important!



Do not use short blocks to brace individual trusses without a specific bracing plan detailing their use





Bracing requirements using the same principles apply to parallel chord trusses

8 Stacking Materials

Do not proceed with building completion until all bracing is securely and properly in place


Never stack materials on unbraced or inadequately braced trusses




Platform must be rigidly braced

Proper distribution of construction materials is a must during construction.



Never stack materials near a peak

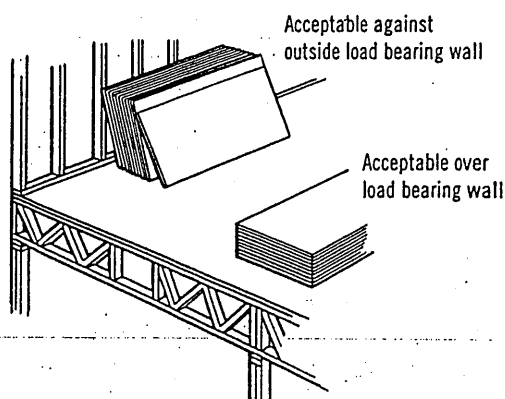

Never stack materials on the cantilever of a truss




Always stack materials over two or more trusses.





Single truss

Never overload small groups or single trusses. Position load over as many trusses as possible.

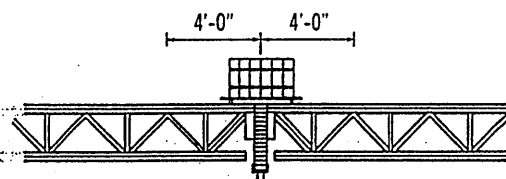

Roofing and mechanical contractors are cautioned to stack materials only along outside supporting members or directly over inside supporting members. Trusses are not designed for dynamic loads (i.e., moving vehicles). Extreme care should be taken when loading and stacking construction materials (rolled roofing, mechanical equipment, etc.) on the roof or floor system.

Never cut any structural member of a truss.

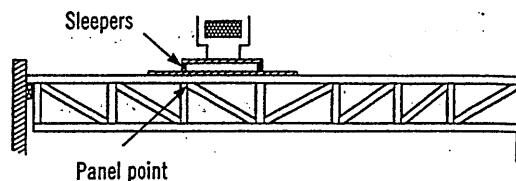

Sleepers for mechanical equipment should be located at panel points (joints) or over main supporting members, and only on trusses that have been designed for such loads.

Caution Notes

Errors in building lines and/or dimensions, or errors by others shall be corrected by the contractor or responsible construction trade subcontractor or supplier before erection of trusses begins.

Cutting of nonstructural overhangs is considered a part of normal erection and shall be done by the builder or erection contractor.

Any field modification that involves the cutting, drilling, or relocation of any structural truss member or connector plate shall not be done without the approval of the truss manufacturer or a licensed design professional.

The methods and procedures outlined are intended to ensure that the overall construction techniques employed will put floor and roof trusses safely in place in a completed structure. These recommendations for bracing wood trusses originate from the collective experience of leading technical personnel in the wood truss industry, but must, due to the nature of responsibilities involved, be presented only as a guide for use by a qualified building designer, builder, or erection contractor. Thus, the Wood Truss Council of America expressly disclaims any responsibility for damages arising from the use, application, or reliance on the recommendations and information contained herein.

[Selected text and figures referenced or reproduced from HIB and DSB by permission of the Truss Plate Institute, Madison, WI.]

THE CANADIAN WOOD TRUSS ASSOCIATION



L'ASSOCIATION CANADIENNE DES FABRICANTS DE FERMES DE BOIS

1400 Blair Place, Suite 210, Ottawa, ON K1J 9B8
Tel.: 613-747-5544 Fax: 613-747-6264



Wood Truss Council of America

One WTCA Center
6300 Enterprise Lane, Madison, WI 53719-1140
Tel.: 608-274-4849 Fax: 608-274-3329
wtca@woodtruss.com www.woodtruss.com