

Gas Slide-in Range

Installation manual

NX60T871155/AA

NX60*8*****

Samsung 6.0 cu. ft. Gas Range
w/ 22K double burner & air fry in
stainless steel

See
attach.












BE2-1410

July 24, 2020


SAMSUNG

Gas range components

Tools needed

			
Flat-blade screwdriver	Phillips screwdriver	Open-end or adjustable wrench	Pipe wrench (2)
			
1/4" Nut driver	Pencil and ruler	Level	Pipe joint compound
			
Utility knife	Soapy water solution	Pliers	

See
attach.
BE2-140
July 24, 2020.

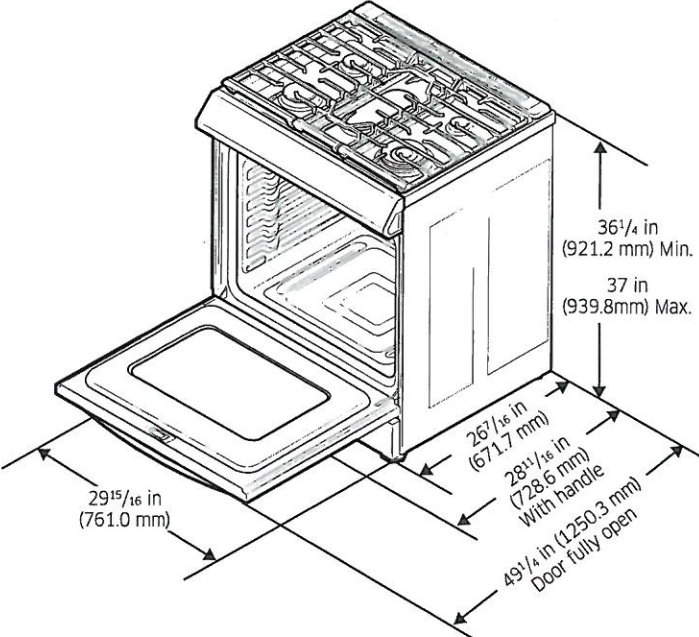

Gas range components

Installation requirements

See
attach.

BE2-140
July 24, 2020

Location requirements



Clearances and dimensions

BEFORE YOU BEGIN to install this appliance, refer to the following information, dimensions, and clearances. Do not locate the range where it may be subject to strong drafts. Provide adequate clearances between the range and adjacent combustible surfaces. These dimensions must be met for safe use of the range. The location of the electrical outlet and gas piping may be adjusted to meet the following dimensions and clearances.

For installation in Canada, a free-standing range is not to be installed closer than 4.7 in (12 cm) from any adjacent surface.


CAUTION

This range has been designed to comply with the maximum allowable wood cabinet temperature of 194 °F (90 °C). Make sure the wall covering, countertops, and cabinets around the range can withstand the heat (up to 194 °F [90 °C]) generated by the range. If not, discoloration, delamination, or melting may occur.

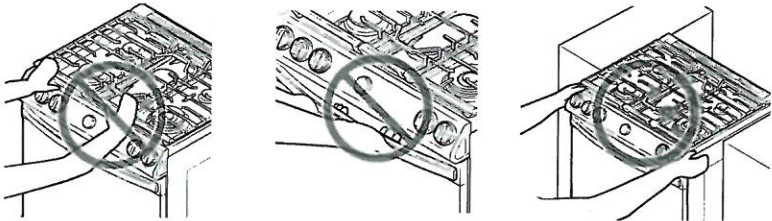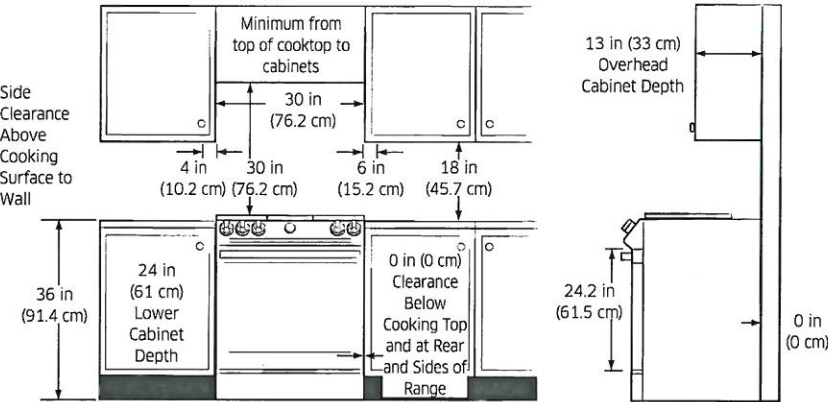

CAUTION

Do not grasp the knob, handle and push when you install.

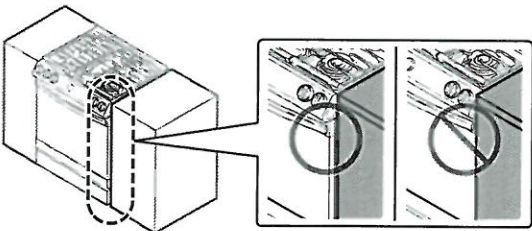

CAUTION

DO NOT install the oven so that the door is flush with the cabinet. For OTR over Gas Stove, please follow local GAS CODE.

Installation requirements

Installation requirements

Minimum dimensions

⚠ WARNING

If overhead cabinets are provided, a range hood should also be provided that projects horizontally a minimum of 5 in (12.7 cm) beyond the front of the cabinets. This will dissipate any heat buildup in the overhead cabinets to prevent death, personal injury, and/or fire hazard. The ventilating hood must be constructed of sheet metal not less than 0.0122" thick. Install above the cooktop with a clearance of not less than 1/4" between the hood and the underside of the combustible material or metal cabinet. The hood must be at least as wide as the appliance and centered over the appliance. Clearance between the cooking surface and the ventilation hood surface must never be less than 24 inches.

Exception 1 : Installation of a listed microwave oven or cooking appliance over the cooktop shall conform to the installations packed with that appliance.


- 30-in (76.2-cm) minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or If no 30-in (76.2-cm) minimum clearance, 24-in (61-cm) minimum when the bottom of the wood or metal cabinet is protected by not less than 0.25-in (0.64-cm) flame-retardant millboard covered with not less than no. 28 MSG sheet steel, 0.015-in (0.038-cm) stainless steel, 0.024-in (0.061-cm) aluminum, or 0.020-in (0.051-cm) copper.
- 18-in (45.7-cm) minimum between the countertop and the adjacent cabinet bottom.

Exception 2 : For island installation, maintain 2-1/2" minimum from cutout to back edge of countertop and 4" minimum from cutout to side edges of countertop.

IMPORTANT:

To eliminate the risk of burns or fire caused by reaching over heated surface units, avoid having cabinet storage space located above the surface units. If you have cabinet storage space over the heating elements, you can reduce the risk by installing a range hood that projects horizontally a minimum of 5 inches beyond the bottom of the cabinets.

Installation guide

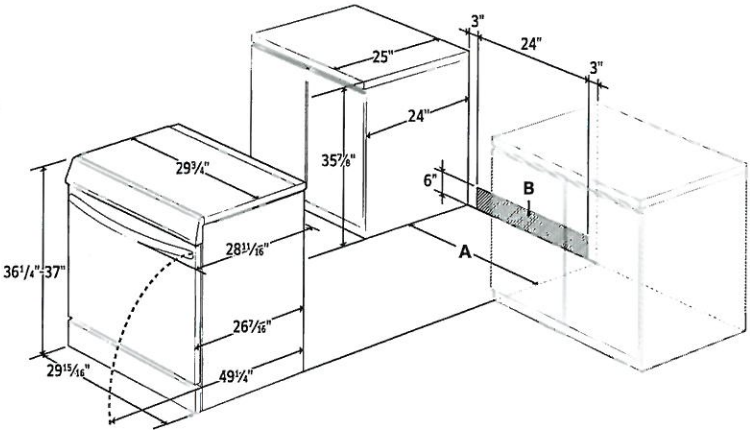

A: Cabinet opening 30" (76.2)

IMPORTANT: If your cabinet have height over 37", this range cannot be installed without supporting unit like hard block.

Whirlpool®

20 cu. ft. French Door Refrigerator

WRF550CDH

See
attach.

BE2-140
July 24, 2020



Fingerprint-Resistant Stainless
WRF550CDHZ

Key Features & Benefits

Counter Depth Design
Add additional kitchen space with styling that fits virtually flush with the countertop.

Adjustable Gallon Door Bins
Move these adjustable bins anywhere in the door for increased loading flexibility.

Temperature-Controlled Full-Width Drawer
Store wide items like party platters and sheet cakes or preserve large amounts of meat and cheese at just the right temperature.

Capacity	
Total Capacity	20 cu. ft.
Refrigerator Capacity	16 cu. ft.
Freezer Capacity	5 cu. ft.

General Features & Properties	
Humidity-Controlled Crispers	
Fingerprint Resistant	
Two-Tier Freezer Storage	
Spillproof Glass Shelves	
Factory-Installed Icemaker	
Exterior Ice and Water Dispenser with EveryDrop® Filtration	
LED Interior Lighting	
Fast Cool Option	
Adaptive Defrost	


Electrical Details	
Amps	20
Volts	115

Technical Details	
Refrigerator Type	French Door
Number of Doors	3
Number of Interior Refrigerator Shelves	5
Number of Refrigerator Door Bins	2 Adjustable, 4 Fixed
Number of Interior Freezer Shelves	3 Plastic
Lighting Type	LED
Ice Maker	Factory Installed
Ice Maker Location	Refrigerator
Dispenser Type	Exterior Ice and Water

Dimensions	
Product Dimensions (H x W x D)	70-1/8" x 35-7/8" x 30-3/4"
Depth with Door Open 90°	43"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear

Reference Material

- [Dimension Guide](#)
- [Use & Care Guide](#)
- [Energy Guide](#)
- [Warranty](#)

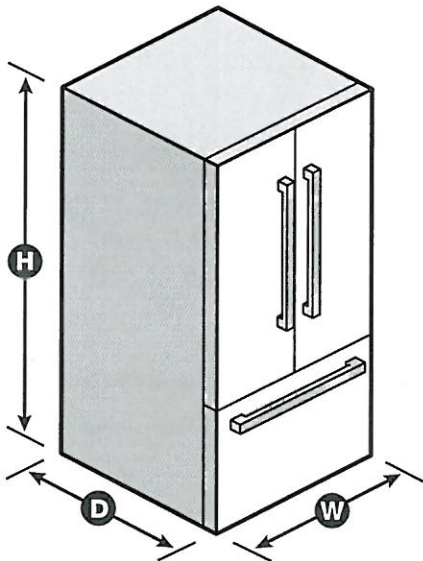

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRF550CDHSPECSHEETV01.

Gas Slide-in Range

Installation manual NX60T871155/AA

NX60*8****

Samsung 6.0 cu. ft. Gas Range
w/ 22K double burner & air fry in
stainless steel



BE2-140

July 24, 2020



Gas range components

AT

PT

BE2-140

July 24, 2020.


Tools needed



Flat-blade
screwdriver



Phillips screwdriver



Open-end or
adjustable wrench




Pipe wrench (2)



1/4" Nut driver




Pencil and ruler



Level



Pipe joint compound




Utility knife



Soapy water
solution



Pliers

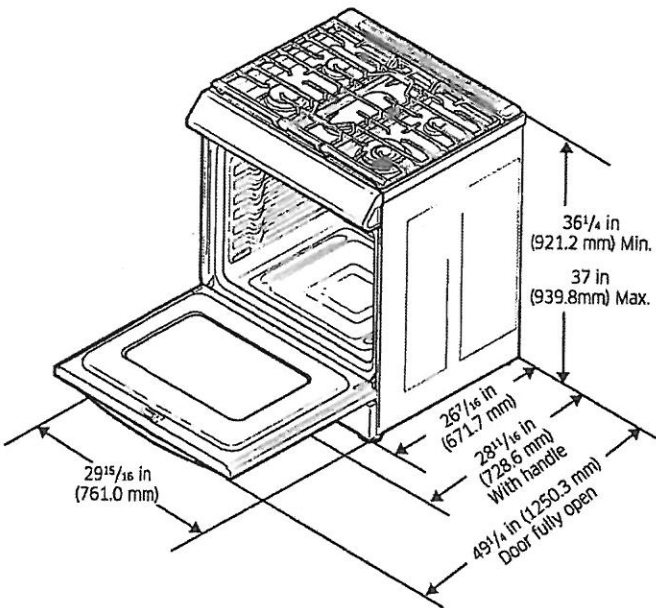

Gas range components

Installation requirements

AT

PT

BE2-140
July 24, 2020

Location requirements



Clearances and dimensions

BEFORE YOU BEGIN to install this appliance, refer to the following information, dimensions, and clearances. Do not locate the range where it may be subject to strong drafts. Provide adequate clearances between the range and adjacent combustible surfaces. These dimensions must be met for safe use of the range. The location of the electrical outlet and gas piping may be adjusted to meet the following dimensions and clearances.

For installation in Canada, a free-standing range is not to be installed closer than 4.7 in (12 cm) from any adjacent surface.


CAUTION

This range has been designed to comply with the maximum allowable wood cabinet temperature of 194 °F (90 °C). Make sure the wall covering, countertops, and cabinets around the range can withstand the heat (up to 194 °F [90 °C]) generated by the range. If not, discoloration, delamination, or melting may occur.

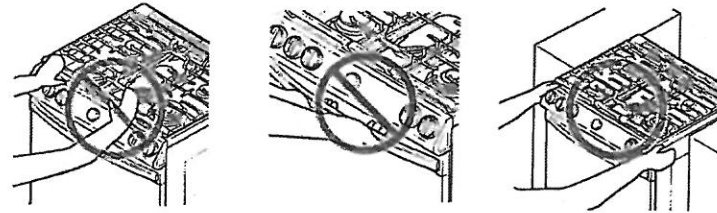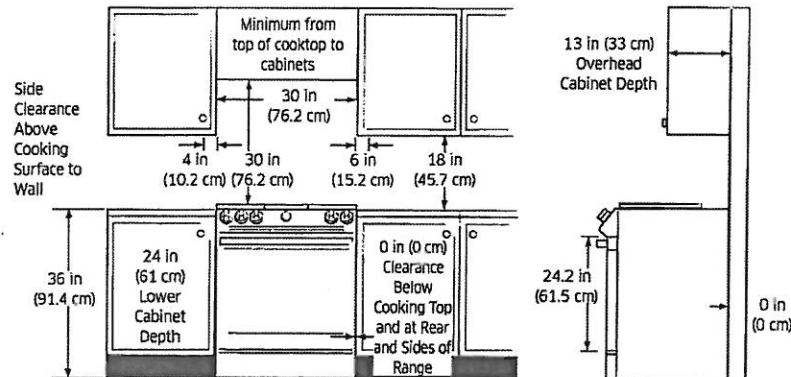

CAUTION

Do not grasp the knob, handle and push when you install.

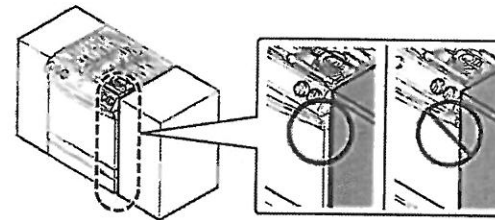

CAUTION

DO NOT install the oven so that the door is flush with the cabinet. For OTR over Gas Stove, please follow local GAS CODE.

Installation requirements

Installation requirements

Minimum dimensions

⚠ WARNING

If overhead cabinets are provided, a range hood should also be provided that projects horizontally a minimum of 5 in (12.7 cm) beyond the front of the cabinets. This will dissipate any heat buildup in the overhead cabinets to prevent death, personal injury, and/or fire hazard. The ventilating hood must be constructed of sheet metal not less than 0.0122" thick. Install above the cooktop with a clearance of not less than 1/4" between the hood and the underside of the combustible material or metal cabinet. The hood must be at least as wide as the appliance and centered over the appliance. Clearance between the cooking surface and the ventilation hood surface must never be less than 24 inches.

Exception 1 : Installation of a listed microwave oven or cooking appliance over the cooktop shall conform to the installations packed with that appliance.

- 30-in (76.2-cm) minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or If no 30-in (76.2-cm) minimum clearance, 24-in (61-cm) minimum when the bottom of the wood or metal cabinet is protected by not less than 0.25-in (0.64-cm) flame-retardant millboard covered with not less than no. 28 MSG sheet steel, 0.015-in (0.038-cm) stainless steel, 0.024-in (0.061-cm) aluminum, or 0.020-in (0.051-cm) copper.
- 18-in (45.7-cm) minimum between the countertop and the adjacent cabinet bottom.

Exception 2 : For island installation, maintain 2-1/2" minimum from cutout to back edge of countertop and 4" minimum from cutout to side edges of countertop.

IMPORTANT:


To eliminate the risk of burns or fire caused by reaching over heated surface units, avoid having cabinet storage space located above the surface units. If you have cabinet storage space over the heating elements, you can reduce the risk by installing a range hood that projects horizontally a minimum of 5 inches beyond the bottom of the cabinets.

AT

PT

BE2-140
July 24, 2020.

Installation guide

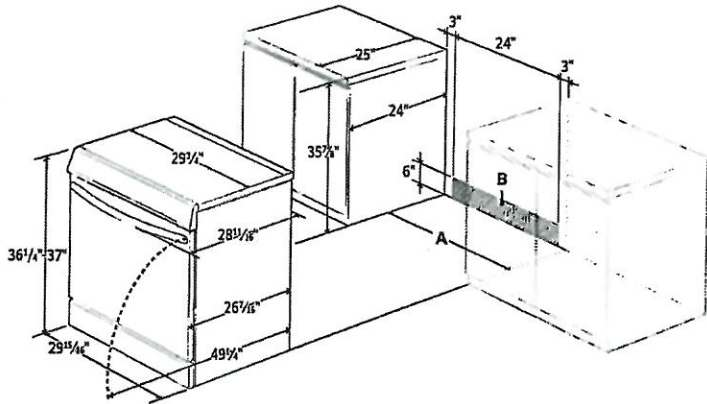

A: Cabinet opening 30" (76.2)

IMPORTANT: If your cabinet have height over 37", this range cannot be installed without supporting unit like hard block.

Whirlpool®

20 cu. ft. French Door Refrigerator

WRF550CDH

ATPT

BEG-140
July 24, 2020



Fingerprint-Resistant Stainless
WRF550CDHZ

Key Features & Benefits


Counter Depth Design
Add additional kitchen space with styling that fits virtually flush with the countertop.

Adjustable Gallon Door Bins
Move these adjustable bins anywhere in the door for increased loading flexibility.

Temperature-Controlled Full-Width Drawer
Store wide items like party platters and sheet cakes or preserve large amounts of meat and cheese at just the right temperature.

Capacity	
Total Capacity	20 cu. ft.
Refrigerator Capacity	16 cu. ft.
Freezer Capacity	5 cu. ft.
General Features & Properties	
Humidity-Controlled Crispers	
Fingerprint Resistant	
Two-Tier Freezer Storage	
Spillproof Glass Shelves	
Factory-Installed Icemaker	
Exterior Ice and Water Dispenser with EveryDrop® Filtration	
LED Interior Lighting	
Fast Cool Option	
Adaptive Defrost	
Electrical Details	
Amps	20
Volts	115

Technical Details	
Refrigerator Type	French Door
Number of Doors	3
Number of Interior Refrigerator Shelves	5
Number of Refrigerator Door Bins	2 Adjustable, 4 Fixed
Number of Interior Freezer Shelves	3 Plastic
Lighting Type	LED
Ice Maker	Factory Installed
Ice Maker Location	Refrigerator
Dispenser Type	Exterior Ice and Water
Dimensions	
Product Dimensions (H x W x D)	70-1/8" x 35-7/8" x 30-3/4"
Depth with Door Open 90°	43"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear
Reference Material	
Dimension Guide	
Use & Care Guide	
Energy Guide	
Warranty	

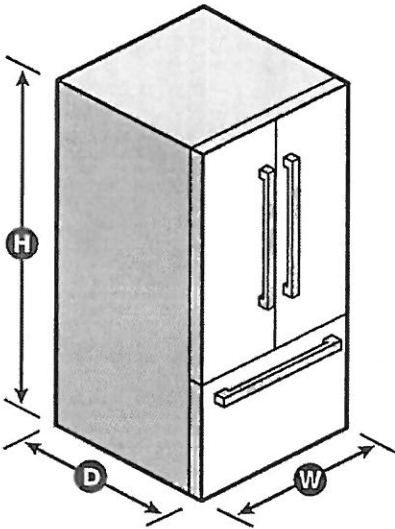

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.
®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRF550CDHSPECSHEETV01.