

COVID-19 UPDATE: THE HEALTH AND SAFETY OF OUR EMPLOYEES, CUSTOMERS AND PARTNERS IS OUR TOP PRIORITY. [LEARN MORE](#)

Home / Home Appliances / Cooking Appliances / All Cooking Appliances / Gas Ranges / 6.0 Cu.Ft. Gas Range With 22K Double Burner And Air

6.0 cu.ft. Gas Range with 22K double burner and Air Fry in Black Stainless St...

[BENEFITS](#) [SPECS](#) [REVIEWS](#) [SUPPORT](#) [COMPARE](#)



ZOOM IN

NEW

6.0 cu.ft. Gas Range with 22K double burner and Air Fry in Black Stainless Steel.

NX60T8711SG/AA

★★★★★ (0) [Write a review](#)

- Slide-in Design
- 22K Double Burner
- Air Fry

COLOUR

☒ BLACK STAINLESS STEEL



BEQ-85L
July 31, 2020
See attach.



Slide-in Design



Smart Dial



22K Double Burner



Air Fry

Samsung and Cookies

This site uses cookies. By clicking [ACCEPT](#) or continuing to browse the site you are agreeing to our use of cookies. [Find out more here.](#)

ACCEPT

6.0 cu.ft. Gas Range with 22K double burner and Air Fry in Black Stainless St...

BENEFITS SPECS REVIEWS SUPPORT COMPARE



Self Cleaning

Keep the inside of your oven neat and clean without wasting time and effort scrubbing or using costly cleaning products. A Self Cleaning system heats the cavity to a high temperature to burn off grease and food residue.

SlideIn

Installation Type

5EA

Number of Burner

HIDE ALL SPECS

Type

Installation Type
Slide In

Capacity

Oven Capacity
6.0 cu.ft

Drawer Capacity
1.0 cu.ft

Materials/Finishes

Oven Color
Black Stainless Steel

Control Type (Oven)
Glass Touch + Dial

Control Type (Cooktop)
Knob

See
attach

BE2-85L
July 31, 2020.

Samsung and Cookies

This site uses cookies. By clicking ACCEPT or continuing to browse the site you are agreeing to our use of cookies. [Find out more here.](#)

ACCEPT

6.0 cu.ft. Gas Range with 22K double burner and Air Fry in Black Stainless St...

BENEFITS SPECS REVIEWS SUPPORT COMPARE

Features

Air Fry	Self Clean	Steam Clean
Yes	Yes	No
Wi-Fi Connection	Easy Cook	Healthy Cook
Yes	No	No
Favorite Cook	Keep Warm	Clock
Yes	Yes	Yes
Numeric Pad	Kitchen Timer	Child Safety Lock
No	Yes	Yes
Hidden Bake Element	Interior Light (Position)	Light (Lamp) On/Off
No	1 Incandescent 40W(Back)	Yes
Sound on/off	Setting (Clock System Option (12H/24H))	Delay Start
Yes	Yes	Yes
Sabbath Mode		
Yes		

Cooktop

Type	Cooktop Frame	Number of Burner
NG/LP	Black Porcelain	5 EA
Total Power	Burner 1	Burner 2
62.5K	22K - Right/Front	16K - Left/Front
Burner 3	Burner 4	Burner 5
5K - Right/Rear	9.5K - Left/Rear	10K - Center
Burner Cap	Center Oval	Sealed Burner
5	Yes	Yes
Grate		
Edge-to-Edge		

General Feature

Convection	Bake (Single)	Variable Broil (Low-High) (Single)
True Convection	175°F (80°C) - 550°F (285°C)	Hi / Low
Convection Bake (Single)	Convection Roast (Single)	
175°F (80°C) - 550°F (285°C)	175°F (80°C) - 550°F (285°C)	

Power/Ratings

Bake Element	Broil Element	Convection Heater Element
18K	16.5K	800W

Drawer

Type	Rail
Storage	Yes

See
attach.
BE2-85L
July 31, 2020.

Samsung and Cookies

This site uses cookies. By clicking ACCEPT or continuing to browse the site you are agreeing to our use of cookies. [Find out more here.](#)

ACCEPT

6.0 cu.ft. Gas Range with 22K double burner and Air Fry in Black Stainless St...

BENEFITS SPECS REVIEWS SUPPORT COMPARE

Accessories

Number of Rack Positions
7

Air Fry Tray
Yes

Say
attach.
BE2-85L
July 31, 2020.

Broil Rack
1

Wire Rack
1

Meat Probe
Yes

Griddle
Yes

WOK grate
Yes

Anti-Tip Device
Yes

Smart Divider
No

Smart

WiFi Embedded
Yes

HIDE ALL SPECS

Reviews



Be the first to review this product

User manual & Downloads

SEE MORE CONTENT

SEE ALL SUPPORT

How It Stacks Up

Samsung and Cookies

This site uses cookies. By clicking ACCEPT or continuing to browse the site you are agreeing to our use of cookies. [Find out more here.](#)

ACCEPT

Gas Slide-in Range

Installation manual

NX60*8****



BE2-85L

July 31, 2020

SAMSUNG



Installation requirements

Location requirements


Clearances and dimensions

BEFORE YOU BEGIN to install this appliance, refer to the following information, dimensions, and clearances. Do not locate the range where it may be subject to strong drafts. Provide adequate clearances between the range and adjacent combustible surfaces. These dimensions must be met for safe use of the range. The location of the electrical outlet and gas piping may be adjusted to meet the following dimensions and clearances.


For installation in Canada, a free-standing range is not to be installed closer than 4.7 in (12 cm) from any adjacent surface.

CAUTION

This range has been designed to comply with the maximum allowable wood cabinet temperature of 194 °F (90 °C). Make sure the wall covering, countertops, and cabinets around the range can withstand the heat (up to 194 °F [90 °C]) generated by the range. If not, discoloration, delamination, or melting may occur.

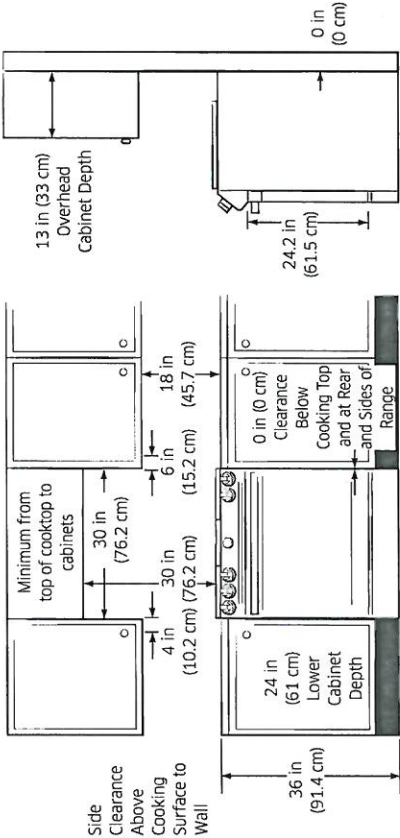


BE2-85L
See
attach.
July 31, 2020.

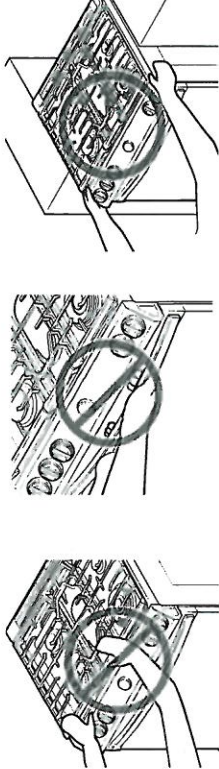

CAUTION

Do not grasp the knob, handle and push when you install.

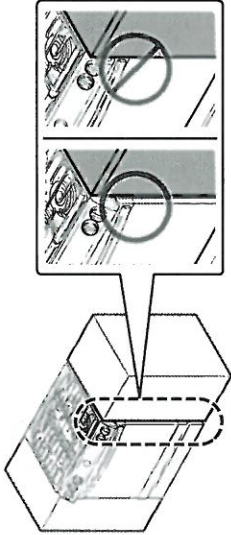

CAUTION

DO NOT install the oven so that the door is flush with the cabinet. For OTR over Gas Stove, please follow local GAS CODE.

Installation requirements

Installation requirements

Minimum dimensions

⚠ WARNING

If overhead cabinets are provided, a range hood should also be provided that projects horizontally a minimum of 5 in (12.7 cm) beyond the front of the cabinets. This will dissipate any heat buildup in the overhead cabinets to prevent death, personal injury, and/or fire hazard. The ventilating hood must be constructed of sheet metal not less than 0.0122" thick. Install above the cooktop with a clearance of not less than 1/4" between the hood and the underside of the combustible material or metal cabinet. The hood must be at least as wide as the appliance and centered over the appliance. Clearance between the cooking surface and the ventilation hood surface must never be less than 24 inches.

Exception 1 : Installation of a listed microwave oven or cooking appliance over the cooktop shall conform to the installations packed with that appliance.

- 30-in (76.2-cm) minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or If no 30-in (76.2-cm) minimum clearance, 24-in (61-cm) minimum when the bottom of the wood or metal cabinet is protected by not less than 0.25-in (0.64-cm) flame-retardant millboard covered with not less than no. 28 MSG sheet steel, 0.015-in (0.038-cm) stainless steel, 0.024-in (0.061-cm) aluminum, or 0.020-in (0.051-cm) copper.
- 18-in (45.7-cm) minimum between the countertop and the adjacent cabinet bottom.


Exception 2 : For island installation, maintain 2-1/2" minimum from cutout to back edge of countertop and 4" minimum from cutout to side edges of countertop.

IMPORTANT:

To eliminate the risk of burns or fire caused by reaching over heated surface units, avoid having cabinet storage space located above the surface units. If you have cabinet storage space over the heating elements, you can reduce the risk by installing a range hood that projects horizontally a minimum of 5 inches beyond the bottom of the cabinets.

See attach.
BEA-85L
July 31, 2020.

Installation guide

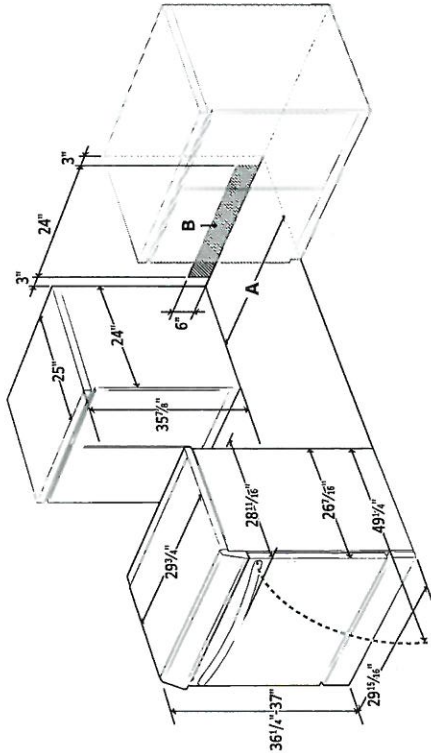


A: Cabinet opening 30" (76.2)

IMPORTANT: If your cabinet have height over 37", this range cannot be installed without supporting unit like hard block.



See
attach.
862-86L
July 31, 2020.

Recommended locations for gas piping and electrical outlets
(For model NX60*8*****)

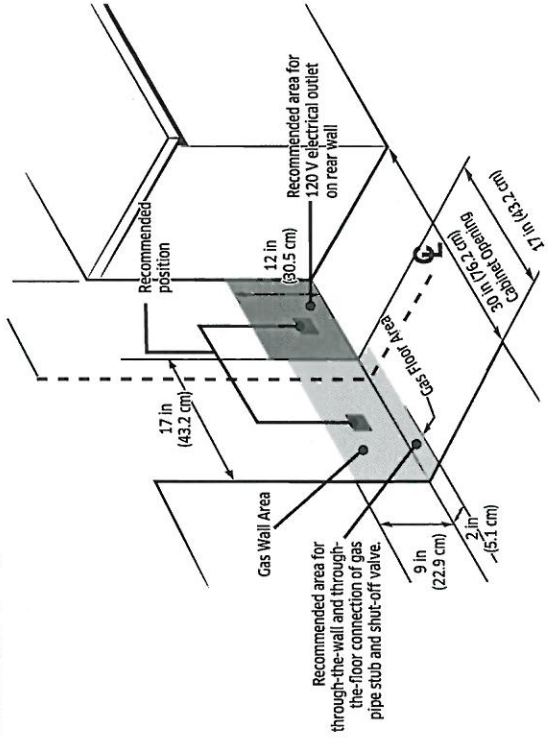

CAUTION

You must use the rear filler kit to install the range in a freestanding cutout cabinet. For more information, see "Optional rear filler kit" as shown below.


Optional rear filler kit

WARNING


Used to fill gap between the range back and wall. Adds a filler strip to the rear of the range. This kit can only be used when the opening in the countertop is 25" deep.

NOTE

If the countertop depth is greater than 25", there will be a gap between the filler kit and the back wall.

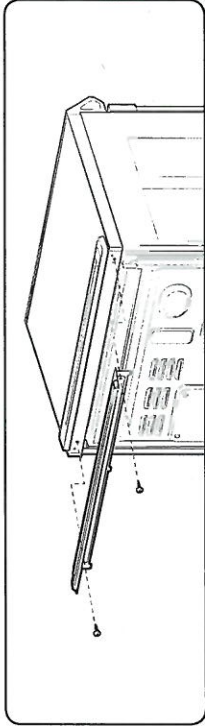


To avoid breakage

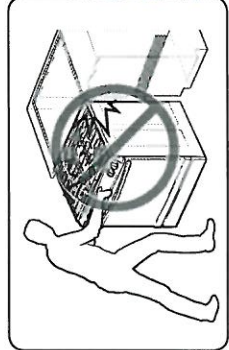

CAUTION

Please **DO NOT** push the unit strongly when you install. These actions can cause the damage to the unit.

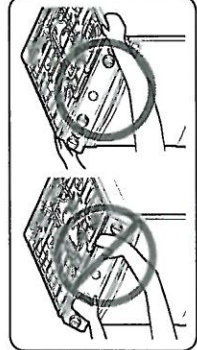

Please **DO NOT** push the burner knobs when installing the range.
(Grasp the L/R door area to push the unit.)


Installation requirements

RF28K9070SR French Door Refrigerator with FlexZone™, 28 cu.ft

[BENEFITS](#) [SPECS](#) [REVIEWS](#) [SUPPORT](#) [COMPARE](#)

WHERE TO BUY

BE2-86L
July 31, 2020
See
attach.

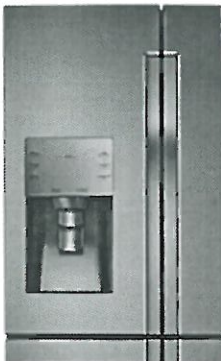

RF28K9070SR French Door Refrigerator with FlexZone™, 28 cu.ft

RF28K9070SR/AA
★★★★★ 4.1 (614) [Write a review](#)

FlexZone™
Precise Cooling
Triple Cooling System

ZOOM IN

WHERE TO BUY

x3
Triple Cooling™


Water Dispenser

Triple Cooling
Cooling Type

153
Net Weight(kg)

More fridge or freezer space on demand

The FlexZone™ offers the ultimate in food storage flexibility, so everything stays fresher. With one touch the compartment can be easily converted from fridge to freezer using four pre-set temperature settings.

RF28K9070SR French Door Refrigerator with FlexZone™, 28 cu.ft

WHERE TO BUY

BENEFITS SPECS REVIEWS SUPPORT COMPARE

Net Total (cu.ft)	Net for Freezer (cu.ft)	Net for Fridge (cu.ft)
28.1	11.5	16.6

See attach.
BE2-85L
July 31, 2020

Physical specification

Net Dimension (WxHxD)(inch) 35.75 x 71.85 x 34.29	Net Width (inch) 35.75	Net Case Height with Hinge (inch) 71.85
Net Case Height without Hinge (inch) 70.75	Net Depth with Door Handle (inch) 34.29	Net Depth without Door Handle (inch) 34.29
Net Depth without Door (inch) 29.45	Packing Dimension (WxHxD)(inch) 38.27 x 77.56 x 36.22	Net Weight (kg) 153
Packing Weight (kg) 164	20/40/40H (Container) 12/20/20	

Cooling Feature

Cooling Type
Triple Cooling

Refrigerator Feature

Humidity Control (Vegetable&Fruit Drawer) Fresh AirTight Box	Number of Shelf (Total) 5 EA	Number of Shelf (Flip Up) 1 EA
Number of Shelf (Foldable) 1 EA	Shelf Material Tempered Glass	Number of Vegetable&Fruit Drawer 2 EA
Number of Door Pocket 6 EA	Icemaker Auto	Interior LED Light Surface LED Lighting

Bottom Left

Shelf 1 EA	Box 2 EA	Door Pocket 3 EA
LED Interior Light Yes		

Bottom Right

Convertible Room (°C) 2, -1, -5, -23 ~ 15 °C	Shelf 1 EA	Box 2 EA
Door Pocket 3 EA	LED Interior Light Yes	

Exterior Feature

Door Type Contour	Dispenser with Water Filter Yes	Display & Control (Fridge and Freezer)
----------------------	------------------------------------	--

Samsung and Cookies

This site uses cookies. By clicking ACCEPT or continuing to browse the site you are agreeing to our use of cookies. [Find out more here.](#)

ACCEPT

RF28K9070SR French Door Refrigerator with FlexZone™, 28 cu.ft

WHERE TO BUY

BENEFITS SPECS REVIEWS SUPPORT COMPARE

Energy Star Certification
Yes

Installation

Free Standing
Yes

Smart

WiFi Embedded
Yes

Bluetooth
No

WiFi Dongle(Separate sale) Support
No

WiFi Kit
No

App Connectivity

SmartThings App Support
Yes

See
attach.
BEA-88L
July 31, 2020

HIDE ALL SPECS

★★★★★ 4.1 | 614 Reviews

465 out of 594 (78%) reviewers recommend this product



Reviews

WRITE A REVIEW

Rating Snapshot

Select a row below to filter reviews.

5 ★		368
4 ★		102
3 ★		36
2 ★		32

Samsung and Cookies

This site uses cookies. By clicking ACCEPT or continuing to browse the site you are agreeing to our use of cookies. [Find out more here.](#)

ACCEPT


Step-by-step installation

See attach. BE2-85L
July 31, 2020

STEP 1 Select a site

- The site must:
- Have a solid level surface without carpeting or flooring that may obstruct ventilation
 - Be out of direct sunlight
 - Have adequate room for opening and closing the door
 - Be away from any heat source
 - Provide room for maintenance and servicing
 - Have a temperature range between 50 °F (10 °C) and 110 °F (43 °C)

Clearance
See the pictures and table below and on the next page for installation space requirements.

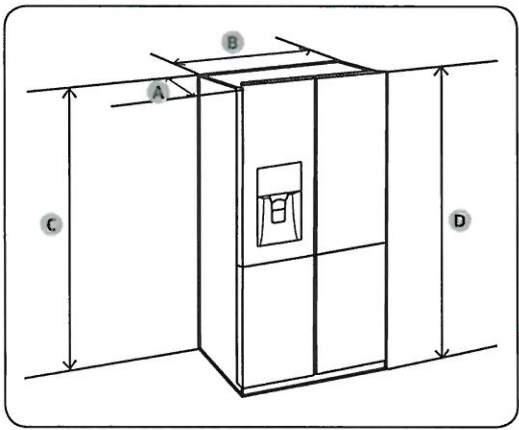


Depth "A"	34 1/4" (871 mm)
Width "B"	35 3/4" (908 mm)
Height "C"	70 3/4" (1797 mm)
Overall Height "D"	71 7/8" (1825 mm)

Installation



See
attach.
BE2-85L
July 31, 2020

Installation

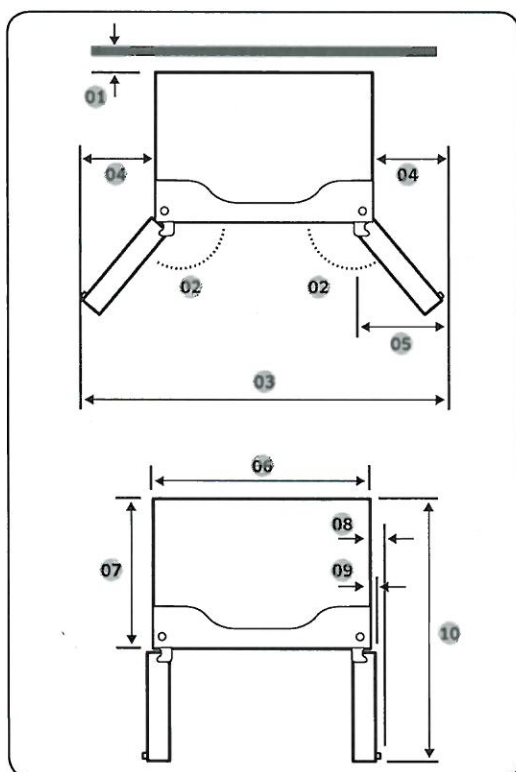

- 01 2" (50 mm)
- 02 125°
- 03 59 5/8" (1515 mm)
- 04 11 7/8" (303 mm)
- 05 12" (305 mm)
- 06 35 3/4" (908 mm)
- 07 29 3/8" (748 mm)
- 08 2 3/4" (70 mm)
- 09 1 3/4" (43 mm)
- 10 49" (1245 mm)

NOTE


The measurements of your refrigerator may differ from those listed above, depending on the measuring method.

COVID-19 UPDATE: THE HEALTH AND SAFETY OF OUR EMPLOYEES, CUSTOMERS AND PARTNERS IS OUR TOP PRIORITY. [LEARN MORE](#)

Home / Home Appliances / Cooking Appliances / All Cooking Appliances / Gas Ranges / 6.0 Cu.Ft. Gas Range With 22K Double Burner And Air

cu.ft. Gas Range with 22K double burner and Air Fry in Black Stainless St...

[VIEW](#) [EDIT](#) [REVIEWS](#) [ADVERTISE](#) [COMPARE](#)

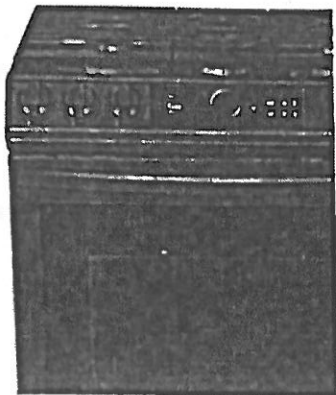

ZOOM IN

NEW

6.0 cu.ft. Gas Range
with 22K double
burner and Air Fry in
Black Stainless Steel.

NX60T8711SG/AA

★★★★★ (0) [Write a review](#)

Slide-in Design
22K Double Burner
Air Fry

COLOUR

BLACK STAINLESS STEEL



Slide-in Design



Smart Dial



22K Double Burner




Air Fry

Samsung and Cookies

This site uses cookies. By clicking [ACCEPT](#) or continuing to browse the site you are agreeing to our use of cookies. [Find out more here.](#)

ACCEPT

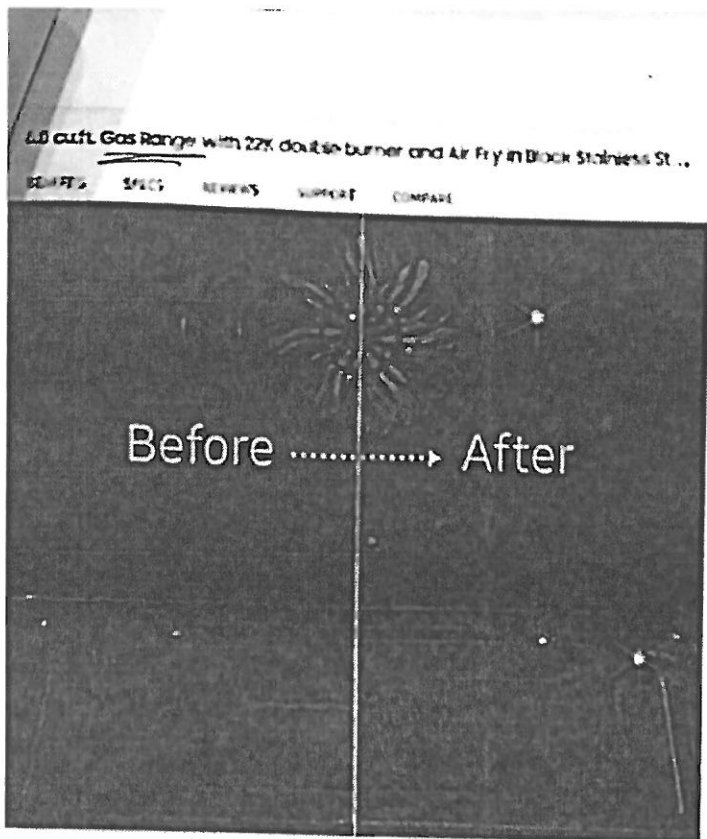

Self Cleaning

Keep the inside of your oven neat and clean without wasting time and effort scrubbing or using costly cleaning products. A Self Cleaning system heats the cavity to a high temperature to burn off grease and food residue.

Slide In

Installation Type

5EA

Number of Burner

HIDE ALL SPECS

Type

Installation Type
Slide In

Capacity

Oven Capacity
6.0 cu.ft

Drawer Capacity
1.0 cu.ft

Materials/Finishes

Oven Color
Black Stainless Steel

Control Type (Oven)
Glass Touch + Dial

Control Type (Cooktop)
Knob

Samsung and Cookies

This site uses cookies. By clicking **ACCEPT** or continuing to browse the site you are agreeing to our use of cookies. [Find out more here.](#)

ACCEPT

as Range with 22K double burner and Air Fry in Black Stainless St...

SPECIFICATIONS FEATURES SUPPORT COMPARE

Features

Air Fry Yes	Self Clean Yes	Steam Clean No
Wi-Fi Connection Yes	Easy Cook No	Healthy Cook No
Favorites Cook Yes	Keep Warm Yes	Clock Yes
Numerical Pad No	Kitchen Timer Yes	Child Safety Lock Yes
Hidden Bake Element No	Interior Light (Position) 1 Incandescent 40W(Back)	Light (Lamp) On/Off Yes
Sound on/off Yes	Setting (Clock System Option (12H/24H)) Yes	Delay Start Yes
Sabbath Mode Yes		

Cooktop

Type NG/LP	Cooktop Frame Black Porcelain	Number of Burner 5 EA
Total Power 62.5K	Burner 1 22K - Right/Front	Burner 2 16K - Left/Front
Burner 3 5K - Right/Rear	Burner 4 9.5K - Left/Rear	Burner 3 10K - Center
Burner Cap 5	Center Oval Yes	Sealed Burner Yes
Grate Edge-to-Edge		

General Feature

Convection True Convection	Bake (Single) 175°F (80°C) - 550°F (285°C)	Variable Broil (Low-High) (Single) Hi / Low
Convection Bake (Single) 175°F (80°C) - 550°F (285°C)	Convection Roast (Single) 175°F (80°C) - 550°F (285°C)	

Power/Ratings

Bake Element 18K	Broil Element 16.5K	Convection Heater Element 800W
---------------------	------------------------	-----------------------------------

Drawer

Type Storage	Rail Yes
-----------------	-------------

Samsung and Cookies

This site uses cookies. By clicking ACCEPT or continuing to browse the site you are agreeing to our use of cookies. [Find out more here.](#)

ACCEPT

DATE: _____

 BE2-06L
 July 31, 2020
 Brill Rack
 1

Air Fry Tray
Yes

Heat Probe

Griddle
Yes

Anti-Tip Device
Yes

Smart Divider
No

WiFi Embedded
Yes

[HIDE ALL SPECS](#)

★★★★★

Be the first to review this product

SEE MORE CONTENT

SEE ALL SUPPORT

Samsung and Cookies

This site uses cookies. By clicking ACCEPT or continuing to browse the site you are agreeing to our use of cookies. Find out more here.

8234

Gas Slide-in Range

Installation manual

NX60*8*****

ARC (S)

BE2-85L

July 31, 2020

SAMSUNG

Installation requirements

Location requirements



Clearances and dimensions

BEFORE YOU BEGIN to install this appliance, refer to the following information, dimensions, and clearances. Do not locate the range where it may be subject to strong drafts. Provide adequate clearances between the range and adjacent combustible surfaces. These dimensions must be met for safe use of the range. The location of the electrical outlet and gas piping may be adjusted to meet the following dimensions and clearances.

For installation in Canada, a free-standing range is not to be installed closer than 4.7 in (12 cm) from any adjacent surface.


CAUTION

This range has been designed to comply with the maximum allowable wood cabinet temperature of 194 °F (90 °C). Make sure the wall covering, countertops, and cabinets around the range can withstand the heat (up to 194 °F [90 °C]) generated by the range. If not, discoloration, delamination, or melting may occur.

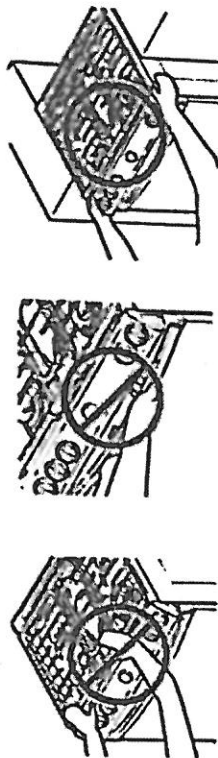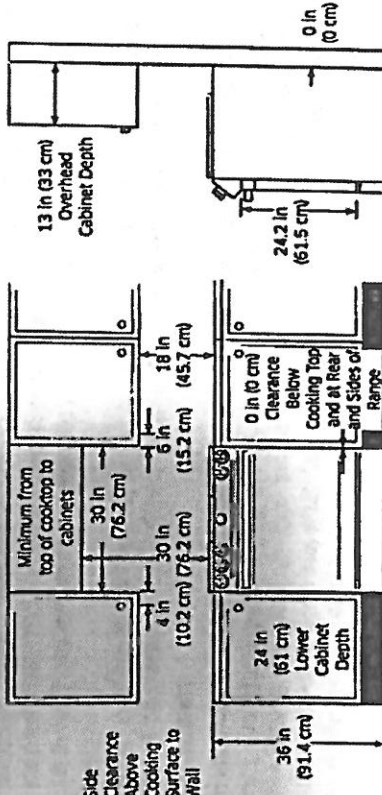

CAUTION

Do not grasp the knob, handle and push when you install.

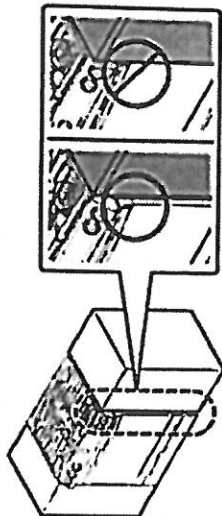

CAUTION

DO NOT install the oven so that the door is flush with the cabinet. For OTR over Gas Stove, please follow local GAS CODE.

Installation requirements

Installation requirements

Minimum dimensions

▲ WARNING

If overhead cabinets are provided, a range hood should also be provided that projects horizontally a minimum of 5 in (12.7 cm) beyond the front of the cabinets. This will dissipate any heat buildup in the overhead cabinets to prevent death, personal injury, and/or fire hazard. The ventilating hood must be constructed of sheet metal not less than 0.0122" thick. Install above the cooktop with a clearance of not less than 1/4" between the hood and the underside of the combustible material or metal cabinet. The hood must be at least as wide as the appliance and centered over the appliance. Clearance between the cooking surface and the ventilation hood surface must never be less than 24 inches.

Exception 1: Installation of a listed microwave oven or cooking appliance over the cooktop shall conform to the installations packed with that appliance.


- 30-in (76.2-cm) minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or if no 30-in (76.2-cm) minimum clearance, 24-in (61-cm) minimum when the bottom of the wood or metal cabinet is protected by not less than 0.25-in (0.64-cm) flame-retardant millboard covered with not less than no. 28 MSG sheet steel, 0.015-in (0.038-cm) stainless steel, 0.024-in (0.061-cm) aluminum, or 0.020-in (0.051-cm) copper.
- 18-in (45.7-cm) minimum between the countertop and the adjacent cabinet bottom.

Exception 2: For Island Installation, maintain 2-1/2" minimum from cutout to back edge of countertop and 4" minimum from cutout to side edges of countertop.

IMPORTANT:

To eliminate the risk of burns or fire caused by reaching over heated surface units, avoid having cabinet storage space located above the surface units. If you have cabinet storage space over the heating elements, you can reduce the risk by installing a range hood that projects horizontally a minimum of 5 inches beyond the bottom of the cabinets.

Installation guide

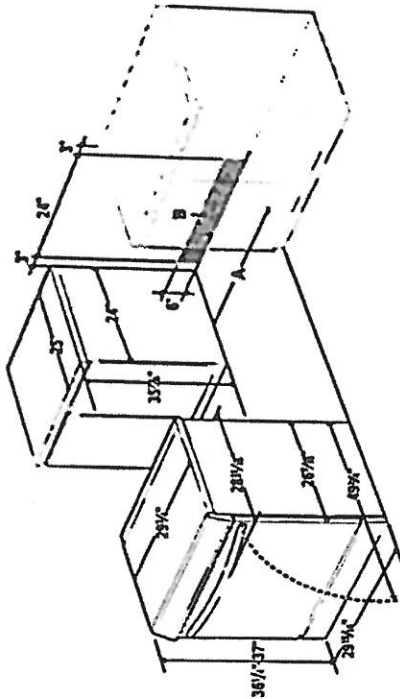


A: Cabinet opening 30" (76.2)

IMPORTANT: If your cabinet have height over 37", this range cannot be installed without supporting unit like hard block.

MS BE2-86L
July 31, 2020.

Recommended locations for gas piping and electrical outlets
(For model NX60*8****)

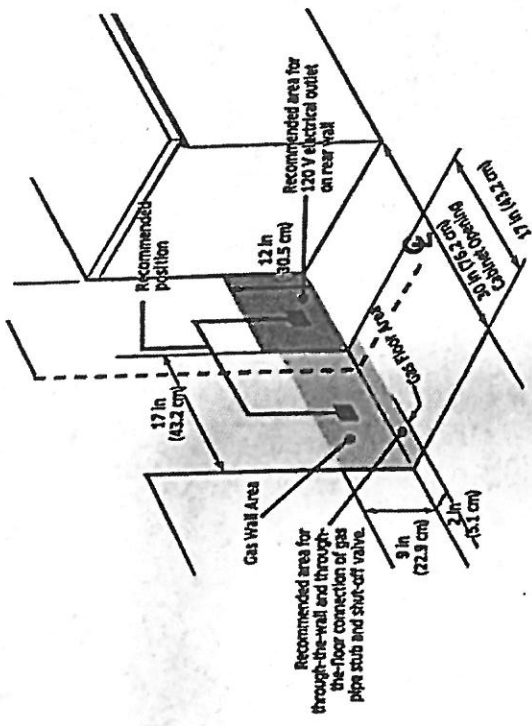

CAUTION

You must use the rear filler kit to install the range in a freestanding cutout cabinet. For more information, see "Optional rear filler kit" as shown below.


Optional rear filler kit

WARNING


Used to fill gap between the range back and wall. Adds a filler strip to the rear of the range. This kit can only be used when the opening in the countertop is 25" deep.

NOTE

If the countertop depth is greater than 25", there will be a gap between the filler kit and the back wall.

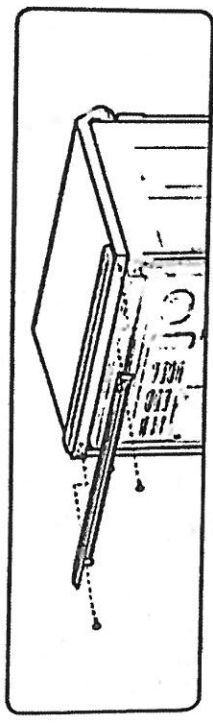


To avoid breakage



CAUTION

Please DO NOT push the unit strongly when you install. These actions can cause the damage to the unit.

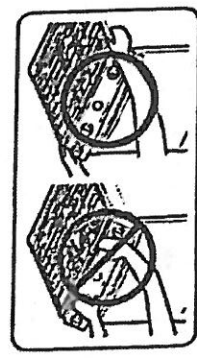

Please DO NOT push the burner knobs when installing the range.
(Grasp the L/R door area to push the unit.)

Installation requirements

COVID-19 UPDATE: THE HEALTH AND SAFETY OF OUR EMPLOYEES, CUSTOMERS AND PARTNERS IS OUR TOP...


LEARN MORE

Home / Home Appliances / Refrigerators / All Refrigerators / 4-Door Flex™ / RF28K9070SR French Door Refrigerator With Flex...

RF28K9070SR French Door Refrigerator With FlexZone™, 28 cu.ft

WHERE TO BUY

DETAILS SPECS REVIEWS SUPPORT COMPARE



RF28K9070SR French Door Refrigerator with FlexZone™, 28 cu.ft

RF28K9070SR/AA

★★★★★ 4.1 (614) Write a review

FlexZone™

Precise Cooling

Triple Cooling System

ZOOM IN

WHERE TO BUY



Triple Cooling™



Water Dispenser

Triple Cooling

Cooling Type

153

Net Weight(kg)

More fridge or freezer space on demand

The FlexZone™ offers the ultimate in food storage flexibility, so everything stays fresher. With one touch the compartment can be easily converted from fridge to freezer using four pre-set temperature settings.

Samsung and Cookies

This site uses cookies. By clicking ACCEPT or continuing to browse the site you are agreeing to our use of cookies. [Find out more here.](#)

ACCEPT

RF28R907CSR French Door Refrigerator with FlexZone™, 28 cu.ft

BEH-FITS SPECS REVIEWS SUPPORT COMPARE



BE2-85L
July 31, 2020

WITH A 15 DAY

Net Total (cu.ft)
28.1

Net for Freezer (cu.ft)
7.5

Net for Fridge (cu.ft)
16.6

Physical specification

Net Dimension (WxHxD)(inch)
35.75 x 71.85 x 34.29

Net Width (inch)
35.75

Net Case Height with Hinge (inch)
71.85

Net Case Height without Hinge (inch)
70.75

Net Depth with Door Handle (inch)
34.29

Net Depth without Door Handle (inch)
34.29

Net Depth without Door (inch)
29.45

Packing Dimension (WxHxD)(inch)
38.27 x 77.56 x 36.22

Net Weight (kg)
153

Packing Weight (kg)
164

20/40/40H (Container)
12/20/20

Cooling Feature

Cooling Type
Triple Cooling

Refrigerator Feature

Humidity Control (Vegetable&Fruit Drawer)
Fresh AirTight Box

Number of Shelf (Total)
5 EA

Number of Shelf (Flip Up)
1 EA

Number of Shelf (Foldable)
1 EA

Shelf Material
Tempered Glass

Number of Vegetable&Fruit Drawer
2 EA

Number of Door Pocket
6 EA

Icemaker
Auto

Interior LED Light
Surface LED Lighting

Bottom Left

Shelf
1 EA

Box
2 EA

Door Pocket
3 EA

LED Interior Light
Yes

Bottom Right

Convertible Room (°C)
2, -1, -5, -23 ~ 15 °C

Shelf
1 EA

Box
2 EA

Door Pocket
3 EA

LED Interior Light
Yes

Exterior Feature

Door Type
Contour

Dispenser with Water Filter
Yes

Display & Control (Fridge and Freezer)

Samsung and Cookies

This site uses cookies. By clicking ACCEPT or continuing to browse the site you are agreeing to our use of cookies. [Find out more here.](#)

ACCEPT

RF28K9370SP French Door Refrigerator with FlexZone™, 28 cu.ft

WHERE TO BUY

BENEFITS SPECS REVIEWS SUPPORT COMPARE

Energy Star Certification
Yes

Installation

Free Standing
Yes

Smart

WiFi Embedded
Yes

Bluetooth
No

WiFi Dongle(Separate sale) Support
No

WiFi IoT
No

App Connectivity

SmartThings App Support
Yes



BEA-86L
July 31, 2020

HIDE ALL SPECS

★★★★★ 4.1 | 614 Reviews

465 out of 594 (78%) reviewers recommend this product

Search topics and reviews



Reviews

WRITE A REVIEW

Rating Snapshot

Select a row below to filter reviews.

5 ★	368
4 ★	102
3 ★	36
2 ★	32

Samsung and Cookies

This site uses cookies. By clicking ACCEPT or continuing to browse the site you are agreeing to our use of cookies. [Find out more here.](#)

ACCEPT

Step-by-step installation

BE2-85L
July 31, 2020


STEP 1 Select a site

The site must:

- Have a solid level surface without carpeting or flooring that may obstruct ventilation
- Be out of direct sunlight
- Have adequate room for opening and closing the door
- Be away from any heat source
- Provide room for maintenance and servicing
- Have a temperature range between 50 °F (10 °C) and 110 °F (43 °C)

Clearance

See the pictures and table below and on the next page for installation space requirements.

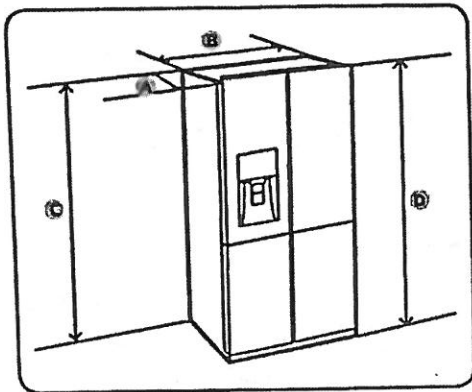


Depth "A"	34 1/4" (871 mm)
Width "B"	35 3/4" (908 mm)
Height "C"	70 3/4" (1797 mm)
Overall Height "D"	71 7/8" (1825 mm)

Installation

Installation

BEA-86L
July 31, 2020

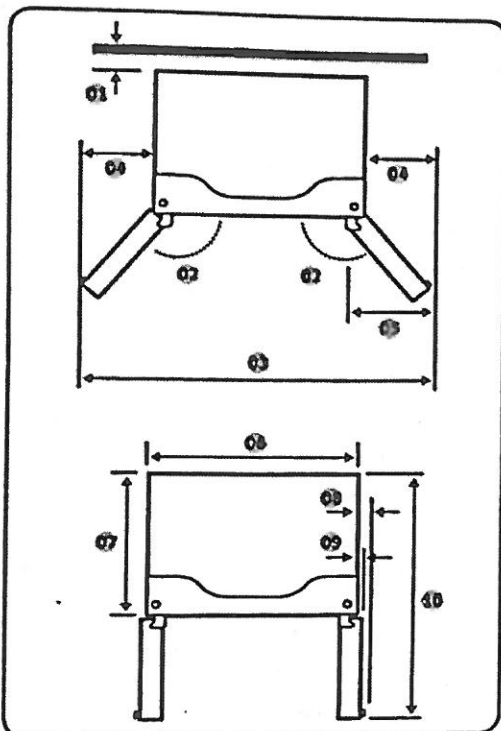

- 01 2" (50 mm)
- 02 125°
- 03 59 5/8" (1515 mm)
- 04 11 7/8" (303 mm)
- 05 12" (305 mm)
- 06 35 3/4" (908 mm)
- 07 29 3/8" (748 mm)
- 08 2 3/4" (70 mm)
- 09 1 3/4" (43 mm)
- 10 49" (1245 mm)

NOTE

The measurements of your refrigerator may differ from those listed above, depending on the measuring method.