

Lot: 109
Model: 50.04 A BEAUMONT
Project/Phase: Pine Valley Forevergreen / 1

APPLIANCES

Invoice Qty. Description

10Sep20 101,930 2448 _ Appliance specifications, Thermador 27" depth wall hood, 60" Dual fuel pro range, 24" built-in micro drawer, 36" built-in fridge column, 36" built-in freezer colum with internal ice maker, 24" built-in dishwasher. ** Please reference attached specifications for all signed appliances **

CONCRETE AND DRAIN

Invoice	Qty.	Qty. Description
2241	1	BACK-FLOW PREVENTER VALVE
10Sep20 NoCat		
2290	1	BASEMENT:*IN ADDITION TO STANDARD* ADD A 2ND ROUGH-IN FOR 3PC IN BASEMENT, WASTE ROUGH-IN ONLY, NO WATER LINES.
10Sep20 NoCat		

CROWN MOULDING

Invoice	Qty.	Qty. Description
2290	1	1 FOYER - OPT. CIRCULAR COFFERED CEILING AS PER PLAN
10Sep20 NoCat		
2290	<u> </u>	.HALLWAY MAIN FLOOR - OPT. CIRCULAR COFFERED CEILING DETAIL AS PER PLAN
10Sep20 NoCat		

DRYWALL

Invoice	Qty.	Qty. Description
2241	2	.BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 10" FRAME (PINEVALLEY 50 FOOT LOTS ONLY)
10Sep20 NoCat		
2290	1	.FOYER - OPT. CIRCULAR COFFERED CEILING AS PER PLAN
10Sep20 NoCat		
2290	1	.HALLWAY MAIN FLOOR - OPT. CIRCULAR COFFERED CEILING DETAIL AS PER PLAN
10Sep20 NoCat		

DisciplineMS.rpt 26jun20 Page 1 of 5 Printed and Sent: 10-Sep-20



Lot: 109
Model: 50.04 A BEAUMONT
Project/Phase: Pine Valley Forevergreen / 1

		Trofocult moon true for the first form.
Invoice Oty. Des	Qty.	ALL Description
2290 72,281 10Sep20	_	.GREAT ROOM: INTERIOR WALL OUTLET: ADDITIONAL 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT FOR WALL MOUNTED TV - LOCATE APPROX. 66" A.F.F. ABOVE FIREPLACE
2290 72,309 10Sep20	1	.FOYER: UPGRADE STANDARD CEILING MOUNT FIXTURE TO (1) LED POT LIGHT - GROUND FLOOR - SEE PLAN FOR LOCATION
2290 72,289	1	FOYER: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH
2290 72,309 10Sep20	-	.MAIN HALL: UPGRADE STANDARD CEILING MOUNT FIXTURE TO (1) LED POT LIGHT - GROUND FLOOR - MUST SPECIFY LOCATION (CAN BE RELOCATED)
2290 72,289 10Sep20	3	.MAIN HALL: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH USE SWITCH FOR STANDARD LIGHT
2290 72,309 10Sep20	1	.HALL AT MUDROOM: UPGRADE STANDARD CEILING MOUNT FIXTURE TO (1) LED POT LIGHT - GROUND FLOOR - MUST SPECIFY LOCATION (CAN BE RELOCATED)
2290 72,289 10Sep20	1	.HALL AT MUDROOM: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH USE SAME SWITCH AS STANDARD
2290 72,284 10Sep20	1	.SERVERY: **IN ADDITION TO STANDARD COUNTER RECEPTACLE** ADD AN INTERIOR WALL OUTLET: ADDITIONAL SPLIT CIRCUIT RECEPTACLE (IN KITCHEN ABOVE COUNTER) - SEE PLAN FOR LOCATION
2290 72,269 10Sep20	1	.SERVERY: INTERIOR WALL OUTLET: 110V WALL INTERIOR RECEPTACLE ON SEPARATE CIRCUIT *BELOW COUNTER TOP* FOR FUTURE MICROWAVE
2290 72,284 10Sep20	-	.KITCHEN *CHEF'S DESK*: INTERIOR WALL OUTLET: ADDITIONAL SPLIT CIRCUIT RECEPTACLE (IN KITCHEN ABOVE COUNTER) - *IN ADDITION TO STANDARD COUNTER RECEPTACLE
2290 72,665 10Sep20	1	.KITCHEN: 240v WALL RECEPTACLE ON SEPARATE CIRCUIT FOR BUILT-IN OVEN APPROX. LOCATION AS PER ATTACHED DRAWINGS
2290 72,306 10Sep20	1	.KITCHEN: RELOCATE "FRIDGE" FROM STANDARD LOCATION - APPROX. "NEW" LOCATION AS PER ATTACHED DRAWINGS
2290 72,289 10Sep20	6	.KITCHEN: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH + 1 SINGLE POLE SWITCH INCLUDED IN APS
	Ī	

DisciplineMS.rpt 26jun20 Page 2 of 5 Printed and Sent: 10-Sep-20



Lot: 109
Model: 50.04 A BEAUMONT
Project/Phase: Pine Valley Forevergreen / 1

ELECTRICAL

Invoice	Qty.	Qty. Description
2290 72,289	1	.KITCHEN: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH
10Sep20		USE SAME SWITCH AS OTHER POTLIGHTS
2290 72,667	-	.KITCHEN: ROUGH-IN FOR CAPPED CEILING OUTLET (FUTURE LIGHT FIXTURE) - EACH
10Sep20		LOCATE ABOVE ISLAND, USE SAME SWITCH AS STANDARD LIGHT
2290 72,307 10Sep20	1	.KITCHEN: FIXTURE: RELOCATE STANDARD CEILING MOUNT FIXTURE. LOCATE ABOVE ISLAND, SEE PLAN FOR LOCATION
2290 72,273 10Sep20	1	.KITCHEN: 110V WALL RECEPTACLE ON SEPARATE CIRCUIT - FOR GAS COOKTOP - FOR AUX. EQUIPMENT - NOT A STOVE PLUG
2290 72,285 10Sep20	1	MASTER ENSUITE: INTERIOR WALL OUTLET: ADDITIONAL INTERIOR GFI RECEPTACLE - LOCATE ON WALL BEHIND TOILET APPROX. 9" A.F.F. RIGHT SIDE *FOR FUTURE WASHLET*

FORMING

Invoice	Qty.	Qty. Description
2241	2	2 BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 10" FRAME (PINEVALLEY 50 FOOT
72,675		LOTS ONLY)
10Sep20		

FRAMING

Invoice	Qty.	Qty. Description
2241	2	.BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 10" FRAME (PINEVALLEY 50 FOOT LOTS ONLY)
10Sep20 NoCat		
2290 72,567 10Sep20	1	.FOYER - OPT. CIRCULAR COFFERED CEILING AS PER PLAN
2290 72,572 10Sep20	_	.HALLWAY MAIN FLOOR - OPT. CIRCULAR COFFERED CEILING DETAIL AS PER PLAN

HVAC		
Invoice	Qty.	Qty. Description
2290 72,217 10Sep20	1	.KITCHEN - UPGRADE TO 8" DUCT (EXTERIOR WALL) IN LIEU OF STANDARD OFFERING
2290 72,224 10Sep20	1	KITCHEN: GAS LINE ROUGH-IN - MAIN FLOOR FOR GAS COOKTOP- SEE PLAN FOR LOCATION

DisciplineMS.rpt 26jun20 Page 3 of 5 Printed and Sent: 10-Sep-20



Lot: 109
Model: 50.04 A BEAUMONT
Project/Phase: Pine Valley Forevergreen / 1

INTERIOR TRIM AND DOORS

Invoice	Qty.	Qty. Description
2241	2	.BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " \times 24" - 10" FRAME (PINEVALLEY 50 FOOT LOTS ONLY)
10Sep20 NoCat		
2290	<u>—</u>	.FOYER - OPT. CIRCULAR COFFERED CEILING AS PER PLAN
10Sep20 NoCat		
2290	<u> </u>	.HALLWAY MAIN FLOOR - OPT. CIRCULAR COFFERED CEILING DETAIL AS PER PLAN
10Sep20		

MISC.

происе		Qıy.	ζψ. Description
	2241	1	BONUS PACKAGE: \$30,000.00 (INCLUDING TAXES) WORTH OF UPGRADES FROM GOLD PARK HOMES DÉCOR
			CENTRE IS BEING APPLIED TOWARD THIS ORDER. PURCHASER HAS A REMAINING AMOUNT OF \$28,672.25
			(INCLUDING TAXES).
10	0Sep20		
	NoCat		

NETWORK AND WIRING

Invoice	Qty.	Qty. Description
2290	1	KITCHEN (LOCATE ABOVE COUNTER AT CHEF'S DESK) / GREAT ROOM (LOCATE APPROX. 66" A.F.F. ABOVE
72,258		FIREPLACE) / BEDROOM 2 / BEDROOM 3 / BEDROOM 4: ADDITIONAL CAT6 ETHERNET OUTLET - EACH SEE PLAN FOR LOCATION
10Sep20		***PACKAGE PRICE***
2290	П	GREAT ROOM *NOTE* LOCATE STANDARD CABLE APPROX. 66" A.F.F. ABOVE FIREPLACE
10Sep20 NoCat		
2290 72,260 10Sep20	1	CONDUIT PIPE - FROM ATTIC TO BASEMENT - FROM ELECTRICAL PANEL IN BASEMENT TO APPROX. CENTER OF ATTIC

PAINT

Invoice	Qty.	Qty. Description
2290		FOYER - OPT. CIRCULAR COFFERED CEILING AS PER PLAN
10Sep20 NoCat	Cat	
2290		HALLWAY MAIN FLOOR - OPT. CIRCULAR COFFERED CEILING DETAIL AS PER PLAN
10Sep20	Cat	

PLUMBING

Invoice

Qty. Description

2290	_	BASEMENT:*IN ADDITION TO STANDARD* ADD A 2ND ROUGH-IN FOR 3PC IN BASEMENT, WASTE ROUGH-IN
72,342		ONLY, NO WATER LINES.
10Sep20		SEE PLAN FOR LOCATION

DisciplineMS.rpt 26jun20 Page 4 of 5 Printed and Sent: 10-Sep-20



Lot: 109
Model: 50.04 A BEAUMONT
Project/Phase: Pine Valley Forevergreen / 1


WINDOWS - BASEMENT

Qty. Description

10Sep20 NoCat 2241 2 .BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 10" FRAME (PINEVALLEY 50 FOOT LOTS ONLY)


DisciplineMS.rpt 26jun20 Page 5 of 5
Printed and Sent: 10-Sep-20






Beaumont The

Elevation A 4,170 sq.ft.
4,315 sq.ft. Opt. Elevator
Elevation B • 4,165 sq.ft.
4,315 sq.ft. Opt. Elevator
Elevation C • 4,250 sq.ft.
4,400 sq.ft. Opt. Elevator

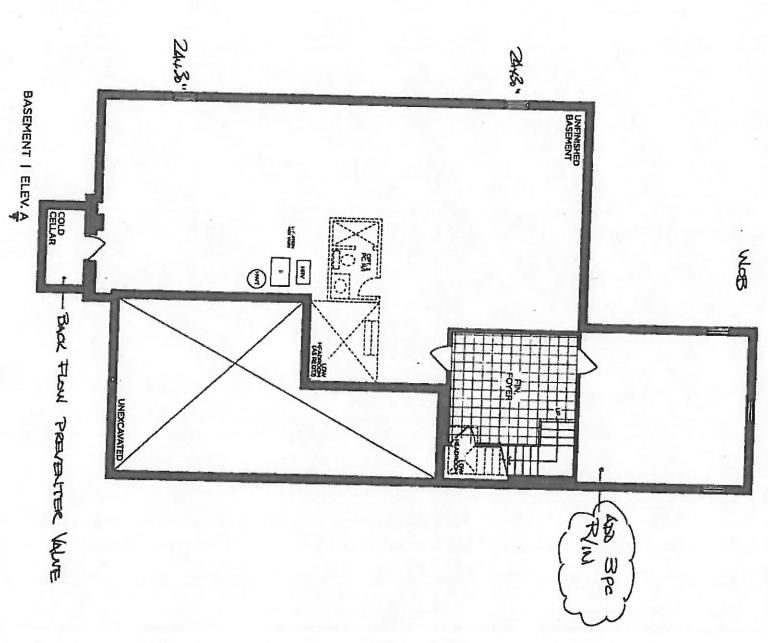



GOLDPARK WORTH MORE

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 5004


SCHEDULE 'F'



PU-109 APRIL 23

he

Elevation A. 4,170 sq.ft.
4,315 sq.ft. Opt. Elevator
Elevation B • 4,165 sq.ft.
4,315 sq.ft. Opt. Elevator
Elevation C • 4,250 sq.ft.
4,400 sq.ft. Opt. Elevator

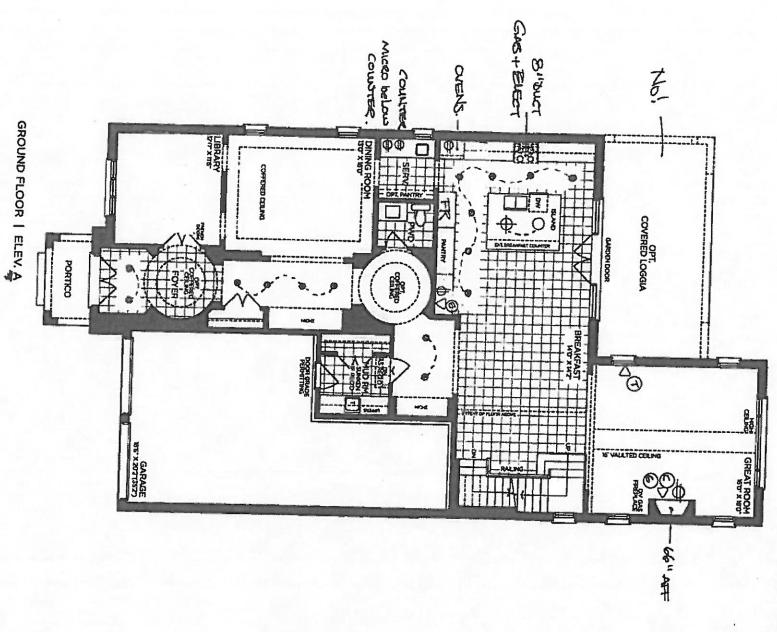

GOLDPARK WORTH MORE

VENDOR **PURCHASER** PURCHASER


SCHEDULE 'F'






The

Elevation 8. 4,170 sq.ft.
4,315 sq.ft. Opt. Elevator
Elevation 8. 4,165 sq.ft.
4,315 sq.ft. Opt. Elevator
Elevation C. 4,250 sq.ft.
4,400 sq.ft. Opt. Elevator

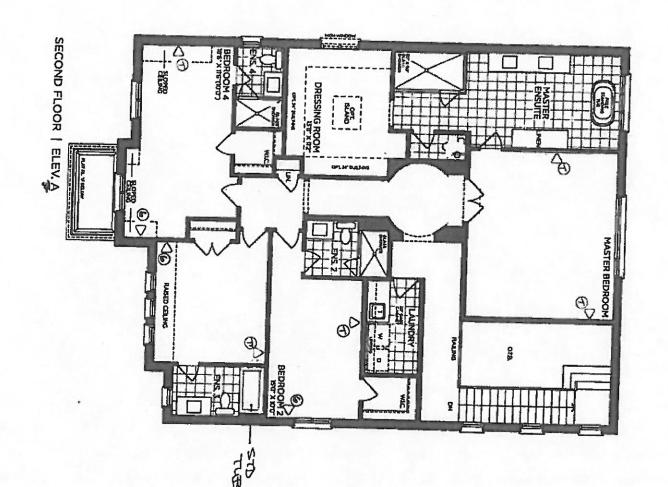



GOLDPARK WORTH MORE

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may very from the stated area. Layout may be reverse of the unit purchased, E. & O.E. 5004



PH60GWS 27-INCH DEPTH WALL H (60-INCH WIDTH) PROFESSIONAL® SERIES HOOD









FEATURES & BENEFITS

- 27" in depth, a perfect companion to Pro Grand® Professional Ranges
- ★- Equipped with the Thermador Connected Experience by Home Connect™
- Powerfully Quiet® system accepts integral, inline, and remote blowers $% \left\{ 1,2,...,n\right\}$
- Beautiful illumination with multi-level, vivid LED lights Keep food warm until it's ready to be served with two independently controlled infrared heat lamps

ACCESSORIES (OPTIONAL)
25 ft. Blower Connector Cable - EXTNCB25W

EXTNCB25W - For use with the following inline and remote blowers: VTR1030W, VTR1330W, VTI1010W

Roofplates

RFPLT1000P - For use with 1000 CFM remote blower VTR1030W and 1300 CFM blower VTR1330W

Built-In Remote Control Panel

REMCPW - Ability to vertically install on cabinetry or wall to control hood in a convenient location

WC10	10" Wall Cap
WC8	8" Wall Cap
RJ310	Roof Jack

Thermador.

GENERAL PROPERTIES

Features

Multi-Level LED Lights with Fading Transitions, Infrared Heat Lamps, Automatic Mode, Check Filter Reminder Light, Delay Shut-Off

Adtollatic Mode, Check I liter Nellinder Eight, Delay Shar Sh	eray Structon
Operating Mode	Ducted
Number of Speed Settings	4-Stage
Motor Location	Blower (Sold Separately)
Number Of Lights	4
Bulb Type	LED
Total Power Of The Lamps (W)	4.8
Damper Included	Yes
Grease Filter Material	Washable Stainless

Grease Filter Type

J. J.	
Stainless-Steel Commercial Style Baffle Filter	
Home Connect™ (Wi-Fi Enabled)	Yes
TECHNICAL DETAILS	
Watts (W)	See Chart on Page 3
Current (A)	See Chart on Page 3
Volts (V)	120 V
Frequency (Hz)	60 Hz
Plug Type	120V-3 Prong
DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (Width Of Canopy Included) (HxWxD) (in)	18" × 60" × 27"
Required Distance Above Cooktop / Range Cooking Surface	30" / 30"
Diameter of Air Duct (in) Top	10"
Diameter of Air Duct (in) Back	10"
Net Weight (lbs)	123 lbs
ACCESSORIES (REQUIRED)	THE RESIDENCE OF THE PARTY OF T
Blower (Sold Separately)	
BLOWER OPTIONS	

Blower (Sold Separately)	
BLOWER OPTIONS	
Remote Blower	VTR1030W - 1000 CFM
(Mounted to Roof or External Wall)	VTR1330W - 1300 CFM
Inline Blower	VTI1010W - 1000 CFM
(Mounted Between Kitchen and External Wall)	
Integrated Blower (Mounted in Hood)	VTN1090R - 1000 CFM
WARRANTY	The Control of the Control
Limited Warranty Parts And Labor	2 Year


THERMADOR EXCLUSIVE

Page 1 of 5 07 / 18



PH60GWS 27-INCH DEPTH WALL HOOD (60-INCH WIDTH) PROFESSIONAL® SERIES

HOOD DIMENSIONS

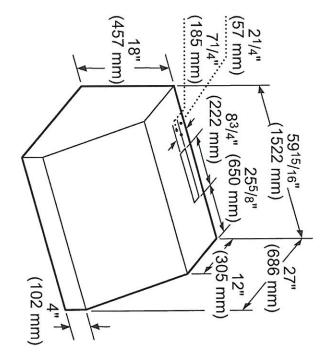

measurements in inches (mm)

OPTIONAL ACCESSORIES
REMOTE CONTROL PANEL
REMCPW

Throndon

Convenience at your fingertips: The remote control accessory offers the freedom to extend your hood controls to a more reachable spot

Page 2 of 5

07 / 18

Thermador,*





PH60GWS 27-INCH DEPTH WALL HOOD (60-INCH WIDTH) PROFESSIONAL® SERIES

Thermador.

WALL CAPS

8-INCH WALL CAP-WC8

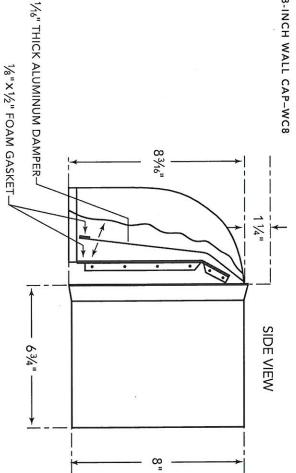

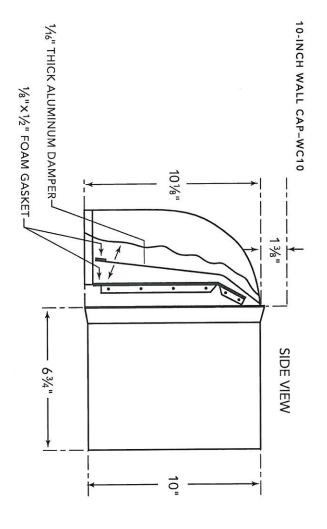

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada.

Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | @2018 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED



Thermador.*





- FEATURES & BENEFITS


 ★ 4 ExtraLow® burners for simmering, melting, or holding long durations
- ★ ExtraHigh Star® Burner—22,000 BTUs of power for searing or boiling Non-stick griddle and 2 zone grill—the flexibility to do everything

- Superfast 2.5-hour self-clean mode-fastest in the industry Spacious 5.7 cu. ft. oven accommodates full-size commercial sheet pans

TECHNICAL DETAILS	
Circuit Breaker	50 A
Volts	240 / 208 V, 60Hz 4 Wire
Energy Source	Gas and Electric
Plug Type	240V-4 prong; 14-50P
Power Cord Length	65" (1,651 mm)
Gas Supply	3/4"
WARRANTY	
Limited Warranty, Entire Appliance, Parts and Labor	2 Year

SEE PAGE 2 FOR INCLUDED AND OPTIONAL ACCESSORIES

RANGETOP




Total Number of Cooktop Burners	6 + Griddle + Grill
1 – Power of Back Left Burner BTU	12,500 and XHI / XLO
2 – Power of Front Left Burner BTU	22,000 and XHI / XLO
3 – Power of Back Center Burner BTU	15,000
4 – Power of Front Center Burner BTU	18,000
5 – Power of Center 12" Electric Grill	1,630 W (6-Pass)
6 – Power of Far Right 12" Electric Griddle	1,630 W (6-Pass)
7 – Power of Back Right Burner BTU	15,000 and XLO
8 – Power of Front Right Burner BTU	18,000 and XLO
OVEN	
Oven Capacity (Lg / Sm)	5.7 / 4.9 cu. ft.

Cooking Modes – Large Cavity

Bake, Convection Bake, True Convection, Convection Roast, Roast, Convection Broil, Broil
Cooking Modes – Small Cavity


Bake, Convection Bake, Proof, Keep Warm, Convection Roast, Roast, Convection Broil, Broil

Sabbath (Lg / Sm)	Yes / Yes
Self-Clean (Lg / Sm)	Yes / Yes
Telescopic Rack(s) (Lg / Sm)	3/3
Interior Lights (Lg / Sm)	2/2
Bake Power (Lg / Sm)	2,000 W / 2,000 W
Broil Power (Lg / Sm)	4,000 W / 4,000 W
Convection Power (Lg / Sm)	2,750 W / 2,750 W
Home Connect™ (Wi-Fi Enabled)	Yes, Large Oven Only
Lg Cavity Interior Dimensions (HxWxD)	16 1/4" × 28" × 21 1/2"
Lg Cavity Usable Dimensions (HxWxD)	12" x 25 3/8" x 19 1/2"
Sm Cavity Interior Dimensions (HxWxD)	16 3/8" × 24 1/4" × 21 1/2"
Sm Cavity Usable Dimensions (HxWxD)	12" x 22 1/2" x 19 1/2"
DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (HxWxD)	35 3/4" – 36 3/4" × 59 15/16" × 27 7/8"
Required Cutout Size (HxWxD)	35 3/4" - 36 3/4" × 60" × 24" - 25 1/8"
Net Weight	668 lbs.




Thermador.

60-INCH RANGE DIMENSIONS



60-INCH RANGE CUTOUT DIMENSIONS

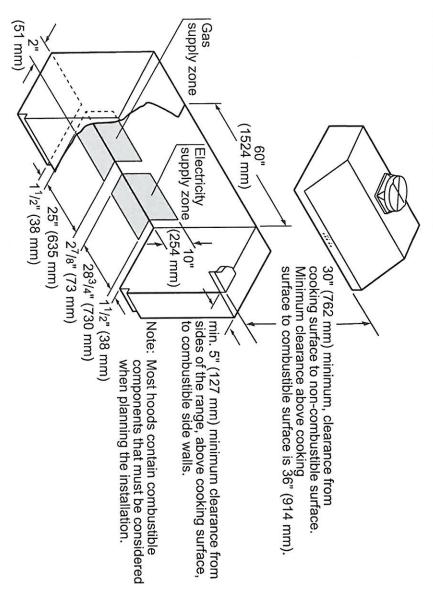


measurements in inches (mm)



Thermador.

60-INCH RANGE DIMENSIONS AND CLEARANCE REQUIREMENTS WITH "FLUSH ISLAND TRIM"

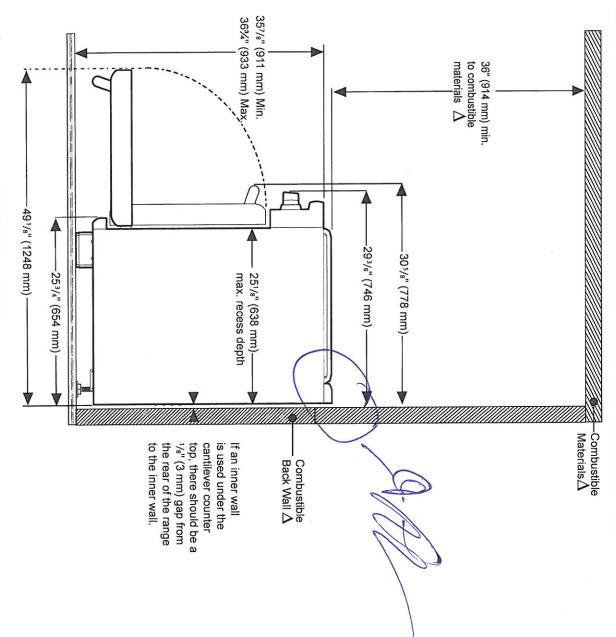

As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition).
Clearances from non-combustible materials are not part of the ANSI Z21.1
scope and are not certified by CSA. Clearances of less than 12" (305 mm)
must be approved by the local codes and/or by the local authority having jurisdiction

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada.


Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2018 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED



Thermador, *

60-INCH RANGE CUTOUT DIMENSIONS

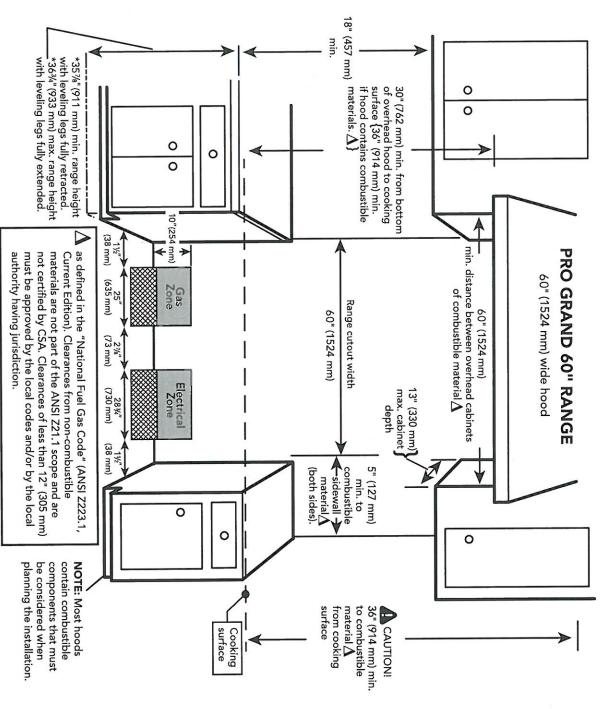



MD24WS 24-INCH MICRODRAWER® MICROWAVE MASTERPIECE® & PROFESSIONAL SERIES

Thermador.*





- Spacious 1.2 cu. ft. interior fits a 20 oz. cup or a 13" x 9" pan Achieve a perfectly flush installation in any standard depth cabinetry

 Our MicroDrawer® includes a special sensor mode that controls humidity and automatically adjusts cooking level and time
- 10 cooking modes that include melt, warm and soften
- Touch "open" and "close" eliminates the need for a handle

GENERAL PROPERTIES	
Cavity Color	White
Microwave Power (W)	950 W
CAPACITY	
Cavity Capacity (cu. ft.)	1.2 cu. ft.
Turntable Diameter (in.)	N/A
TECHNICAL DETAILS	
Watts (W)	1,500 W
Circuit Breaker (A)	15 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Plug Type	120V-3 Prong
Power Cord Length (in.)	48"
DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (HxWxD) (in.)	16 5/16" × 23 7/8" × 23 3/8"
Required Cutout Size (HxWxD) (in) – Standard Install	14 13/16" × 22 1/8" × 23 1/2"
Required Cutout Size (HxWxD) (in) – Flush Install	16 5/8" × 24 3/16" × 23 1/2"
Net Weight (lbs)	81 lbs.
ACCESSORIES (INCLUDED)	
N/A	
WARRANTY	
Limited Warranty, Entire Appliance, Parts and Labor	2 Year

NA
WARRANTY
Limited Warranty, Entire Appliance, Parts and 2 Year Labor


03 / 18



MD24WS 24-INCH MICRODRAWER® MICROWAVE MASTERPIECE® & PROFESSIONAL SERIES


Thermador,*

PRODUCT DIMENSIONS

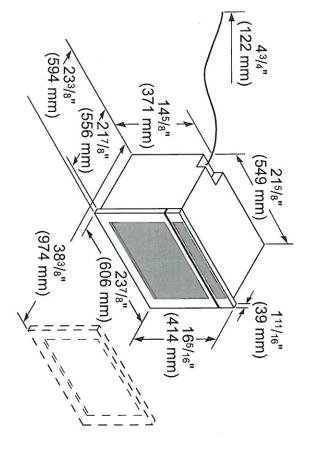

Page 2 of 3


03 / 18




24-INCH MICRODRAWER® MASTERPIECE® & PROFESSIONAL SERIES MD24WS MICROWAVE

Thermador.


STANDARD INSTALLATION





- * Suggested location of electrical outlet
 ** Anti-Tip Block
 *** Base should support up to 100 lbs

FLUSH INSTALLATION

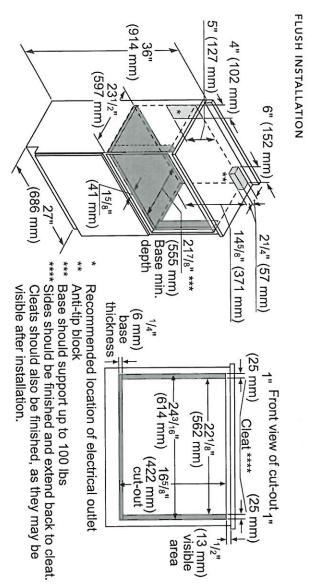

These warranties give you specific legal rights and you may have other rights details, refer to your Use & Care manual, or ask your dealer. ranty from date of installation. For cor


Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making cou engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying pr number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2018 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED



T36IR900SP 36-INCH BUILT-IN FRESH FOOD COLUMN FREEDOM® COLLECTION, PANEL-READY

Thermador.

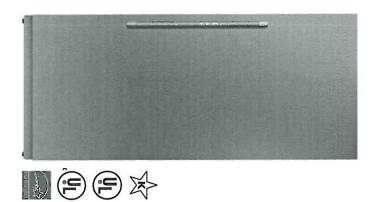

FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled
- storage Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES	
Refrigerator	35°F (2°C) to 46°F (8°C)
Temperature Controlled Drawer	32°F (0°C) to 46°F (8°C)
Deli Drawer	Just above 32°F (0°C)
Super Cool	35.5°F (2°C) for approximately 9 hours
Energy Saving (Economy) Mode	45°F (7°C)

Annual Energy Consumption	ENERGY STAR® Qualified	EFFICIENCY	Net / Gross Weight (lbs)	Required Cutout Size $(H \times W \times D)$ (in.)	Appliance Dimensions $(H \times W \times D)$ (in.)	DIMENSIONS & WEIGHT	Plug Type	Power Cord Length (in.)	Frequency (Hz)	Volts (V)	Current (A)	Watts (W)	TECHNICAL DETAILS	SuperCool	Freeflow® Cold Air System	Dedicated Evaporator & Compressor System	PERFORMANCE	Refrigerator Gross Capacity (cu. ft.)	Total Unit Gross Capacity (cu. ft.) – AHAM	CAPACITY	Special Modes	Open Door Assist	Door Open Alarm	Delicate Produce Bins	Gallon Door Bins	Door Bins	General Use Drawer	Temperature and Humidity Controlled Drawer	Full Extension Drawers @ 90° Door Opening Angle	Full Extension Drawers @ 115° Door Opening Angle	Shelf Material	Adjustable Shelves	Full Width Shelves	Lighting	Carbon Air Filter	SoftClose® Drawers	Reversible Door Swing	Panel Ready	GENERAL PROPERTIES
313 kWh	Yes		462 / 491 lbs	84" x 36" x 25"	83 3/4"* × 35 3/4" × 24 3/4"		120V-3 Prong	139	60 Hz	120V-3 Prong	15 A	180 W		Yes	Yes	Yes		20.6 cu. ft.	20.6 cu. ft.		Sabbath, Economy, Vacation	Yes	Yes	1 Small, 2 Large	_	2		_	Yes	Yes	Glass w/Aluminum Profile	ω	4	New Bar ALL LED Sidewall and Theater Lighting	Yes	Yes	Yes	Yes	

^{*}Height adjustable


T36IR900SP 36-INCH BUILT-IN FRESH FOOD FREEDOM® COLLECTION, PANEL-READY

Thermador.

COLUMN


WARRANTY	· · · · · · · · · · · · · · · · · · ·
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect 2 Year	2 Year
Limited Warranty for Sealed Refrigeration System**; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System**, Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

CUTOUT DIMENSIONS




A: Area for installation of power connection.


B: Niche depth depends on kitchen design.




TOP VIEW CLEARANCE



** Door handle must be added to this measurement







T36IR900SP 36-INCH BUILT-IN FRESH FOOD FREEDOM® COLLECTION, PANEL-READY COLUMN

Thermador.

PANEL DIMENSIONS

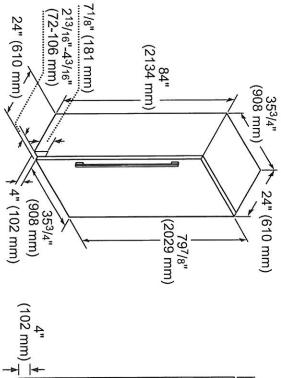



ACCESSORIES (OPTIONAL)

STORAGE



SPRODBIN10 Small Produce Bin



LPRODBIN10 Large Produce Bin



36PRODRAIL
36-Inch Produce Railing

HANDLES

NOTE: Choose one handle for each column, choose 2 handles for each 2-door bottom freezer and choose 3 handles for each French Door bottom freezer.

PR36HNDL20 36-Inch Professional Series Handle

PR30HNDL20 30-Inch Professional Series Handle

MS30HNDL20 30-Inch Masterpiece® Series Handle MS36HNDL20 36-Inch Masterpiece® Series Handle

PR30HNDL10
30-Inch Professional Series PR36HNDL10
36-Inch Professional Series Classic Handle Classic Handle

MS36HNDL10 36-Inch Masterpiece® Series Classic Handle

MS30HNDL10 30-Inch Masterpiece® Series Classic Handle

HEATRKIT10 AND HEATRKIT20 FREEDOM® HEATER KIT

36HFGALBIN 36-Inch Half Gallon Bin

For installations where two appliances are installed side-by-side or instances where any appliances are installed less than 6" apart from another but not connected. The heater kit is also recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall. HEATERKIT20 offers improved energy efficiency when compared to HEATRKIT10.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from details, refer to your Use & Care manual, or ask your dealer. date of installati

Specifications are for planning purposes only, Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada.

Thermador is not responsible for products that are transported from the U.S. for use in Canada.


1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2017 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED



T36IF900SP 36-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER

Thermador, *

FREEDOM® COLLECTION, PANEL-READY

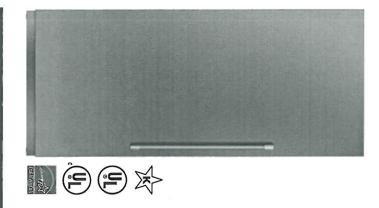


FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- The new Auto Door Opening provides the opening of the door with just a slight push or pull
- Energy Efficient Diamond Ice made with twist tray technology
- Smooth Filtered Lighting for clear and easy viewing of all product
- $SoftClose^{ ext{@}}$ Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- IFI control panel managing all your columns functions

I EIVIPERAL ONE KAINGES	
Freezer	-9°F (-23°C) to 7°F
	(14°C)
SuperFreeze®	-9°F (-23°C) for
3	approximately 52 hours
Energy Saving (Economy) Mode	3°F (-16°C)

*Height adjustable + / -1/2" (+ / -13 mm)	Annual Energy Consumption	ENERGY STAR® Qualified	EFFICIENCY	Net / Gross Weight (lbs)	Required Cutout Size $(H \times W \times D)$ (in.)	Appliance Dimensions (H × W × D) (in.)	DIMENSIONS & WEIGHT	Plug Type	Power Cord Length (in.)	Frequency (Hz)	Volts (V)	Current (A)	Watts (W)	TECHNICAL DETAILS	Defrost Process	SuperFreeze®	Dedicated Evaporator & Compressor System	PERFORMANCE	Freezer Gross Capacity (cu. ft.)	Total Unit Gross Capacity (cu. ft.) – AHAM	CAPACITY	Special Modes	Open Door Assist	Door Open Alarm	Ice Maker with Diamond Ice System	Rapid Water Replenishment System	Chilled Water, Crushed and Cubed Ice	Oversized Dispenser Opening	External LED Proximity Sensor	Door Bins	General Use Drawer	Full Extension Drawers @ 115° Door Opening Angle	Shelf Material	Freezer Shelves	Adjustable Shelves	Full Width Shelves	Lighting	SoftClose® Drawers	Reversible Door Swing	Panel Ready
	543 kWh	Yes		522 / 551 lbs	84" x 36" x 25"	83 9/4" × 35 9/4" × 24 3/4"		120V-3 Prong	139	60 Hz	120V-3 Prong	15 A	504 W	· · · · · · · · · · · · · · · · · · ·	Frost-Free	Yes	Yes		19.4 cu. ft.	19.4 cu. ft.	THE RESIDENCE OF THE PARTY OF T	Sabbath, Economy, Vacation	Yes	Yes	Yes	No	No	No	No	ω	2	Yes	Glass w/Aluminum Profile	4	3	ω	ALL LED Sidewall and Theater Lighting	Yes	Yes	Yes

^{*}Height adjustable + / -1/2" (+ / -13 mm)




T36IF900SP 36-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER

Thermador.**

FREEDOM® COLLECTION, PANEL-READY


WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect 2 Year	2 Year
Limited Warranty for Sealed Refrigeration System**, Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System**; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

CUTOUT DIMENSIONS




A: Area for installation of power connection.


B: Niche depth depends on kitchen design.



TOP VIEW CLEARANCE



** Door handle must be added to this dimension






T36IF900SP 36-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER

Thermador.

FREEDOM® COLLECTION, PANEL-READY

PANEL DIMENSIONS

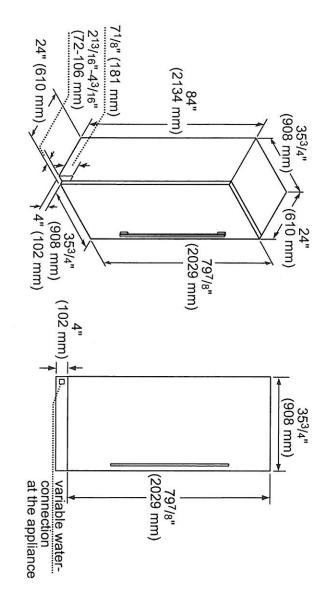

ACCESSORIES (OPTIONAL)

STORAGE



ICEBUCKETL Large Ice Bucket

HANDLES

NOTE: Choose one handle for each column, choose 2 handles for each 2-door bottom freezer and choose 3 handles for each French Door bottom freezer.

HR36HNDL20 36-Inch Professional Series Handle PR30HNDL20 30-Inch Professional Series Handle

MS36HNDL20 36-Inch Masterpiece® Series Handle MS30HNDL20 30-Inch Masterpiece® Series Handle

PR30HNDL10
30-Inch Professional Series PR36HNDL10
36-Inch Professional Series Classic Handle Classic Handle

MS30HNDL10 30-Inch Masterpiece® Series Classic Handle MS36HNDL10 36-Inch Masterpiece® Series Classic Handle

REPLFLTR10
FREEDOM® WATER FILTER
Replacement water filter for use in all freezer and bottom freezer models


HEATRKIT10 AND HEATRKIT20 FREEDOM® HEATER KIT

For installations where two appliances are installed side-by-side or instances where any appliances are installed less than 6" apart from another but not connected. The heater kit is also recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall. HEATERKIT20 offers improved energy efficiency when compared to HEATRKIT10.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installati details, refer to your Use & Care manual, or ask your dealer. in. For comp

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2017 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED



DWHD870WFP STAR SAPPHIRE® 8-PROGRAM DISHWASHER PROFESSIONAL SERIES HANDLE

Thermador.





HOME CONNECT

Also Available In:

DWHD870WFM – Flat Stainless Steel Panel with Masterpiece® Series Handle

DWHD870WPR – Custom Panel

FEATURES & BENEFITS

- ★ StarDry™ No one dries better. Star Dry with Zeolite: the ultra-powerful program that dries dishes better so place settings, glassware, and even sturdy plastics and containers with hard-to-reach crevices are ready for use immediately after each cycle
- ★ Star Speed® is a full wash cycle in just 20 minutes industry's
 fastest hot water wash
- Star Glow light illuminates your dishwasher with 3 levels of Sapphire Blue and introducing 3 levels of sparkling white light
- Push to Open dishwasher opens with either a push or pull, so loading is easier, even when your hands are full
- Entertainer's Drawer (3rd Rack) provides the ultimate flexibility in cleaning your culinary kitchen tools
- 18 Wine Glass Capacity No need to clean your glassware in two cycles; wash them all at once so you can get back to your guests
- Thermador Connected Experience by Home Connect brings exclusive dish features that keep you connected. Always.

ACCESSORIES (OPTIONAL)	
Dishwasher Supply and Drainage Hose Extension 76 3/4"	SGZ1010
Dishwasher Accessory Kit	SMZ5000
Fine Silverware Carafe	SMZ5002UC











Fine Silverware Carafe

Adjustability	h Cycles 8 ions 7 cons 7 44 44 Entertainer's I 7 Rackmatic 3-S Stainless Stee Touch Control Yes System 24/7 AquaSto Yes No Wi-Fi Enabled) Yes Cycle (g) 3.5 g r Cycle (g) 7/es V Class Tier 1 Qualified Yes rgy Class 16 DEHAILS 1440 W 12 A 120 V 60 Hz 12 A 12 A 120 V 60 Hz 140° F 8 WEIGHT N/A Ose (in) 79" 8 WEIGHT 33 7/8" x 23 9 4 Size (HxWxD) (in) 33 7/8" Min. x 24" Yes		To be a second of the second o
Adjustability	8 44 44 Entertainer's I Rackmatic 3-S Stainless Stee Touch Control Yes 24/7 AquaSto Yes No Yes No 15 At 140 W 12 A 120 V 60 Hz 47 1/4" 140° F N/A N/Sin) 13 7/8" × 23 9 23 3/8" × 23 9 23 3/8" × 23 9 23 3/8" Min. × 24" Min. × 24"	Yes	Adjustable Feet
Adjustability Adjustability Material Frol Type cealed Heating Element Protection System or Softener -Level Wash Illock The Connect (Wi-Fi Enabled) ICLENCY The Usage Per Cycle (g) The Connect (Wi-Fi Enabled) The Usage Per Cycle (g) The Connect (Wi-Fi Enabled) The Connect (Wi-Fi Enabled) The Connect (Wi-Fi Enabled) The Usage Per Cycle (g) The Connect (Wi-Fi Enabled) The Connect (Wi-Fi Enabled) The Usage Per Cycle (g) The Connect (Wi-Fi Enabled) The Usage Per Cycle (g) The Usage	ed) ption (kWh) ption (g) r Intake	33 7/8" Min. x 23 5/8" Min. x 24"	Required Cutout Size (HxWxD) (in)
Adjustability Adjustability Material Frol Type cealed Heating Element Protection System or Softener -Level Wash Illock The Connect (Wi-Fi Enabled) ICLENCY The Connect (Wi-Fi Enabled) The Connect (Wi-Fi En	ed) nption (kWh) ption (g)	x 23 9/16"	Overall Appliance Dimensions (HxWxD) (in)
ber Of Options Adjustability Material trol Type cealed Heating Element Protection System Frostection System or Softener Level Wash Click Protection System or Softener Level Wash Click Protection System or Softener Connect (Wi-Fi Enabled) ICIENCY ICIENCY Or Usage Per Cycle (g) gy Efficiency Class gy Efficiency Class gy Efficiency Consumption (kWh) I Annual Energy Consumption (g) ACITY ber Of Place Settings HNICAL DETAILS Is (W) ert (A) vent (A) s (V) puency (Hz) puency (Hz) from Water Pressure (lb/sin) mum Water Pressure (lb/sin) from Water Pressure (lb/sin) gth Inlet Hose (in) gth Outlet Hose (in)	ed) ption (kWh) ption (g)	CONCRETE ACT	DIMENSIONS & WEIGHT
ber Of Options I Rack Adjustability Material Itrol Type cealed Heating Element Protection System er Softener Level Wash Glock In Connect (Wi-Fi Enabled) Grer Usage Per Cycle (g) grer Usage Per Cycle (g) grer Usage Per Cycle (g) for Usage Per Cycle (g) I Annual Energy Consumption (kWh) I Annual Energy Consumption (kWh) I Annual Water Consumption (g) PACITY Sert (A) Sert (B)	ed) ption (kWh) ption (g)	79"	Length Outlet Hose (in)
ber Of Options Adjustability Material Irol Type Cealed Heating Element Protection System or Softener Level Wash Illock In Connect (Wi-Fi Enabled) ICLENCY Or Usage Per Cycle (g) ICLENCY I Annual Energy Consumption (kWh) I Annual Energy Consumption (g) PACITY DETAILS ts (W) ornt (A) rent (A) rent (A) rent (B) imum Water Pressure (lb/sin) imum Water Pressure (lb/sin)	ed) ption (kWh) ption (g) r Intake	N/A	Length Inlet Hose (in)
ber Of Options I Rack Adjustability Material trol Type cealed Heating Element Protection System or Softener -Level Wash Ilock The Connect (Wi-Fi Enabled) ICIENCY The Consumption (RWh) ICIENCY The Consumption (RWh) I Annual Energy Consumption (RWh) I Annual Energy Consumption (RWh) I Annual Water Consumption (g) PACITY Ther Of Place Settings HNICAL DETAILS Is (W) Ther Cord Length (in) Ther Cord Length (in) Ther Cord Length (in) Ther Cord Length (in)	ed) ption (kWh) ption (g)		Max. Temperature for Water Intake
ber Of Options di Rack Adjustability Material trol Type cealed Heating Element Protection System er Softener Level Wash dlock econnect (Wi-Fi Enabled) ICIENCY er Usage Per Cycle (g) gy Efficiency Class gy Efficiency Class RGY STAR® Qualified I Annual Energy Consumption (kWh) I Annual Water Consumption (g) PACITY ber Of Place Settings EHNICAL DETAILS ts (W) ent (A) ernt (A) err Cord Length (in)	ed) ption (kWh)	14	Minimum Water Pressure (lb/sin)
ber Of Options Adjustability Material Irol Type Cealed Heating Element Protection System er Softener -Level Wash Illock Be Connect (Wi-Fi Enabled) ICIENCY ICIENCY Ber Usage Per Cycle (g) rer Usage Per Cycle (g) RGY STAR® Qualified I Annual Energy Consumption (kWh) I Annual Water Consumption (g) PACITY Ber Of Place Settings EHNICAL DETAILS ts (W) rent (A) rent (A) s (V) puency (Hz)	ed) ption (kWh)	47 1/4"	Power Cord Length (in)
aber Of Options Adjustability Material trol Type cealed Heating Element Protection System or Softener -Level Wash Ilock The Connect (Wi-Fi Enabled) ICLENCY The Cycle (g) The Cycle (g) The Consumption (kWh) I Annual Energy Consumption (kWh) I Annual Energy Consumption (g) ACITY ACITY The Consumption (g) ACITY The Cons	ed) ption (kWh)	60 Hz	Frequency (Hz)
ber Of Options di Rack Adjustability Material trol Type cealed Heating Element Protection System er Softener Level Wash dlock er Connect (Wi-Fi Enabled) ICIENCY gr Efficiency Class gry Efficiency Class RGY STAR® Qualified I Annual Energy Consumption (kWh) I Annual Water Consumption (g) PACITY Der Of Place Settings EHNICAL DETAILS ts (W) ent (A)	ed) ption (kWh)	120 V	Volts (V)
ber Of Options Adjustability Material Irol Type cealed Heating Element Protection System er Softener -Level Wash Glock Teconnect (Wi-Fi Enabled) ICIENCY To Enabled ICIENCY To Enabled T	ed) ption (kWh)	12 A	Current (A)
ber Of Options I Rack Adjustability Material trol Type cealed Heating Element Protection System or Softener -Level Wash Ilock The Connect (Wi-Fi Enabled)	ed)	1440 W	Watts (W)
ber Of Options I Rack Adjustability Material trol Type cealed Heating Element Protection System Froftener Level Wash Ilciency re Connect (Wi-Fi Enabled) ICIENCY gy Efficiency Class regy Efficiency Class RGY STAR® Qualified I Annual Energy Consumption (kWh) I Annual Water Consumption (g) PACITY Ber Of Place Settings	ed)		1000
ber Of Options di Rack Adjustability Material trol Type cealed Heating Element Protection System er Softener Level Wash dlock ne Connect (Wi-Fi Enabled) cer Usage Per Cycle (g) gy Efficiency Class RGY STAR® Qualified I Annual Energy Consumption (kWh) I Annual Water Consumption (g)	ed)	16	Number Of Place Settings
ber Of Options I Rack Adjustability Material Irol Type cealed Heating Element Protection System er Softener -Level Wash Ilock Ine Connect (Wi-Fi Enabled) ICIENCY Ber Usage Per Cycle (g) er Usage Per Cycle (g) RGY STAR® Qualified I Annual Energy Consumption (kWh) I Annual Water Consumption (g)	ed) ption (kWh)		CAPACITY
sber Of Options I Rack Adjustability Material trol Type cealed Heating Element Protection System r Softener -Level Wash dlock te Connect (Wi-Fi Enabled) ICIENCY or Usage Per Cycle (g) rgy Efficiency Class RGY STAR® Qualified I Annual Energy Consumption (kWh)	ed)	623.5 g	Total Annual Water Consumption (g)
ber Of Options I Rack Adjustability Material trol Type cealed Heating Element Protection System er Softener Level Wash Ilcock Ine Connect (Wi-Fi Enabled) Ine Connect (Wi-Fi Enabled) Ine Usage Per Cycle (g) Type Type	ed)	269 kWh	Total Annual Energy Consumption (kWh)
her Of Options Adjustability Material Material Irol Type cealed Heating Element cealed Heating Element Protection System er Softener Level Wash dlock ne Connect (Wi-Fi Enabled) ICIENCY gy Efficiency Class	ed)	Yes	ENERGY STAR® Qualified
ber Of Options I Rack Adjustability Material trol Type cealed Heating Element Protection System or Softener -Level Wash Block I Connect (Wi-Fi Enabled) ICIENCY Or Usage Per Cycle (g)	ed)	Tier 1	Energy Efficiency Class
ber Of Options d Rack Adjustability Material trol Type cealed Heating Element Protection System er Softener Level Wash block Connect (Wi-Fi Enabled)	ed)		Water Usage Per Cycle (g)
ber Of Options d Rack Adjustability Material Itrol Type Itrol Type Cealed Heating Element Protection System or Softener -Level Wash Glock Heating Element Level Wash Connect (Wi-Fi Enabled)	ed.		EFFICIENCY
ber Of Options J Rack Adjustability Material trol Type cealed Heating Element Protection System Protection System er Softener Level Wash		Yes	Home Connect (Wi-Fi Enabled)
ber Of Options I Rack Adjustability Material trol Type cealed Heating Element Protection System er Softener Level Wash		No	Childlock
ber Of Options d Rack Adjustability Material trol Type troaled Heating Element Protection System er Softener		Yes	Five-Level Wash
ber Of Options J Rack Adjustability Material Material trol Type cealed Heating Element Protection System		Yes	Water Softener
ber Of Options J Rack Adjustability Material trol Type cealed Heating Element			Leak Protection System
ber Of Options J Rack Adjustability Material trol Type		Yes	Concealed Heating Element
ber Of Options J Rack Adjustability Material		Touch Controls	Control Type
ber Of Options J Rack Adjustability		Stainless Steel	Tub Material
ber Of Options		Rackmatic 3-Stage	Rack Adjustability
ber Of Options		Entertainer's Drawer	Third Rack
		44	dBA
		7	Number Of Options
	THE PARTY OF THE P	æ	Number Of Wash Cycles


7-109 PM

DWHD870WFP STAR SAPPHIRE® 8-PROGRAM DISHWASHER PROFESSIONAL SERIES HANDLE

Thermador.

WARRANTY	
Limited Warranty, Entire Appliance, Parts and Labor	2 Year
Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only	3rd to 5th Year
Limited Warranty for Racks (Does Not Include Rack Components); Parts Only	3rd to 5th Year
Limited Warranty for Rust-through On Inner Tub Liner; Parts Only	Lifetime

DISHWASHER & CUTOUT DIMENSIONS

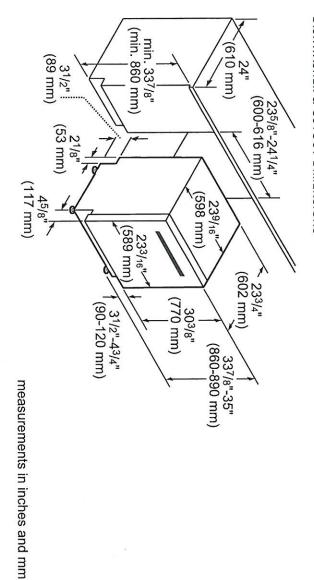

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For condetails, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada.

Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | @2018 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.