

APPLIANCES

Invoice	Qty.	Description
2398	1	Appliance specifications attached - signed
06Oct20		NoCat

CERAMIC

Invoice	Qty.	Description
2292	1	***REVISED LAYOUT*** MAIN FLOOR POWDER ROOM: REVISE LAYOUT TO BECOME SPICE KITCHEN COMPLETE WITH CHIMNEY HOOD FAN, COUNTER PLUG, 220V ELECTRICAL FOR RANGE, CABINETRY, GRANITE COUNTER, POCKET DOORS - SEE PLAN FOR LAYOUT. BASED ON STANDARD FINISHES
30Sep20		NoCat
2292	1	ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS
30Sep20		NoCat
2398	1	FOYER: TILE, FLOOR, LEVEL 5 - FOYER - 24X24" LAID IN STRAIGHT, STACKED PATTERN.
37		
06Oct20		
2398	1	MASTER ENSUITE: TILE, WALL, LEVEL 3 - MASTER ENSUITE - 12X24" LAID IN HORIZONTAL, STACKED PATTERN
49		
06Oct20		
2398	1	ENSUITE 2: TILE, FLOOR, LEVEL 3 - ENSUITE #2 - 12X24" LAID IN STRAIGHT, STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
35		
06Oct20		
2398	1	ENSUITE 3: TILE, FLOOR, LEVEL 3 - ENSUITE #3 - 12X24" LAID IN STRAIGHT, STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
35		
06Oct20		
2398	1	ENSUITE 4: TILE, FLOOR, LEVEL 3 - ENSUITE #4 - 12X24" LAID IN STRAIGHT, STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
35		
06Oct20		
2398	1	ENSUITE 4: TILE, WALL, LEVEL 4 - ENSUITE #4 - 12X24" LAID IN HORIZONTAL, STACKED PATTERN.
50		
06Oct20		
2398	1	TILE, FLOOR, LEVEL 2 - POWDER ROOM #1 - LEVEL 2
34		
06Oct20		
2398	1	TILE, FLOOR, LEVEL 2 - POWDER ROOM #2 - LEVEL 2
34		
06Oct20		

CERAMIC

Invoice	Qty.	Description
2398 35 06Oct20	1	SPICE KITCHEN: TILE, FLOOR , LEVEL 3 - 12X24" LAID IN STRAIGHT, STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
2398 35 06Oct20	1	BASEMENT FOYER: TILE, FLOOR , LEVEL 3 - BSMT FOYER - LEVEL 3 12x24" LAID IN STRAIGHT, STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
2398 35 06Oct20	1	MASTER ENSUITE: TILE, FLOOR , LEVEL 3 - MASTER ENSUITE - LEVEL 3 12x24" LAID IN STRAIGHT, STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
2398 35 06Oct20	1	MUD ROOM: TILE, FLOOR , LEVEL 3 - MUD ROOM - LEVEL 3 12x24" LAID IN STRAIGHT, STACKED PATTERN. SEE PLAN FOR TILE DIRECTION

CROWN MOULDING

Invoice	Qty.	Description
2292 30Sep20 NoCat	1	. GREAT ROOM - OPT. COFFERED CEILING AS PER PLAN
2292 30Sep20 NoCat	1	. LIBRARY - OPT. COFFERED CEILING AS PER PLAN

DRYWALL

Invoice	Qty.	Description
2292 30Sep20 NoCat	19	.2ND FLOOR: INCREASE HEIGHT OF DOOR TO 8FT SECOND FLOOR - PER DOOR
2292 30Sep20 NoCat	1	.GREAT ROOM - OPT. COFFERED CEILING AS PER PLAN
2292 30Sep20 NoCat	1	.LIBRARY - OPT. COFFERED CEILING AS PER PLAN
2292 30Sep20 NoCat	1	.MASTER BEDROOM - OPT. 10 FOOT TRAY CEILING AS PER PLAN
2292 30Sep20 NoCat	1	***CUSTOM LAYOUT*** REVISE LAYOUT OF POWDER ROOM TO MAKE SPACE FOR SPICE KITCHEN - POWDER ROOM TO BE COMPLETE WITH STANDARD TOILET AND *PEDESTAL SINK*
2292 30Sep20 NoCat	1	***REVISED LAYOUT*** MAIN FLOOR POWDER ROOM: REVISE LAYOUT TO BECOME SPICE KITCHEN COMPLETE WITH CHIMNEY HOOD FAN, COUNTER PLUG, 220V ELECTRICAL FOR RANGE, CABINETRY, GRANITE COUNTER, POCKET DOORS - SEE PLAN FOR LAYOUT. BASED ON STANDARD FINISHES

ELECTRICAL

Invoice	Qty.	Description
2292 72,281 30Sep20	1	.GREAT ROOM: INTERIOR WALL OUTLET: ADDITIONAL 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT FOR WALL MOUNTED TV - LOCATE APPROX. 66" A.F.F. ABOVE FIREPLACE
2292 72,303 30Sep20	1	.KITCHEN: FIXTURE: UNDER CABINET FLUORESCENT LIGHT FIXTURES - DOES NOT INCLUDE (AND REQUIRES) LIGHT VALANCE
2292 72,307 30Sep20	1	.KITCHEN: FIXTURE: RELOCATE STANDARD CEILING MOUNT FIXTURE - LOCATE APPROX CENTER ABOVE ISLAND
2292 72,289 30Sep20	6	.KITCHEN: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH INCLUDED IN APS
2292 72,282 30Sep20	1	.KITCHEN: ADDITIONAL 220V RECEPTACLE ON A SEPARATE CIRCUIT - FOR BUILT-IN WALL OVEN COMBO OVEN/MICRO - APPLIANCE NOT INCLUDED - DOES NOT INCLUDE BREAKER THAT IS TO BE INSTALLED BY LICENSED ELECTRICIAN AND ARRANGED BY HOMEOWNER AFTER CLOSING
2292 30Sep20 NoCat	1	.***REVISED LAYOUT*** MAIN FLOOR POWDER ROOM: REVISE LAYOUT TO BECOME SPICE KITCHEN COMPLETE WITH CHIMNEY HOOD FAN, COUNTER PLUG, 220V ELECTRICAL FOR RANGE, CABINETRY, GRANITE COUNTER, POCKET DOORS - SEE PLAN FOR LAYOUT. BASED ON STANDARD FINISHES
2292 30Sep20 NoCat	1	.ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS

FRAMING

Invoice	Qty.	Description
2292 72,644 30Sep20	19	.2ND FLOOR: INCREASE HEIGHT OF DOOR TO 8FT SECOND FLOOR - PER DOOR
2292 72,582 30Sep20	1	.GREAT ROOM - OPT. COFFERED CEILING AS PER PLAN
2292 72,587 30Sep20	1	.LIBRARY - OPT. COFFERED CEILING AS PER PLAN
2292 72,592 30Sep20	1	.MASTER BEDROOM - OPT. 10 FOOT TRAY CEILING AS PER PLAN
2292 30Sep20 NoCat	1	***CUSTOM LAYOUT*** REVISE LAYOUT OF POWDER ROOM TO MAKE SPACE FOR SPICE KITCHEN - POWDER ROOM TO BE COMPLETE WITH STANDARD TOILET AND *PEDESTAL SINK*
2292 30Sep20 NoCat	1	***REVISED LAYOUT*** MAIN FLOOR POWDER ROOM: REVISE LAYOUT TO BECOME SPICE KITCHEN COMPLETE WITH CHIMNEY HOOD FAN, COUNTER PLUG, 220V ELECTRICAL FOR RANGE, CABINETRY, GRANITE COUNTER, POCKET DOORS - SEE PLAN FOR LAYOUT. BASED ON STANDARD FINISHES
2292 72,350 30Sep20	1	.ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS
2292 30Sep20 NoCat	1	.CABANA: ADDITIONAL SINGLE DOOR 800 SERIES COMPLETE WITH BUILDERS STANDARD OFFERINGS
2292 30Sep20 NoCat	1	.KITCHEN - UPGRADE TO 8" DUCT (INTERIOR WALL) IN LIEU OF STANDARD OFFERING

GARAGE DOORS

Invoice	Qty.	Description
2292 72,324 30Sep20	2	.GARAGE DOOR OPENER (CHAMBERLAIN BELT DRIVE) - WITH 1 REMOTE - PRICE IS PER DOOR

GLASS AND MIRROR

Invoice	Qty.	Description
2292 30Sep20 NoCat	1	.ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS

GRANITE MARBLE QUARTZ

Invoice	Qty.	Description
2292 30Sep20 NoCat	1	.***REVISED LAYOUT*** MAIN FLOOR POWDER ROOM: REVISE LAYOUT TO BECOME SPICE KITCHEN COMPLETE WITH CHIMNEY HOOD FAN, COUNTER PLUG, 220V ELECTRICAL FOR RANGE, CABINETRY, GRANITE COUNTER, POCKET DOORS - SEE PLAN FOR LAYOUT. BASED ON STANDARD FINISHES
2398 06Oct20 NoCat	1	KITCHEN: UPGRADE 4 QUARTZ COUNTER TOP
2398 06Oct20 NoCat	1	KITCHEN: FULL SLAB BACKSPLASH
2398 06Oct20 NoCat	1	KITCHEN: WATERFALL LEGS AND SLAB BACKER AT ISLAND (UPGRADE 4)
2398 06Oct20 NoCat	1	MUD ROOM: UPGRADE 2 QUARTZ COUNTER
2398 06Oct20 NoCat	1	POWDER (CABANA): UPGRADE 2 QUARTZ COUNTER TOP
2398 06Oct20 NoCat	1	MASTER ENSUITE: UPGRADE 4 QUARTZ COUNTER TOP
2398 06Oct20 NoCat	1	ENSUITE 2: UPGRADE 1 QUARTZ COUNTER TOP
2398 06Oct20 NoCat	1	ENSUITE 3: UPGRADE 4 QUARTZ COUNTER TOP
2398 06Oct20 NoCat	1	ENSUITE 4: UPGRADE 2 QUARTZ COUNTER TOP

CONSTRUCTION SUMMARY

Lot: 110

Model: 50.05 B KNIGHTSWOOD

Project/Phase: Pine Valley Forevergreen / 1

HARDWOOD

Invoice	Qty.	Description
2398 7 060ct20	1	VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, SCULPTED TEXTURE, UVF FINISH - LIBRARY - LEVEL 4
2398 7 060ct20	1	VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, SCULPTED TEXTURE, UVF FINISH - MAIN HALL - LEVEL 4
2398 7 060ct20	1	VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, SCULPTED TEXTURE, UVF FINISH - DINING ROOM - LEVEL 4
2398 7 060ct20	1	VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, SCULPTED TEXTURE, UVF FINISH - GREAT ROOM - LEVEL 4
2398 7 060ct20	1	VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, SCULPTED TEXTURE, UVF FINISH - KITCHEN/ BREAKFAST - LEVEL 4
2398 7 060ct20	1	VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, SCULPTED TEXTURE, UVF FINISH - CABANA - LEVEL 4
2398 7 060ct20	1	VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, SCULPTED TEXTURE, UVF FINISH - UPPER HALL - LEVEL 4
2398 7 060ct20	1	VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, SCULPTED TEXTURE, UVF FINISH - MASTER BEDROOM - LEVEL 4
2398 7 060ct20	1	VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, SCULPTED TEXTURE, UVF FINISH - BEDROOM 2 - LEVEL 4
2398 7 060ct20	1	VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, SCULPTED TEXTURE, UVF FINISH - BEDROOM 3 - LEVEL 4
2398 7 060ct20	1	VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, SCULPTED TEXTURE, UVF FINISH - BEDROOM 4 - LEVEL 4

HVAC

Invoice	Qty.	Description
2292 72,218 30Sep20	1	.KITCHEN - UPGRADE TO 8" DUCT (INTERIOR WALL) IN LIEU OF STANDARD OFFERING
2292 30Sep20 NoCat	1	***REVISED LAYOUT*** MAIN FLOOR POWDER ROOM: REVISE LAYOUT TO BECOME SPICE KITCHEN COMPLETE WITH CHIMNEY HOOD FAN, COUNTER PLUG, 220V ELECTRICAL FOR RANGE, CABINETRY, GRANITE COUNTER, POCKET DOORS - SEE PLAN FOR LAYOUT. BASED ON STANDARD FINISHES

INTERIOR TRIM AND DOORS

Invoice	Qty.	Description
2292 30Sep20 NoCat	19	.2ND FLOOR: INCREASE HEIGHT OF DOOR TO 8FT SECOND FLOOR - PER DOOR
2292 30Sep20 NoCat	1	.GREAT ROOM - OPT. COFFERED CEILING AS PER PLAN
2292 30Sep20 NoCat	1	.LIBRARY - OPT. COFFERED CEILING AS PER PLAN
2292 30Sep20 NoCat	1	.MASTER BEDROOM - OPT. 10 FOOT TRAY CEILING AS PER PLAN
2292 30Sep20 NoCat	1	***CUSTOM LAYOUT*** REVISE LAYOUT OF POWDER ROOM TO MAKE SPACE FOR SPICE KITCHEN - POWDER ROOM TO BE COMPLETE WITH STANDARD TOILET AND *PEDESTAL SINK*
2292 30Sep20 NoCat	1	***REVISED LAYOUT*** MAIN FLOOR POWDER ROOM: REVISE LAYOUT TO BECOME SPICE KITCHEN COMPLETE WITH CHIMNEY HOOD FAN, COUNTER PLUG, 220V ELECTRICAL FOR RANGE, CABINETRY, GRANITE COUNTER, POCKET DOORS - SEE PLAN FOR LAYOUT. BASED ON STANDARD FINISHES
2292 30Sep20 NoCat	1	.ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS

KITCHEN AND BATH CABINETRY

Invoice	Qty.	Description
2292 30Sep20 NoCat	1	.***REVISED LAYOUT*** MAIN FLOOR POWDER ROOM: REVISE LAYOUT TO BECOME SPICE KITCHEN COMPLETE WITH CHIMNEY HOOD FAN, COUNTER PLUG, 220V ELECTRICAL FOR RANGE, CABINETRY, GRANITE COUNTER, POCKET DOORS - SEE PLAN FOR LAYOUT. BASED ON STANDARD FINISHES
2292 30Sep20 NoCat	1	.KITCHEN - UPGRADE TO 8" DUCT (INTERIOR WALL) IN LIEU OF STANDARD OFFERING
2398 06Oct20 NoCat	1	THRU OUT: SEE ATTACHED CABINETRY SCHEDULE

NETWORK AND WIRING

Invoice	Qty.	Description
2292 72,260 30Sep20	1	CONDUIT PIPE - FROM ATTIC TO BASEMENT - BASEMENT NEAR ELECTRICAL PANEL TO APPROX. CENTER OF ATTIC

PAINT

Invoice	Qty.	Description
2292 30Sep20 NoCat	19	.2ND FLOOR: INCREASE HEIGHT OF DOOR TO 8FT SECOND FLOOR - PER DOOR
2292 30Sep20 NoCat	1	.GREAT ROOM - OPT. COFFERED CEILING AS PER PLAN
2292 30Sep20 NoCat	1	.LIBRARY - OPT. COFFERED CEILING AS PER PLAN
2292 30Sep20 NoCat	1	.MASTER BEDROOM - OPT. 10 FOOT TRAY CEILING AS PER PLAN
2292 30Sep20 NoCat	1	.***CUSTOM LAYOUT*** REVISE LAYOUT OF POWDER ROOM TO MAKE SPACE FOR SPICE KITCHEN - POWDER ROOM TO BE COMPLETE WITH STANDARD TOILET AND *PEDESTAL SINK*
2292 30Sep20 NoCat	1	.***REVISED LAYOUT*** MAIN FLOOR POWDER ROOM: REVISE LAYOUT TO BECOME SPICE KITCHEN COMPLETE WITH CHIMNEY HOOD FAN, COUNTER PLUG, 220V ELECTRICAL FOR RANGE, CABINETRY, GRANITE COUNTER, POCKET DOORS - SEE PLAN FOR LAYOUT. BASED ON STANDARD FINISHES
2398 06Oct20 NoCat	2	MAIN STAIRS: STAIN STAIRS AND LANDINGS STAIRS AND LANDINGS WILL NOT MATCH HARDWOOD FLOORS

PLUMBING

Invoice	Qty.	Description
2292 72,346 30Sep20	1	KITCHEN: ROUGH-IN FOR KITCHEN POT FILLER (FIXTURE NOT INCLUDED)
2292 30Sep20 NoCat	1	.***REVISED LAYOUT*** MAIN FLOOR POWDER ROOM: REVISE LAYOUT TO BECOME SPICE KITCHEN COMPLETE WITH CHIMNEY HOOD FAN, COUNTER PLUG, 220V ELECTRICAL FOR RANGE, CABINETRY, GRANITE COUNTER, POCKET DOORS - SEE PLAN FOR LAYOUT. BASED ON STANDARD FINISHES
2292 30Sep20 NoCat	1	.ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS
2292 30Sep20 NoCat	1	.***CUSTOM LAYOUT*** REVISE LAYOUT OF POWDER ROOM TO MAKE SPACE FOR SPICE KITCHEN - POWDER ROOM TO BE COMPLETE WITH STANDARD TOILET AND *PEDESTAL SINK*
2398 06Oct20 NoCat	1	KITCHEN: STAINLESS STEEL UNDERMOUNT SINK #401520
2398 06Oct20 NoCat	1	SPICE KITCHEN: STAINLESS STEEL UNDERMOUNT SINK #401517

STAIR AND RAILINGS

Invoice	Qty.	Description
2398 94,044 06Oct20	2	UPGRADE - EUROLINE S/S, 3" RECTANGULAR HANDRAIL, 3 1/2" ALL SQUARE POST WITH SQUARE STYLE W/BAND POST CAP - PACKAGE E

WINDOWS AND DOORS

Invoice	Qty.	Description
2292 72,638 30Sep20	1	. CABANA: ADDITIONAL SINGLE DOOR 800 SERIES COMPLETE WITH BUILDERS STANDARD OFFERINGS

Purchaser: RIAZ AHMAD
Telephone Res. / Bus: / (416) 801-4541
Decor Advisor: Yolande Somerville

Property: 110 of Plan -
Project: Pine Valley Forevergreen - Phase 1
Model and Elevation: 50.05 B KNIGHTSWOOD

Layout Changes: ☒ Yes ☐ No Sketch Attached: ☒ Yes ☐ No Exterior Colour Scheme:

1. Cabinetry

	Style and Colour	Counter	Hardware
Kitchen / Breakfast	*Manhattan 'Latte'	*C.S. 'White Attica'	*
Laundry Room	Tribeca 'Stello'	P-Lam Std white	H00903
Powder Room	*Chelsea 'Grey' higgloss	*C.S. 'Misty Carrara'	*
Ensuite 4	*Manhattan 'Shale'	*C.S. 'Misty Carrara'	H00903
Master Ensuite Bathroom		*Broadway II 'Hi gloss white'	H03903
Second Ensuite Bathroom (If Applicable)		* Windermere 'Oyster'	H00103
Ensuite 3		*Manhattan 'Glazed Oyster'	H01103

Comment

Mud Room: S-2 Tribeca 'Stello' H0390-03 C.S. 'Misty Carrara'

2. Floor Tile

	Selection
Entrance Vestibule	*24x24" Carrara X White polished
Main Hall	see hardwood
Kitchen / Breakfast	*12x24" Carrara X White polished (spice kitchen ONLY)
Laundry Room	*12x24" Carrara X White polished
Powder Room	*12x24" Carrara X White polished
Ensuite 4	*12x24" Carrara X White polished
Master Ensuite Bathroom	*12x24" Carrara X White polished
Second Ensuite Bathroom (If Applicable)	*12x24" Carrara X White polished
Lower Landing (If Applicable)	*12x24" Carrara X White polished (basement landing)
Ensuite 3	*12x24" Carrara X White polished

Comment

Powder Room 2: *12x24" Carrara X White polished Mud Room: *12x24" Carrara X White polished Standard shower floor tile thru out: 2" ont white matte

3. Wall Tile

	Selection	Listello/Inserts	Describe
Ensuite 4	8X10" Uniwall 'White'	☐ Yes ☒ No	
Master Ensuite Bathroom			
	Tub Deck	☐ Yes ☒ No	
	Shower Stall	☐ Yes ☒ No	
	Bathroom Walls	☐ Yes ☒ No	
Second Ensuite Bathroom (If Applicable)	8X10" Uniwall 'White'	☐ Yes ☒ No	
Ensuite 3	8X10" Uniwall 'White'	☐ Yes ☒ No	
Kitchen Backsplash	☒ Yes ☐ No		Backsplash Behind Fridge
Comment	full slab		

Purchaser: RIAZ AHMAD
Telephone Res. / Bus: / (416) 801-4541
Decor Advisor: Yolande Somerville

Property: 110 of Plan -
Project: Pine Valley Forevergreen - Phase 1
Model and Elevation: 50.05 B KNIGHTSWOOD

4. Plumbing Fixtures

☐	☐	☐	☐
Master Ensuite Bathroom	Second Ensuite	Powder Room	
☐	☐	☐	☐
Other Room - Specify		Other Washroom	
Comment			
Standard except as noted			

5. Hardwood Flooring

Type and Stain	Type and Stain
Main Hall	Upper Landing
Kitchen / Breakfast	Upper Hall
Living Room	Master Bedroom
Dining Room	Bedroom #2
Family Room	Bedroom #3
Den/Library	Bedroom #4
Entrance Vestibule	Bedroom #5
Lower Landing (If Applicable)	Other Room - Specify
	Thru out standard areas
*3/4x5" wht ok Wire Brush 'Gotham	

Comment

6. Carpeting

Upgrade	Description
☐	
☐	
☐	
Type	Area
Capped	Runner - *Upgrade

Comment

7. Fireplace

Living Room	Family Room	Other Room - Specify
Purchased	Purchased	Purchased
As Per Plan	As Per Plan	As Per Plan
☐	☐	☐
N/A	N/A	N/A
☐	☐	☐
Fireplace Type	Std Gas	
Mantle Type	Mediterranean	
Colour / Stain	Arctic white	
Surround	none	
Hearth	none	

Comment

*** NOTE: This is not an approved document. Document must be locked ***

Scheduled Closing Date: Tuesday, February 23, 2021

Purchaser: RIAZ AHMAD
Telephone Res. / Bus: / (416) 801-4541
Decor Advisor: Yolande Somerville

Property: 110 of Plan -
Project: Pine Valley Forevergreen - Phase 1
Model and Elevation: 50.05 B KNIGHTSWOOD

8. Trim Carpentry

Interior Doors	*Standard	Front Door Glass Inserts	n/a	Door Handles	std
Interior Trim	*West End				
Comment					

9. Plaster Mouldings and Medallions

Standard Throughout ☐ Yes ☐ No ☒ N/A

Entrance Vestibule			Kitchen/Breakfast		
Main Hall			Den/Library		
Living Room			Lower Landing		
Dining Room			Other Room - Specify		
Family Room					
Comment					

10. Railings and Spindles

Railing Package	*Package E	Spindle Colour	*Black
Railing Colour	*Graphite	Treads	*Graphite
Stringer / Riser	*Graphite	Oak Stairs	☒ Yes ☐ No ☐ N/A
Comment			

11. Wall Paint / Ceilings

Throughout Finished Areas	Cool White
Trim Paint	White
Smooth Ceilings	
Ground Floor	☒
Second Floor	☒
Note	

Comment

--

*** NOTE: This is not an approved document. Document must be locked ***
Scheduled Closing Date: Tuesday, February 23, 2021

Purchaser: RIAZ AHMAD
Telephone Res. / Bus: / (416) 801-4541
Decor Advisor: Yolande Somerville

Property: 110 of Plan -
Project: Pine Valley Forevergreen - Phase 1
Model and Elevation: 50.05 B KNIGHTSWOOD

12. Electrical

Hood Fan ☐ White ☐ Stainless ☐ N/A

Above Kitchen Cabinet Light ☐ Yes ☒ No
Below Kitchen Cabinet Light ☐ Yes ☐ No

Standard Appliances ☐

Over The Range Microwave ☐

Chimney Style Fan ☐

Comment

spice kitchen

13. Heating and Air Conditioning

Air Conditioning

Gas Provisions Stove

yes

Gas Provisions Dryer

no

Gas Provisions Barbecue

std

Comment

14. Additional Comments

15. Disclaimers and Notes

- 1) Colours of all materials are as close as possible to builder's selection, but not necessarily identical due to variances in manufacturing.
- 2) Any extras listed above are null and void unless accompanied by a separate invoice/amendment. Said invoice must be paid in full.
- 3) The Purchaser acknowledges that after Interior Colour Selection form is signed and dated, no further changes will be permitted other than re-selection due to unavailability. _____ Purchaser's Initials
- 4) The Purchaser acknowledges reading and accepting the "Gold Park Homes Decor Centre Disclaimers" form. This document contains other miscellaneous disclaimers.

This Interior Colour Selection is final and approved by:

Signature: _____ Date: _____




PINE VALLEY
FOREVERGREEN

SCHEDULE 'F'

The Knightswood 50' SERIES

PV-110 *attached*
April 2, 2020
PV-110 *B* 4,475 sq.ft. Opt. Elevator / 4,575 sq.ft. Opt. Service Stairs
October 6, 2020 4,475 sq.ft. Opt. Elevator / 4,575 sq.ft. Opt. Service Stairs
Elevation A • 4,445 sq.ft.
→ Elevation B • 4,440 sq.ft.
Elevation C • 4,525 sq.ft.
4,560 sq.ft. Opt. Elevator / 4,660 sq.ft. Opt. Service Stairs

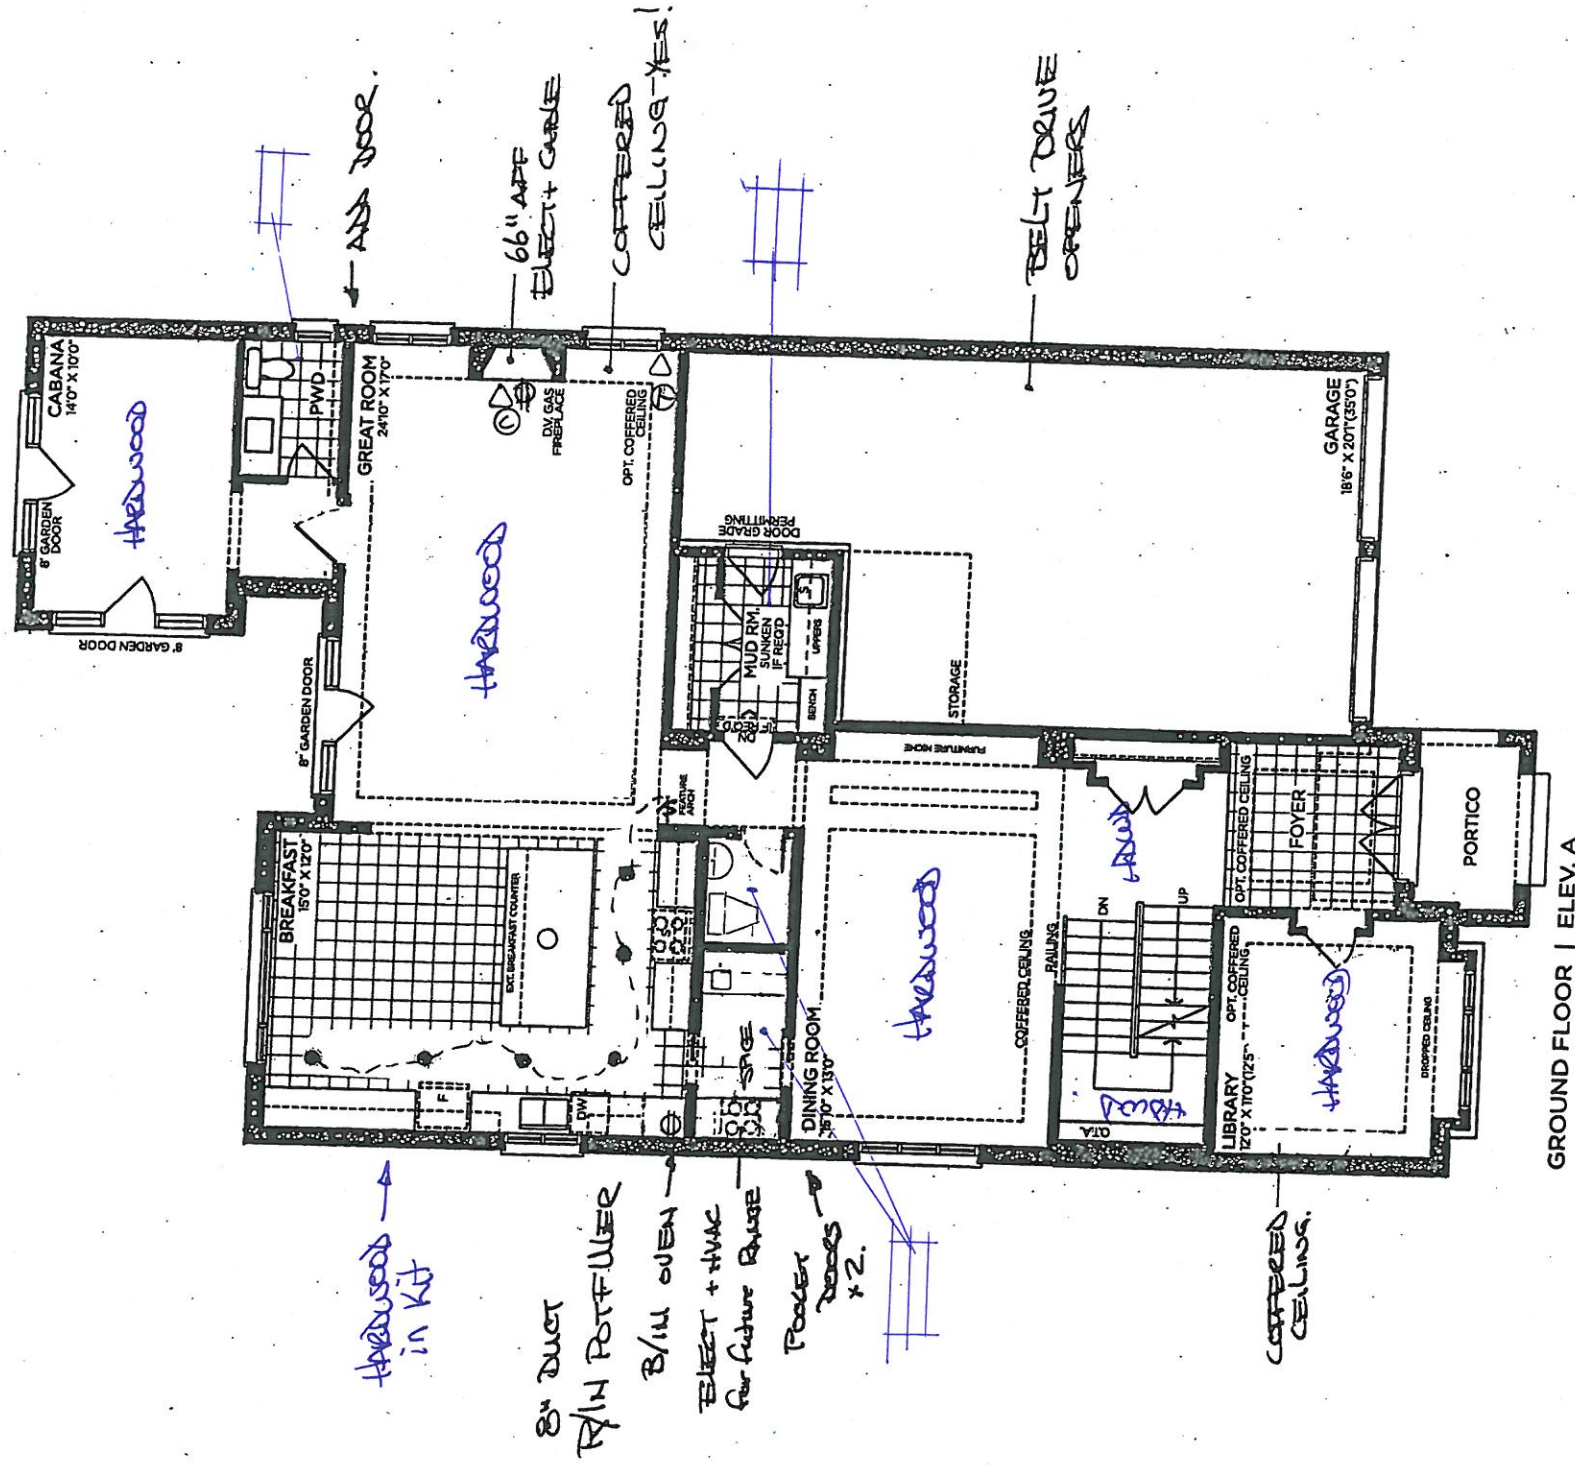

GROUND FLOOR | ELEV. A

VENDOR

PURCHASER

PURCHASER

GOLDPARK

WORTH MORE™

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 5005



PINE VALLEY
FOREVERGREEN

SCHEDULE 'F'

changed
copy

PV-110

April 21, 2020

PV-110

October 6, 2020


The Knightswood 50' SERIES

Elevation A • 4,445 sq.ft.
4,475 sq.ft. Opt. Elevator / 4,575 sq.ft. Opt. Service Stairs

→ Elevation B • 4,440 sq.ft.
4,475 sq.ft. Opt. Elevator / 4,575 sq.ft. Opt. Service Stairs

Elevation C • 4,525 sq.ft.
4,560 sq.ft. Opt. Elevator / 4,660 sq.ft. Opt. Service Stairs

8' doors
on 2nd floor

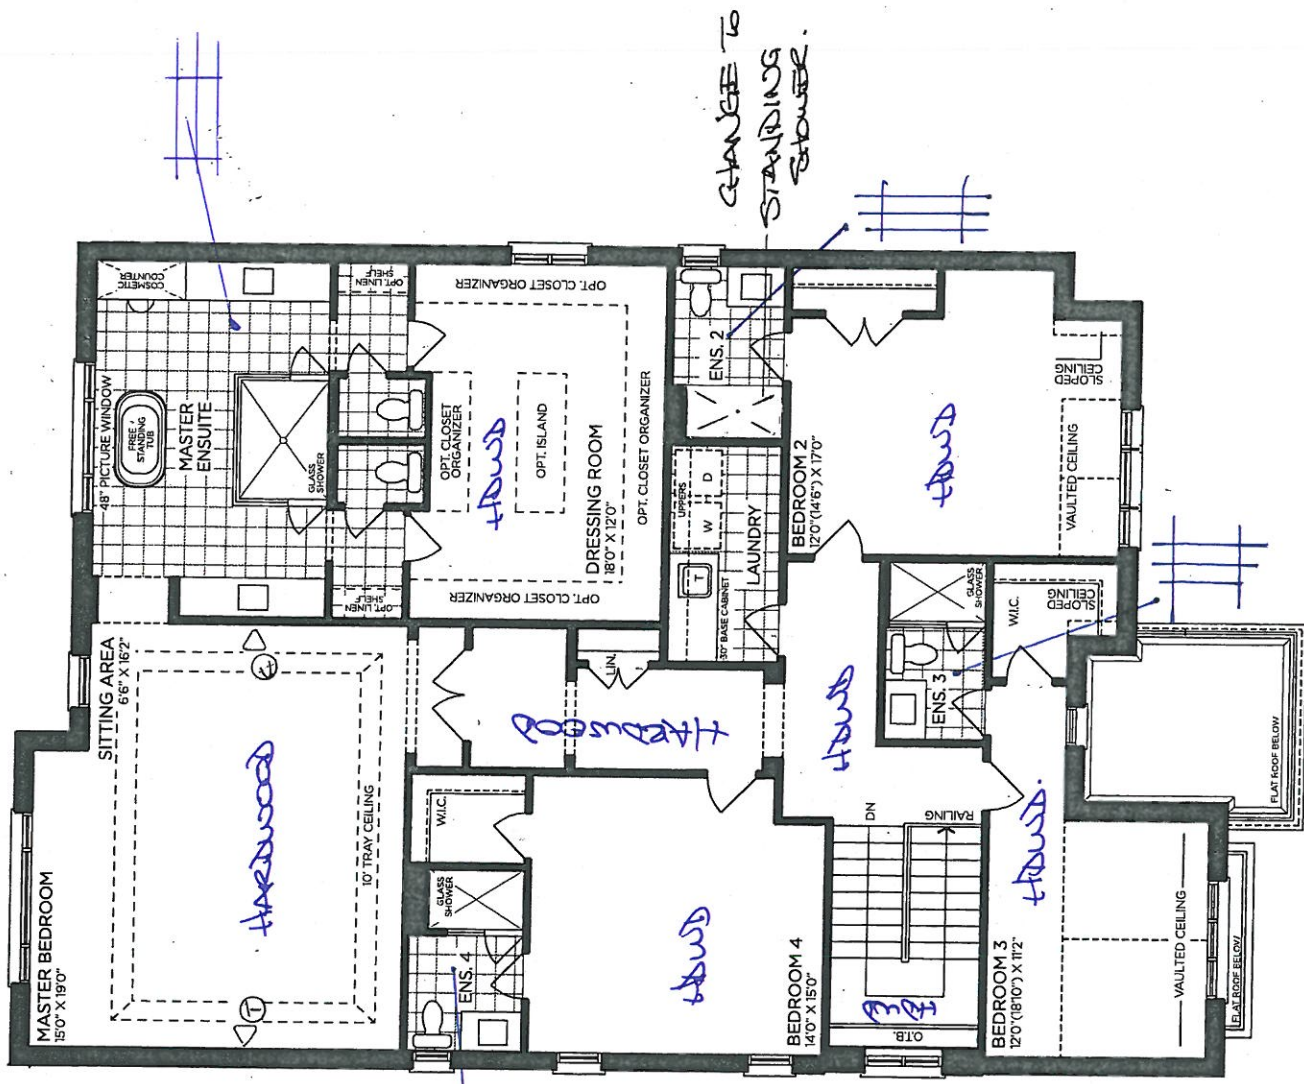

SECOND FLOOR | ELEV. A

VENDOR
PURCHASER
PURCHASER

GOLDPARK
WORTH MORE™

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 5005



PINE VALLEY
FOREVERGREEN


SCHEDULE 'F'

PN-110 ^{see attached}
APRIL 21, 2020

PV-110 ^{OK}
October 6, 2020

The Knightswood 50' SERIES

Elevation A • 4,445 sq.ft.
4,475 sq.ft. Opt. Elevator / 4,575 sq.ft. Opt. Service Stairs
Elevation B • 4,440 sq.ft.
4,475 sq.ft. Opt. Elevator / 4,575 sq.ft. Opt. Service Stairs
Elevation C • 4,525 sq.ft.
4,560 sq.ft. Opt. Elevator / 4,660 sq.ft. Opt. Service Stairs

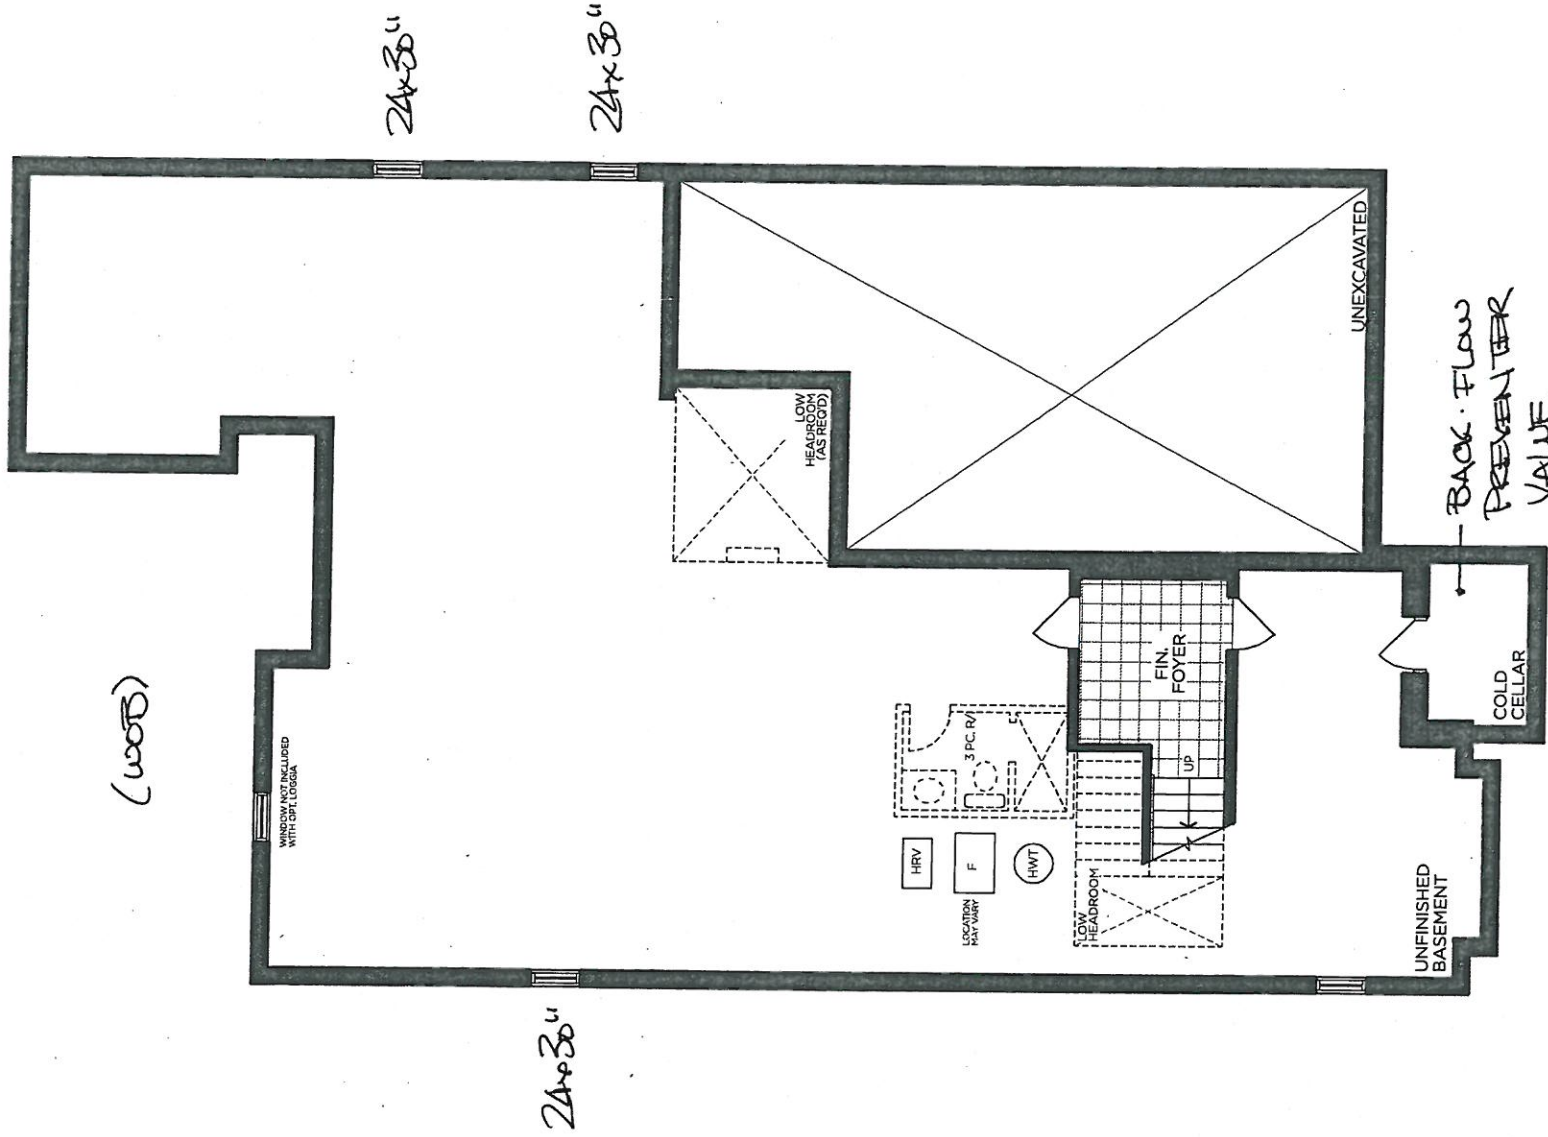

BASEMENT | ELEV. A

VENDOR
PURCHASER
PURCHASER

GOLDPARK
WORTH MORE

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 5005

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 5005



Howe: RH-071-03 + RAH 073-03 (appliance)

* ~~thru~~ in ~~cut~~.

**SITE STANDARD: WHITE 3/4" EXTENSION
SOFT-CLOSE DRAWERS & SOFT-CLOSE
HINGES TO KITCHEN AREA**

36"

90"
C

BF30

BSF39

24"
D/W
SPACE

W2145R

FGT27V-S

W2145L

27"

GR FL KITCHEN

GR FL SERVRY

[illegible]

2 Door
PANTRY

2 Door
PANTRY

B/I/N
FREEZER
Panel Ready


FRIDGE
B/I/N
Panel
Ready

24"
RECYCLE

STD B/D...

WALL
OVENS.










30"
RANGE
+
Chimney
above.

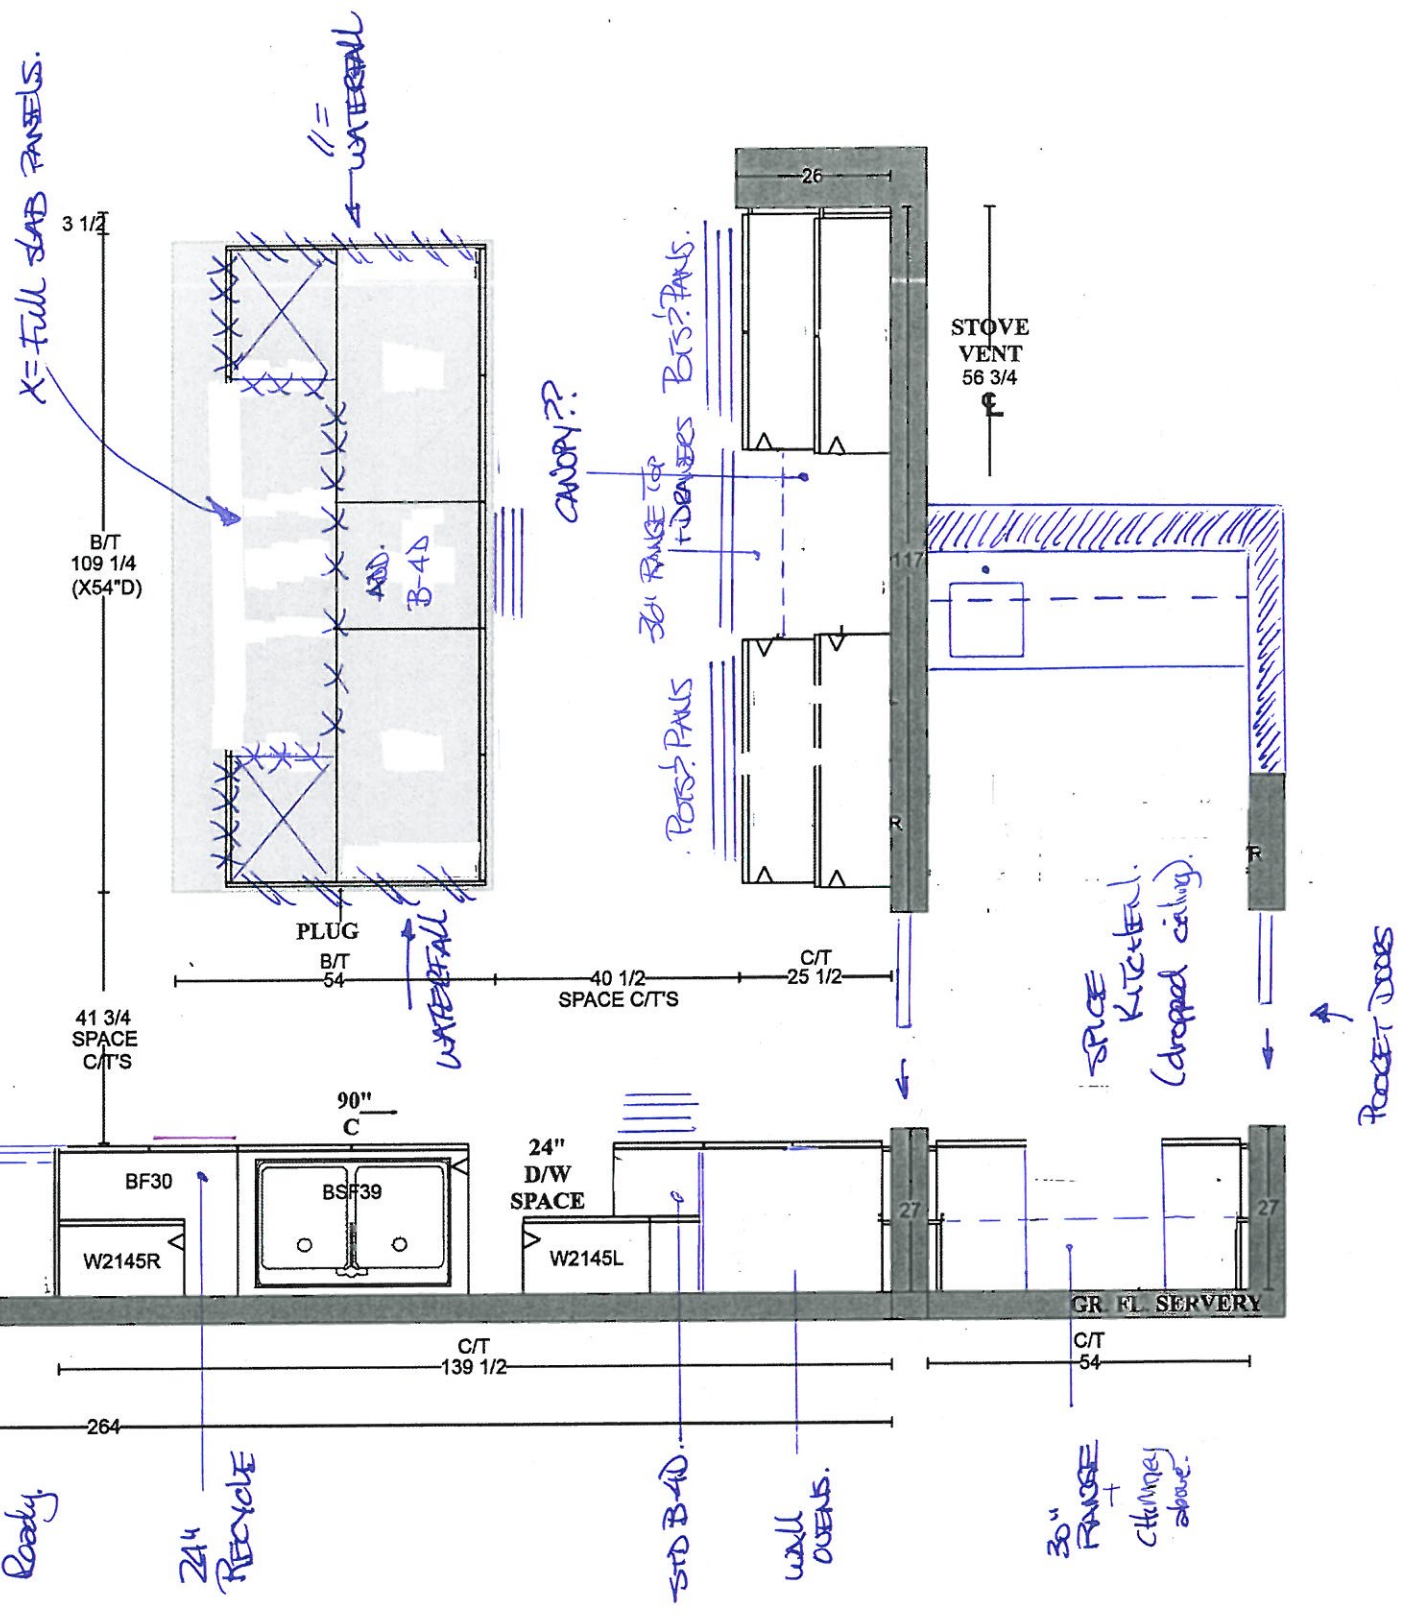


GOLDPARK HOMES
PINE VALLEY
VAUGHAN, ONTARIO
MODEL: (5005) KNIGHTSWOOD

SITE STANDARD: WHITE 3/4" EXTENSION
 SOFT-CLOSE DRAWERS & STANDARD SLAM DOOR HINGES
 TO VANITIES

ONE TOP DRAWER WHERE POSSIBLE THROUGHOUT EACH
 VANITY, ONE BANK OF DRAWERS WHERE POSSIBLE
 THROUGHOUT EACH MASTER ENSUITE VANITY

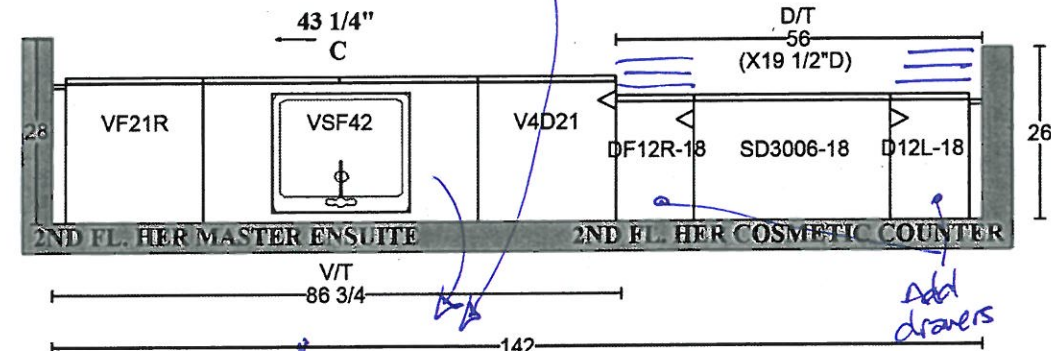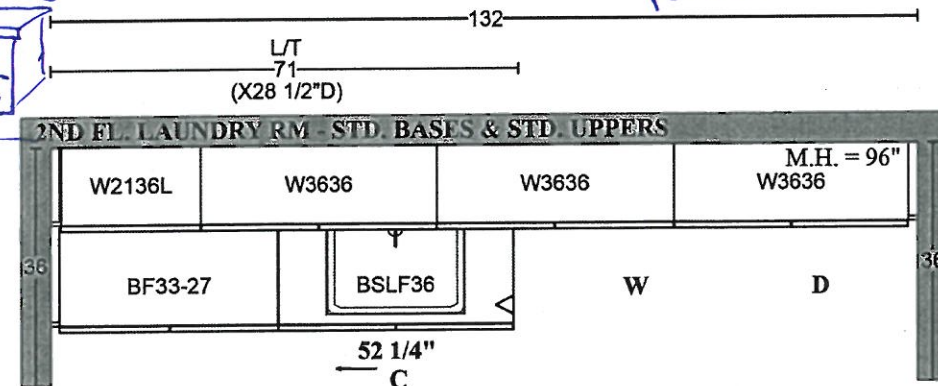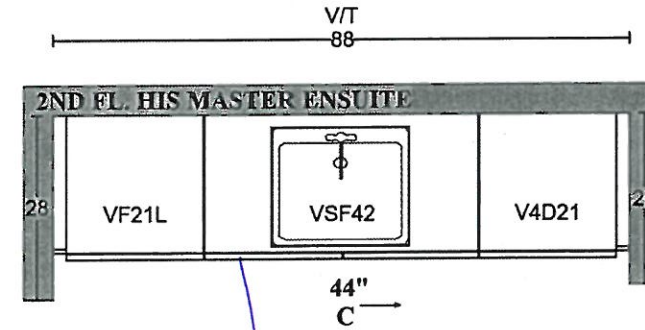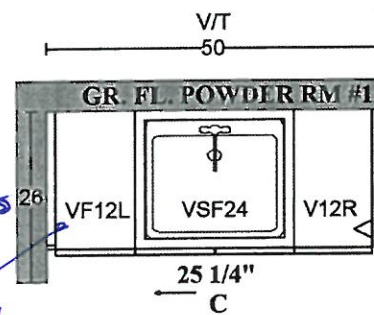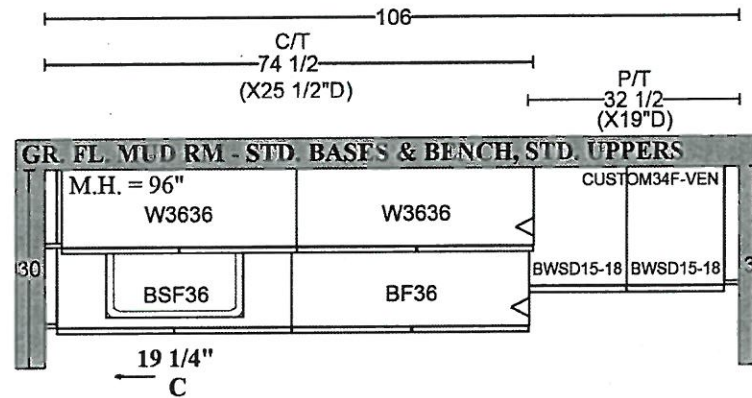

PLAN VIEW

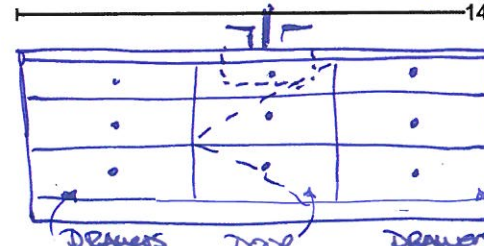

S-S.
 Willis 'CLAY'




PINE VALLEY
FOREVERGREEN

GOLDPARK
WORTH MORE™


SOLID SURFACE COUNTERTOP EDGE DETAIL

STANDARD - 2CM EDGE

☒		EASED EDGE
-------------------------------------	---	------------

THIN CUT




LEVEL 1 (UPGRADE) - 2CM EDGE

☐		MICRO BEVEL
☐		SINGLE BEVEL

LEVEL 2 (UPGRADE) - 2CM EDGE

☐		HALF BULLNOSE
☐		FULL BULLNOSE
☐		OGEE EDGE


LEVEL 3 (UPGRADE) - 4CM EDGE - SEAMS WILL BE VISIBLE

☐		4CM EASED EDGE
☐		4CM MICRO BEVEL
☐		4CM SINGLE BEVEL

LEVEL 4 (UPGRADE) - 4CM EDGE - SEAMS WILL BE VISIBLE

☐		4CM HALF BULLNOSE
☐		4CM FULL BULLNOSE
☐		4CM OGEE FLUSH
☐		4CM OGEE BULLNOSE

LEVEL 5 (UPGRADE) - 4CM EDGE - SEAMS WILL BE VISIBLE

☐		4CM OGEE STEPOUT
☐		4CM OGEE FULL BULLNOSE STEPOUT

☐ 3CM UPGRADE EDGE DETAIL IN LIEU OF 2CM EDGE

LOT # PV-110

AREA:

DATE: October 6, 2020

12

SIGNATURE:

SIGNATURE:



PINE VALLEY
FOREVERGREEN

STANDARD HARDWARE

☐

H001-02

☒

H001-03

↳ Ensuite 2

☐

H001-04

☒

H009-03

↳ Ensuite 4

↳ Laundry

☐

H009-09

☒

H011-03


↳ Ensuite 3

☐

H011-05

☐

H011-06

☐

H033-01

☒

H039-03

→ Master Ensuite
→ Mudroom

LOT # PV-110

DATE:

October 6, 2020.

SIGNATURE:

[Signature]

SIGNATURE:

[Signature]


GOLDPARK
WORTH MORE



PINE VALLEY
FOREVERGREEN


UPGRADE HARDWARE

RH-071-03

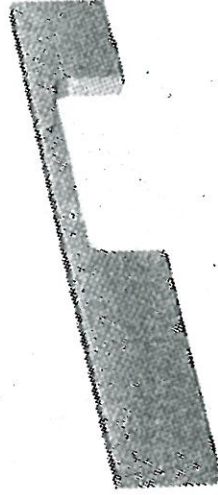

LOCATION:

Kitchen

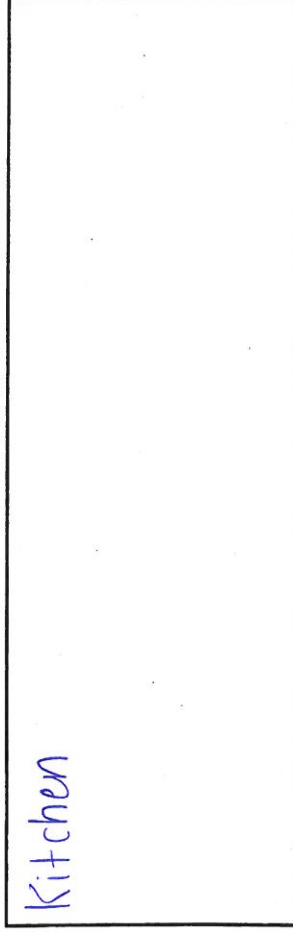

LOT #

PV-110

DATE:

Oct. 6, 2020

SIGNATURE:


SIGNATURE:



PINE VALLEY
FOREVERGREEN

UPGRADE HARDWARE

RAH-073-03

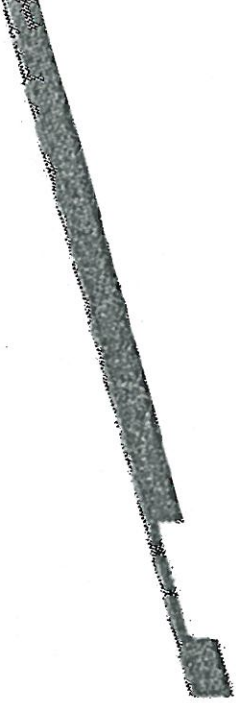

LOCATION:

Kitchen

LOT #

PV-110

DATE:

Oct. 6, 2020

SIGNATURE:

SIGNATURE:



GOLDPARK
YOUTH HOPE





PINE VALLEY

FOREVERGREEN

UPGRADE KITCHEN SINK

BLANCO - QUATRUS R15 U 1-3/4
Stainless Steel - Undermount
33" x 18" x 9"

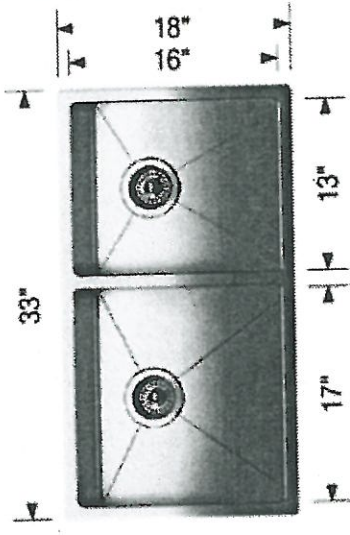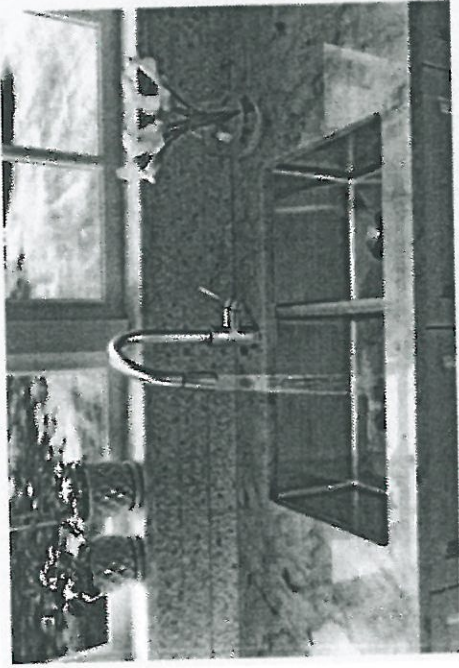

Stainless Steel

☐ GRID (LB)

☐ GRID (SB)

MODEL 401520 Stainless Steel / 406451 Grid (LB) / 406450 Grid (SB)

Lot#

PV-110

Room: Kitchen

Signature:

Date:

October 6, 2020

Signature:


GOLDPARK
WORTH MORE



PINE VALLEY
FOREVERGREEN

UPGRADE KITCHEN SINK

BLANCO - QUATRUS R15 U 1 MEDIUM
Stainless Steel - Undermount
25" x 18" x 9"

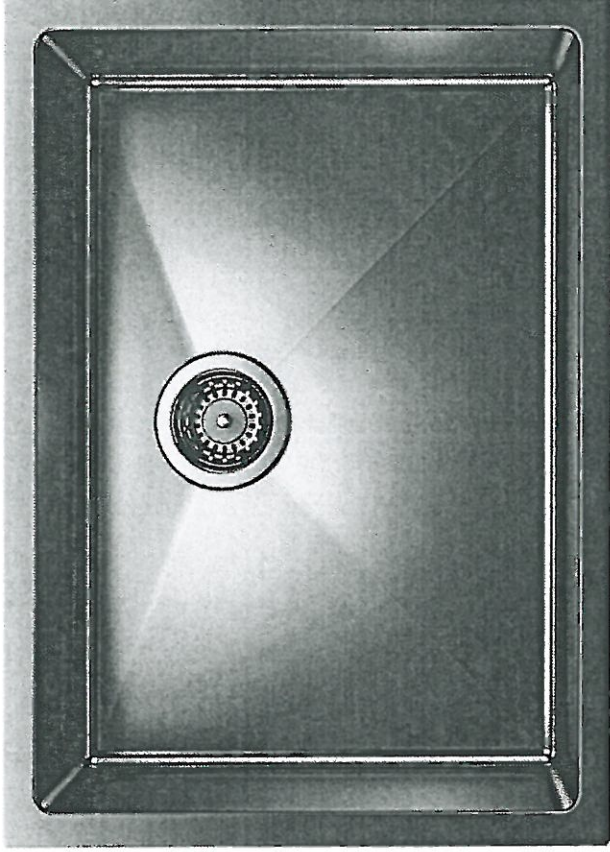

Stainless Steel

☐ GRID \$375

MODEL 401517 Stainless / 406452 Grid

Lot#
PV-110

Room: Spice Kitchen

Signature:

Date: October 6, 2020

Signature:



GOLD PARK
YOUTH HOSTEL



PINE VALLEY
FOREVERGREEN

UPGRADE LAUNDRY SINK

BLANCO - QUATRUS R15 LAUNDRY
Stainless Steel - Dual-Mount
25" x 22" x 12"

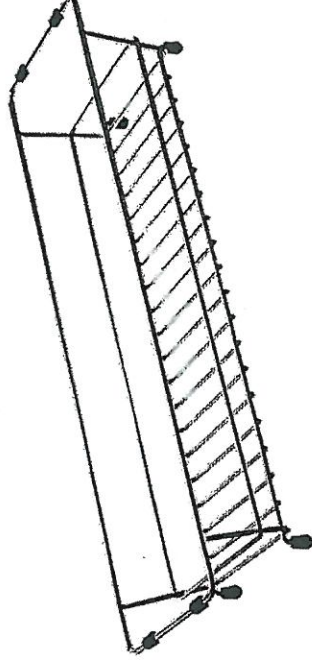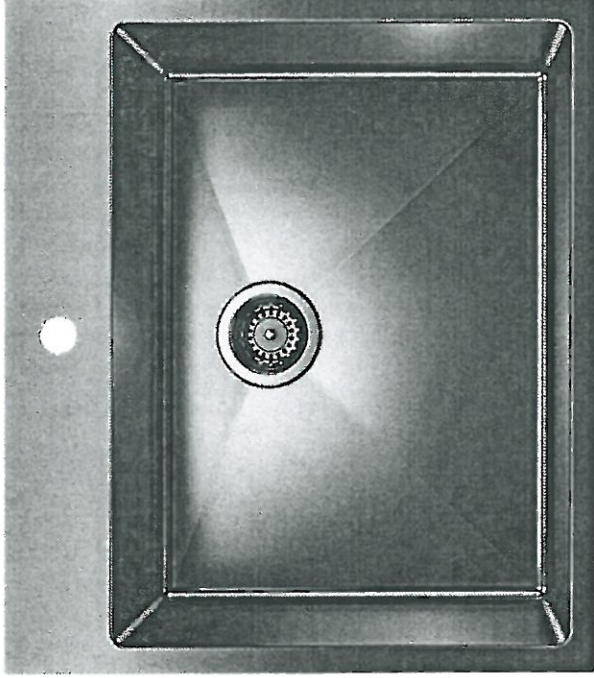

Stainless Steel

☐ LAUNDRY RACK

MODEL 401802 Stainless Steel / 401952 Grid

Lot# PV-110

Room: Mudroom

Signature:

Date: October 6, 2020

Signature:




PINE VALLEY
FOREVERGREEN

STANDARD SHOWER HARDWARE

SDK106

Shower Door Knob

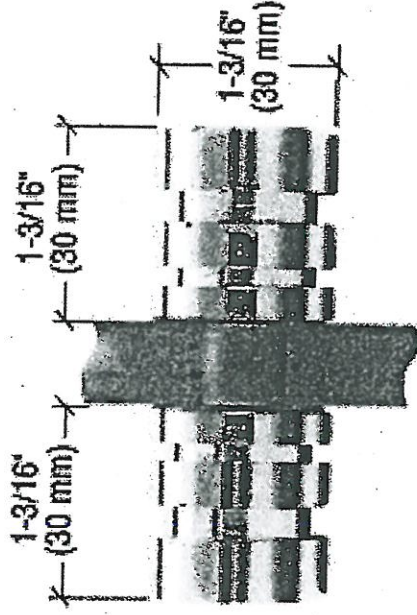

SDK106
Shower Door Knob
1-3/16" dia.
Contemporary Style
(Also available single sided)

LOT #

PV-110

DATE:

October 6, 2010

SIGNATURE:



SIGNATURE:



PV-110
Oct. 6, 2020



30" DOUBLE WALL OVEN WITH V2™ VERTICAL DUAL-FAN CONVECTION SYSTEM

Signature Features

V2™ VERTICAL DUAL-FAN CONVECTION	MY CREATIONS	IRRESISTIBLE INTERIOR
Dual counter-rotating vertical fans work in tandem, helping you wield your cooking prowess with everything from mouthwatering fillets to irresistible roasts.	Curate recipe presets at will. Bake for 30 minutes, broil for 4 and keep dishes warm until you're ready to dine – all without lifting a finger.	Captivation cloaked in black. Beyond a dark glass expanse, cinematic lighting illuminates smooth racks, flat tines, and an enticing jet black interior.

Feature Listing

DESIGN & CRAFTSMANSHIP

Irresistible Interior
7-Inch Full Color LCD Display
Cinematic Lighting
Seamless Touches
Glide Rack
Smooth Close Door
5.0 Cu. Ft. Capacity

Volts 240
Amps 40
Total Capacity (Cu. Ft.) 10.0
Upper Oven Capacity (Cu. Ft.) 5.0
Lower Oven Capacity (Cu. Ft.) 5.0

Dimensions

Overall Dimensions 30" x 52(3/8)" x 25(5/16)"
Opening / Clearance Dimensions (Traditional Installation) 28(1/2)" x 50(1/4)" x 24"
Opening / Clearance Dimensions (Flush Installation) 30(1/4)" x 53(3/16)" x 25"

Do not make any cutouts based on this information

PERFORMANCE

V2™ Vertical Dual-Fan Convection

My Creations
Closed Door Broiling
Versatile Modes
3,400-Watt Convection Element
2,800-Watt Hidden Bake Element
4,000-Watt Broil Element
8-Pass Reflective Broil Element
Connected Temperature Probe

ADDITIONAL FEATURES

Keep Warm™ Option
Auto Convection Conversion
Auto Convection Modes
Manual Convection Modes
Rapid Preheat
Proofing Option
Control Lock
Sabbath Mode

Specifications

Shipping Weight (lbs) 341




LIMITED
WARRANTY

Bold = Top Features

JENNAIR®

© 2019 Jennair. All rights reserved. Specifications subject to change without notice.

JJW3830I

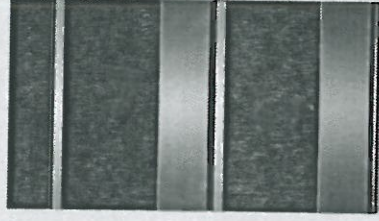

Style Options

RISE™
JJW3830IL

NOIR™
JJW3830IM

PV-110
Oct. 6, 2020


JENNAIR® DETAILED PLANNING DIMENSIONS

DOUBLE WALL OVENS

JJW28271 – 27" x 52-3/8" x 25-5/16"

JJW28301, JJW38301 – 30" x 52-3/8" x 25-5/16"

1 of 2

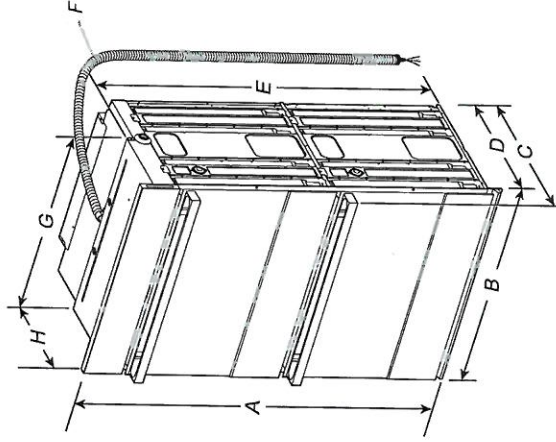


PRODUCT DIMENSIONS – DOUBLE OVENS

27" (68.6 CM) MODELS

- A. 52-3/8" (133 cm) overall height
- B. 27" (68.6 cm) overall width
- C. JJW28271M – 26-3/8" (67 cm)
JJW28271L – 27-3/16" (69 cm)
- D. 23-1/4" (59.1 cm) max. recessed depth
- E. 49-1/4" (125.1 cm) recessed height
- F. 66" (167.6 cm) flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.
- G. 25-7/16" (64.6 cm) recessed width

30" (76.2 CM) MODELS

- A. 52-3/8" (133 cm) overall height
- B. 30" (76.2 cm) overall width
- C. JJW28301M – 26-3/8" (67 cm)
JJW28301L – 27-3/16" (69 cm)
JJW38301M – 26-3/8" (67 cm)
JJW38301L – 27-3/16" (69 cm)
- D. 23-1/4" (59.1 cm) max. recessed depth
- E. 49-1/4" (125.1 cm)
- F. 66" (167.6 cm) flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.
- G. 28-7/16" (72.2 cm) recessed width

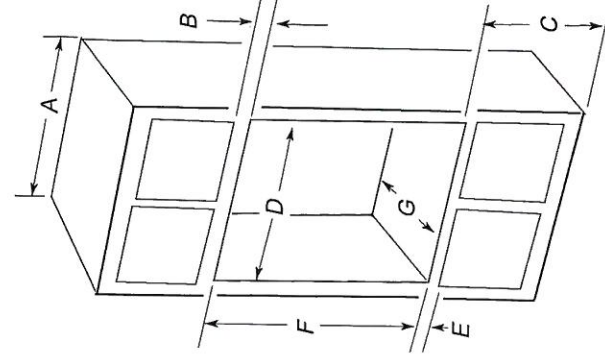

DOUBLE OVENS INSTALLED IN CABINET

27" (68.6 CM) MODELS

- A. 27" (68.6 cm) min. cabinet width
- B. 2-3/16" (5.5 cm) top of cutout to bottom of upper cabinet door
- C. 14-3/4" (37.5 cm) bottom of cutout to floor is recommended. 4"-19/4" (10.2-48.9 cm) bottom of cutout to floor is acceptable.
- D. 25-1/2" (64.8 cm) cutout width
- E. 1-1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 50-1/4" (127.6 cm)* recommended cutout height
- G. 24" (60.7 cm) cutout depth

*NOTE: The cutout height can be between 49-1/2" (125.7 cm) and 52-3/16" (132.6 cm) for 27" double ovens.

30" (76.2 CM) MODELS

- A. 30" (76.2 cm) min. cabinet width
- B. 2-3/16" (5.5 cm) top of cutout to bottom of upper cabinet door
- C. 14-3/4" (37.5 cm) bottom of cutout to floor is recommended. 4"-14-3/4" (10.2-37.5 cm) bottom of cutout to floor is acceptable.
- D. 28-1/2" (72.4 cm) cutout width
- E. 1-1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 50-1/4" (127.6 cm)* recommended cutout height
- G. 24" (60.7 cm) cutout depth

*NOTE: The cutout height can be between 49-1/2" (125.7 cm) and 52-3/16" (132.6 cm) for 30" double ovens.

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JennAir® appliances are appropriately UL, CUL or CSA approved.

©/™ © 2018 JennAir. All rights reserved. JEN 25280-006.



PV-110 
Oct. 6, 2020 


JENN-AIR® DETAILED PLANNING DIMENSIONS

1 of 3


24" COLUMN REFRIGERATOR

(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)
JBRFR24IGX, JBRFL24IGX – 23⁷/₈" x 83⁷/₁₆" x 23⁴³/₆₄" (without door/handles)

PRODUCT DIMENSIONS

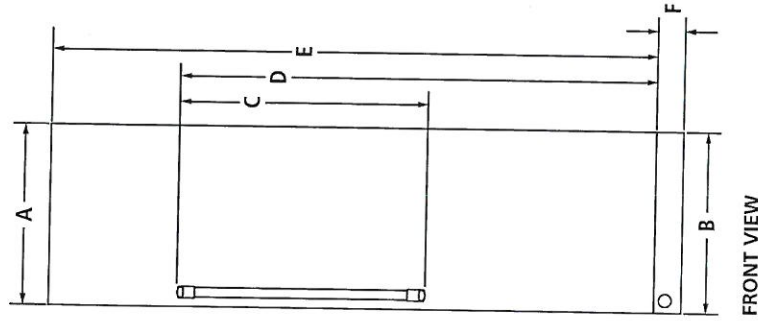

FRONT VIEW

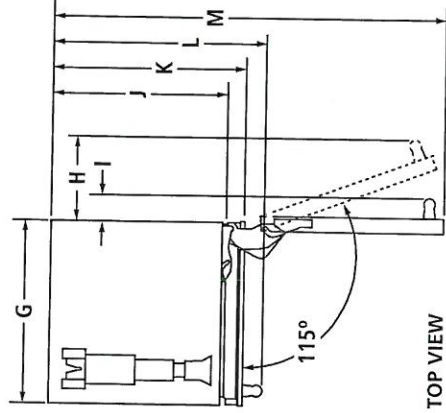

TOP VIEW

MODEL #	JBRFR24IGX JBRFL24IGX	in cm
A	Width of door	23 ³ / ₄ 60.3
B	Overall width	23 ⁷ / ₈ 60.6
C	Height of door handle	
	Pro-Style® Stainless	45 ³⁵ / ₆₄ 115.7
	Euro-Style Stainless	50 ¹ / ₆₄ 127.1
D	Custom panel (3/4"/1.9 cm)*	** **
	Height to top of door handle	
	Pro-Style® Stainless	66 ¹ / ₆₄ 167.7
E	Euro-Style Stainless	68 ¹⁷ / ₆₄ 173.4
	Custom panel (3/4"/1.9 cm)*	** **
F	Height of door	79 ⁷ / ₈ 202.9
G	Height of bottom grille	3 ³⁵ / ₆₄ 9.0
H	Width of recessed refrigerator	23 ³ / ₁₆ 59.8
	Width from side of refrigerator to handle – door fully open 115°	
	Pro-Style® Stainless	13 ³ / ₁₆ 33.5
I	Euro-Style Stainless	12 ²³ / ₃₂ 32.3
	Custom panel (3/4"/1.9 cm)*	** **
J	Width from side of refrigerator to handle – door open 90°	
	Pro-Style® Stainless	4 ¹ / ₃₂ 10.2
	Euro-Style Stainless	3 ⁷ / ₁₆ 8.7
K	Custom panel (3/4"/1.9 cm)*	** **
	Depth without door panel kit	23 ⁴³ / ₆₄ 60.1
L	Depth with door	
	Pro-Style® Stainless	24 ¹ / ₂ 62.2
	Euro-Style Stainless	24 ¹ / ₂ 62.2
M	Custom panel (3/4"/1.9 cm)*	24 ¹ / ₂ 62.2
	Depth with handle	
	Pro-Style® Stainless	27 ¹ / ₈ 68.9
N	Euro-Style Stainless	26 ¹⁷ / ₃₂ 67.4
	Custom panel (3/4"/1.9 cm)*	** **
O	Depth with door open 90°	50 ⁷ / ₁₆ 128.1

*Custom panels should not exceed 3/4" (1.9 cm) thickness.
**For custom panel models, this depends on handle chosen.

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



9002AdZw817

PV-110
Oct. 6, 2020


JENN-AIR® DETAILED PLANNING DIMENSIONS

2 of 3

24" COLUMN REFRIGERATOR

(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)
JBRFR24IGX, JBREL24IGX – 23⁷/₁₆" x 83³/₁₆" x 23⁴³/₆₄" (without door/handles)

DIMENSIONS AS INSTALLED

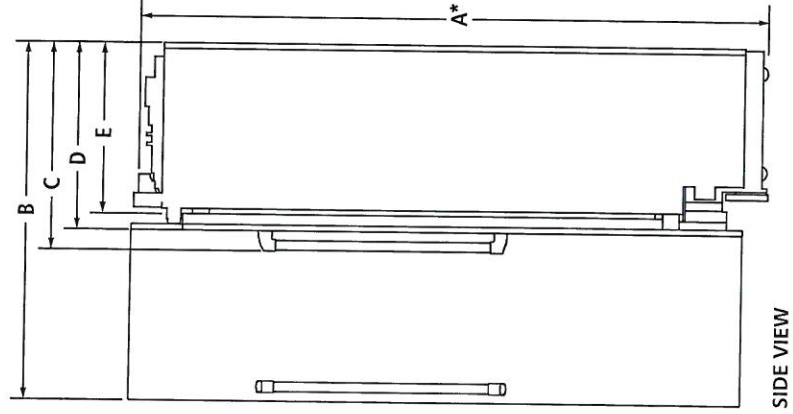

MODEL #	JBRFR24IGX JBREL24IGX	
	in	cm
A* Height of recessed refrigerator	83 ³ / ₁₆	211.6
B Depth with door open 90° (min.)	50 ⁷ / ₁₆	128.1
C Depth with handle (min.)	Pro-Style® Stainless	
	27 ¹ / ₈	68.9
	Euro-Style Stainless	
Custom panel (3/4"/1.9 cm)**	26 ¹⁷ / ₃₂	67.4
	†	†
D Depth with door (min.)	Pro-Style® Stainless	
	24 ¹ / ₂	62.2
	Euro-Style Stainless	
Custom panel (3/4"/1.9 cm)**	24 ¹ / ₂	62.2
	24 ¹ / ₂	62.2
E Depth without door panel kit (min.)	23 ⁴³ / ₆₄	60.1

*Add 1" (2.5 cm) to the height dimension when leveling legs are fully extended.

**Custom panels should not exceed 3/4" (1.9 cm) thickness.

†For custom panel models, this depends on handle chosen.


IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

PV-110
Oct. 6, 2020


JENN-AIR® DETAILED PLANNING DIMENSIONS

24" COLUMN REFRIGERATOR
(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)
JBRFR24IGX, JBRFL24IGX – 23⁷/₈" x 83⁷/₁₆" x 23⁴³/₁₆" (without door/handles)

OPENING/CLEARANCE DIMENSIONS

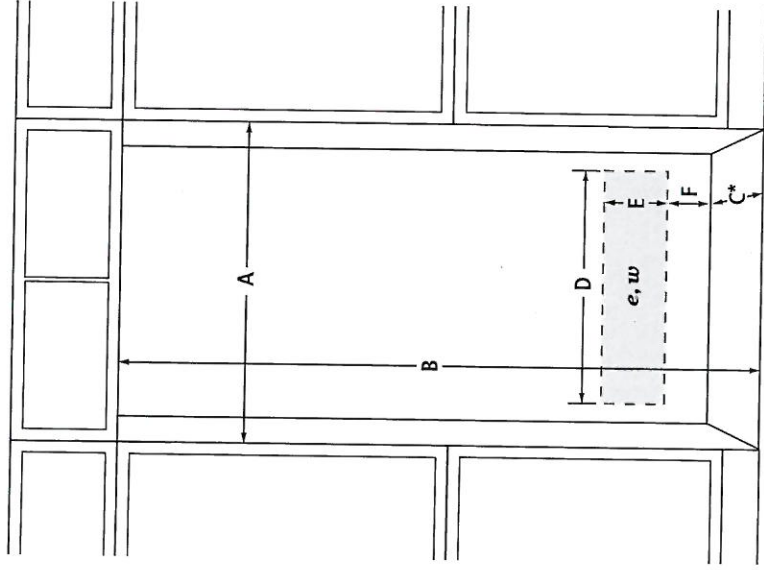

FRONT VIEW

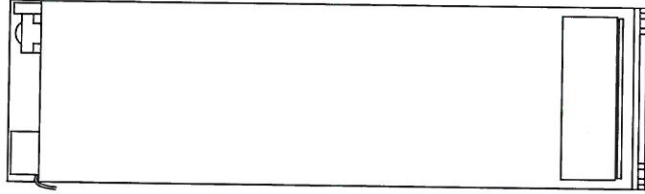

BACK VIEW

MODEL #	JBRFR24IGX	JBRFL24IGX
	in	cm
A	Width (min.)	24 61.0
B	Height (min.)	84 213.4
C*	Depth (min.)	25 63.5
D	Width of recommended electrical location	20 50.8
E	Height of recommended electrical location	6½ 16.5
F	Height to recommended electrical location	4½ 11.4
e	Recommended electrical connection location	
w	Recommended water connection location	

*A minimum 8" (20.3 cm) furniture return must extend behind the face of the cabinet on all sides.

ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 40 and 120 psi (207 and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

Reverse Osmosis Water Supply

A reverse osmosis system may be used provided that the water pressure from the filtration system meets the required water pressure requirements.

Jenn-Air Columns feature an auto-bypass water filtration system. To use your product with a reverse osmosis water filtration system, simply remove the water filter from the product.

LOCATION REQUIREMENTS

Floor must be able to support the product's total weight of more than 600 lb (272 kg), including the door panels and contents of the product. Flooring under product must be at the same level as the room. Face of cabinetry must be plumb.

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



9002AdZw817

PV-110
Oct. 6, 2020


JENN-AIR® DETAILED PLANNING DIMENSIONS

24" COLUMN FREEZER


(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)
JBZFR24IGX, JBZFL24IGX – 23⁷/₈" x 83⁷/₁₆" x 23⁴³/₆₄" (without door/handles)

1 of 3

PRODUCT DIMENSIONS

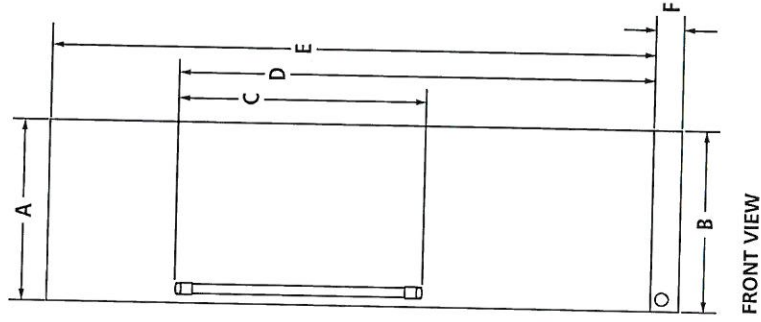

FRONT VIEW

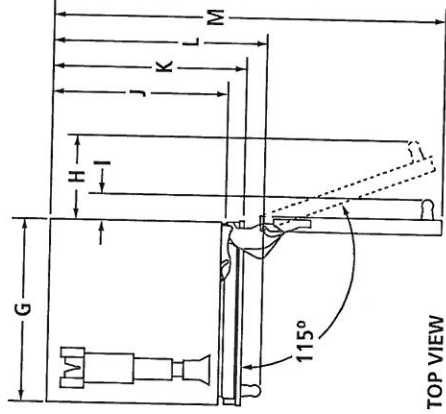

TOP VIEW

MODEL #	JBZFR24IGX	JBZFL24IGX
	in	cm
A	Width of door	23 ³ / ₄ 60.3
B	Overall width	23 ⁷ / ₈ 60.6
C	Height of door handle	
	Pro-Style® Stainless	45 ³⁵ / ₆₄ 115.7
	Euro-Style Stainless	50 ¹ / ₆₄ 127.1
D	Custom panel (¾"/1.9 cm)*	** **
	Height to top of door handle	
	Pro-Style® Stainless	66 ¹ / ₆₄ 167.7
E	Euro-Style Stainless	68 ¹⁷ / ₆₄ 173.4
	Custom panel (¾"/1.9 cm)*	** **
F	Height of door	79 ⁷ / ₈ 202.9
G	Height of bottom grille	3 ³⁵ / ₆₄ 9
H	Width of recessed freezer	23 ⁷ / ₁₆ 59.8
	Width from side of freezer to handle – door fully open 115°	
	Pro-Style® Stainless	13 ³ / ₁₆ 33.5
I	Euro-Style Stainless	12 ²³ / ₃₂ 32.3
	Custom panel (¾"/1.9 cm)*	** **
J	Width from side of freezer to handle – door open 90°	
	Pro-Style® Stainless	4 ¹ / ₃₂ 10.2
	Euro-Style Stainless	3 ⁷ / ₁₆ 8.7
K	Custom panel (¾"/1.9 cm)*	** **
	Depth without door panel kit	23 ⁴³ / ₆₄ 60.1
L	Depth with door	
	Pro-Style® Stainless	24 ¹ / ₂ 62.2
	Euro-Style Stainless	24 ¹ / ₂ 62.2
M	Custom panel (¾"/1.9 cm)*	24 ¹ / ₂ 62.2
	Depth with handle	
	Pro-Style® Stainless	27 ¹ / ₈ 68.9
N	Euro-Style Stainless	26 ¹⁷ / ₃₂ 67.4
	Custom panel (¾"/1.9 cm)*	** **
O	Depth with door open 90°	50 ⁷ / ₁₆ 128.1

*Custom panels should not exceed ¾" (1.9 cm) thickness.
**For custom panel models, this depends on handle chosen.

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



9006AdZw817

PV-110 20
Oct. 6, 2020


JENN-AIR® DETAILED PLANNING DIMENSIONS

2 of 3

24" COLUMN FREEZER

(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)
JBZFR24IGX, JBZFL24IGX – 23⁷/₈" x 83⁷/₁₆" x 23⁴⁹/₆₄" (without door/handles)

DIMENSIONS AS INSTALLED

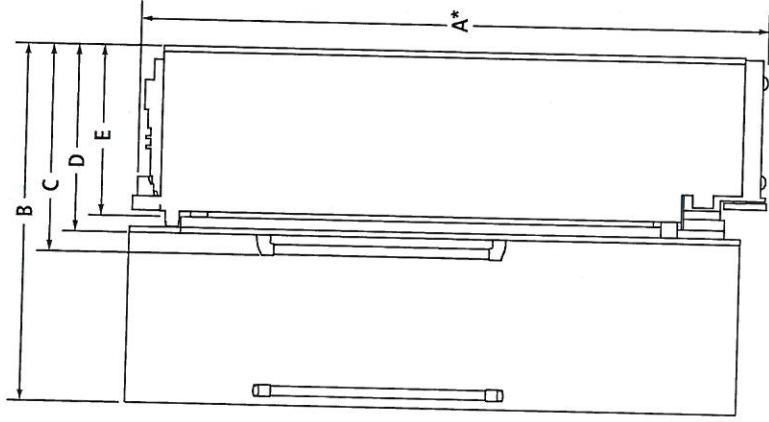

SIDE VIEW

MODEL #	JBZFR24IGX JBZFL24IGX	in	cm
A* Height of recessed freezer		83 ¹⁹ / ₆₄	211.6
B Depth with door open 90° (min.)		50 ⁷ / ₁₆	128.1
Depth with handle (min.)			
C Pro-Style® Stainless		27 ¹ / ₈	68.9
Euro-Style Stainless		26 ¹⁷ / ₃₂	67.4
Custom panel (3/4"/1.9 cm)**		†	†
Depth with door (min.)			
D Pro-Style® Stainless		24 ¹ / ₂	62.2
Euro-Style Stainless		24 ¹ / ₂	62.2
Custom panel (3/4"/1.9 cm)**		24 ¹ / ₂	62.2
E Depth without door panel kit (min.)		23 ⁴⁹ / ₆₄	60.1

*Add 1" (2.5 cm) to the height dimension when leveling legs are fully extended.

**Custom panels should not exceed 3/4" (1.9 cm) thickness.

†For custom panel models, this depends on handle chosen.

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



9006AdZw817

PV-110
Oct. 6, 2020


JENN-AIR® DETAILED PLANNING DIMENSIONS

3 of 3


24" COLUMN FREEZER

(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)
JBZFR24IGX, JBZFL24IGX – 23⁷/₈" x 83⁷/₁₆" x 23⁴³/₆₄" (without door/handles)

OPENING/CLEARANCE DIMENSIONS

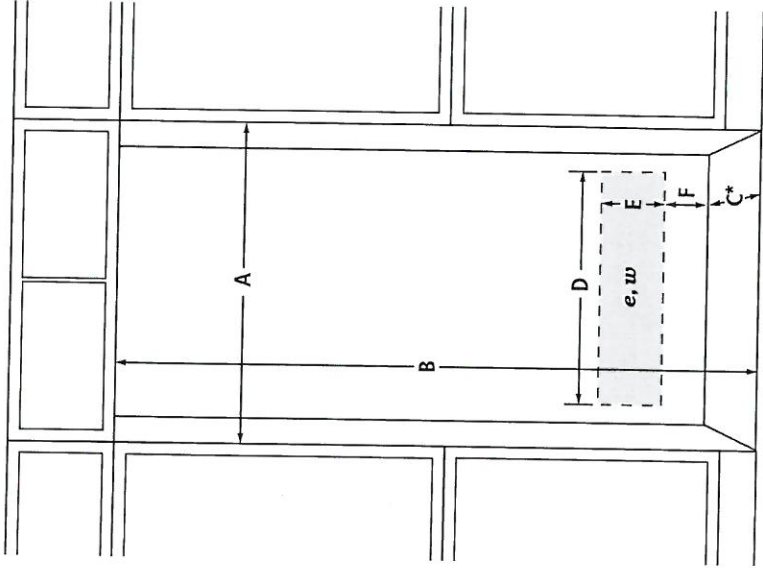

FRONT VIEW

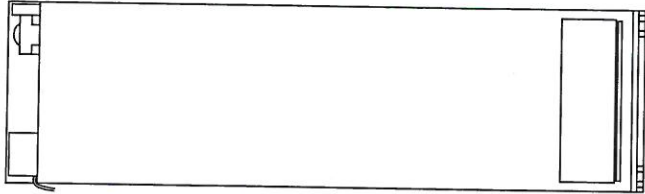

BACK VIEW

MODEL #	JBZFR24IGX	JBZFL24IGX
	in	cm
A	Width (min.)	24 61.0
B	Height (min.)	84 213.4
C*	Depth (min.)	25 63.5
D	Width of recommended electrical location	20 50.8
E	Height of recommended electrical location	6½ 16.5
F	Height to recommended electrical location	4½ 11.4
e	Recommended electrical connection location	
w	Recommended water connection location	

*A minimum 8" (20.3 cm) furniture return must extend behind the face of the cabinet on all sides.

ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 40 and 120 psi (207 and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

Reverse Osmosis Water Supply

A reverse osmosis system may be used provided that the water pressure from the filtration system meets the required water pressure requirements.

Jenn-Air® Columns feature an auto-bypass water filtration system. To use your product with a reverse osmosis water filtration system, simply remove the water filter from the product.

LOCATION REQUIREMENTS

Floor must be able to support the product's total weight of more than 600 lb (272 kg), including the door panels and contents of the product. Flooring under product must be at the same level as the room. Face of cabinetry must be plumb.

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



9006AdZw817

PV-110
Oct. 6, 2020



24" TRIFECTA™ DISHWASHER, 38 DBA

Signature Features

38 DBA* TRANQUILITY

Listen to the hush. At 38 dBA*, JennAir® is the quietest luxury dishwasher brand, all without sacrificing performance.

ULTRAGLIDE LOWER RACK

The strong and stable type. This adjustable lower rack glides smoothly on high-end rails.

TRIFECTA™ WASH SYSTEM

No need to choose between brilliant cleaning, water/energy reduction or quiet operation because our dishwashers deliver all three. Three-stage filtration, pressurized wash arms and alternating wash action in two zones yield superlative results.

Feature Listing

DESIGN & CRAFTSMANSHIP

UltraGlide Lower Rack

Removable 3rd-Level Rack

Daring Obsidian Racks

Cinematic Lighting

SuperiorGlide Upper Rack

Fold-Away™ Tines

Flexible Capacity

Elevation Rack Adjusters

Concealed Controls

Culinary Caddy

Folding Tines (Lower Rack)

Protector Racks with Cushioning Tines

Silverware Basket

Stainless Steel Tall Tub

Shift Tines

True Hold Door

Cup Shelves with Stemware Holders

Condensation Drying

ENERGY STAR® Certified

Emotive Feedback

Fold-Away Shelf

Waterlock™ Flood Protection

Badasses at the Ready

Serviced by a Select Few

PANEL READY

JDTSS245GX

PERFORMANCE

38 dBA* Tranquility

TriFecta™ Wash System

Tall Bottle Wash

3-Stage Filtration

Stainless Steel Spray Arms

ClearScan™ Sensor Cycle

Precision Dry® Plus Option

1-Hour Wash Cycle

Top Rack Wash Option

Bottom Rack Wash Option

Cookware/Bakeware Cycle

Crystal Cycle

Hi-Temp Wash Option

Refresh Cycle

Sanitize Rinse Option


Normal Tableware Cycle

SteamFinish Option

ADDITIONAL FEATURES

Detergent Dispenser

JDTSS245G

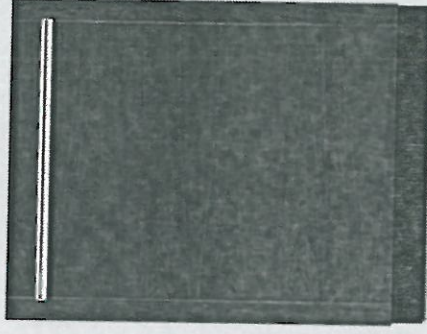

Style Options

OPTIONAL ACCESSORIES

Classic Tubular Stainless Steel Handle Kit – W10701399

Industrial Grade Dishwasher Installation Kit – 8212488RC

3/4" X 3/8" Elbow Hose Fitting – W10685193

Small Items Bag – 8519716

Baby Bundle – DISHBABY

Capacity Extension Bundle – DISHEXTEND
Affresh Dishwasher and Disposal Cleaner (6 Tablets) – W10282479

Specifications

Shipping Weight (lbs) 95

Volts 120

Amps 15-20

Sound Rating (dBAs) 38

Capacity (Place Settings) 14

Dimensions

Overall Dimensions 23(7/8)" x 33(1/2)" x 24"

Do not make any cutouts based on this information



LIMITED
WARRANTY

Bold = Top Features

JENN'AIR®

©/TM © 2019 JennAir® All rights reserved. Specifications subject to change without notice.

RV-110

Oct. 6, 2020

JENN-AIR® DETAILED PLANNING DIMENSIONS


1 of 3

DISHWASHERS


JDTS246G, JDTS244G – 23⁷/₈" x 33¹/₂" x 28¹/₃₂" (including handle)

JDTS245G, JDTS243G – 23⁷/₈" x 33¹/₂" x 24" (not including handle)


PRODUCT DIMENSIONS

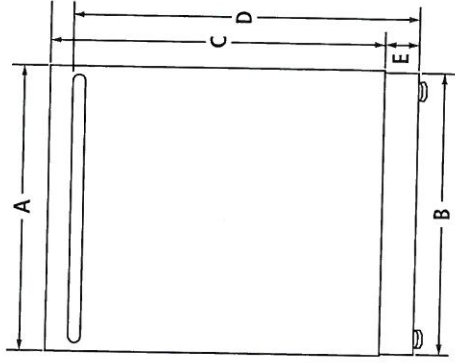

FRONT VIEW



ADJUSTABLE TOE KICK

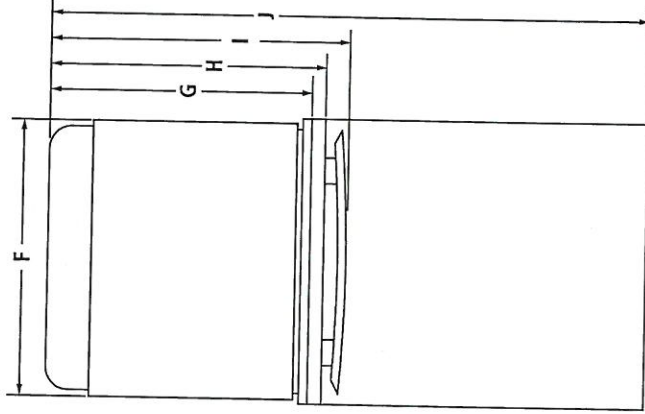

TOP VIEW

MODEL #	JDTS246G JDTS244G		JDTS245G JDTS243G	
	in	cm	in	cm
A Width of door	23 ⁷ / ₈	60.6	23 ⁷ / ₈	60.6
B Width of toe kick	23 ¹ / ₂	59.7	23 ¹ / ₂	59.7
C Height of door Pro-Style® Stainless	30	76.2	—	—
	30	76.2	—	—
	—	—	30	76.2
D Height to top of handle Pro-Style® Stainless	31 ¹⁷ / ₃₂	80.1	—	—
	31 ¹⁷ / ₃₂	80.1	—	—
	—	—	*	*
E Height of adjustable toe kick (min. -max.)	3 ¹ / ₂ - 4 ¹ / ₄	8.8- 10.6	3 ¹ / ₂ - 4 ¹ / ₄	8.8- 10.6
F Width of recessed dishwasher	23 ⁷ / ₈	60.6	23 ⁷ / ₈	60.6
G Depth with tub flange	21	53.3	21	53.3
H Depth with door Pro-Style® Stainless	24 ¹ / ₂	62.2	—	—
	24 ¹ / ₂	62.2	—	—
	—	—	24	60.0
I Depth with handle Pro-Style® Stainless	29 ³ / ₃₂	73.9	—	—
	28 ¹⁹ / ₃₂	72.6	—	—
	—	—	*	*
J Depth with door fully open	49 ¹ / ₂	125.7	49 ¹ / ₂	125.7

*For custom panel models, this depends on handle chosen.



9009AdZw317

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.


PV-110
Oct. 6, 2020

JENN-AIR® DETAILED PLANNING DIMENSIONS
DISHWASHERS

2 of 3

JDTS246G, JDTS244G – 23⁷/₈" x 33¹/₂" x 28¹⁹/₃₂" (including handle)
JDTS245G, JDTS243G – 23⁷/₈" x 33¹/₂" x 24" (not including handle)

DIMENSIONS AS INSTALLED

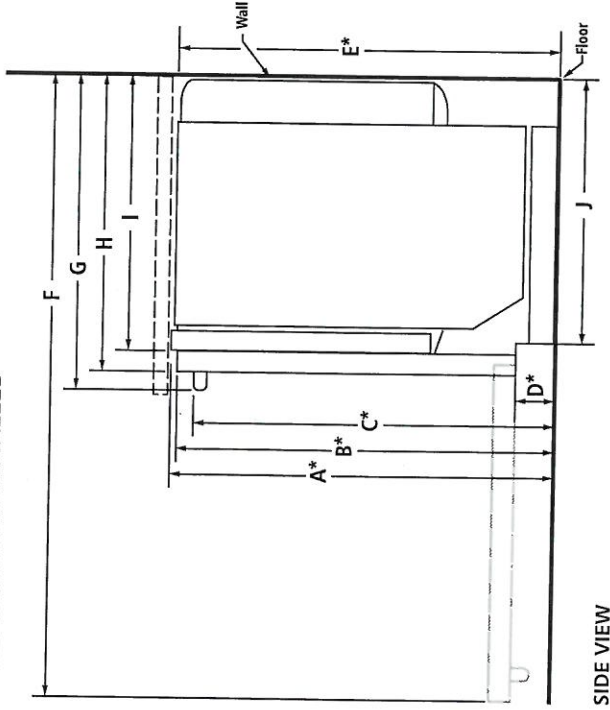

SIDE VIEW

MODEL #	JDTS246G JDTS245G JDTS244G JDTS243G	
	in	cm
A*	Height to top of tub flange (min.)	33½ 85.1
B*	Height to top of door (min.)	33¾ 85.7
C*	Height to top of handle (min.) Pro-Style® Stainless	31 ¹⁷ / ₃₂ 80.1
	Euro-Style Stainless	31 ¹⁷ / ₃₂ 80.1
	Custom panel (¾"/1.9 cm)	† †
D*	Height to bottom of door	3⅝ 9.4
E*	Height of recessed dishwasher (min.)	33% 85.5
F	Depth with door fully open (min.)	49½ 125.7
G	Depth with handle (min.) Pro-Style® Stainless	29 ³ / ₃₂ 73.9
	Euro-Style Stainless	28 ¹⁹ / ₃₂ 72.6
	Custom panel (¾"/1.9 cm)	† †
H	Depth with door (min.) Pro-Style® Stainless	26½ 67.3
	Euro-Style Stainless	26½ 67.3
	Custom panel (¾"/1.9 cm)	24½ 62.2
I	Depth with tub flange (min.)	22⅝ 57.4
J	Depth with toe kick (min.)	20⅞ 52.9

*With wheels removed. Add up to 1" (2.5 cm) to height with wheels and leg levelers fully extended.

†For custom panel models, this depends on handle chosen.

IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

PV-110

Oct. 6, 2020

JENN-AIR® DETAILED PLANNING DIMENSIONS



DISHWASHERS

JDTS246G, JDTS244G – 23⁷/₈" x 33¹/₂" x 28¹/₃₂" (including handle)

JDTS245G, JDTS243G – 23⁷/₈" x 33¹/₂" x 24¹/₂" (not including handle)

3 of 3

OPENING/CLEARANCE DIMENSIONS

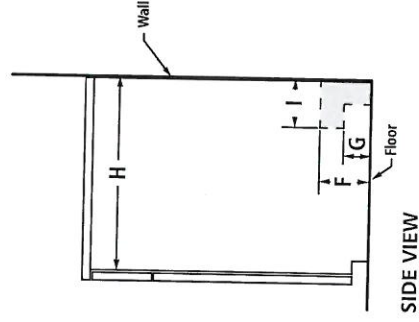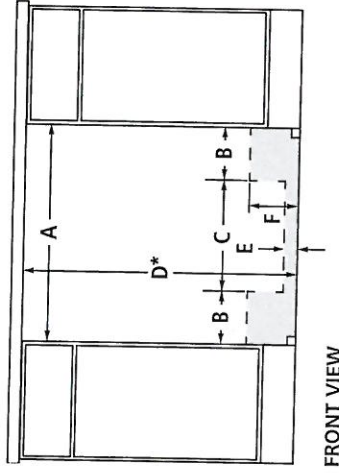

MODEL #	JDTS246G JDTS245G JDTS244G JDTS243G	
A	Width (min.)	in cm
B	Width of possible utility installation area (back wall)	24 61.0
C	Width of clear area (back wall)	6 ³ / ₄ 17.2
D*	Width of clear area (back wall)	10 ¹ / ₂ 26.7
E	Height with wheels removed (min.)	34 86.4
F	Height of possible utility installation area (back wall)	2 ¹ / ₄ 6.4
G	Height of possible utility installation area (back/side wall)	6 ¹ / ₄ 15.9
H	Height of clear area (side wall)	3 7.6
I	Depth of utility location (side wall)	24 61.0
I	Depth of utility location (side wall)	4 10.2

Electrical, water and drain connections may be installed in shaded areas

Recommended drain connection location – closest to sink	1 ¹ / ₂ dia. 3.8 dia.
Recommended electrical connection location – right-hand side or back wall	1 ¹ / ₂ dia. 3.8 dia.
Recommended water connection location – left-hand side or back wall	½ dia. 1.3 dia.

*Measured from the lowest point on the underside of countertop.

ELECTRICAL REQUIREMENTS

20-volt, 60 Hz, AC-only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

WATER SUPPLY REQUIREMENTS


120°F (49°C) hot water supply with water pressure between 20 and 120 psi (1.38 and 862 kPa) is required. If you have questions about your water pressure, call a licensed, qualified plumber.

DRAIN REQUIREMENTS

Connect drain hose to waste tee or disposer inlet above drain trap. Maximum drain hose length 12' (3.7 m).

LOCATION REQUIREMENTS

Corner locations require a 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.



IMPORTANT: Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation or Use & Care Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.



9009AdZw317

PV-110  
Oct. 6, 2020



36" GAS PROFESSIONAL RANGETOP WITH CHROME-INFUSED GRIDDLE

Signature Features

15 RANGETOP CONFIGURATIONS	HALO-EFFECT KNOBS	DUAL-STACKED POWERBURNERS
With 15 unique configurations, it's up to you. Infused with chrome, our griddle cleans up well after heavy usage. Fire up the grill for indoor entertainment on your terms.	A halo of luminary LEDs glows softly when the burner is lit or the oven is on.	Two stacked, symmetrical flames bloom and retreat at your inclination, offering total control over heat levels. High-heat searing and wok cooking. Low, slow simmer and melt. Infinite intermediate settings satisfy every appetite.

Feature Listing

PERFORMANCE FEATURES
Do not make any cutouts based on this information

- Dual-Stacked PowerBurners
- Chrome-Infused Griddle
- 20,000 BTU Dual-Stacked PowerBurner
- 18,000 BTU Dual-Stacked PowerBurner
- 9,000 BTU Dual-Stacked PowerBurner
- Electronic Ignition with Flame-Sensing™ ReIgnition

CONTROL FEATURES

- Halo-Effect Knobs

DESIGN FEATURES

- 15 Rangetop Configurations
- Cast Iron Grates

OPTIONAL ACCESSORIES

- Gas Connector Kit (Required) – 30-48KITRC
- High Altitude Kit (Natural Gas) – W10160841
- High Altitude Kit (LP Gas) – W10237848
- 9" Stainless Steel Backsplash – W10115776
- Stainless Steel Backsplash with Two Shelves (36") – W10285448
- Wok Ring – W10216179
- Affresh™ Kitchen & Appliance Cleaner, 16 oz. – W10355010

Specifications

Shipping Weight (lbs)
Volts 120
Amps 15

Dimensions




WARRANTY

Bold = Top Features

JENNAIR®

© 2019 JennAir. All rights reserved. Specifications subject to change without notice.

JGCP536H

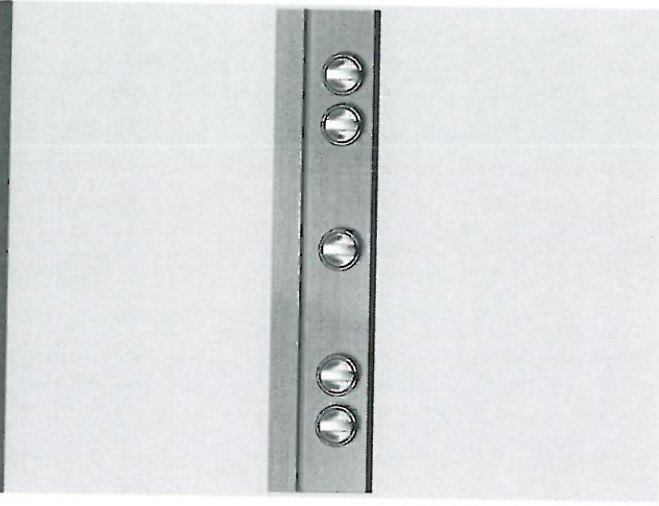

Style Options

- RISE™**
JGCP536HL
- NOIR™**
JGCP536HM


PV-110
Oct. 6, 2020

JENNAIR® DIMENSIONS

RANGETOPS

PRODUCT

	30" RANGETOP JCCP430H	36" RANGETOP JCCP436H	48" RANGETOP JCCP548H
Overall Width (A)	29-3/4" (75.6 cm)	35-3/4" (90.8 cm)	47-7/8" (121.6 cm)
Grate Depth (B)	22" (55.9 cm)	22" (55.9 cm)	22" (55.9 cm)
Depth without Control Panel (C)	23-1/4" (59.1 cm)	23-1/4" (59.1 cm)	23-1/4" (59.1 cm)
Depth with Control Panel Overhang (D)	27-1/2" (69.9 cm)	27-1/2" (69.9 cm)	27-1/2" (69.9 cm)
Depth with Knobs: RISE™ (E)	29-1/8" (74 cm)	29-1/8" (74 cm)	29-1/8" (74 cm)
Depth with Knobs: NOIR™ (E)	29" (73.7 cm)	29" (73.7 cm)	29" (73.7 cm)

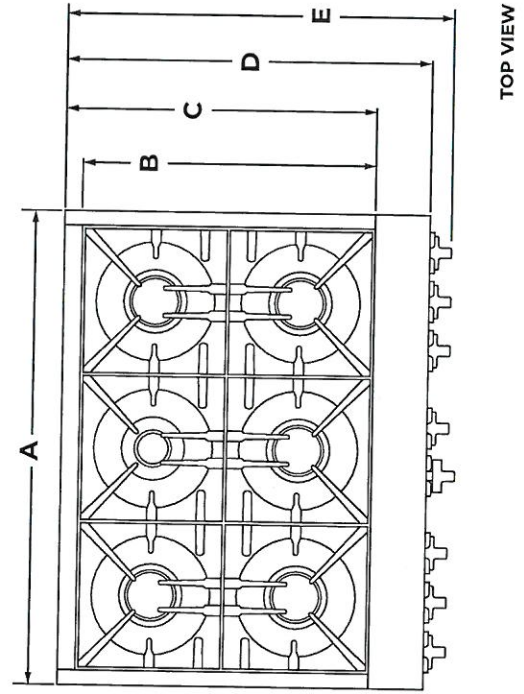

TOP VIEW



★ **IMPORTANT:** Dimensional specifications are provided for planning purposes only. Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All JennAir® appliances are appropriately UL, CUL or CSA approved.

PV-110 A
Oct. 6, 2020

JENNAIR® DIMENSIONS
RANGETOPS
PRODUCT

	30" RANGETOP JGCP430H	36" RANGETOP JGCP436H	48" RANGETOP JGCP548H
Grate Width (F)*	27-7/16" (69.7 cm)	33" (83.8 cm)	44-3/8"* (112.7 cm)
Gas Inlet to Surface (G)	10-3/4" (27.3 cm)	10-3/4" (27.3 cm)	10-3/4" (27.3 cm)
Center to Gas Inlet (H)	11" (27.9 cm)	14-1/8" (35.9 cm)	19-5/8" (49.8 cm)
Recessed Rangetop Width (I)	29-1/8" (74 cm)	35" (88.9 cm)	47-1/4" (120 cm)

*Includes width of grates and griddle.

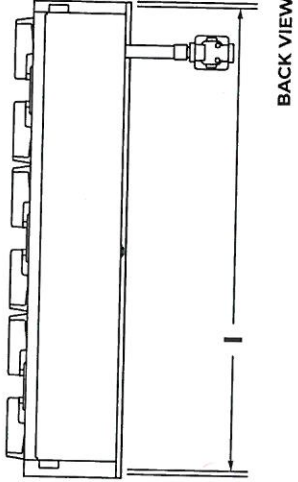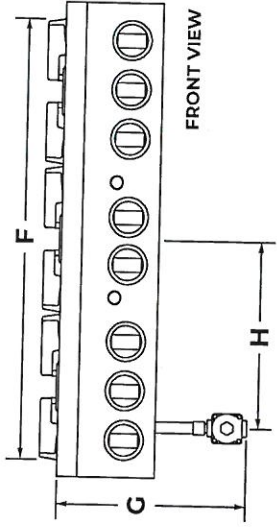


PV-110 KO
 Oct. 6, 2020

JENNAIR® DIMENSIONS

RANGETOPS

PRODUCT

	30" RANGETOP JCCP430H	36" RANGETOP JCCP436H	48" RANGETOP JCCP548H
Height with Grates (J)	9" (22.9 cm)	9" (22.9 cm)	9" (22.9 cm)
Control Panel Height (K)	7-13/16" (19.8 cm)	7-13/16" (19.8 cm)	7-13/16" (19.8 cm)
Recessed Rangetop Height (L)	7" (17.8 cm)	7" (17.8 cm)	7" (17.8 cm)
Cooking Surface Height (M)	7-7/16" (18.9 cm)	7-7/16" (18.9 cm)	7-7/16" (18.9 cm)
Recessed Rangetop Depth (N)	21-7/8" (55.6 cm)	21-7/8" (55.6 cm)	21-7/8" (55.6 cm)
Depth with Control Panel (O)	25-1/2" (64.8 cm)	25-1/2" (64.8 cm)	25-1/2" (64.8 cm)

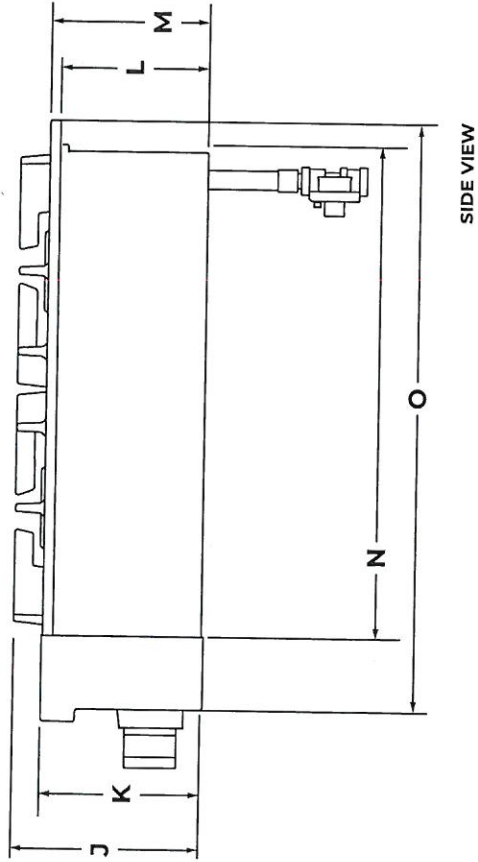

IMPORTANT: Supplied regulator does not come preattached and is pictured for reference purposes only.

PV-110
Oct. 6, 2020


JENNAIR® DIMENSIONS

RANGETOPS

OPENING AND CLEARANCE

	30" RANGETOP JGCP430H	36" RANGETOP JGCP436H	48" RANGETOP JGCP548H
Combustible Area Above Cooking Surface Width (A)	30" (76.2 cm) min.	36" (91.4 cm) min.	48" (121.9 cm) min.
Bottom of Cabinet Height Above Cooking Surface (B)*	42" (106.7 cm) min.	58" (147.3 cm) min.	58" (147.3 cm) min.
Bottom of Cabinet Height Above Countertop (C)	18" (45.7 cm) min.	18" (45.7 cm) min.	18" (45.7 cm) min.
Distance to Fixed Wall or Combustible Material (D)	12" (30.5 cm) min.	12" (30.5 cm) min.	12" (30.5 cm) min.

*Dimension reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by at least 1/4" (0.6 cm) flame retardant millboard, which is in turn covered with at least No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper. If installing a hood above the rangetop, follow the hood instructions for dimensional clearances above the cooking surface.

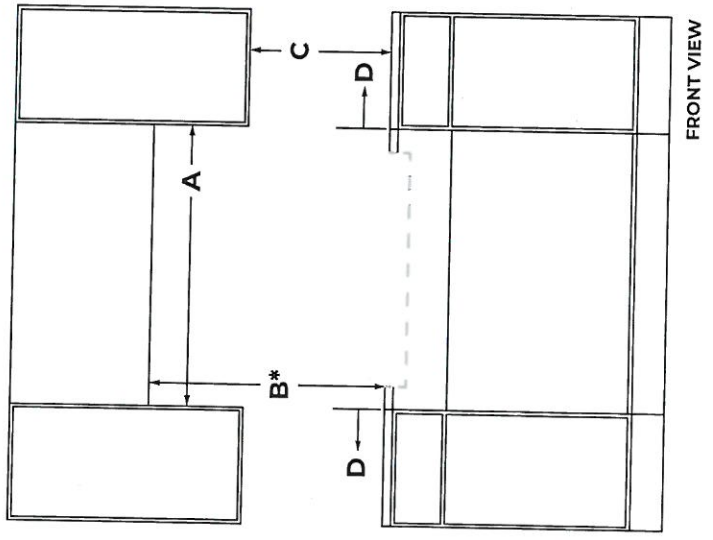

PV-110
Oct. 6, 2020


JENNAIR® DIMENSIONS

RANGETOPS

OPENING AND CLEARANCE

	30" RANGETOP JGCP430H	36" RANGETOP JGCP436H	48" RANGETOP JGCP548H
Recommended Upper Cabinet Depth (E)	13" (33 cm)	13" (33 cm)	13" (33 cm)
Cutout to Wall Depth (F)*	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.	1-1/2" (3.8 cm) min.
Cabinet to Countertop Height (G)	7-1/4" (18.4 cm)	7-1/4" (18.4 cm)	7-1/4" (18.4 cm)
Cabinet Depth (H)	24" (61 cm)	24" (61 cm)	24" (61 cm)

*If the back wall is constructed of a combustible material and a backsplash is not installed, a 7-1/2" (19.1 cm) minimum clearance is required from the cutout or 6" (15.2 cm) minimum clearance from the back edge of the rangetop.

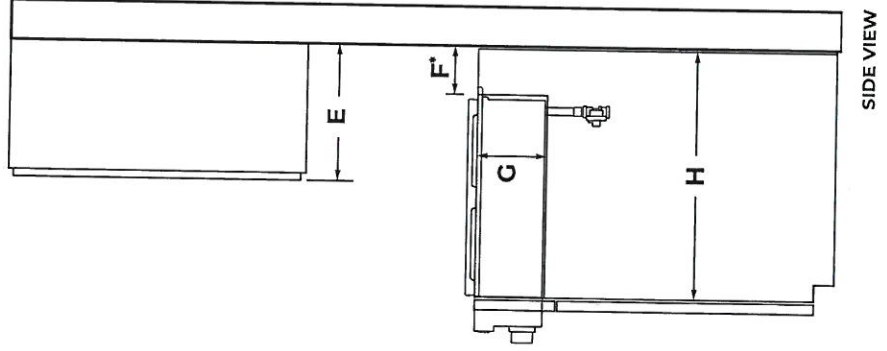


PV-110
Oct. 6, 2020

JENNAIR® DIMENSIONS


RANGETOPS

OPENING AND CLEARANCE

	30" RANGETOP JGCP430H	36" RANGETOP JGCP436H	48" RANGETOP JGCP548H
Countertop and Cabinet Cutout Width (I)	29-1/4" (74.3 cm)	35-1/4" (89.5 cm)	47-3/8" (120.3 cm)
Countertop and Cutout Depth (J)	22-1/4" (56.5 cm)	22-1/4" (56.5 cm)	22-1/4" (56.5 cm)
Notch Width (K)	5/16" (0.8 cm)	5/16" (0.8 cm)	5/16" (0.8 cm)
Cutout Width (L)	29-7/8" (75.9 cm)	35-3/4" (90.8 cm)	47-7/8" (121.6 cm)

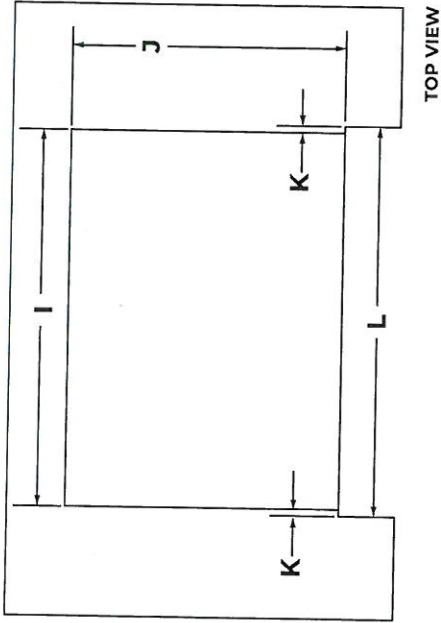

stainless steel AISI 430

BUILT-IN SERIES | 29

* PRICE INDEX - STD. CHAINING *

PV-110
Oct. 6, 2020



WM9000H*A

5.2 cu.ft. MEGA Capacity with On-Door Control Panel & TurboWash®

SPECIFICATIONS

- 29" Width
- 5.2 cu. ft. MEGA Capacity with NeverRust™ Stainless Steel Drum Towers of towels, piles of sweatshirts, and a mountain of jeans? Go for it. The MEGA capacity (5.2 cu.ft.) tub lets you do more laundry in fewer loads. That's time saved and sore backs avoided.
- Direct Drive Motor with 10-Year Limited Warranty
- 1,300 RPM
- 14 Washing Programs
- 5 Temperature Settings (All Cold Rinses)

STYLISH DESIGN

- Integrated On-Door Electronic Control Panel with LED Display and Dial-A-Cycle™ Electronic control panel is integrated into the door for a distinct style plus the intuitive functionality you expect from an LG washer.
- Large Tinted Glass Door with On-Door Controls
- Ergonomically Angled Drum & Door
- Extra Wide Door Opening
- Optional Matching Drawer Pedestal
- Optional Sidekick™ Pedestal Washer (WD200)

INNOVATIONS

- 2016 ENERGY STAR® Most Efficient
- CEE Tier 3
- CSA Sustainability
- TurboWash® 2.0 Technology Soccer practice. Groceries. Dinner. Dishes. Shouldn't your laundry move as fast as you? Now it can, with LG's enhanced TurboWash® technology. Powerful high-pressure nozzles save up to 30 minutes per load*—without shortcutting cleaning performance, even on larger loads. Innovation that keeps up with your family calendar? That's not just laundry done fast—it's laundry at the speed of life.

LG Steam Technology

- AAFA Qualified Allergiene™ Cycle
- Smart ThinQ™ (Wi-Fi)
- ColdWash™ Option
- 6Motion™ Technology
- SmartDiagnosis™
- TrueBalance™ Anti-Vibration System
- LoDecibel™ Quiet Operation
- SenseClean™
- Delay Wash (Up to 19 Hours)
- Easy Loading 10° TiltTub™



MATERIALS AND FINISHES	
NeverRust™ Stainless Steel Drum	Yes
Cabinet	PCM
Control Panel	Plastic
Top Plate	Painted
Door Rim	Glass/Chrome
Door Cover	Dark Black Tinted Square Cover
Door Opening	42-1/8"
Available Colors	White (W) Graphite Steel (V)
OPTIONS	
Pedestal	WDP5W, WDP5V
Pedestal (WxHxD)	29" x 14-1/8" x 30-7/8"
Sidekick™ Pedestal Washer	WD200CW, WD200CV
Sidekick™ Pedestal Washer (WxHxD)	29" x 14-1/10" x 30-4/5"
ACCESSORIES	
Hose Included	Yes
LIMITED WARRANTY	
1 Year Parts and Labor, 10 Years Motor, Lifetime on Drum	
UPC CODES	
WM9000HVA Washer (Graphite Steel)	048231 015349
WM9000HWA Washer (White)	048231 015356
DLEX9000V Electric Dryer (Graphite Steel)	048231 015363
DLEX9000W Electric Dryer (White)	048231 015370
DLGX9001V Gas Dryer (Graphite Steel)	048231 015387
DLGX9001W Gas Dryer (White)	048231 015394
WDP5V Pedestal (Graphite Steel)	048231 012904
WDP5W Pedestal (White)	048231 012898
WD200CV Sidekick™ Pedestal Washer (Graphite Steel)	048231 015189
WD200CW Sidekick™ Pedestal Washer (White)	048231 015196

CAPACITY	
Capacity	5.2 cu. ft.
APPEARANCE	
Design Look	Front Control
On-Door Electronic Control Panel with LED Display	Yes
Touch Buttons	Yes
Dial-A-Cycle™	Yes
ENERGY	
2016 ENERGY STAR® Most Efficient	Yes
CEE Tier	3
WASH PROGRAMS	
No. of Programs	14
Wash Programs	Normal, Perm. Press, Delicates, Speed Wash, TubClean™, Sanitary, Allergiene™, Heavy Duty, BrightWhites™, Towels, Rinse+Spin, Download, Jumbo Wash, Bedding
No. of Options	13
Options	Prewash, Delay Wash, Extra Rinse, Child Lock, ColdWash™, FreshCare™, Steam, TurboWash™, Custom Program, Drum Light, Smart Grid, Remote Start, Wi-Fi Connect
No. of Wash/Rinse Temps	5
	Extra Hot, Hot, Warm, Cold, Tap Cold (All Cold Rinses)
Spin Speeds	Extra High (1,300 max.), High, Medium, Low, No Spin
No. of Water Levels	Automatically adjusts to the size of load
No. of Soil Levels	5

FABRIC CARE FEATURES	
Steam Technology	Yes
Allergiene™ Cycle	Yes
Sanitary Cycle	Yes
ColdWash™ Option	Yes
SenseClean™ System	Yes
CONVENIENCE FEATURES	
TrueBalance™ Anti-Vibration System	
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener
LoDecibel™ Quiet Operation	Yes
End of Cycle Signal	Yes
LoadSense	Yes
Child Lock	Yes
Auto Suds Removal	Yes
Forced Drain System	Yes
Leveling Legs	4 Adjustable Legs
SmartDiagnosis™	Yes (v 3.0)
Smart ThinQ™ (Wi-Fi)	Smart Grid Ready, Smart Access, Smart Adapt, Energy Monitoring, Laundry Starts
MOTOR AND AGITATOR	
Motor Type	Inverter Direct Drive Motor
Motor Speed	Variable
Max RPM	1,300
Axis	Horizontal

Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate.
© 2016 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective companies. 1/4/16



Life's Good

WM9000H*A QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS

A Width	29"
B Height	41-1/4"
C Depth	33-3/4"
D Depth with door open	55-15/16"
Carton (WxHxD)	31-5/16" x 44-19/64" x 35-5/8"
Weight (Product/Carton)	227.1 lbs / 233.7 lbs

POWER SOURCE


Ratings	UL Listed
Electrical Requirements	120V, 10 Amps
Type	Electric



CONNECT TO THE POWER SUPPLY

- The washer should be plugged into a 120-VAC, 60-Hz grounded 3-prong outlet. Plug in the washer. Improper connection of the equipment-grounding conductor can result in risk of electric shock. Check with a qualified electrician or service technician if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance. If it does not fit the outlet, have a proper outlet installed by a qualified electrician. Failure to follow these warnings can cause serious injury, fire, electrical shock, or death.
- The power outlet must be within 60 inches (1.5 m) of either side of the washer.
- The appliance and outlet must be positioned so that the plug is easily accessible.
- Do not overload the outlet with more than one appliance.
- The outlet must be grounded in accordance with current wiring codes and regulations.
- Time-delay fuse or circuit breaker is recommended.
- It is the personal responsibility and obligation of the product owner to have a proper outlet installed by a qualified electrician.

DIMENSIONS / CLEARANCES

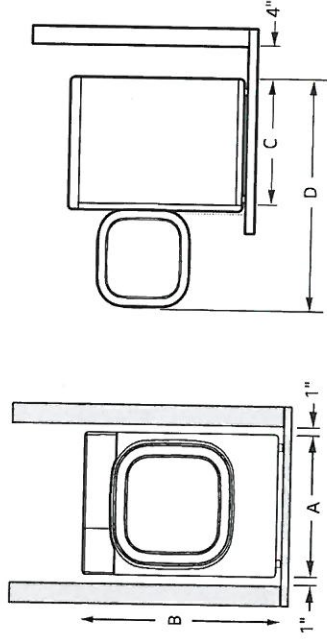


- Install the washing machine on a solid floor that is strong and rigid enough to support the weight of the washing machine, even when fully loaded, without flexing or bouncing. If the floor has too much flex, you may need to reinforce it to make it more rigid. If the floor is not solid, it may cause severe vibration and noise.

CONNECTING THE WATER LINES

LG recommends the use of LG hoses. Any leaking, property damage, or damage to the washing machine caused by an improper installation or by the use of non-LG hoses is not covered under the terms of the LG warranty and is the sole responsibility of the customer and/or an installer.

- Water supply pressure must be between 20 psi and 120 psi (138-827 kPa). If the water supply pressure is more than 120 psi, a pressure reducing valve must be installed.
- Inspect the threaded fitting on each hose and make sure there is a rubber seal in place in both ends of each hose.
- Connect the water supply hoses to the HOT and COLD water faucets tightly by hand and then tighten another 2/3 turn with pliers.
- Always run a gallon or two of water through each inlet hose to flush dirt, scale and other debris out of the water lines. Doing so will help prevent future problems with clogged filter screens, and will also allow you to verify which water line is hot and which is cold.
- Attach the hot water line to the hot water inlet on the back of the washer. Attach the cold water line to the cold water inlet on the back of the washer. Tighten the fittings securely. Turn ON both faucets all the way and check for leaks at both ends of the hoses.

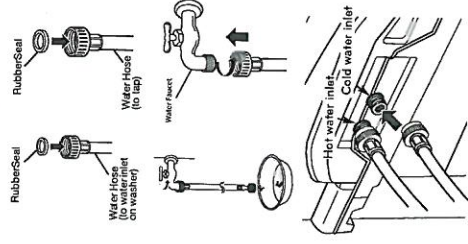


CONNECTING THE DRAIN HOSE

- The drain hose should always be properly secured. Failure to properly secure the drain hose can result in flooding and property damage.
- The drain must be installed in accordance with any applicable local codes and regulations.
- Make sure that the drain hose is not stretched, pinched, crushed, or kinked.
- Normal height of the end of the hose should be approximately 35"-47" (0.9-1.2 m) from the floor.
- Do not install the end of the drain hose lower than 29 in. (73.7 cm) or higher than 96 in. (243.8 cm) above the bottom of the washer or more than 60 in. (152.4 cm) away from the washer.
- Never create an airtight seal between the hose and the drain with tape or other means. If no air gap is present, water can be siphoned out of the tub resulting in poor wash/rinse performance or clothing damage.




STANDPIPE Option

Do not insert the end of the drain hose into the standpipe more than 8 inches (20cm). Doing so can cause siphoning, odors, or improper draining.



LAUNDRY TUB Option

Do not use this drain hose with a floor drain. The end of the drain hose must be at least 29 inches above the floor for proper draining to occur.



PV-110

Oct 6, 2020



Life's Good

DLEX9000* / DLGX9001*


9.0 cu.ft. MEGA Capacity
TurboSteam® Dryer
with On-Door Control Panel

SPECIFICATIONS

- 9.0 cu. ft. MEGA Capacity with NeveRust™ Stainless Steel Drum
When it comes to laundry capacity, big is good, bigger is better, but biggest is best. With 9.0 cu ft of mega capacity, now you can fit a king size comforter and full set of bedding in a single load! You'll definitely have more room to dry.
 - 14 Drying Programs
 - 5 Temperature Settings
- ## STYLISH DESIGN
- Integrated Upfront Electronic Control Panel with Dual LED Display and Dial-A-Cycle™
Electronic control panel is integrated into the door for a distinct style plus the intuitive functionality you expect from an LG dryer.
 - Large Tinted Glass Door with On-Door Controls
 - Optional Matching Drawer Pedestal
 - Reversible Door

INNOVATIONS

- TurboSteam® Technology
LG TurboSteam® technology to the rescue. Toss the shirt in the dryer, turn on TurboSteam® and in just 10 minutes your shirt is back in tip-top shape. Also helps refresh fabrics and reduce wrinkles in half the time of other steam settings.
- SteamFresh™ Cycle
- Sensor Dry System
- Precise Temperature Control with Variable Heat Source
- LoDecibel™ Quiet Operation
- Smart ThinQ™ (Wi-Fi)
- SmartDiagnosis™
- 3 Minute Installation Check
- FlowSense™ Duct Clogging Indicator
- Wrinkle Care Option
- Anti-Bacterial Cycle
- Damp Dry Signal

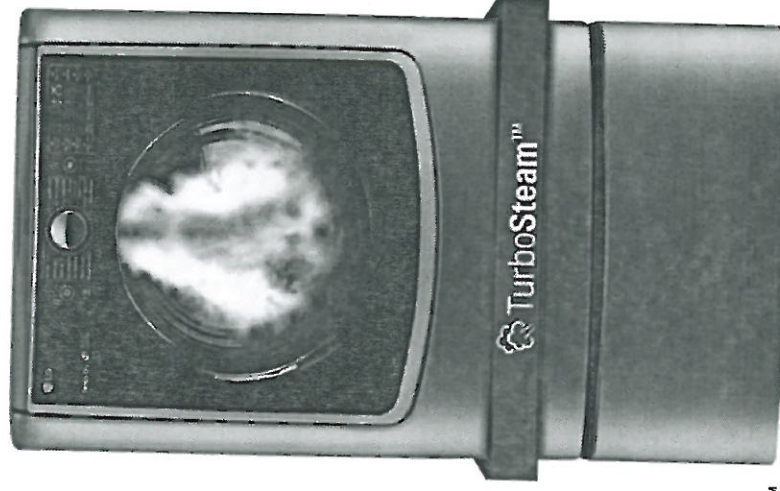

CAPACITY

Capacity 9.0 cu. ft.

APPEARANCE

Design Look On-Door Front Control Panel
Intelligent Electronic Controls with Dual LED Display Yes

Touch Buttons Yes

Dial-A-Cycle™ Yes

DRYER PROGRAMS

No. of Programs 14

Programs Cotton/Normal (Sensor Dry) Perm. Press/Casual, Towels, Delicates, Heavy Duty, TurboSteam®, SteamSanitary™ Bedding, LowTemp Dry, Anti-Bacterial, Jumbo Dry, Download/Super Dry Programs (Manual Dry) Speed Dry, Air Dry

No. of Options 13

Options More Time, Less Time, Custom Program, PGM Save, Damp Dry Signal, Wrinkle Care, Child Lock, Wi-Fi Connect, Drum Light, Energy Saver, TurboSteam®, Smart Grid, Remote Start

Temperature Settings High, Medium High, Medium, Low, Ultra Low

Drying Levels Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry

Manual Dry Times 60 min., 50 min., 40 min., 30 min., 20 min., More Time/Less Time

CONVENIENCE FEATURES

LoDecibel™ Quiet Operation Yes

End of Cycle Signal Yes

Drum Light Yes

Reversible Door Yes

FlowSense™ Duct Clogging Indicator Yes

Venting Option Electric 4 Way Venting Gas 3 Way Venting

Leveling Legs 4 Adjustable Legs

Remaining Time Display/Status Indicator(s) Yes

3 Minute Installation Check Yes

SmartDiagnosis™ Yes (v 3.0)

Smart ThinQ™ Smart Grid Ready, Energy Monitoring, Black Box, Remote Control, Home Chat (Wi-Fi)

MATERIALS AND FINISHES

NeveRust™ Stainless Steel Drum Yes

Cabinet Painted Steel

Control Panel Plastic

Top Cover Painted Steel

Door Glass/Chrome

Door Cover Dark Black Tinted Square Cover

Available Colors White (W) Graphite Steel (V)

OPTIONS

Pedestal WDP5W WDP5V

Pedestal (WxHxD) 2 9" x 14 1/8" x 30 7/8"

LIMITED WARRANTY

1 Year Parts and Labor

UPC CODES

DLEX9000V Electric Dryer (Graphite Steel) 048231 015363

DLEX9000W Electric Dryer (White) 048231 015370

DLGX9001V Gas Dryer (Graphite Steel) 048231 015387

DLGX9001W Gas Dryer (White) 048231 015394

WM9000HVA Washer (Graphite Steel) 048231 015349

WM9000HWA Washer (White) 048231 015356

WDP5V Pedestal (Graphite Steel) 048231 012904

WDP5W Pedestal (White) 048231 012898

WD200CV Sidekick™ Pedestal Washer (Graphite Steel) 048231 015189

WD200CW Sidekick™ Pedestal Washer (White) 048231 015196

Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate.

© 2016 LG Electronics USA, Inc. All rights reserved. "Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective companies. 7/26/16



Life's Good

DLEX9000* / DLGX9001* QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.


DIMENSIONS	
A Width	29"
B Height	40-7/8"
C Depth	33-3/8"
D Depth with door open	56"
Carton (WxHxD)	31-3/10" x 44-9/10" x 36-6/10"
Weight (Product/Carton)	Electric 157.4lbs / 182.1lbs Gas 160.7lbs / 185.4lbs

POWER SOURCE	
Ratings	CSA Listed
Electrical Requirements	120V, 15 Amps (Gas) 240V, 30 Amps (Electric)
Type	Gas/Electric
BTU	20,000



CONNECTING THE GAS SUPPLY



- Installation and service must be performed by a qualified installer, service agency, or the gas supplier.
- Use only a new stainless steel flexible connector and a new AGA-certified connector.
- A gas shutoff valve must be installed within 6 ft. (1.8 m) of the dryer.
- The dryer is configured for natural gas when shipped from the factory. Make sure that the dryer is equipped with the correct burner nozzle for the type of gas being used (natural gas or propane gas).
- If necessary, the correct nozzle (for the LP nozzle kit, order part number 383EEL3002D) should be installed by a qualified technician and the change should be noted on the dryer.

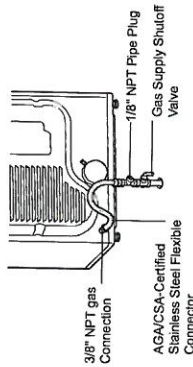


- All connections must be in accordance with local codes and regulations. Gas dryers MUST exhaust to the outdoors.

CONNECTING ELECTRIC DRYERS

- A 4-wire connection is required for all mobile and manufactured home installations, as well as all new construction after January 1, 1996.
- A 3-wire connection is NOT permitted on new construction after January 1, 1996.
- A UL-listed strain relief is required.
- Use a 30-amp, 240-volt, 4-wire, UL-listed power cord with #10 AWG-minimum copper conductor and closed loop or forked terminals with upturned ends.



DIMENSIONS / CLEARANCES

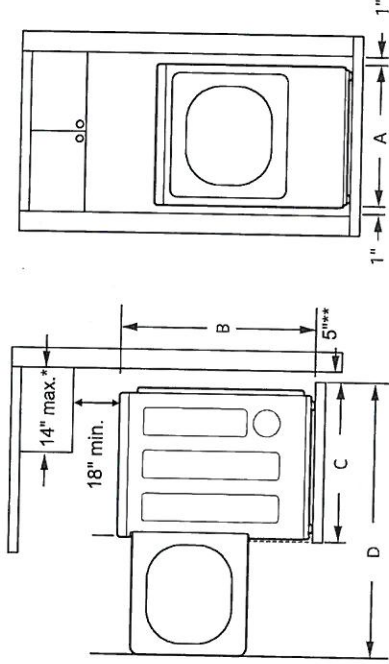

* Required spacing


** For side or bottom venting, 2-inch (5.1 cm) of spacing is allowed.

VENTING / DUCTWORK

NOTE: Follow the guidelines below to maximize drying performance and reduce lint buildup and condensation in the ductwork. Ductwork and fittings are NOT included and must be purchased separately.

- Use 4-inch (10.2 cm) diameter rigid, semi-rigid or flexible metal ductwork.
- The exhaust duct run should be as short as possible.
- Use as few elbow joints as possible.
- The male end of each section of exhaust duct must point away from the dryer.
- Use duct tape on all duct joints.
- Insulate ductwork that runs through unheated areas in order to reduce condensation and lint buildup on duct surfaces.
- Incorrect or inadequate exhaust systems are not covered by the dryer warranty. Dryer failures or service required because of such exhaust systems will not be covered by the dryer warranty.

Correct Venting



Incorrect Venting



Vail Cap Type	Number of 90° Elbows	Maximum length of 4-inch diameter rigid metal duct
Recommended	0	65 ft. (19.8 m)
	1	55 ft. (16.8 m)
	2	47 ft. (14.3 m)
	3	36 ft. (11.0 m)
a: 4" (10.2 cm)	4	28 ft. (8.5 m)
Use only for short run installations	0	55 ft. (16.8 m)
	1	47 ft. (14.3 m)
	2	41 ft. (12.5 m)
	3	30 ft. (9.1 m)
b: 2.5" (6.35 cm)	4	22 ft. (6.7 m)

- Ductwork is not provided with the dryer. You should obtain the necessary ductwork locally. The vent hood should have hinged dampers to prevent backdraft when the dryer is not in use.
- The total length of flexible metal duct must not exceed 8 ft. (2.4 m).
- Deduct 6 ft. (1.8 m) for each additional elbow. Do not use more than four 90° elbows.

PV-110
Oct. 6, 2020

Installation Location Requirements

⚠ WARNING

Read all installation instructions completely before installing and operating your dryer! It is important that you review this entire manual before installing and using your dryer. Detailed instructions concerning electrical connections, gas connections, and exhaust requirements are provided on the following pages.


- A location that allows for proper exhaust installation. A gas dryer must be exhausted to the outdoors. See **Venting the dryer**.
- A grounded electrical outlet located within 2 ft. (61 cm) of either side of the dryer. See **Connecting Electric Dryers**.
- A sturdy floor to support the total dryer weight of 200 lbs (90.7 kg). The combined weight of a companion appliance should also be considered.
- No other fuel-burning appliance can be installed in the same closet as a dryer.

Do not operate your dryer at temperatures below 45°F (7°C). At lower temperatures, the dryer might not shut off at the end of an automatic cycle. This can result in longer drying times. The dryer must not be installed or stored in an area where it will be exposed to water and/or weather. Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes or sleeping quarters. Contact your local building inspector.

⚠ NOTE

- Floor must be level, with a maximum slope of 1 inch (2.5 cm) under entire dryer. Clothes may not tumble properly, and automatic sensor cycles may not operate correctly if dryer is not level.
- For a garage installation, you will need to place the dryer at least 18 inches (46 cm) above the floor. If using a pedestal, you will need 18 inches (46 cm) to the bottom of the dryer.

Clearances

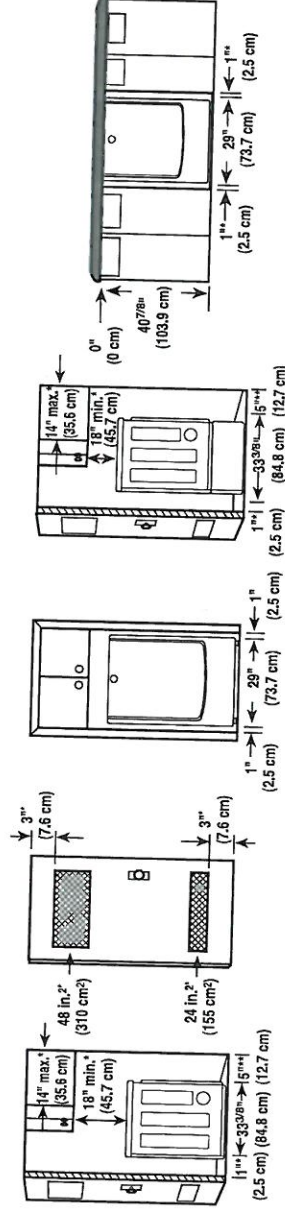

INSTALLATION SPACING FOR RECESSED AREA OR CLOSET INSTALLATION

The following clearances are recommended for this dryer. Although this dryer has been tested for 1 inch (2.5 cm) clearance on the sides and rear, the recommended clearances should be considered for the following reasons:

- Additional clearance should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door and floor moldings.
- Additional clearance should be considered on all sides of the dryer to reduce noise transfer. For closet installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance clearances should also be considered.

⚠ NOTE

There should be at least a little space around the dryer (or any other appliance) to eliminate the transfer of vibration from one to the other. With enough vibration, the appliances will make noise or touch each other causing paint damage and making even more noise.

16 INSTALLATION


Clearances with Optional Pedestal Base

RECOMMENDED INSTALLATION SPACING FOR CABINET INSTALLATION

- For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.


*Required spacing

**For side or bottom venting,
2 inches (5.1 cm) spacing is allowed.

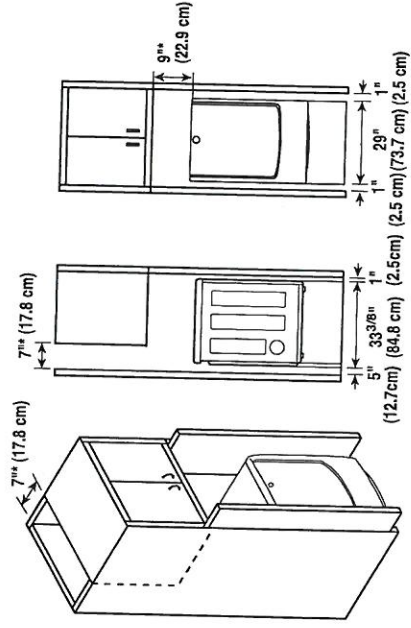




BATHROOM ACCESSORIES

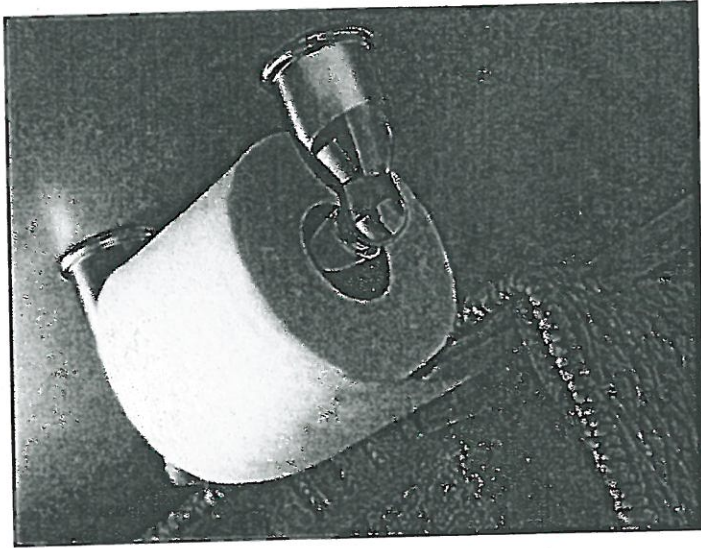

Tissue Holder
Mason - Chrome

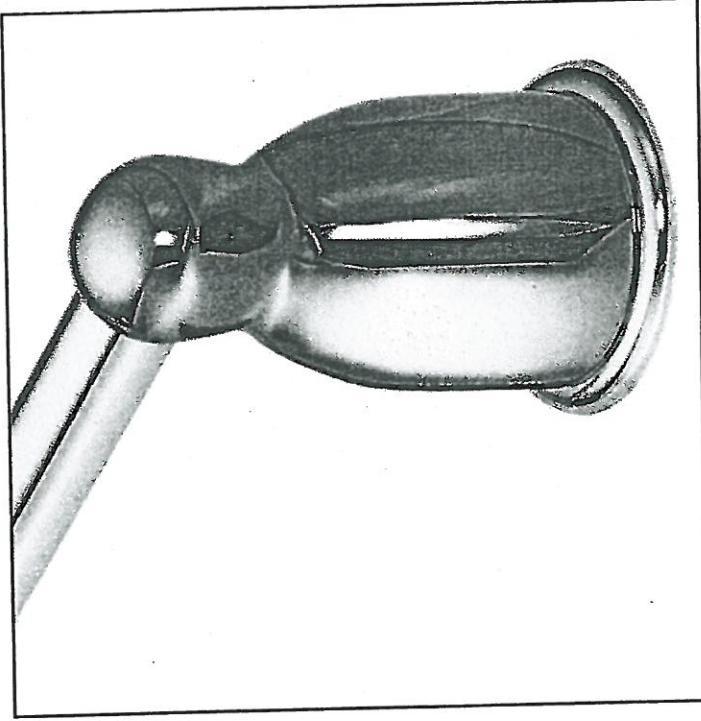

Towel Bar
Mason - Chrome

**Please select one below:*

☒ INSTALL STANDARD BATHROOM ACCESSORIES THRU OUT
(tissue holder + towel bar) **location as per vendors discretion**

☐ ***DO NOT*** INSTALL STANDARD BATHROOM ACCESSORIES
THRU OUT **tissue holder + towel bar will not be provided**

LOT # *PV-110*

DATE: *October 6, 2020*

SIGNATURE: 



SIGNATURE: 