



CONSTRUCTION SUMMARY

Lot: 154
Model: 40.00 A BRIARWOOD
Project/Phase: Pine Valley Forevergreen / 1

APPLIANCES

Invoice	Qty.	Description
2453 72,218 24Sep20 **	1	KITCHEN - UPGRADE TO 8" DUCT (INTERIOR WALL) IN LIEU OF STANDARD OFFERING
2453 24Sep20 NoCat	1	SUBZERO . WOLF APPLIANCE PACKAGE: 36" FRIDGE/FREEZER #IT-36CI 30" GAS RANGE #GR304 24" DISHWASHER #DW2450WS 30" SIRIUS CHIMNEY HOOD #SU5430X INCLUDED IN APS
2474 25Nov20 NoCat	1	**DELETE** APPLIANCE PACKAGE (FROM ORDER PE.2453) PURCHASER AMENDED APS TO DELETE APPLIANCE PACKAGE AND ADD BONUS DOLLAR PACKAGE
2572 03Feb21 NoCat	1	APPLIANCE SPECIFICATIONS PROVIDED BY PURCHASER - SIGNED COPY

BASEMENT WINDOWS

Invoice	Qty.	Description
2453 72,351 24Sep20	4	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME

DRYWALL

Invoice	Qty.	Description
2453 24Sep20 NoCat	1	GREAT ROOM / MASTER BEDROOM: INSTALL SOUND DAMPENING INSULATION IN WALL BETWEEN GREAT ROOM AND MASTER BEDROOM INCLUDED IN APS
2453 24Sep20 NoCat	1	**CUSTOM REQUEST** ADD SOUND DAMPENING INSULATION IN WALL BETWEEN KITCHEN/HALL AND MASTER ENSUITE/LAUNDRY
2453 72,351 24Sep20 **	4	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME
2453 72,690 24Sep20 **	1	DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED
2453 72,373 24Sep20	1	MASTER BEDROOM: MODEL OPTIONS 40.00 - MASTER BEDROOM - OPT. 11 FOOT TRAY CEILING - **SQUARE TRAY** (NOT ANGLED)
2453 24Sep20 NoCat	1	FRONT FOYER: DELETE CLOSET INCLUDED IN APS



CONSTRUCTION SUMMARY

Lot: 154
Model: 40.00 A BRIARWOOD
Project/Phase: Pine Valley Forevergreen / 1

DRYWALL

Invoice	Qty.	Description
2474 25Nov20 NoCat	1	*****NOTE***** DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED VENTILATION WILL BE EXPOSED ABOVE UPPER CABINETS *UNLESS ADDITIONAL KITCHEN CABINETRY IS PURCHASED AT COLOUR APPOINTMENT* EITHER EXTENDED FURRING PANEL OR STACKED UPPERS MUST BE PURCHASED TO CONCEAL VENTILATION
2474 25Nov20 NoCat	1	**CLARIFICATION NOTE** DELETE FRONT FOYER CLOSET ENTIRELY, EXTEND RAILING AT LANDING



CONSTRUCTION SUMMARY

Lot: 154
Model: 40.00 A BRIARWOOD
Project/Phase: Pine Valley Forevergreen / 1

ELECTRICAL

Invoice	Qty.	Description
2453 72,351 24Sep20 **	4	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME
2453 72,268 24Sep20	1	GREAT ROOM: INTERIOR WALL OUTLET: 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT - LOCATE ABOVE FIREPLACE, APPROX 66" A.F.F.
2453 72,289 24Sep20	6	KITCHEN: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH - INCLUDES 1 SWITCH INCLUDED IN APS
2453 72,289 24Sep20	2	KITCHEN: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH - LOCATE APPROX CENTERED ABOVE ISLAND - USE STANDARD SWITCH
2453 72,289 24Sep20	4	MAIN HALL: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH IN LIEU OF STANDARD LIGHTS, USE STANDARD SWITCH
2453 72,289 24Sep20	2	FOYER: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH - IN LIEU OF STANDARD CEILING LIGHT - SEE PLAN FOR LOCATION USE STANDARD SWITCH
2474 72,291 25Nov20	2	FRONT: EXTERIOR LED SOFFIT POT LIGHT - EACH LOCATE APPROX CENTERED ABOVE EACH GARAGE DOOR - IN LIEU OF STANDARD COACH LIGHT. USE STANDARD SWITCH
2474 72,290 25Nov20	8	GREAT ROOM: 4" E/S LED INTERIOR POT LIGHT (INSULATED CEILING) - SECOND FLOOR - EACH IN LIEU OF STANDARD LIGHT - USE STANDARD SWITCH
2474 72,290 25Nov20	4	BREAKFAST ROOM: 4" E/S LED INTERIOR POT LIGHT (INSULATED CEILING) - SECOND FLOOR - EACH - SEE PLAN FOR LOCATION IN ADDITION TO STANDARD CEILING LIGHT
2474 72,278 25Nov20	1	BREAKFAST: ADDITIONAL INTERIOR SWITCH FOR POTLIGHTS
2474 72,290 25Nov20	4	FORMAL ROOM: 4" E/S LED INTERIOR POT LIGHT (INSULATED CEILING) - SECOND FLOOR - EACH IN ADDITION TO STANDARD LIGHT SEE PLAN FOR LOCATION
2474 72,278 25Nov20	1	FORMAL ROOM: ADDITIONAL INTERIOR SWITCH FOR POTLIGHTS
2474 72,289 25Nov20	1	STAIR LANDING (AT POWDER ROOM) 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH ON SAME SWITCH AS HALL POTLIGHTS



CONSTRUCTION SUMMARY

Lot: 154
Model: 40.00 A BRIARWOOD
Project/Phase: Pine Valley Forevergreen / 1

ELECTRICAL

Invoice	Qty.	Description
2474 72,307 25Nov20	1	MAIN HALL AT STAIRS: RELOCATE STANDARD CEILING MOUNT FIXTURE - CENTER TO ROOM (GARAGE WALL/EXTERIOR WALL)- SEE PLAN FOR LOCATION
2474 72,289 25Nov20	2	MASTER BEDROOM: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH - ADD 2 POTLIGHTS BETWEEN DOOR/CLOSET - SAME SWITCH AS STANDARD LIGHT IN LIEU OF STANDARD LIGHT
2474 72,290 25Nov20	1	UPPER HALL: 4" E/S LED INTERIOR POT LIGHT (INSULATED CEILING) - SECOND FLOOR - EACH IN LIEU OF STANDARD CEILING LIGHT
2474 25Nov20 NoCat	1	*NOTE* POTLIGHTS IN KITCHEN TO BE IN LIEU OF STANDARD LIGHTS
2474 72,288 25Nov20	2	FOYER: ROUGH-IN FOR ADDITIONAL WALL SCONCE (1) CAPPED OUTLET ON EXISTING SWITCH - FIXTURE NOT INCLUDED LOCATE APPROX 67" A.F.F.
2474 72,278 25Nov20	1	FOYER: ADDITIONAL INTERIOR SWITCH FOR WALL SCONCES
2474 72,273 25Nov20	1	KITCHEN; 110V WALL RECEPTACLE ON SEPARATE CIRCUIT - GAS FIRED APPLIANCE - FOR AUX. EQUIPMENT - NOT A STOVE PLUG FOR COOKTOP
2474 72,272 25Nov20	1	KITCHEN: 110V WALL RECEPTACLE ON SEPARATE CIRCUIT - FOR MICROWAVE - MICROWAVE NOT INCLUDED
2474 72,282 25Nov20	1	KITCHEN: ADDITIONAL 220V RECEPTACLE ON A SEPARATE CIRCUIT - FOR BUILT-IN WALL OVEN - APPLIANCE NOT INCLUDED - DOES NOT INCLUDE BREAKER THAT IS TO BE INSTALLED BY LICENSED ELECTRICIAN AND ARRANGED BY HOMEOWNER AFTER CLOSING SEE PLAN FOR LOCATION

EXTERIOR COLOURS

Invoice	Qty.	Description
2453 24Sep20 NoCat	1	EXTERIOR BRICK PACKAGE BR2

FIREPLACE

Invoice	Qty.	Description
2453 24Sep20 NoCat	1	GREAT ROOM: FIREPLACE FAN KIT



CONSTRUCTION SUMMARY

Lot: 154
Model: 40.00 A BRIARWOOD
Project/Phase: Pine Valley Forevergreen / 1

FORM - FORMING

Invoice	Qty.	Description
2453 72,351 24Sep20 **	4	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME

FORMING

Invoice	Qty.	Description
2453 72,191 24Sep20	1	PINE VALLEY MODEL 40.00 BRIARWOOD ELEV A OR B - 9 FOOT BASEMENT CEILING HEIGHT IN LIEU OF STANDARD 8 FOOT CEILING.

FRAMING

Invoice	Qty.	Description
2453 24Sep20 NoCat	1	FRONT FOYER: DELETE CLOSET INCLUDED IN APS
2453 24Sep20 NoCat	1	2ND FLOOR LOFT - INSTALL RAILING IN LIEU OF HALF WALL INCLUDED IN APS
2453 72,690 24Sep20	1	DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED
2474 72,690 25Nov20	1	*****NOTE***** DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED VENTILATION WILL BE EXPOSED ABOVE UPPER CABINETS *UNLESS ADDITIONAL KITCHEN CABINETRY IS PURCHASED AT COLOUR APPOINTMENT* EITHER EXTENDED FURRING PANEL OR STACKED UPPERS MUST BE PURCHASED TO CONCEAL VENTILATION
2474 25Nov20 NoCat	1	**CLARIFICATION NOTE** DELETE FRONT FOYER CLOSET ENTIRELY, EXTEND RAILING AT LANDING

HVAC

Invoice	Qty.	Description
2453 72,218 24Sep20	1	KITCHEN - UPGRADE TO 8" DUCT (INTERIOR WALL) IN LIEU OF STANDARD OFFERING
2453 72,690 24Sep20 **	1	DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED
2474 72,224 25Nov20	1	KITCHEN: GAS LINE ROUGH-IN - MAIN FLOOR FOR GAS COOKTOP - SEE PLAN FOR LOCATION



CONSTRUCTION SUMMARY

Lot: 154
Model: 40.00 A BRIARWOOD
Project/Phase: Pine Valley Forevergreen / 1

INTERIOR DOORS AND TRIM

Invoice	Qty.	Description
2453 72,645 24Sep20	9	THRU OUT: ADDITIONAL FOR SAFE & SOUND (SOLID CORE) NOT INCLUDING CLOSETS

INTERIOR TRIM /MOULDINGS

Invoice	Qty.	Description
2453 72,351 24Sep20 **	4	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME

INTERIOR TRIM AND DOORS

Invoice	Qty.	Description
2474 25Nov20 NoCat	1	**CLARIFICATION NOTE** DELETE FRONT FOYER CLOSET ENTIRELY, EXTEND RAILING AT LANDING

KITCHEN AND BATH CABINETRY

Invoice	Qty.	Description
2453 72,218 24Sep20 **	1	KITCHEN - UPGRADE TO 8" DUCT (INTERIOR WALL) IN LIEU OF STANDARD OFFERING
2453 72,690 24Sep20 **	1	DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED
2474 25Nov20 NoCat	1	*****NOTE***** DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED VENTILATION WILL BE EXPOSED ABOVE UPPER CABINETS *UNLESS ADDITIONAL KITCHEN CABINETRY IS PURCHASED AT COLOUR APPOINTMENT* EITHER EXTENDED FURRING PANEL OR STACKED UPPERS MUST BE PURCHASED TO CONCEAL VENTILATION

MASONRY

Invoice	Qty.	Description
2474 25Nov20 NoCat	2	FRONT: EXTERIOR LED SOFFIT POT LIGHT - EACH LOCATE APPROX CENTERED ABOVE EACH GARAGE DOOR - IN LIEU OF STANDARD COACH LIGHT. USE STANDARD SWITCH



CONSTRUCTION SUMMARY

Lot: 154
Model: 40.00 A BRIARWOOD
Project/Phase: Pine Valley Forevergreen / 1

NETWORK AND WIRING

Invoice	Qty.	Description
2453 72,264 24Sep20	1	LAUNDRY ROOM: ROUGH - IN FOR EXTRA SECURITY KEY PAD
2474 72,256 25Nov20	2	BEDROOM 3 + BEDROOM 4: ADDITIONAL RG6 HIGH SPEED TV / INTERNET OUTLETS - SEE PLAN FOR LOCATION
2474 72,260 25Nov20	1	CONDUIT PIPE - FROM ATTIC TO BASEMENT - FROM NEAR ELECTRICAL PANEL IN BASEMENT TO APPROX CENTER OF ATTIC
2474 25Nov20 NoCat	3	GREAT ROOM AND FORMAL ROOM: ADD SPEAKER WIRING TO GREAT ROOM (2) AND FORMAL ROOM (1) SEE PLAN FOR LOCATION

PAINT

Invoice	Qty.	Description
2474 25Nov20 NoCat	1	*****NOTE***** DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED VENTILATION WILL BE EXPOSED ABOVE UPPER CABINETS *UNLESS ADDITIONAL KITCHEN CABINETRY IS PURCHASED AT COLOUR APPOINTMENT* EITHER EXTENDED FURRING PANEL OR STACKED UPPERS MUST BE PURCHASED TO CONCEAL VENTILATION
2474 25Nov20 NoCat	1	**CLARIFICATION NOTE** DELETE FRONT FOYER CLOSET ENTIRELY, EXTEND RAILING AT LANDING

PAINTING

Invoice	Qty.	Description
2453 72,351 24Sep20 **	4	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME
2453 72,690 24Sep20 **	1	DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED

PANL - FRAMING

Invoice	Qty.	Description
2453 72,351 24Sep20 **	4	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME
2453 72,690 24Sep20 **	1	DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED



CONSTRUCTION SUMMARY

Lot: 154
Model: 40.00 A BRIARWOOD
Project/Phase: Pine Valley Forevergreen / 1

PLUMBING

Invoice	Qty.	Description
2453 72,332 24Sep20	1	KITCHEN; ROUGH-IN 1/4" COLD WATER LINE TO FRIDGE
2453 72,617 24Sep20	1	MASTER ENSUITE: MIROLIN STRADE PRE-FORMED SHOWER BASE (60X 36) IN LIEU OF A STANDARD TUB (BASE ONLY)
2453 72,616 24Sep20	1	SHARED BATHROOM: MIROLIN STRADE PRE-FORMED SHOWER BASE (30X 60) IN LIEU OF A STANDARD TUB (BASE ONLY)

ROUGH CARPENTRY

Invoice	Qty.	Description
2453 72,351 24Sep20 **	4	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME

STAIRS AND RAILINGS

Invoice	Qty.	Description
2453 24Sep20 NoCat	1	2ND FLOOR LOFT - INSTALL RAILING IN LIEU OF HALF WALL INCLUDED IN APS
2474 25Nov20 NoCat	1	**CLARIFICATION NOTE** DELETE FRONT FOYER CLOSET ENTIRELY, EXTEND RAILING AT LANDING

WINDOWS - BASEMENT

Invoice	Qty.	Description
2453 72,351 24Sep20 **	4	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME

WINDOWS AND DOORS

Invoice	Qty.	Description
2453 24Sep20 NoCat	1	GREAT ROOM: 96" GARDEN DOOR ASSEMBLY
2453 24Sep20 NoCat	1	THRU OUT: BLACK INTERIOR WINDOWS
2474 25Nov20 NoCat	-1	**DELETE** BLACK INTERIOR WINDOWS (from pe.2453)

PV-15A.
SEPT 11 2020

PV-15A
NOV. 24 2020

THIS PLAN SHOWS
THE OPTIONAL GROUND FLOOR

// = SOUND INSULATION.
in wall

96" GARDEN
DOOR ASSEMBLY

66" AFF.

(S) = SPEAKER WIRING.

OVEN +
MICRO

GAS + ELECT


BLACK WINDOWS
TURN OUT

REVISOR NO!
NOV. 16 2020

CENTER
LIGHT to
walls.

RAILING

DELETE
CLOSET

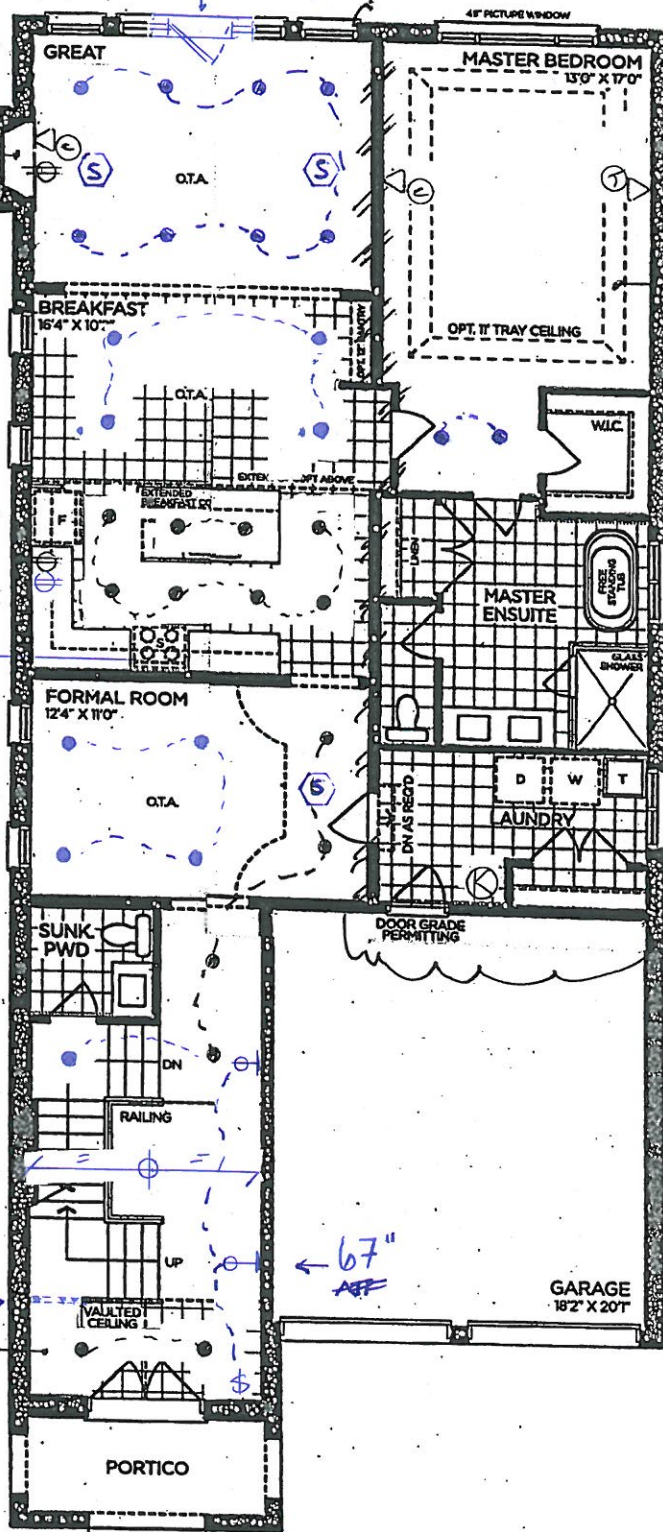

GROUND FLOOR | ELEV. A

ELEV. A.

~~ELEV. B~~

VENDOR
PURCHASER
PURCHASER

GOLDPARK
WORTH MOR

Prices, figures, illustrations, sizes, features and finishes are subject to change with notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 40

SCHEDULE 'F'




PV-154 *Jan* *DL*
SEPT 11 2020

PV-154 *Jan* *DL*
Nov 24 2020

The Briarwood

40' SERIES

→ Elevation A • 2,870 sq.ft.
✗ Elevation B • 2,860 sq.ft.

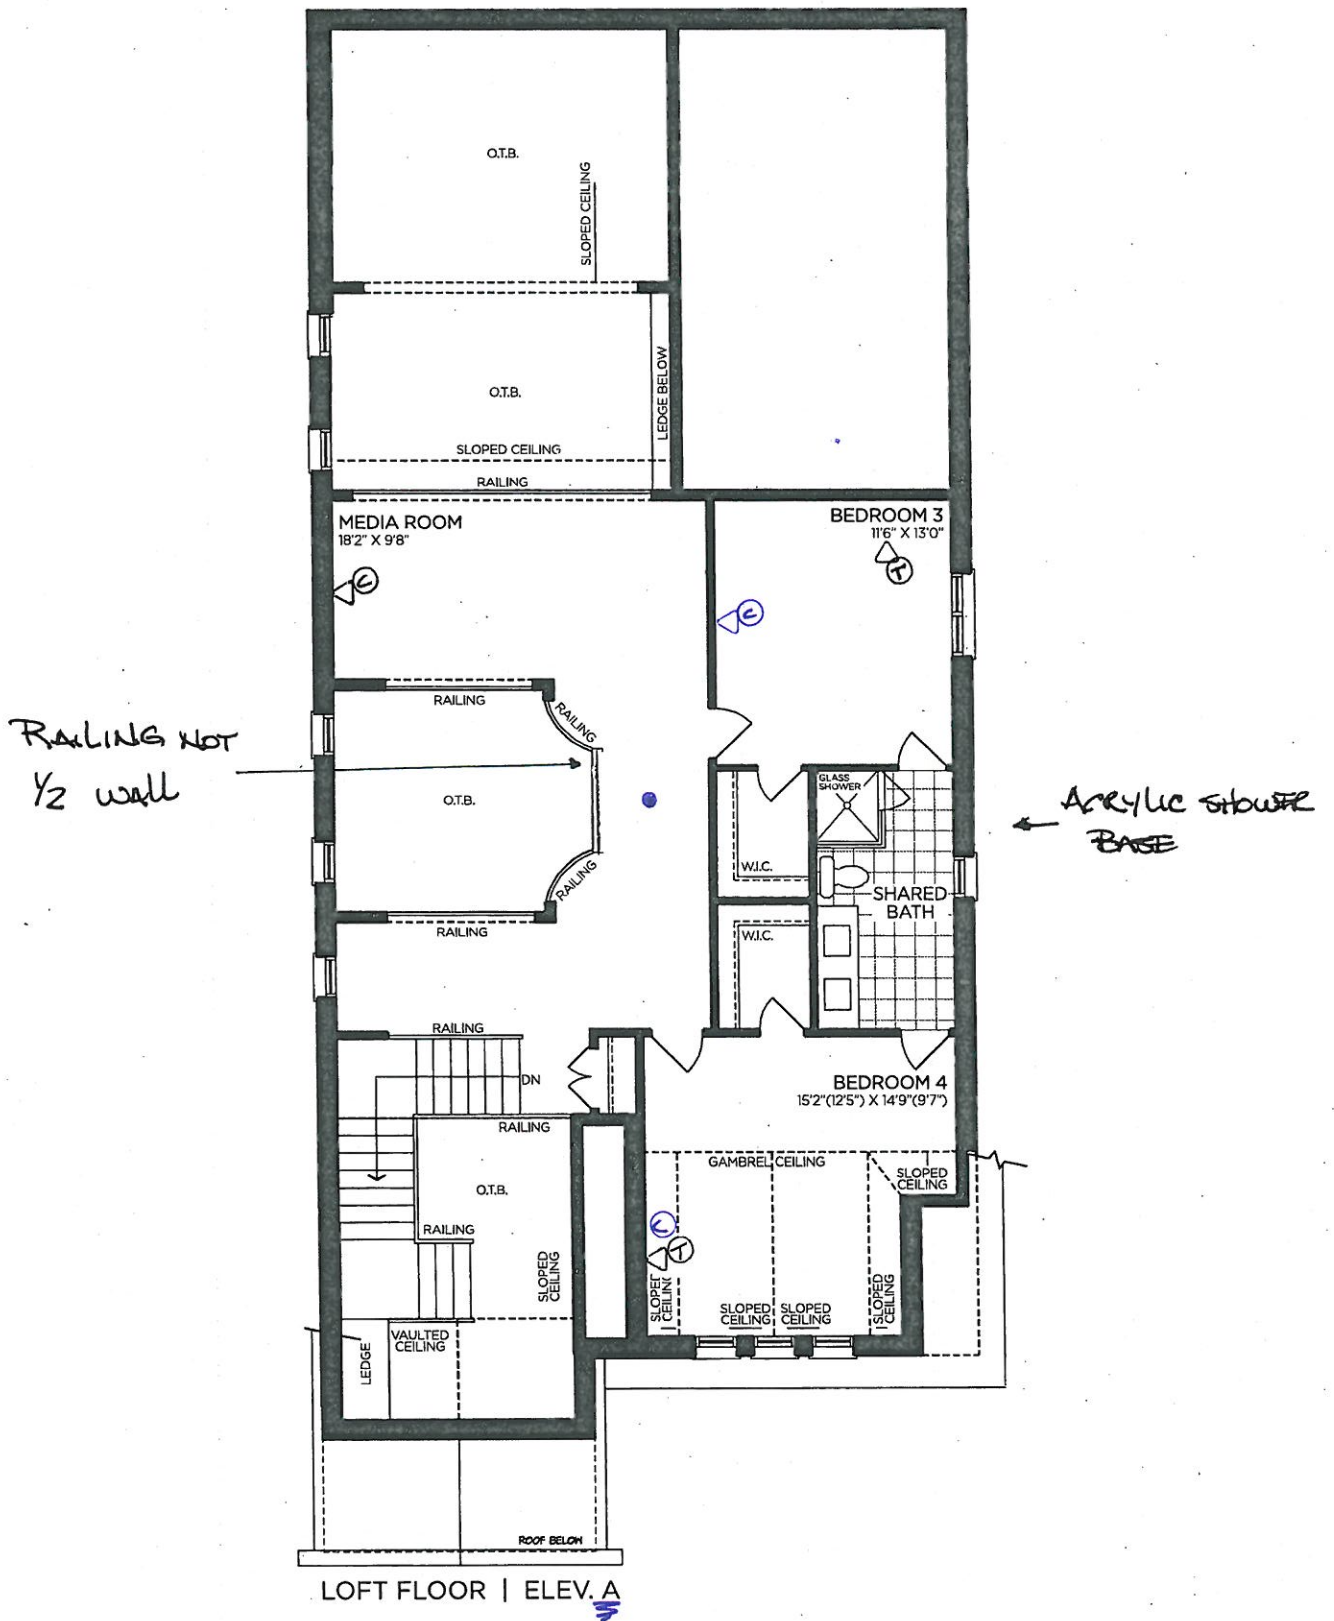

VENDOR

PURCHASER

PURCHASER

GOLDPARK
WORTH MORE™

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4000

SCHEDULE 'F'




PV-15A (initials) (initials)
SEPT. 11 2026
PV-15A (initials) (initials)
Nov. 24 2026

The Briarwood
40' SERIES

→ Elevation A • 2,870 sq.ft.
✗ Elevation B • 2,860 sq.ft.

9' BASEMENT

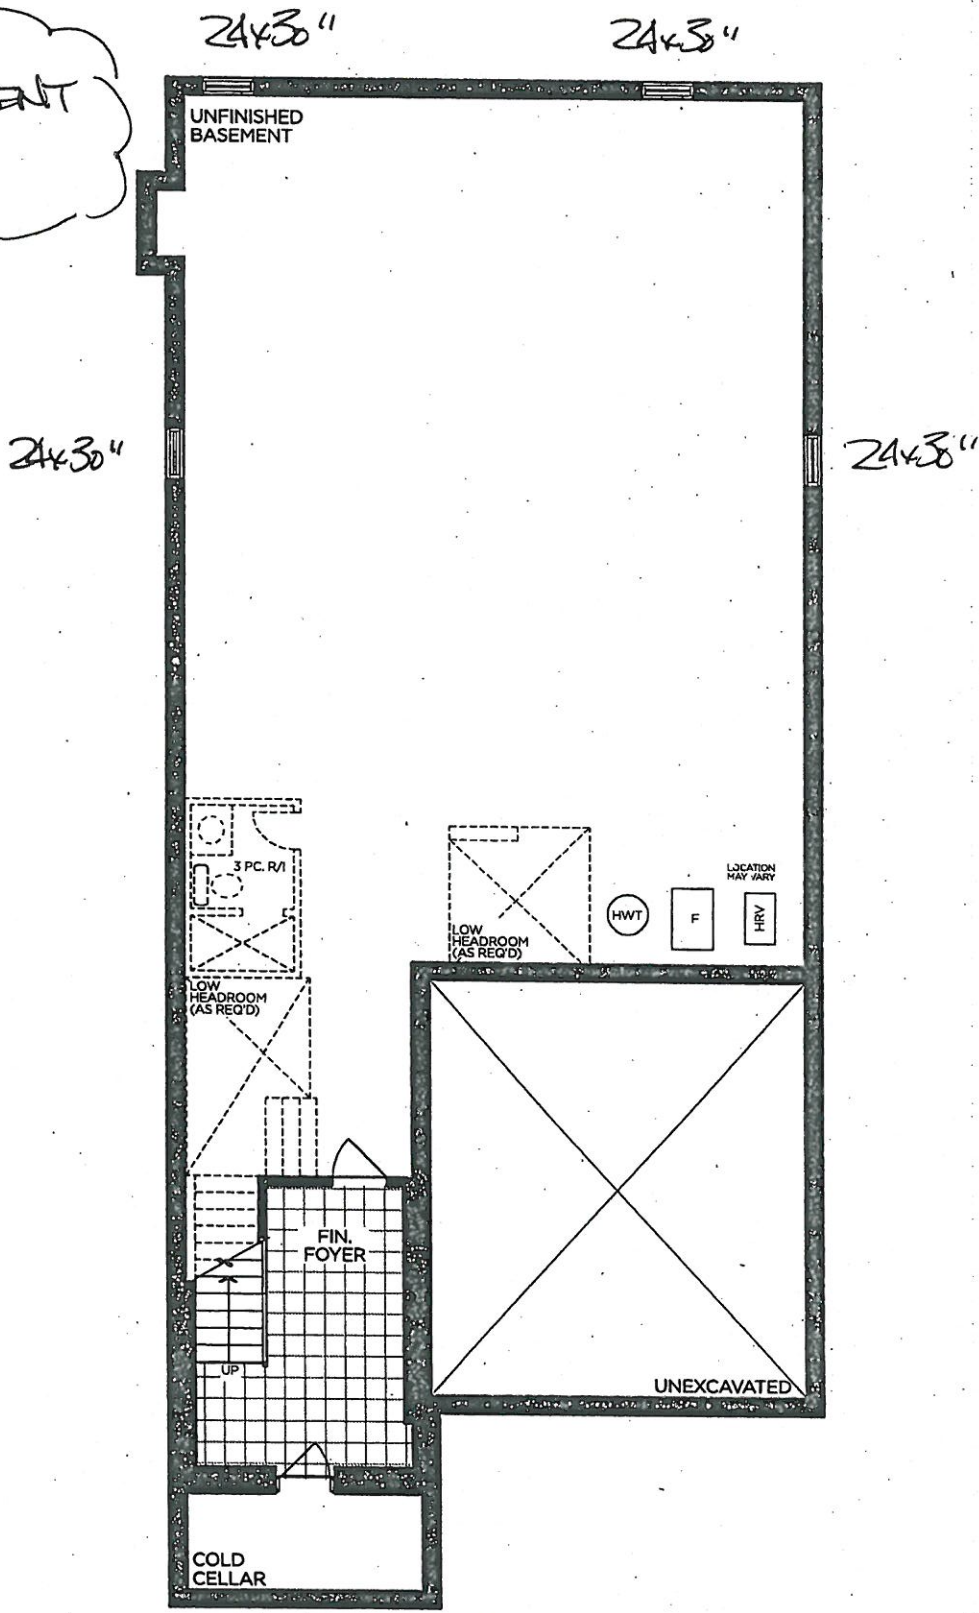

BASEMENT | ELEV. A & B



VENDOR

PURCHASER

PURCHASER

GOLDPARK
WORTH MORE™

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4000

PV-154  
Feb. 1, 2021


Miele
Convection Oven
H6680 BP

Installation diagrams

Appliance and cut-out dimensions

Miele ovens can be installed flush or proud. Discuss your installation requirements with your architect, designer and installer.

Undercounter installation

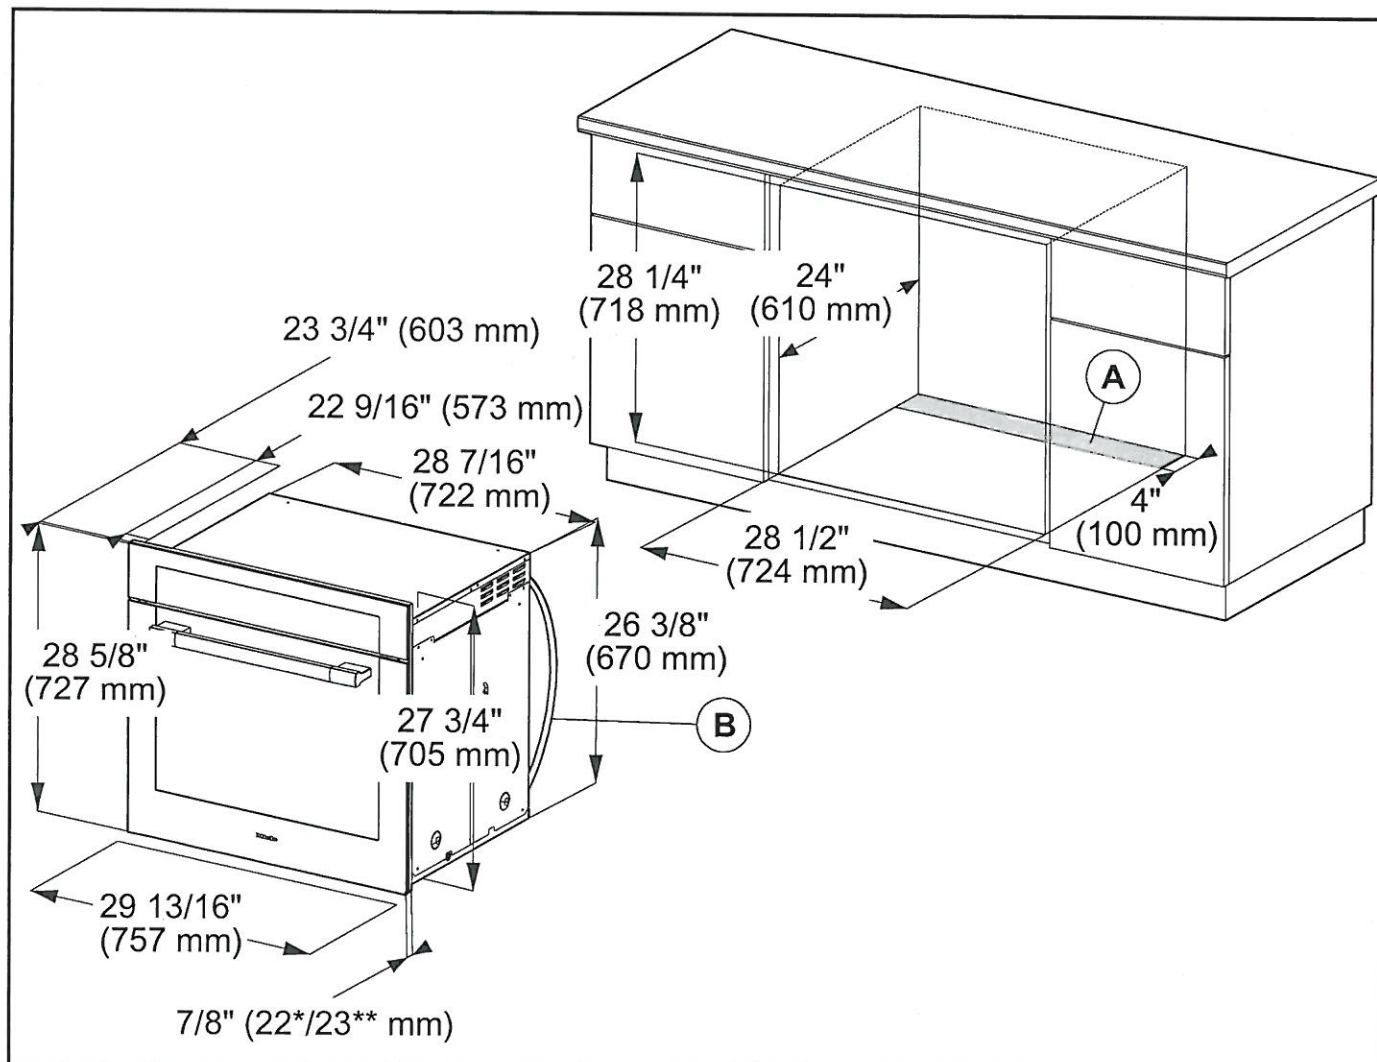

(A) Cut-out (4" x 28 3/8" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation

(B) Power cord with plug

Flush Installation

* Oven with glass front

** Oven with metal front

Depending on the model, the oven front may differ from the one shown the drawing. Current specifications can be found on the Miele website.


PV-154 *ma*
Feb. 1, 2021



Miele
Convection Oven
H6680 BP

Installation diagrams

Installation in a tall cabinet

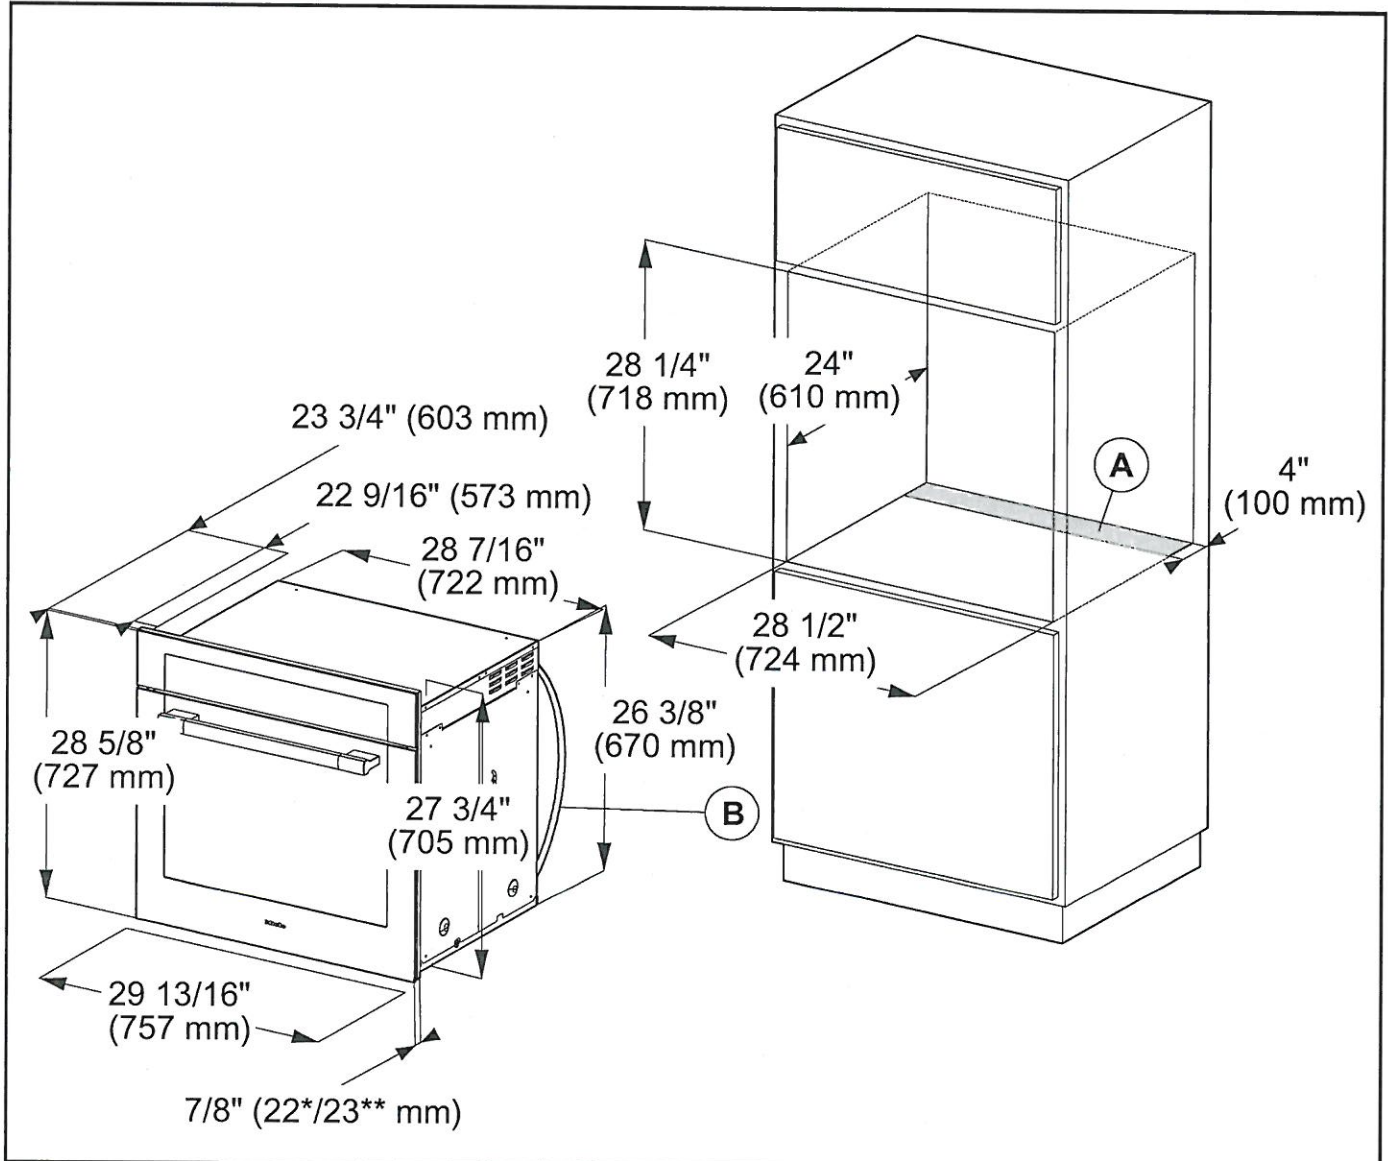

Ⓐ Cut-out (4" x 28 3/8" / 100 mm x 720 mm) in the bottom of the cabinet for power cord and ventilation



Ⓑ Power cord with plug

Fixed install

* Oven with glass front


** Oven with metal front

Depending on the model, the oven front may differ from the one shown the drawing. Current specifications can be found on the Miele website.

PV-154  
Feb. 1, 2021



KM 3474 G
Gas cooktop
with 2 dual wok burners for particularly versatile cooking convenience.

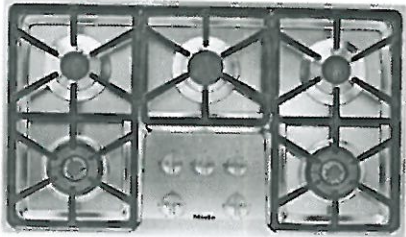



- Simple controls: easy operation via rotary dial control
- Professional design - 36 (914) inch wide stainless steel trough
- Particularly versatile - 5 burners incl. Two dual woks
- Extremely safe - GasStop function

Price \$ 3,199.00*



* Excludes all applicable taxes and delivery charges

Heating type	
Heating type	Gas
Construction type	
Independent of cooker	•
Design	
Cast iron pot rests (matt black enamelled)	•
Cooking zone details	
Number of cooking zones	5
Cooking zone	
Position	front left
Type	Dual wok burner
Max. rating in W	4500
Position	rear left
Type	Standard burner
Max. rating in W	2600
Position	rear centre
Type	High-speed burner
Max. rating in W	3500
Position	rear right
Type	Standard burner
Max. rating in W	2600
Position	front right
Type	Dual wok burner
Max. rating in W	4500
Position	Not available
Type	N/A
Max. rating in W	-
User convenience	
Operation via knobs	•
Electronic ignition with single-hand operation	•
QuickStart	•
Safety	
GasStop & ReStart	•
Technical data	
Width in in. (mm)	36 (914)
Height in in. (mm)	5 (125)
Depth in in. (mm)	21 3/8 (542)
Cutout width in in. (mm) with surface-mounted installation	35 (889)
Cutout depth in in. (mm) with surface-mounted installation	20 1/2 (518)
Weight in oz (kg)	55 (25)
Total rated load in kW	17.0
Power cable length in m	3 (1.2)

PV-154  
Feb. 1, 2021



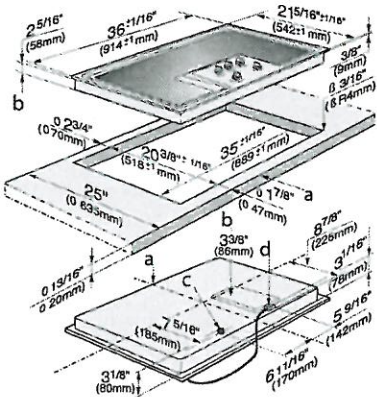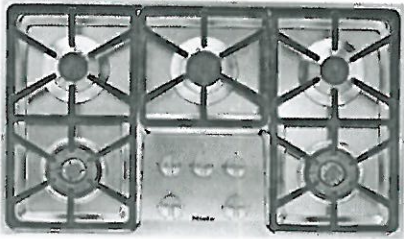

KM 3474 G
Gas cooktop
with 2 dual wok burners for particularly versatile cooking convenience.



KM 3474/KM3475 (Installation Drawing) - USA


- 1. Front
- 2. Installation height
- 3. Gas connection
- 4. Electrical connection

PV-154  
Feb. 1, 2021



Miele
Hood Fan
DA 2588

Installation

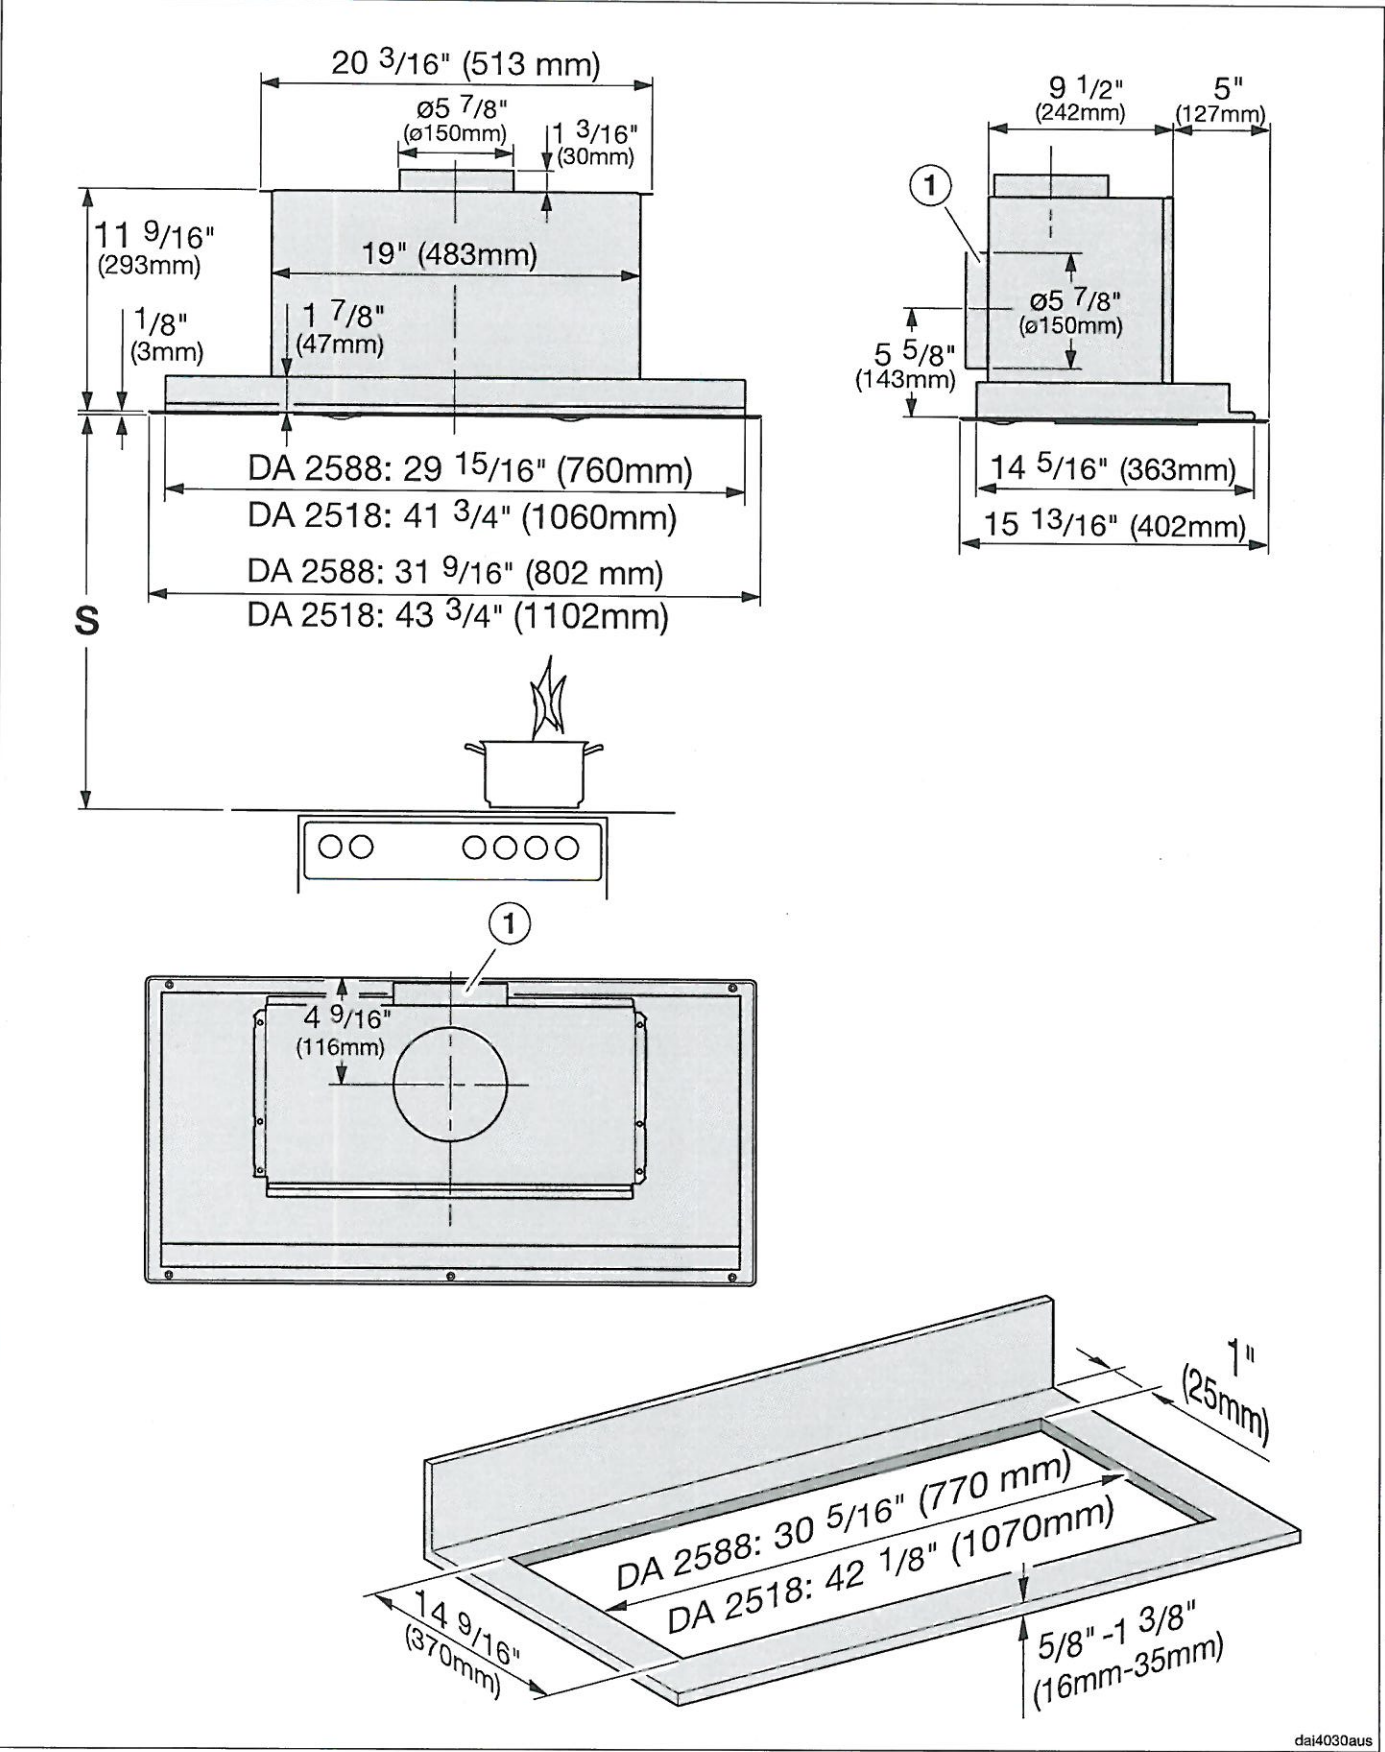Appliance dimensions



The drawing is not to scale

PV-154  
Feb. 1, 2021

Miele
Hood Fan
DA 2588

Installation



- ① The ducting can also be connected at the back.

Distance between cooktop and ventilation hood (S)

Provided a larger distance is not given by the manufacturer of the cooktop, follow the minimum safety distances between a cooktop and the bottom of the hood.



Please also observe the information contained in the "IMPORTANT SAFETY INSTRUCTIONS" section.

Cooking appliance	Minimum distance S	
	Miele appliance	Non-Miele appliance
Electric Cooktops	24" (610 mm)	
Electric Barbeques and Fryers	26" (660 mm)	
Multiburner Gas Cooktops ≤ 43,000 BTU/hr (12.6 kW), no burner > 15,000 BTU/hr (4.5 kW).	26" (660 mm)	30" (760 mm)
Multiburner Gas Cooktops ≤ 73,800 BTU/hr (21.6 kW), no burner > 16,500 BTU/hr (4.8 kW)	30" (760 mm)	
Multiburner Gas Cooktops > 73,800 BTU/hr (21.6 kW), or one of the burners > 16,500 BTU/hr (4.8 kW)	Not possible	
Single Burner Gas Cooktops ≤ 20,500 BTU/hr (6 kW)	26" (660 mm)	30" (760 mm)
Single Burner Gas Cooktops > 20,500 BTU/hr (6 kW) ≤ 27,600 BTU/hr (8.1 kW)	30" (760 mm)	
Single Burner Gas Cooktops > 27,600 BTU/hr (8.1 kW)	Not possible	



PV-154  
Feb. 1, 2021

Installation

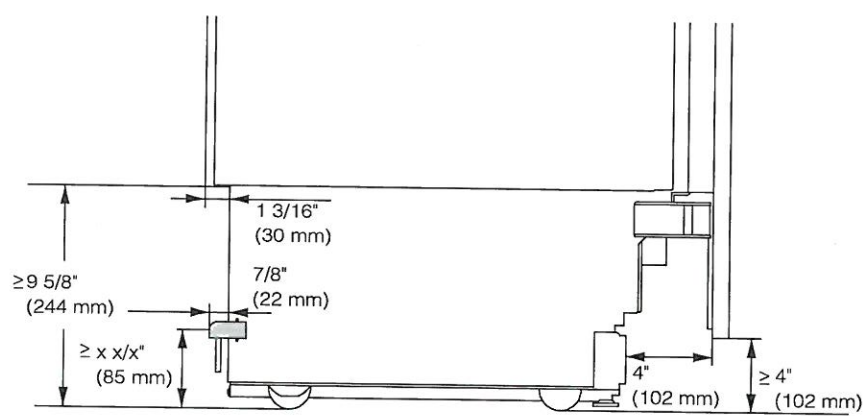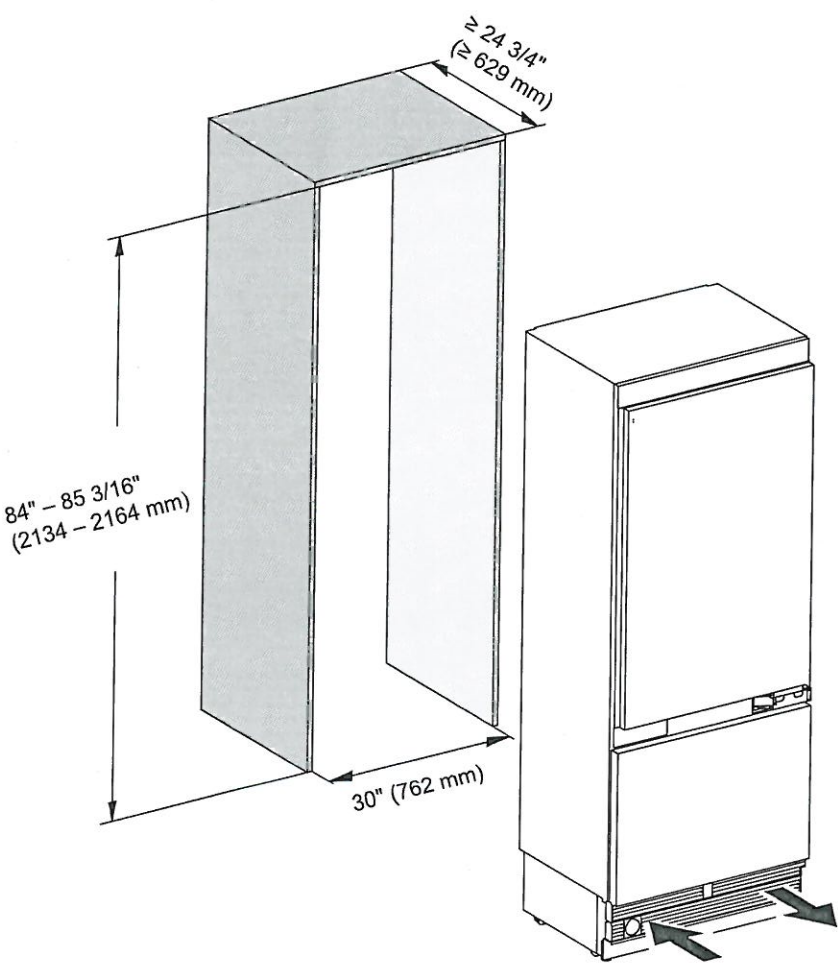KF 2801, KF 2811 Vi




Side view

PV-154  
Feb. 1, 2021



Installation

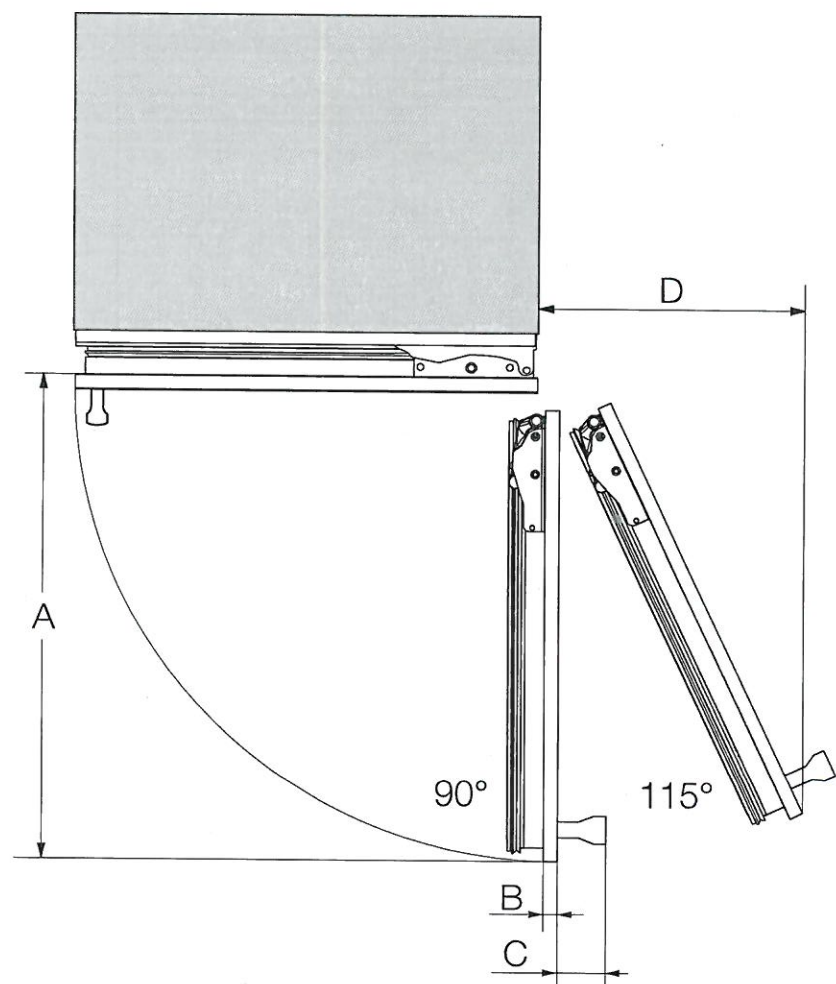Dimensions when the appliance door is open (opening angle 90°/115°)



	A	B*	C*	D
KF 2801 Vi, KF 2811 Vi	829 mm	cabinet front max. 1 1/2" (max. 38 mm)	dorr handle	363 mm
KF 2901 Vi, KF 2911 Vi	982 mm	cabinet front max. 1 1/2" (max. 38 mm)	dorr handle	428 mm


* The dimensions of the cabinet front and the door handle vary depending on the design of the kitchen.

PV-154 
Feb. 1, 2021 

Installation

Dimensions of the cabinet front

KF 2801 Vi, KF 2811 Vi

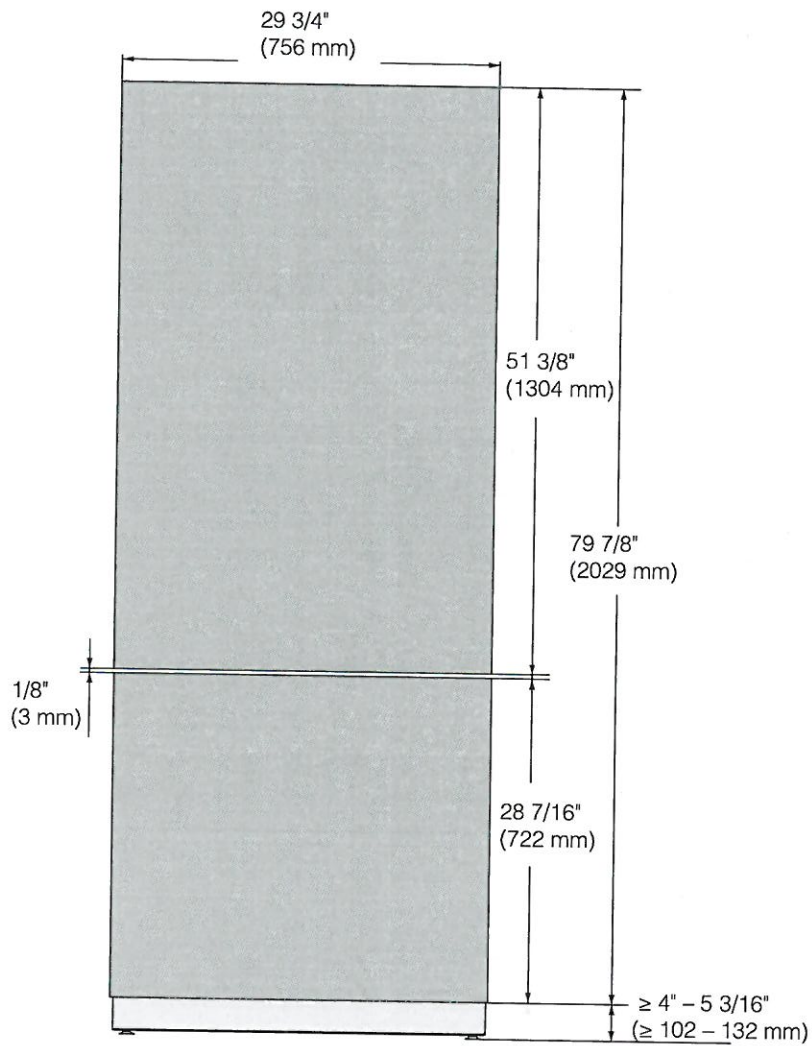


PV-154 *M.* *me*
Feb. 1, 2021

Installation diagrams H6700BM, **H6800BM**

Appliance and cut-out dimensions

Miele ovens can be installed flush or proud. Discuss your installation requirements with your architect, designer and installer.

Installation in a tall cabinet

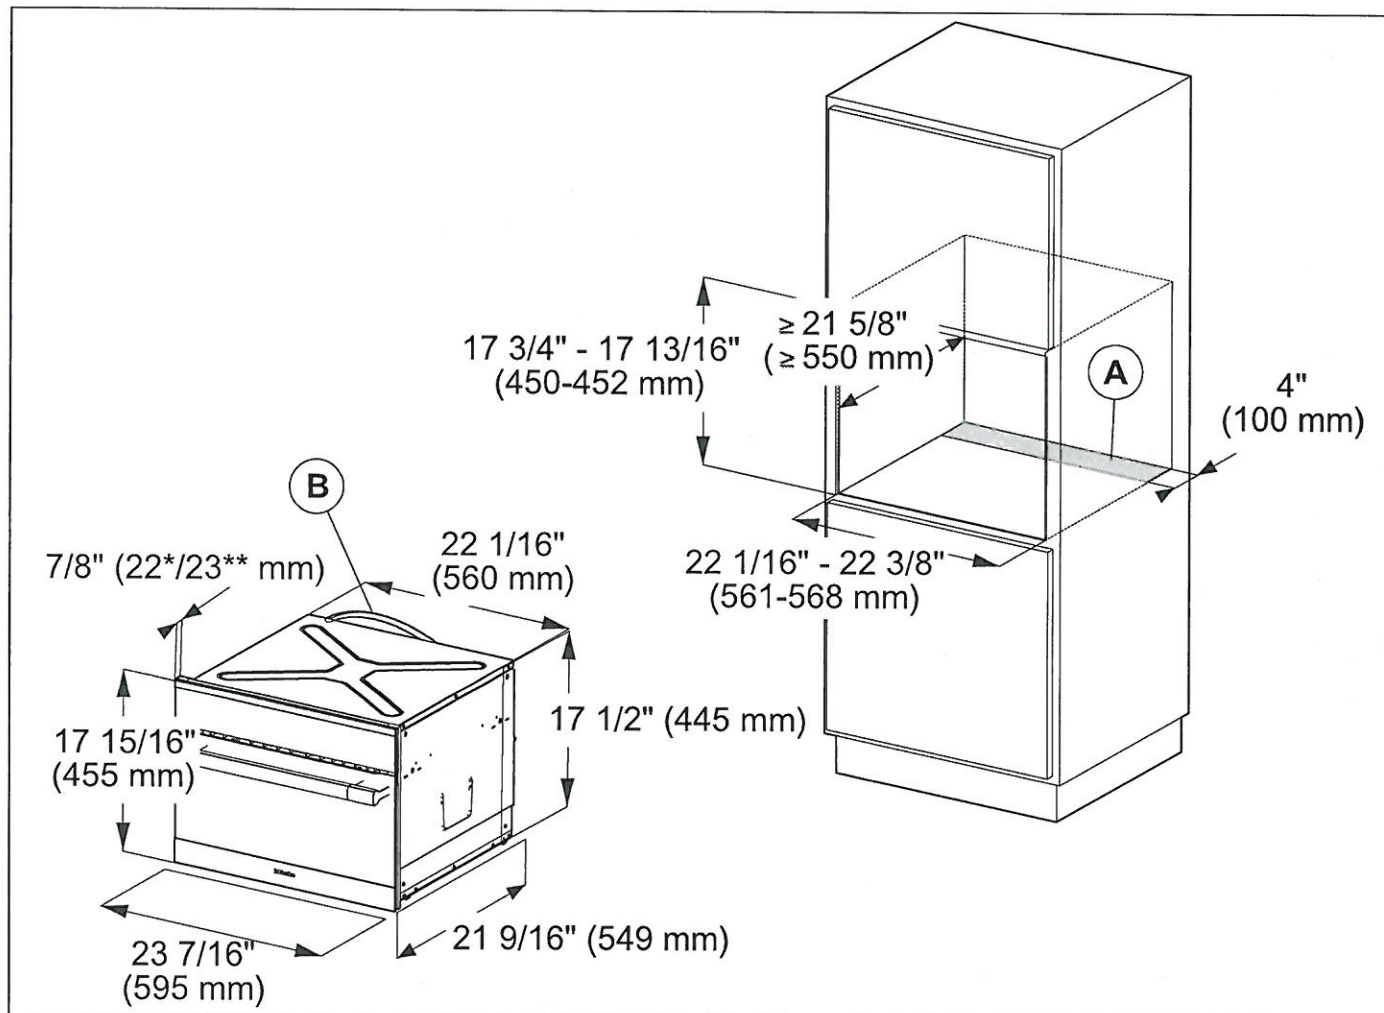

Ⓐ Cut-out ($4" \times 22"$ / $100 \text{ mm} \times 560 \text{ mm}$) in the bottom of the cabinet for power cord and ventilation

Ⓑ Power cord with plug

** Flush Install **

* Oven with glass front


** Oven with metal front

Depending on the model, the oven front may differ from the one shown the drawing. Current specifications can be found on the Miele website.

PV-154
Feb. 1, 2021



Installation diagrams H6700BM, H6800BM

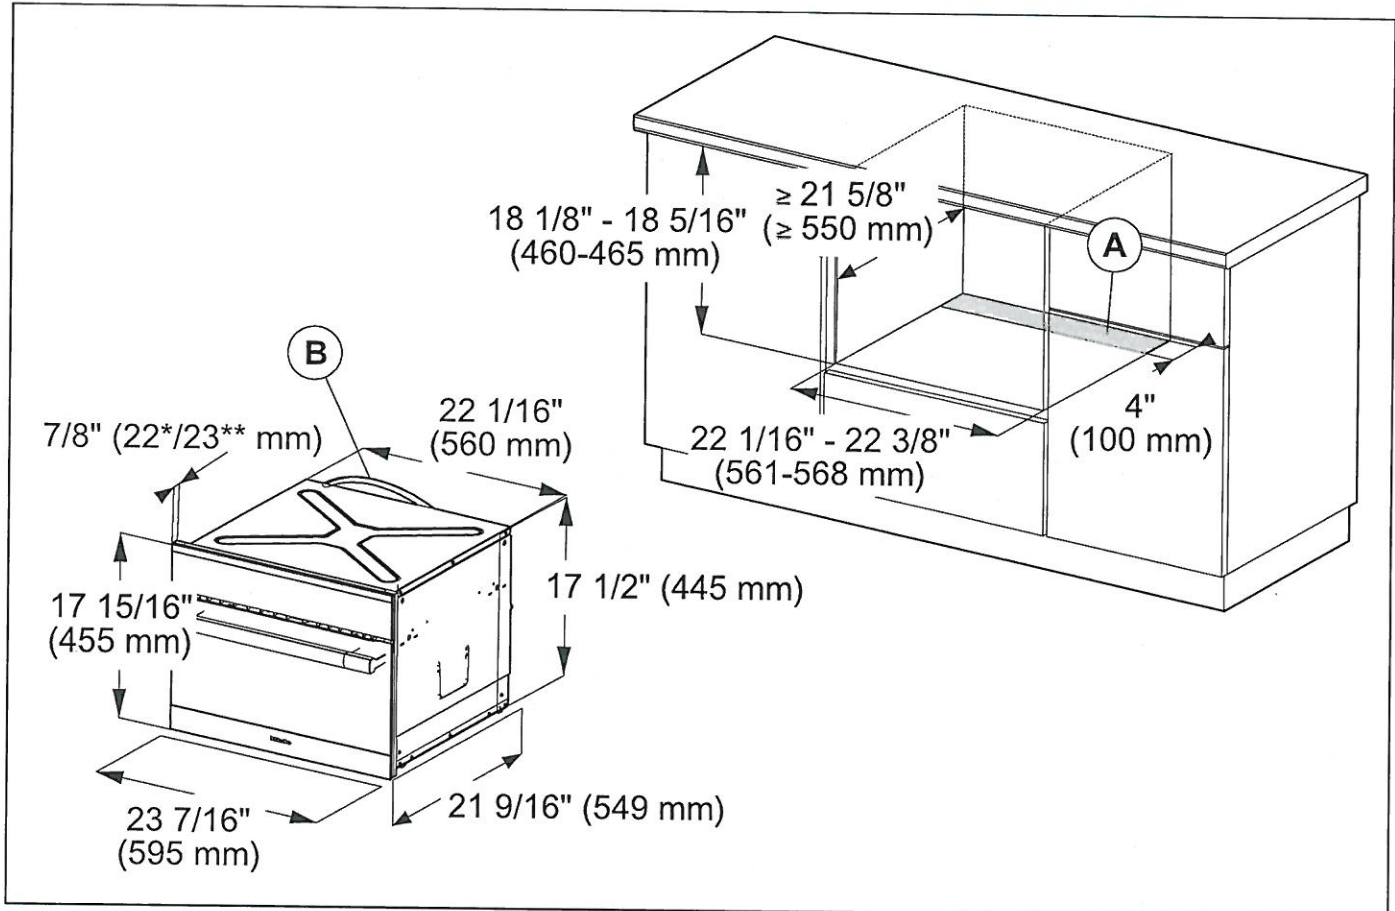Undercounter installation




- Ⓐ Cut-out (4" x 22" / 100 mm x 560 mm) in the bottom of the cabinet for power cord and ventilation
- Ⓑ Power cord with plug
- * Oven with glass front
- ** Oven with metal front

Depending on the model, the oven front may differ from the one shown the drawing. Current specifications can be found on the Miele website.

PV-154  
Feb. 1, 2021

Installation diagrams H6700BM, H6800BM

Combination installation with an oven into a tall cabinet

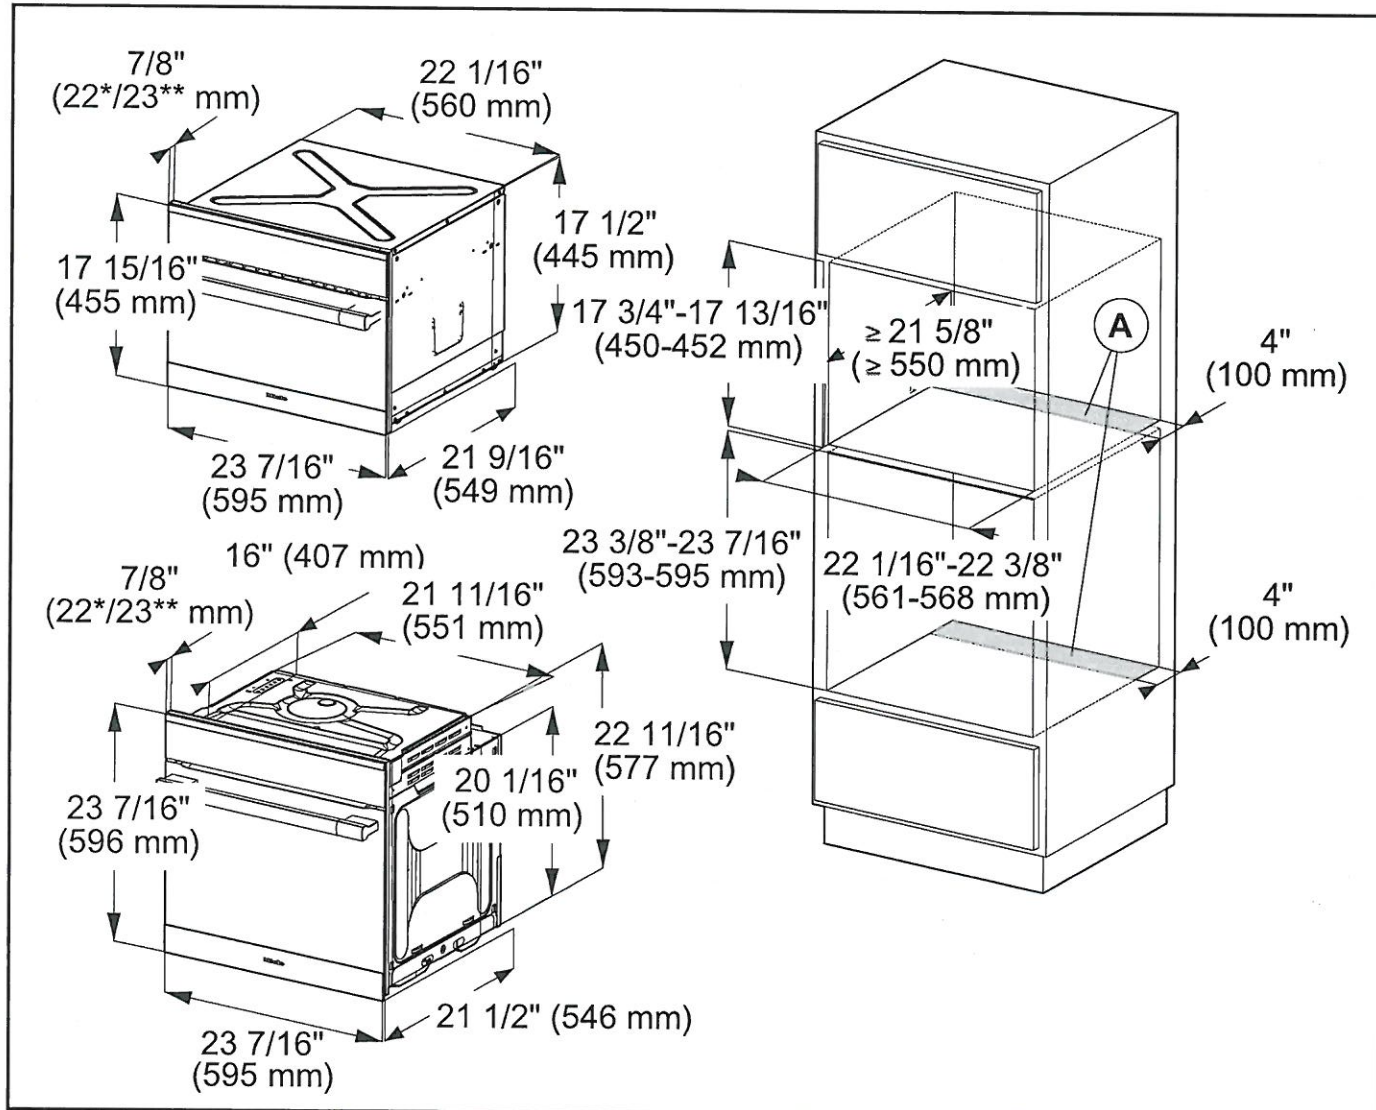



- Ⓐ Cut-out (4" x 22" / 100 mm x 560 mm) in the bottom of the cabinet for power cord and ventilation

* Oven with glass front


** Oven with metal front

Depending on the model, the oven front may differ from the one shown the drawing. Current specifications can be found on the Miele website.

PV-154  
Feb. 1, 2021

Installation diagrams H6700BM, H6800BM

Front dimensions

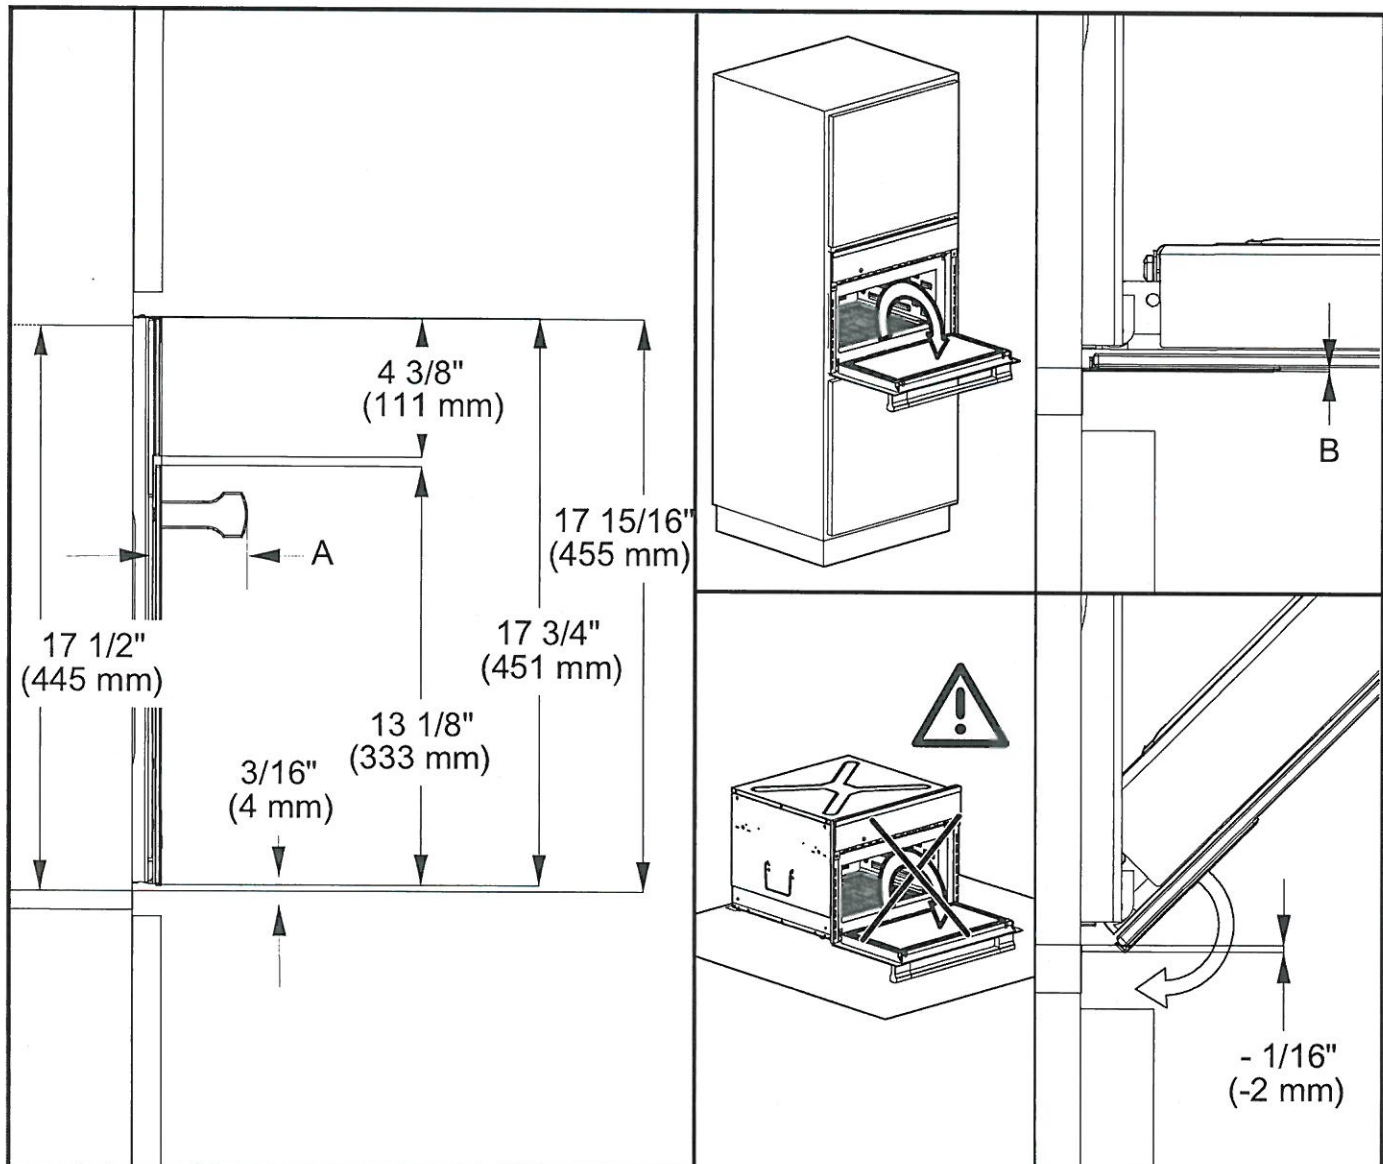

A H67xx: 2 3/4" (69 mm)

H68xx: 1 5/8" (42 mm)

B Oven with glass front: 1/16" (2.2 mm)

Oven with metal front: 1/16" (1.2 mm)

Miele

Trim Kit

Trousse de finition

Montagem de adaptador

EBA6707; EBA6767; EBA6708;

EBA6808; EBA6768; EBA6868

PV-154





Feb. 1, 2021

de, en, fr, es, pt – AU,
BR, CA, GB, MX, NZ,
US, ZA

M.-Nr. 09 374 273

PV-154 M D
Feb. 1, 2021

EBA6708 / **EBA6808** (30")

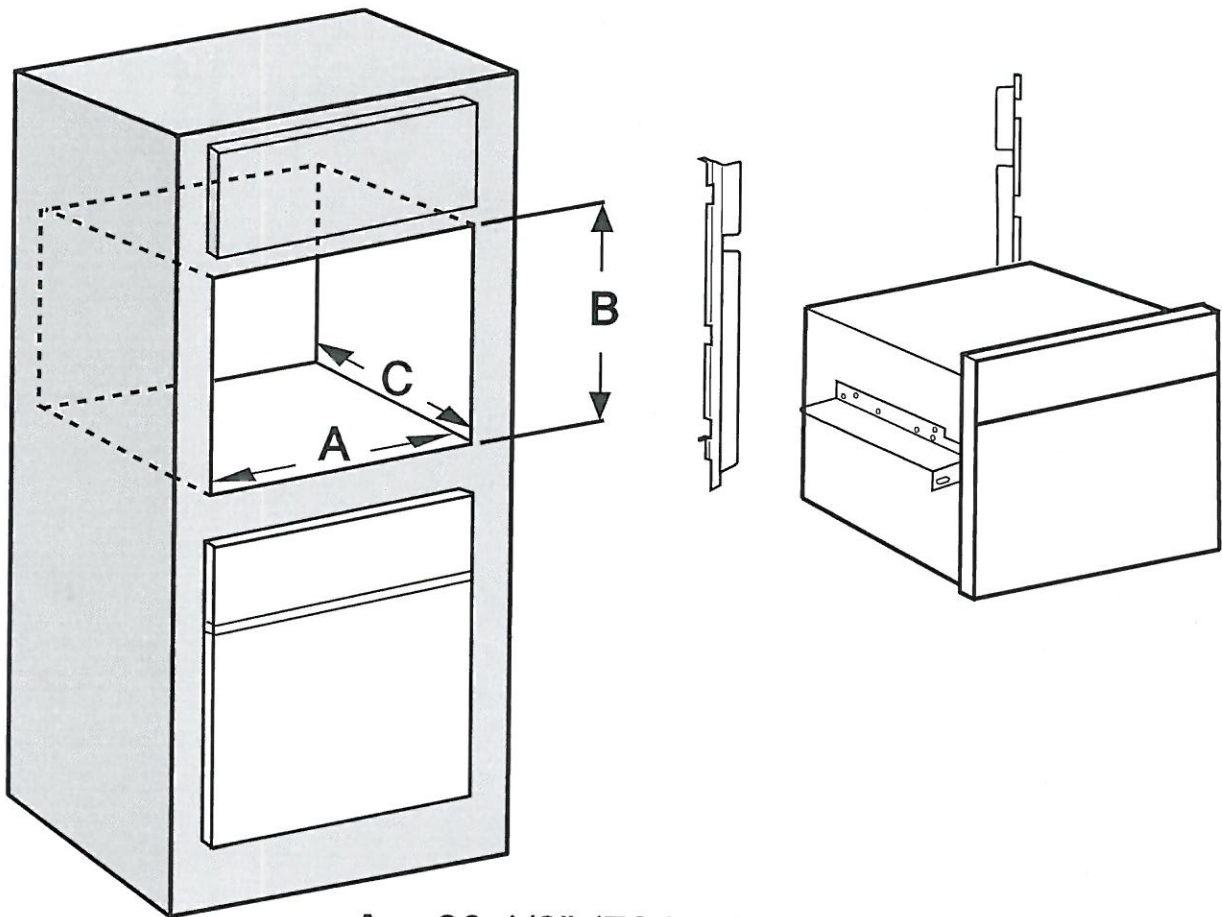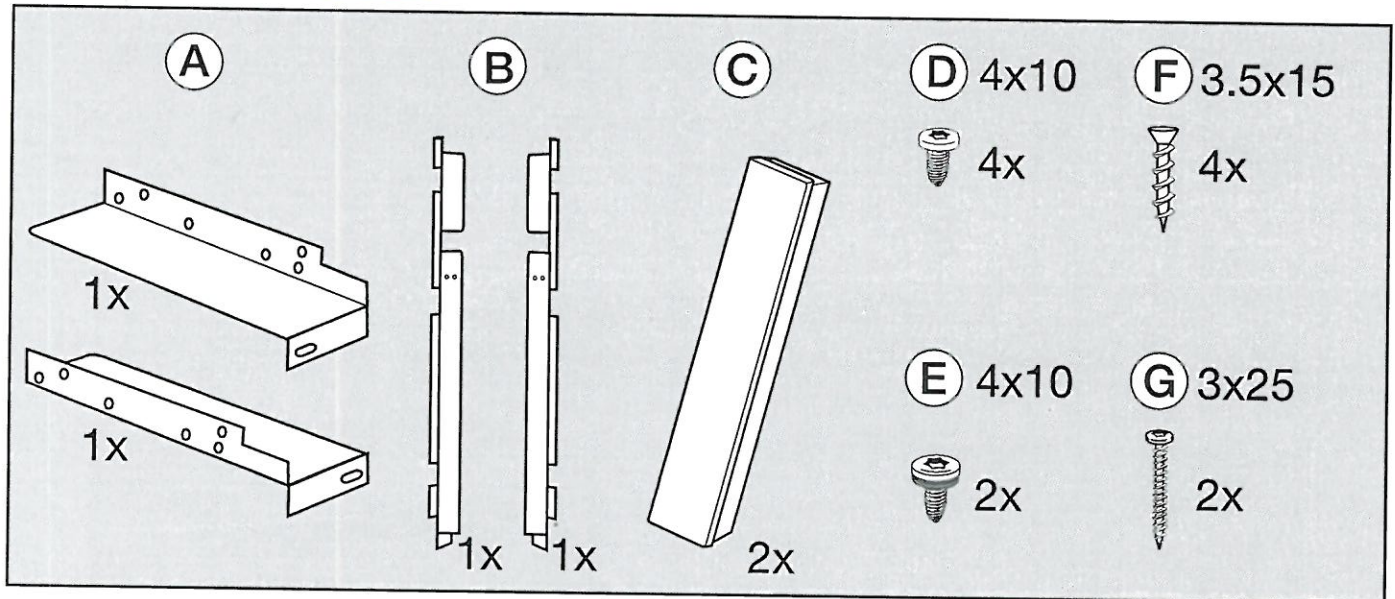

A = 28 1/2" (724 mm)

B = 17 11/16" - 17 13/16" (450 mm - 452 mm)

C = 24" (610 mm)

*First Install

Installation

Additional installation requirements

The washing machine must be installed in accordance with the relevant local regulations.


⚠ Damage resulting from failure to remove the transit bars.
Failure to remove the shipping struts can result in damage to the washing machine and to adjacent cabinetry or appliances.
Remove the shipping struts as described in "Installation and connection".

Installing under a countertop

⚠ Risk of electric shock due to exposed cables
There is a risk of coming into contact with live parts while the lid is removed.
Do not remove the washing machine lid.

This washing machine (with lid intact) can be pushed under a countertop if there is space to do so.


Setting up the cabinet

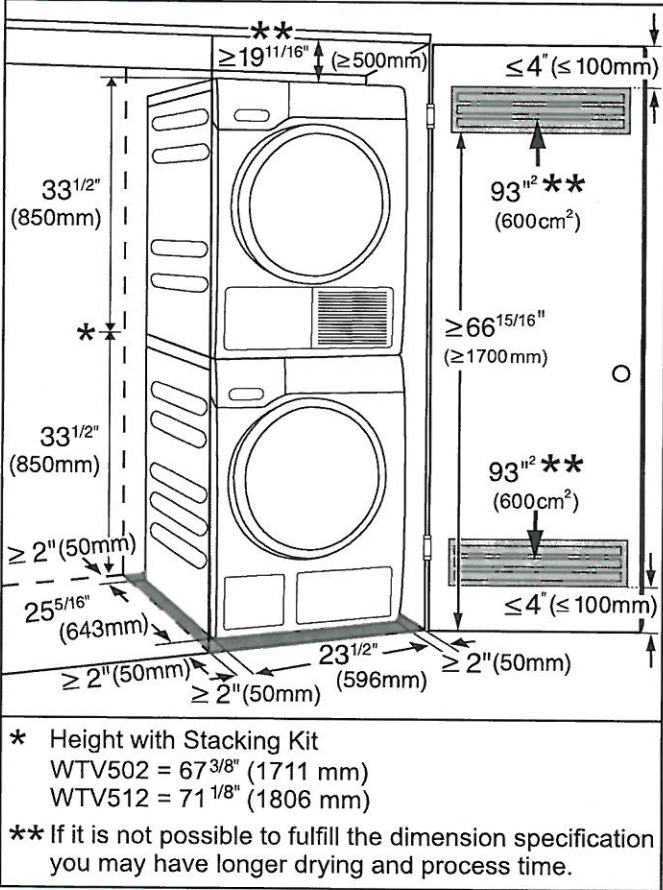


Installation

For closets at room height


You can also insert a ventilation opening at the top of the closet. In addition, you must also provide an opening on the bottom side of the door.

 Risk of damage due to overheating of the washing machine. The air supply must not be hindered by an additional closet or shelf. Please ensure that air is able to circulate freely at the top of the closet.

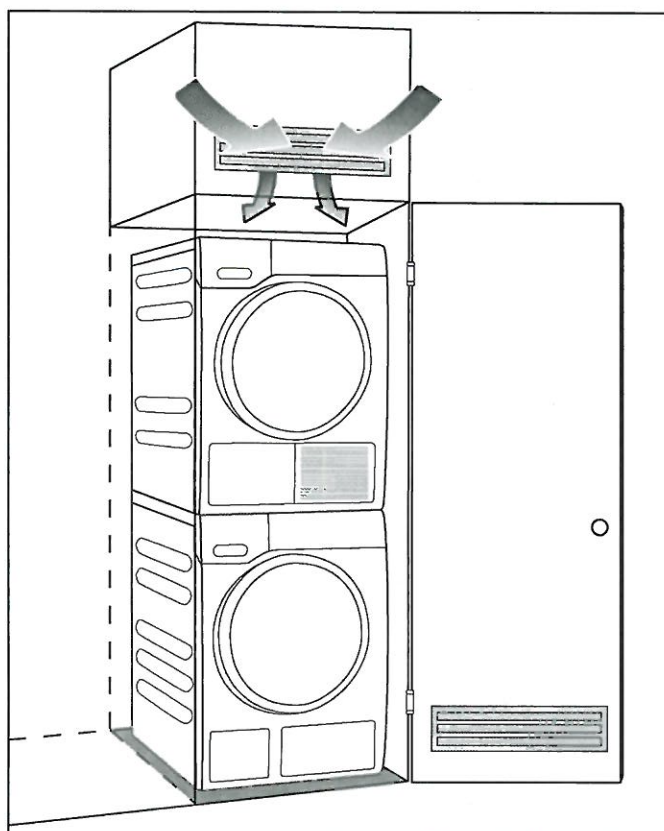

Product dimensions

Dimensions

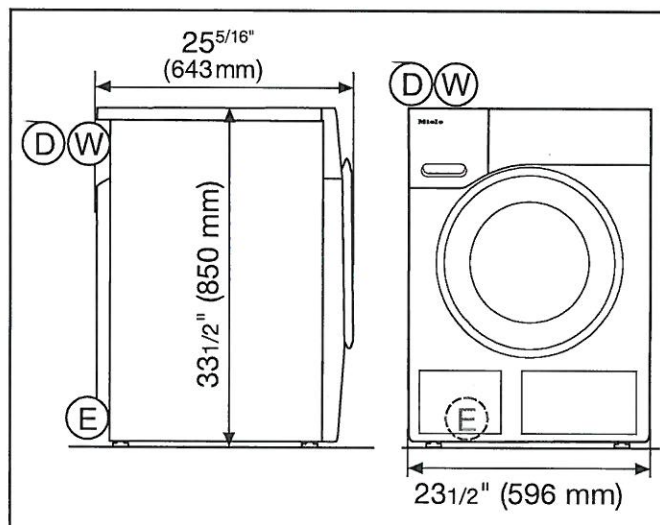


- Ⓓ = 1.50 m drain hose with connection to the top left on the rear
- Ⓔ = 2.00 m electrical cord with plug for 120 V, 15 A (NEMA 5-15 configuration) to the top left on the rear
- Ⓦ = 1.60 m hot and cold-water intake hoses to the top left on the rear

Installation


Installation on a plinth

- WTS 510 (only available in white)

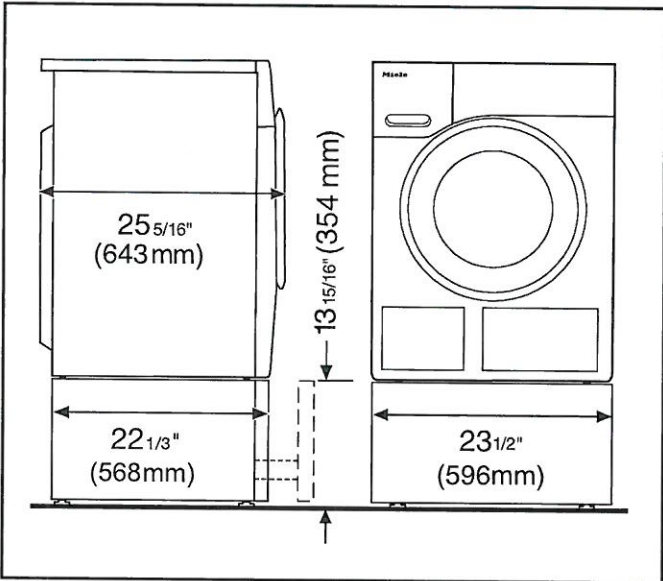

Washer-dryer stack

- WTV 512 and WTV 502 washer-dryer stacking kit

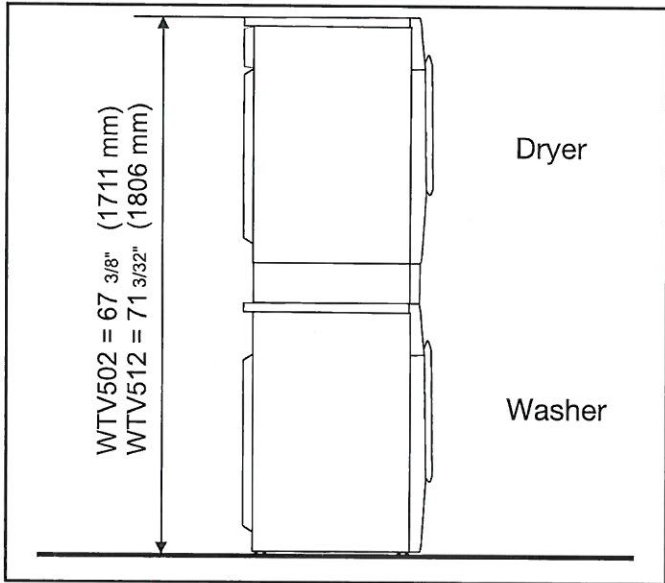

Installation

the condensed water container (which you will need to empty again) or out through the drain hose.

Additional installation requirements

⚠ All installations must be carried out in accordance with local regulations.

Slot-in

This tumble dryer is suitable for pushing under a countertop.


⚠ It is very important to avoid a build-up of heat. The warm air which is expelled from the dryer must be able to dissipate. Warm air which cannot dissipate could cause a fault!

- The appliance lid must not be removed.
- The electrical socket must be located in an accessible position near the tumble dryer.
- Drying durations may increase slightly.

Installing the dryer in a closet

Minimum installation distance

⚠ You must insert sufficiently large ventilation openings into the closet door. You can also open the closet door slightly while the dryer is operating. Otherwise, the dryer can overheat, which can cause a fault!

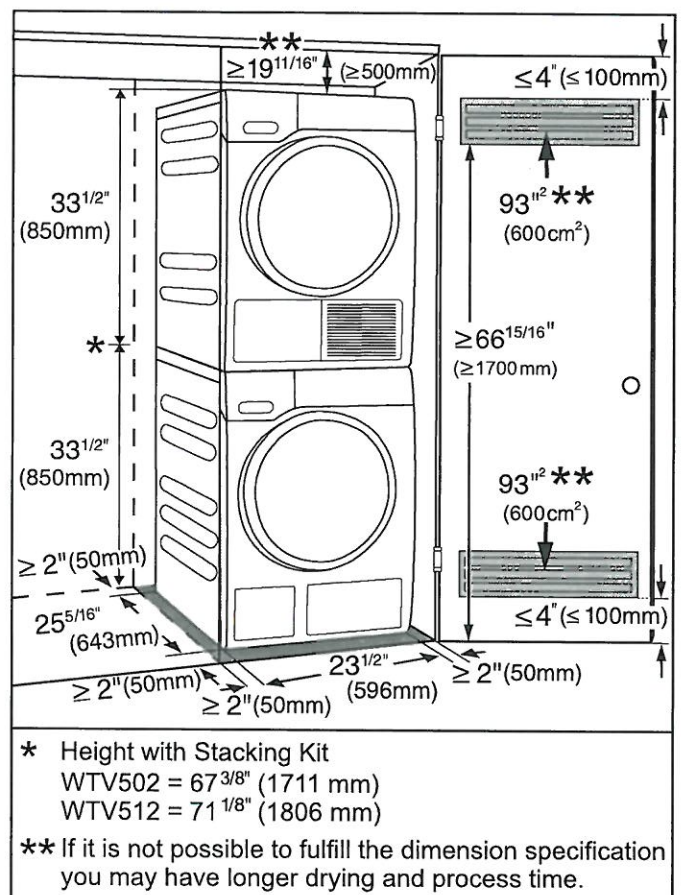


⚠ Ensure that the dryer door can be opened at any time. Ensure that the laundry can be removed at any time without hindrance.

Installation


Installing the dryer in a floor-to-ceiling closet

You can also insert a ventilation opening at the top of the closet. In addition, you must also provide an opening on the bottom side of the closet door.

Direct ventilation is also possible via an air conditioning outlet in the closet.

 The air must be able to circulate freely at the top of the closet.


The air supply must not be hindered by an additional closet or shelf!

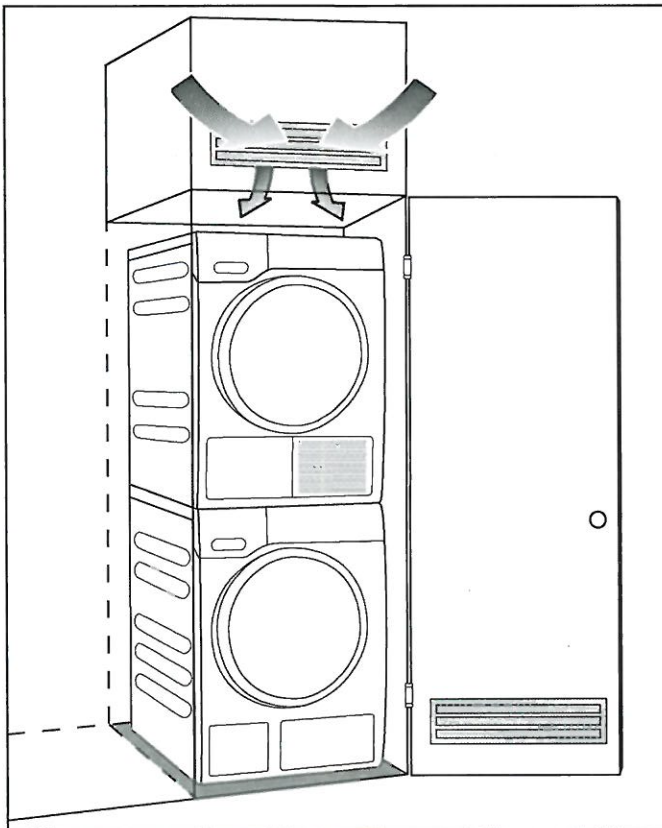

Installation

Product dimensions


Dimensions

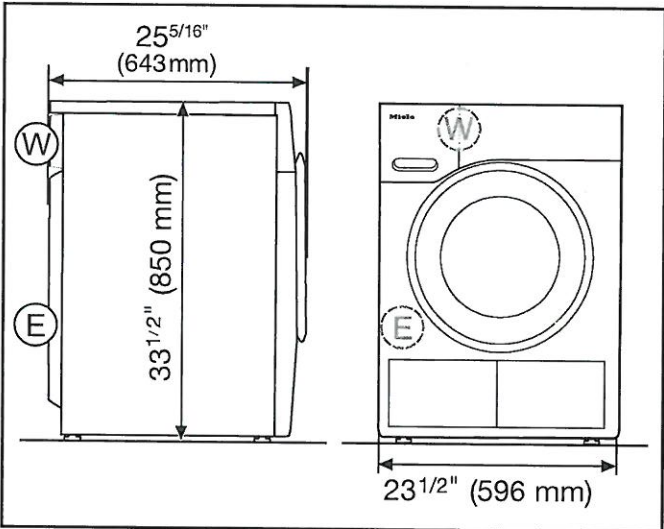

- W 1.60 m drain hose, detachable, top right on the rear
- E 2 m wiring, bottom right on the rear


Washer-dryer stack

- WTV502 or WTV512

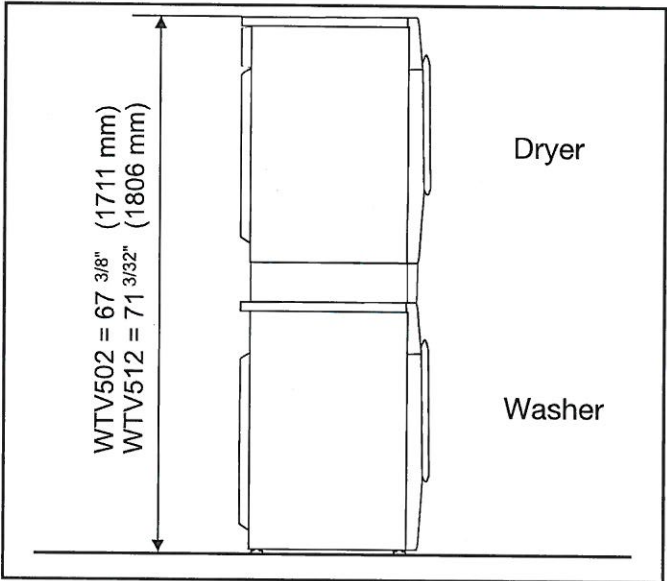


Installation on a plinth

- WTS 510

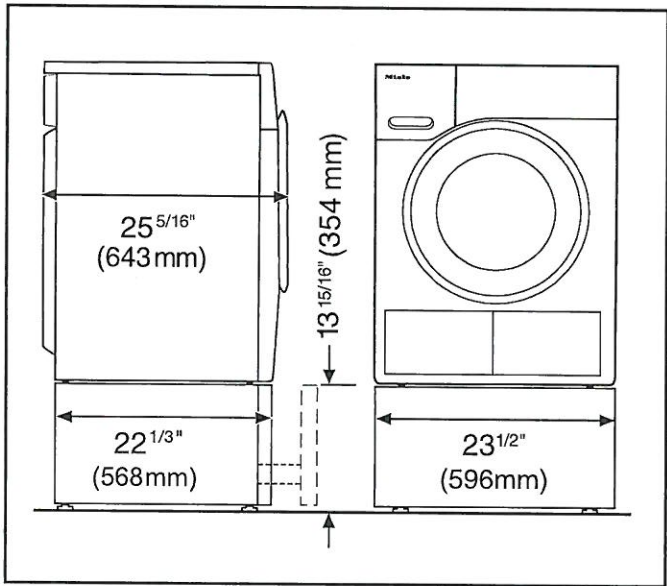

Integrated Single DishDrawer™ Dishwasher, Tall, Sanitize

Series 9 | Integrated
Panel Ready

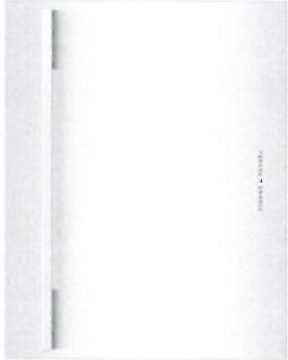


Designed to fit your full-sized dinner plates, this DishDrawer™ can be placed anywhere in your kitchen, integrating seamlessly.

- Knock to pause function is perfect if you miss a dish
- Six wash programs, as well as additional Quick wash, Sanitize and Extra Dry options
- Customize with your own kitchen cabinetry or purchase our stainless steel door panel accessory
- American Disabilities Act (ADA) compliant, this can be installed at an accessible height for loading and unloading



DIMENSIONS

Height	17 ⁷ / ₈ "
Width	23 ⁹ / ₁₆ "
Depth	22 ¹ / ₂ "

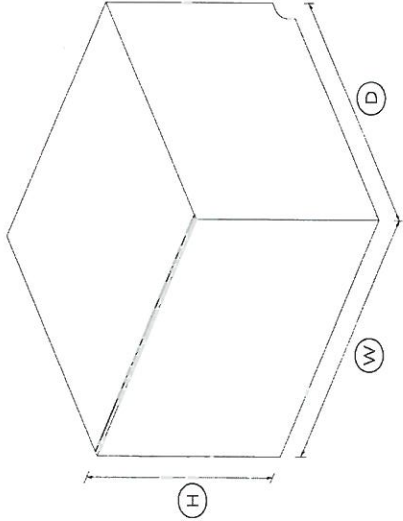

FEATURES & BENEFITS

- Seamless integration**
Slide your DishDrawer™ Dishwasher into an existing kitchen space or integrate into kitchen cabinetry, for a seamless look whilst delivering superior dish care.
- Ease of use**
DishDrawer™ Dishwashers are as easy to open and close as kitchen drawers and can be conveniently positioned at bench height for ease of loading and minimal bending. Flexible racking allows you to make adjustments to fit in a variety of dishes.

PV-154

Date: 17.12.2020 > 1

Quick, Sanitize and Extra Dry options

The Quick wash modifier delivers a faster wash while maintaining performance. The Sanitize option provides extra protection killing 99.9% of bacteria in the final rinse. The Extra Dry setting is perfect for plastic dishes.

Knock to pause

Instead of needing a remote control, these DishDrawer™ Dishwashers have a knock to pause function. A knock on the front panel will pause the dishwasher which can be re-started again by using the start/play button.

Quiet performer

Running at a very low decibel rate, these DishDrawer™ Dishwashers do their job without making a fuss. The combination of intelligent technology and simple mechanics means greater reliability and excellent wash performance.

SPECIFICATIONS

Accessories

Contemporary round handle	Part number 81671
Cutlery basket	•
Optional handle	513545 D3 front mount fitting
Optional stainless steel door kit	81263 Door DD24ST

Capacity and Loading

Accommodates round plates	12.25"
Adjustable height, foldable	•
Fold down tines	•
Pitch adjustable tines	•
Place settings	7

Consumption

Energy star rating	•
--------------------	---



PV-154

and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

Energy usage	144kWh/year
Water usage	1.64 gal/cycle

Depth	22 1/2"
Height	17 7/8"
Width	23 9/16"

Controls	
Child lock	•
Electronic fault/Diagnostic	•
End of cycle beeps	•
Energy saving delay start	•
Internal wash selector	•
Knock to pause	•
Rinse aid indicator light	•

Warranty	
Parts and labor	Limited 2 Year Parts & Labor

Features	
Fan assisted drying	•
Flow through detergent	•
Quiet operation	•
SmartDrive™ technology	•

Wash Programs	
Delicate	•
Eco	•
Extra Dry	•
Fast	•
Heavy	•
Medium	•
Number of wash programs	15
Quick	•
Rinse	•
Sanitize	•
Wash modifiers	3

Performance	
Noise on gentle cycle top	44

Water connection	
Inlet water temperature	Max 140°F
Supplied hose to suit 3/8"	•
Water pressure	0.03 Mpa - 1 Mpa (4.3-145 psi)
SKU	81220

Power requirements	
Amperage	5A
Electric circuit	3
Rated current	15A
Supply frequency	60Hz
Supply voltage	120V

TEST The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions

Product dimensions



Other product downloads available at fisherpaykel.com



- ↓ Quick Start Guide
- ↓ User Guide
- ↓ Service & Warranty Booklet
- ↓ Guide De Démarrage Rapide
- ↓ Guide D'Utilisation
- ↓ Installation Guide
- ↓ Guide D'Installation
- ↓ Resources (zip)

A PEACE OF MIND SALE


24/7
24 Hours 7 Days a Week Customer Support
T 1.888.936.7872 www.fisherpaykel.com

④ PRODUCT DIMENSIONS

PA-154
Feb 1 2021

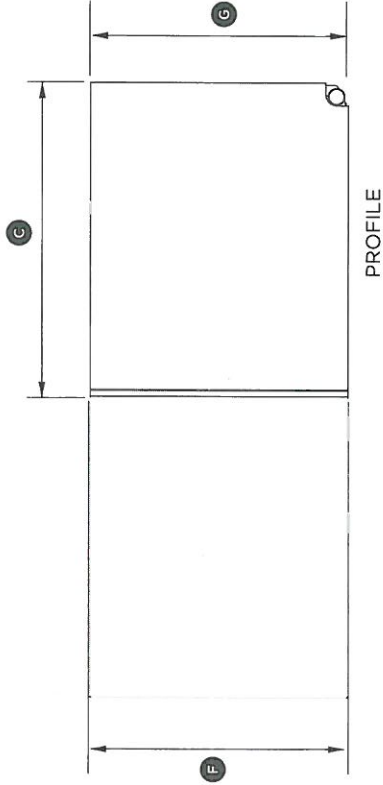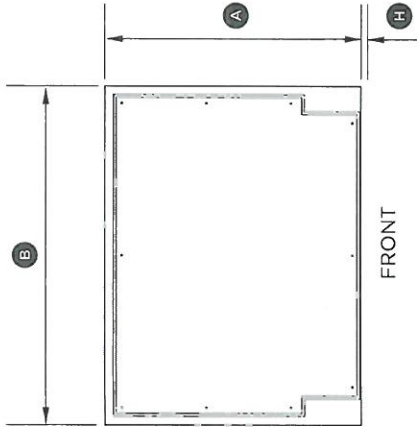


	STANDARD HEIGHT MODELS	TALL HEIGHT MODELS
	DD24SI	DD24STI DD24SHTI
PRODUCT DIMENSIONS		
	INCHES (MM)	INCHES (MM)
Ⓐ Overall height of product ¹	16 1/8" (410)	min. 17 7/8" (454)
Ⓑ Overall width of product	23 9/16" (599)	23 9/16" (599)
Ⓒ Overall depth of product ²	22 1/2" (571)	22 1/2" (571)
Ⓓ Depth of chassis (to back of front drawer panel)	21 3/4" (553)	21 3/4" (553)
Ⓔ Depth of drawer front panel	5/8" - 13/16" (16-20)	5/8" - 13/16" (16-20)
Ⓕ Height of drawer front panel	min. 16 1/16" (408) ³	min. 17 13/16" (452) ⁴
Ⓖ Height of chassis ¹	16 1/8" (410)	17 7/8" (454)
Ⓖ Ventilation gap below drawer front panel	min. 1/6" (2)	min. 1/6" (2)
Ⓙ Maximum extension of drawer ²	21 7/16" (545)	21 7/16" (545)
¹ includes 1/16" (2mm) high bracket slots ² assuming a front panel thickness of 11/16" (18mm)		
³ recommended for a 1/16" (2mm) ventilation gap below panel, if cavity height is 16 1/4" (412mm)		
⁴ recommended for a 1/16" (2mm) ventilation gap below panel		

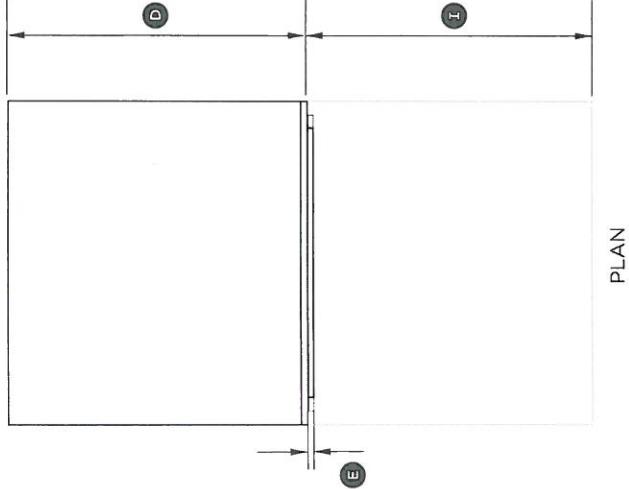

24-154



5 CABINETY DIMENSIONS

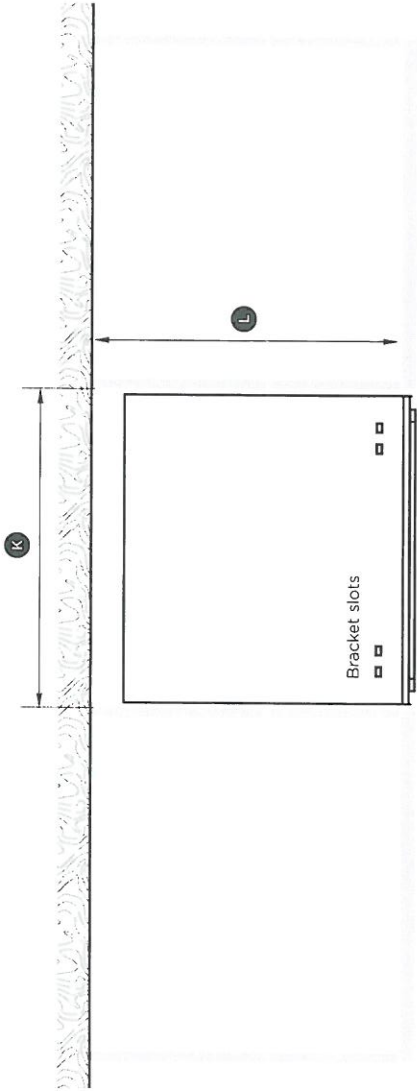


PLAN

CABINETY DIMENSIONS	STANDARD HEIGHT MODELS	TALL HEIGHT MODELS
	DD24SI	DD24STI DD24SHTI
INCHES (MM)		
J Inside height of cavity	min. 16 1/4" (412)	min. 18" (456)
K Inside width of cavity	23 5/8" (600)	23 5/8" (600)
L Inside depth of cavity	min. 22 1/16" (560)	min. 22 1/16" (560)

Minimum clearances from adjacent cabinetry

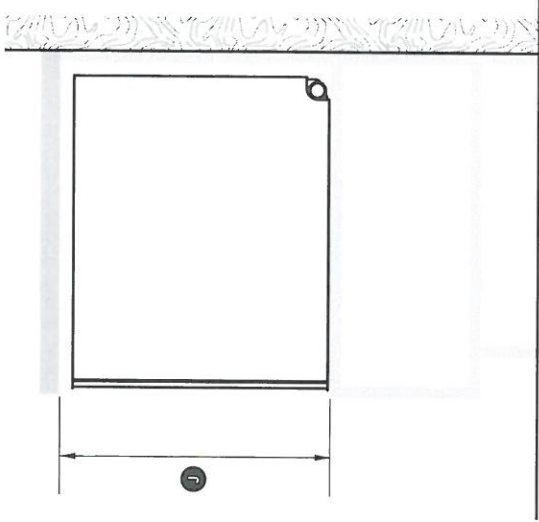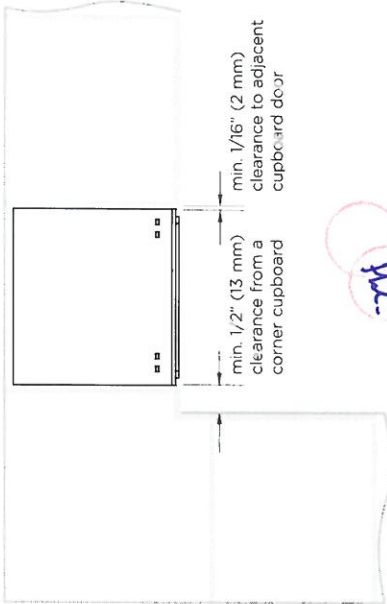

PROFILE

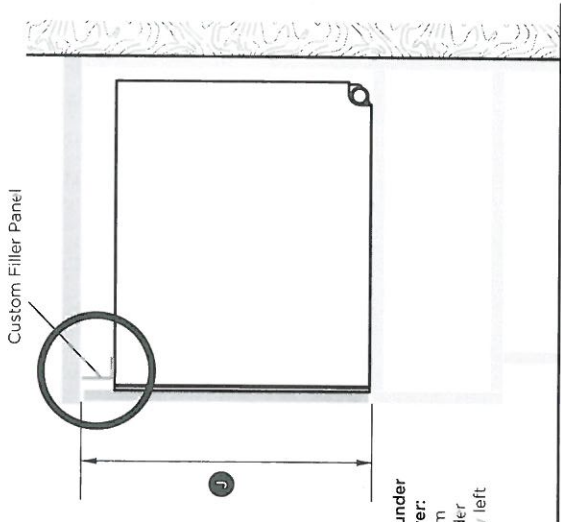

PROFILE

If your cavity height leaves a visible gap under your countertop when you open the drawer: Fit the supplied cavity bracket (or a custom cavity filler panel) before installation in order to conceal any gap at the top of the cavity left after installation.

PV-15A

6 CUSTOM DRAWER PANEL SPECIFICATIONS

FRONT PANEL MATERIAL SPECIFICATIONS

- 5/8 - 13/16" (16 - 20mm) panel thickness
- Adequately sealed to withstand moisture (122°F/50°C @ 80% RH)
Because of it being a hot and wet environment generally, the back and sides of the panel should be completely sealed with a waterproof vapour barrier (ie polyurethane) to prevent damage to the panel.
- The back of the panel (including any integrated handle) should be completely flush so that the seal between the panel and the rubber trim is maintained.
- Installation outside these specs may result in condensation on cabinetry surfaces.
- Maximum weight of panel: 20lb (9kg)

The following calculations assume the top of the upper panel is aligned with the top of the adjacent cabinetry.

WIDTH OF THE PANEL

Measure A (the width between adjacent door/drawer fronts) and write it in the first box below, then complete the equation.

A

-

2x

Clearance to adjacent cabinet front

(min. 1/16" (2mm))

WIDTH OF PANEL

=

(23 7/16"-24 3/16" (596-615mm))

HEIGHT OF THE PANEL

B


-

Ventilation Gap



(min. 1/16" (2mm))

HEIGHT OF PANEL

=

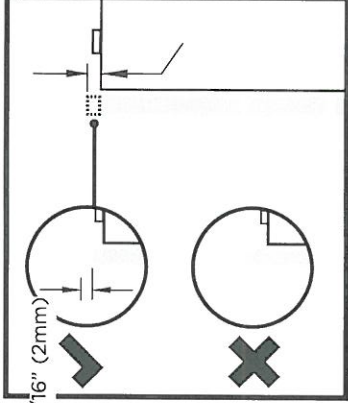

Note: when the top of the dishwasher has to be lower than the adjacent cabinetry, the top of the panel can extend above the chassis where required, however a min. 1/16" (2mm) gap to the benchtop must be maintained.

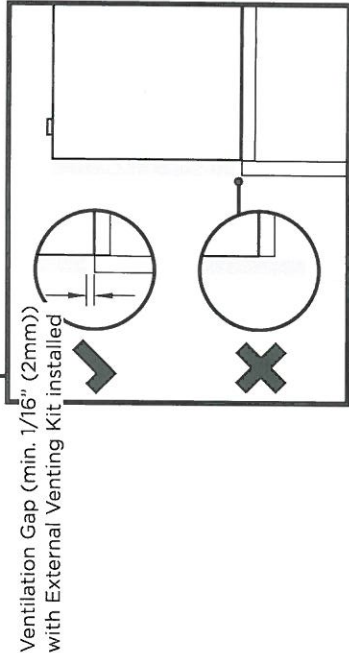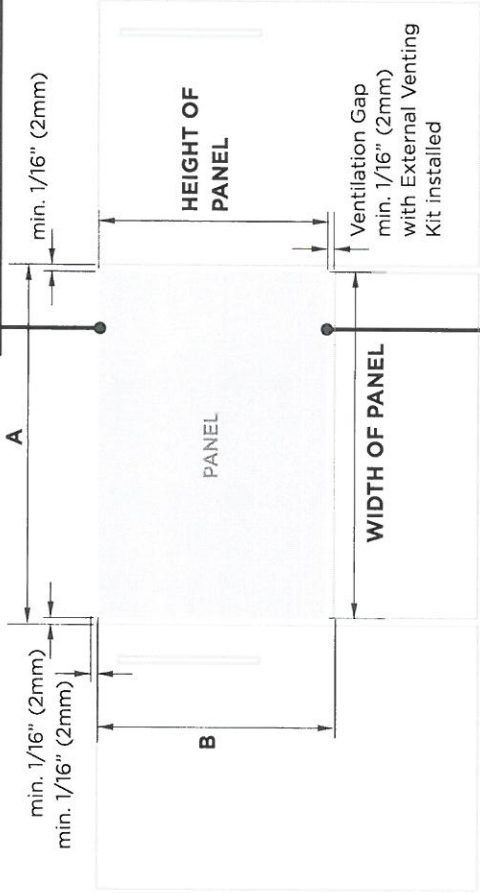


Handwritten signature and initials.

PV-154

8 PREPARATION FOR EXTERNAL VENTING THROUGH SAME CABINET



Services can be located either side of dishwasher

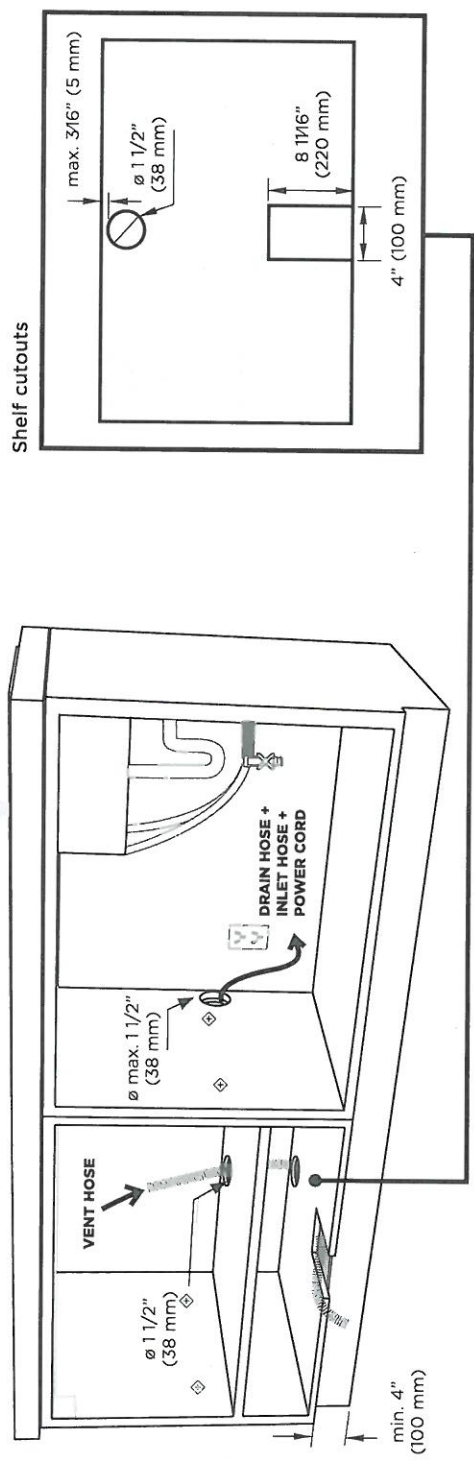


IMPORTANT!
To prevent pooling of condensation from the vent hose, a toe-kick height of no less than 4" (100 mm) is required.


Services hole

- If the hole is through wood, make sure its edges are smooth and rounded.
- If the hole is through metal, ensure you fit the supplied Edge Protector to prevent damage to the power cord.

8 PREPARATION FOR EXTERNAL VENTING THROUGH ADJACENT CABINET



The ø 2 1/4" (57 mm) services hole should be enlarged to accommodate the extra venting hose by cutting out some material from the bottom corner.

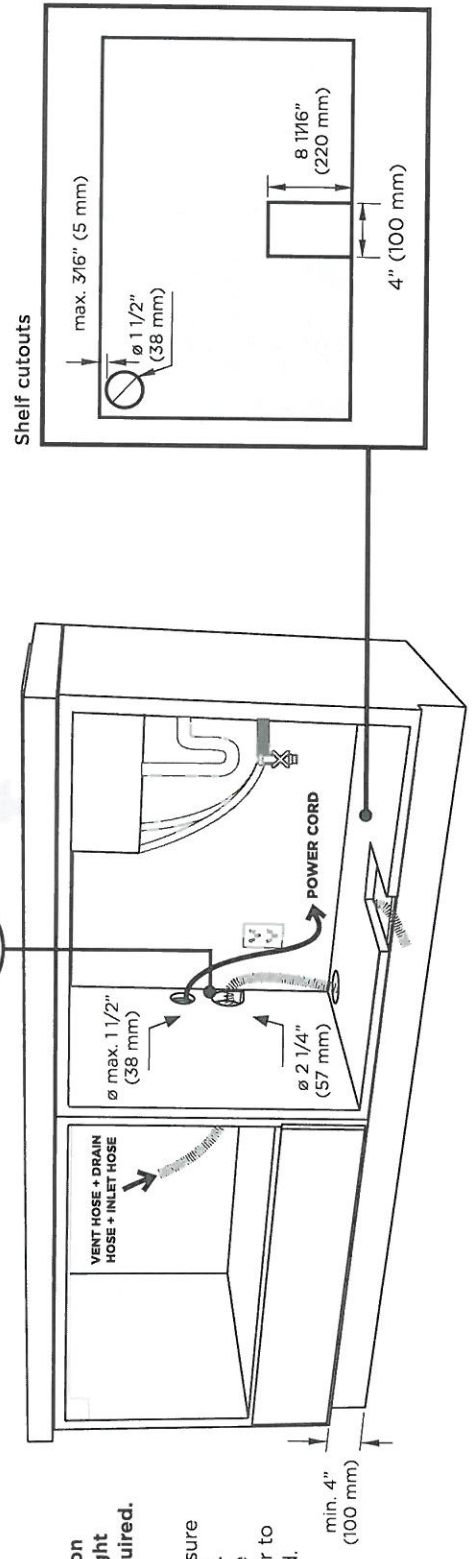

IMPORTANT!
To prevent pooling of condensation from the vent hose, a toe-kick height of no less than 4" (100 mm) is required.

Services hole

- If the hole is through wood, make sure its edges are smooth and rounded.
- If the hole is through metal, ensure you fit the supplied Edge Protector to prevent damage to the power cord.

Amc

24" TRANSITIONAL DRAWER MICROWAVE

WOLF

MD24TE/S

FEATURES

20% larger interior capacity

Classic stainless steel

Control panel lock

Installs standard or flush inset

10 power levels and sensor cooking for easy meals

"Keep Warm" mode

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

ACCESSORIES

* Air vent for flush inset installations *

Accessories available through an authorized Sub-Zero dealer.
For local dealer information, visit subzero-wolf.com/locator.



PV-154.
~~SEPT 11 2020~~

~~W~~ ~~W~~

No!

* Revised / took
out *

Nov. 16, 2020.

PRODUCT SPECIFICATIONS


Model	MD24TE/S
Dimensions	23 7/8"W x 15 1/8"H x 21 7/8"D
Weight	91 lb
Electrical Supply	120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Overall Capacity	1.2 cu ft
Power Cord Length	4 feet
Receptacle	3-prong grounding-type

ELECTRICAL


E
ELECTRICAL
SUPPLY WITHIN OPENING
OR IN ADJACENT CABINET
WITHIN REACH OF
POWER CORD

E

DIMENSIONS

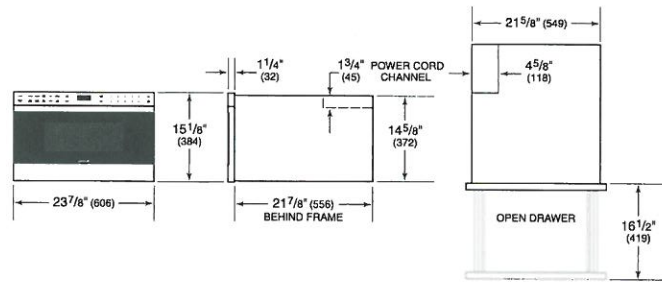

FLUSH INSTALLATION

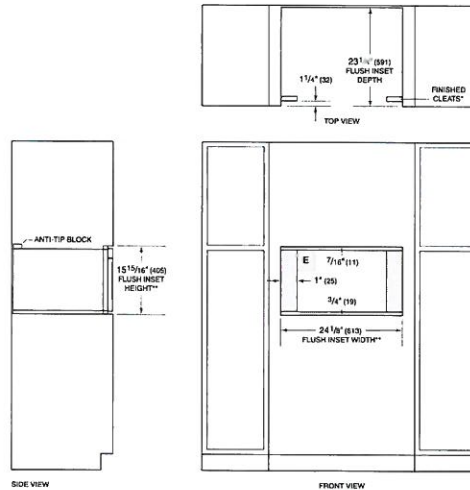

SIDE VIEW

FRONT VIEW

*W69 be visible and should be finished to match cabinetry.
**Dimension provides minimum reveals.

RV-154.
Sept 11 2020

RV-154
SEPT 11 2020

Installation Requirements

The drawer microwave oven can be installed in a standard or flush inset application. Location of the electrical supply within the oven opening may require additional cabinet depth.

Finish the edges of the opening. They may be visible when the drawer is open.

For standard installations, face trim will overlap stiles and rails. Refer to the chart below.

For flush inset installations, a minimum $\frac{1}{8}$ " (3) reveal is required on the top and sides and $\frac{1}{16}$ " (18) on the bottom. To ensure consistent reveals, each corner of the opening must be exactly 90°. A sales accessory is required to direct air away from the unit. Accessories are available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.

ANTI-TIP BLOCKING

To reduce the risk of tipping, the drawer microwave oven must be secured in place by anti-tip blocking. The anti-tip blocking must be provided by the installer. Dimensions will vary with the installation. Refer to the illustrations on the following pages.

INSTALLATION REQUIREMENTS

BASE SUPPORT		MIN
24" Model		125 lb (57 kg)
30" Model		125 lb (57 kg)
TRIM OVERLAP		
	24" MODEL	30" MODEL
Top	$\frac{5}{16}$ " (8)	$\frac{5}{16}$ " (8)
Bottom	$\frac{1}{16}$ " (2)	$\frac{1}{16}$ " (2)
Sides	$\frac{7}{8}$ " (22)	$\frac{3}{4}$ " (18)

Electrical

Installation must comply with all applicable electrical codes.

Locate the electrical supply as shown in the illustrations on the following pages. The receptacle may also be located in an adjacent cabinet within reach of the power cord. A separate circuit, servicing only this appliance is required. A ground fault circuit interrupter (GFCI) is not recommended and may cause interruption of operation. Refer to the illustration below for minimum power cord plug clearance.

⚠ WARNING


ELECTRICAL SHOCK HAZARD: Plug into a grounded 3-prong outlet. Do not remove ground prong. Do not use an adapter or extension cord. If the power cord is too short, have a qualified electrician or service technician install an outlet near the appliance. Failure to follow these instructions can result in electric shock, fire or death.

ELECTRICAL REQUIREMENTS


Electrical Supply	grounded, 120 VAC, 60 Hz
Service	15 amp dedicated circuit
Receptacle	3-prong grounding-type
Power Cord	4' (1.2 m)

GROUNDING INSTRUCTIONS

This appliance must be grounded. The microwave oven is equipped with a cord having a grounding wire with a grounding plug. It must be plugged into a wall receptacle that is properly installed and grounded in accordance with the National Electrical Code and local codes and ordinances. In the event of an electrical short circuit, grounding reduces risk of electric shock by providing an escape wire for the electric current.



Power cord clearance.




Rating plate location.

SPECIFICATIONS

Drawer Microwave Oven
STANDARD INSTALLATION

~~PN-154~~
~~SEPT 11 2020~~

Me. or

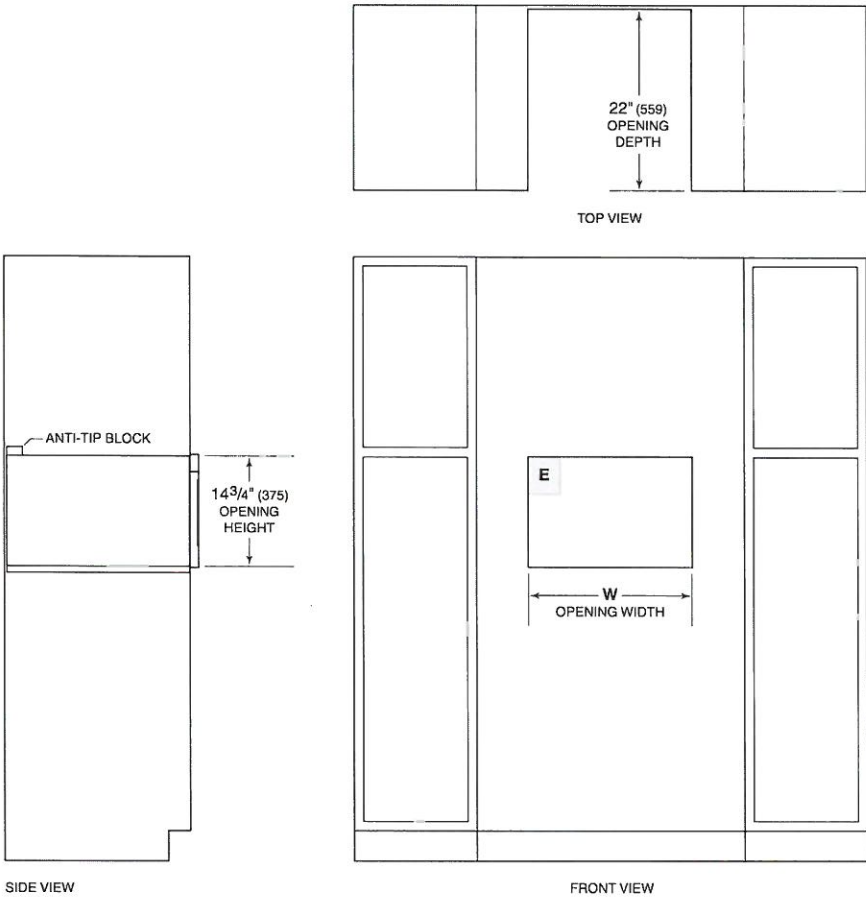



NOTE: All drawer microwave ovens require the same opening dimensions.

OPENING WIDTH	W
24" Model	22 1/8" (562)
30" Model	22 1/8" (562)


SPECIFICATIONS

Drawer Microwave Oven FLUSH INSET INSTALLATION

~~PV-154.
SEPT 11 2020~~

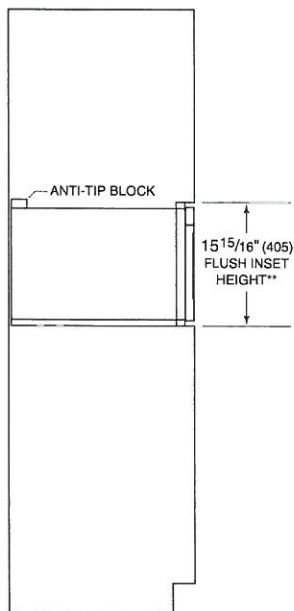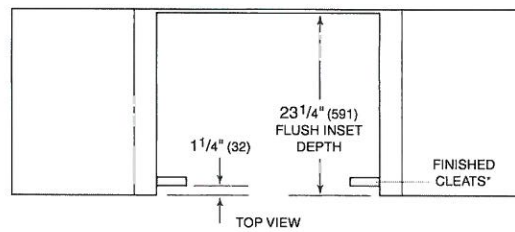

SIDE VIEW

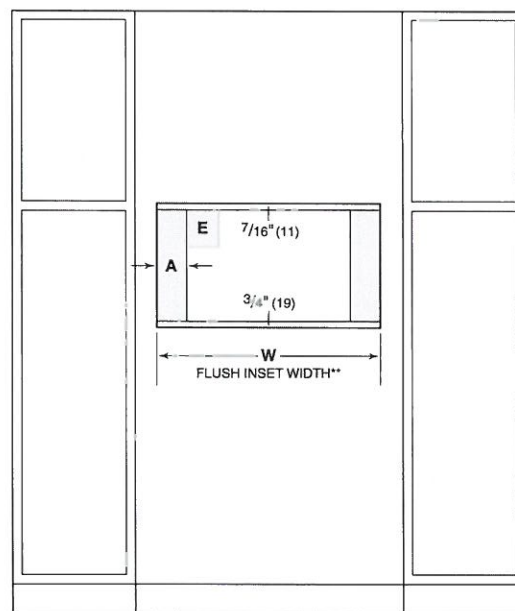

FRONT VIEW

*Will be visible and should be finished to match cabinetry.
**Dimension provides minimum reveals.

FLUSH INSET WIDTH	W	A
24" Model	$24\frac{1}{8}"$ (613)	1" (25)
30" Model	$30\frac{1}{8}"$ (765)	4" (102)