

GOLDPARK

WORTH MORE™

CONSTRUCTION SUMMARY

Lot: 11

Model: 42.04 A BROOKVALLEY

Project/Phase: Pine Valley Forevergreen / 1

APPLIANCES

Invoice	Qty.	Description
2526  01Feb21 NoCat	1	APPLIANCE SPECIFICATIONS ATTACHED - SIGNED COPY

CERAMIC

Invoice	Qty.	Description
2423  25Aug20 NoCat	1	.MASTER ENSUITE: SHOWER POT LIGHT: 6" RECESSED SHOWER POT LIGHT - SAME SWITCH AS STANDARD SHOWER LIGHT - - [RELOCATE STANDARD + ADD THIS ONE TO BE CENTERED IN SHOWER WITH RAIN SHOWER HEAD IN APPROX CENTER]
2423  25Aug20 NoCat	1	.MASTER ENSUITE: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN FOR PREFERRED LOCATION
2423  25Aug20 NoCat	1	.ENSUITE 2: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN FOR PREFERRED LOCATION
2423  25Aug20 NoCat	1	.SHARED ENSUITE: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN FOR PREFERRED LOCATION
2526 37 01Feb21	1	FRONT FOYER: TILE, FLOOR, - LEVEL 5 - 12"x24" LAID IN STRAIGHT STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
2526 37 01Feb21	1	POWDER ROOM: TILE, FLOOR - LEVEL 5 - 12"x24" LAID IN STRAIGHT STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
2526 37 01Feb21	1	MUD ROOM: TILE, FLOOR - LEVEL 5 - 12"x24" LAID IN STRAIGHT STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
2526 32 01Feb21	1	SHARED BATH: TILE, FLOOR - LEVEL 3 - 12"x24" LAID IN STRAIGHT STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
2526 48 01Feb21	1	SHARED BATH: TILE, WALL - LEVEL 3 - 12"x24" LAID IN VERTICAL STACKED PATTERN
2526 35 01Feb21	1	ENSUITE 2: TILE, FLOOR - LEVEL 3 - 12"x24" - LAID IN STRAIGHT STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
2526 48 01Feb21	1	ENSUITE 2: TILE, WALL - LEVEL 3 - 12"x24" LAID IN VERTICAL STACKED PATTERN

DisciplineMS.rpt 26jun20

Page 1 of 13  
Printed and Sent: 01-Feb-21



CROWN MOULDING		
Invoice	Qty.	Description
2423  25Aug20 NoCat	1	.DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED
2423  25Aug20 NoCat	1	.LIBRARY - OPT. COFFERED CEILING AS PER PLAN
2423  25Aug20 NoCat	1	.LIBRARY - OPT. WAFFLE CEILING, BEAM DETAIL AS PER PLAN ( 4 BOXES) OPTION #1 CTR-B07
2423  25Aug20 NoCat	1	.MASTER BEDROOM - OPT. 10 FOOT TRAY CEILING AS PER PLAN
2423  25Aug20 NoCat	1	.BREAKFAST - OPT. COFFERED CEILING - AS PER PLAN
2423  25Aug20 NoCat	1	.GREAT ROOM - OPT. COFFERED CEILING AS PER PLAN
2423  25Aug20 NoCat	1	.GREAT ROOM - OPT. WAFFLE CEILING, BEAM DETAIL AS PER PLAN ( 15 BOXES) OPTION #1 CTR-B07

























ROOM	DESCRIPTION	PRICE	QTY	TOTAL
KITCHEN	UPGRADE FROM SERIES 2 TO SERIES 5 - <b>MEDIO 6 OYSTER</b>		1	
	UPGRADE ISLAND FROM SERIES 2 TO SERIES 5 - <b>MEDIO 6 OYSTER</b>		1	
	ADD DECORATIVE PANELS FOR FRIDGE / FREEZER		1	
	ADD DECORATIVE PANEL FOR DISHWASHER		1	
	CONVERT BASE CABINET TO BASE POTS AND PANS		2	
	RETURN TRIP FOR HARDWOOD IN KITCHEN		1	
	PROUD CAMDEN FURNITURE KICK AT BACK OF ISLAND		1	
	ADJUST CABINETY FOR 36" RANGE (N/C)			
	ADD VALANCE		1	
	CONVERT UPPER AND BASE CABINET INTO TALL DEEP BUILT IN OVEN UNIT W/ 3/4" EXT BOTTOM DRAWER		1	
	2 BIN RECYCLING CENTRE IN ISLAND		1	
	ADD CABINET ABOVE HOOD FAN		1	
POWDER ROOM	UPGRADE FROM SERIES 2 TO SERIES 5 - <b>MEDIO 6 OYSTER</b>		1	
SHARED BATH	ADD ADDITIONAL BANK OF 4 DRAWERS		1	
ENSUITE 2	ADD ADDITIONAL BANK OF 4 DRAWERS		2	
MASTER ENSUITE	UPGRADE *VANITY ONLY* FROM SERIES 2 TO SERIES 5 - <b>MANHATTAN ARGENTA ZEBRANO</b>		1	
	COSMETIC COUNTER CABINET - <b>CHESAPEAKE CLASSIC WHITE</b>		1	
CABINETRY TOTAL:				

LOT #: PV-11	DATE: Jan 29, 2021.
SIGNATURE: 	
SIGNATURE: 	

Scheduled Closing Date: Thursday, May 13, 2021

Purchasers: LAKIS GRAPSAS & HRISOULA GRAPSAS Property: 11 of Plan -
Telephone Res. / Bus: / (416) 892-9675 Project: Pine Valley Forevergreen - Phase 1
Decor Advisor: Yolande Somerville Model and Elevation: 42.04 A BROOKVALLEY

Layout Changes: Yes No Sketch Attached: Yes No Exterior Colour Scheme:

1. Cabinetry

	Style and Colour	Counter	Hardware
Kitchen / Breakfast	*Medio 6 'Oyster'	*Quartz: Statuario Maximus	attached
Laundry Room	Chesapeake 'Classic White'	P-Lam: White	attached
Powder Room	Medio 6 'Oyster'	*Quartz: Rugged Concrete	attached
Mud Room	Chesapeake 'Classic White'	P-Lam: White	attached
Master Ensuite Bathroom	*Manhattan 'Argenta Zebrano'	*Quartz N-Boost Marengo	attached
Second Ensuite Bathroom (If Applicable)	Chesapeake 'Classic White'	*Quartz: Sleek Concrete	attached
Shared Ensuite	Chesapeake 'Classic White'	*Quartz: Sleek Concrete	attached

Comment

\*\*MASTER BEDROOM COSMETIC CABINET: Chesapeake 'Classic White' + \*Quartz: Blizzard

2. Floor Tile

	Selection
Entrance Vestibule	*12x24" Overlay 'Smoke'
Main Hall	
Kitchen / Breakfast	hardwood
Laundry Room	*12x24" Carrara X 'Matte White'
Powder Room	*12x24" Overlay 'Smoke'
Mud Room	*12x24" Overlay 'Smoke'
Master Ensuite Bathroom	*12x24" Overlay 'Smoke'
Second Ensuite Bathroom (If Applicable)	*12x24" Carrara X 'Matte White'
Lower Landing (If Applicable)	13x13" Sempre 'White'
Shared Ensuite	*12x24" Regal matte 'Charcoal Black'

Comment

Shared Ensuite Shower Floor: \*2" Hex ' Dk grey matte // Master Ensuite: \*2" Hex Quebec matte black

3. Wall Tile

	Selection	Listello/Inserts	Describe
Master Ensuite Bathroom		<input type="radio"/> Yes <input checked="" type="radio"/> No	
Tub Deck		<input type="radio"/> Yes <input checked="" type="radio"/> No	
Shower Stall	*12x24" Overlay 'Smoke'	<input type="radio"/> Yes <input checked="" type="radio"/> No	
Bathroom Walls		<input type="radio"/> Yes <input checked="" type="radio"/> No	
Second Ensuite Bathroom (If Applicable)	*12x24" Carrara X mt 'White'	<input type="radio"/> Yes <input checked="" type="radio"/> No	
Shared Ensuite	*12x24" Regal mt 'Charcoal Black'	<input type="radio"/> Yes <input checked="" type="radio"/> No	
Kitchen Backsplash	<input checked="" type="radio"/> Yes <input type="radio"/> No	Backsplash Behind Fridge	
Comment	FHBS same as counter		

Handwritten signatures and initials.

Purchasers:

LAKIS GRAPSAS & HRISOULA GRAPSAS

Property: 11 of Plan -

Telephone Res. / Bus:

/ (416) 892-9675

Project: Pine Valley Forevergreen - Phase 1

Decor Advisor:

Yolande Somerville

Model and Elevation: 42.04 A BROOKVALLEY

4. Plumbing Fixtures

Second Ensuite

Powder Room

Master Ensuite Bathroom

Other Room - Specify

Other Washroom

Comment

Standard except kitchen + Master ensuite

5. Hardwood Flooring

Type and Stain

Main Hall

Kitchen / Breakfast

\*3/4x5" Wht oak Sculpted 'Apollo'

Living Room

Dining Room

Family Room

Den/Library

Entrance Vestibule

Lower Landing (If Applicable)

Type and Stain

Upper Landing

Upper Hall

Master Bedroom

Bedroom #2

Bedroom #3

Bedroom #4

Bedroom #5

Other Room - Specify

Thru out standard areas

\*3/4x5" Wht oak Sculpted 'Apollo'

Comment

Stairs and landings will not match in colour/texture/species

6. Carpeting

Upgrade

☐

Description

Ground Floor

☐

Second Floor

☐

☐

Type

Area

Upgrade Underpad

Capped

Runner - \*Upgrade

Carpet on Stairs

Comment

7. Fireplace

Living Room

Purchased

As Per Plan

N/A

☐
☐
☒

Family Room

Purchased

As Per Plan

N/A

☐
☒
☐

Other Room - Specify

Purchased

As Per Plan

N/A

☐
☐
☒

Fireplace Type

Mantle Type

Colour / Stain

Surround

Hearth

Standard Gas

Mediterranean

Arctic White

n/a

none

Comment




Purchasers: LAKIS GRAPSAS & HRISOULA GRAPSAS
Telephone Res. / Bus: / (416) 892-9675
Decor Advisor: Yolande Somerville

Property: 11 of Plan -
Project: Pine Valley Forevergreen - Phase 1
Model and Elevation: 42.04 A BROOKVALLEY

8. Trim Carpentry

Interior Doors
\*Lincoln Park

Front Door Glass Inserts
Standard

Door Handles
\*Halifax blk + hng

Interior Trim
\*Board 4

Comment

9. Plaster Mouldings and Medallions

Standard Throughout
☐ Yes
☐ No
☒ N/A

Entrance Vestibule
Main Hall
Living Room
Dining Room
Family Room

Kitchen/Breakfast
Den/Library
Lower Landing
Other Room - Specify

Comment

10. Railings and Spindles

Railing Package
\*A-2 package

Railing Colour
\*Mirage 'Hopscotch'

Stringer / Riser
\*Mirage 'Hopscotch'

Spindle Colour
\*Black

Treads
\*Mirage 'Hopscotch'

Oak Stairs
☒ Yes
☐ No
☐ N/A

Comment

11. Wall Paint / Ceilings

Throughout Finished Areas
Cool White

Trim Paint
White

Smooth Ceilings

Ground Floor
☒

Second Floor
☒

Note

Comment




Scheduled Closing Date: Thursday, May 13, 2021

Purchasers: LAKIS GRAPSAS & HRISOULA GRAPSAS

Property: 11 of Plan -

Telephone Res. / Bus: / (416) 892-9675

Project: Pine Valley Forevergreen - Phase 1

Decor Advisor: Yolande Somerville

Model and Elevation: 42.04 A BROOKVALLEY

## 12. Electrical

Hood Fan ☐ White ☒ Stainless ☐ N/A

Above Kitchen Cabinet Light ☐ Yes ☒ No

Below Kitchen Cabinet Light ☒ Yes ☐ No

Standard Appliances ☐

Over The Range Microwave ☐

Chimney Style Fan ☐

Comment

## 13. Heating and Air Conditioning

Air Conditioning

Gas Provisions Stove

Gas Provisions Dryer

Gas Provisions Barbecue

Comment

## 14. Additional Comments

## 15. Disclaimers and Notes

- 1) Colours of all materials are as close as possible to builder's selection, but not necessarily identical due to variances in manufacturing.
- 2) Any extras listed above are null and void unless accompanied by a separate invoice/amendment. Said invoice must be paid in full.
- 3) The Purchaser acknowledges that after Interior Colour Selection form is signed and dated, no further changes will be permitted other than re-selection due to unavailability. \_\_\_\_\_ Purchaser's Initials
- 4) The Purchaser acknowledges reading and accepting the "Gold Park Homes Decor Centre Disclaimers" form. This document contains other miscellaneous disclaimers.

This Interior Colour Selection is final and approved by:

Signature:  Date: Jan 28, 2021

PV-11 Grout Schedule

ROOM	LOCATION	COLOUR
MASTER ENSUITE	SHOWER FLOOR	CHARCOAL
SHARED ENSUITE	FLOOR	CHARCOAL
	SHOWER FLOOR	CHARCOAL
	WALL	CHARCOAL

LOT #:

PV-11

DATE:

Jan 29, 2021.

SIGNATURE:



SIGNATURE:



Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4204



SCHEDULE 'F'

PV-11

August 13 2020

\* REVISED \*

September 1, 2020.

PV-11

Jan 29, 2021

See attach.


See attach.

# The Brookvalley

## 42' SERIES

Elevation A • 3,665 sq.ft.

Elevation B • 3,705 sq.ft.

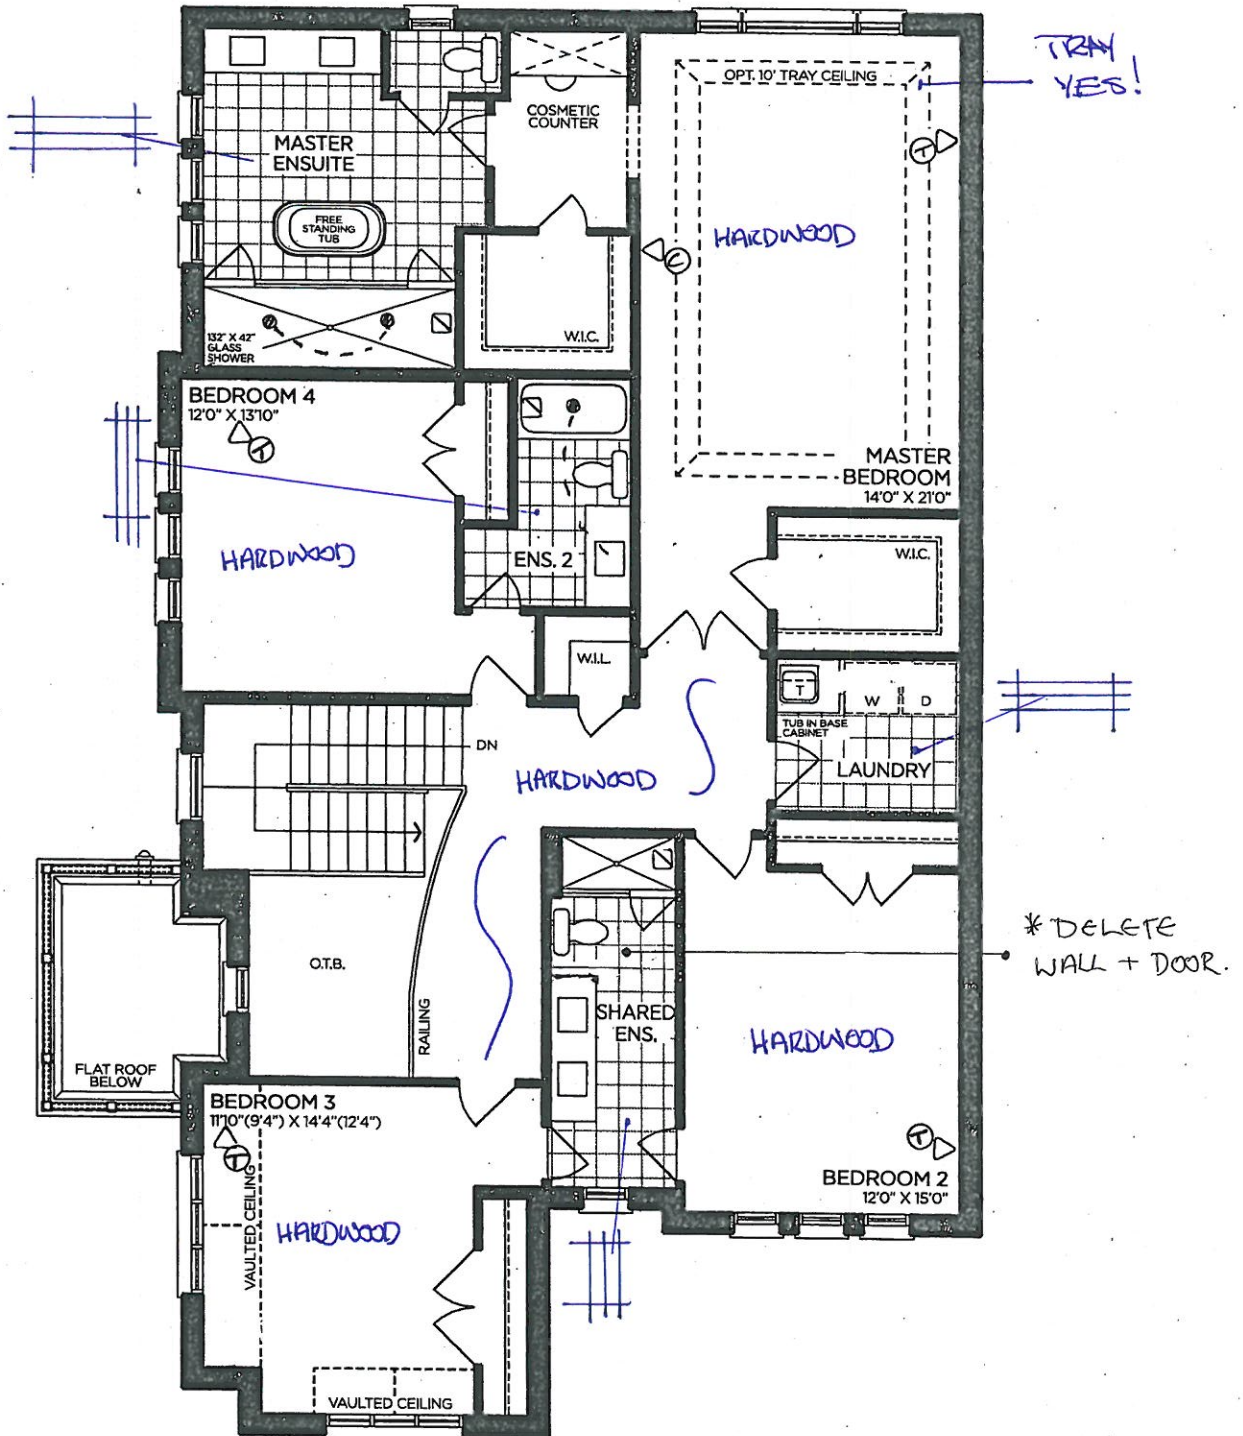

SECOND FLOOR | ELEV. A

VENDOR	
PURCHASER	
PURCHASER	

**GOLDPARK**  
WORTH MORE™

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4204

SCHEDULE 'F'




PV-11  
August 13 2020  
\* September 1, 2020  
PV-11  
Jan 29, 2021

See attach.  
See attach.

# The Brookvalley

## 42' SERIES

→ Elevation A • 3,665 sq.ft.  
Elevation B • 3,705 sq.ft.

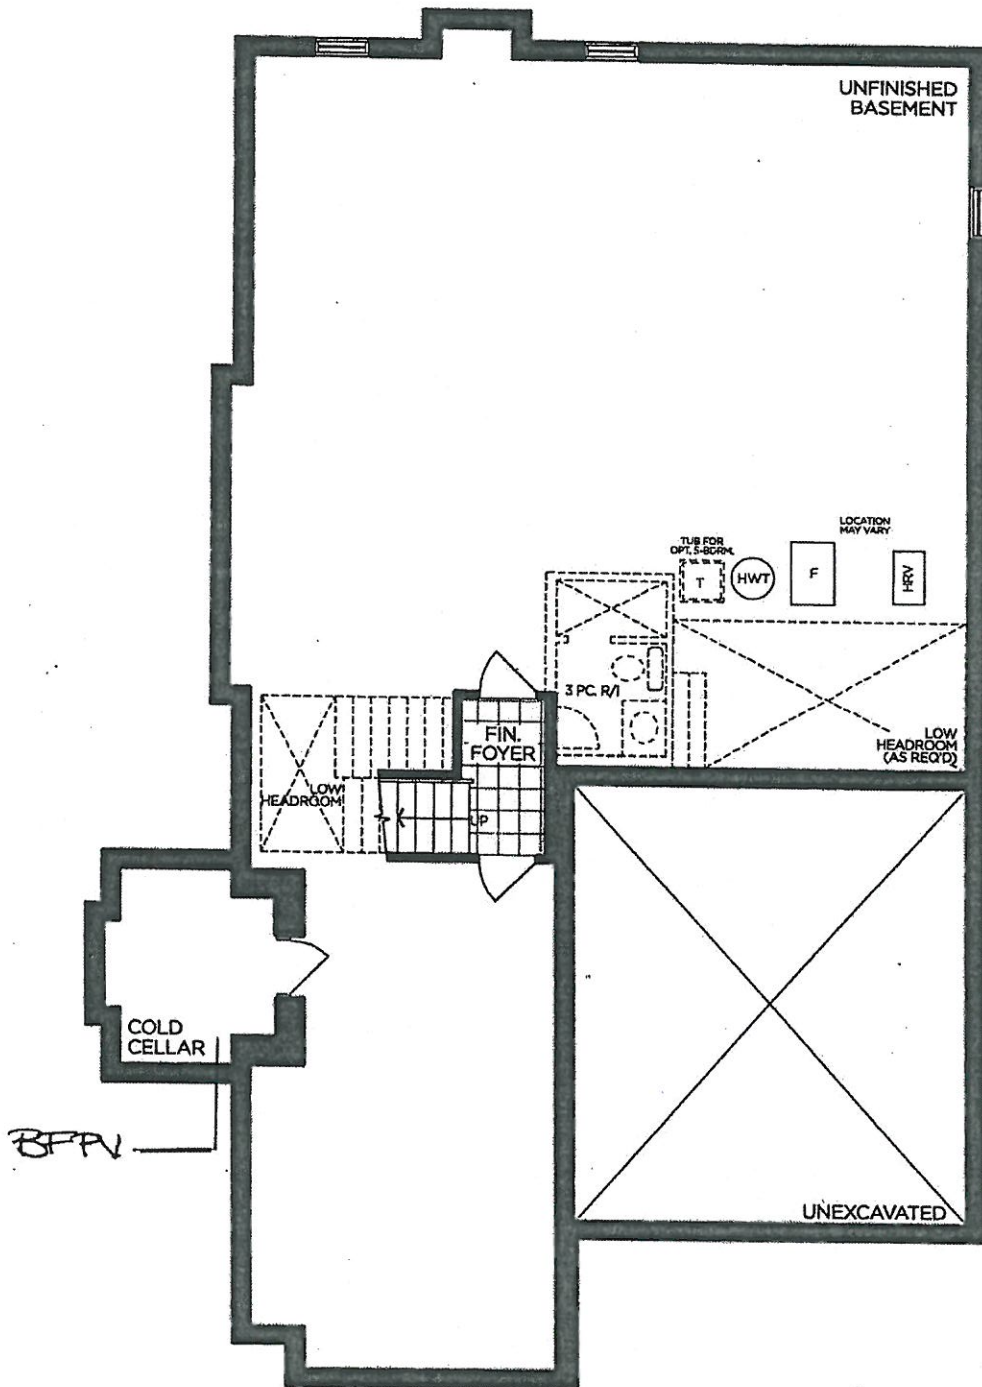

BASEMENT | ELEV. A

VENDOR   
PURCHASER   
PURCHASER


### GOLDPARK

WORTH MORE™


Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4204




Chesapeake 'Classic White'  
K002-05

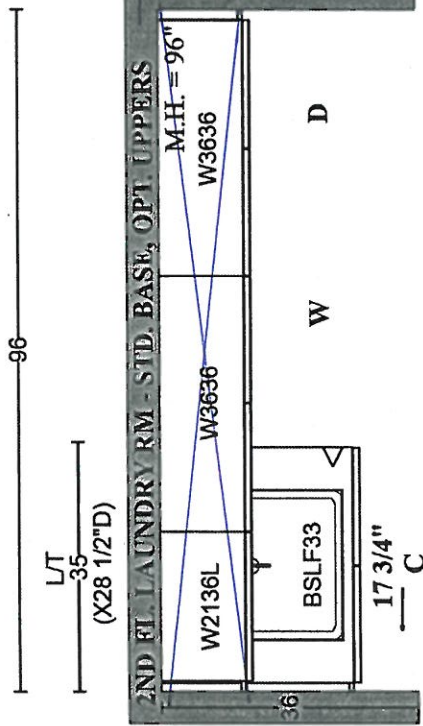

Chesapeake 'Classic White'  
K002-05

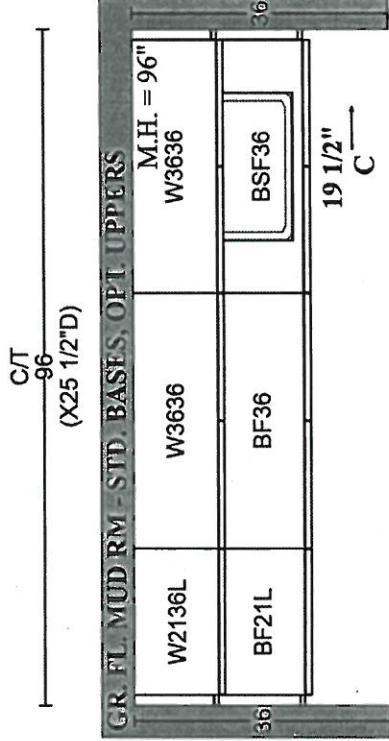


Medio 6 'Oyster'  
K002-05




PV-11  
Jan 29, 2021

**GOLDPARK HOMES  
PINE VALLEY  
VAUGHAN, ONTARIO  
MODEL: (4204) BROOKVALEY**


SITE STANDARD: WHITE 3/4" EXTENSION  
SOFT-CLOSE DRAWERS WITH STANDARD SLAM DOOR HINGES  
ONE TOP DRAWER WHERE POSSIBLE THROUGHOUT EACH  
VANITY, ONE BANK OF DRAWERS WHERE POSSIBLE  
THROUGHOUT EACH MASTER ENSUITE VANITY

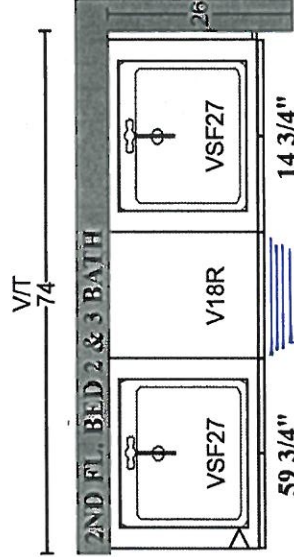


Chesapeake 'Classic White'  
K002-04

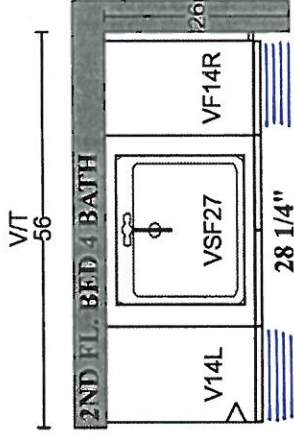

Chesapeake 'Classic White'  
K002-05

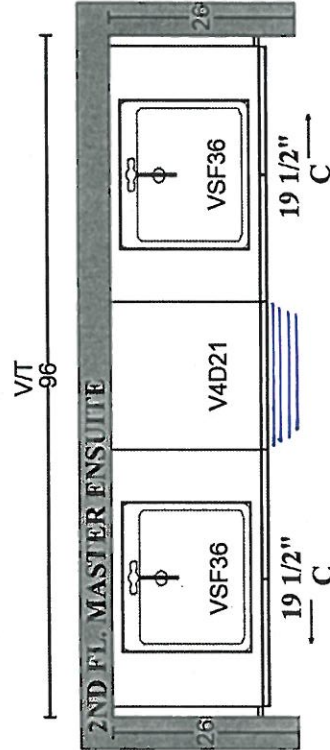

Manhattan 'Argentina Zebrano'  
\*No hardware

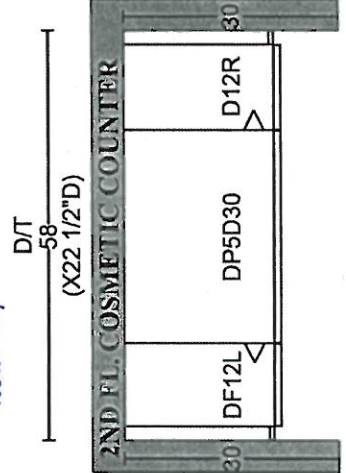

Chesapeake 'Classic White'  
\*No hardware



PINE VALLEY  
FOREVERGREEN

STONE COUNTERTOP EDGE PROFILES



STANDARD 2CM EASED EDGE

LOCATION:

THRU-OUT





UPGRADE 3CM EASED EDGE

LOCATION:



UPGRADE 4CM MITRED EDGE

LOCATION:



UPGRADE 2CM OGEE EDGE

LOCATION:

LOT #: PV-11

DATE: Jan 29, 2021.

SIGNATURE:

SIGNATURE:

STANDARD HARDWARE / KNOBS

☐

K002-02

☐

K002-03

☐

K002-04

☒

K002-06

→ shared ensuite

☒

K002-05

\* Ensuite Z  
\* Laundry Room  
\* Mud Room  
\* Powder Room

☐

K002-14

☐

K024-03

☒

\*NO HARDWARE

\* Kitchen  
\* Master Ensuite + cosmetic counter

LOT #

PT-11

DATE:

Jan 29, 2021

SIGNATURE:

SIGNATURE:




PINE VALLEY  
FOREVERGREEN

## UPGRADE KITCHEN FAUCET

MOEN - NIO

One-Handle Pulldown Kitchen Faucet

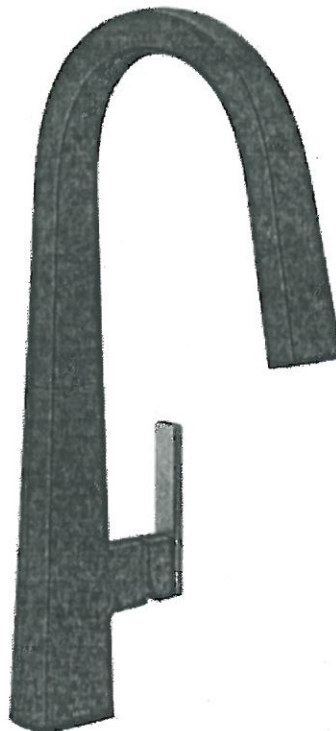

- ☐ CHROME
- ☒ MATTE BLACK / BRUSHED GOLD (BL) → with Black handle .
- ☐ SPOT RESIST STAINLESS (SRS)

MODEL: S75005 Chrome / S75005BL Matte Black / S75005SRS Spot Resist Stainless

Lot# 7V-11	Date: Jan 29, 2021	Room: Kitchen
Signature:		
Signature:		

GOLDPARK  
WORTH MORE




PINE VALLEY  
FOREVERGREEN

## UPGRADE KITCHEN SINK

### BLANCO - PRECIS U SUPER SINGLE


Silgranit - Undermount Sink  
32" x 19" x 9 1/2"

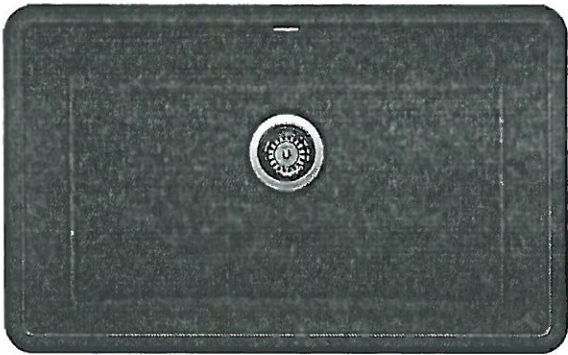

Anthracite



Concrete Grey

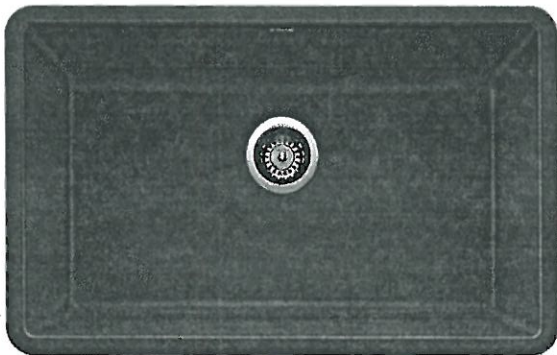

Metallic Grey



White

☒ ANTHRACITE

☐ CONCRETE GREY

☐ METALLIC GREY

☐ WHITE

MODEL 400890 Anthracite / 402266 Concrete Grey / 401683 Metallic Grey /  
401820 White

Lot# PV-11

Room: Kitchen

Signature:

Date: Jan 29, 2021

Signature:

GOLDPARK  
WORTH MORE™




PINE VALLEY  
FOREVERGREEN

UPGRADE KITCHEN EXTRA

MOEN - MODERN

Pot Filler

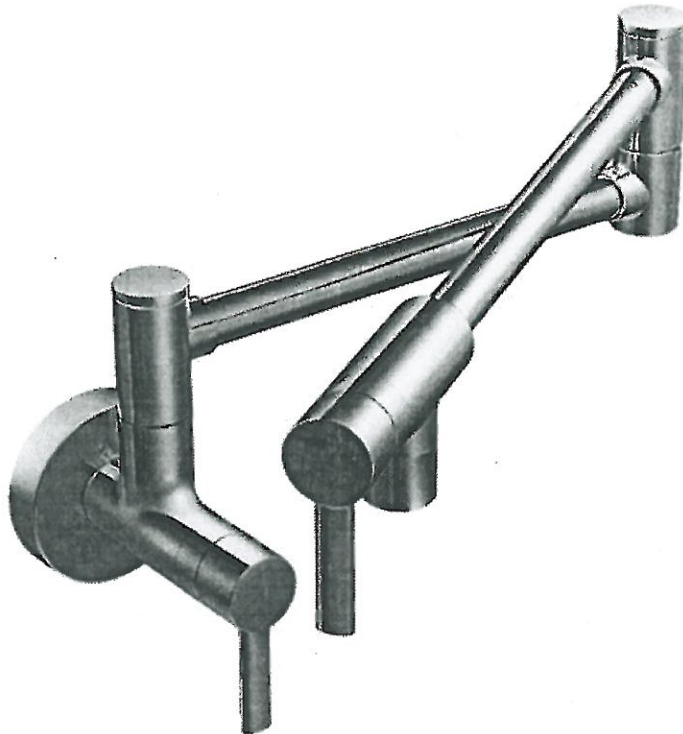

- ☐ CHROME
- ☐ STAINLESS (SRS)
- ☐ POLISHED NICKEL (NL)
- ☒ MATTE BLACK (BL)
- ☐ BRUSHED GOLD (BG)

MODEL: S665 Pot Filler

Lot# <i>PV-11</i>	Date: <i>Jan 29, 2021</i>	Room: <i>Kitchen</i>
Signature:		
Signature:		



UPGRADE VANITY SINK

EMERY  
RECTANGULAR UNDERMOUNT SINK

- ☐ 4220CGY

Undermount Sink, Soft White
- ☒ 4220CGY-077

Undermount Sink, Matte Black
- ☐ 4220CGY-088

Undermount Sink, Slate Grey

**PRODUCT SPECS:**

- Vitreous china
- Front overflow hole
- 8¼" Bowl depth
- Template and mounting hardware supplied

**DIMENSIONS:**

**Outer:**  
545mm W x 355mm D x 210mm H  
21½" W x 14" D x 8¼" H

**Inner:**  
495mm W x 305mm D x 160mm H  
19½" W x 12" D x 6¼" H


**COMPLIANCE CERTIFICATIONS**

Meets or exceeds the following:

- IAPMO cUPC
- ASME A112.19.2 / CSA B45.1

**SHIPPING**


Cube 1.85  
GW 20 lbs

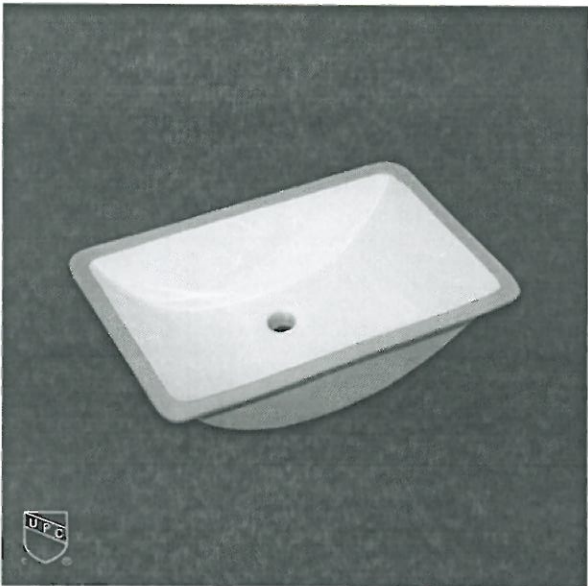


TO BE SPECIFIED

- Colour:
- ☐ Soft White
  - ☒ Matte Black
  - ☐ Slate Grey


**NOTES:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

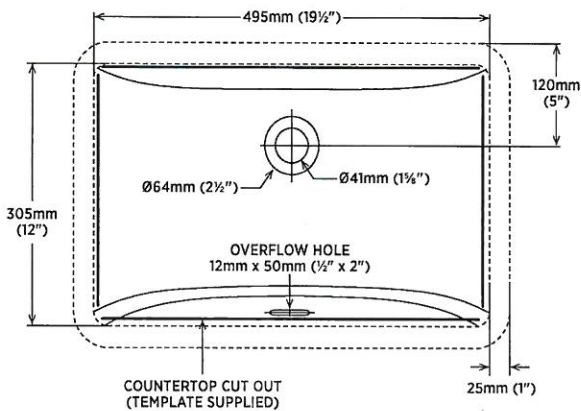

DETAIL OF MOUNTING CLIP



**Note:**  
▲ Dimensions shown for location of supplies and "P" trap are suggested.

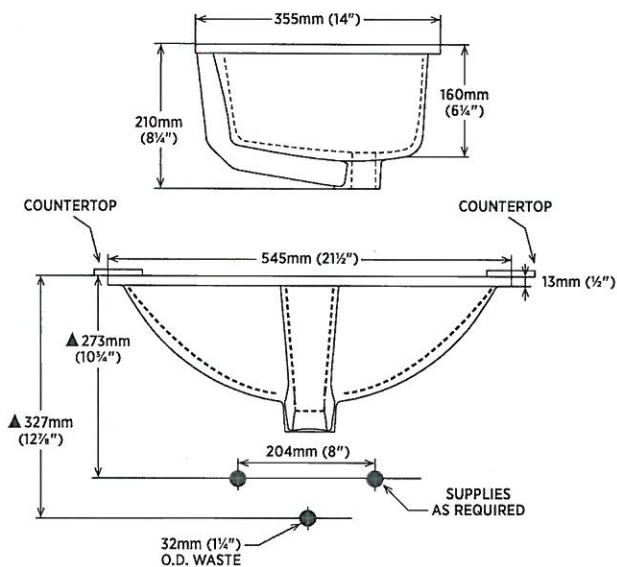

Lot# PV-11	Date: Jan 29, 2021	Room: Master Ensuite (x2)
---------------	-----------------------	------------------------------

Signature:


Signature:

UPGRADE SHOWER HARDWARE



SQ6X6

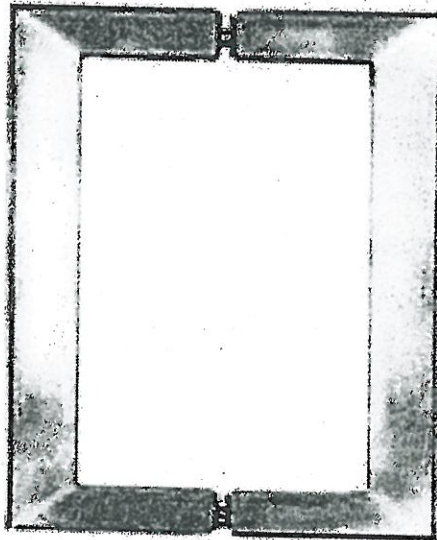

Shower Door Handle



SQ6X6  
Shower Door Handle

6" x 6" back-to-back  
3/4" square tube  
(Also available single sided)


- ☒ CHROME - Shared Ensuite + Master Ensuite (x2)  
☐ MATTE BLACK

Lot# PV-11	Date: Jan 29, 2021	Room: * See above *
Signature: 		
Signature: 		


## BATHROOM ACCESSORIES



PINE VALLEY  
FOREVERGREEN

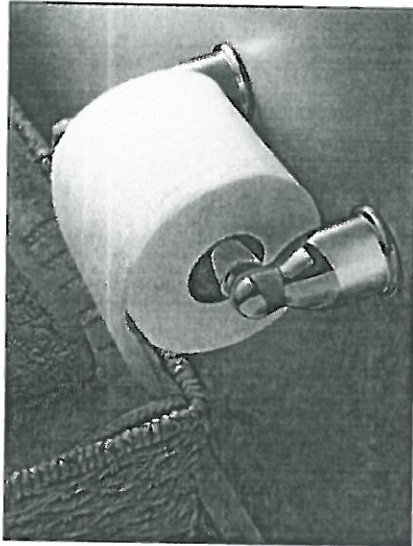

Tissue Holder  
Mason - Chrome

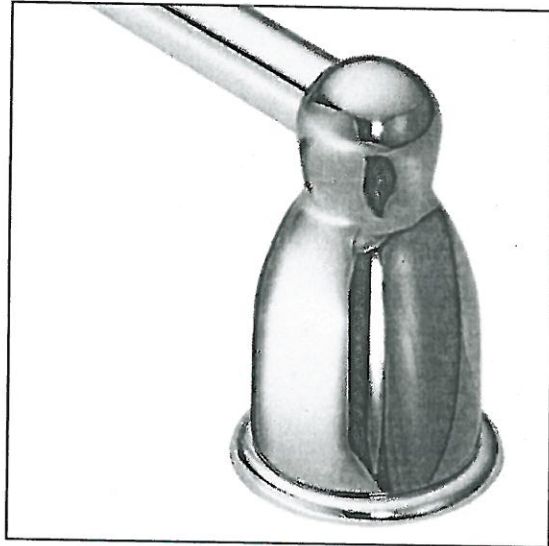

Towel Bar  
Mason - Chrome

**Please select one of the following:**

☐ INSTALL STANDARD BATHROOM ACCESSORIES THRU OUT  
(tissue holder + towel bar) *\*location as per vendors discretion\**

☒ **\*DO NOT\*** INSTALL STANDARD BATHROOM ACCESSORIES  
THRU OUT *\*tissue holder + towel bar will not be provided\**

LOT # PV-11

DATE: Jan 29, 2021

SIGNATURE:

SIGNATURE:



Project: Pine Valley

Lot: 11

Purchaser(s): Lakis Grapsas + Hrisoula Grapsas.

Standard Hood Fan Deletion


We acknowledge that the builder's standard hood fan will not be installed.  
Do not supply, install and/or credit. We will install our own hood fan after closing.

Signature: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: January 29, 2021.

HPCN36WS  
36-INCH CHIMNEY WALL HOOD  
PROFESSIONAL® SERIES

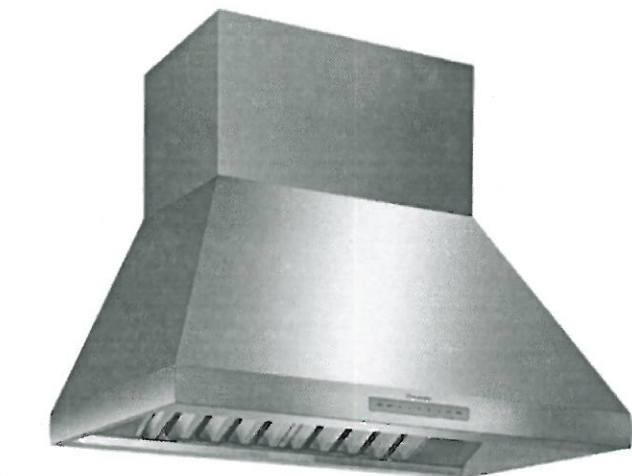

FEATURES & BENEFITS

- Professional® Series chimney wall hoods create a crafted, sculpted focal point
- Designed to complete the ultimate cooking system with Thermador ranges
- Powerfully Quiet® system accepts integral, inline, and remote blowers
- Dishwasher-safe stainless steel, commercial-style baffle filters
- Beautiful illumination with multi-level, vivid LED lights

ACCESSORIES (OPTIONAL)

25 ft. Blower Connector Cable - EXTNCB25W

For use with the following inline and remote blowers: VTR630W, VTR1030W, VTR1330W, VTI610W, VTI1010W

Roofplates

RFPLT600P - For use with 600 CFM remote blower VTR630W

RFPLT1000P - For use with 1000 CFM remote blower VTR1030W and 1300 CFM blower VTR1330W

6" Tall Duct Cover, 36" Wide	CHMHP366W
18"- 35" Tall Duct Cover, 36" Wide	CHMHP36TW
42"- 59" Tall Duct Cover, 36" Wide	CHMHP36XTW

Remote Control Panel

REMCPUW - Ability to vertically install on cabinetry or wall to control hood in a convenient location



PV-11  
Jan 29, 2021



Thermador

GENERAL PROPERTIES

Features

Multi-Level LED Lights with Fading Transitions, Automatic Mode, Check Filter Reminder Light, Delay Shut-Off

Operating Mode	Ducted
Maximum CFM	Blower Sold Separately
Number of Speed Settings	4-Stage
Motor Location	Integral / Inline/ Remote
Number of Lights	2
Bulb Type	LED
Total Power of the Lamps (W)	2.4 W
Damper Included	Yes
Grease Filter Material	Washable Stainless Steel
Grease Filter Type	Stainless-Steel Commercial Style Baffle Filter
Home Connect™ (Wi-Fi Enabled)	No

TECHNICAL DETAILS

Watts (W)	See Chart on Page 3
Current (A)	See Chart on Page 3
Volts (V)	120 V
Frequency (Hz)	60 Hz
Plug Type	Fixed Connection, No Plug

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in)	18" x 35 15/16" x 24"
Height of the Chimney (in)	Duct Covers Sold Separately
Minimum Required Distance Above Gas / Electric Cooking Surface	30" / 30"
Diameter of Air Duct (in) Top	10"
Net Weight (lbs)	70 lbs

BLOWER OPTIONS

Remote Blower (Mounted to Roof or External Wall)	VTR630W - 600 CFM
	VTR1030W - 1000 CFM
	VTR1330W - 1300 CFM
Inline Blower (Mounted Between Kitchen and External Wall)	VTI610W - 600 CFM
	VTI1010W - 1000 CFM
Integrated Blower (Mounted in Hood)	VTN630W - 600 CFM
	VTN1090R - 1000 CFM

WARRANTY


Limited Warranty Parts and Labor	2 Year
----------------------------------	--------

PV-11  
 Jan 29, 2021

**HPCN36WS**  
**36-INCH CHIMNEY WALL HOOD**  
 PROFESSIONAL® SERIES




**HOOD DIMENSIONS**

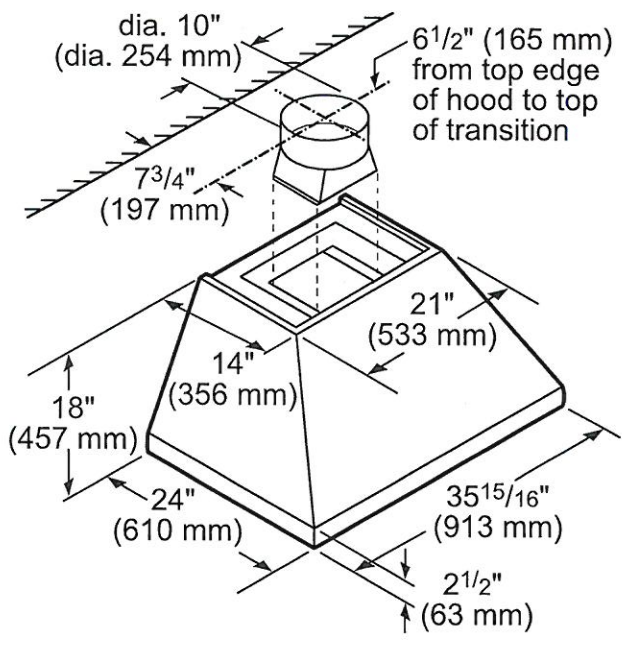

**OPTIONAL ACCESSORIES**

**6" TALL DUCT COVER**  
 CHMHP366W

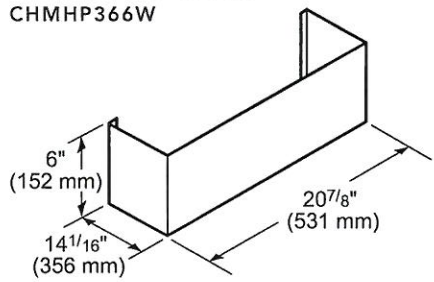

Standard duct cover for up to 8-foot ceiling heights

**18" - 35" TALL**  
**TELESCOPING**  
**DUCT COVER**  
 CHMHP36TW



Telescoping design for extension up to 9-foot to 10-foot ceiling heights

**42" - 59" TALL**  
**TELESCOPING**  
**DUCT COVER**  
 CHMHP36XTW



Telescoping design for extension up to 11-foot to 12-foot ceiling heights

**REMOTE CONTROL PANEL**  
 REMCPW



Convenience at your fingertips: The remote control accessory offers the freedom to extend your hood controls to a more reachable spot

**HPCN36WS**  
 36-INCH CHIMNEY WALL HOOD  
 PROFESSIONAL® SERIES


PV-11  
 Jan 29, 2021




MODEL	DESCRIPTION		ELECTRIC LOAD						
			VTN630W	VTN1090R	VTI610W	VTI1010W	VTR630W	VTR1030W	VTR1330W
HPCN36WS	36" Chimney Wall Hood	Amps	4.0	7.4	5.9	7.8	5.9	7.8	11.3
		Watts	480	888	708	936	708	936	1,356

REMOTE BLOWERS (MOUNTED TO ROOF OR EXTERNAL WALL)


VTR630W-600 CFM

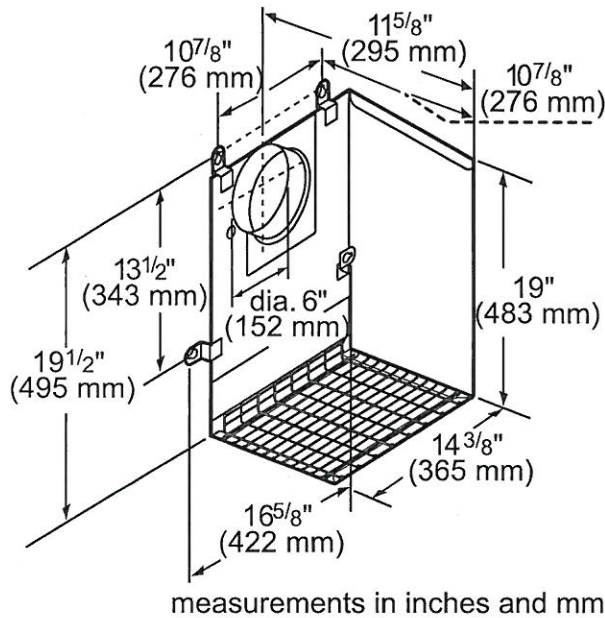

VTR1030W-1000 CFM

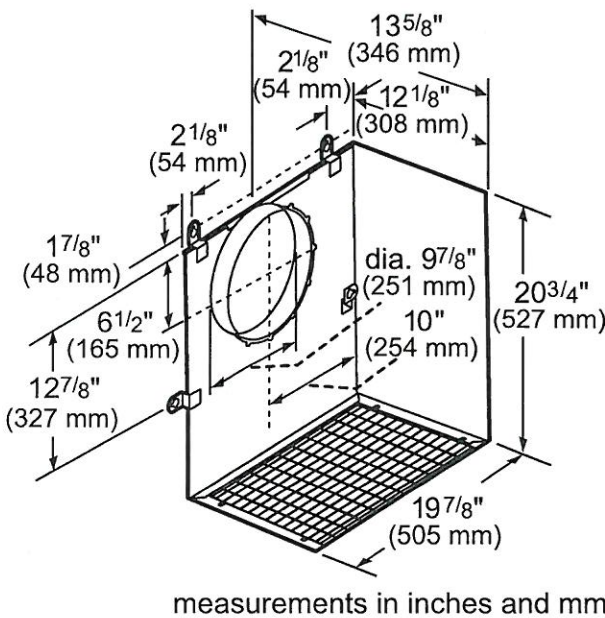

VTR1330W-1300 CFM

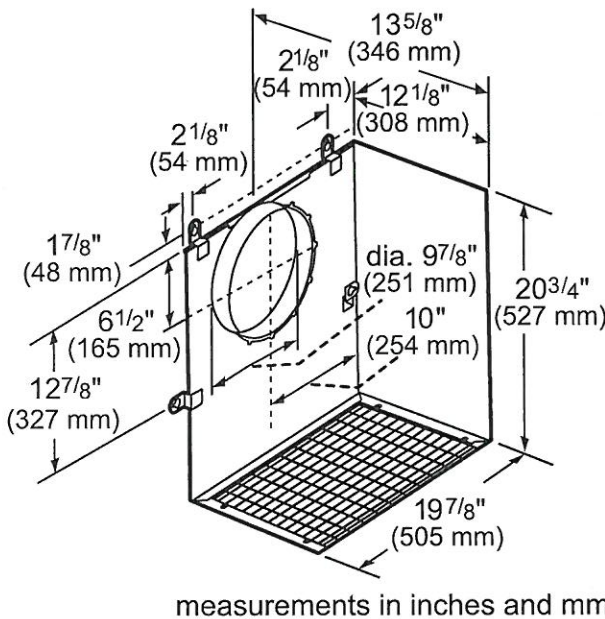

PV-11  
Jan 29, 2021.



**Thermador** 


## HPCN36WS

### 36-INCH CHIMNEY WALL HOOD

PROFESSIONAL® SERIES


INLINE BLOWERS (MOUNTED BETWEEN KITCHEN AND EXTERNAL WALL)

VTI610W-600 CFM

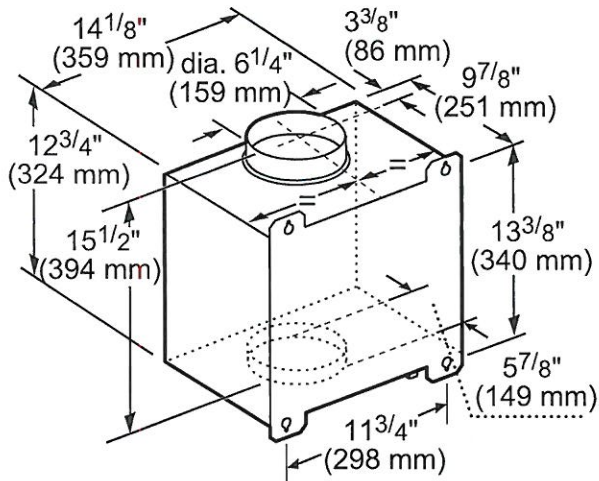

measurements in inches and mm


VTI1010W-1000 CFM

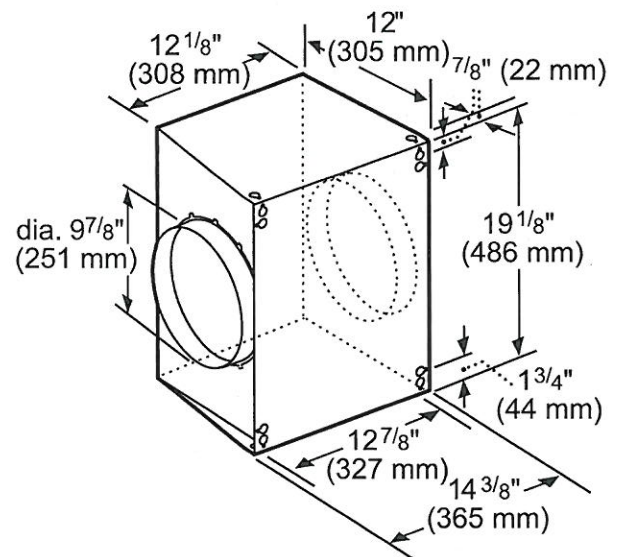

measurements in inches and mm


INTEGRATED BLOWERS (MOUNTED IN HOOD)

VTN630W-600 CFM

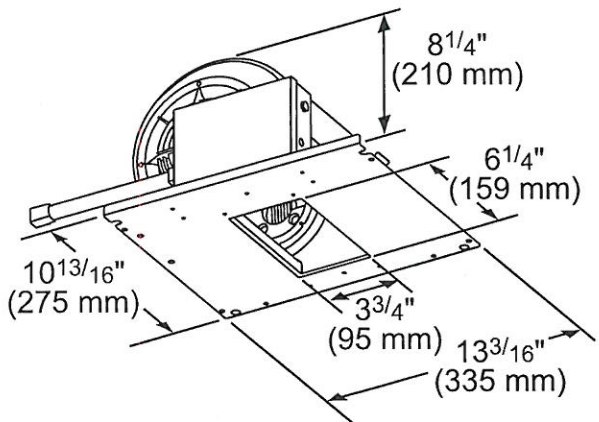

measurements in inches (mm)

VTN1090R-1000 CFM

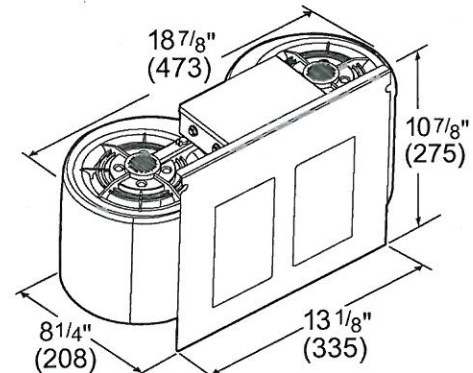

measurements in inches and mm

TV-11  
Jan 29, 2021.




# HPCN36WS

## 36-INCH CHIMNEY WALL HOOD


PROFESSIONAL® SERIES

### REMOTE BLOWER ACCESSORIES

#### ROOFPLATE-RFPLT600P

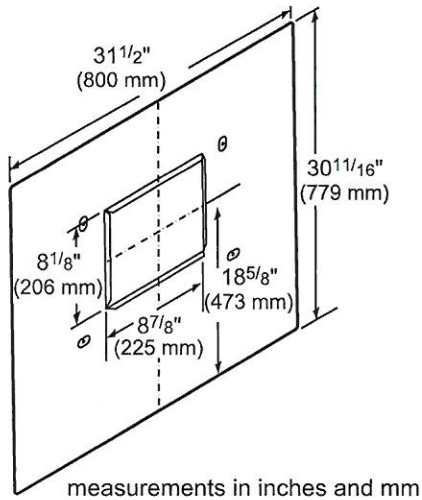

#### ROOFPLATE-RFPLT1000P

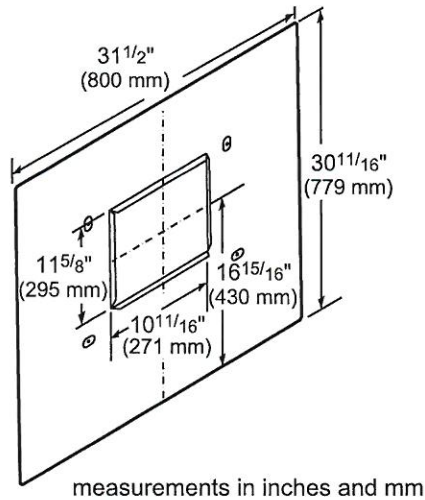

#### EXTNCB25W

For use with the following Inline and Remote Blowers: VTR630W, VTR1030W, VTR1330W, VTI610W, VTI1010W

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2019 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

PV-11  
Jan 29, 2021

**PRG366WH**  
**36-INCH GAS PRO HARMONY® RANGE**  
PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



**FEATURES & BENEFITS**

- ★ - The Star® Burner delivers superior flame spread for more even heating
- ★ - ExtraLow® feature provides a wide range of temperature control, perfect for simmering delicate sauces
- ★ - 2 ExtraLow® burners for simmering, melting, or holding long durations
  - Raised pedestal burner and porcelain maintop for effortless cleaning
  - Convection Bake offers precise multi-level baking results

**TECHNICAL DETAILS**


Circuit Breaker	15 A
Volts	120 V, 60Hz
Energy Source	Gas
Plug Type USA	120V – 3 Prong
Power Cord Length	65" (1,651mm)
Gas Supply	3/4"

**WARRANTY**

Limited Warranty, Entire Appliance, Parts and Labor	2 Year
---	--------

SEE PAGE 2 FOR INCLUDED AND OPTIONAL ACCESSORIES

**RANGETOP**

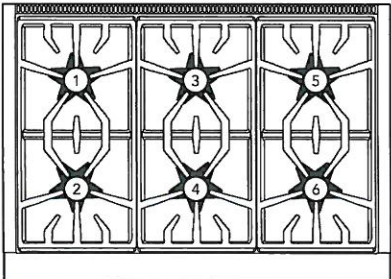

Total number of cooktop Burners	6
1 – Power of Back Left Burner BTU	15,000 and XLO
2 – Power of Front Left Burner BTU	18,000 and XLO
3 – Power of Back Center Burner BTU	15,000
4 – Power of Front Center Burner BTU	18,000
5 – Power of Back Right Burner BTU	15,000
6 – Power of Front Right Burner BTU	18,000

**OVEN**

Oven Capacity	5.1 cu. ft.
Cooking Modes	Bake, Convection Bake, Roast, Broil
Sabbath	Yes
Self Clean	No
Telescopic Rack(s)	3
Interior Lights	2
Bake Power	20,500 BTU
Broil Power	17,500 BTU
Home Connect™ (Wi-Fi Enabled)	Yes
Cavity Interior Dimensions (HxWxD)	16 3/8" x 29 1/8" x 18 5/8"
Cavity Usable Dimensions (HxWxD)	11 1/4" x 25 5/8" x 16 3/4"

**DIMENSIONS & WEIGHT**

Overall Appliance Dimensions (HxWxD)	35 3/4" – 36 3/4" x 35 15/16" x 24 5/8"
Required Cutout Size (HxWxD)	35 3/4" – 36 3/4" x 36" x 24"
Net Weight	415 lbs.

★ THERMADOR® EXCLUSIVE

PV-11  
Jan 29, 2021



**PRG366WH**  
**36-INCH GAS PRO HARMONY® RANGE**  
PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



**ACCESSORIES (INCLUDED)**

3 Telescopic Racks, Meat Probe, 1 Lg. Broil Pan, Island Trim

**ACCESSORIES (OPTIONAL)**



PWOKRINGHC  
Wok Ring



PAGRIDDLE  
Professional Griddle, Sits on Top of Grates Over  
2 Star Burners, High-Release Coating



PARKB3XHY  
Metallic Blue Knob Kit



PA12CHPBLK  
Chopping Block / Cutting Board



PA36WLBH  
Pro Harmony 7" Low Backguard\*



PALPKITGW  
LP Conversion Kit, Pro Harmony Gas Models with  
4 and 6 Burners

PAALTKITHW  
High Altitude Kit, Natural Gas Pro Harmony Ranges, 5,400 ft. to 10,200 ft.  
Contact Customer Support  
High Altitude Kit, Gas or Dual-Fuel Pro Harmony Ranges Connected to  
LP Gas, 10,000 ft. to 10,200 ft.


\*Models PCG305xx, PRD305xx, PRD606xx, PRG305xx, PRG304xx and PRD304xx are suitable for 0" rear clearance to combustible surfaces. All other models: when using the included Island Trim a minimum 6" (152 mm) rear clearance is required to a combustible surface. When installing against a combustible surface, a Thermador® Low Backguard is required for a 0" rear clearance to the combustible surface. A Thermador Low Backguard must be purchased separately. A rear clearance to a surface covered in a noncombustible material (metal, ceramic tile, brick, marble, or stone) is 0" when using the included Island Trim. Clearances of less than 6" (152 mm) should be approved by the local codes and/or by the local authority having jurisdiction. Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA.

PV-11  
Jan 29, 2021

**PRG366WH**  
**36-INCH GAS PRO HARMONY® RANGE**  
PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE





**36-INCH RANGE DIMENSIONS**

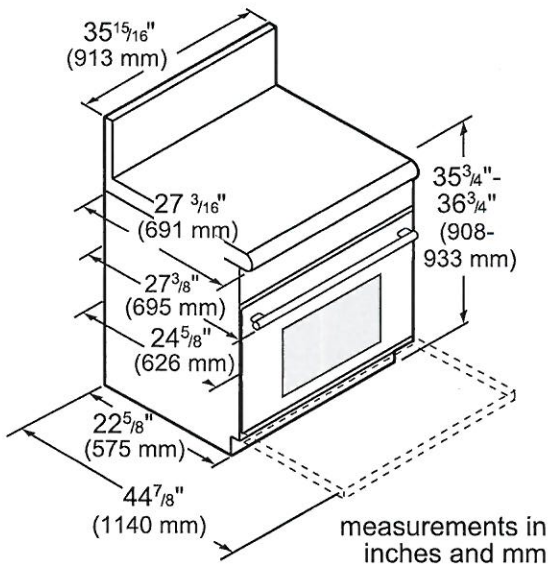

**36-INCH RANGE CUTOUT DIMENSIONS**

measurements in inches (mm)

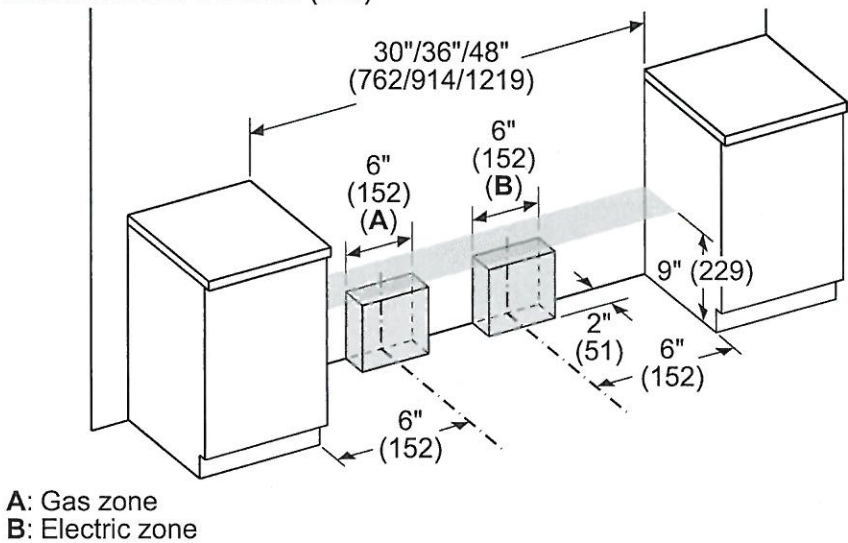


PV-11  
Jan 29, 2021  


**PRG366WH**  
**36-INCH GAS PRO HARMONY® RANGE**  
PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



**36-INCH RANGE DIMENSIONS AND CLEARANCE REQUIREMENTS WITH "FLUSH ISLAND TRIM"**

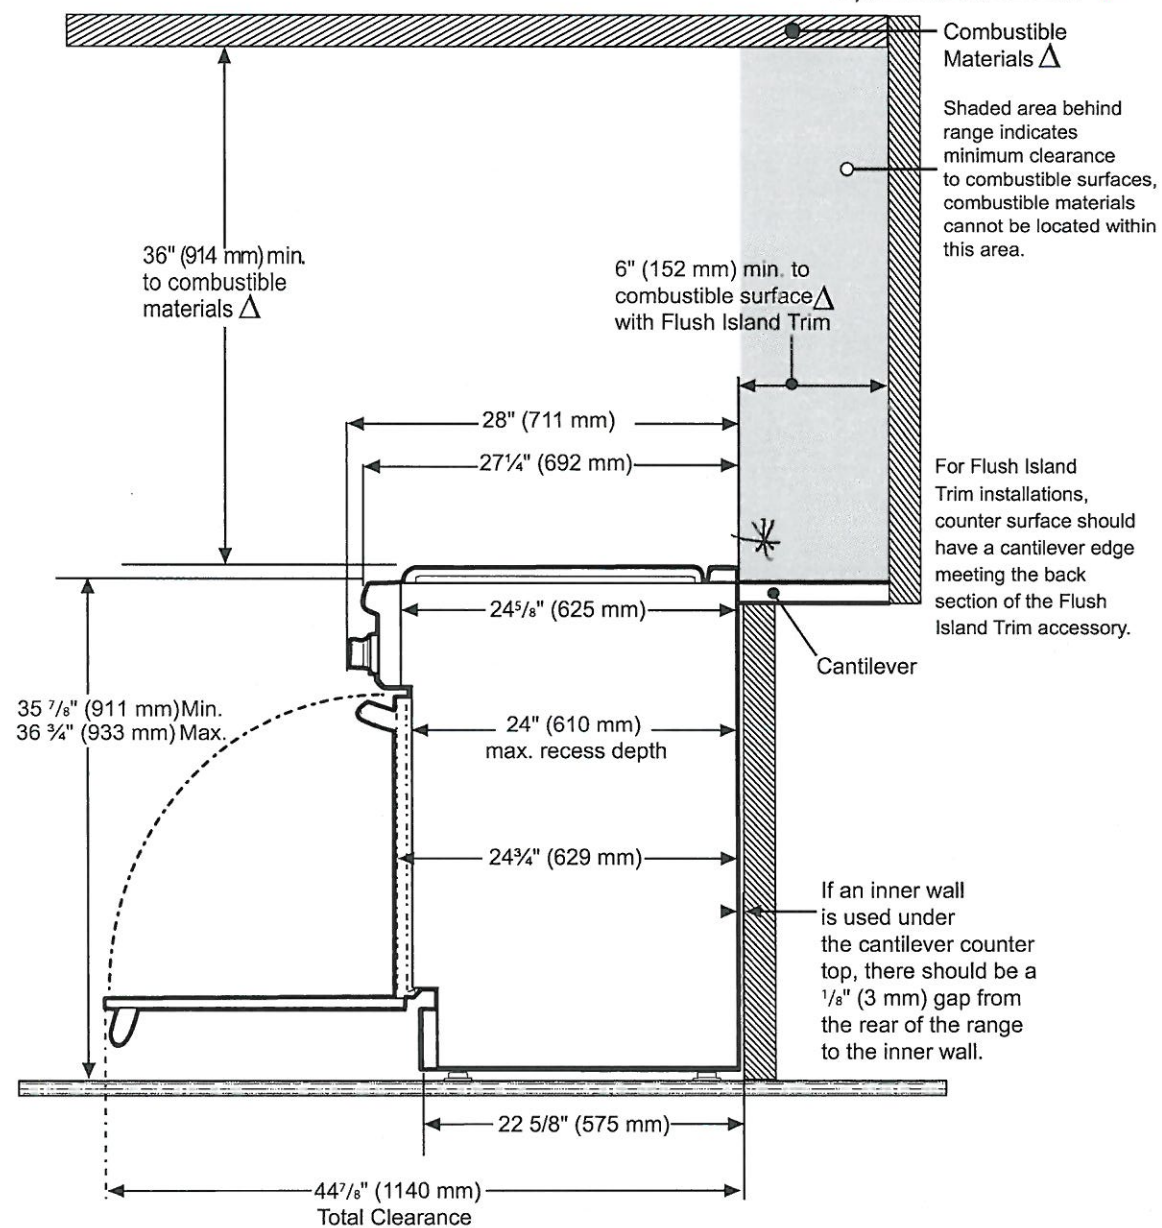

Δ As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 6" (152 mm) must be approved by the local codes and/or by the local authority having jurisdiction.


These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

PY-11  
 Jan 29, 2021

PODMC301W  
 30-INCH DOUBLE COMBINATION BUILT-IN OVEN  
 WITH SPEED OVEN  
 PROFESSIONAL SERIES

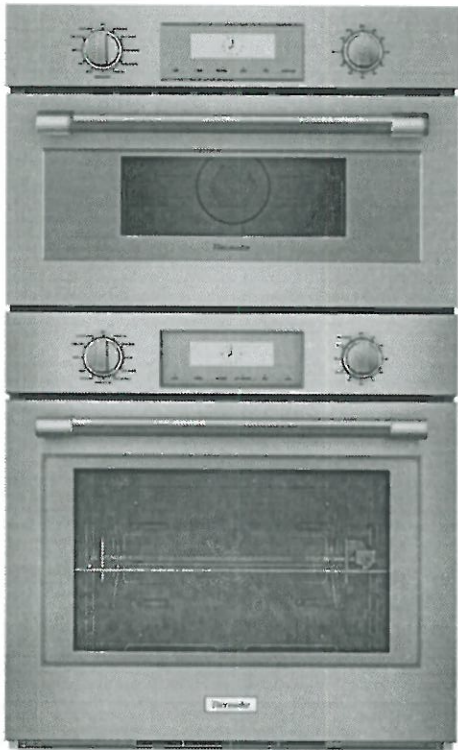

FEATURES & BENEFITS

- Specially crafted gray glass on stainless steel for a luxurious look and finish
- Designed for flexibility—standard or flush installation into kitchen cabinets
- Speed oven with microwave capability can broil and convection bake
- Large commercial style rotisserie with 12 pound capacity
- Multi-point Meat Probe to better capture temperature in roast and poultry

ACCESSORIES (INCLUDED)

Upper Cavity: Metal Turntable, Rack, Ceramic Tray; Lower Cavity: 3 Telescopic Racks, Multi-point Meat Probe, Max Broil Pan, Rotisserie

WARRANTY

Limited Warranty Parts and Labor	2 Year
----------------------------------	--------

GENERAL PROPERTIES

Heating Modes – Upper Cavity

36 CookSmart™ Auto Programs (including True Convection, Speed Convection, Broil, Convection Broil, Heating Programs, Keep Warm) and Microwave Programs

Heating Modes – Lower Cavity

(16) Bake, Broil, Max Broil, Roast, Convection Bake, Convection Broil, Max Convection Broil, Convection Roast, Proof, Warm, Pizza, True Convection, Dehydrate, Speed Convection, Slow Roast, Rotisserie

Sabbath		Yes
Cleaning Type – Lower Cavity		Easy Clean and Self Clean
Telescopic Rack(s)		3
Illumination Type	Upper Cavity Lower Cavity	LED Halogen
Interior Lights	Upper Cavity Lower Cavity	1 2
Home Connect (Wi-Fi Enabled)		Yes, Lower Oven Only

OVEN PERFORMANCE

Microwave Power		1,000 W
Bake / Broil Element	Upper Cavity	600 W / 1,750 W
	Lower Cavity	2,400 / 1,000 / 3,800 W
Convection Element	Upper Cavity	1,700 W
	Lower Cavity	2,000 W

TECHNICAL DETAILS

Watts	10,200 W
Circuit Breaker	50 A
Volts; Frequency	240 / 208 V; 60 Hz
Plug Type	Fixed Connection, No Plug
Conduit	60" 4-Wire
Energy Source	Electric

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD)	49" x 29 3/4" x 24 1/2"
Trim Overlaps (Top – Sides – Bottom)	1/2" – 9/16" – 0"
Required Cutout Size (HxWxD) – Standard	48 1/2" x 28 1/2" x 23 1/2"
Required Cutout Size (HxWxD) – Flush	49 1/8" x 30" x 24 1/2"
Speed Oven Capacity	1.6 cu. ft.
Oven Capacity	4.5 cu. ft.
Overall Lower Oven Interior Dimensions (HxWxD)	17 3/4" x 24" x 17 7/8"
Usable Lower Oven Interior Dimensions (HxWxD)	13 1/2" x 21 5/8" x 16 1/4"
Net Weight	267 lbs

PR-11  
Jan 29, 2021




**PODMC301W**

**30-INCH DOUBLE COMBINATION BUILT-IN OVEN  
WITH SPEED OVEN**

PROFESSIONAL SERIES


**30-INCH DOUBLE COMBINATION OVEN WITH SPEED OVEN**

Combination Oven with Microwave or Speed Oven

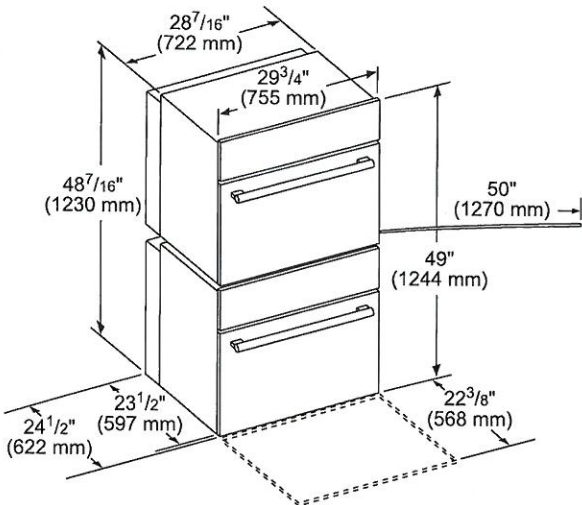


measurements in inches (mm)

Door Handle Depth\*  
Professional Series Handle




\*Protrusion of handle  
from door skin

Combination Oven with Microwave or  
Speed Oven

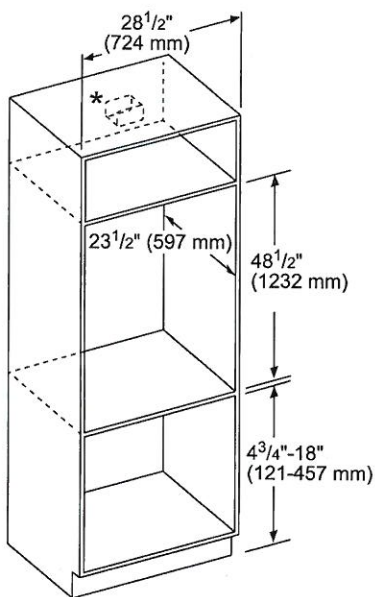


\* Junction box may be installed above,  
beneath, right or left of the unit within  
range of the power cord.

Combination Oven with Microwave or  
Speed Oven, flush mount installation  
Top View Bottom Hinge Door

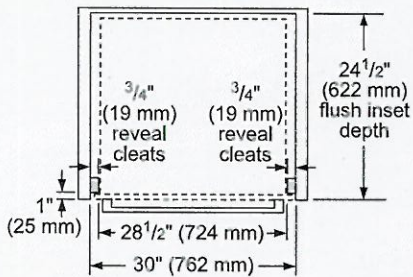

measurements in inches (mm)

Side View-Combination Oven with  
Microwave or Speed Oven

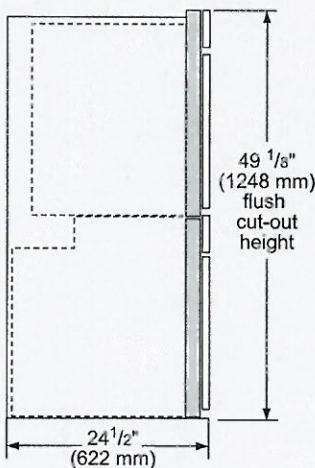

measurements in inches (mm)

PV-11  
Jan 29, 2021

**PODMC301W**  
**30-INCH DOUBLE COMBINATION BUILT-IN OVEN**  
**WITH SPEED OVEN**  
PROFESSIONAL SERIES



INSTALLATION DETAILS

Standard installation  
Single oven, double oven or combo oven over warming or storage drawer

\* Wall oven junction box may be located above or to the right or left of the unit within reach or the power cable.  
\*\*Electrical hook-up may be located below (depending on space) or next to the drawer within reach of the power cable.  
Minimum 3/4" (18 mm) required between cut-outs.

measurements in inches (mm)

Flush installation  
Double or combo oven over storage or warming drawer

Side view

\*IMPORTANT: Base has to be able to support the weight of the oven. Please check oven manual for minimum weight requirements.


minimum 1/2" (13 mm) required between cut-out\*  
Warming drawer  
\*\*For WD30W, the installed dimension may differ. This is based on 3/4" (19 mm) thick custom panel.

measurements in inches (mm)

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.


Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

PV-11  
Jan 29, 2021.  


**T36IB905SP**  
**36-INCH BUILT-IN 2-DOOR BOTTOM FREEZER**  
FREEDOM® COLLECTION, PANEL-READY

**Thermador** 

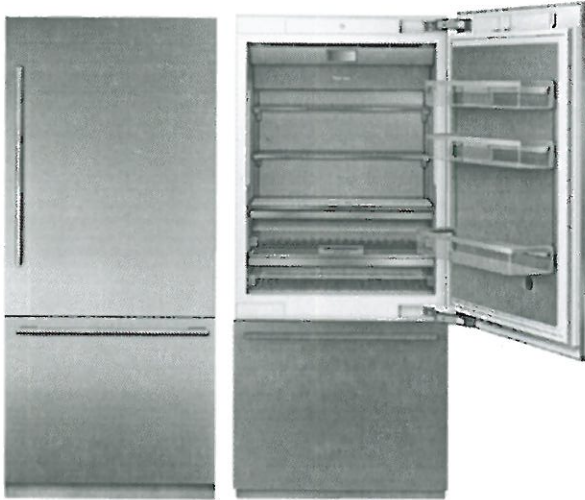

**FEATURES & BENEFITS**

- Full Stainless Steel Inner Liner
- Freedom® Hinge enables true flush design
- Auto Door Opening provides the opening of the door with just a slight push or pull
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

**TEMPERATURE RANGES**

Refrigerator	36°F (2°C) to 46°F (8°C)
SuperCool	36°F (2°C) for approximately 6 hours
Energy Saving (Economy) Mode	Refrigerator: 45°F (7°C) Freezer: 3°F (-16°C)
Freezer	-11°F (-24°C) to 7°F (-14°C)
SuperFreeze®	-22°F (-30°C) for approximately 52 hours

**GENERAL PROPERTIES**

Home Connect™ (Wi-Fi Enabled)	Yes
Panel Ready	Yes
Reversible Door Swing	Yes
SoftClose® Door	Yes*
SoftClose® Drawers	Yes
Carbon Air Filter	Yes
Lighting	LED Sidewall and Theater Lighting
Refrigerator Shelves	3
Adjustable Shelves – Refrigerator	2
Shelf Material	Glass w/Aluminum Profile
Full Extension Drawers @ 115° Door Opening Angle	Yes
Full Extension Drawers @ 90° Door Opening Angle	Yes
Adjustable Temperature Drawer	1
Humidity Managed Drawer	1
Door Bins – Refrigerator	2
Gallon Door Bins – Refrigerator	1
Defrost Process – Freezer	Frost-Free
Freezer Baskets	2
Ice Maker with Diamond Ice System	Yes
Door Open Alarms	Yes
Open Door Assist	Yes
SuperCool	Yes
SuperFreeze®	Yes
Special Modes	Sabbath, Economy, Vacation

**CAPACITY**

Total Capacity (cu. ft.)	19.6 cu. ft.
Refrigerator Capacity (cu. ft.)	14.0 cu. ft.
Freezer Capacity (cu. ft.)	5.6 cu. ft.

**TECHNICAL DETAILS**

Watts (W)	350 W
Current (A)	15 A
Volts (V)	110-120 V
Frequency (Hz)	60 Hz
Power Cord Length (in.)	118
Plug Type	120V-3 Prong

**DIMENSIONS & WEIGHT**

Appliance Dimensions (H x W x D) (in.)	83 3/4"*** x 35 3/4" x 24"
Required Cutout Size (H x W x D) (in.)	84" x 36" x 25"
Net / Gross Weight (lbs)	456 / 499 lbs

**EFFICIENCY**

ENERGY STAR® Qualified	Yes
Annual Energy Consumption	504 kWh

\*To verify if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328.

\*\*\*Height adjustable + / -1/2" (+ / -13 mm)

PY-11  
Jan 29, 2021



**T36IB905SP**  
**36-INCH BUILT-IN 2-DOOR BOTTOM FREEZER**  
FREEDOM® COLLECTION, PANEL-READY




**WARRANTY**


Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System*; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System*; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

\*Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

**CUTOUT DIMENSIONS**

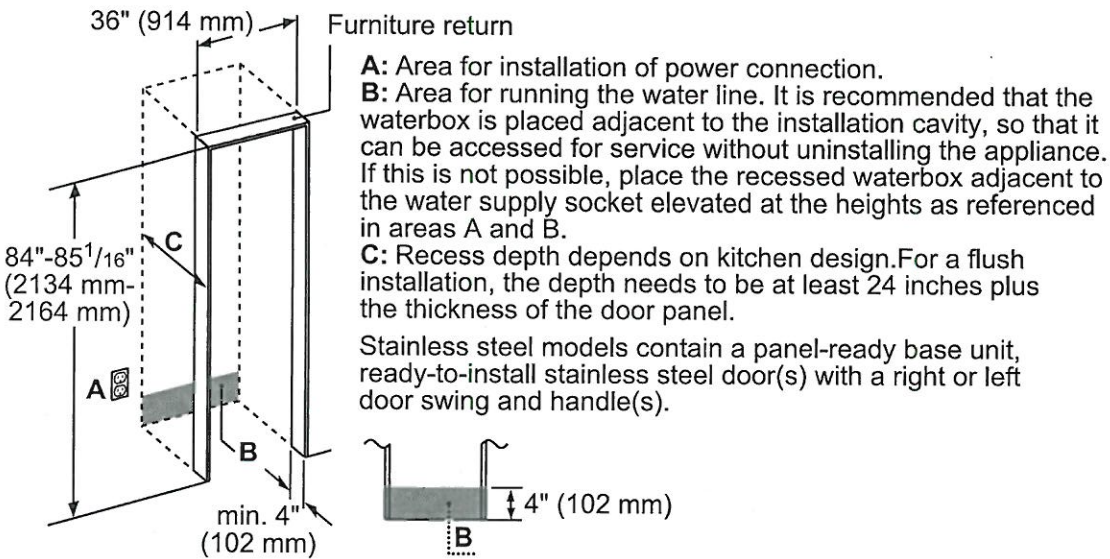


**TOP VIEW CLEARANCE**

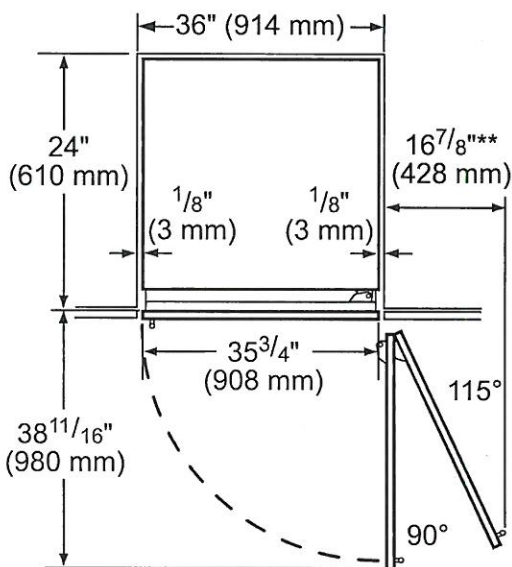

\*\* Door handle must be added to this dimension

\* Depends on the thickness of the furniture door. 3/4" (19 mm) is relevant for the stainless steel door. (special Accessory).

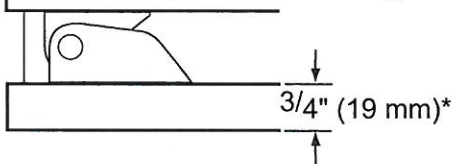


PV-11  
Jan 29, 2021

**T36IB905SP**  
**36-INCH BUILT-IN 2-DOOR BOTTOM FREEZER**  
FREEDOM® COLLECTION, PANEL-READY



PRODUCT AND PANEL DIMENSIONS

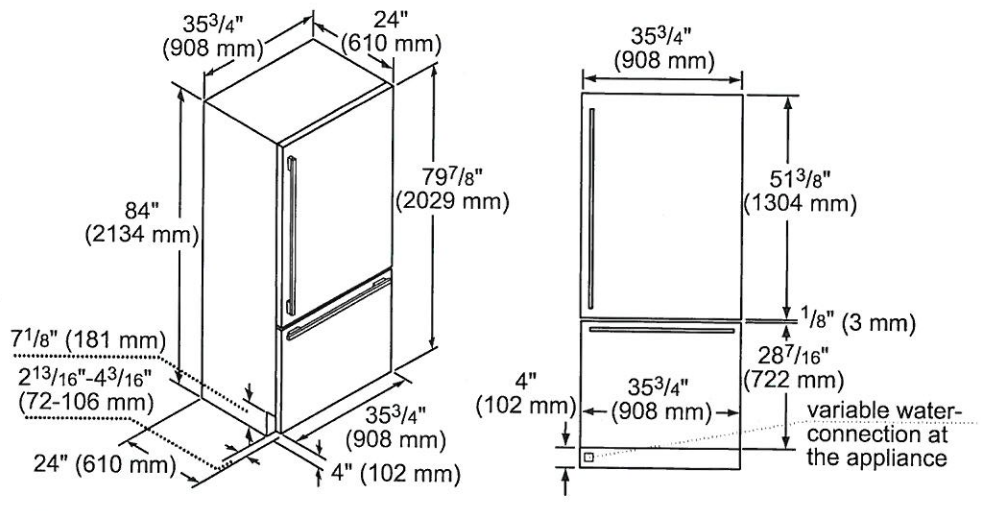

ACCESSORIES (OPTIONAL)

FLAT STAINLESS STEEL DOOR PANELS

36-Inch 2-Door Flat Stainless Steel Door Panel



- TFL36IB800**  
For use with Handle
- TFL36IB905**  
Handleless

**NOTE:** Handleless Panels should not be installed on units without the Soft-Close capability. If you are uncertain if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328.

HANDLES

Choose between two options:



**PR36HNDL20 (Qty. 2)**  
36-Inch Professional Series Handle

or



**MS36HNDL20 (Qty. 2)**  
36-Inch Masterpiece® Series Handle

STORAGE



**36HFGALBIN**  
36-Inch Half Gallon Bin



**LPRODBIN10**  
Large Produce Bin



**SPRODBIN10**  
Small Produce Bin



**36PRODRAIL**  
36-Inch Produce Railing


FILTERS



**REPLFLTR55**  
Freedom® Water Filter  
Replacement water filter  
for use in all freezer and  
bottom freezer models

FRAMEKIT10

**Freedom® Frame Kit**  
For any custom column installation in 24-inch deep cutouts. With two metal side trims whose placement between the interior cutout wall and the appliance helps overcome the challenge of unfinished cabinet returns.



**HEATRKIT20 - 13W @ 120V**


**Freedom® Heater Kit**  
When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this sealing kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

PV-11  
Jan 29, 2021

**DWHD650WPR**  
**EMERALD® 6-PROGRAM DISHWASHER**  
CUSTOM PANEL

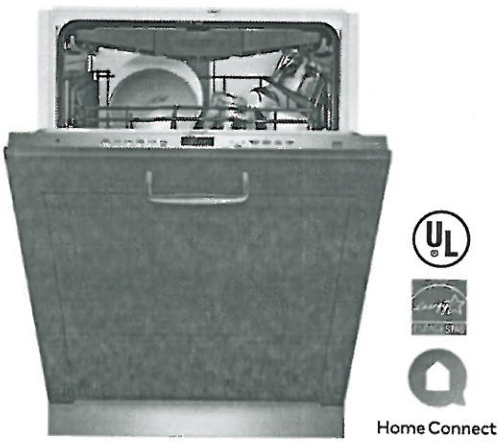

Also Available In:

DWHD650WFP – Flat Stainless Steel Panel with Professional Series Handle

DWHD650WFM – Flat Stainless Steel Panel with Masterpiece® Series Handle

- FEATURES & BENEFITS**
- Chef's Tool Drawer (3rd Rack) is designed to make loading and unloading tools and hard to place items extraordinarily easier
  - Sens-A-Wash® measures water cleanliness and adjusts wash cycle
  - Three stage advanced filtration recirculates water for sparkling results
  - 3-Level adjustable upper rack is customizable for all of your needs, designed to be raised for extra large items placed on the bottom rack, or lowered to fit taller wine glasses on the upper rack
  - Extra Dry Option adds extra heat to the final rinse to enhance drying results
  - Impressively Quiet®— 48 dBA for peaceful kitchen experience
  - Thermador Connected Experience by Home Connect brings exclusive dish features that keep you connected. Always.

ACCESSORIES (OPTIONAL)	
Dishwasher Supply and Drainage Hose Extension 76 3/4"	SGZ1010UC
Dishwasher Accessory Kit	SMZ5000
Fine Silverware Carafe	SMZ5002UC
Junction Box	SMZPCJB1UC



Accessory Kit includes Extra-Tall-Item Sprinkler, Vase / Bottle Holder, 3 Plastic Item Clips and Small Item Basket

Fine Silverware Carafe

GENERAL PROPERTIES	
Number Of Wash Cycles	6
Number Of Options	5
dBA	48
Third Rack	Chef's Tool Drawer®
Rack Adjustability	Rackmatic 3-Stage
Tub Material	Stainless Steel
Control Type	Touch Control
Concealed Water Heating Element	Yes
Leak Protection System	24/7 AquaStop®
Water Softener	No
Five-Level Wash	Yes
Childlock	No
Home Connect (Wi-Fi Enabled)	Yes
EFFICIENCY	
Water Usage Per Cycle (g)	3.5 g
Energy Efficiency Class	Tier 1
ENERGY STAR® Certified	Yes
Total Annual Energy Consumption (kWh)	269 kWh
Total Annual Water Consumption (g)	624 g
CAPACITY	
Number Of Place Settings	16
TECHNICAL DETAILS	
Watts (W)	1,440 W
Current (A)	12 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power Cord Length (in)	67"
Power Cord Install Length from Corner of Unit when Facing the Door (in)*	Left - 45" Right - 56"
Minimum Water Pressure (lb/sin)	14
Max. Temperature for Water Intake	140° F
Length Inlet Hose (in)	N/A
Length Outlet Hose (in)	79"
DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (HxWxD) (in)	33 7/8" x 23 9/16" x 23 1/16"
Required Cutout Size (HxWxD) (in)	33 7/8" Min. x 23 5/8" Min. x 24"
Adjustable Feet	Yes
Net Weight (lbs)	88 lbs

\*September 2020 running production change to remove adhesive routing clips for power cord. These clips and the edge protector are now included in the dishwasher accessory kit #SMZEPCC1UC.

PR-11  
Jan 29, 2021



Limited Warranty, Entire Appliance, Parts and Labor	2 Year
Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only	3rd to 5th Year
Limited Warranty for Racks (Does Not Include Rack Components); Parts Only	3rd to 5th Year
Limited Warranty for Rust-through On Inner Tub Liner; Parts Only	Lifetime

24" (610 mm)  
23 5/8"-24 1/4" (600-616 mm)  
23 1/8" (585 mm)  
23 9/16" (598 mm)  
23 7/8"-35" (860-890 mm)  
5/8"-7/8" (16-22 mm)  
35/8"-7 1/2" (92-190 mm)  
27 1/2"-30 1/4" (700-768 mm)  
33 7/8"-35" (860-890 mm)  
min. 33 7/8" (min. 860 mm)  
3 1/2" (89 mm)  
2 1/8" (53 mm)  
4" (100 mm)  
23 1/8"-23 3/8" (588-594 mm)

\* measured from the bottom edge of the countertop panel thickness recommended 3/4" (20 mm) panel weight 11-18 lb. (5-8 kg)  
\*\* 24" (610 mm) wide panel may be used depending on cabinet design

Technical drawing of a rectangular plate. The dimensions are as follows:

- Length:  $23\frac{1}{8}" - 23\frac{3}{8}"$  (588-594 mm)
- Width:  $27\frac{1}{2}" - 30\frac{1}{8}"$  (700-765 mm)
- Thickness:  $\frac{5}{8}" - \frac{7}{8}"$  (16-22 mm)

- \* thickness recommended  $\frac{3}{4}$ " (20 mm), panel weight 11–18 lb. (5–8 kg)
- \*\* 24" (610 mm) wide panel may be used depending on cabinet design

measurements in inches and mm

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.