

Lot: 8

**Model: 42.03 A FORESTCREST** 

**Project/Phase: Pine Valley Forevergreen / 1** 

APPLIANCES	4]	PF	$\mathbf{L}$	A	N	CI	ES
------------	----	----	--------------	---	---	----	----

Invoice	Qty.	Description
2505 72,282 22Dec20	1	ADDITIONAL 220V RECEPTACLE ON A SEPARATE CIRCUIT - FOR BUILT-IN WALL OVEN - APPLIANCE NOT INCLUDED - DOES NOT INCLUDE BREAKER THAT IS TO BE INSTALLED BY LICENSED ELECTRICIAN AND ARRANGED BY HOMEOWNER AFTER CLOSING
**		
2583	1	APPLIANCE SPECIFICATIONS ATTACHED - SIGNED COPY
16Mar21 NoCat		
2664	1	SPICE KITCHEN HOOD FAN SPECIFICATION - SIGNED COPY
25Mar21 NoCat		
2797	1	KITCHEN: UPDATED APPLIANCE SPECIFICATIONS: BUILT-IN WALL OVEN + DISHWASHER
07Jun21 NoCat		

<b>BASEM</b>	BASEMENT WINDOWS		
Invoice	Qty.	Description	
2505 72,351 22Dec20	2	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME	
2906 72,351 14Sep21	1	***REVISED DUE TO SITE CONDITION, DELETE FROM PE #2505 - BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME  CREDIT UPON CLOSING	

DisciplineMS.rpt 23feb21 Page 1 of 14



Lot: 8

Model: 42.03 A FORESTCREST Project/Phase: Pine Valley Forevergreen / 1

#### CERAMIC

CERAM Invoice		Description
2583 19 16Mar21	1	FOYER: TILE, FLOOR - GROUT UPGRADE
2583 37 16Mar21	1	POWDER ROOM: TILE, FLOOR , LEVEL 5 - 12x24" LAID IN STRAIGHT, STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
2583 19 16Mar21	1	POWDER ROOM: TILE, FLOOR - GROUT UPGRADE
2583 34 16Mar21	1	MASTER ENSUITE: TILE, FLOOR , LEVEL 2 - 8X8" LAID IN STRAIGHT, STACKED PATTERN.
2583 48 16Mar21	1	MASTER ENSUITE: TILE, WALL, LEVEL 2 - 8X24" LAID IN HORIZONTAL STACKED PATTERN.
2583 37 16Mar21	1	ENSUITE 3: TILE, FLOOR , LEVEL 5 - 12x24" LAID IN STRAIGHT, STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
2583 19 16Mar21	1	ENSUITE 3: TILE, FLOOR - GROUT UPGRADE
2583 21 16Mar21	1	ENSUITE 3: TILE GROUT UPGRADE, WALL, UPG GROUT
2583 36 16Mar21	1	FOYER: TILE, FLOOR , LEVEL 4 - 12x24" LAID IN STRAIGHT, STACKED PATTERN. SEE PLAN FOR DIRECTION
2583 16Mar21 NoCat	1	FYI - KITCHEN/BREAKFAST: (NOT SPICE KITCHEN) VINTAGE SERIES, 5" RED OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, SCULPTED TEXTURE, UVF FINISH - LEVEL 4  DO NOT SUPPLY / INSTALL TILE (CREDIT)
2775	1	ENSUITE 3: SHOWER TILE RE-SELECTION
26May21 NoCat		PLEASE REFERENCE ATTACHED UPDATED COLOUR CHART FOR RE-SELECT
2805 20 10Jun21	1	ENSUITE 3: TILE GROUT UPGRADE, SHOWER FLOOR, UPG GROUT

DisciplineMS.rpt 23feb21 Page 2 of 14



Lot: 8

Model: 42.03 A FORESTCREST

**Project/Phase: Pine Valley Forevergreen / 1** 

# **CONCRETE AND DRAIN**

Invoice	Qty.	Description
2505	1	BACKFLOW PREVENTER VALVE
22Dec20		
NoCat		

# **CROWN MOULDING**

Invoice	Qty.	Description
2505	1	.GREAT ROOM: MODEL OPTIONS 42.03 - GREAT ROOM - OPT. WAFFLE CEILING, BEAM DETAIL AS PER PLAN (8 BOXES) OPTION #1 CTR-B07
22Dec20 NoCat		
2505	1	.LIVING ROOM: MODEL OPTIONS 42.03 OPT. WAFFLE CEILING, BEAM DETAIL AS PER PLAN (4 BOXES) OPTION # 1 CTR-B07
22Dec20 NoCat		

DisciplineMS.rpt 23feb21 Page 3 of 14



Lot: 8

Model: 42.03 A FORESTCREST Project/Phase: Pine Valley Forevergreen / 1

# DRYWALL

Invoice	Qty.	Description
2505 72,351 22Dec20 **	2	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME
2505 72,484 22Dec20	1	GREAT ROOM: MODEL OPTIONS 42.03 - GREAT ROOM - OPT. COFFERED CEILING AS PER PLAN
2505 72,486 22Dec20	1	GREAT ROOM: MODEL OPTIONS 42.03 - GREAT ROOM - OPT. WAFFLE CEILING, BEAM DETAIL AS PER PLAN (8 BOXES) OPTION #1 CTR-B07
2505 72,498 22Dec20	1	LIVING ROOM: MODEL OPTIONS 42.03 - LIVING ROOM - OPT. COFFERED CEILING AS PER PLAN
2505 72,489 22Dec20	1	LIVING ROOM: MODEL OPTIONS 42.03 OPT. WAFFLE CEILING, BEAM DETAIL AS PER PLAN (4 BOXES) OPTION # 1 CTR-B07
2505 72,282 22Dec20 **	1	ADDITIONAL 220V RECEPTACLE ON A SEPARATE CIRCUIT - FOR BUILT-IN WALL OVEN - APPLIANCE NOT INCLUDED - DOES NOT INCLUDE BREAKER THAT IS TO BE INSTALLED BY LICENSED ELECTRICIAN AND ARRANGED BY HOMEOWNER AFTER CLOSING
2505 22Dec20 NoCat	1	.**CUSTOM LAYOUT** BEDROOM 2: DELETE 'HIS' WIC, RELOCATE DOOR TO CREATE WIC FOR BEDROOM 2 - SEE PLAN FOR LOCATION
2505 22Dec20 NoCat	1	.**CUSTOM LAYOUT**  UPPER HALL - DELETE REACH-IN CLOSET FROM BEDROOM 2 - RELOCATE DOORS TO MAKE ACCESSIBLE FROM UPPER HALL.  *LEAVE LINEN CLOSET* THIS WILL BE DOUBLE DOOR CLOSET *BESIDE LINEN CLOSET*
2505 22Dec20 NoCat	1	.***CUSTOM LAYOUT*** SPICE KITCHEN  INCLUDES POCKET DOORS + ELECTRICAL FOR COOKTOP+ COUNTER PLUGS + RELOCATE SINK - BASED ON STANDARD FINISHES (APPLIANCES AND HOOD FAN NOT INCLUDED)
2505 22Dec20 NoCat	1	.MASTER ENSUITE: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN FOR LOCATION
2505 22Dec20	1	.BREAKFAST ROOM: UPGRADE EXTERIOR GARDEN DOORS TO 96" *FRENCH DOOR* ASSEMBLY - BOTH DOORS OPEN
NoCat  2505  22Dec20 NoCat	1	.**CUSTOM LAYOUT** ADD SIDE ENTRANCE DOOR TO GARAGE - COMPLETE WITH LIGHT AND STANDARD FINISHES
2906 14Sep21 NoCat	1	BREAKFAST ROOM: ***DELETE FROM PE #2505 - UPGRADE EXTERIOR GARDEN DOORS TO 96" *FRENCH DOOR* ASSEMBLY - BOTH DOORS OPEN***

DisciplineMS.rpt 23feb21



Lot: 8

Model: 42.03 A FORESTCREST

**Project/Phase: Pine Valley Forevergreen / 1** 

# **ELECTRICAL**

Invoice		Description
2505 72,351 22Dec20 **	2	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME
2505 72,281 22Dec20	1	GREAT ROOM: INTERIOR WALL OUTLET: ADDITIONAL 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT FOR WALL MOUNTED TV - LOCATE APPROX 66" A.F.F ABOVE FIREPLACE
2505 72,307 22Dec20	1	KITCHEN: FIXTURE: RELOCATE STANDARD CEILING MOUNT FIXTURE - LOCATE APPROX CENTERED ABOVE ISLAND
2505 72,289 22Dec20	6	KITCHEN: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH - INCLUDES 1 SWITCH INCLUDED IN APS
2505 72,273 22Dec20	1	KITCHEN: 110V WALL RECEPTACLE ON SEPARATE CIRCUIT - GAS FIRED COOKTOP - FOR AUX. EQUIPMENT - NOT A STOVE PLUG
2505 72,282 22Dec20	1	ADDITIONAL 220V RECEPTACLE ON A SEPARATE CIRCUIT - FOR BUILT-IN WALL OVEN - APPLIANCE NOT INCLUDED - DOES NOT INCLUDE BREAKER THAT IS TO BE INSTALLED BY LICENSED ELECTRICIAN AND ARRANGED BY HOMEOWNER AFTER CLOSING
2505	1	.***CUSTOM LAYOUT*** SPICE KITCHEN
22Dec20 NoCat		INCLUDES POCKET DOORS + ELECTRICAL FOR COOKTOP+ COUNTER PLUGS + RELOCATE SINK - BASED ON STANDARD FINISHES (APPLIANCES AND HOOD FAN NOT INCLUDED)
2505	1	.GREAT ROOM: MODEL OPTIONS 42.03 - GREAT ROOM - OPT. WAFFLE CEILING, BEAM DETAIL AS PER PLAN (8 BOXES) OPTION #1 CTR-B07
22Dec20 NoCat		
2505	1	.LIVING ROOM: MODEL OPTIONS 42.03 OPT. WAFFLE CEILING, BEAM DETAIL AS PER PLAN (4 BOXES) OPTION # 1 CTR-B07
22Dec20 NoCat		
2505	1	.**CUSTOM LAYOUT** ADD SIDE ENTRANCE DOOR TO GARAGE - COMPLETE WITH LIGHT AND STANDARD FINISHES
22Dec20 NoCat		
2906 14Sep21 NoCat	1	BREAKFAST ROOM: ***DELETE FROM PE #2505 - UPGRADE EXTERIOR GARDEN DOORS TO 96" *FRENCH DOOR* ASSEMBLY - BOTH DOORS OPEN***

# **EXTERIOR DOORS**

1		UK	DOORS	
I	nvoice	Qty.	Description	
	2906	-	BREAKFAST ROOM: ***DELETE FROM PE #2505 - UPGRADE EXTERIOR GARDEN DOORS TO 96" *FRENCH DOOR* ASSEMBLY - BOTH DOORS OPEN***	
	14Sep21 NoCat		CREDIT UPON CLOSING	

DisciplineMS.rpt 23feb21 Page 5 of 14



FINISHES

2505

22Dec20

#### **CONSTRUCTION SUMMARY**

Lot: 8

Model: 42.03 A FORESTCREST

**Project/Phase: Pine Valley Forevergreen / 1** 

	FORMING			
	Invoice	Qty.	Description	
	2504	1	MODEL OPTIONS 42.03 - KITCHEN - OPT. COVERED LOGGIA AS PER PLAN	
ı	72,483			
ı	03Nov20		NO COLD CELLAR BELOW	
١				

\*\*CUSTOM LAYOUT\*\* ADD SIDE ENTRANCE DOOR TO GARAGE - COMPLETE WITH LIGHT AND STANDARD

DisciplineMS.rpt 23feb21

Page 6 of 14

Printed and Sent: 14-Sep-21



Lot: 8

Model: 42.03 A FORESTCREST Project/Phase: Pine Valley Forevergreen / 1

#### FRAMING

FRAMII Invoice		Description
2505 22Dec20	1	**CUSTOM LAYOUT** BEDROOM 2: DELETE 'HIS' WIC, RELOCATE DOOR TO CREATE WIC FOR BEDROOM 2 - SEE PLAN FOR LOCATION
NoCat		
2505 22Dec20 NoCat	1	**CUSTOM LAYOUT** UPPER HALL - DELETE REACH-IN CLOSET FROM BEDROOM 2 - RELOCATE DOORS TO MAKE ACCESSIBLE FROM UPPER HALL. *LEAVE LINEN CLOSET* THIS WILL BE DOUBLE DOOR CLOSET *BESIDE LINEN CLOSET*
2505	1	***CUSTOM LAYOUT*** SPICE KITCHEN
22Dec20 NoCat		INCLUDES POCKET DOORS + ELECTRICAL FOR COOKTOP+ COUNTER PLUGS + RELOCATE SINK - BASED ON STANDARD FINISHES (APPLIANCES AND HOOD FAN NOT INCLUDED)
2505 72,631 22Dec20	1	MASTER ENSUITE: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN FOR LOCATION
2505 22Dec20 NoCat	1	.GREAT ROOM: MODEL OPTIONS 42.03 - GREAT ROOM - OPT. COFFERED CEILING AS PER PLAN
2505 22Dec20 NoCat	1	.GREAT ROOM: MODEL OPTIONS 42.03 - GREAT ROOM - OPT. WAFFLE CEILING, BEAM DETAIL AS PER PLAN (8 BOXES) OPTION #1 CTR-B07
2505 22Dec20 NoCat	1	.LIVING ROOM: MODEL OPTIONS 42.03 - LIVING ROOM - OPT. COFFERED CEILING AS PER PLAN
2505 22Dec20 NoCat	1	.LIVING ROOM: MODEL OPTIONS 42.03 OPT. WAFFLE CEILING, BEAM DETAIL AS PER PLAN (4 BOXES) OPTION # 1 CTR-B07
2505 22Dec20	1	.BREAKFAST ROOM: UPGRADE EXTERIOR GARDEN DOORS TO 96" *FRENCH DOOR* ASSEMBLY - BOTH DOORS OPEN
NoCat		
2505 22Dec20 NoCat	1	.**CUSTOM LAYOUT** ADD SIDE ENTRANCE DOOR TO GARAGE - COMPLETE WITH LIGHT AND STANDARD FINISHES
2906 14Sep21 NoCat	1	BREAKFAST ROOM: ***DELETE FROM PE #2505 - UPGRADE EXTERIOR GARDEN DOORS TO 96" *FRENCH DOOR* ASSEMBLY - BOTH DOORS OPEN***

DisciplineMS.rpt 23feb21 Page 7 of 14



Lot: 8

**Model: 42.03 A FORESTCREST** 

**Project/Phase: Pine Valley Forevergreen / 1** 

# GLASS AND MIRROR

Invoice	Qty.	Description
2583	2	MASTER ENSUITE + ENSUITE 3: UPGRADE SHOWER DOOR HARDWARE - MT 6X6 - MATTE BLACK + HINGES
16Mar21 NoCat		
2583	1	ENSUITE 4: UPGRADE HARDWARE TO MT6X6 - CHROME
16Mar21 NoCat		

DisciplineMS.rpt 23feb21 Page 8 of 14



Lot: 8

**Model: 42.03 A FORESTCREST Project/Phase: Pine Valley Forevergreen / 1** 

# **GRANITE MARBLE OUARTZ**

Invoice		1ARBLE QUARTZ Description
2505	1	.MASTER ENSUITE: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN FOR LOCATION
22Dec20 NoCat		
2505	1	.KITCHEN: ADD COMPLETE BAR SINK TO ISLAND (SINK/FAUCET/PLUMBING) AT ISLAND - COMPLETE WITH STANDARD FINISHES
22Dec20 NoCat		
2583	1	POWDER ROOM: UPGRADE 6 QUARTZ COUNTER
16Mar21 NoCat		
2583	1	KITCHEN: PERIMETER - UPGRADE 3 QUARTZ COUNTER ISLAND - UPGRADE 6 QUARTZ COUNTER
16Mar21 NoCat		
2583	2	KITCHEN: ISLAND WATERFALL LEGS - UPGRADE 6
16Mar21 NoCat		
2583	1	SPICE KITCHEN: ADD STANDARD LEVEL FULL HEIGHT BACKSPLASH AT COOKTOP + COOKTOP CUT OUT
16Mar21 NoCat		
2583	1	ENSUITE 3: UPGRADE 1 QUARTZ COUNTER
16Mar21 NoCat		
2583	1	KITCHEN: FULL HEIGHT QUARTZ SLAB BACKSPLASH - LEVEL 6
16Mar21 NoCat		
2696	1	KITCHEN: EXTEND CABINET BASE + COUNTER BESIDE DISHWASHER + DELETE UPPERS AT LONG WALL
14Apr21 NoCat		KITCHEN: EXTENDED COUNTER TOP - SEE ATTACHED REVISED PLANS
2805 101,930	1	KITCHEN: UPGRADE COUNTER + BACKSPLASH TO 3CM
10Jun21		
2805 101,930	1	POWDER ROOM: UPGRADE COUNTER TO 3CM
101,930 10Jun21		

DisciplineMS.rpt 23feb21 Page 9 of 14



Lot: 8

Model: 42.03 A FORESTCREST Project/Phase: Pine Valley Forevergreen / 1

# **HARDWOOD**

Invoice	Qty.	Description
2583 7 16Mar21	1	THRU OUT - ALL STANDARD AREAS: MAIN HALL/LIVING ROOM/DINING ROOM/STUDY/GREAT ROOM/UPPER HALL/STUDY LOFT/MASTER BEDROOM/BEDROOM 2/BEDROOM 3/BEDROOM 4 - VINTAGE SERIES, 5" WHITE OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, SCULPTED TEXTURE, UVF FINISH - LEVEL 4
2583 6 16Mar21	1	KITCHEN/BREAKFAST: (NOT SPICE KITCHEN) VINTAGE SERIES, 5" RED OAK, NSS ENGINEERED HARDWOOD, 3/4" THK, SCULPTED TEXTURE, UVF FINISH - LEVEL 4

#### **HVAC**

Invoice	Qty.	Description
2505	1	KITCHEN: GAS LINE ROUGH-IN - MAIN FLOOR FOR GAS COOKTOP - SEE PLAN FOR LOCATION
72,224		
22Dec20		

# INTERIOR TRIM AND DOORS

Invoice	Qty.	Description
2505	1	.**CUSTOM LAYOUT** BEDROOM 2: DELETE 'HIS' WIC, RELOCATE DOOR TO CREATE WIC FOR BEDROOM 2 - SEE PLAN FOR LOCATION
22Dec20 NoCat		
2505	1	.**CUSTOM LAYOUT** UPPER HALL - DELETE REACH-IN CLOSET FROM BEDROOM 2 - RELOCATE DOORS TO MAKE ACCESSIBLE FROM UPPER HALL. *LEAVE LINEN CLOSET* THIS WILL BE DOUBLE DOOR CLOSET *BESIDE LINEN CLOSET*
22Dec20 NoCat		
2505	1	.BREAKFAST ROOM: UPGRADE EXTERIOR GARDEN DOORS TO 96" *FRENCH DOOR* ASSEMBLY - BOTH DOORS OPEN
22Dec20 NoCat		
2505	1	.**CUSTOM LAYOUT** ADD SIDE ENTRANCE DOOR TO GARAGE - COMPLETE WITH LIGHT AND STANDARD FINISHES
22Dec20 NoCat		

DisciplineMS.rpt 23feb21 Page 10 of 14



Lot: 8

Model: 42.03 A FORESTCREST

Project/Phase: Pine Valley Forevergreen / 1

KITCHI		AND BATH CABINETRY Description						
2505 72,282 22Dec20 **	1	ADDITIONAL 220V RECEPTACLE ON A SEPARATE CIRCUIT - FOR BUILT-IN WALL OVEN - APPLIANCE NOT INCLUDED - DOES NOT INCLUDE BREAKER THAT IS TO BE INSTALLED BY LICENSED ELECTRICIAN AND ARRANGED BY HOMEOWNER AFTER CLOSING						
2505	1	**CUSTOM LAYOUT*** SPICE KITCHEN						
22Dec20 NoCat		NCLUDES POCKET DOORS + ELECTRICAL FOR COOKTOP+ COUNTER PLUGS + RELOCATE SINK - ASED ON STANDARD FINISHES (APPLIANCES AND HOOD FAN NOT INCLUDED)						
2583	1	SEE ATTACHED CABINETRY SCHEDULE						
16Mar21 NoCat								
2583	1	FYI - KITCHEN: ISLAND WATERFALL LEGS - UPGRADE 6						
16Mar21 NoCat								
2696 101,930	1	KITCHEN: EXTEND CABINET BASE + COUNTER BESIDE DISHWASHER + DELETE UPPERS AT LONG WALL						
14Apr21		SEE ATTACHED FOR REVSIED PLAN						
2797	1	KITCHEN: LAYOUT + PERSPECTIVE DRAWINGS - SIGNED COPIES						
07Jun21 NoCat								
2906	1	KITCHEN: SEE ATTACHED REVISED CABINETRY SCHEDULE						
14Sep21 NoCat								
MASON Invoice		Description						
2906	1	BREAKFAST ROOM: ***DELETE FROM PE #2505 - UPGRADE EXTERIOR GARDEN DOORS TO 96" *FRENCH DOOR* ASSEMBLY - BOTH DOORS OPEN***						
14Sep21 NoCat								
		AND WIRING						
Invoice		Description  GREAT ROOM: ADDITIONAL CAT6 ETHERNET OUTLET - EACH SEE PLAN FOR LOCATION						
2505 72,258 22Dec20	1	GREAT ROOM: ADDITIONAL CATO ETHERNET OUTLET - EACH SEE PLAN FOR LOCATION						
2505 72,259 22Dec20	1	GREAT ROOM: CONDUIT PIPE - FOR WALL MOUNT TV - LOCATE APPROX 66" A.F.F. ABOVE FIREPLACE, THRU BASEMENT, TERMINATE AT CABLE LOCATION - SEE PLAN						
2505 72,258 22Dec20	2	MASTER BEDROOM / BEDROOM 2: ADDITIONAL CAT6 ETHERNET OUTLET - EACH SEE PLAN FOR LOCATION						

DisciplineMS.rpt 23feb21 Page 11 of 14



Lot: 8

Model: 42.03 A FORESTCREST Project/Phase: Pine Valley Forevergreen / 1

# **PAINT**

PAIN I Invoice	Qty.	Description
2505 22Dec20	1	.**CUSTOM LAYOUT** BEDROOM 2: DELETE 'HIS' WIC, RELOCATE DOOR TO CREATE WIC FOR BEDROOM 2 - SEE PLAN FOR LOCATION
NoCat		
2505 22Dec20 NoCat	1	.**CUSTOM LAYOUT** UPPER HALL - DELETE REACH-IN CLOSET FROM BEDROOM 2 - RELOCATE DOORS TO MAKE ACCESSIBLE FROM UPPER HALL. *LEAVE LINEN CLOSET* THIS WILL BE DOUBLE DOOR CLOSET *BESIDE LINEN CLOSET*
2505	1	.***CUSTOM LAYOUT*** SPICE KITCHEN
22Dec20 NoCat		INCLUDES POCKET DOORS + ELECTRICAL FOR COOKTOP+ COUNTER PLUGS + RELOCATE SINK - BASED ON STANDARD FINISHES (APPLIANCES AND HOOD FAN NOT INCLUDED)
2505	1	.GREAT ROOM: MODEL OPTIONS 42.03 - GREAT ROOM - OPT. COFFERED CEILING AS PER PLAN
22Dec20 NoCat		
2505	1	.GREAT ROOM: MODEL OPTIONS 42.03 - GREAT ROOM - OPT. WAFFLE CEILING, BEAM DETAIL AS PER PLAN (8 BOXES) OPTION #1 CTR-B07
22Dec20 NoCat		
2505	1	.LIVING ROOM: MODEL OPTIONS 42.03 - LIVING ROOM - OPT. COFFERED CEILING AS PER PLAN
22Dec20 NoCat		
2505	1	.LIVING ROOM: MODEL OPTIONS 42.03 OPT. WAFFLE CEILING, BEAM DETAIL AS PER PLAN (4 BOXES) OPTION # 1 CTR-B07
22Dec20 NoCat		
2505	1	.BREAKFAST ROOM: UPGRADE EXTERIOR GARDEN DOORS TO 96" *FRENCH DOOR* ASSEMBLY - BOTH DOORS OPEN
22Dec20 NoCat		
2505	1	.**CUSTOM LAYOUT** ADD SIDE ENTRANCE DOOR TO GARAGE - COMPLETE WITH LIGHT AND STANDARD FINISHES
22Dec20 NoCat		
2583	2	MAIN STAIRS - 2ND FLOOR TO BASEMENT - STAIN STAIRS AND LANDINGS
16Mar21 NoCat		STAIRS AND LANDINGS WILL NOT MATCH HARDWOOD FLOORS IN COLOUR/TEXTURE/SPECIES
2906	1	BREAKFAST ROOM: ***DELETE FROM PE #2505 - UPGRADE EXTERIOR GARDEN DOORS TO 96" *FRENCH DOOR* ASSEMBLY - BOTH DOORS OPEN***
14Sep21 NoCat		

DisciplineMS.rpt 23feb21 Page 12 of 14



Lot: 8

Model: 42.03 A FORESTCREST

Project/Phase: Pine Valley Forevergreen / 1

# **PLUMBING**

Invoice	Qty.	Description
2505	1	KITCHEN: ADD COMPLETE BAR SINK TO ISLAND (SINK/FAUCET/PLUMBING) AT ISLAND - COMPLETE WITH STANDARD FINISHES
22Dec20 NoCat		
2505	1	.BACKFLOW PREVENTER VALVE
22Dec20 NoCat		
2505	1	.***CUSTOM LAYOUT*** SPICE KITCHEN
22Dec20 NoCat		INCLUDES POCKET DOORS + ELECTRICAL FOR COOKTOP+ COUNTER PLUGS + RELOCATE SINK - BASED ON STANDARD FINISHES (APPLIANCES AND HOOD FAN NOT INCLUDED)
2583	1	KITCHEN ISLAND: UPGRADE SINK BLANCO PRECIS U 3/4 BAR SINK
16Mar21 NoCat		SEE ATTACHED
2583	1	KITCHEN SINK: BLANCO PRECIS CASCADE U/M
16Mar21 NoCat		SEE ATTACHED
2583	1	SPICE KITCHEN: KITCHEN SINK - 'BLANCO QUATRUS R15 U MEDIUM' - STAINLESS STEEL
16Mar21 NoCat		SEE ATTACHED
2583 101,930	1	SPICE KITCHEN: MOEN 'SLEEK' FAUCET - CHROME
16Mar21		
2905	1	KITCHEN: ADD MOEN POT FILLER, ROUGH-IN INCLUDED
14Sep21 NoCat		SEE ATTACHED

DisciplineMS.rpt 23feb21 Page 13 of 14



Lot: 8

Model: 42.03 A FORESTCREST

**Project/Phase: Pine Valley Forevergreen / 1** 

# STAIR AND RAILINGS

Invoice	Qty.	Description
2583 93,800 16Mar21		MAIN STAIRS: UPGRADE - EURONLINE (ALL PLAIN) PICKET, 3" HALF-ROUND W/V-GROOVE HANDRAIL, 3 1/2" ALL SQUARE POST WITH PYRAMID TOP POST CAP - PACKAGE A-2

# WINDOWS AND DOORS

Invoice	Qty.	Description
2505	1	BREAKFAST ROOM: UPGRADE EXTERIOR GARDEN DOORS TO 96" *FRENCH DOOR* ASSEMBLY - BOTH DOORS OPEN
22Dec20 NoCat		
2505	1	.**CUSTOM LAYOUT** ADD SIDE ENTRANCE DOOR TO GARAGE - COMPLETE WITH LIGHT AND STANDARD FINISHES
22Dec20 NoCat		
2906	1	***REVISED DUE TO SITE CONDITION, DELETE FROM PE #2505 - BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME
14Sep21 NoCat		

DisciplineMS.rpt 23feb21 Page 14 of 14



# PV-8 Cabinetry Schedule Amended September 14th, 2021

ROOM	DESCRIPTION	PRICE QTY	TOTAL
KITCHEN	ADD ITEM: UPGRADE APPLIANCE HARDWARE - BAH-053-09	2	
	- House	CABINETRY TOTAL:	

GOLDPARK WORTH HOLE




# BAH-053-09

# Appliance Pull - 'Brushed Gold'



-> ki	Lahan			
- KI	CIRM			
	(+)			

LOT#	DATE: Sept- 14, 2021	
SIGNATURE:	see attach.	
SIGNATURE:		

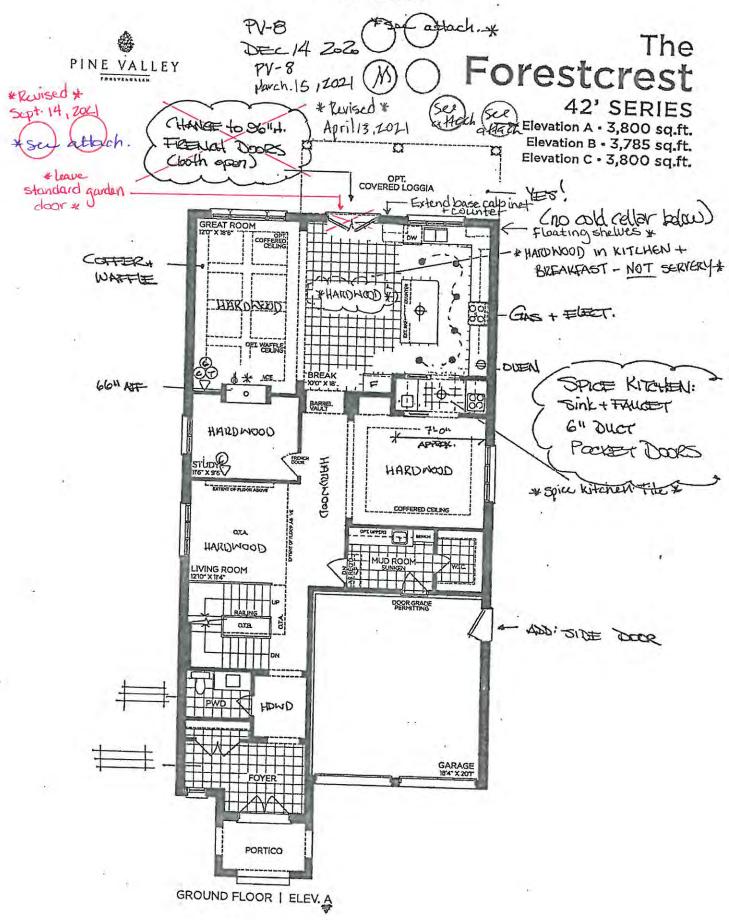

VENDOR	
PURCHASER	
PURCHASER	

# GOLDPARK

WORTH MORE

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4203




\*Sept. 14,2021 \*

PV-8 DEC 14 222 March, 15,2021 April 13,2021


The Forestcrest 42' SERIES

Elevation A • 3,800 sq.ft. Elevation B . 3,785 sq.ft. Elevation C • 3,800 sq.ft.

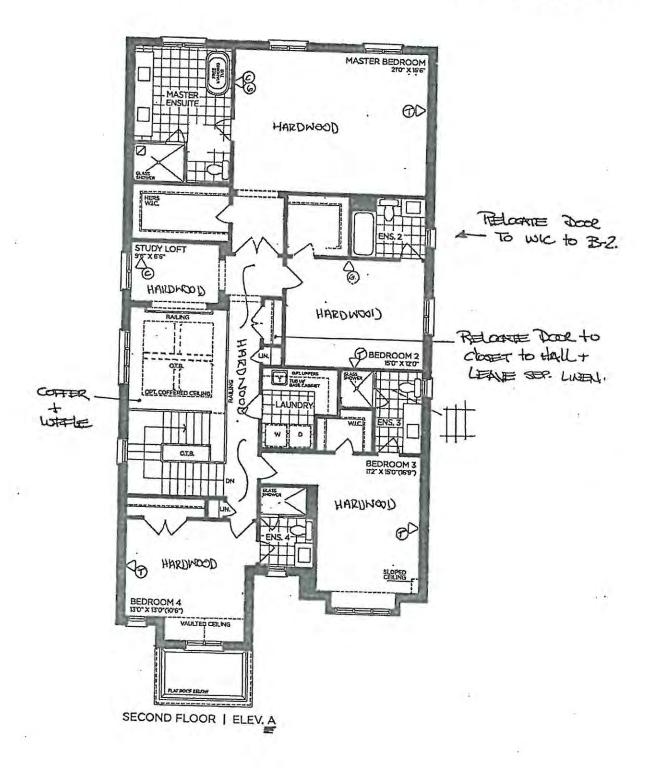

**VENDOR PURCHASER PURCHASER**  GOLDPARK WORTH MORE

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice, Areas and dimensions are approximate and actual usable floor space may vary from the stated area, Layout may be reverse of the unit purchased. E. & O.E. 4203

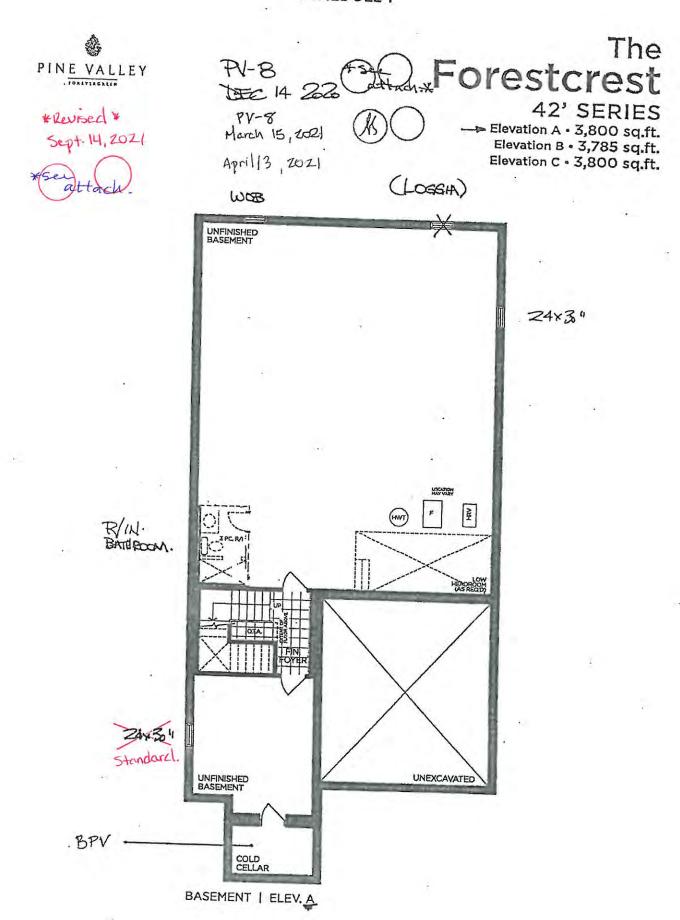

VENDOR	
PURCHASER	
PURCHASER	

# GOLDPARK

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area, Layout may be reverse of the unit purchased. E. & O.E. 4203



#### PV-8 Cabinetry Schedule Amended September 14th, 2021

RODM	DESCRIPTION ::	FRICE GTY TOTAL
KITCHEN	ADD ITEM; UPGRADE APPLIANCE HARDWARE - BAH-053-09	
The contest to the same of the contest	m - war - wa	CABINETRY TOTAL:

LOT#: PV-8	DATE: Sept. 14,2021	
SIGNATURE:		
SIGNATURE:		

GOLDPARK

REVISEO:




#### BAH-053-09

# Appliance Pull - 'Brushed Gold'



LOT# PV-8	DATE: Sept. 14, 2021	
SIGNATURE:	K)	,
SIGNATURE: (		

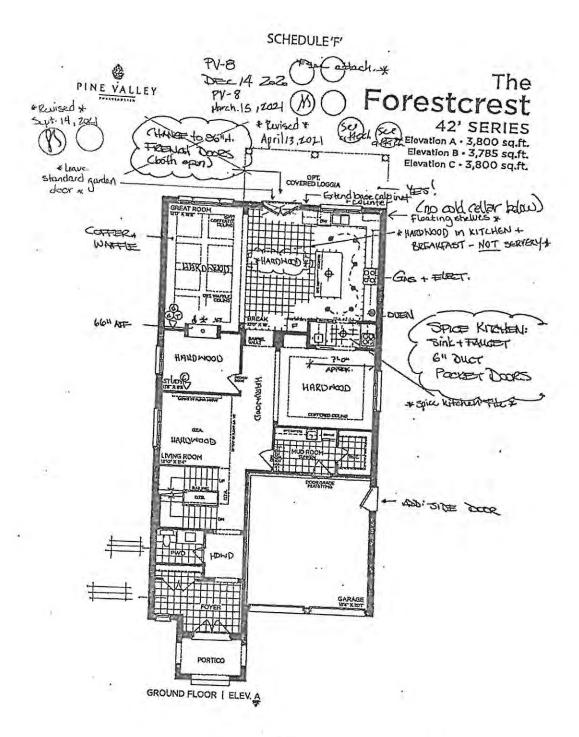


VENDOR _	
PURCHASER	
PURCHASER	

GOLDPARK

Prices, figures, flustrations, sizes, features and finisher are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may yary from the stated area. Layout may be reverse of the unit purchased. E. A.O.E. 4203






The Forestcrest

42' SERIES


→ Elevation A • 3,800 sq.ft.
Elevation B • 3,785 sq.ft.
Elevation C • 3,800.sq.ft.

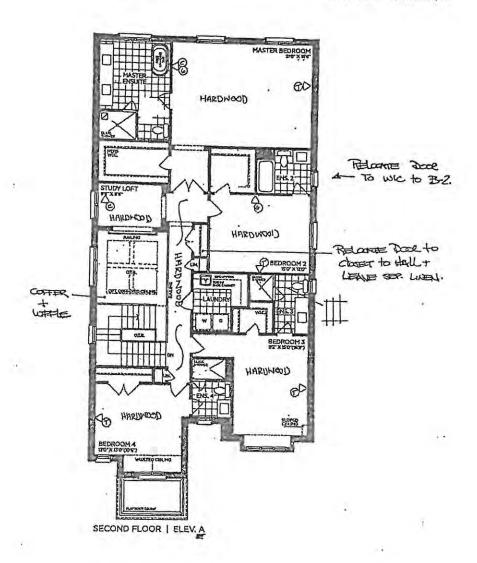

VENDOR · PURCHASER PURCHASER

GOLDPARK

Priors, figures, libetrations, sizes, features and finishes are subject to change without notice. Areas and ditinariations are approximate and actual usable floor appear may very from the stated erec. Loyout may be reverse of the unit purchased. E. & O.E. & 20.3

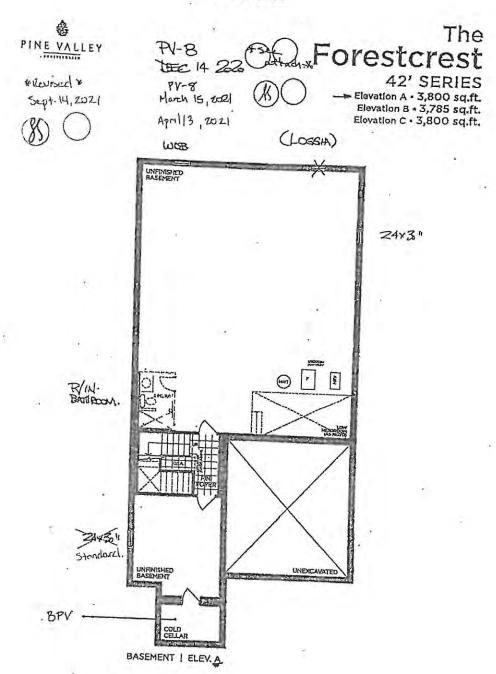

VENDOR
PURCHASER
PURCHASER

GOLDPARK

rrica, ingures, distriblions, sizes, features and finishes are subject to change without notice, from the stated area, Layout may be reverse of the unit purchased. E. & O.E. And

}	STANDARD 2CM EASED EDGE	LOCATION: THRU-OUT
	UPGRADE 3CM EASED EDGE * REVISED *	LOCATION:  * Kitchen/Servery + Backglash  * Powder Room
	UPGRADE 4CM MITRED EDGE	LOCATION:
	UPGRADE 2CM OGEE EDGE	LOCATION:

LOT#: PV - 8	DATE: March 15, 202)	
SIGNATURE:	June 9, 2021 x see attach. *	
SIGNATURE:		

GOLDPARK	INT	ERIOR COLOUR SCHEME	
WORTH MORE		approved document. Document mu	st be locked **
Purchasers: SUK	Sche	eduled Closing Date: May 20, 2021	
	HJITPAL SINGH & JASKARAN		
	7) 703-9131	Project: Pine Valley Forevergre	
		fodel and Elevation: 42.03 A FORESTCRES	ST.
Layout Changes: Yes	No Sketch Attached:	Yes No Exterior Colour Scheme:	
1. Cabinetry— —	Style and Colour	Counter	
Kitchen / Breakfast	2-TONE	*2-TONE	Hardware attched
Laundry Room	Wexford 'Tan'	P-Lam: Standard White	attched
Powder Room	Chesapeake 'Classic White'	*Quartz: Nordic Loft	attched
SPICE KITCHEN	Chesapeake 'Classic White'	*Quartz: Arctic White HP	attched
Master Ensuite Bathroom	Alban Oak Storm Grey'	Quartz: Ice Snow	attched
Second Ensuite	Chesapeake 'Pewter'	**************************************	
Bathroom (If Applicable)	Ouesaheake Lewiel	*Quartz: Ice Snow	attched
Ensuite 3	Alban oak 'Storm Grey'	Quartz: Jet Black	attched
Comment		land: Medio 6 'Oyster' + Quartz: Etemal Noir // Ensulte 4	
2. Floor Tile — — Entrance Vestibule	Selection		
Main Hall	*12x24" Reve 'Nuit' + charcoal	grout	
Kitchen / Breakfast	hardwood		
Laundry Room	13x13" Venus 'Brown'		
Powder Room	*12x24" Marmorea matte 'Port	l aurant + charged arent	
Spice Kitchen	13x13" New Reeds 'Taupe'	Edutent + Charcoal grout	=====
Master Ensuite Bathroom	8x8" Marakesh Decor Mix 1 M	offe of the second of the seco	
Second Ensuite	13x13" Cambridge 'White' Mat		
Bathroom (If Applicable)  Lower Landing			]
(If Applicable)	13x13" New Reeds 'Taupe' (ba	sement foyer)	
Ensuite 3	12x24" Marmorea 'Port Lauren	t' matte + charcoal grout	
Comment	- The second sec		
Mind Koolli, 19X13, New Keeds , la	tupe' // Ensuite 4: 13x13" Serpentine 'Bey	az' white // Shower Floors thru out: Standard 2x2" white	1
	*REVISED*	+ Ensuite 3 Shower Floor gr	out: charcoa
	May 26,2021	Ü	
3. Wall Tile	attagret )		
Ensuite 3	Selection	Listello/Inserts Describe	
Master Ensuite Bathroom	Enter Maria William Politico	al grou O res O No [	
Tub De	The same of the sa	O Yes  No	
Shower St	tall-8x24"-Laguna-White-Wave-	O Yes No	
Bathroom Wa Second Ensuite	ulls 4 Lingt White ha	He O Yes No	
Bathroom (If Applicable)	8x10" Weave 'White'	O Yes No	
Ensuite 4	8x10" Weave 'White'	○ Yes ● No	
Kitchen Backsplash	Yes O No	Backsplash Behind Fridge	
Comment	FHBS same as island		
SPICE KITCHEN BACKSPLASH: F	HBS same as spice kitchen counter; Arc	tic White	
		* Rivised *	

GOLDPAI	RK .	INTERIO	OR COLOUR SCHI	EME . Document must be I	
		Schedule	d Closing Date: May	v 20. 2021	ocked *
Purchasers:	SUKHJITPAL SING	H & JASKARAN SING	GH Property: 8 o		
Telephone Res. / Bus:				e Valley Forevergreen - Pha	se 1
Decor Advisor:	Yolande Somerville	Model	and Elevation: 42.0	3 A FORESTCREST	
4. Plumbing Fixt	ures — — — —				
Master Ensuite Bat	hroom	Second Ensuite Other Room - Speci	fv — —	Powder Room Other Washroom	
Comment					:
5. Hardwood Floo	oring			· · · · · · · · · · · · · · · · · · ·	
	Type and Stain	-			
Main Hall		Upp	er Landing	ype and Stain	
Kitchen / Breakfast	*3/4x5" White oak so	ulpted 'Apollo' Upp	er Hall		
Living Room			4		
Dining Room			ter Bedroom		
Family Room	<u></u>		room #2	- 14	
Den/Library			room #3		
Entrance Vestibule			room #4		
Lower Landing (If Applicable)			room #5 er Room - Specify		
			out standard areas	3/4x5" White oak sculpted '/	Apollo'
Comment					
6. Carpeting —	Upgrade	Description			
Ground Floor					
Second Floor					
					denne ar in
Upgrade Underpad	Туре		Area		
2	Capped		Runner - *Upgra		
Carpet on Stairs				aug	
Comment					
7. Fireplace					
Livi	ng Room	Family Room		Other Room - Specify	
	Purchased As Per Plan	VA Purchased	As Per Plan N/A	Purchased As Per Plan	N/A
Fireplace Type		Standard G	0		•
Mantle Type		Mediterrane			
Colour / Stain		Arctic White			
Surround [		n/a	_======================================		
Hearth		none			
Comment					
	( 1				
= (M) ( A)	tach			June 9,20	2
	rMarch 17,20	21			12.54

Printed 2021-03-15 14:53:50 May 26, 2021



GOLDPAR	? K	INTERIOR	COLOUR SCI	HEME
WORTH	MORE *** NOTE: Th	is is not an approv	ed documen	nt. Document must be locked **
Purchasers:		Scheduled C	losing Date: M	lay 20, 2021
Telephone Res. / Bus:	1/647\ 702 0424	& JASKARAN SINGH		
Decor Advisor:	Yolande Somerville		Project: Pi	ine Valley Forevergreen - Phase 1
	Totalide Softferville	Model an	d Elevation: 42	2.03 A FORESTCREST
8. Trim Carpentry	<i>j</i>	· · · · · · · · · · · · · · · · · · ·		
		Door Glass Inserts sta		
Interior Trim stan	dard J_From	Door Glass Inserts Sta	andard	Door Handles standard
Comment	uaru ———.		<del>,</del>	
9. Plaster Mouldin	ngs and Medallion			
Standard Througho		N/A		
		— N/A		
Entrance Vestibule		Kitchen	/Breakfast	
Main Hall		Den/Lib	rary	
Living Room		LowerL	anding	
Dining Room		Other R	oom - Specify	
Family Room	l][_			j
Comment				
	, , , , , , , , , , , , , , , , , , ,			
*				
10. Railings and S	pindles — —			
Railing Package A-2				
	opscotch			
	opscotch		Spindle Colour	
9.0	opposition		Treads	*Hopscotch
Comment			Dak Stairs	Yes O No O N/A
_	<u> </u>	-10		
11. Wall Paint / Ce				
Throughout Finished	Areas Cool White			
	L			]
Trim Paint W	hite			
Smooth Ceilings				
Ground Floor	<b>V</b>			
Second Floor	N N			
Note				- Annual
	1,			
Comment				
-	<del></del>			
		The second secon		

Printed 2021-03-15 14:53:50 May 26, 2021 attach

June 9, 2021

worth urchasers:	MORE *** NOTE: Th	
	more.	is is not an approved document. Document must be locked
lephone Res / Rue-	SUKHJITPAL SINGH	Scheduled Closing Date: May 20, 2021 & JASKARAN SINGH Property: 8 of Plan -
ferrent a transit Day.	/ (647) 703-9131	
ecor Advisor:	Yolande Somerville	Project: Pine Valley Forevergreen - Phase 1 Model and Elevation: 42.03 A FORESTCREST
2 Element		
2. Electrical — Hood Fan O Wh		
		N/A Above Kitchen Cabinet Light O Yes N Below Kitchen Cabinet Light O Yes N
Standard Appliance		
Over The Range Mic	rowave	
Chimney Style Fan		
Comment		
3. Heating and A	ir Conditioning	
Air Conditioning	no	Gas Provisions Stove yes
Gas Provisions Drye Comment	er no	Gas Provisions Barbecue std
J. Additional Cor	mments	
Ř.		
		Y .
		···
. Disclaimers an	id Notes ———	
		ilder's selection, but not necessarily identical due to variances in manufacturing.
Any extras listed above a	re null and void unless accord	npanied by a separate invoice/amendment. Said invoice must be paid in full
		Selection form is signed and dated, no further changes will be permitted other Purchaser's Initials
	-and reading and accepting the	he *Gold Park Homes Decor Centre Disclaimers* form. This document contains
The Purchaser acknowled other miscellaneous disc		•
The Purchaser acknowled other miscellaneous discrimis Interior Colour Selection	on is final and approved by:	
The Purchaser acknowled other miscellaneous disc	on is final and approved by:	=: March 15, 2021 June 9, 2021 = March 17: 2021



# STONE COUNTERTOP EDGE PROFILES

STANDARO 20M EASED EDGE	LOCATION: THRU-OUT
upgrade 30Meased edge - Pravisco 4	witchen/servery + Bactedach  * Powder Room
UPGRADE 4CM MITRED EDGE	LOCATION:
Upgrade 2CM oger edge	LOCATION:
DATE: Warch 15,	
	UPGRADE 3CM FASED EDGE  FRANCE C. J.  UPGRADE 4CM MITTED EDGE

GOLDPARK



# MOEN - MODERN

Pot Filler




CHROME	
STAINLESS (SRS)	
BRUSHED GOLD (BG)	
MATTE BLACK (BL)	
MODEL: S665 (SRS, BG, BL) Pot Filler	
Lot# PV-8 Date: Sept-13,2021	Room: Kitchen
Signature: oser attach.	
Signature:	



#### MOEN - MODERN

Pot Filler



CHROME		
STAINLESS (SRS)		
BRUSHED GOLD (BG)		
MATTE BLACK (BL)		
MODEL: 5665 (SRS, BG, BL) Pot Filler		

Lot# PV-8	Date: 52pt- 13, 2021	Room: Kitchen	
Signature:	8)		
Signature:	Ó		

GOLDPARK


GOLDPARK WOATH HOR	*** NOTE: This is n	INTERIOR COLOUR SCHEME ot an approved document Docum	ent must be locked *
urchasers: SI		Scheduled Closing Date: May 20, 2021	- Isonou
	JKHJITPAL SINGH & JAS	KARAN SINGH Property: 8 of Plan -	
elephone Res. / Bus: / (l Decor Advisor: Yol		Project: Pine Valley Fo	
	lande Somerville	Model and Elevation: 42.03 A FORE	STCREST
ayout Changes: O Yes	O No Sketch Attac	ched: Yes No Exterior Colour Sc	heme:
1. Cabinetry—	Style and Colour	Counter	
Kitchen / Breakfast		2-TONE	Hardware
Laundry Room	Wexford 'Tan'		altched
Powder Room	Chesapeake 'Classic W	P-Lam: Standard White	attched
SPICE KITCHEN	Chesapeake 'Classic W		attched
Master Ensulte	Alban Oak Storm	Hille Quartz Arotlo White HP	attched _
Bathroom	Alban oak 'Storm Grey'	Quartz Ice Snow	lattched
Second Ensulte	. 85		
Bathroom (If Applicable	Chesapeake 'Pewter'	Quartz Ice Snow	lattched
Ensuite 3	Alban oak 'Storm Grey'	Quartz Jet Black	
Comment		Otchen Island: Modio 6 "Oyster" + Quartz Eternal Noir //	attched
Floor Tile			
	Selection		
Entrance Vestibule	"12x24" Reve 'Nuit' + c	harcoal grout	
Main Hall			
Kitchen / Breakfast	. hardwood		
Laundry Room	13x13" Venus 'Brown'		-====
Powder Room	"12x24" Marmorea ma	te 'Port Laurent' + charcoal grout	
Spice Kitchen Master Ensuite	13x13" New Reeds Tai	upe'	
Bathroom	8x8" Marakesh Decor N	Mix 1 Matte	
Second Ensulte Bathroom (if Applicable)	6-1-1-1		
Lower Landing (If Applicable)	13x13" New Reeds Tax	upe' (basement foyer)	
Ensuite 3	12x24" Marmorea 'Port	Laurent' malta + charcoal grout	
Comment			
Mud Room: 13x13" New Roeds	Taupe // Ensuite 4: 13x13" Serpe	none Beyaz white If Shower Floors thru out Standard.	2-28 u.bit.
	*REVISED*	+ Ensuite 3 Shower Fl	
	May 26,2021		die Chimicon
. Wall Tile			
	Selection	Listello/inserts Describe	
Ensulte 3	8x10" Weave 'White'	+ chrcoal grout O Yes No	
Master Frenita Dather	The second secon		
Master Ensuite Bathroom Tub I	Deck:	1000	
Tub I		Wayel O Yes No	THE
Tub I Shower Bathroom V	Stall-8x24 Laguna-White-	Wave O Yes No	
Tub I Shower Bathroom V Second Ensuite	Stall-8x24 Laguna White- Nalls Lindt Whit	Wave O Yes No	
Tub I Shower Bathroom V Second Ensuite Bathroom (If Applicable)	Stall-8x24" Laguna White- Nalls	Wave O Yes No	
Tub I Shower Bathroom V Second Ensuite Bathroom (If Applicable) Ensuite 4	Stall-8x24* Laguna-White- Walls L. 10d+ 'White' 8x10* Weave White'	Wave O Yes No	
Tub I Shower Bathroom V Second Ensuite Bathroom (If Applicable) Ensuite 4	Stall-8x24" Laguna - White- Nalls . Li Odt 'White' 8x10" Weave White' 8x10" Weave 'White' Yes O No	Wave! O Yes O No  P.' MgHe O Yes O No  O Yes O No  Backsplash Behind Frice	lge
Tub I Shower Bathroom V Second Ensuite Bathroom (If Applicable) Ensuite 4 Kitchen Backsplash Comment	Stall-8x24" Laguna - White- Nalls . Li Odt 'White- 8x10" Weave White- 8x10" Weave "White- Yes O No FHBS same as Island	Wave! ○ Yes ○ No ☐  r.' MgHe ○ Yes ○ No ☐  ○ Yes ○ No ☐  ○ Yes ○ No ☐  Backsplash Behind Frice	dge
Tub I Shower Bathroom V Second Ensuite Bathroom (If Applicable) Ensuite 4 Kitchen Backsplash Comment	Stall-8x24" Laguna - White- Nalls . Li Odt 'White' 8x10" Weave White' 8x10" Weave 'White' Yes O No	Wave!	
Tub I Shower Bathroom V Second Ensuite Bathroom (If Applicable) Ensuite 4 Kitchen Backsplash Comment	Stall-8x24" Laguna - White- Nalls . Li Odt 'White- 8x10" Weave White- 8x10" Weave "White- Yes O No FHBS same as Island	Wave! O Yes No  Yes No  Yes No  O Yes No  Backsplash Behind Fric	ed *
Tub I Shower Bathroom V Second Ensuite Bathroom (If Applicable) Ensuite 4 Kitchen Backsplash Comment SPICE KITCHEN BACKSPLASH	Stall-8x24" Laguna - White- Nalls . Li Odt 'White- 8x10" Weave White- 8x10" Weave "White- Yes O No FHBS same as Island	Wave Yes No  P. MgHe Yes No  Yes No  Yes No  Backsplash Behind Frice  White	ed #


Printed 2021-03-15 14:53:50

GOLDPAR	*** ***	INTERI			
WORTH	MORE *** NOTE:	This is not an app	roved docume	ent. Document m	ust be locked
Purchasers:	SUKHJITPAL SING	Schedule	ed Closing Date:	May 20, 2021	
Telephone Res. / Bus;		n a jaskaran sin		8 of Plan -	
Decor Advisor:	Yolande Somerville	Mode	Project:	Pine Valley Forevergr	een - Phase 1
<del></del>	· · · · · · · · · · · · · · · · · · ·		and Elevation:	42.03 A FORESTORE	EST
4. Plumbing Fixto	ures — — - —	·			
		Second Ensuite		Powder Room	[—————————————————————————————————————
Master Ensuite Bath	hroom	Other Room - Spec	ify -		L
Comment	X			Other Washroom	
see extras					
		- 12-			
. Hardwood Floo	oring				
	Type and Stain			Total	
Main Hall		Upj	er Landing	Type and Stain	
Kitchen / Breakfast	*3/4x5" White oak so	ulpted 'Apollo' Up	per Hall		
Living Room			ster Bedroom		
Dining Room			lroom #2	ļ. ————————————————————————————————————	
Family Room			lroom #3	<u> </u>	
Den/Library			room #4		· · <u> ·</u>
Entrance Vestibule		A CONTRACTOR OF THE PARTY OF TH	room #5		· An o
Lower Landing			er Room - Specif	<u> </u>	
(If Applicable)		— - — Thru	out standard area	*3/4x5" White oak	culpted 'Apollo'
Comment				2	A Secretary Secretary Secretary
1					
Cornetius		•			
	Upgrade	Description			70
Ground Floor	Upgrade	Description			
그 시간 시간 아이들이 가득하는 것이다.	Upgrade	Description			
Ground Floor	Upgrade	Description			
Ground Floor Second Floor	Upgrade	Description	Area		
Ground Floor Second Floor		Description	Area		
Ground Floor Second Floor  Upgrade Underpad		Description		porade	
Ground Floor Second Floor  Upgrade Underpad Carpet on Stairs	Type	Description	Area Runner - *U	pgrade	
Ground Floor Second Floor  Upgrade Underpad Carpet on Stairs	Type	Description		pgrade	
Ground Floor Second Floor  Upgrade Underpad Carpet on Stairs	Type	Description		pgrade	
Ground Floor Second Floor  Upgrade Underpad Carpet on Stairs	Type	Description		pgrade	
Ground Floor Second Floor Upgrade Underpad Carpet on Stairs Comment	Type	Description		pgrade	
Ground Floor Second Floor Upgrade Underpad Carpet on Stairs Comment Fireplace	Type		Runner • *U		
Ground Floor Second Floor Upgrade Underpad Carpet on Stairs Comment Fireplace	Type Capped	Purchaser	Runner - *U	Other Room - Sp	
Ground Floor Second Floor Upgrade Underpad Carpet on Stairs Comment Fireplace Livin	Type Capped Purchased As Per Plan	Family Room VA Purchaser	Runner • *U	Other Room - Sp	PerPlan N/A
Ground Floor Second Floor Upgrade Underpad Carpet on Stairs Comment Fireplace Livin	Type Capped Purchased As Per Plan	Family Room WA Purchased Standard G	Runner - *U  As Per Plan N/A  Sas	Other Room - Sp	the error many to
Ground Floor Second Floor Upgrade Underpad Carpet on Stairs Comment Fireplace Livin	Type Capped Purchased As Per Plan	Family Room VA Purchaser	Runner - *U  As Per Plan N/A  Sas	Other Room - Sp	PerPlan N/A
Ground Floor Second Floor Upgrade Underpad Carpet on Stairs Comment  Fireplace Livin Fireplace Type Wantle Type Colour / Stain	Type Capped Purchased As Per Plan	Family Room WA Purchased Standard G	Runner • *U  As Per Plan N/A  Cas	Other Room - Sp	Per Plan N/A
Ground Floor Second Floor Upgrade Underpad Carpet on Stairs Comment  Fireplace Livin Fireplace Type Colour / Stain Surround	Type Capped Purchased As Per Plan	Family Room WA Purchase  Standard G  Mediterrane	Runner • *U  As Per Plan N/A  Cas	Other Room - Sp	Per Plan N/A
Ground Floor Second Floor Upgrade Underpad Carpet on Stairs Comment  Fireplace Livin Fireplace Type Mantle Type Colour / Stain Surround Hearth	Type Capped Purchased As Per Plan	Family Room WA Purchaser Standard G Mediterrand Arctic White	Runner • *U  As Per Plan N/A  Cas	Other Room - Sp	Per Plan N/A
Upgrade Underpad Carpet on Stairs Comment Fireplace	Type Capped Purchased As Per Plan	Family Room WA Purchased Standard C Mediterrand Arctic White	Runner • *U  As Per Plan N/A  Cas	Other Room - Sp	Per Plan N/A
Ground Floor Second Floor Upgrade Underpad Carpet on Stairs Comment  Fireplace Livin Mantle Type Colour / Stain Surround Hearth	Type Capped Purchased As Per Plan	Family Room WA Purchased Standard C Mediterrand Arctic White	Runner • *U  As Per Plan N/A  Cas	Other Room - Sp	Per Plan N/A
Ground Floor Second Floor Upgrade Underpad Carpet on Stairs Comment  Fireplace Livin Mantle Type Colour / Stain Surround Hearth	Type Capped Purchased As Per Plan	Family Room WA Purchased Standard C Mediterrand Arctic White	Runner • *U  As Per Plan N/A  Cas	Other Room - Sp	s Per Plan N/A

		Q,	n approve	alan Date.	Mr. on anne	
chasers:	SUKHJITPAL SIN	NGH & JASKAR	Cheduled Cit		May 20, 2021 8 of Plan -	
phone Res. / Bus:	/ (647) 703-9131				Pine Valley Forevergn	non Chass 1
or Advisor:	Yolande Somervi		Madal and		42.03 A FORESTCRE	
					42.03 A FORESTORE	
Trim Carpentr						
Interior Doors Car	rara std	Front Door Glass	s Inserts star	ndard	Door Handles sta	ndard
	ndard					
Comment						
			====			
Plaster Mould						
Standard Through	out O Yes O	No @ N/A				
Entrance Vestibule		J	1	2.42.0	و و سند سرو	
Main Hall	* <del> =</del>	1		Breakfast		
Living Room	ļ=		_ Den/Libi			
Dining Room	}=====================================	╬┈╌	LowerL	(1) (1) (1) (1) (1) (1) (1) (1) (1) (1)		L J
Family Room	7.57 =	:: -:: =: =	Other Ro	oom - Spec	[y []	
Comment					4	
				1		
0. Railings and	A-2 package			===		
Railing Package   Railing Colour				Spindle Col Treads Oak Stairs	our Black Hopscotch	No () N/A
Railing Package Railing Colour Stringer / Riser	A-2 padage Hopscotch			Treads	Hopscotch	No O N/A
Railing Package Railing Colour Stringer / Riser	A-2 padage Hopscotch			Treads	Hopscotch	No () N/A
Railing Package Railing Colour Stringer / Riser	A-2 padage Hopscotch			Treads	Hopscotch	No () N/A
Railing Package Railing Golour Stringer / Riser Comment	A-Z padząs "Hopscotch "Hopscotch			Treads	Hopscotch	No O N/A
Railing Package   Railing Colour   Stringer / Riser Comment	A-Z package  "Hopscotch "Hopscotch  Cellings			Treads	Hopscotch	No () N/A
Railing Package Railing Golour Stringer / Riser Comment	A-Z package  "Hopscotch "Hopscotch  Cellings	'hite		Treads	Hopscotch	No () N/A
Railing Package   Railing Colour   Stringer / Riser Comment	A-Z package  "Hopscotch "Hopscotch  Cellings	hite		Treads	Hopscotch	No O N/A
Railing Package   Railing Colour   Stringer / Riser Comment	A-Z package  "Hopscotch "Hopscotch  Cellings	Thite		Treads	Hopscotch	No O N/A
Railing Package Railing Colour Stringer / Riser Comment  1. Wall Paint / Throughout Finish	A-Z padoga  Hopscotch  Hopscotch  Ceilings  ned Areas Cool W	hite		Treads	Hopscotch	No () N/A
Railing Package Railing Colour Stringer / Riser Comment  1. Wall Paint / Throughout Finis Trim Paint Smooth Ceilings	Az padoga Hopscotch Hopscotch Ceilings ned Areas Cool W	hite		Treads	Hopscotch	No O N/A
Railing Package Railing Colour Stringer / Riser Comment  1. Wall Paint / Throughout Finish Trim Paint Smooth Ceilings Ground Flo	AZ padoga Hopscotch "Hopscotch Cellings ned Areas Cool W	hite		Treads	Hopscotch	No O N/A
Railing Package Railing Colour Stringer / Riser Comment  1. Wall Paint / Throughout Finis Trim Paint Smooth Ceilings	AZ padoga Hopscotch "Hopscotch Cellings ned Areas Cool W	'hite		Treads	Hopscotch	No O N/A
Railing Package Railing Colour Stringer / Riser Comment  1. Wall Paint / C Throughout Finis Trim Paint Smooth Ceilings Ground Finis Second Finis	AZ padoga Hopscotch "Hopscotch Cellings ned Areas Cool W	hite		Treads	Hopscotch	No O N/A
Railing Package Railing Colour Stringer / Riser Comment  1. Wall Paint / C Throughout Finis Trim Paint Smooth Ceilings Ground Finis Second Finis	AZ padoga Hopscotch "Hopscotch Cellings ned Areas Cool W	hite		Treads	Hopscotch	No O N/A
Railing Package Railing Colour Stringer / Riser Comment  1. Wall Paint / Throughout Finish Trim Paint Smooth Ceilings Ground Flo Second Flo Note	AZ padoga Hopscotch "Hopscotch Cellings ned Areas Cool W	hite		Treads	Hopscotch	No O N/A
Railing Package Railing Colour Stringer / Riser Comment  1. Wall Paint / Throughout Finish Trim Paint Smooth Ceilings Ground Flo Second Flo Note	AZ padoga Hopscotch "Hopscotch Cellings ned Areas Cool W	hite		Treads	Hopscotch	No O N/A
Railing Package Railing Colour Stringer / Riser Comment  1. Wall Paint / Throughout Finish Trim Paint Smooth Ceilings Ground Flo Second Flo Note	AZ padaga Hopscotch Hopscotch Cellings ned Areas Cool W White	hite		Treads	†Hopscotch	
Railing Package Railing Colour Stringer / Riser Comment  1. Wall Paint / Throughout Finish Trim Paint Smooth Ceilings Ground Flo Second Flo Note	AZ padaga Hopscotch Hopscotch Cellings ned Areas Cool W White			Treads	†Hopscotch	No ON/A
Railing Package Railing Colour Stringer / Riser Comment  1. Wall Paint / Throughout Finish Trim Paint Smooth Ceilings Ground Flo Second Flo Note	Azpadoga Hopscotch Hopscotch Cellings ned Areas Cool W White	17, 2021 26, 2011 (a		Treads	†Hopscotch	


WORTH M	ORE HOTE, IN	Scheduled C	ed document. Document mu losing Date: May 20, 2021	st De locked
		& JASKARAN SINGH		
lephone Res. / Bus:	(647) 703-9131		Project: Pine Valley Forevergree	en - Phase 1
cor Advisor:	folanda Somervilla	Model an	d Elevation: 42,03 A FORESTCRES	T
2. Electrical			<del></del>	
Hood Fan O White	Stainless (	N/A	Above Kitchen Cabinet Light Below Kitchen Cabinet Light	
Standard Appliances				
Over The Range Micro	owaye [			
Chimney Style Fan				
Comment				
3. Heating and Air				
Air Conditioning	, no	G:	as Provisions Stove yes	
Gas Provisions Dryer Comment	ño - ·		as Provisions Barbecue std	
		<del></del>		
Additional Com	manta	*	7	
· — — —	ments			
		1 . 7		
		7.6		
	111	Letin.	i v	
				1
			*	
	- 4	1.16		
			<u> </u>	
Disclaimers and	Notes			
		fer's salartion, but not pacer	adly identical due to variances in manufecturir	
			mendment. Sald invoice must be paid in full.	·u•
	s that after interior Colour :		aled, no further changes will be permitted other	or
	es reading and accepting th		entre Disclaimers" form, This document contai	ins
The Purchaser acknowledge other miscallaneous disciple			-	
other miscalianeous discial	Is final and approved by:			
ls Interior Colour Selection		1 1 16	and the Property of the Control of t	
other miscalianeous discial		March 15,2021 March 17,202	June 9,2021	

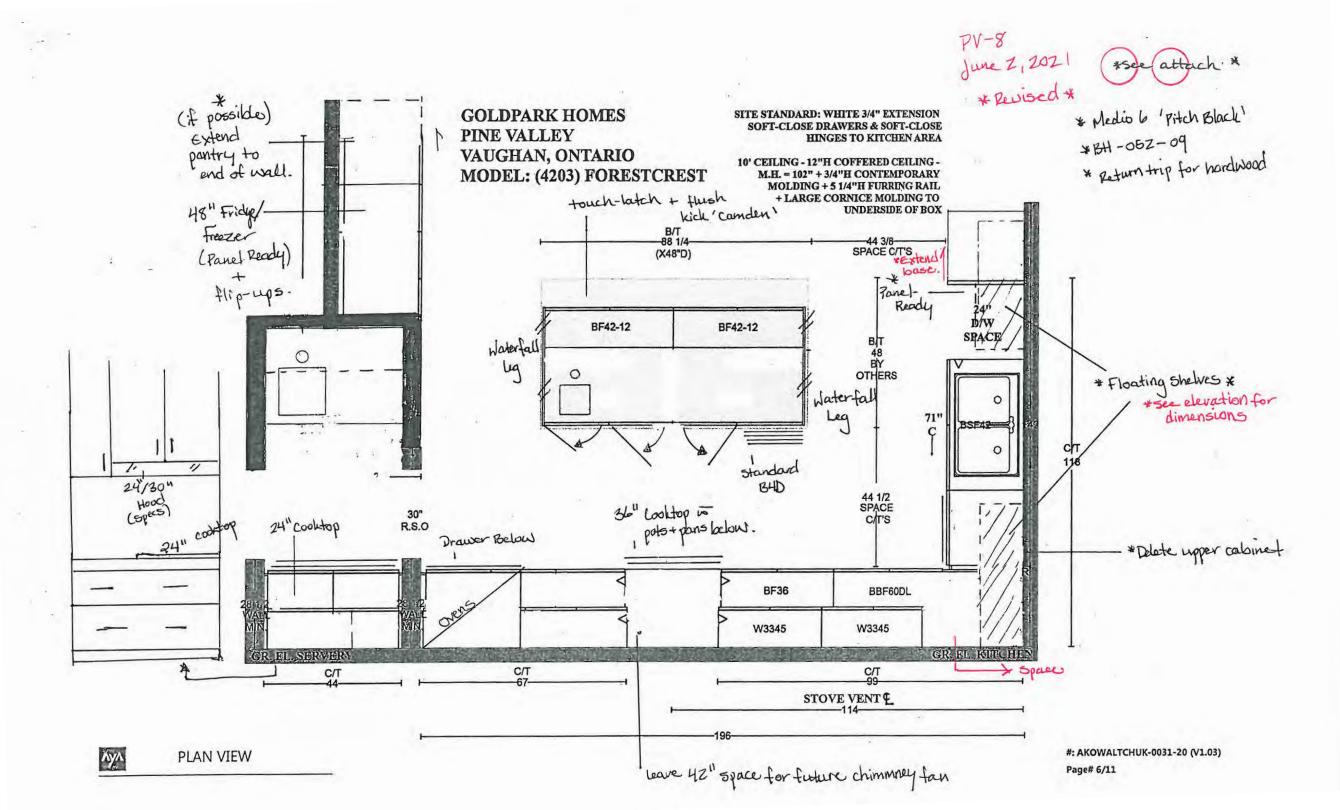

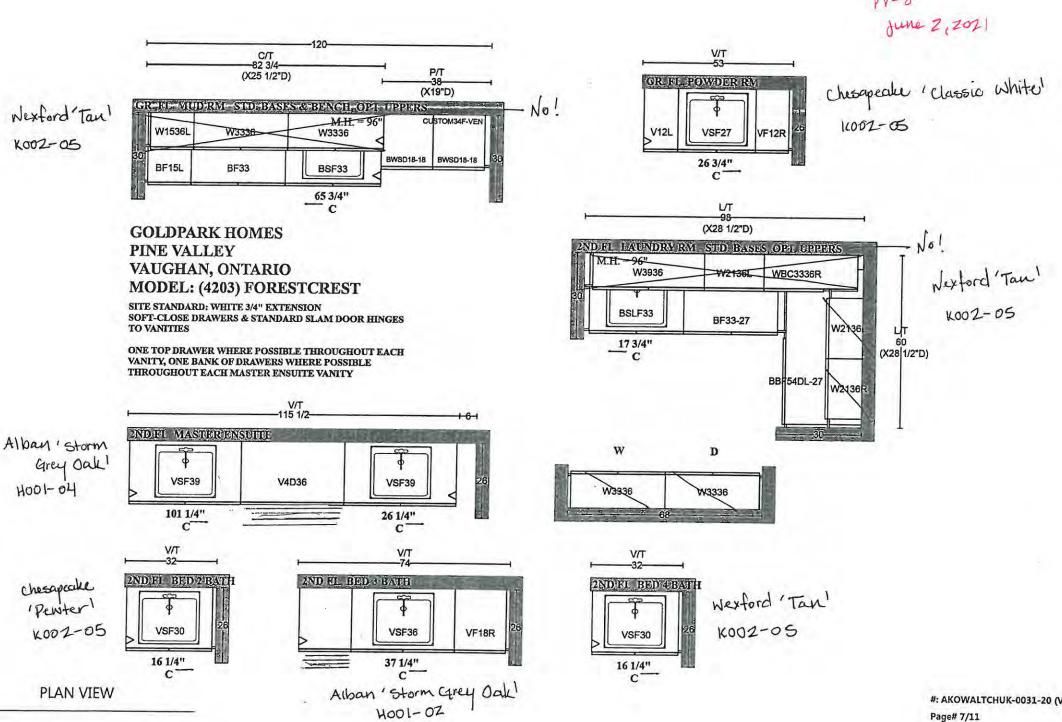


**PLAN VIEW** 

#: AKOWALTCHUK-0031-20 (V1.03) Page# 7/11

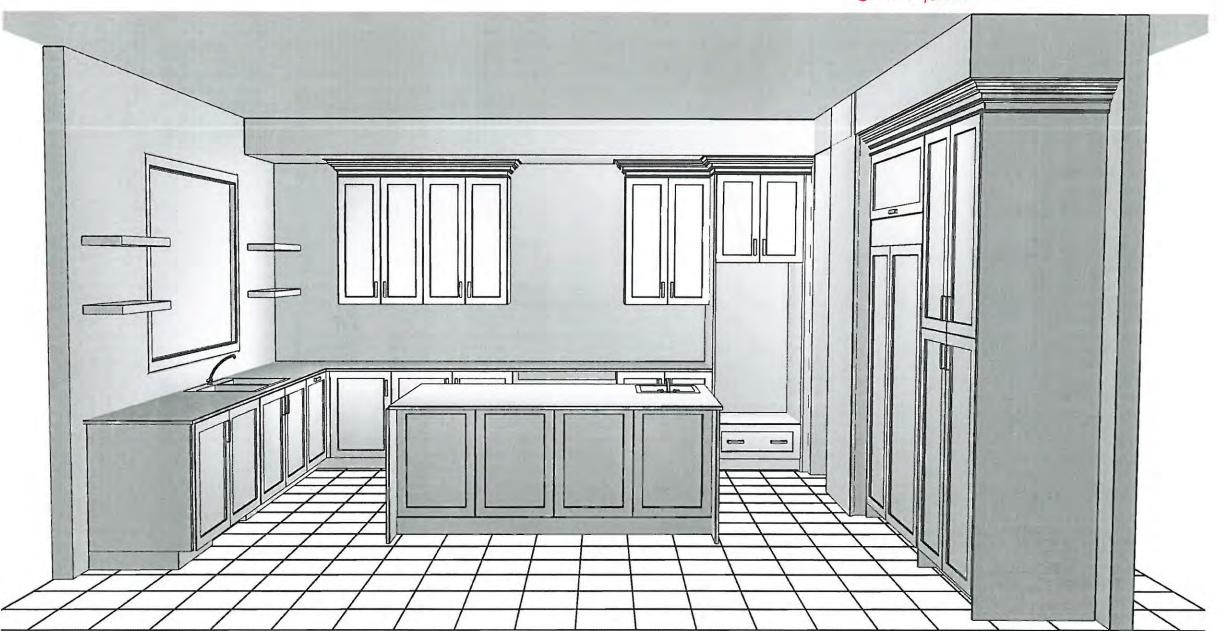







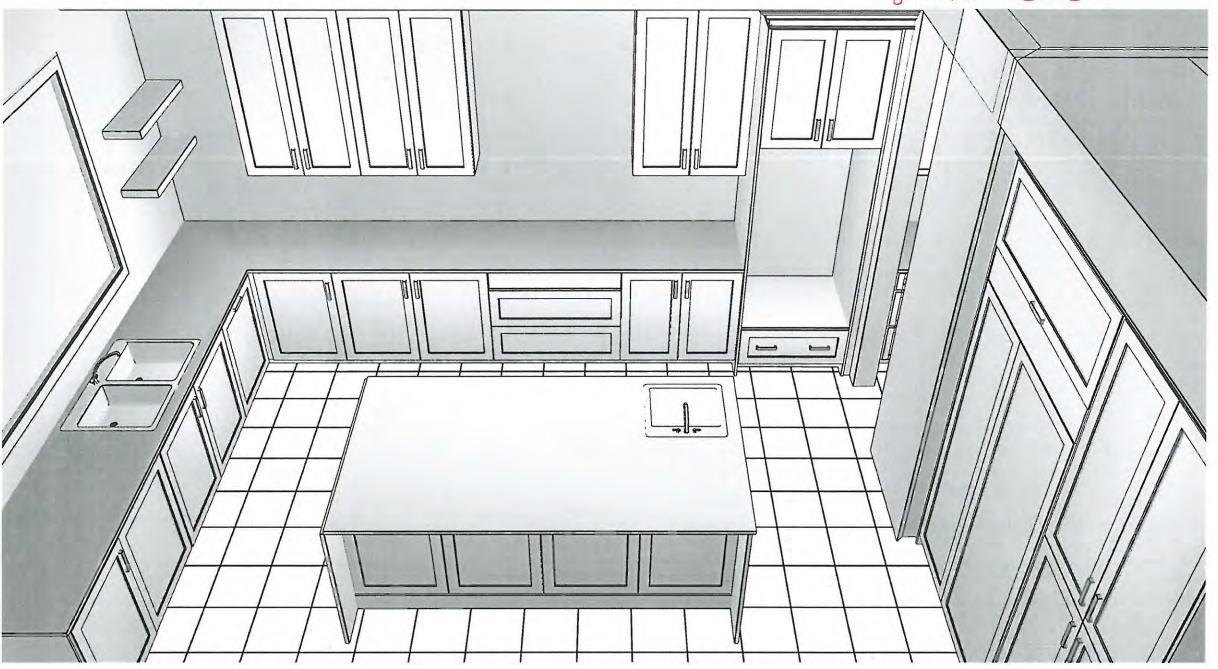



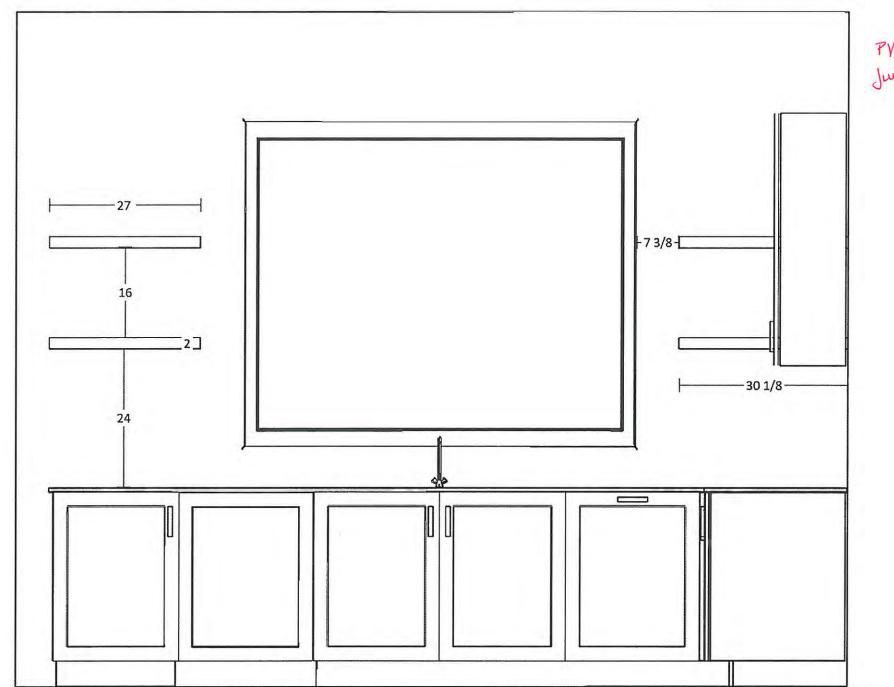


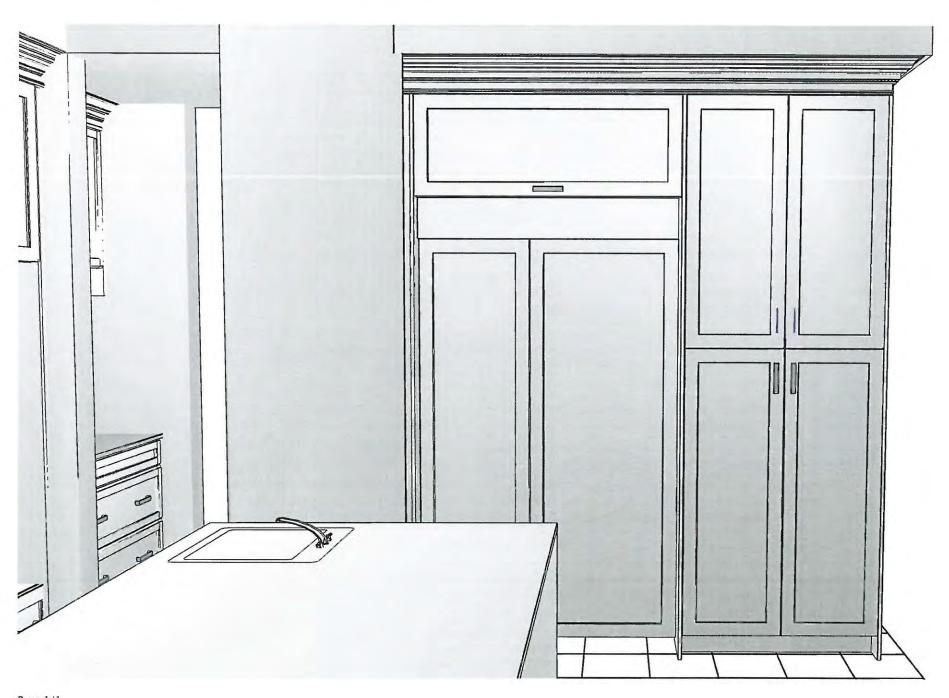


PV-8 See attach.\*

June 2,2021

Page 1/1

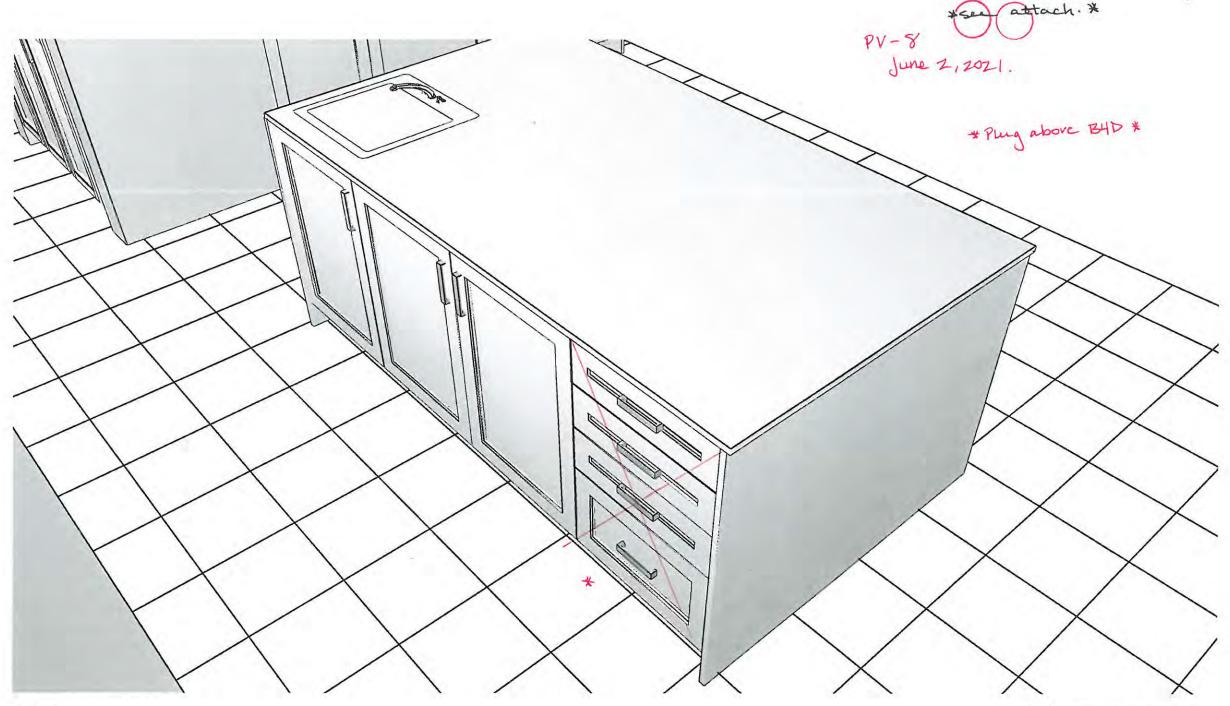



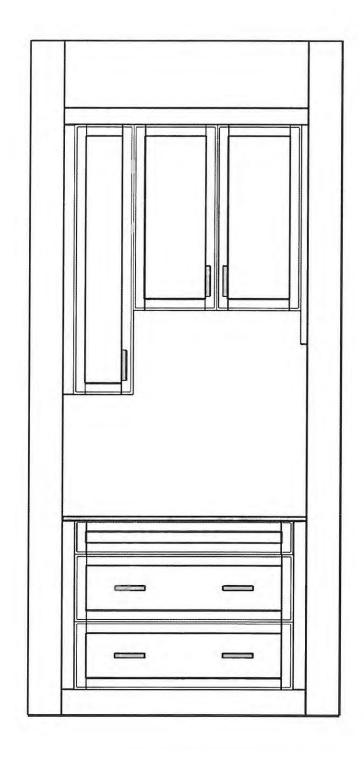


\*See attach. \*

7V-8 June 2, 2021


'Spice Kitchen'


View 1

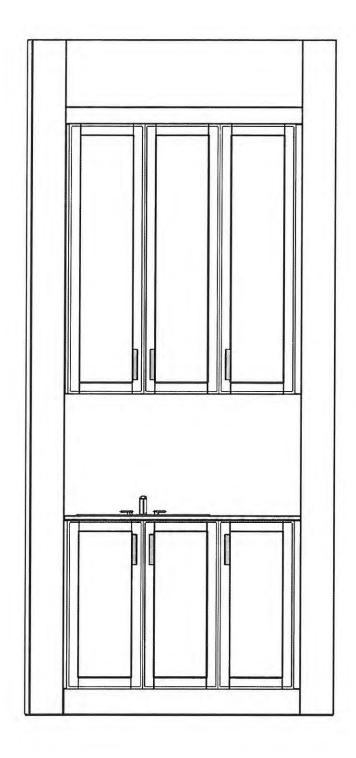


\* see attach. \* PV-8 ( June 2,2021


'Spice kitchen' View Z

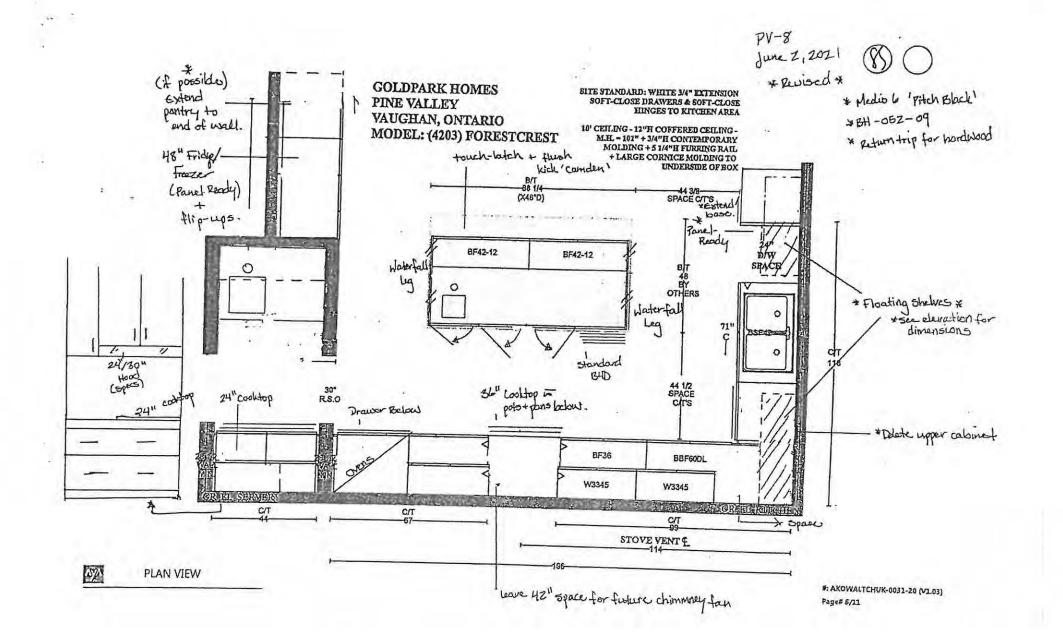

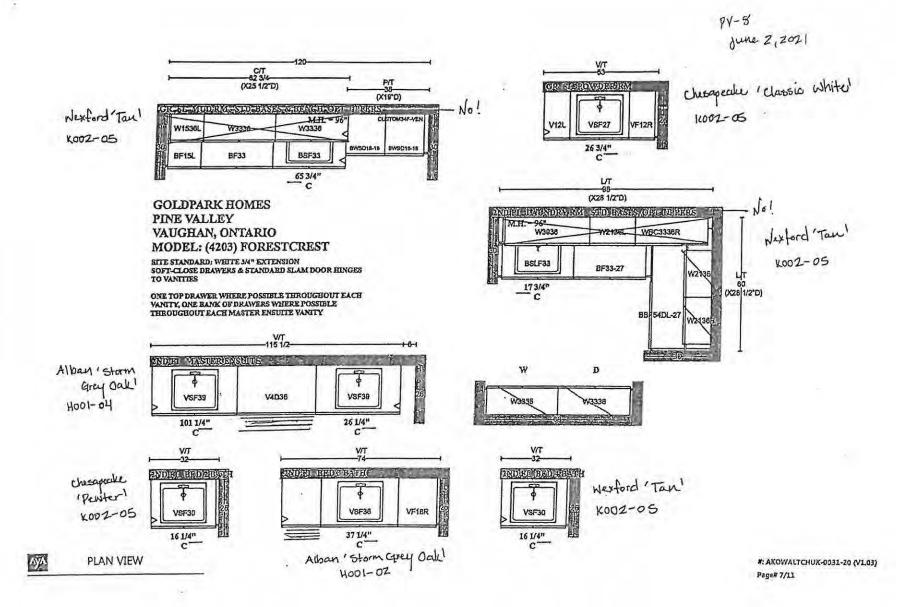


-



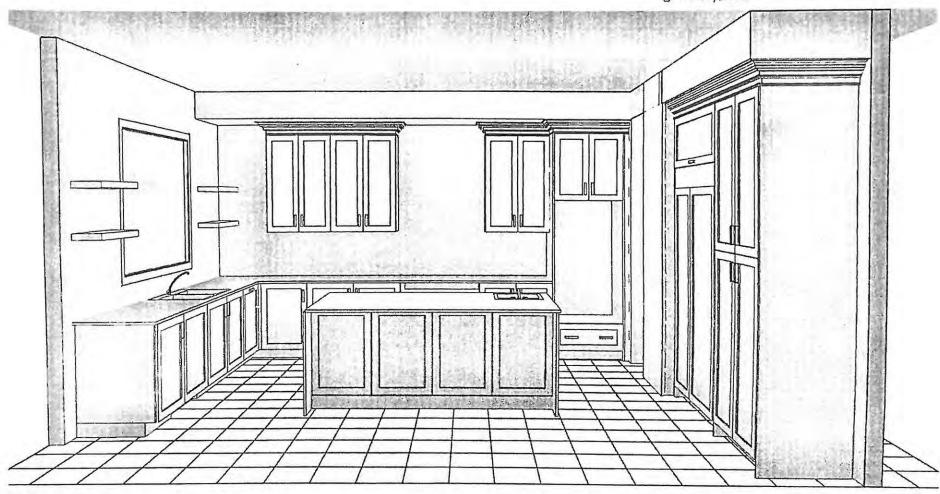



Page 1/1



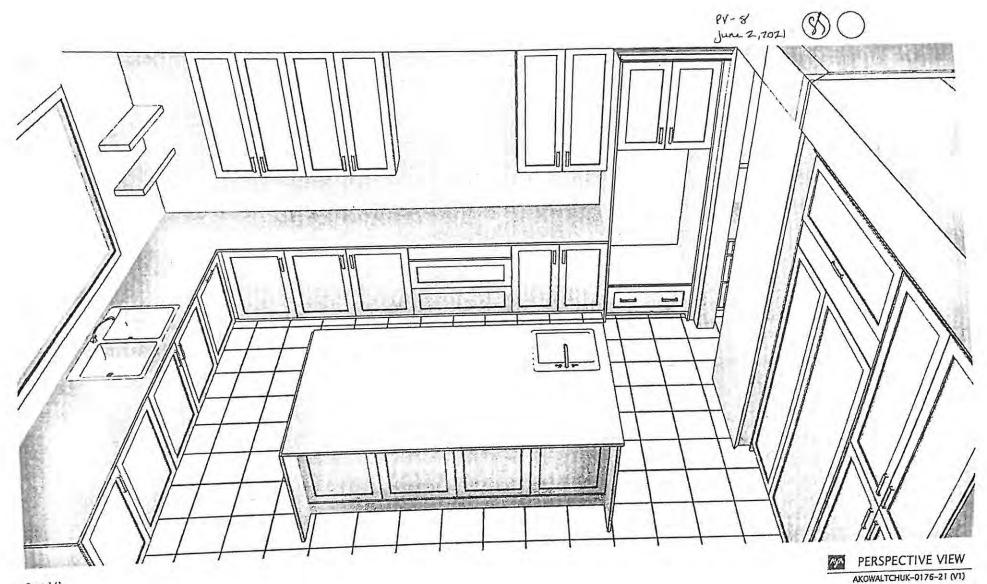


Page 1/1

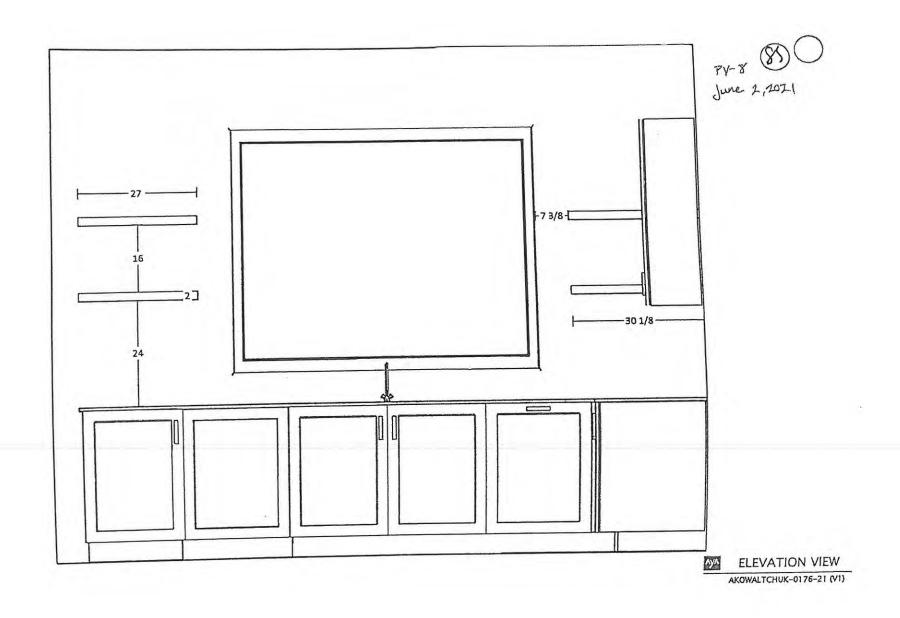

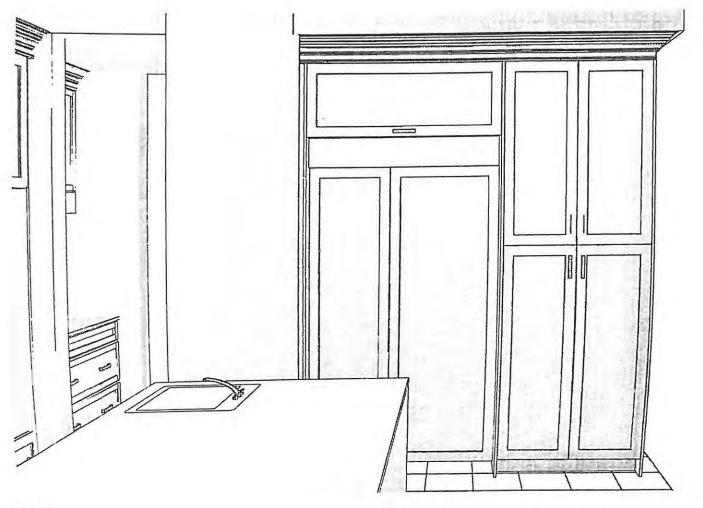


PV-8 (8) (

PERSPECTIVE VIEW
AKOWALTCHUK-0176-21 (V1)

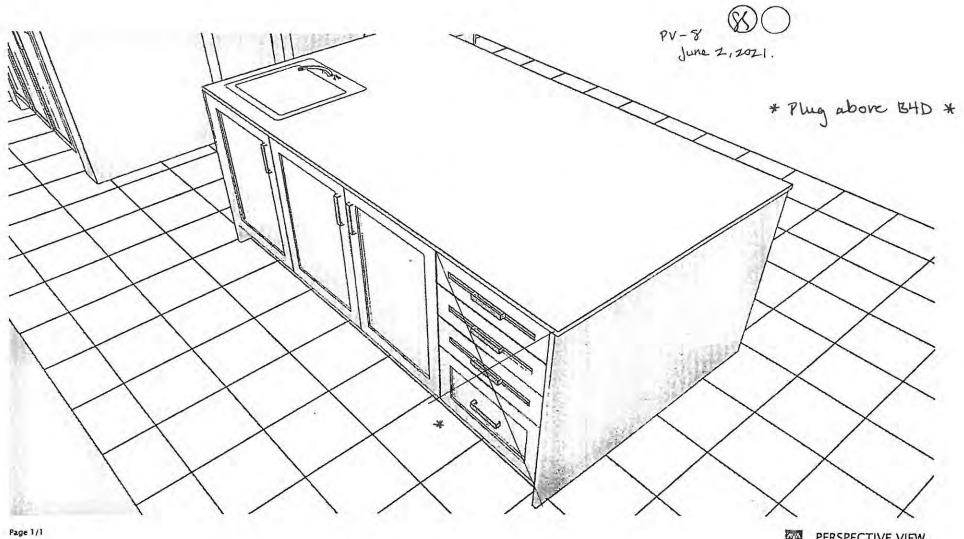


PERSPECTIVE VIEW

AKOWALTCHUK-0176-21 (VI)

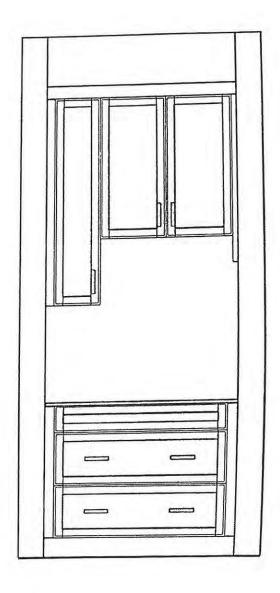

7V-8 8 C June 2, 2021 'Spice kitchen' View 1

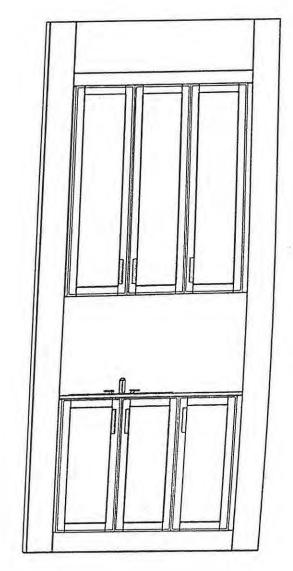

7V-8' DO June 2,2021 'Spice kitchen' View Z

ELEVATION VIEW AKOWALTCHUK-0176-21 (V1)

Page 1/1



# Dishwashers

24" Panel Ready Dishwasher 300 Series SHVM63W53N















## The 3rd rack provides the perfect space for silverware and large utensils while its V shape leaves room below for taller items.

- 44 dBA: Quietest dishwasher brand.
- A 3rd rack adds versatility and offers 30% more loading capacity.
- FlexSpace™ Tines fold back to fit your larger pots & pans.
- RackMatic® offers 3 height levels, for 9 possible rack positions.
- Speed60® gets your dishes from dirty to dry in about an hour.

#### **Technical Data**

Upper Rack :						500
Adjustable upper rack :			12	Rackm	atic 3-st	tage
Upper rack cup shelf:						2
Lower Rack :						500
3rd Rack :				3	rd Rack	1.0
Silverware Basket :					Stand	dard
Accessories Parts :						no
Optional accessories : SC	GZ101	OUC,				
SHZ1008UC, SMZ1007U	C,	SMZ5	000,	SN	ZPC00	2UC
UPC code :				825	225922	469
Variant color:				Not	applica	able
Panel ready:						Yes
Silence level (dBA):						44
Watts (W):					1	300
Current (A):						12
Volts (V):						120
Frequency (Hz):						60
Energy Consumption (kWh/y	r):					269
Energy Star® qualified :						Yes
Plug type :				fixed	connec	tion
Required cutout size (HxWxD	) (in)	1	x 33	7/8"	x 23 9/	16 "
Required cutout size (HxWxD	) (mn	n):	86	0-890	x 610 x	610
Overall appliance dimensions	s (HxV	VxD) (i	n):			
33 7/8 " x 23	9/16	3 "	X	23	1/16	11
Power cord length (in):					43 :	1/2"
Power cord length (cm):						110
Length outlet hose (in):						67 "
Length outlet hose (cm):						175
Product packaging dimension	ns (Hx	(UxW	(in) :			
		35	3/4"	x 26"	x 29 5/	/16"
Tub material:				Sta	inless s	teel
Tub type:					Tal	ITub

#### Optional accessories

Number of place settings :

ADA Compliant :

SGZ1010UC: Drain hose extension kit


SHZ1008UC: s/s door with handle for dishwasher

SMZ5000 : Dishwashing aid set

SMZPC002UC : Powercord with cold plug

No


16





# Dishwashers

24" Panel Ready Dishwasher 300 Series SHVM63W53N



All connections are at the rear of the appliance. Extension for drain hose available as accessory. Power cord for connection to electrical outlet (3-prong plug) available as accessory.


1

# **Enclosure Requirements**

# **A** WARNING

Avoid Scalding or Electrical Shock Hazard!


Make sure the water supply and electrical supply are shut off before installation or service.

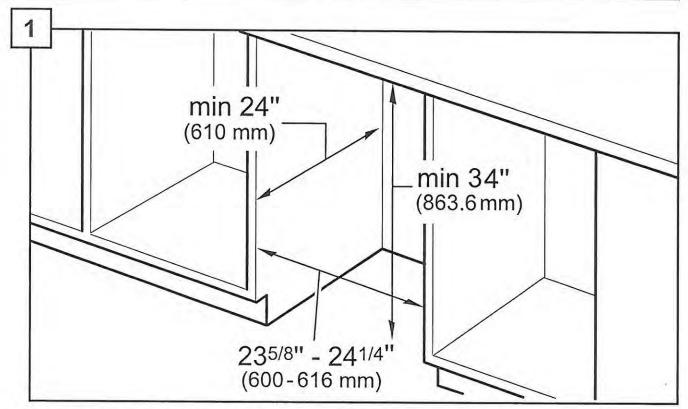

Note: This dishwasher is designed to be enclosed on the top, back and both sides by standard residential kitchen cabinetry.


Select a location as close to the sink as possible for easy access to water supply and drain lines.

For proper dishwasher operation and appearance, ensure that the enclosure is square and has the dimensions shown.

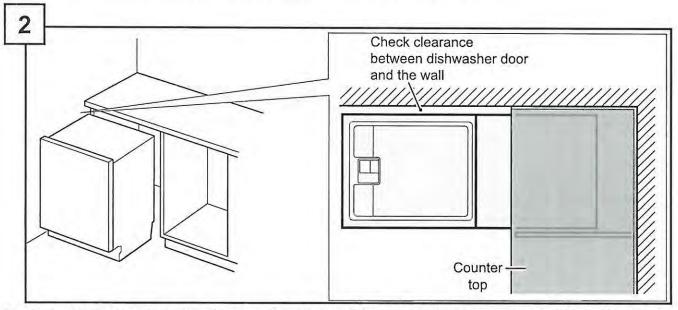

If the dishwasher is to be installed in a corner, ensure that there is adequate clearance to open the door as shown.

7



June 2, 2021

PV-8 (8) March, 15, 2021 (Kitchen)

# INSTALLATION INSTRUCTIONS

27" (68.6 CM) AND 30" (76.2 CM) ELECTRIC BUILT-IN CONVECTION MICROWAVE OVEN

INSTRUCTIONS D'INSTALLATION FOUR À MICRO-ONDES ENCASTRÉ ÉLECTRIQUE À CONVECTION DE 27" (68,6 CM) ET 30" (76,2 CM)

# Table of Contents/Table des matières

BUILT-IN MICROWAVE OVEN SAFETY2	SÉCURITÉ DU FOUR À MICRO-ONDES ENCASTRÉ
INSTALLATION REQUIREMENTS3	EXIGENCES D'INSTALLATION
Tools and Parts3	Outils et pièces
Location Requirements3	Exigences d'emplacement
Electrical Requirements4	Spécifications électriques1
INSTALLATION INSTRUCTIONS5	INSTRUCTIONS D'INSTALLATION1
Spacer Kit Installation5	Installation de la trousse d'entretoise1
Prepare Built-In Microwave Oven5	Préparation du four à
Make Electrical Connection6	micro-ondes encastré1
Install Microwave Oven6	Raccordement électrique1
Complete Installation7	Installation du four à micro-ondes1
	Achever l'installation1

#### IMPORTANT:

Save for local electrical inspector's use.

#### **IMPORTANT:**

À conserver pour consultation par l'inspecteur local des installations électriques.

# INSTALLATION REQUIREMENTS

March 15, 2021 (Kitchen)

## **Tools and Parts**

Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

#### **Tools Needed**

- Phillips screwdriver
- Flat-blade screwdriver
- Measuring tape
- Level

- Drill (for wall cabinet installations)
- 1/8" (3 mm) drill bit (for wall cabinet installations)
- 1" (2.5 cm) drill bit (for wall cabinet installations

#### Parts Needed


- UL listed or CSA approved conduit connector
- UL listed wire connectors

#### Parts Needed - Flush Installation

- W10801485 Stainless steel flush installation kit for 27" (68.6 cm) models
- W10801486 Stainless steel flush installation kit for 30" (76.2 cm) models
- W10801487 Black flush installation kit for 30" (76.2 cm) models

To order, see the "Assistance or Service" section of the Use and Care Guide.

#### **Parts Supplied**



- A. Spacer bars (2)
- B. Bottom vent (1)
- C. 3/8" (9.5 mm) hex-head washer screws (4)
- D. 3/4" (1.9 cm) pan-head screws (4)

Check local codes. Check existing electrical supply. See "Electrical Requirements."

It is recommended that all electicensed, qualified electrical in:

\* Please indicate

which 'spacer kit

## Location R

#### IMPORTANT: Observe all govi


- Cabinet opening dimension used. Given dimensions premicrowave oven.
- Recessed installation area must provide complete enclosure around the recessed portion of the microwave oven.
- Grounded electrical supply is required. See "Electrical Requirements" section.
- Electrical supply junction box should be located 3" (7.6 cm) maximum below the support surface when the microwave oven is installed in a wall cabinet. A 1" (2.5 cm) minimum diameter hole should have been drilled in the left rear corner of the support surface to pass the appliance cable through to the junction box.

- For installation above single built-in oven, the junction box must located inside upper cabinet.
- If you are installing the junction box on rear wall behind the microwave oven, the junction box must be recessed and located in the upper or lower right or left corner of the cabinet; otherwise, the microwave oven will not fit into the cabinet opening.
- Microwave oven support surface must be solid, level, and flush with bottom of cabinet cutout. Floor must be able to support a weight of 108 lbs (49.0 kg).

**IMPORTANT:** To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate, or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).

#### **Product Dimensions**

27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens




#### 27" (68.6 cm) models

- A. 253/8" (64.5 cm)
- B. 173/8" (44.1 cm)
- C. 2211/16" (57.7 cm)
- D. 263/4" (68.0 cm) overall width
- E. 197/8" (50.3 cm) overall height
- F. JMC2427IM: 25<sup>9</sup>/16 (64.9 cm) JMC2427IL: 24<sup>3</sup>/4" (62.9 cm)

#### 30" (76.2 cm) models

- A. 283/8" (72.1 cm)
- B. 173/8" (44.1 cm)
- C. 2211/16" (57.7 cm)
- D. 293/4" (75.6 cm) overall width
- E. 197/s" (50.3 cm) overall height
- F. JMC2430IM: 259/16 (64.9 cm) JMC2430IL: 243/4" (62.9 cm)

27" (68.6 cm) and 30" (76.2 cm) Microwave Oven Spacer Kit



27" (68.6 cm) models

A. 263/4" (67.9 cm) overall width

30" (76.2 cm) models A. 29<sup>3</sup>/<sub>4</sub>" (75.6 cm) overall width

**NOTE:** The microwave oven spacer kit will allow the microwave oven to be installed in a  $17^3/8$ " to  $17^3/4$ " (44.1 to 45.1 cm) maximum cutout height.




A microwave oven spacer kit is available from your dealer that will allow the microwave oven to be installed in a 19" to 1919/18" (48.3 to 50.2 cm) maximum cutout height. Match the oven size to the following kits:

- 27" (68.6 cm) Stainless Steel Model W10469901
- 30" (76.2 cm) Stainless Steel Model W10469903

To order, see the "Assistance or Service" section of the Use and Care Guide.

#### **Cabinet Dimensions**

#### 27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens



#### 27" (68.6 cm) models


- A. 27" (68.6 cm) min. cabinet width
- B. 19<sup>7</sup>/₅" (50.3 cm) from bottom of cutout to bottom of upper cabinet door
- C. 40" (101.6 cm) bottom of cutout to floor (recommended)
- D. 251/2" (64.8 cm) cutout width
- E. 11/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 17<sup>5</sup>/<sub>8</sub>" (44.7 cm) recommended cutout height (will fit cutout height from 17<sup>3</sup>/<sub>8</sub>" [44.1 cm] to 17<sup>3</sup>/<sub>4</sub>" [45.1 cm])
- G. 21<sup>7</sup>/<sub>8</sub>" (55.5 cm) min. cutout depth

#### 30" (76.2 cm) models


- A. 30" (76.2 cm) min. cabinet width
  - B. 197/s" (50.3 cm) from bottom of cutout to bottom of upper cabinet door
- C. 40" (101.6 cm) bottom of cutout to floor (recommended)
- D. 281/2" (72.4 cm) cutout width
- E. 11/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 17<sup>5</sup>/s" (44.7 cm) recommended cutout height (will fit cutout height from 17<sup>3</sup>/s" [44.1 cm] to 17<sup>3</sup>/4" [45.1 cm])
- G. 21<sup>7</sup>/<sub>8</sub>" (55.5 cm) min. cutout depth

#### Minimum Installation Clearances

For proper installation, the following minimum clearances must exist above and below the cabinet opening.



#### Installation Above Single Built-In Oven



# **Electrical Requirements**

## **GROUNDING INSTRUCTIONS**

#### For a permanently connected microwave oven:

The microwave oven must be connected to a grounded, metallic, permanent wiring system, or an equipment grounding conductor should be run with the circuit conductors and connected to the equipment grounding terminal or lead on the microwave oven.

## SAVE THESE INSTRUCTIONS

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.


Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70 – latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91 – latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association 1 Batterymarch Park Quincy, MA 02169-7471 CSA International 8501 East Pleasant Valley Road Cleveland, OH 44131-5575

#### **Electrical Connection**

To properly install your microwave oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here. Microwave oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. The model/serial/rating plate is located underneath the control panel along the oven vent.



A. Model/serial/rating plate

- The microwave oven rated 120/240 V, 20 A, has 4 wires (L1, L2, N, and G) in the flex conduit, and should be connected to a 20 A maximum-rated circuit, overcurrent protected on both the L1 and L2 circuits.
- A time-delay fuse or circuit breaker is recommended.
- Flexible cable from the microwave oven should be connected directly to the junction box.

- Do not cut the conduit. The length of conduit provided is for serviceability of the microwave oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:

Connect the aluminum wiring using special connectors and/or tools designed and UL listed for joining copper to

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table:

Voltage	Microwave With Convection Oven
120/240 VAC	15 A
120/208 VAC	15 A
FA CONTRACTOR OF THE PARTY OF T	a. a (1)

March 15, 202

# INSTALLATION INSTRUCTIONS

# Spacer Kit Installation


#### NOTES:

- The microwave oven spacer kit allows the microwave oven to be installed in an 177/16" to 177/8" (44.1 cm to 45.3 cm) maximum cutout height.
- If your cabinet cutout height is more than 177/16" (44.1 cm), you must install the spacer kit. Proceed to "Assemble Spacer
- If your cabinet cutout height is less than 177/16" (44.1 cm). you do not have to install the spacer kit. Proceed to "Prepare Built-In Microwave Oven."

#### Assemble Spacer Kit

1. Attach the bottom vent to spacer bars using four 3/8" (9.5 mm) hex-head washer screws.

NOTE: Spacer bar flanges should be facing out.




- A. Bottom vent
- B. Spacer bar flange
- C. Spacer bars
- D. 3/8" (9.5 mm) hex-head washer screws

#### Install Spacer Kit

- Center assembled microwave oven spacer kit against lower front edge of the cabinet cutout.
- 2. Using an 1/8" (3.2 mm) drill bit, drill through the mounting holes in the spacer bars to create pilot holes.

3. Attach the assembled spacer kit to the cabinet using four 3/4" (1.9 cm) (flat-head screws. Do not overtighten screws.



A. 3/4" (1.9 cm) flat-head screws B. Spacer kit assembly

# Prepare Built-In Microwave Oven


Locate existing wiring to avoid drilling into or severing wiring during installation.

**Excessive Weight Hazard** 

Use two or more people to move and install microwave oven.

Failure to do so can result in back or other injury.

- 2. To avoid floor damage, set the microwave oven onto cardboard prior to installation. Do not use handle or any portion of the front frame for lifting.
- Remove the shipping materials and tape from the microwave oven.
- Remove and set aside racks and other items from inside the microwave oven.
- 5. Remove the hardware package from inside the bag containing literature.
- Move the microwave oven and cardboard close to the microwave oven's final location.



PV-8 (8) March 15,2021 (kitchen.)

# JENNAIR®

# INSTALLATION INSTRUCTIONS

27" (68.6 CM) AND 30" (76.2 CM) ELECTRIC SINGLE AND DOUBLE BUILT-IN OVEN

# INSTRUCTIONS D'INSTALLATION

FOUR ÉLECTRIQUE ENCASTRÉ 27" (68,6 CM) ET 30" (76,2 CM) - SIMPLE ET DOUBLE

## Table of Contents/Table des matières

BUILT-IN OVEN SAFETY2	SÉCURITÉ DE
INSTALLATION REQUIREMENTS3	EXIGENCES D
Tools and Parts3	Outillage et p
Location Requirements3	Exigences d'e
Electrical Requirements6	Spécifications
INSTALLATION INSTRUCTIONS7	INSTRUCTION
Prepare Built-In Oven7	Préparation d
Remove Oven Door(s)7	Dépose de la
Replace Oven Door(s)7	Réinstallation
Positioning Oven Feet for Multiple Cabinet Cutout Heights8	Positionneme
Make Electrical Connection13	ouvertures d'
Install Oven14	Raccordemer
Install Warming Drawer Deflector Kit (Only	Installation du
for Ovens Installed above Warming Drawers)15	Installation de
Complete Installation16	du tiroir-récha

SÉCURITÉ DE LA TABLE DE CUISSON	17
EXIGENCES D'INSTALLATION	17
Outillage et pièces	17
Exigences d'emplacement	17
Spécifications électriques	20
INSTRUCTIONS D'INSTALLATION	21
Préparation du four encastré	21
Dépose de la/des porte(s) du four	21
Réinstallation de la/des porte(s) du four	22
Positionnement des pieds du four pour des	
ouvertures d'encastrement de hauteur différente	23
Raccordement électrique	
Installation du four	28
Installation de l'ensemble de déflecteur	
du tiroir-réchaud (uniquement pour les fours	
installés au-dessus d'un tiroir-réchaud)	
Achever l'installation	30

IMPORTANT:


Save for local electrical inspector's use.

IMPORTANT:

À conserver pour consultation par l'inspecteur local des installations électriques.

W11235621A

#### **Product Dimensions - Single Ovens**




#### 27" (68.6 cm) models

- A. 291/a" (75,8 cm) max. overall height
- B. 27" (68.6 cm) overall width
- C. JJW2427IM 26<sup>3</sup>/s" (67 cm) JJW2427IL - 27<sup>3</sup>/1s" (69 cm)
- D. 231/4" (59.1 cm) max. recessed depth
- E. 26%" (67.9 cm) recessed height
- F. 48" (121.9 cm) flexible conduit length
- G. 25% (64.6 cm) max. recessed width
  H. 12" (30.5 cm) from back of
- H. 12" (30.5 cm) from back of control panel to start of strain relief

#### 30" (76.2 cm) models

- A. 291/s" (75.8 cm) max. overall height
- B. 30" (76.2 cm) overall width
- C. JJW2430IM 26<sup>3</sup>/<sub>8</sub>" (67 cm) JJW2430IL - 27<sup>3</sup>/<sub>16</sub>" (69 cm)
- D. 231/4" (59.1 cm) max. recessed depth
- E. 26¾" (67.9 cm) recessed height
- F. 48" (121.9 cm) flexible conduit length
- G. 287/15" (72.2 cm) max. recessed width
- H. 12" (30.5 cm) from back of control panel to start of strain relief

#### Single Ovens Installed in Cabinet



#### 27" (68.6 cm) models


- A. 27" (68.6 cm) min. cabinet width
- B. 23/16" (5.5 cm) top of cutout to bottom of upper cabinet door
- C: 32" (81.3 cm) bottom of cutout to floor
- D. 251/2" (64.8 cm) cutout width
- E. 1½" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 28" (71.2 cm)\* recommended cutout height
- G. 24" (60.7 cm) cutout depth

#### 30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
- B. 23/16" (5.5 cm) top of cutout to bottom of upper cabinet door
- C. 32" (81.3 cm) bottom of cutout to floor
- D. 281/2" (72.4 cm) cutout width
- E. 1½" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 28" (71.2 cm)\* recommended cutout height
- G. 24" (60.7 cm) cutout depth

\*NOTE: The cutout height can be between 26<sup>15</sup>/<sub>16</sub>" and 29<sup>7</sup>/<sub>16</sub>" (68.4 cm and 74.8 cm) for single ovens.

#### Cabinet Dimensions - Single Ovens




#### 27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width
- B. 1½" (3.8 cm) min. top of cutout to underside of countertop
- C. 51/4" (13.3 cm) bottom of cutout to floor
- D. 251/2" (64.8 cm) cutout width
- E. 28" (71.2 cm) min.cutout height

#### 30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
- B. 1½" (3.8 cm) min. top of cutout to underside of countertop
- C. 5¼" (13.3 cm) bottom of cutout to floor
- D. 281/2" (72.4 cm) cutout width
- E. 28" (71.2 cm) min.cutout height

#### **Product Dimensions - Double Ovens**



#### 27" (68.6 cm) models


- A. 52%" (133 cm) max. overall height
- B. 27" (68.6 cm) overall width
- C. JJW2827IM 26³/e" (67 cm) JJW2827IL - 27³/1e" (69 cm)
- D. 231/4" (59.1 cm) max. recessed depth
- E. 4813/16" (124 cm) recessed height
- F. 66" (167.6 cm) flexible conduit length
- G. 257/16" (64.6 cm) max. recessed width
- H. 12" (30.5 cm) from back of control panel to start of strain relief

#### 30" (76.2 cm) models

- A. 52%" (133 cm) max. overall height
- B. 30" (76.2 cm) overall width
- C. JJW2830IM 263/a" (67 cm) JJW2830IL - 273/16" (69 cm)
- D. 23¼" (59.1 cm) max. recessed depth
- E. 48<sup>13</sup>/16" (124 cm) recessed height
- F. 66" (167.6 cm) flexible conduit length
- G. 287/16" (72.2 cm) max. recessed width
- H. 12" (30.5 cm) from back of control panel to start of strain relief

#### Cabinet Dimensions - Double Ovens

#### **Double Ovens Installed in Cabinet**



#### 27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width
- B. 2¾s" (5.5 cm) top of cutout to bottom of upper cabinet door
- C. 14¾" (37.5 cm) bottom of cutout to floor is recommended. 4"-14¾" (10.2-37.5 cm) bottom of cutout to floor is acceptable.
- D. 251/2" (64.8 cm) cutout width
- E. 1½" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 501/4" (127.6 cm)\* recommended cutout height
- G. 24" (60.7 cm) cutout depth

#### 30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
- B. 2%s" (5.5 cm) top of cutout to bottom of upper cabinet door C. 14%" (37.5 cm) bottom of cutout to floor
- C. 14%" (37.5 cm) bottom of cutout to floor is recommended. 4"-14%" (10.2-37.5 cm) bottom of cutout to floor is acceptable.
- D. 281/2" (72.4 cm) cutout width
- E. 11/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 501/4" (127.6 cm)\* recommended cutout height
- G. 24" (60.7 cm) cutout depth

\*NOTE: The cutout height can be between 487/s" and 523/1s" (124.1 cm and 132.6 cm) for double ovens.

### **Electrical Requirements**

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/ NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:


National Fire Protection Association 1 Batterymarch Park Quincy, MA 02169-7471


CSA International 8501 East Pleasant Valley Road Cleveland, OH 44131-5575

#### Electrical Connection

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. The model/serial/rating plate is located under the control panel on single ovens and under the control panel on the upper oven cavity on double ovens. See the following illustrations.







Double Oven
A. Model/serial/rating plate

- Models rated from 7.3 to 9.6 kW at 240 V (5.4 to 7.4 kW at 208 V) require a separate 40 A circuit, Models rated at 4.8 kW and below at 240 V (3.6 kW and below at 208 V) require a separate 20 A circuit.
- A circuit breaker is recommended.
- Connect directly to the circuit breaker box (or fused disconnect) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See "Make Electrical Connection" section.
- Flexible conduit from the oven should be connected directly to the junction box.
- Fuse both sides of the line.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:

Connect the aluminum wiring using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements for models JJW2430I, JJW2427I, JJW2830I, and JJW2827I refer to the following table.

	240 VAC	208 VAC
Model	kW	kW
JJW24301	4.1	3,1
JJW2427I	4.1	3.1
JJW28301	8.7	6.5
JJW2827I	8.7	6.5

# **Yolande Somerville**

From:

Sukhjitpal Singh <sukhjitpal.singh@icloud.com>

Sent:

Wednesday, May 26, 2021 9:55 AM

To:

Yolande Somerville

Subject:

Re: PV- 8 Shower tile Reselection

Hi,

I like Selection 1 for replacement of shower tile.

Thank you, Sukhjit. Sent from my iPhone

On May 25, 2021, at 12:42 PM, Yolande Somerville <YSomerville@goldparkhomes.com> wrote:

Hi Sukhjitpal,


We have just received word that the shower tile you've selected for your Master Ensuite is unavailable and a reselection is required. Please photo attached of a replacement option we have put together for you with your original selections for the room.

Thank you,


Goldpark Homes Design Studio 55 Silton Road, Unit 3 Woodbridge, ON L4L 7Z8

<lot 8.png>

This email has been scanned for spam and viruses by Proofpoint Essentials. Click here to report this email as spam.

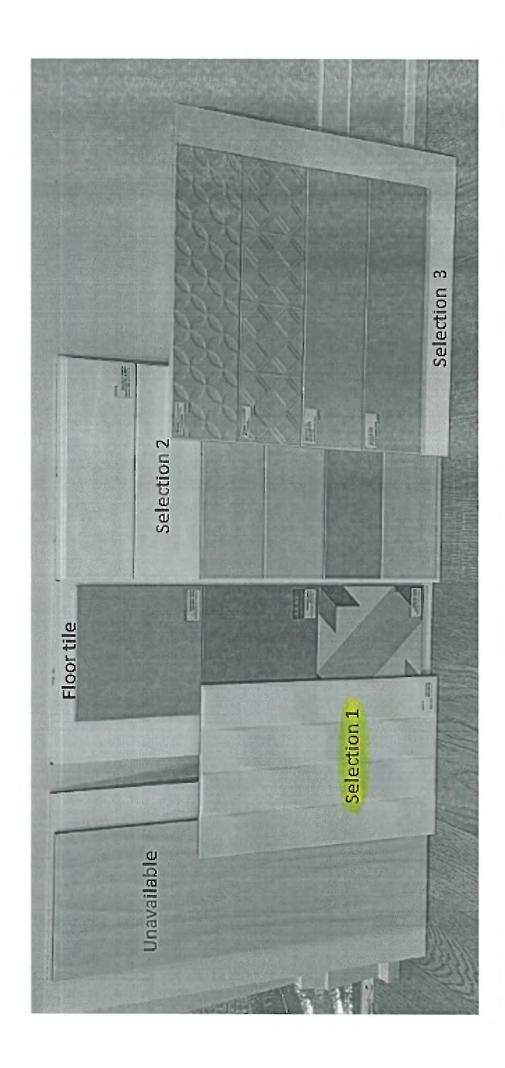

# SCHEDULE'F'

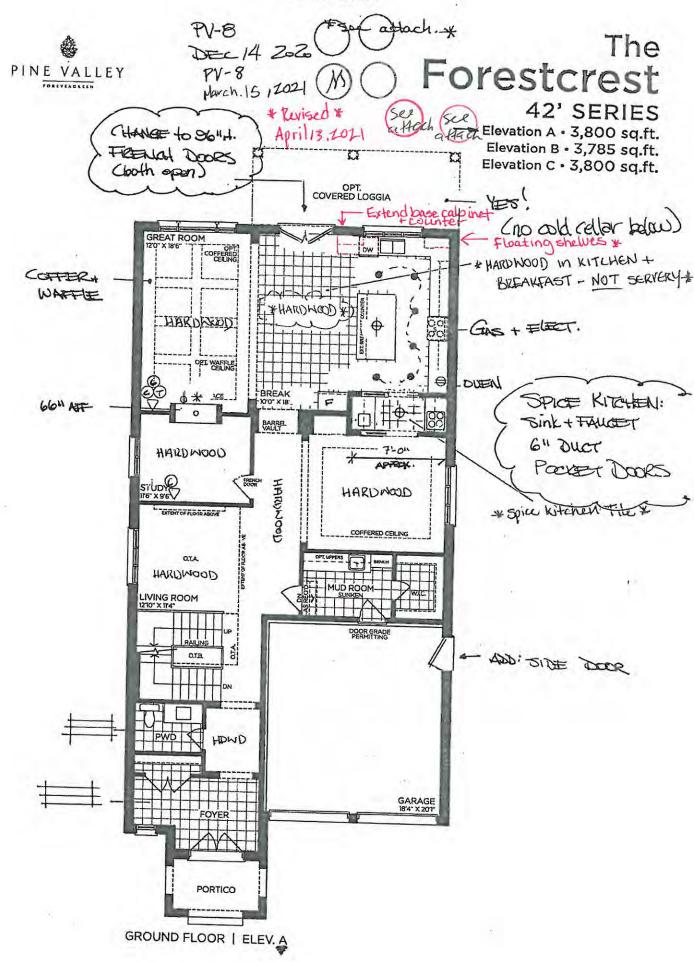

VENDOR	
PURCHASER	
PURCHASER	

GOLDPARK

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area, Layout may be reverse of the unit purchased. E. & O.E. 4203

## SCHEDULE'F'




PV-8
PV-8
March, 15, 2021

April 13, 2021

\* The Forestcrest

Elevation A • 3,800 sq.ft. Elevation B • 3,785 sq.ft. Elevation C • 3,800 sq.ft.

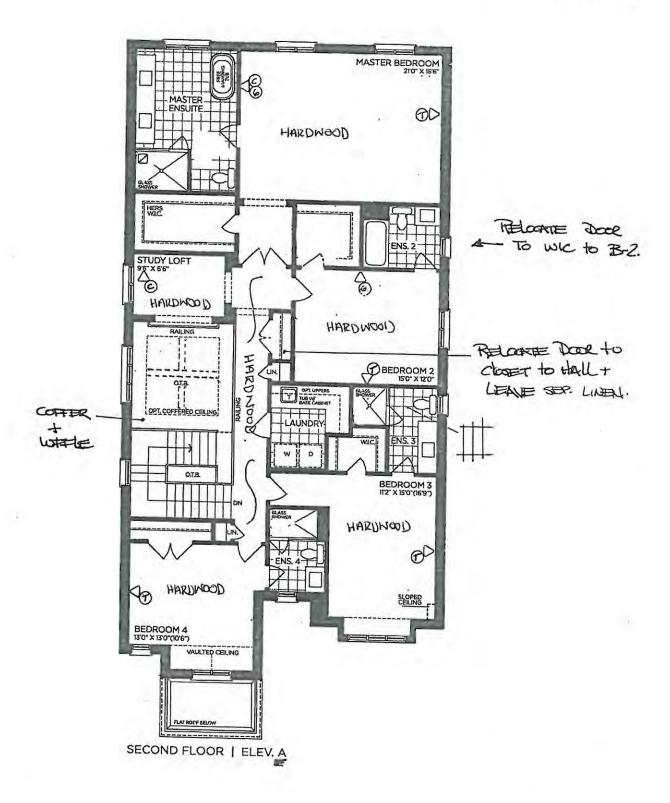


VENDOR
PURCHASER
PURCHASER

GOLDPARK

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice, Areas and dimensions are approximate and actual usable floor space may vary from the stated area, Layout may be reverse of the unit purchased, E. & O.E. 4203

# SCHEDULE'F'

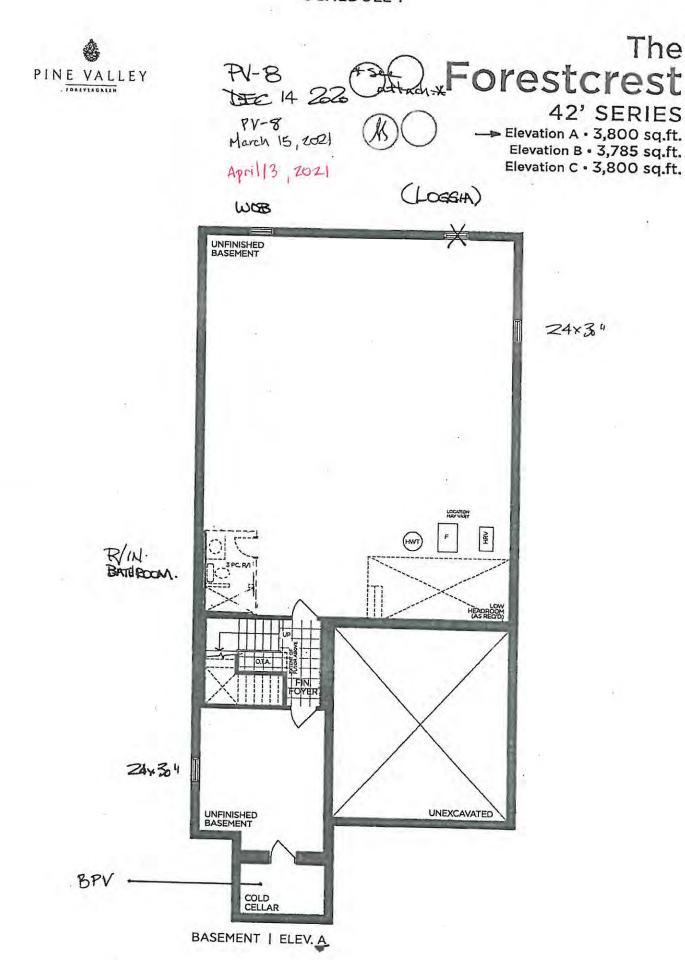


VENDOR PURCHASER PURCHASER

# GOLDPARK

WORTH MORE

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4203



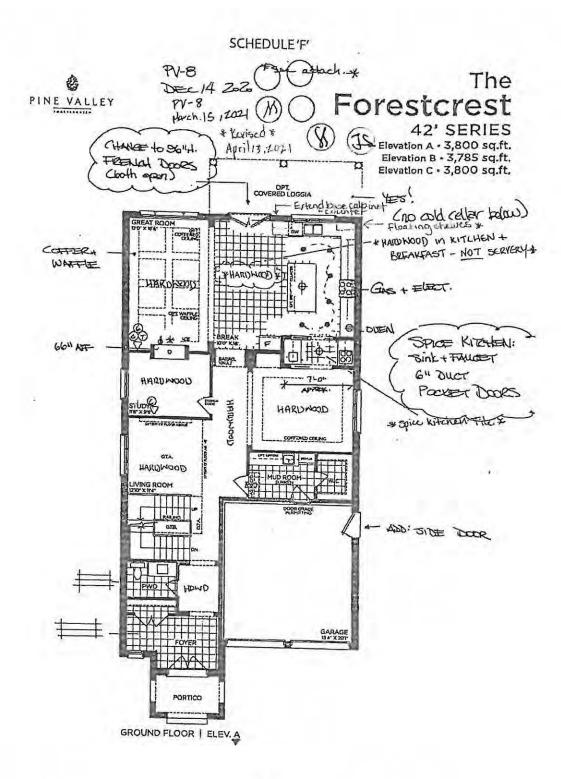

VENDOR _	
PURCHASER	
PURCHASER	

GOLDPARK


Prices, figures, flustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usuatio floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & DE 4203






Commence of the second	White Street Company of the Park Street Company
Model	AVV-309S
A CONTRACTOR AND A SECOND PROPERTY.	Dimensions
Dimensions	29 1/2" (W) x 22" (D) x 9 13/16" (H)
The state of the s	Exterior Appearence
Stainless steel grade	201
The state of the s	Features
Control	Soft touch with LED display
Lighting	2 bulbs, 3W LED (bulbs included)
Blower type	900 CFM, 4-speeds
Blower performance	Speed 1, 1.5 sones
	Speed 4, 7.5 sones
Filter type	2 Stainless steel baffle filters (included)
Duct transition	8" round (top)
Ducting	Ducted
La trade de entre de la El	ectrical Requirements
Electrical requirements	120V / 60Hz / 2.7 Amps
The state of the state of	Warranty
1-year Warranty	Parts and labour, in-home service

Spice Kitcheh
PV-8 Cormail
March 19,2021




## AVV-309S/AVV-369S


## **Dimensions**

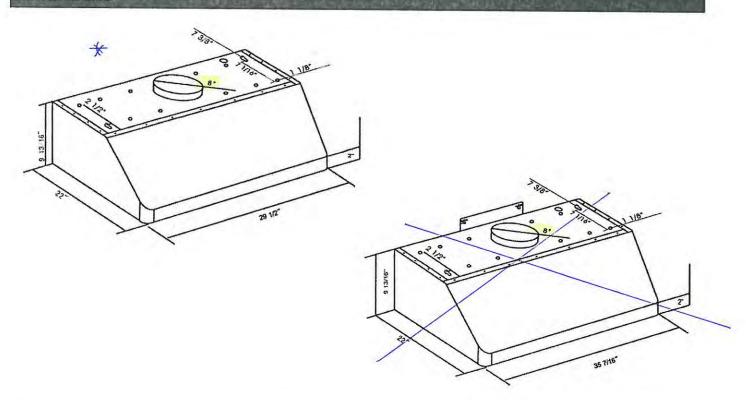

## Installation



Α	Floor to ceiling height	variable
В	Floor to counter top height (standard)	36"
С	Recommended height between cooking surface and bottom of the hood	28" to 30"
D	Hood height	9 13/16"
E	Chimney height	N/A



The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete and/or may change without notice.

## **Yolande Somerville**

From:

Sukhjitpal Singh <sukhjitpal.singh@icloud.com> March 15, 2021 8:42 PM

Sent: To:

Yolande Somerville

Fwd: AVG Under The Cabinet Specs 30" Subject: Attachments: avg-avv-309s.pdf; ATT00001.htm

Hello,

Please see attached under cabinet hood for spice kitchen.

**Thanks** Sukhjit.

From: Gunjan Mehandru <gunjan1834@gmail.com>

Date: March 15, 2021 at 7:18:20 PM EDT

To: sukhjitpal.singh@icloud.com

Subject: AVG Under The Cabinet Specs 30"

Hello,

Please see the attached copy of cut out dimensions for your reference.

Thanks & Regards GUNJAN MEHANDRU |SALES MANAGER| GUNJAN1834@GMAIL.COM 905-450-2828 **BRAMPTON TV & APPLIANCES** 

This email has been scanned for spam and viruses by Proofpoint Essentials. Click here to report this email as spam.



## PV-8 Cabinetry Schedule

ROO V	DESCRIPTION	PRICE	20	TOTA
KITCHEN	UPGRADE PERIMETER FROM SERIES 2 TO SERIES 6 - MEDIO 6 PITCH BLACK			
	ADD 4-BIN RECYCLING PULL-OUT ACCESSORY TO BASE CABINET		1	
	DELETE UPPER ON WINDOW WALL (N/C)		1	
	CONVERT STD. CABINETRY INTO A TALL DEEP BUILT-IN OVEN UNIT WITH \$/4" EXTENSION WHITE		1	
	POT DRAWER BELOW			
			1	
	ADD RANGETOP POTS & PANS DRAWERS CABINET IN STOVE LOCATION WITH 3/4" EXTENSION WHITE DRAWERS			
			1	
	REDUCE FRIDGE WALL CABINETRY TO ACCOMMODATE MODIFIED BACKING SPICE KITCHEN		1	
	ADJUST 36"W FRIDGE OPENING FOR A 48"W FRIDGE (N/C) DECOR PANELS FOR FRIDGE/FREEZER		1	
	ADD SHT CLOATING CHILDSEY-REEZER		1	
	ADD 2"T FLOATING SHELVES FLANKING WINDOW (24"x9"x2" - APPROX 24" AFC. + APPROX 16"		4	
	MOOVE IMAI)		1	
	UPGRADE HARDWARE - BH-052-09		1	
	RETURN TRIP FOR KICKPLATE ADJUSTMENTS		1	
	ADD FLIP UP CABINETS ABOVE FRIDGE		-	
	ADD DECOR PANEL FOR DISHWASHER		1	
ISLAND	UPGRADE ISLAND FROM SERIES 2 TO SERIES 5 - MEDIO 6 DYSTER			
and the same of	BEIOCATE ETD. DANIE OF SOLIES 2 TO SERIES 5 - MEDIO 6 DYSTER		1	
	RELOCATE STD. BANK OF FOUR DRAWERS TO ISLAND (N/C)		1	
	ADD CAMDEN STYLE FLUSH KICK PLATE TO BACKSIDE OF ISLAND ADD PUSH-TO-OPEN HARDWARE TO BACKSIDE OF ISLAND		1	
	SOLVED OF ENTERDWARE TO SACKSIDE OF ISLAND		1	
SPICE KITCHEN	FLAT FURRING PANEL THERMOFOIL IN LIEU OF CROWN IN SPICE KITCHEN			
	SERVERY BASE CABINETS INCLUDING BAD CHARGE PROPERTY AND THE KITCHEN	19.		
	SERVERY BASE CABINETS INCLUDING BAR SINK SUPPLIED IN STD. SERIES 2-CHESAPEAKE CLASSIC—WHITE' AND RE-LOCATED ACROSS ROOM BACKING FRIDGE WALL (N/C)  Allocated Across Room Backing Fridge Wall (N/C)	lion al		
	WHITE' AND RE-LOCATED ACROSS ROOM BACKING FRIDGE WALL (N/C) ALDER OOK STORM	ALC:	1	
	SUPPLY OPT. SERVERY UPPER CABINETS IN STD. SERIES 2 "CHESAPEAKE CLASSIC WHITE! (INCLUDED IN PE#2505)	7		
		4.	4	
	RE-LOCATE SERVERY UPPERS ACROSS ROOM BACKING FRIDGE WALL [N/C]		1	
	ADD FULL-DOOR BASE CABINET TO FORMER SERVERY WALL (INCLUDED IN PE #2505)		1	
	ADD 30"H STOVE UPPER TO FORMER SERVERY WALL (INCLUDED IN PE #2505)	-	1	
	ADD 45"H UPPER TO FORMER SERVERY WALL (INCLUDED IN PE #2505)		1	
	CONVERT FULL-DOOR BASE INTO COOKTOP CABINET WITH 3/4" EXTENSION WHITE POT		- X-	
	DRAWERS BELOW - COOKTOP LOCATION AS PER KITCHEN DESIGNERS DISCRETION	- 1	1	
NSUITE 3	ADD VANITY BANK OF DRAWERS			
45	COLUMN TO THE WATER		1	
		The same of the sa	100	
-	CAB	INETRY 7	OTAL:	

## \*\*\*HANDLE PLACEMENT: AT INSTALLERS DISCRETION\*\*\*

DATE: Warch 15, 2021	
SNATURE: (K)	
NATURE:	
* Revised * March 17, 2021 Colla	Y
* Revised * March 17, 2021 (atta	GOLD

REVISED: 2021-03-15



## PV-8 Cabinetry Schedule

2004	OBG V	-
<b>EJ7CHEN</b>	LIPORADI ASSILLETTE BOULE ASSI	- 51
	UPGRADE ASSISTED FROM SERVES 2 TO SERVES 6 - MET NO A PITTUR BLACK ADD 4 SIX AUTOL FOR PULL CUIT AQUESTORS TO BASS CARRYOT  OTHER TORSES COMMENTS.	
	COSELL CRANGE CHANGE MARTE DAC	7
	CONVERTING CARDISTON WHILL DIVE	1
	CONVENT TO CARDINETER INFO A TALL DEEP MILLI HE OVER THAT WITH MAY THEE AN WHITE	1
	AGD PANAGET A COMPANY	
	ADD RANGETOP POTE & PART DRAWERS . ASSNET #1 TOUL LOCK TON WITH SILV EXTRACTOR	1
	Bring a strategy	
	RECIN EPAINSE MALL ARMETERY TO AUTOMATODATE MET, HE BALENG PRIT LITCHEN ADAM TIGHWI FRIOSE OPENING FOR ANY CHOOSE OF	1
	ADMS 16 W FRIDGE OPENING FOR A SEW FRIDGE (AUC)	7.
		1
	AUD 2 T FLOATING EMELTES FLANKING WINDOW (24 20"42" - 43 FROM 24" ALC + APPROX 16"	1
	reset well	0.00
	CET, BACK HARDWANE BH DS2-06	¥
	TO THE HOP FOR SECONATE ADDISTRIBED	1
	ADD ENDER OF ARRIVE FULLY	4
	ADD DECOR PARE FOR DISHWESTER	7
PLAND	Tipe we were	
- THE REAL PROPERTY.	CHOCALESTA PROMISERIES 2 TO STATES 1 - MEDIO & DYSTER	
		4
		4
	ADD PUZ TO OFFICI HABOWARI TO BACKSIDE OF SLAND	7
		1
NEW WICHEN		100
THE WITCHES	THAT FURNISHED THE MOTOR IN DELLOW CROWN IN SPICE KITCHEN	
	WHITE AND RE-LOCATIO ACCOUNT MOVE EMPIRED IN TO SERVE Y CARCALLAGE CLASSIC	
	WHITE AND RE-LOCATED ACKNOST FOOM BATCHING PRIDGE WALL (IN CH	
	ENCLUDED IN THE PERIODS	
	ADD -LLL COOR USE CANNET TO SERVICE SECOND FROM WALL (N/C)	
	ADD -LLL COUR BASE CABINET TO FORKER SEAVERY UNLL [MCLUSED IN PE #2505]	2
	AND AS IN UPPER TO PORMER SERVERY WALL (MCLUDED IN DE RESOS) AND AS IN UPPER TO PORMER SERVERY WALL (MCLUDED IN DE RESOR)	2
	ASD AS IN UPPER TO SOME A SERVICE SERVICE THE CLUDED IN SERVICES.  CORNER FULL OF THE BASE SERVICES VALUE OF CLUDED IN SERVICES.	i
	CONVERT FULL-COOR BASE WIS COUNTUP CARRIET WITE (3/4" EXTENSION WHITE POT	
	DRAWERS BELOW - COURT OF LOCATION AS PER KITCHE'S DESIRED SECRETION	
	THE PROPERTY OF THE PARTY OF TH	2
USENTE S	CALL CONTROL OF CONTRO	
AND A	Acto wanty bank of drawing	
		3
	TO THE PERSON NAMED IN COLUMN	CABINETRY TOTAL:

\*\*\*HARDLE PLACEMENT: AT INSTALLERS DISCRETION\*\*\*

B-VY	DATE Warch 15, 2021	
UGNATURE: (X	8)	
HGHATURE.	) in the second	the second secon
# Parint	4 Harch 17 SOLI (A)	GOLD
		GOLOV

HEWLED

## GOLDPARK WORTH MORE

TO: Gold Park Homes	
DATE: March 15, 2021	
SITE: Pine Valley	
ιот:	
I/We the undersigned, hereby authorize	Sukhjitpal Smab
to act on my/our behalf in all matters re	lating to colour selection and the selection of upgrade:
and childs for the above mentioned Lot,	including, without limitation, signing of all d
resemble to these matters. Any and all ac	its carried out by Suich it tool Const
on my/our behalf shall have the same ef	fect as acts of my/our own and are irrevocable
The authorization is valid under further v	written notice from the undersigned
	<b>8</b>
4	71 - 1
	_hskaron Singl
WITNESS	PURCHASER
Name:	Name:
	nume,
WITNESS	
	PURCHASER
Name:	Namor



## STONE COUNTERTOP EDGE PROFILES

	STANDARD 2CM EASED EDGE	THRU-OUT
	UPGRADE 3CM EASED EDGE	LOCATION:
	UPGRADE 4CM MITRED EDGE	LOCATION:
	UPGRADE 2CM OGEE EDGE	LOCATION:
LOT#: PV - 8 SIGNATURE: SIGNATURE:	DATE: March 15,	202)



OT# PV-8	DATE: March 15, 2021	
SIGNATURE:		
(0)		
IGNATURE:		



H001-02 > Ensuite 3	H001-03	H001-04 > Master Ensuite
6	6	
H009-03	H009-09	
H011-03	H011-05	H011-06
H033-01		
	H039-03	*NO HARDWARE
LOT#	arch 15,202	
SIGNATURE:		
SIGNATURE:		



## BH-052-09

## Pull - 'Brushed Gold'



LOT# PV-8	DATE: March 15, 202)	
SIGNATURE:		
SIGNATURE:		



## **BLANCO - PRECIS CASCADE**

Silgranit - Undermount Sink 28" x 18" x 7 7/8" - 5 1/2"



Anthracite



Concrete Grey



Metallic Grey



White

ANTHRACITE	
CONCRETE GREY	
METALLIC GREY	
WHITE	
MODEL 401445 Anthracite / 402268 Concrete Gr 401482 White	ey / 401684 Metallic Grey /
Room: Kitchen	Signature:
Date: March 15, 2021	Signature:



## **BLANCO - PRECIS U 3/4**

Silgranit - Undermount Sink 13 3/4" x 18 1/8" x 7 1/2"



Anthracite



Concrete Grey



Metallic Grey



White

V	ANTHRACITE
	CONCRETE GREY
	METALLIC GREY
	WHITE


MODEL 400827 Anthracite / 402270 Concrete Grey / 401679 Metallic Grey / 401703 White /

LOT#	ROOM: Kitchen Island	DATE: March. 15, 2021.
SIGNATURE:	(M)	
SIGNATURE:		



## **MOEN - SLEEK**

One-Handle Pulldown Kitchen Faucet

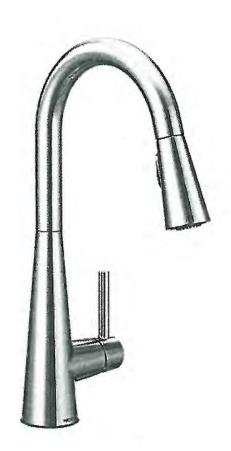

MATTE BLACK (BL)		
STAINLESS (SRS)		
MODEL: 7864 (BL, SRS) Kitchen Faucet		
Lot# 6 Date:	Pooms - 1 - 1 - 1	¥1
Lot# PV - 8 Date: March 15, 2021	Room: Spice Kitchen:	•
Signature:		
Signature:		=
Signature:		-



BLANCO - QUATRUS R15 U 1 MEDIUM Stainless Steel - Undermount 25" x 18" x 9"



Stainless Steel


MODEL 401517 Stainless

Lot# PV - 8	
Room: Spice Kitchen	Signature:
Date: March 15, 2021	Signature:



## MT6X6

Shower Door Handle




MT6X6 Shower Door Handle


6" x 6" back-to-back 3/4" dia. tube Cut and mitred corners with washers (Also available single sided)

CHROME > Ensuite 4	
MATTE BLACK > Master Ensuite Ensuite 3	+

Lot# PY - 8	Date: March 15, 2021	Room: * see above	*
Signature:			+
Signature:			








Tissue Holder Mason - Chrome

Towel Bar Mason - Chrome

## Please select one of the following:

INSTALL STANDARD BATHROOM ACCESSORIES THRU OU (tissue holder + towel bar) *location as per vendors discretion	T *
*DO NOT* INSTALL STANDARD BATHROOM ACCESSORIES	5

THRU OUT \*tissue holder + towel bar will not be provided\*

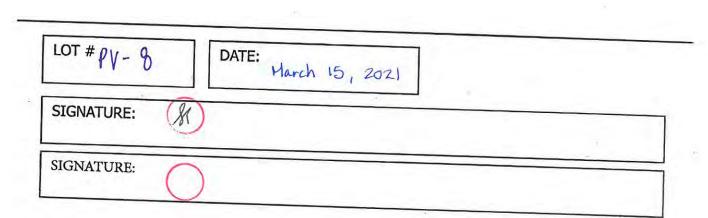



Project: Pine Valley		Lot: 8
Purchaser(s): Sukhjitpal Si	ingh + Jaskeran Singl	^
Standard Hood Fan Deletion		
We acknowledge that the builder's st Do not supply, install and/or credit. \	tandard hood fan will not be in We will install our own hood fa	istalled. n after closing
Signature:		
Signature:		
Date: March 15, 2021		





## INSTALLATION INSTRUCTIONS

COMMERCIAL-STYLE GAS COOKTOPS 30" (76.2 cm), 36" (91.4 cm) AND 48" (121,9 cm) For residential use only

## INSTRUCTIONS D'INSTALLATION

TABLE DE CUISSON AU GAZ DE STYLE COMMERCIAL DE 30 PO (76,2 cm), 36 PO (91,4 cm) ET 48 PO (121,9 cm) Pour utilisation résidentielle uniquement

## Table of Contents/Table des matières

COOKTOP SAFETY2	SÉCURITÉ DE LA TABLE DE CUISSON	1
INSTALLATION REQUIREMENTS3	EXIGENCES D'INSTALLATION	
Tools and Parts3	Outils et pièces	
Location Requirements4	Exigences d'emplacement	2
Electrical Requirements9	Spécifications électriques	2
Gas Supply Requirements9	Spécifications de l'alimentation en gaz	2
INSTALLATION INSTRUCTIONS10	INSTRUCTIONS D'INSTALLATION	
Install Cooktop10	Installation de la table de cuisson	2
Make Gas Connection11	Effectuer le raccordement au gaz	
Install Griddle Tray12	Installer le plateau d'égouttement	
Complete Installation12	Terminer l'installation	
GAS CONVERSIONS13	CONVERSIONS POUR CHANGEMENT DE GAZ	3
Propane Gas Conversion13	Conversion pour l'alimentation au propane	3
Natural Gas Conversion16	Conversion pour l'alimentation au gaz naturel	3


## IMPORTANT:

**Installer:** Leave installation instructions with the homeowner. **Homeowner:** Keep installation instructions for future reference.

## IMPORTANT:

Installateur : Remettre les instructions d'installation au propriétaire.


Propriétaire : Conserver les instructions d'installation pour référence ultérieure.

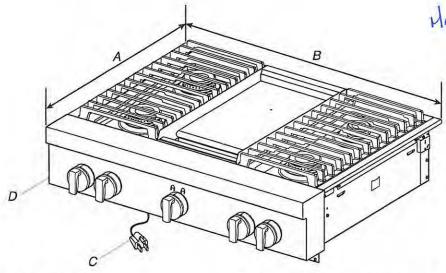

A. 271/8" (68.9 cm) B. 353/4" (90.8 cm)


- C. 3 prong grounding-type power supply cord D. Model/serial/rating plate (located on the underside of the cooktop burner base)

## **Side View of Cooktop**

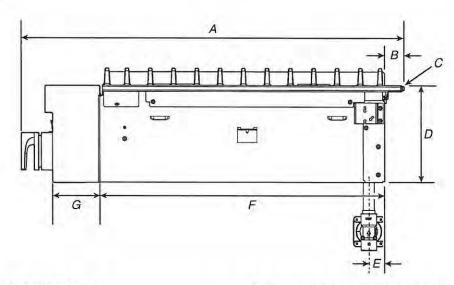


- A. 273/8" (69.5 cm)
- B. 11/4" (3.2 cm)
- C. Island trim or optional backguard
- D. 77/16" (18.8 cm)

- E. Gas inlet is located 17/e" (4.8 cm) from the back of the cooktop burner base and 47/e" (12.4 cm) in from left-hand side of the cooktop burner base.
- F. 22" (55.9 cm)
- G. 35/16" (8.4 cm)



## March 15,2021

Main KHchen

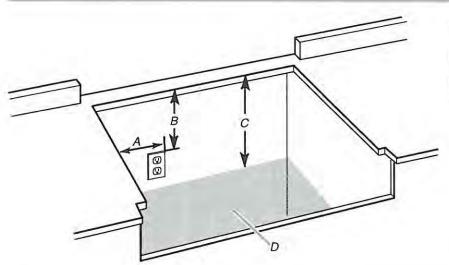


- A. Grounded 3 prong outlet should be located on left-hand side of the cutout 16" (40.6 cm) max. from enclosure sidewall
- B. 10" (25.4 cm) min. clearance from countertop to top of the outlet
- C. 14" (35.6 cm) countertop to the gas supply line
- D. Gas supply line should be located in this area on rear or side walls or the supply line can come up through the floor.

**NOTE:** Solid side and bottom of cutout enclosure not shown.

## **Cabinet Requirements**

**IMPORTANT:** If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

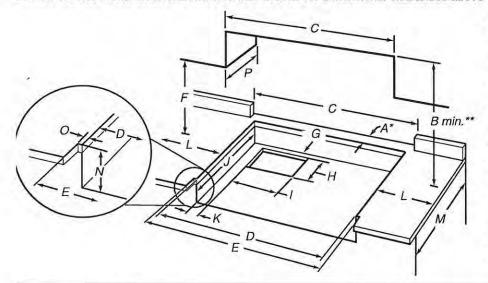

- A. See chart.
- B. See chart.
- C. See chart.
- D. See chart.
- E. See chart.
- F. 18" (45.7 cm) min. clearance upper cabinet to countertop
- G. 3/4" (19 mm) back of cabinet cutout to gas opening cutout
- H. 67/a" (16.1 cm) gas opening cutout depth
- I. 121/2" (31.7 cm) gas opening cutout width
- J. 221/4" (56.5 cm) cabinet cutout depth
- K. 2" (5.1 cm) cabinet side to gas cutout
- L. 6" (15.2 cm) min. distance on both sides of the cooktop to the side wall or other combustible material above cooking surface
- M. 24" (61.0 cm) cabinet depth
- N. 71/4" (18.4 cm) cabinet depth to countertop
- O. Notch to be equal on both sides
- P. 13" (33.0 cm) upper cabinet depth


Size	A*	B**	C	D	E
	Cooktop Cutout to Back Wall	Cooktop to Cabinet	Optional Backguard and Upper Cabinet Opening	Cabinet and Countertop	Countertop Only
30" (76.2 cm)	1 <sup>3</sup> / <sub>4</sub> " (4.4 cm)*	42" (106.7 cm)	30" (76.2 cm)	29 <sup>1</sup> / <sub>4</sub> " (74.3 cm)	29 <sup>7</sup> / <sub>8</sub> " (75.9 cm) for zero clearance
36" (91.4 cm)	1 <sup>3</sup> / <sub>4</sub> " (4.4 cm)*	58" (147.3 cm)	36" (91.4 cm)	35 <sup>1</sup> / <sub>4</sub> " (89.5 cm)	35 <sup>3</sup> / <sub>4</sub> " (90.8 cm) for zero clearance
48" (121.9 cm)	1 <sup>3</sup> / <sub>4</sub> " (4.4 cm)*	58" (147.3 cm)	48" (121.9 cm)	47 <sup>1</sup> / <sub>4</sub> " (120.0 cm)	47 <sup>7</sup> / <sub>8</sub> " (121.6 cm) for zero clearance


<sup>\*</sup> NOTE: If back wall is constructed of a combustible material and a backguard is not installed, a minimum clearance of dimension A + 6" (15.2 cm) is required for all models.

If installing a range hood above the cooktop, follow the range hood instructions for dimensional clearances above the cooktop surface.

NOTE: Due to manufacturing factory tolerances, these are nominal dimensions. You may need to readjust to meet your clearance.

<sup>\*\*</sup> NOTES: Dimension "B" can be reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by not less than 0.25" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum, or 0.020" (0.5 mm) copper.





## INSTALLATION INSTRUCTIONS

27" (68.6 CM) AND 30" (76.2 CM) ELECTRIC BUILT-IN CONVECTION MICROWAVE OVEN

## INSTRUCTIONS D'INSTALLATION FOUR À MICRO-ONDES ENCASTRÉ ÉLECTRIQUE À CONVECTION DE 27" (68,6 CM) ET 30" (76,2 CM)

## Table of Contents/Table des matières

BUILT-IN MICROWAVE OVEN SAFETY	2
INSTALLATION REQUIREMENTS	
Tools and Parts	3
Location Requirements	3
Electrical Requirements	4
INSTALLATION INSTRUCTIONS	5
Spacer Kit Installation	5
Prepare Built-In Microwave Oven	5
Make Electrical Connection	6
Install Microwave Oven	6
Complete Installation	7

SÉCURITÉ DU FOUR À MICRO-ONDES ENCASTRÉ	8
EXIGENCES D'INSTALLATION	
Outils et pièces	8
Exigences d'emplacement	
Spécifications électriques	10
INSTRUCTIONS D'INSTALLATION	11
Installation de la trousse d'entretoise	11
Préparation du four à	
micro-ondes encastré	11
Raccordement électrique	11
Installation du four à micro-ondes	
Achever l'installation	13

## **IMPORTANT:**

Save for local electrical inspector's use.

## **IMPORTANT:**

À conserver pour consultation par l'inspecteur local des installations électriques.

## INSTALLATION REQUIREMENTS

PV-8 S8 March 15, 2021 (Kitchun)

## **Tools and Parts**

Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

## **Tools Needed**

- Phillips screwdriver
- Flat-blade screwdriver
- Measuring tape
- Level

- Drill (for wall cabinet installations)
- 1/8" (3 mm) drill bit (for wall cabinet installations)
- 1" (2.5 cm) drill bit (for wall cabinet installations

## **Parts Needed**


- UL listed or CSA approved conduit connector
- UL listed wire connectors

## Parts Needed - Flush Installation

- W10801485 Stainless steel flush installation kit for 27" (68.6 cm) models
- W10801486 Stainless steel flush installation kit for 30" (76.2 cm) models
- W10801487 Black flush installation kit for 30" (76.2 cm) models

To order, see the "Assistance or Service" section of the Use and Care Guide.

## **Parts Supplied**



- A. Spacer bars (2)
- B. Bottom vent (1)
- C. 3/8" (9.5 mm) hex-head washer screws (4)
- D. 3/4" (1.9 cm) pan-head screws (4)

Check local codes. Check existing electrical supply. See "Electrical Requirements."

It is recommended that all electrical connections be made by a licensed, qualified electrical installer.

## **Location Requirements**

IMPORTANT: Observe all governing codes and ordinances.


- Cabinet opening dimensions that are shown must be used. Given dimensions provide minimum clearance with microwave oven.
- Recessed installation area must provide complete enclosure around the recessed portion of the microwave oven.
- Grounded electrical supply is required. See "Electrical Requirements" section.
- Electrical supply junction box should be located 3" (7.6 cm) maximum below the support surface when the microwave oven is installed in a wall cabinet. A 1" (2.5 cm) minimum diameter hole should have been drilled in the left rear corner of the support surface to pass the appliance cable through to the junction box.

- For installation above single built-in oven, the junction box must located inside upper cabinet.
- If you are installing the junction box on rear wall behind the microwave oven, the junction box must be recessed and located in the upper or lower right or left corner of the cabinet; otherwise, the microwave oven will not fit into the cabinet opening.
- Microwave oven support surface must be solid, level, and flush with bottom of cabinet cutout. Floor must be able to support a weight of 108 lbs (49.0 kg).

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate, or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).

## **Product Dimensions**

27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens




## 27" (68.6 cm) models

- A. 253/8" (64.5 cm)
- B. 173/8" (44.1 cm)
- C. 2211/16" (57.7 cm)
- D. 263/4" (68.0 cm) overall width
- E. 197/8" (50.3 cm) overall height
- F. JMC2427IM: 25<sup>9</sup>/16 (64.9 cm) JMC2427IL: 24<sup>3</sup>/4" (62.9 cm)

## 30" (76.2 cm) models

- A. 283/8" (72.1 cm)
- B. 173/8" (44.1 cm)
- C. 2211/16" (57.7 cm)
- D. 293/4" (75.6 cm) overall width
- E. 197/8" (50.3 cm) overall height
- F. JMC2430IM: 25<sup>9</sup>/<sub>16</sub> (64.9 cm) JMC2430IL: 24<sup>3</sup>/<sub>4</sub>" (62.9 cm)

27" (68.6 cm) and 30" (76.2 cm) Microwave Oven Spacer Kit



27" (68.6 cm) models
A. 263/4" (67.9 cm) overall width

30" (76.2 cm) models
A. 29<sup>3</sup>/<sub>4</sub>" (75.6 cm) overall width

**NOTE:** The microwave oven spacer kit will allow the microwave oven to be installed in a  $17^3/8^{\circ}$  to  $17^3/4^{\circ}$  (44.1 to 45.1 cm) maximum cutout height.




A microwave oven spacer kit is available from your dealer that will allow the microwave oven to be installed in a 19" to  $19^{13}/_{16}$ " (48.3 to 50.2 cm) maximum cutout height. Match the oven size to the following kits:

- 27" (68.6 cm) Stainless Steel Model W10469901
- 30" (76.2 cm) Stainless Steel Model W10469903

To order, see the "Assistance or Service" section of the Use and Care Guide.

## **Cabinet Dimensions**

## 27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens



## 27" (68.6 cm) models


- A. 27" (68.6 cm) min. cabinet width
- B. 19<sup>7</sup>/s" (50.3 cm) from bottom of cutout to bottom of upper cabinet door
- C. 40" (101.6 cm) bottom of cutout to floor (recommended)
- D. 251/2" (64.8 cm) cutout width
- E. 11/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 17<sup>5</sup>/<sub>8</sub>" (44.7 cm) recommended cutout height (will fit cutout height from 17<sup>3</sup>/<sub>8</sub>" [44.1 cm] to 17<sup>3</sup>/<sub>4</sub>" [45.1 cm])
- G. 21<sup>7</sup>/<sub>8</sub>" (55.5 cm) min. cutout depth

## 30" (76.2 cm) models


- A. 30" (76.2 cm) min. cabinet width
- B. 19<sup>7</sup>/e" (50.3 cm) from bottom of cutout to bottom of upper cabinet door
- C. 40" (101.6 cm) bottom of cutout to floor (recommended)
- D. 281/2" (72.4 cm) cutout width
- E. 11/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 17<sup>5</sup>/<sub>8</sub>" (44.7 cm) recommended cutout height (will fit cutout height from 17<sup>5</sup>/<sub>8</sub>" [44.1 cm] to 17<sup>5</sup>/<sub>4</sub>" [45.1 cm])
- G. 21<sup>7</sup>/s" (55.5 cm) min. cutout depth

## Minimum Installation Clearances

For proper installation, the following minimum clearances must exist above and below the cabinet opening.



## Installation Above Single Built-In Oven



## **Electrical Requirements**

## **GROUNDING INSTRUCTIONS**

## For a permanently connected microwave oven:

The microwave oven must be connected to a grounded, metallic, permanent wiring system, or an equipment grounding conductor should be run with the circuit conductors and connected to the equipment grounding terminal or lead on the microwave oven.

## SAVE THESE INSTRUCTIONS

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.


Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/ NFPA 70 – latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91 – latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association 1 Batterymarch Park Quincy, MA 02169-7471 CSA International 8501 East Pleasant Valley Road Cleveland, OH 44131-5575

## **Electrical Connection**

To properly install your microwave oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here. Microwave oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. The model/serial/rating plate is located underneath the control panel along the oven vent.



A. Model/serial/rating plate

- The microwave oven rated 120/240 V, 20 A, has 4 wires (L1, L2, N, and G) in the flex conduit, and should be connected to a 20 A maximum-rated circuit, overcurrent protected on both the L1 and L2 circuits.
- A time-delay fuse or circuit breaker is recommended.
- Flexible cable from the microwave oven should be connected directly to the junction box.

- Do not cut the conduit. The length of conduit provided is for serviceability of the microwave oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:

Connect the aluminum wiring using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table:

Voltage	Microwave Wi	th Convection Oven
120/240 VAC	15 A	
120/208 VAC	15 A	(Ox)
		011 9 80

PV-8 1021

(Kitcher

## INSTALLATION INSTRUCTIONS

## Spacer Kit Installation


## NOTES:

- The microwave oven spacer kit allows the microwave oven to be installed in an 17<sup>7</sup>/<sub>16</sub>" to 17<sup>7</sup>/<sub>8</sub>" (44.1 cm to 45.3 cm) maximum cutout height.
- If your cabinet cutout height is more than 177/16" (44.1 cm), you must install the spacer kit. Proceed to "Assemble Spacer Kit"
- If your cabinet cutout height is less than 17<sup>7</sup>/<sub>16</sub>" (44.1 cm), you do not have to install the spacer kit. Proceed to "Prepare Built-In Microwave Oven."

## Assemble Spacer Kit

1. Attach the bottom vent to spacer bars using four 3/8" (9.5 mm) hex-head washer screws.

NOTE: Spacer bar flanges should be facing out.




- A. Bottom vent
- B. Spacer bar flange
- C. Spacer bars
- D. 3/8" (9.5 mm) hex-head washer screws

## Install Spacer Kit

- Center assembled microwave oven spacer kit against lower front edge of the cabinet cutout.
- Using an 1/8" (3.2 mm) drill bit, drill through the mounting holes in the spacer bars to create pilot holes.

3. Attach the assembled spacer kit to the cabinet using four 3/4" (1.9 cm) (flat-head screws. Do not overtighten screws.



A. 3/4" (1.9 cm) flat-head screws B. Spacer kit assembly

## Prepare Built-In Microwave Oven

 Locate existing wiring to avoid drilling into or severing wiring during installation.


## AWARNING

**Excessive Weight Hazard** 


Use two or more people to move and install microwave oven.

Failure to do so can result in back or other injury.

- To avoid floor damage, set the microwave oven onto cardboard prior to installation. Do not use handle or any portion of the front frame for lifting.
- Remove the shipping materials and tape from the microwave oven.
- Remove and set aside racks and other items from inside the microwave oven.
- Remove the hardware package from inside the bag containing literature.
- Move the microwave oven and cardboard close to the microwave oven's final location.







## INSTALLATION INSTRUCTIONS

27" (68.6 CM) AND 30" (76.2 CM) ELECTRIC SINGLE AND DOUBLE BUILT-IN OVEN

## INSTRUCTIONS D'INSTALLATION FOUR ÉLECTRIQUE ENCASTRÉ 27" (68,6 CM) ET 30" (76,2 CM) - SIMPLE ET DOUBLE

## Table of Contents/Table des matières

BUILT-IN OVEN SAFETY	2
INSTALLATION REQUIREMENTS	3
Tools and Parts	
Location Requirements	
Electrical Requirements	
INSTALLATION INSTRUCTIONS	7
Prepare Built-In Oven	
Remove Oven Door(s)	7
Replace Oven Door(s)	
Positioning Oven Feet for Multiple Cabinet Cutout Heig	
Make Electrical Connection	13
Install Oven	
Install Warming Drawer Deflector Kit (Only	
for Ovens Installed above Warming Drawers)	
Complete Installation	16

SÉCURITÉ DE LA TABLE DE CUISSON	17
EXIGENCES D'INSTALLATION	17
Outillage et pièces	
Exigences d'emplacement	
Spécifications électriques	20
INSTRUCTIONS D'INSTALLATION	21
Préparation du four encastré	
Dépose de la/des porte(s) du four	
Réinstallation de la/des porte(s) du four	22
Positionnement des pieds du four pour des ouvertures d'encastrement de hauteur différente	
Raccordement électrique	27
Installation du four	28
Installation de l'ensemble de déflecteur du tiroir-réchaud (uniquement pour les fours installés au-dessus d'un tiroir-réchaud)	
Achever l'installation	


## IMPORTANT:

Save for local electrical inspector's use.


## IMPORTANT:

À conserver pour consultation par l'inspecteur local des installations électriques.

W11235621A



## **Product Dimensions - Single Ovens**




## 27" (68.6 cm) models

- A. 291/a" (75.8 cm) max, overall height
- B. 27" (68.6 cm) overall width
- C. JJW2427IM 26<sup>3</sup>/<sub>8</sub>" (67 cm) JJW2427IL 27<sup>3</sup>/<sub>16</sub>" (69 cm)
- D. 231/4" (59.1 cm) max. recessed depth
- F. 48" (121.9 cm) flexible conduit length
- G. 251/16" (64.6 cm) max. recessed width
- H. 12" (30.5 cm) from back of control panel to start of strain

## 30" (76.2 cm) models

- A. 291/s" (75.8 cm) max. overall height
- B. 30" (76.2 cm) overall width
- JJW2430IM 26<sup>3</sup>/a" (67 cm) JJW2430IL 27<sup>3</sup>/16" (69 cm)
- 231/4" (59.1 cm) max. recessed depth
- E. 26¾" (67.9 cm) recessed height E. 26¾" (67.9 cm) recessed height
  - 48" (121.9 cm) flexible conduit length
  - G. 287/16" (72.2 cm) max. recessed width
  - H. 12" (30.5 cm) from back of control panel to start of strain

## Single Ovens Installed in Cabinet




## 27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width
- B. 23/16" (5.5 cm) top of cutout to bottom of upper cabinet door
- C. 32" (81.3 cm) bottom of cutout to floor
- D. 251/2" (64.8 cm) cutout width
- E. 1½" (3.8 cm) min. bottom of cutout to top of cabinet door
- 28" (71.2 cm)\* recommended cutout height
- G. 24" (60.7 cm) cutout depth

## 30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
- 2%/6" (5.5 cm) top of cutout to bottom of upper cabinet door
- 32" (81.3 cm) bottom of cutout to floor
- D. 281/2" (72.4 cm) cutout width
- 1½" (3.8 cm) min. bottom of cutout to top of cabinet door
- 28" (71.2 cm)\* recommended cutout height
- G. 24" (60.7 cm) cutout depth

Cabinet Dimensions - Single Ovens




## 27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet
- B. 1½" (3.8 cm) min. top of cutout to underside of countertop
- C. 51/4" (13.3 cm) bottom of cutout to floor
- D. 251/2" (64.8 cm) cutout width
- E. 28" (71.2 cm) min.cutout height


## 30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
- B. 1½" (3.8 cm) min. top of cutout to underside of countertop
- 5¼" (13.3 cm) bottom of cutout to floor
- D. 281/2" (72.4 cm) cutout width
- E. 28" (71.2 cm) min.cutout height

\*NOTE: The cutout height can be between 2615/16" and 297/16" (68.4 cm and 74.8 cm) for single ovens.



## **Product Dimensions - Double Ovens**



## 27" (68.6 cm) models


- A. 52%" (133 cm) max. overall height
- B. 27" (68.6 cm) overall width
- C. JJW2827IM 26°/s" (67 cm) JJW2827IL - 27°/1s" (69 cm)
- D. 231/4" (59.1 cm) max. recessed depth
- E. 4813/16" (124 cm) recessed height
- F. 66" (167.6 cm) flexible conduit length
- G. 257/16" (64.6 cm) max. recessed width
- H. 12" (30.5 cm) from back of control panel to start of strain

## 30" (76.2 cm) models

- A. 52%" (133 cm) max. overall height
- B. 30" (76.2 cm) overall width
- C. JJW2830IM 26<sup>3</sup>/s" (67 cm) JJW2830IL - 27<sup>3</sup>/16" (69 cm)
- D. 231/4" (59.1 cm) max. recessed depth
- E. 481%s" (124 cm) recessed height F. 66" (167.6 cm) flexible conduit
- length G. 287/16" (72,2 cm) max. recessed width
- H. 12" (30.5 cm) from back of control panel to start of strain relief

## **Cabinet Dimensions - Double Ovens**

## **Double Ovens Installed in Cabinet**




## 27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width
- B. 2¾1s" (5.5 cm) top of cutout to bottom of upper cabinet door
- C. 14¾" (37.5 cm) bottom of cutout to floor is recommended. 4"-14¾" (10.2-37.5 cm) bottom of cutout to floor is acceptable.
- D. 251/2" (64.8 cm) cutout width
- E. 1½" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 501/4" (127.6 cm)\*
- recommended cutout height G. 24" (60.7 cm) cutout depth

## 30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
- B. 2%s" (5.5 cm) top of cutout to bottom of upper cabinet door C. 14%" (37.5 cm) bottom of cutout to floor
- C. 14%" (37.5 cm) bottom of cutout to floor is recommended. 4"-14%" (10.2-37.5 cm) bottom of cutout to floor is acceptable.
- D. 281/2" (72.4 cm) cutout width
- E. 11/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 501/4" (127.6 cm)\*
- recommended cutout height G. 24" (60.7 cm) cutout depth
- \*NOTE: The cutout height can be between 487/8" and 523/16" (124.1 cm and 132.6 cm) for double ovens.



## **Electrical Requirements**

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/ NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances.


A copy of the above code standards can be obtained from:


National Fire Protection Association 1 Batterymarch Park Quincy, MA 02169-7471 CSA International 8501 East Pleasant Valley Road Cleveland, OH 44131-5575

## **Electrical Connection**

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. The model/serial/rating plate is located under the control panel on single ovens and under the control panel on the upper oven cavity on double ovens. See the following illustrations.







Double Oven
A. Model/serial/rating plate

- Models rated from 7.3 to 9.6 kW at 240 V (5.4 to 7.4 kW at 208 V) require a separate 40 A circuit. Models rated at 4.8 kW and below at 240 V (3.6 kW and below at 208 V) require a separate 20 A circuit.
- A circuit breaker is recommended.
- Connect directly to the circuit breaker box (or fused disconnect) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See "Make Electrical Connection" section.
- Flexible conduit from the oven should be connected directly to the junction box.
- Fuse both sides of the line.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:

Connect the aluminum wiring using special connectors and/or tools designed and UL listed for joining copper to aluminum

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.


For power requirements for models JJW2430I, JJW2427I, JJW2830I, and JJW2827I refer to the following table.

	240 VAC	208 VAC
Model	kW	kW
JJW24301	4.1	3.1
JJW2427I	4.1	3.1
JJW2830I	8.7	6.5
JJW28271	8.7	6.5
		Commercial

## KitchenAid®

FOR THE WAY IT'S MADE.

## Side By Side Built-In Refrigerator



## PRODUCT MODEL NUMBERS

KBSD602E KBSD606E KBSD608E KBSN602E KBSN608E KBSD612E KBSD618E

Electrical: A 115 volt, 60 Hz., AC only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water Pressure: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

## Reverse Osmosis Water Supply:

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system gwoing to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


## IMPORTANT:

- It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source.
- Do not install in a location where the temperature will fall below 55°F (13°C).
- Floor must support the refrigerator weight, more than 600 lbs (272 kg), door panels and contents of the refrigerator.

## PRODUCT DIMENSIONS

- The depth from the front of the top grille to the back of the refrigerator cabinet is 5%" (64.5 cm).
- The power cord is 84" (213 cm) long.
- Height dimensions are shown with leveling legs extended 1/s" (3 mm) below the rollers.

## SIDE VIEW

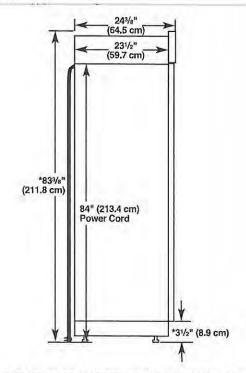



\*When leveling legs are fully extended to 11/4" (3.2 cm) below rollers, add 11/2" (2.9 cm) to the height dimensions.

## **OPENING DIMENSIONS**


To avoid tipping during use, the solid soffit must be within 1" (2.5 cm) maximum above the refrigerator. If the solid soffit is higher than 1" (2.5 cm) or one is not available, then the refrigerator must be braced. If the anti-tip boards are needed, they must be attached to the rear wall studs 80" to 90" (203 cm to 229 cm) above the floor. See "Install Anti-Tip Boards" for more information.

NOTE: A clearance of  $V_2$ " (1.3 cm) above the top grille must be maintained in order for the top grille to be removed.

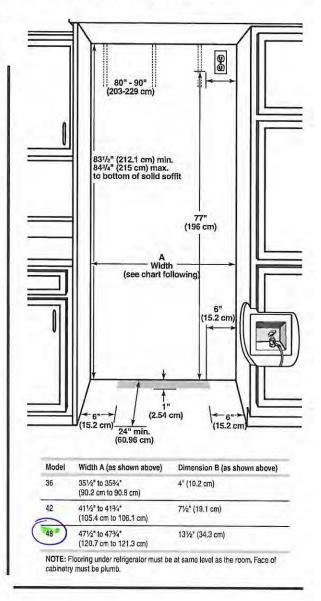




## **TOP VIEW**



## FRONT VIEW

- Width dimensions were measured from trim edge to trim edge.
- Height dimensions are shown with leveling legs extended 1/6" (3 mm) below the rollers.

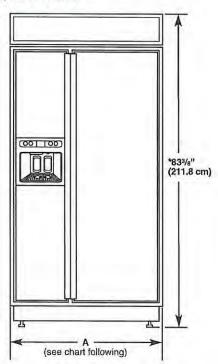

Model	Width A (Trim edge to trim edge)
36	3611/32" (92.3 cm)
42	42 <sup>1</sup> / <sub>32</sub> " (107,5 cm)
48	4811/32" (122.8 cm)

\*When leveling legs are fully extended to 11/4" (3.2 cm) below rollers, add 11/6" (2.9 cm) to the height dimensions.


## DOOR SWING DIMENSIONS

The location must permit both doors to open to a minimum of 90°. Allow 5" (12.7 cm) minimum space between the side of the refrigerator and a corner wall.


NOTE: More clearance may be required if you are using overlay panels, custom handles, or extended handles on a Classic model.


To adjust the door swings, see "Adjust Doors."


## 36" (91.4 cm) Models



## 42" (106.7 cm) Models











NEM5466UC Black

ne 24" electric cooktop, eek in design, features otimal temperature ontrol and is ideal for tchens with a smaller otprint.

## eatures & Benefits

recise temperature ontrol for better cooking esults.


Peramic glass surface nakes cooking and leaning especially easy.

lesidual heat indicator varns if cooktop is warm r hot.

'ush-to-turn control nobs.

deal for kitchens with a mall footprint.

General Properties	
Knob material	Plastic
Element Performance	
Power of Front Left heating element	1,850 W
Power of Back Left heating element	2,200 W
Power of Back Right heating element	1,200 W
Power of Front Right heating element	1,800 W
Element Size	State of
Dimension of Front Left heating element	6"
Dimension of Back Left heating element	8"
Dimension of Back Right neating element	6"
Dimension of Front Right heating element	7"
Technical Details	
Watts	6,600 W
Circuit breaker	30 A
Volts	208-240 V
Frequency	60 Hz
Plug type	No plug
Energy source	Electric







HEZ390210 8" AutoChef® pan

HEZ390220 9" AutoChef® pan



HEZ390230 10" AutoChef® pan




r help and assistance with Bosch accessories please call 1-800-944-2904 Mon-Fri 8am to 6pm EST

tes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without ice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product rature or you may contact your account manager for further details.


rranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The forego leline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmet fects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage) to the finish of the Product, for a period of thirty (30) did not the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as ferences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

## LICUSIIC CUURSUR

10 Series - Black Frameless NEM5466UC




## istallation Details

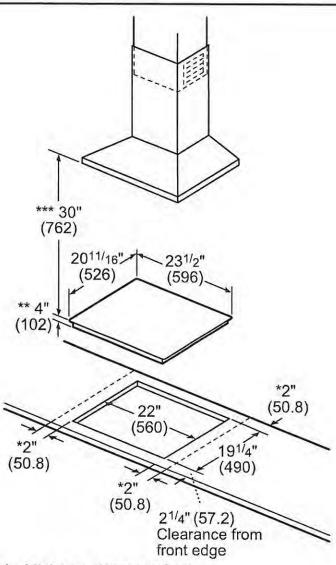

- Minimum clearance from the cooktop cutout to the wall
- \*\* Maximum cutout depth
- \*\*\* Minimum clearance between the cooktop surface and lower edge of the exhaust hood.

measurements in inches (mm)

## Installation above Wall Ovens




Notes: Dimensions based on standard countertop height (36" with 43/4" toe kick including base plate).

The built-in oven can be installed below the cooktop as long as there is at least 1" (25) of space between the bottom flat surface of the cooktop and the top of the oven.

Please allow at least 2" (51) from the countertop front edge to the edge of the cutout.

measurements in inches (mm)



r help and assistance with Bosch accessories please call 1-800-944-2904 Mon-Fri 8am to 6pm EST

tes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without lice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout. Applicable product warranty can be found in accompanying product rature or you may contact your account manager for further details.

rranties: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The forego leline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmet fects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chip, dents, or other damage) to the finish of the Product, for a period of thirty (30) did not the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as ferences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.


r more information on our entire line of products, go to www.bosch-home.ca or call 1-800-944-2904


FILEIGANIC INCANDENCEURS

## **A WARNING**

Avoid Scalding or Electrical Shock Hazard!

Make sure the water supply and electrical supply are shut off before installation or service.




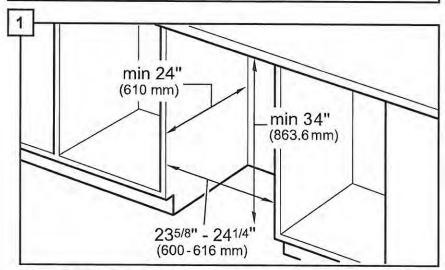


Note: This dishwasher is designed to be enclosed on the top, back and both sides by standard residential kitchen cabinetry.

**Select a location** as close to the sink as possible for easy access to water supply and drain lines.

For proper dishwasher operation and appearance, ensure that the enclosure is square and has the dimensions shown.

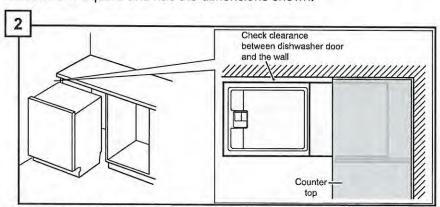


If the dishwasher is to be installed in a corner, ensure that there is adequate clearance to open the door as shown.

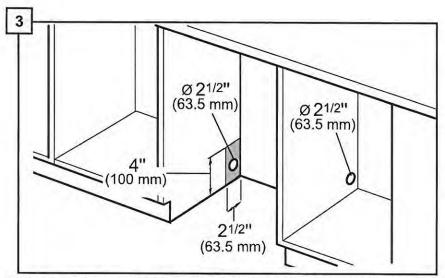

PV-8 85) March 15, 2021

After locating the proper place for your dishwasher, create required openings in your cabinets in order to allow for water, drain and electrical lines on the appropriate side. The holes should be cut within the 4x2.5" area shown.

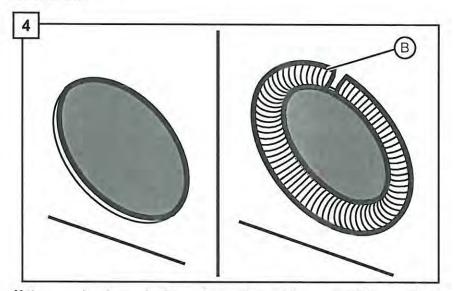

If the opening is made through wood, sand it smooth. If the opening is made through metal, use the provided edge protector (B) or other approved method to protect wiring from damage.

# GE® 5.2 Cu. Ft. Capacity Washer with SmartDispense


PV-8 (8) Harch 15,2021

## DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)


CIRCUIT REQUIREMENTS: An individual, properly-grounded branch by a 15 or 20 amp circuit breaker or a time-delay fuse, is required. sircuit, with a three-prong grounding-type receptacle, protected

ELECTRICAL RATING: 120V, 60Hz, 10A

NOTE: Washer wall outlet must be located within 36" of service code entry. Wall outlet must not be located behind dryer. INSTALLATION INFORMATION: Before installing, consult installation instructions packed with product for current dimensional data.

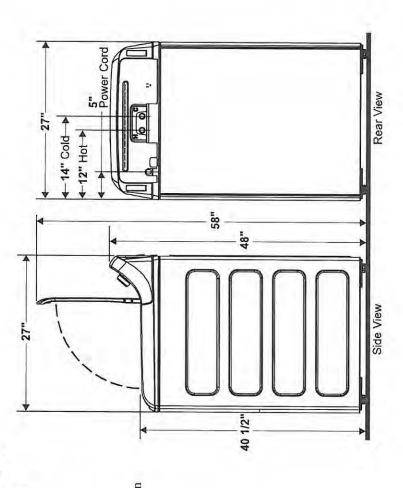





Snevification Revised (11/90)