

Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### **APPLIANCES**

Invoice	Qty.	Description
2826	1	KITCHEN: APPLIANCE SPECIFICATIONS ATTACHED - SIGNED COPY
27Jul21 NoCat		

nvoice	IC Qty.	Description
2826	1	FRONT FOYER: RELOCATE STANDARD FOYER CLOSET TO SIDE EXTERIOR WALL - ENLARGE CLOSET TO ACCOMMODATE
27Jul21 NoCat		
2826	1	MASTER ENSUITE: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN
27Jul21 NoCat		
2863 37 26Aug21	1	POWDER ROOM: TILE, FLOOR - LEVEL 4 - 12x24" LAID IN STRAIGHT STACKED PATTERN, SEE PLAN FOR TILE DIRECTION
2863 37 26Aug21	1	LAUNDRY ROOM: TILE, FLOOR - LEVEL 5 - 24x24" LAID IN STRAIGHT STACKED PATTERN
2863 37 26Aug21	1	BASEMENT FOYER: TILE, FLOOR , LEVEL 5 - 24X24" LAID IN STRAIGHT, STACKED PATTERN.
2863 41 26Aug21	1	MASTER ENSUITE: TILE, FLOOR , LEVEL 9 - 30X60" LAID IN STRAIGHT, STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
2863 48 26Aug21	1	MASTER ENSUITE: TILE, WALL, LEVEL 2 - 4X12"
2863 27 26Aug21	1	MASTER ENSUITE: TILE INSTALLATION UPGRADE, WALL, HERRINGBONE
2863 44 26Aug21	1	MASTER ENSUITE: TILE, SHOWER FLOOR, LEVEL 3 - PENNY ROUND
2863 37 26Aug21	1	SHARED ENSUITE: TILE, FLOOR , LEVEL 5 - HEX
2863 44 26Aug21	1	SHARED ENSUITE: TILE, SHOWER FLOOR, LEVEL 3 - PENNY ROUND

DisciplineMS.rpt 23feb21 Page 1 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

CER	٨	T.	ATC

Invoice		Description
2863 50 26Aug21	1	SHARED ENSUITE: TILE, WALL, LEVEL 4 - 3X12" - HORIZONTAL STACKED PATTERN.
2863 38 26Aug21	1	ENSUITE 2: TILE, FLOOR , LEVEL 6 - 18x36" LAID IN STRAIGHT, STACKED PATTERN.
2863 50 26Aug21	1	ENSUITE 2: TILE, WALL, LEVEL 4 - 3x9" LAID IN HORIZONTAL STACKED PATTERN.
2863 19 26Aug21	1	POWDER ROOM: TILE GROUT UPGRADE, FLOOR , UPG GROUT
2863 19 26Aug21	1	BASEMENT FOYER: TILE GROUT UPGRADE, FLOOR , UPG GROUT
2863 19 26Aug21	1	LAUNDRY: TILE GROUT UPGRADE, FLOOR , UPG GROUT
2863 20 26Aug21	1	MASTER ENSUITE: TILE GROUT UPGRADE, SHOWER FLOOR, UPG GROUT
2863 21 26Aug21	1	MASTER ENSUITE: TILE GROUT UPGRADE, WALL, UPG GROUT
2863 20 26Aug21	1	MASTER ENSUITE: TILE GROUT UPGRADE, FLOOR, UPG GROUT
2863 19 26Aug21	1	ENSUITE 2: TILE GROUT UPGRADE, FLOOR , UPG GROUT
2863 21 26Aug21	1	ENSUITE 2: TILE GROUT UPGRADE, WALL, UPG GROUT
2863 19 26Aug21	1	SHARED ENSUITE: TILE GROUT UPGRADE, FLOOR , UPG GROUT
2863 21 26Aug21	1	SHARED ENSUITE: TILE GROUT UPGRADE, WALL, UPG GROUT

DisciplineMS.rpt 23feb21

Page 2 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### **CERAMIC**

Invoice	Qty.	Description
2863 20 26Aug21	1	SHARED ENSUITE: TILE GROUT UPGRADE, SHOWER FLOOR, UPG GROUT
2863	1	THRU OUT - GROUT LINES AS SMALL AS POSSIBLE PLEASE!
26Aug21 NoCat		
2863	1	KITCHEN: MIRAGE, 7 3/4" WHITE OAK, ENGINEERED HARDWOOD, 3/4", FLAIR LIGHT CHARACTER TEXTURE, DURAMATT FINISH - LEVEL 7
26Aug21 NoCat		KITCHEN: DO NOT SUPPLY / INSTALL CERAMIC - CREDIT

#### CONCRETE AND DRAIN

CONCR	CONCRETE AND DRAIN		
Invoice	Qty.	Description	
2803	1	BACK FLOW PREVENTER VALVE	
15Jun21 NoCat			

DisciplineMS.rpt 23feb21 Page 3 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### DRYWALL

Invoice	Qty.	Description
2826 72,324 27Jul21 **	2	GARAGE DOOR OPENER (CHAMBERLAIN BELT DRIVE) - WITH 1 REMOTE - PRICE IS PER DOOR
2826	1	FRONT FOYER: RELOCATE STANDARD FOYER CLOSET TO SIDE EXTERIOR WALL - ENLARGE CLOSET TO ACCOMMODATE
27Jul21 NoCat		
2826	1	GREAT ROOM: UPGRADE FIREPLACE TO 36" MAJESTIC QUARTZ WITH DIAMOND WHITE CRYSTALS
27Jul21 NoCat		
2826	1	REAR EXTERIOR (deck level): ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE)
27Jul21 NoCat		
2826	1	**CUSTOM LAYOUT** DINING ROOM/GREAT ROOM: DELETE PARTIAL WALL, INSTALL FULL TRIMMED ARCH APPROX. 5 FEET WIDE
27Jul21 NoCat		
2826	1	THRU OUT 2ND FLOOR: INCREASE HEIGHT OF DOOR TO 8FT SECOND FLOOR - PER DOOR
27Jul21 NoCat		
2826	1	GREAT ROOM: RAISE FIREPLACE APPROX. 6" A.F.F.
27Jul21 NoCat		
2826	1	MASTER ENSUITE: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN
27Jul21 NoCat		
2959	1	GARAGE: ADD SPRAY FOAM TO GARAGE CEILING (BELOW HABITABLE AREAS) - R40 2lb
23Feb22 NoCat		

DisciplineMS.rpt 23feb21 Page 4 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

	_	$\sim$		_	
и,	- 11'4	17	$\Gamma \mathbf{R} \mathbf{I}$	( ' )	<b>4</b> I
١,	1 1				•

ELECT Invoice	_	AL Description
2826 72,268 27Jul21	4	BASEMENT: INTERIOR WALL OUTLET: 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT - SEE PLAN
2826 72,248 27Jul21 **	1	APRILAIRE 600 WHOLE HOUSE STEAM HUMIDIFIER (UP TO 4,000 SQ.FT.) - COMPLETE WITH HI VOLTAGE WIRING, 240V DOUBLE BREAKER 20 AMP, SHUT OFF VALVE
2826 72,292 27Jul21	1	FRONT EXTERIOR: ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE)
2826 72,291 27Jul21	4	FRONT EXTERIOR: EXTERIOR LED SOFFIT POT LIGHT - EACH - INSTALL IN UPPER SOFFIT - SEE PLAN
2826 72,278 27Jul21	1	FRONT FOYER: ADDITIONAL INTERIOR SWITCH FOR SOFFIT LIGHTS
2826 72,291 27Jul21	2	REAR EXTERIOR: EXTERIOR LED SOFFIT POT LIGHT - EACH - IN UPPER SOFFIT - SEE PLAN
2826 72,278 27Jul21	1	BREAKFAST: ADDITIONAL INTERIOR SWITCH FOR SOFFIT LIGHTS
2826 72,289 27Jul21	2	POWDER ROOM: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH
2826 72,278 27Jul21	1	POWDER ROOM: ADDITIONAL INTERIOR SWITCH FOR POT LIGHTS
2826 72,298 27Jul21	1	POWDER ROOM: BATHROOM FAN DELAY - ONE UNIT
2826 72,288 27Jul21	1	POWDER ROOM: ROUGH-IN FOR WALL SCONCE (1) CAPPED OUTLET WITH SWITCH - FIXTURE NOT INCLUDED - APPROX. 66" A.F.F.
2826 72,288 27Jul21	1	POWDER ROOM: ROUGH-IN FOR ADDITIONAL WALL SCONCE (1) CAPPED OUTLET ON EXISTING SWITCH - FIXTURE NOT INCLUDED - APPROX. 66" A.F.F.  **DELETE STANDARD VANITY LIGHT**
2826 72,289 27Jul21	4	MAIN HALL: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH  **DELETE STANDARD CEILING LIGHT FIXTURES - SWITCH TO REMAIN FOR POT LIGHTS**

DisciplineMS.rpt 23feb21 Page 5 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### **ELECTRICAL**

ELECT Invoice		AL Description
2826 72,283 27Jul21	1	MAIN HALL: DIMMER SWITCH: DECORA DIMMER SWITCH - EACH
2826 72,268 27Jul21	1	GARAGE: INTERIOR WALL OUTLET: 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT
2826 72,289 27Jul21	4	LAUNDRY ROOM: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH  **DELETE STANDARD CEILING LIGHT FIXTURE - SWITCH TO REMAIN FOR POT LIGHTS**
2826 72,283 27Jul21	1	DINING ROOM: DIMMER SWITCH: DECORA DIMMER SWITCH - EACH
2826 72,289 27Jul21	4	DINING ROOM: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH
2826 72,289 27Jul21	6	GREAT ROOM: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH - INCLUDES ONE SWITCH INCLUDED IN APS
2826 72,283 27Jul21	1	GREAT ROOM: DIMMER SWITCH: DECORA DIMMER SWITCH - EACH
2826 72,281 27Jul21	2	GREAT ROOM: INTERIOR WALL OUTLET: ADDITIONAL 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT FOR WALL MOUNTED TV - ABOVE FIREPLACE, APPROX. 66" A.F.F.
2826 72,281 27Jul21	1	GREAT ROOM: INSTALL STANDARD CABLE ABOVE FIREPLACE, APPROX. 66" A.F.F.
2826 72,283 27Jul21	1	KITCHEN/BREAKFAST: DIMMER SWITCH: DECORA DIMMER SWITCH - EACH
2826 72,292 27Jul21	1	REAR EXTERIOR (deck level): ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE)
2826 72,273 27Jul21	1	KITCHEN: 110V WALL RECEPTACLE ON SEPARATE CIRCUIT - GAS FIRED APPLIANCE - FOR AUX. EQUIPMENT - NOT A STOVE PLUG
2826 72,306 27Jul21	1	KITCHEN: RELOCATE KITCHEN APPLIANCE FROM STANDARD LOCATION TO ACCOMMODATE PANTRY (SOLD SEPARATELY) - APPROX. "NEW" LOCATION AS PER ATTACHED DRAWINGS

DisciplineMS.rpt 23feb21 Page 6 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### **ELECTRICAL**

ELEC I		Description
2826 72,272 27Jul21	1	KITCHEN: 110V WALL RECEPTACLE ON SEPARATE CIRCUIT - FOR MICROWAVE - MICROWAVE NOT INCLUDED
2826 72,289 27Jul21	8	KITCHEN: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH
2826 72,278 27Jul21	1	KITCHEN: ADDITIONAL INTERIOR SWITCH FOR POT LIGHTS
2826 72,283 27Jul21	1	KITCHEN: DIMMER SWITCH: DECORA DIMMER SWITCH - EACH - SEE PLAN
2826 72,307 27Jul21	1	KITCHEN: FIXTURE: RELOCATE STANDARD CEILING MOUNT FIXTURE TO APPROX. CENTRE ON CEILING ABOVE ISLAND
2826 72,280 27Jul21	1	KITCHEN: INSTALL CAPPED CEILING LIGHT FIXTURE APPROX. CENTRE ON CEILING ABOVE ISLAND - ON EXISTING SWITCH - SEE PLAN
2826 72,303 27Jul21	1	KITCHEN: LED LIGHT BUNDLE - LED STRIP LIGHT AND ACCESSORY + NOTCHED CUSTOM ENGINEERED ROUTING TO EACH UPPER CABINET INTENDED FOR LED CHANNELS
2826 72,290 27Jul21	11	UPPER HALL: 4" E/S LED INTERIOR POT LIGHT (INSULATED CEILING) - SECOND FLOOR - EACH 7x UPPER HALL OVER MAIN STAIRS 4x UPPER HALL *DELETE STANDARD CEILING LIGHT FIXTURES*
2826 72,279 27Jul21	2	ENSUITE 2: SHOWER POT LIGHT: 6" RECESSED SHOWER POT LIGHT COMPLETE WITH SWITCH
2826 72,290 27Jul21	5	MASTER ENSUITE: 4" E/S LED INTERIOR POT LIGHT (INSULATED CEILING) - SECOND FLOOR - EACH  *DELETE STANDARD CEILING LIGHT FIXTURE*
2826 72,283 27Jul21	2	MASTER BEDROOM + MASTER ENSUITE: DIMMER SWITCH: DECORA DIMMER SWITCH - EACH (MUST SPECIFY LOCATION)
2826 72,281 27Jul21	4	MASTER BEDROOM + BEDROOM 2 + BEDROOM 3 + BEDROOM 4: INTERIOR WALL OUTLET: ADDITIONAL 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT FOR WALL MOUNTED TV - APPROX. 60" A.F.F.
2826 72,281 27Jul21	4	MASTER BEDROOM: INSTALL STANDARD CABLE AT APPROX. 60" A.F.F SEE PLAN

DisciplineMS.rpt 23feb21 Page 7 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW Project/Phase: Pine Valley Forevergreen / 1

#### **ELECTRICAL**

ELECTI Invoice		AL Description
2826 72,279 27Jul21	1	MASTER ENSUITE: SHOWER POT LIGHT: 6" RECESSED SHOWER POT LIGHT COMPLETE WITH SWITCH
2826 72,298 27Jul21	3	MASTER ENSUITE + ENSUITE 2 + ENSUITE 3/4: BATHROOM FAN DELAY - ONE UNIT
2826 72,286 27Jul21	1	REAR EXTERIOR (ground level): EXTERIOR RECEPTACLE: ADDITIONAL EXTERIOR GFI RECEPTACLE WITH COVER - SEE PLAN FOR APPROX. LOCATION
2826 72,307 27Jul21	1	FRONT FOYER: STANDARD CEILING LIGHT TO BE APPROX. CENTRE ON CEILING ON FOYER
2826 27Jul21 NoCat	1	DINING ROOM: ADDITIONAL SWITCH FOR POT LIGHTS
2826 72,292 27Jul21	1	REAR EXTERIOR (ground level): ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE)
2826 72,289 27Jul21	6	BREAKFAST: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH
2826 72,283 27Jul21	1	BREAKFAST: DIMMER SWITCH: DECORA DIMMER SWITCH - EACH
2826 72,307 27Jul21	1	MASTER ENSUITE: RELOCATE STANDARD SHOWER POT LIGHT - SEE PLAN
2826 72,283 27Jul21	2	UPPER HALL: DIMMER SWITCH: DECORA DIMMER SWITCH - EACH  1x UPPER HALL POT LIGHTS 1x UPPER HALL OVER MAIN STAIRS POT LIGHTS
2826 72,290 27Jul21	8	MASTER WIC: 4" E/S LED INTERIOR POT LIGHT (INSULATED CEILING) - SECOND FLOOR - EACH - IN ADDITION TO STANDARD CEILING LIGHT SEE PLAN FOR LOCATION
2826 72,278 27Jul21	2	MASTER WIC: ADDITIONAL INTERIOR SWITCH FOR POTLIGHTS
2826 27Jul21 ** NoCat	1	APRILAIRE 600 WHOLE HOUSE STEAM HUMIDIFIER (UP TO 4,000 SQ.FT.) - COMPLETE WITH HI VOLTAGE WIRING, 240V DOUBLE BREAKER 20 AMP, SHUT OFF VALVE

DisciplineMS.rpt 23feb21 Page 8 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### **ELECTRICAL**

LLLCII	ELLCTRICIL				
Invoice	Qty.	Description			
2826	1	FRONT FOYER: RELOCATE STANDARD FOYER CLOSET TO SIDE EXTERIOR WALL - ENLARGE CLOSET TO ACCOMMODATE			
27Jul21 NoCat					
2826	1	GREAT ROOM: UPGRADE FIREPLACE TO 36" MAJESTIC QUARTZ WITH DIAMOND WHITE CRYSTALS			
27Jul21 NoCat					
2826	1	THRU OUT 2ND FLOOR: INCREASE HEIGHT OF DOOR TO 8FT SECOND FLOOR - PER DOOR			
27Jul21 NoCat					
2826	1	KITCHEN: APPLIANCE SPECIFICATIONS ATTACHED - SIGNED COPY			
27Jul21 NoCat					
2863	1	KITCHEN: MOVE STANDARD COUNTER PLUGS TO UNDERSIDE OF UPPERS (FULL HEIGHT SLAB BACKSPLASH) ELECTRICAL WILL BE BOXED WITH CABINETRY IN CORNERS OF UPPERS, AS REQUIRED			
26Aug21 NoCat					
2863	1	FYI - KITCHEN: ADD FULL HEIGHT BACKSPLASH - LEVEL 5			
26Aug21 NoCat					

#### FIREPLACE

FIREFLACE			
Invoice	Qty.	Description	
2826 72,687 27Jul21	1	GREAT ROOM: UPGRADE FIREPLACE TO 36" MAJESTIC QUARTZ WITH DIAMOND WHITE CRYSTALS	
2826 72,689 27Jul21	1	GREAT ROOM: RAISE FIREPLACE APPROX. 6" A.F.F.	

DisciplineMS.rpt 23feb21 Page 9 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

$\mathbf{F}\mathbf{R}$	٨	$\mathbf{N}$	IN	$\sim$
	$\rightarrow$	·		

Invoice		Description
2826 27Jul21 NoCat	1	FRONT FOYER: RELOCATE STANDARD FOYER CLOSET TO SIDE EXTERIOR WALL - ENLARGE CLOSET TO ACCOMMODATE
2826 72,690 27Jul21	1	KITCHEN: DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED
2826 72,631 27Jul21	2	MASTER ENSUITE: SHOWER NICHE [SHAMPOO SHELF] - COMPLETE WITH MATCHING MARBLE JAMBS ON 4 SIDES, STANDARD TILE, APPROX. 12 X 18 INSTALLED VERTICALLY - SEE PLAN
2826 72,613 27Jul21	1	**CUSTOM LAYOUT** DINING ROOM/GREAT ROOM: DELETE PARTIAL WALL, INSTALL FULL TRIMMED ARCH APPROX. 5 FEET WIDE
2826 27Jul21	1	FRONT EXTERIOR: EXTERIOR LED SOFFIT POT LIGHT - EACH - INSTALL IN UPPER SOFFIT - SEE PLAN
2826 27Jul21 NoCat	1	REAR EXTERIOR: EXTERIOR LED SOFFIT POT LIGHT - EACH - IN UPPER SOFFIT - SEE PLAN
2826 27Jul21 NoCat	1	GREAT ROOM: UPGRADE FIREPLACE TO 36" MAJESTIC QUARTZ WITH DIAMOND WHITE CRYSTALS
2826 27Jul21 NoCat	1	REAR EXTERIOR (deck level): ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE)
2826 27Jul21 NoCat	1	ENSUITE 3/4: SINGLE POCKET DOOR, COMPLETE WITH BUILDERS STANDARD OFFERINGS
2826 27Jul21 NoCat	1	MASTER ENSUITE: SINGLE POCKET DOOR, COMPLETE WITH BUILDERS STANDARD OFFERINGS
2826 27Jul21 NoCat	1	THRU OUT 2ND FLOOR: INCREASE HEIGHT OF DOOR TO 8FT SECOND FLOOR - PER DOOR
2826 27Jul21 NoCat	1	GREAT ROOM: RAISE FIREPLACE APPROX. 6" A.F.F.

DisciplineMS.rpt 23feb21 Page 10 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### **GARAGE DOORS**

Invoice	Qty.	Description
2826	2	GARAGE DOOR OPENER (CHAMBERLAIN BELT DRIVE) - WITH 1 REMOTE - PRICE IS PER DOOR
72,324		
27Jul21		

#### **GLASS AND MIRROR**

Invoice	Qty.	Description
2863	1	MASTER ENSUITE: UPGRADE SHOWER HANDLE AND HINGES - MATTE BLACK
26Aug21 NoCat		
2863	1	THRU OUT: PLEASE DO NOT SUPPLY/INSTALL STANDARD MIRRORS
26Aug21 NoCat		
2863	1	SHARED ENSUITE: UPGRADE SHOWER DOOR HANDLE - CHROME
26Aug21 NoCat		

DisciplineMS.rpt 23feb21 Page 11 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

## GRANITE MARBLE QUARTZ

Invoice		Description
2863	1	KITCHEN: UPGRADE QUARTZ COUNTERTOP - LEVEL 5
26Aug21 NoCat		
2863	1	KITCHEN: ADD FULL HEIGHT BACKSPLASH - LEVEL 5
26Aug21 NoCat		
2863	1	KITCHEN: UPGRADE COUNTERTOP THICKNESS TO 3CM
26Aug21 NoCat		
2863	1	POWDER ROOM: UPGRADE QUARTZ COUNTERTOP - LEVEL 3
26Aug21 NoCat		
2863	1	POWDER ROOM: UPGRADE COUNTERTOP THICKNESS TO 3CM
26Aug21 NoCat		
2863	1	LAUNDRY ROOM: UPGRADE QUARTZ COUNTERTOP + ABOVE MACHINES - LEVEL 3
26Aug21 NoCat		
2863	1	LAUNDRY ROOM: UPGRADE COUNTERTOP THICKNESS TO 3CM
26Aug21 NoCat		
2863	1	MASTER ENSUITE: UPGRADE 2 QUARTZ COUNTER
26Aug21 NoCat		
2863	1	MASTER ENSUITE: UPGRADE TO 3CM THICKNESS
26Aug21 NoCat		
2863	1	SHARED ENSUITE: UPGRADE 3 QUARTZ COUNTER
26Aug21 NoCat		
2863	1	SHARED ENSUITE: 3CM THICKNESS
26Aug21 NoCat		
2863	1	ENSUITE 2: UPGRADE 2 QUARTZ
26Aug21 NoCat		
2863	1	ENSUITE 2: 3CM THICKNESS
26Aug21 NoCat		

DisciplineMS.rpt 23feb21 Page 12 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### **GRANITE MARBLE QUARTZ**

Invoice	Qty.	Description
2863 101,930	1	MASTER ENSUITE: ADD 8" QUARTZ VANITY BACKSPLASH - LEVEL 2
26Aug21		SAME AS QUARTZ COUNTERTOP
2863 101,930	1	ENSUITE 2: ADD 4" QUARTZ VANITY BACKSPLASH - LEVEL 2
26Aug21		SAME AS QUARTZ COUNTERTOP
2863 101,930	1	SHARED ENSUITE: ADD 4" QUARTZ VANITY BACKSPLASH - LEVEL 3
26Aug21		SAME AS QUARTZ COUNTERTOP
2863 101,930	1	POWDER ROOM: ADD 8" QUARTZ VANITY BACKSPLASH - LEVEL 3
26Aug21		SAME AS QUARTZ COUNTERTOP

#### HARDWOOD

HARDWOOD			
Invoice	Qty.	Description	
2863 15 26Aug21	1	KITCHEN: MIRAGE, 7 3/4" WHITE OAK, ENGINEERED HARDWOOD, 3/4", FLAIR LIGHT CHARACTER TEXTURE, DURAMATT FINISH - LEVEL 7	
2863 15 26Aug21	1	THRU OUT STANDARD AREAS: MAIN HALL, GREAT ROOM/BREAKFAST, UPPER HALL, MASTER BEDROOM, BEDROOM 2, BEDROOM 3, BEDROOM 4: MIRAGE, 7 3/4" WHITE OAK, ENGINEERED HARDWOOD, 3/4", FLAIR LIGHT CHARACTER TEXTURE, DURAMATT FINISH - LEVEL 7	
2863 15 26Aug21	1	FOYER: MIRAGE, 7 3/4" WHITE OAK, ENGINEERED HARDWOOD, 3/4", FLAIR LIGHT CHARACTER TEXTURE, DURAMATT FINISH - LEVEL 7	

DisciplineMS.rpt 23feb21 Page 13 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

H	V	A	C
	•		$\sim$

HVAC		
Invoice	Qty.	Description
2826 72,238 27Jul21	1	3.5 TON AC - WITH LOW VOLTAGE WIRING & WALL BRACKETS (13ACX)
2826 72,225 27Jul21	2	BASEMENT: INSTALL ADDITIONAL R/I FOR CENTRAL VAC
2826 72,225 27Jul21	1	BASEMENT: INCREASE HWT VENT PIPE FROM 2" TO 3" FOR TANKLESS WATER HEATER (TANKLESS UNIT NOT INCLUDED)
2826 72,214 27Jul21	1	FURNACE - LENNOX 2 STAGE VARIABLE SPEED FURNACE (UP TO 70,000 BTU FOOT S) IN LIEU OF STANDARD OFFERING - (PINE VALLEY SITE ONLY - REFERENCE MODEL SPECIFIC FOR FURANCE UPGRADE EXTRA)
2826 72,248 27Jul21	1	APRILAIRE 600 WHOLE HOUSE STEAM HUMIDIFIER (UP TO 4,000 SQ.FT.) - COMPLETE WITH HI VOLTAGE WIRING, 240V DOUBLE BREAKER 20 AMP, SHUT OFF VALVE
2826 72,224 27Jul21	1	KITCHEN: GAS LINE ROUGH-IN - MAIN FLOOR FOR APPLIANCE - SEE PLAN FOR APPROX. LOCATION  FINAL LOCATION, ORIENTATION, AND CONNECTION TO BE COMPLETED BY A LICENSED GAS FITTER  AND ARRANGED BY THE HOMEOWNER AFTER CLOSING AT THEIR OWN EXPENSE AND WARRANTY
2826 72,217 27Jul21	1	KITCHEN: UPGRADE TO 8" DUCT ( EXTERIOR WALL) IN LIEU OF STANDARD OFFERING
2826 72,219 27Jul21	1	REAR EXTERIOR (ground level): REAR GARDEN BBQ GAS LINE, INCLUDES MAIN GAS LINE INCREASED PIPE - SEE PLAN FOR APPROX. LOCATION
2826 27Jul21 ** NoCat	1	3.5 TON AC - WITH LOW VOLTAGE WIRING & WALL BRACKETS (13ACX)
** NoCat	1	APRILAIRE 600 WHOLE HOUSE STEAM HUMIDIFIER (UP TO 4,000 SQ.FT.) - COMPLETE WITH HI VOLTAGE WIRING, 240V DOUBLE BREAKER 20 AMP, SHUT OFF VALVE
27Jul21 ** NoCat		
2826	1	GREAT ROOM: UPGRADE FIREPLACE TO 36" MAJESTIC QUARTZ WITH DIAMOND WHITE CRYSTALS
27Jul21 NoCat		
2826 27Jul21 NoCat	1	KITCHEN: DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED

DisciplineMS.rpt 23feb21 Page 14 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW Project/Phase: Pine Valley Forevergreen / 1

#### INTERIOR DOORS AND TRIM

Invoice	Qty.	Description
2826 72,644 27Jul21	18	THRU OUT 2ND FLOOR: INCREASE HEIGHT OF DOOR TO 8FT SECOND FLOOR - PER DOOR
2826 72,662 27Jul21	1	MASTER ENSUITE: SINGLE POCKET DOOR, COMPLETE WITH BUILDERS STANDARD OFFERINGS
2826 72,662 27Jul21	3	ENSUITE 3/4: SINGLE POCKET DOOR, COMPLETE WITH BUILDERS STANDARD OFFERINGS

#### INTERIOR TRIM AND DOORS

Invoice	Qty.	Description
2826	1	FRONT FOYER: RELOCATE STANDARD FOYER CLOSET TO SIDE EXTERIOR WALL - ENLARGE CLOSET TO ACCOMMODATE
27Jul21 NoCat		
2826	1	GREAT ROOM: UPGRADE FIREPLACE TO 36" MAJESTIC QUARTZ WITH DIAMOND WHITE CRYSTALS
27Jul21 NoCat		
2826	1	**CUSTOM LAYOUT** DINING ROOM/GREAT ROOM: DELETE PARTIAL WALL, INSTALL FULL TRIMMED ARCH APPROX. 5 FEET WIDE
27Jul21 NoCat		
2863 153,243	1	THRU OUT: UPGRADE 3 1/2" STEP BEVEL CASING, 7 1/4" BASE BOARD
26Aug21		UPGRADE
2863 155,357	1	THRU OUT: UPGRADE INTERIOR DOORS TO LINCOLN PARK,
26Aug21		UPGRADE
2863 153,783	1	THRU OUT: HALIFAX LEVER, IRON BLACK INTERIOR DOOR HARDWARE
26Aug21		UPGRADE
2863 155,861	1	THRU OUT: ADD FOR HINGES 3X3 SQUARE FLAT TIP THROUGHOUT
26Aug21		UPGRADE

DisciplineMS.rpt 23feb21 Page 15 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### KITCHEN AND BATH CABINETRY

Invoice	Qty.	Description
2826	1	KITCHEN: ADJUST BASE CABINETRY TO ACCOMMODATE MICROWAVE SHELF WITH DRAWER BELOW
27Jul21 NoCat		
2826 159,094	1	KITCHEN: ADD MINI STACKED UPPER CABINETS (10' CEILING, NO BULKHEAD)
27Jul21		PRICED PER 8 FOOT LENGTH
2826	1	FYI - KITCHEN: UPGRADE TO 8" DUCT ( EXTERIOR WALL) IN LIEU OF STANDARD OFFERING
27Jul21 NoCat		
2826	1	KITCHEN: LED LIGHT BUNDLE - LED STRIP LIGHT AND ACCESSORY + NOTCHED CUSTOM ENGINEERED ROUTING TO EACH UPPER CABINET INTENDED FOR LED CHANNELS
27Jul21 NoCat		
2826	1	KITCHEN: APPLIANCE SPECIFICATIONS ATTACHED - SIGNED COPY
27Jul21 NoCat		
2863	1	THRU OUT: SEE ATTACHED CABINETRY SCHEDULE
26Aug21 NoCat		
2959	3	KITCHEN: ADD FLIP UP MINI STACKED CABINETS, SEE SKETCHES FOR LAYOUT.
23Feb22 NoCat		INCLUDED IN PRICE FOR MINI STACKED CABINETS

MASON	MASONRY				
Invoice	Qty.	Description			
2826	1	REAR EXTERIOR (deck level): ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE)			
27Jul21					
NoCat					

DisciplineMS.rpt 23feb21 Page 16 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### NETWORK AND WIRING

INE I VV C		AND WIRING Description	
2826 72,261 27Jul21	1	GARAGE: INSTALL CENTRAL VAC UNIT COMPLETE WITH HOSE, BEATER BAR + ACCESSORIES - CYCLOVAC 215	
2826 72,264 27Jul21	1	LAUNDRY ROOM: ROUGH - IN FOR EXTRA SECURITY KEY PAD	
2826 72,264 27Jul21	1	STER BEDROOM: ROUGH - IN FOR EXTRA SECURITY KEY PAD	
2826 72,259 27Jul21	1	GREAT ROOM: CONDUIT PIPE - FOR WALL MOUNT TV - ABOVE FIREPLACE, APPROX. 66" A.F.F., THRU BASEMENT, TERMINATE IN BASEMENT NEAR ELECTRICAL PANEL	
2826 72,259 27Jul21	4	MASTER BEDROOM + BEDROOM 2 + BEDROOM 3 + BEDROOM 4: CONDUIT PIPE - FOR WALL MOUNT TV - APPROX. 60" A.F.F., TERMINATE IN BASEMENT NEAR ELECTRICAL PANEL	
2826 72,258 27Jul21	1	DROOM 2: ADDITIONAL CAT6 ETHERNET OUTLET - EACH - SEE PLAN	
2826 72,265 27Jul21	1	FRONT EXTERIOR: INSTALL R/I WIRING FOR FUTURE SKY BELL	
2826 72,328 27Jul21	1	AUNDRY ROOM: INSTALL 'WALLY' TO CONNECT TO CENTRAL VAC + R/I - APPROX. 66" A.F.F.	
2826 72,262 27Jul21	1	SECOND FLOOR: INSTALL R/I SECURITY WIRING FOR ALL SECOND FLOOR WINDOWS	
2826 72,262 27Jul21	1	UPPER HALL: INSTALL R/I SECURITY WIRING FOR FUTURE MOTION DETECTOR - INSTALL AT WALL ACROSS FROM MAIN STAIRCASE - SEE PLAN	
2826 72,258 27Jul21	1	REAR EXTERIOR (ground level): ADDITIONAL CAT6 ETHERNET OUTLET - INSTALL AT GARDEN DOOR FOR FUTURE EXTERIOR CAMERA	
2826 72,258 27Jul21	1	BASEMENT: INSTALL R/I SECURITY WIRING FOR FUTURE MOTION DETECTOR	
2826 72,258 27Jul21	1	KITCHEN/BREAKFAST: INSTALL R/I SECURITY WIRING FOR FUTURE MOTION DETECTOR	

DisciplineMS.rpt 23feb21 Page 17 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### **NETWORK AND WIRING**

Invoice	Qty.	Description
2826 72,258	5	EXTERIOR: ADDITIONAL CAT6 ETHERNET OUTLET FOR FUTURE SECURITY CAMERAS - SEE PLAN
27Jul21		1x REAR EXTERIOR CORNER AT GROUND LEVEL 1x REAR EXTERIOR CORNER AT DECK LEVEL 1x FRONT EXTERIOR @ COVERED PORCH 1x FRONT EXTERIOR @ CORNER OF GARAGE 1x INTERIOR CORNER OF GARAGE
2826 72,256 27Jul21	3	BEDROOM 2 + BEDROOM 3 + BEDROOM 4: ADDITIONAL RG6 HIGH SPEED TV / INTERNET OUTLETS - INSTALL AT APPROX. 60" A.F.F SEE PLAN

#### **PAINT**

Invoice	Qty.	Description
2826	1	FRONT FOYER: RELOCATE STANDARD FOYER CLOSET TO SIDE EXTERIOR WALL - ENLARGE CLOSET TO ACCOMMODATE
27Jul21 NoCat		
2826	1	GREAT ROOM: UPGRADE FIREPLACE TO 36" MAJESTIC QUARTZ WITH DIAMOND WHITE CRYSTALS
27Jul21 NoCat		
2826	1	**CUSTOM LAYOUT** DINING ROOM/GREAT ROOM: DELETE PARTIAL WALL, INSTALL FULL TRIMMED ARCH APPROX. 5 FEET WIDE
27Jul21 NoCat		
2826	1	ENSUITE 3/4: SINGLE POCKET DOOR, COMPLETE WITH BUILDERS STANDARD OFFERINGS
27Jul21 NoCat		
2826	1	MASTER ENSUITE: SINGLE POCKET DOOR, COMPLETE WITH BUILDERS STANDARD OFFERINGS
27Jul21 NoCat		
2826	1	THRU OUT 2ND FLOOR: INCREASE HEIGHT OF DOOR TO 8FT SECOND FLOOR - PER DOOR
27Jul21 NoCat		
2863	2	MAIN STAIRS - 2ND FLOOR TO BASEMENT: STAIN STAIRS AND LANDINGS
26Aug21 NoCat		WILL NOT MATCH HARDWOOD IN COLOUR, SPECIES OR TEXTURE

#### **PANL - FRAMING**

I ANL - FRAMING			
Invoice	Qty.	Description	
2826 72,324	2	GARAGE DOOR OPENER (CHAMBERLAIN BELT DRIVE) - WITH 1 REMOTE - PRICE IS PER DOOR	
27Jul21 **			

DisciplineMS.rpt 23feb21 Page 18 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW Project/Phase: Pine Valley Forevergreen / 1

#### **PLUMBING**

PLUMB Invoice		Description	
2826 72,619 27Jul21	1	BASEMENT: ADDITIONAL LAUNDRY TUB ON LEGS IN UNFINISHED AREA - SEE PLAN FOR PREFERRED LOCATION	
2826 72,248 27Jul21 **	1	APRILAIRE 600 WHOLE HOUSE STEAM HUMIDIFIER (UP TO 4,000 SQ.FT.) - COMPLETE WITH HI VOLTAGE WIRING, 240V DOUBLE BREAKER 20 AMP, SHUT OFF VALVE	
2826 72,335 27Jul21	1	: HOT AND COLD WATER SUPPLY LINES IN GARAGE IN LIEU OF STANDARD OFFERING	
2826 72,332 27Jul21	1	KITCHEN: ROUGH-IN 1/4" COLD WATER LINE TO FRIDGE	
2826 27Jul21 NoCat	1	KITCHEN: RELOCATE SINK TO BE CENTERED IN KITCHEN ISLAND	
2826 75,845 27Jul21	1	MASTER ENSUITE: UPGRADE SHOWER FAUCET TO MOEN ARRIS WITH HANDSHOWER AND SLIDE BAR + TOE TESTER (from wall) - MATTE BLACK	
2826 75,845 27Jul21	1	MASTER ENSUITE: UPGRADE TO MOEN ALIGN FREE STANDING TUB FILLER - MATTE BLACK	
2826 27Jul21 NoCat	1	MASTER ENSUITE: RELOCATE FREE STANDING TUB TO SIDE EXTERIOR WALL - TO BE APPROX. CENTERED WITH WINDOW	
2826 75,845 27Jul21	2	MASTER ENSUITE: UPGRADE VANITY FAUCET TO MOEN ARRIS WIDESPREAD - MATTE BLACK	
2826 75,841 27Jul21	2	ENSUITE 2 + ENSUITE 3/4: UPGRADE SHOWER FAUCET TO MOEN ALIGN WITH HANDSHOWER AND SLIDE BAR + TOE TESTER (from wall) - CHROME	
2826 75,841 27Jul21	3	ENSUITE 2 + ENSUITE 3/4: UPGRADE VANITY FAUCET TO MOEN ALIGN WIDESPREAD - CHROME	
2826 75,844 27Jul21	1	POWDER ROOM: UPGRADE VANITY FAUCET TO MOEN ARRIS WIDESPREAD - MATTE BLACK	
2826 72,334 27Jul21	1	REAR EXTERIOR (ground level): ADDITIONAL HOSE BIB - COLD WATER SUPPLY ONLY - SEE PLAN FOR APPROX.  LOCATION	

DisciplineMS.rpt 23feb21 Page 19 of 20



Lot: 50

Model: 40.02 B VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### **PLUMBING**

Invoice	Qty.	Description
2826	1	APRILAIRE 600 WHOLE HOUSE STEAM HUMIDIFIER (UP TO 4,000 SQ.FT.) - COMPLETE WITH HI VOLTAGE WIRING, 240V DOUBLE BREAKER 20 AMP, SHUT OFF VALVE
27Jul21 NoCat		
2826	1	KITCHEN: DELETE KITCHEN BULKHEAD, IF POSSIBLE, SITE APPROVAL REQUIRED
27Jul21 NoCat		
2826	1	KITCHEN: APPLIANCE SPECIFICATIONS ATTACHED - SIGNED COPY
27Jul21 NoCat		
2863	1	KITCHEN: UPGRADE TO BLANCO STAINLESS STEEL SINK
26Aug21 NoCat		
2863	1	LAUNDRY ROOM: UPGRADE BLANCO SS SINK + MOEN FAUCET
26Aug21 NoCat		
2863	4	THRU OUT ALL BATHROOMS: UPGRADE TOILET TO CONTRAC 'CILA'
26Aug21 NoCat		
2863	1	KITCHEN: UPGRADE FAUCET TO MOEN ALIGN - MATTE BLACK
26Aug21 NoCat		

#### STAIR AND RAILINGS

SIAIN	STAIR AND RAILINGS		
Invoice	Qty.	Description	
2863 93,780 26Aug21	_	MAIN STAIRS: UPGRADE - EURONLINE (ALL PLAIN) PICKET, 3" HALF-ROUND W/V-GROOVE HANDRAIL, 3 1/2" ALL SQUARE POST WITH PYRAMID TOP POST CAP - PACKAGE A-2  **SQUARE FLAT BLOCK CAP IN LIEU OF PYRAMID POST CAP**	

DisciplineMS.rpt 23feb21 Page 20 of 20



#### PV - 50 Cabinetry Schedule

ROOM	DESCRIPTION	DDICE	977	TOTAL
ROOM	UPGRADE TALL AND UPPERS FROM SERIES 2 TO SERIES 3 - MANHATTAN 'OYSTER'  UPGRADE BASES FROM SERIES 2 TO SERIES 5 - WINSETT 'OYSTER'  UPGRADE HARDWARE: BH-082-03 (HORIZONTAL ON UPPERS INCLUDING FLIP UPS, ONLY 1 ON POT DRAWERS)  UPGRADE HARDWARE: BH-083-03 (APPLIANCES)  ADD TOUCH LATCH HARDWARE TO MINI STACKED UPPERS  ADJUST BASE CABINETRY FOR 36" RANGE (N/C)  ADD DECORATIVE HOOD CANOPY - MITRED (NO MINI STACKS ABOVE THIS)  LEAVE 6" GAP ON EITHER SIDE OF HOOD CANOPY (N/C)  CONVERT BASE CABINETS TO BASE POTS AND PANS DRAWERS  CONVERT CABINETRY TO TALL DEEP PANTRY UNIT - 2-DOOR W/ STD WHITE INTERIOR  ADD DÉCOR PANELS FOR FRIDGE/FREZER  ADD FLIP UPS ABOVE FRIDGE/FANTRY  RETURN TRIP FOR HARDWOOD  HIDDEN RECEPTICLE BELOW UPPER CABINET - BUILT IN BOX REQUIRED INSIDE UPPER CABINET TO CONCEAL WIRING (PURCHASED ON COLOURS ORDER PE #2363)	boter	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TOTAL
	ADD LED LIGHT BUNDLE + CABINETRY VALANCE (PURCHASED ON STRUCTURAL ORDER PE #2826) CONVERT CABINETRY TO MICROWAVE SHELF WITH DRAWER BELOW (PURCHASED ON STRUCTURAL ORDER PE #2826) ADD MINI STACKED UPPERS - 10' CEILING, NO BULKHEAD (PURCHASED ON STRUCTURAL ORDER PE #2826)		1 1	
ISLAND	UPGRADE ISLAND FROM SERIES 2 TO SERIES 5 - WINSETT 'PITCH BLACK' ADD DECORATIVE PANELS TO SIDES OF ISLAND ADD DÉCOR PANEL FOR DISHWASHER ADD TOUCH LATCH HARDWARE TO REAR ISLAND ADD FLUSH KICK PLATE TO REAR ISLAND ADD TWO-BIN RECYCLE CENTRE TO ISLAND (TOP DRAWER TO BE DUMMY PANEL WITH PLUG)		1 2 1 1 1	
POWDER ROOM	UPGRADE FROM SERIES 2 TO SERIES 3 - MANHATTAN 'FOG' CONVERT STANDARD VANITY CABINET TO FLOATING U-SHAPE SINK CABINET ADD BUILD-UP 2x4 SUPPORT OR SKIRT PANEL		1 1 1	
LAUNDRY ROOM	UPGRADE FROM SERIES 2 TO SERIES 3 - MANHATTAN 'FOG' ADD OPTIONAL UPPERS IN SERIES 3 - MANHATTAN 'FOG' EXTEND HEIGHT OF UPPERS AND ADD SHAKER CROWN + FURRING PANEL TO CEILING		1 1 1	
MASTER ENSUITE	UPGRADE FROM SERIES 2 TO SERIES 5 - WINSETT 'FOG' CONVERT STANDARD VANITY TO COMFORT HEIGHT CONVERT TALLER VANITY TO FLOATING VANITY ADD BUILD-UP 2x4 SUPPORT OR SKIRT PANEL TO COVER PLUMBING		1 1 1 1	
ENSUITE 2	UPGRADE FROM SERIES 2 TO SERIES 3 - BROADWAY II HI GLOSS 'TAUPE' CONVERT STANDARD VANITY TO COMFORT HEIGHT		1	
SHARED ENSUITE	UPGRADE FROM SERIES 2 TO SERIES 4 - MANHATTAN STORM GREY WALNUT CONVERT STANDARD VANITY TO COMFORT HEIGHT		1 1	
CLOSET ORGANIZERS	MASTER ENSUITE WIC: AS PER ATTACHED DRAWINGS FOYER CLOSET: 2 SHELVES + ROD + BOTTOM KICK LINEN CLOSET: ADJUSTABLE SHELVES MUD ROOM CLOSET: 1 ROW HANGING + 2 SHELVES ABOVE BEDROOM 2/3/4 CLOSETS: LONG HANGING + DOUBLE HANGING + SHELVING TOWER IN CENTRE (NO BASE/BACKER)		1 1 1 1 1 3	
	CABINE	TRY TOTAL:		

\*NO HARDWARE/NO HOLES (EXCEPT IN KITCHEN - SEE ABOVE) - PURCHASER IS AWARE THEY ARE RESPONSIBLE FOR INSTALLING THEIR OWN HARDWARE AFTER CLOSING AT THEIR OWN EXPENSE AND WARRANTY\*

LOT#; PV-50	DATE: Aug - 25, 2021	
SIGNATURE:	Malma	
SIGNATURE:	<b>3.</b> 0	

GOLDPAR WORTH MORE" \*\*\* NOTE: This is not an approved document. Document must be locked \*\*\* Scheduled Closing Date: December 16, 2021

Purchaser:


le	ep	hone	Res.	1	Bus

Telephone Res. / Bus: / Decor Advisor: Aman	da Ceresino Ma	Project: Pine Valley Forevergreed and Elevation: 40.02 B VALLEYVIEW	en - Phase 1			
	No Sketch Attached:					
1. Cabinetry	Style and Colour	Counter	1122			
Kitchen / Breakfast	*see below	*Quartz: Statuario Maximus	Hardware			
Laundry Room	*Manhattan 'Fog'	*Quartz: Pure White	attachd			
Powder Room	*Winsett 'Fog'	*Quartz: Frozen Terra	attachd			
		Guartz. 1102en Terra	attachd			
Master Ensuite						
Bathroom	*Winsett 'Fog'	*Quartz: Organic White	attachd			
Second Ensuite Bathroom (If Applicable)	*Broadwayll HiGloss 'Taupe'	*Quartz: Organic White	attachd			
Shared Ensuite	*Manhattan'StormGreyWalnut'	*Quartz: Fresh Concrete	attachd			
KITCHEN: Tall + Uppers - Manhatta	in 'Oyster' / Bases - Winsette 'Oyster' / Is	sland - Winsette 'Pitch Black'				
2. Floor Tile						
	Selection					
Entrance Vestibule	*see hardwood					
Main Hall	n/a					
Kitchen / Breakfast	*see hardwood					
Laundry Room	*24x24" Roma 'Bianco' polished + grout 'bone'					
Powder Room	*12x24" Arkinstone 'Light' + grout 'bone'					
Master Ensuite Bathroom	*30x60" Marmorea Breccia White polished + grout 'pewter grey'  *18x36" Piasentina 'Dark Grey' matte + grout 'pewter grey'					
Second Ensuite Bathroom (If Applicable)						
Lower Landing (If Applicable)	*24x24" Roma 'Bianco' polished	. + grout 'bone' (basement foyer)				
Shared Ensuite	*Hex. Merino 'Ivory' + grout 'bone'					
Comment  Master Ensuite Shower: *Penny Rou  B. Wall Tile	nd 'White' matte + grout 'bone' / Shared I	Ensuite Shower Floor: Penny Round 'White/Grey Mix' +	grout 'bone'			
. Wall file	Selection	Listello/Inserts Describe				
Master Ensuite Bathroom		Yes No				
Tub Dec	The second secon	○ Yes ● No				
	II *4x12"Piccadily'Bianco'pol+wh					
Bathroom Wall	S	Yes No				
Second Ensuite Bathroom (If Applicable)	*see comment	◯ Yes <b>○</b> No				
	*3x12" Shadebrick'Anthracite'g	glossy O Yes No				
Shared Ensuite						
Kitchen Backsplash	Yes No	Backsplash Behind Fridge				
I see the second	● Yes ○ No FHBS same as kitchen counte		141			


#### GOLDPARK INTERIOR COLOUR SCHEME \*\*\* NOTE: This is not an approved document. Document must be locked \*\*\* Scheduled Closing Date: December 16, 2021 Purchaser: Silvia M. Palma Property: 50 of Plan -Telephone Res. / Bus: / Project: Pine Valley Forevergreen - Phase 1 Decor Advisor: Amanda Ceresino Model and Elevation: 40.02 B VALLEYVIEW 4. Plumbing Fixtures Second Ensuite **Powder Room** Master Ensuite Bathroom Other Room - Specify Other Washroom Comment ujpgraded thru out - see extras 5. Hardwood Flooring Type and Stain Type and Stain Main Hall Upper Landing Kitchen / Breakfast \*7-3/4"WhtOak,Brushed,WhiteMist Upper Hall Living Room Master Bedroom **Dining Room** Bedroom #2 Family Room Bedroom #3 Den/Library Bedroom #4 Entrance Vestibule \*7-3/4"WhtOak,Brushed,WhiteMist Bedroom #5 Lower Landing Other Room - Specify \*7-3/4"WhtOak,Brushed,WhiteMist (If Applicable) thru out standard areas Comment 6. Carpeting Upgrade Description **Ground Floor** Second Floor Type Area Upgrade Underpad Capped Runner - \*Upgrade Carpet on Stairs Comment


	Living Room Purchased	As Per Plan	N/A	Family Room Purchased	As Per Plan	N/A	Other Room - Purchased		N/A
	0	0	0			0		0	0
Fireplace Type				*See extras					
Mantle Type									
Colour / Stain									
Surround									
Hearth									
Comment									

	ARK		INTERIOR COLOUR SCI			
We	ORTH MORE" *** NO	TE: This is not a	an approved documen	t. Docum	ent must	be locked *
		S	cheduled Closing Date: De	ecember 16,	2021	
urchaser:	Silvia M. Palm	а	Property: 50	of Plan -		
Telephone Res. / Bus: /			Project: Pi	ne Valley Fo	revergreen	- Phase 1
ecor Advisor:	Amanda Ceres	sino	Model and Elevation: 40	0.02 B VALLE	EYVIEW	
3. Trim Carper	ntry					
Interior Doors	Lincoln Park	Front Door Glass	s Inserts standard	Door Hand	lles *Halifay	kBlk + Hinge
Interior Trim	Board 4		treate		ileo i i amaz	KDIK 1 TIIIIGE
Comment						
DI		C. C. D. J.				
. Plaster Mou	Idings and Med	lallions ———				
Standard Through	ghout O Yes	○ No ○ N/A				
						*1
Entrance Vestibu	ıle		Kitchen/Breakfast			
Living Room			Den/Library			
			Lower Landing			
Dining Room			Other Room - Specify			
Family Room						
Comment						
Comment						
Comment						
Comment						
Comment						
Comment  O. Railings an	d Spindles					
	d Spindles *Package A-2					
0. Railings an			Spindle Colour	*Vintage F	Pharaoh	
0. Railings an Railing Package	*Package A-2		Spindle Colour Treads	1		
0. Railings an Railing Package Railing Colour	*Package A-2 *Vintage Pharaoh			*Vintage F *Vintage F • Yes		○ N/A

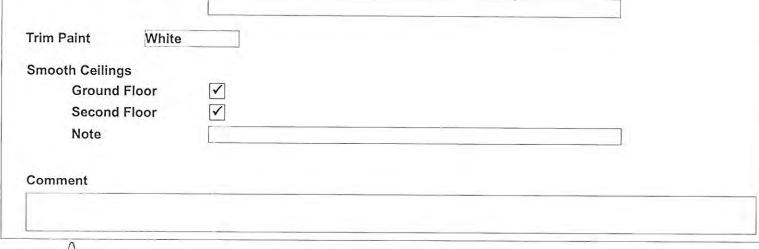




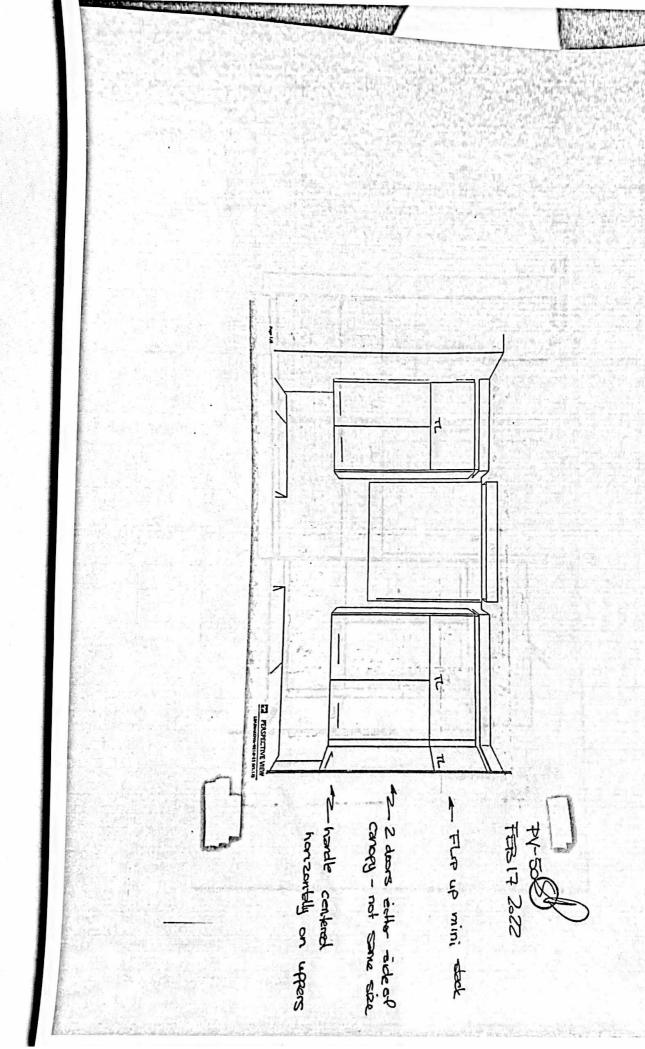

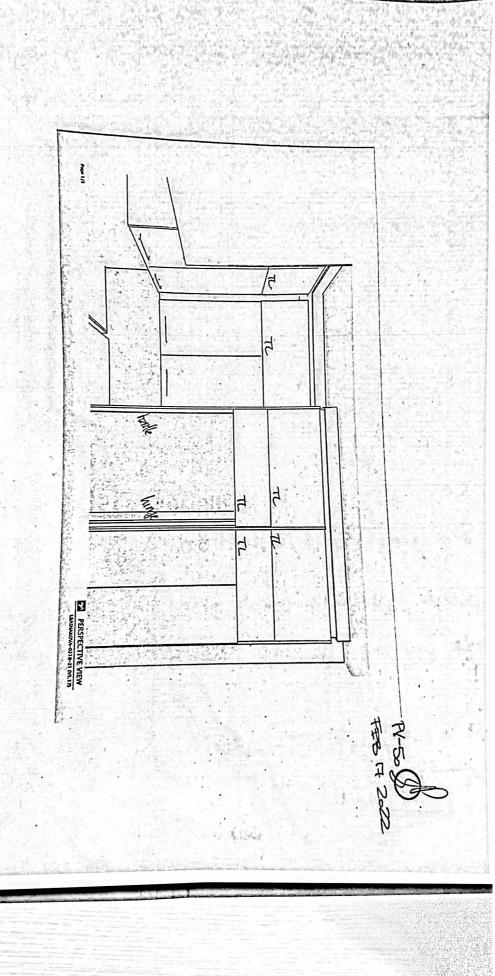

GOLDPARK	INTERIOR COLOUR SCHEME
WORTH MORE" *** NOTE:	This is not an approved document. Document must be locked *** Scheduled Closing Date: December 16, 2021
Purchaser: Silvia M. Palma	Property: 50 of Plan -
Telephone Res. / Bus: /	Project: Pine Valley Forevergreen - Phase 1
Decor Advisor: Amanda Ceresino	Model and Elevation: 40.02 B VALLEYVIEW
12. Electrical	
Hood Fan White Stainless	N/A Above Kitchen Cabinet Light  ○ Yes  No
	Below Kitchen Cabinet Light Yes No
Standard Appliances	
Over The Range Microwave	
Chimney Style Fan	
Comment	
13. Heating and Air Conditioning Air Conditioning yes Gas Provisions Dryer none Comment	Gas Provisions Stove yes Gas Provisions Barbecue standard
14. Additional Comments	
T.	
15. Disclaimers and Notes	
	builder's selection, but not necessarily identical due to variances in manufacturing.
	companied by a separate invoice/amendment. Said invoice must be paid in full.
	lour Selection form is signed and dated, no further changes will be permitted other  Purchaser's Initials
	ng the "Gold Park Homes Decor Centre Disclaimers" form. This document contains
This Interior Colour Selection is final and approved	by:
Signature: Shalmar D	Pate: Aug. 25, 2021

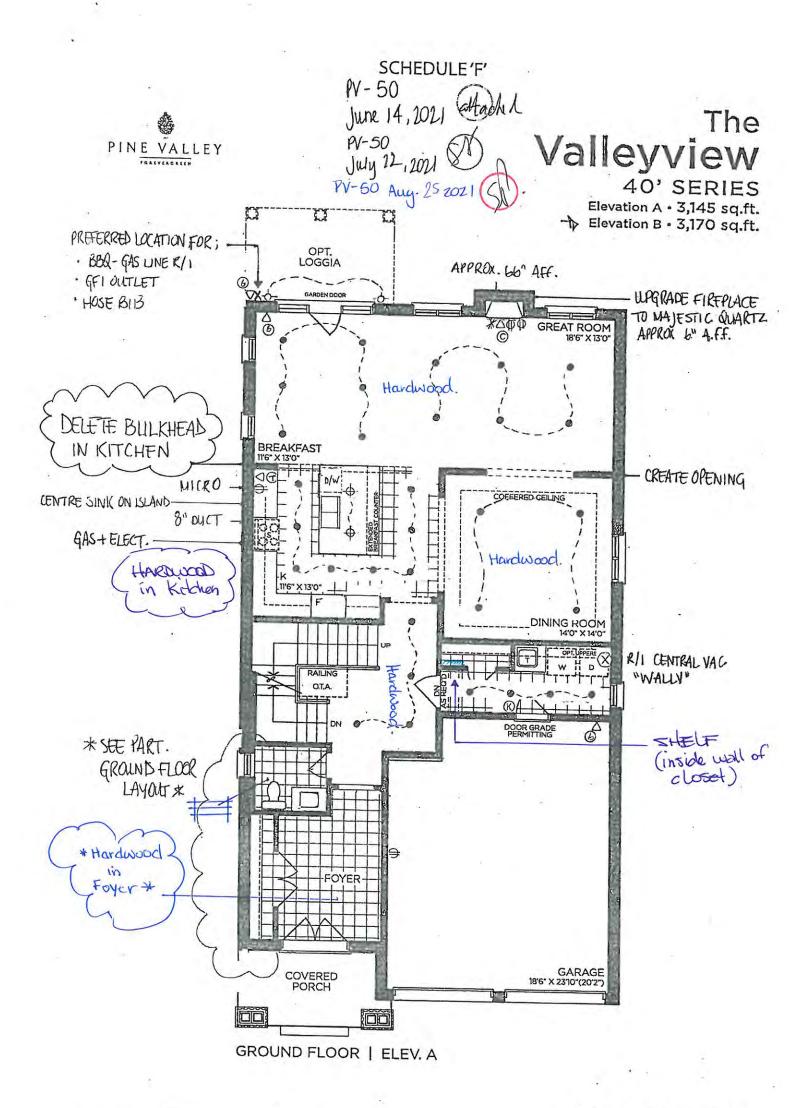

VENDOR PURCHASER PURCHASER

# GOLDPARK

WORTH MOR


Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area, Layout may be reverse of the unit purchased. E. & O.E. 4002




SCHEDULE'F'
PV-50
July 14, 2021
PV-50
July 22, 2021
PV-50
Aug. 25, 2021

The Valleyview
40' SERIES


Elevation A • 3,145 sq.ft. Elevation B • 3,170 sq.ft.

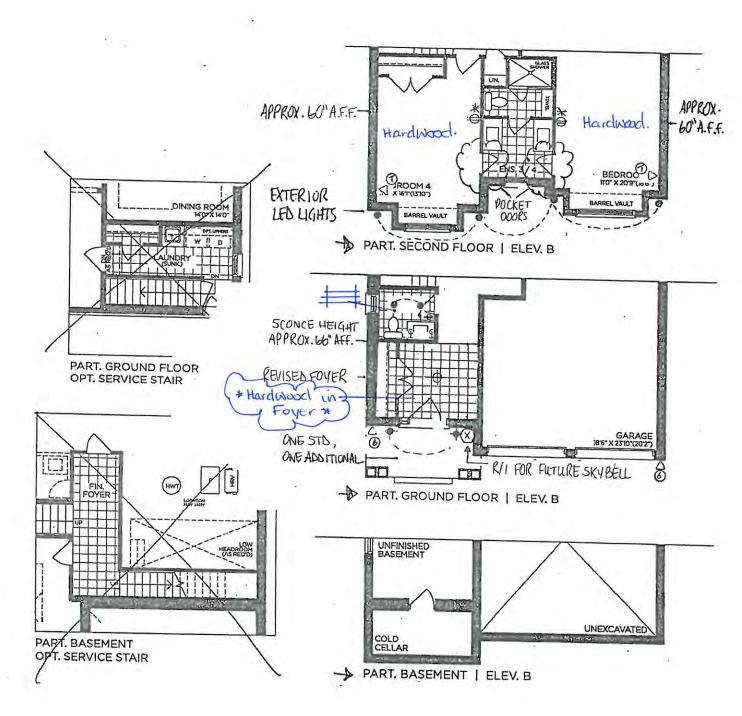



GOLDPARK

Prices, figures, Illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4002

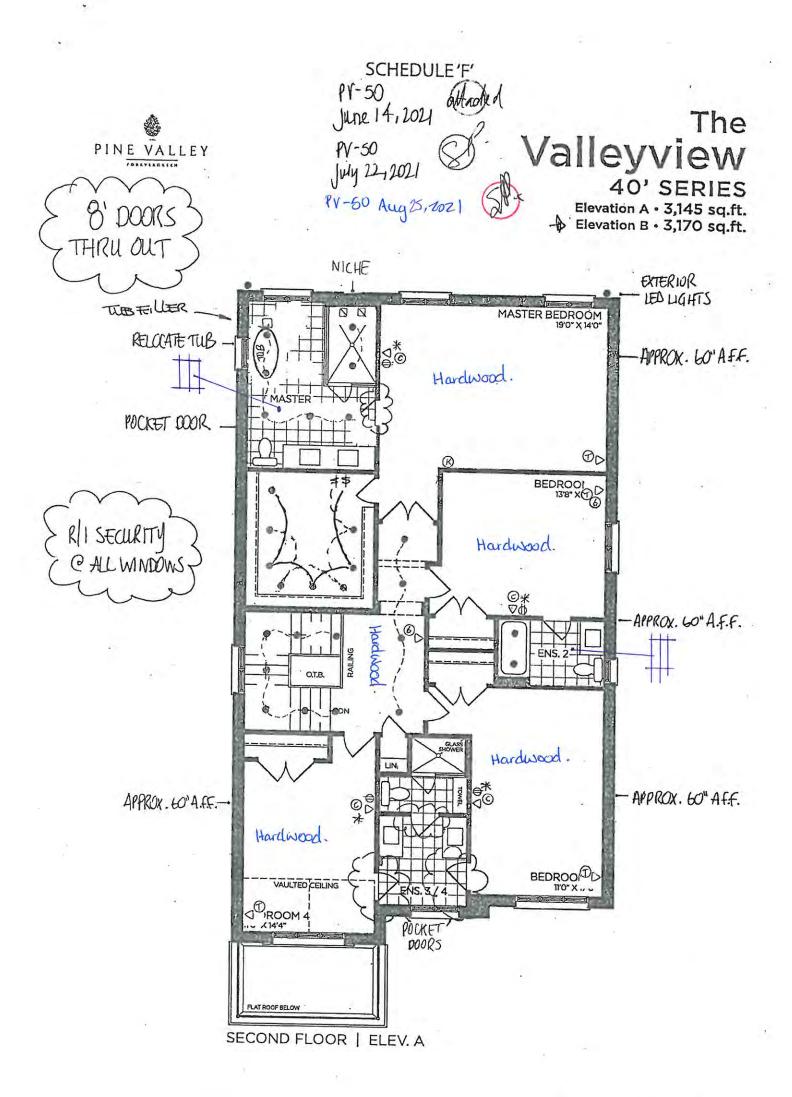

VENDOR	
PURCHASER	
PURCHASER	

# GOLDPARK

Prices, figures, Illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area, Layout may be reverse of the unit purchased. E. & O.E. 4002

SCHEDULE'F' PV-50 June 14, 2021 The Valleyview PINE VALLEY July 22, 2021 PV-50 40' SERIES Elevation A · 3,145 sq.ft. Elevation B • 3,170 sq.ft. ADDITIONAL; . · BEQ - GAS LINE R/I · GFI OUTLET · HOSE BIB MISHED SEMENT . PREFERRED CENTRAL VAC R/I PREFERRED 2NA R/I CENTRAL VAC-**(X)** LAUNDRY TUB X ON LEGS LOCATION MAY VARY HRV BFPV

VENDOR
PURCHASER
PURCHASER

COLD CELLAR

BASEMENT | ELEV. A

# GOLDPARK

Prices, figures, Illustrations, sizes, features and finishes are subject to change without notice, Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4002


UNEXCAVATED

# VAUGHAN, ONTARIO GOLDPARK HOMES MODEL: (4002) VALLEYVIEW PINE VALLEY

SITE STANDARD: WHITE 3/4" EXTENSION SOFT-CLOSE DRAWERS & SOFT-CLOSE HINGES TO KITCHEN AREA

10' CEILING - 12"H COFFERED CEILING -M.H. = 102" + 3/4"H CONTEMPORARY MOLDING + 5 1/4"H FURRING RAIL + LARGE CORNICE MOLDING TO UNDERSIDE OF BOX


\* LED Light + Valance Bundlex \* stacked Mini Uppers \* \* Hardwood in Kitchen \* \* Hidden Teceptacles \*

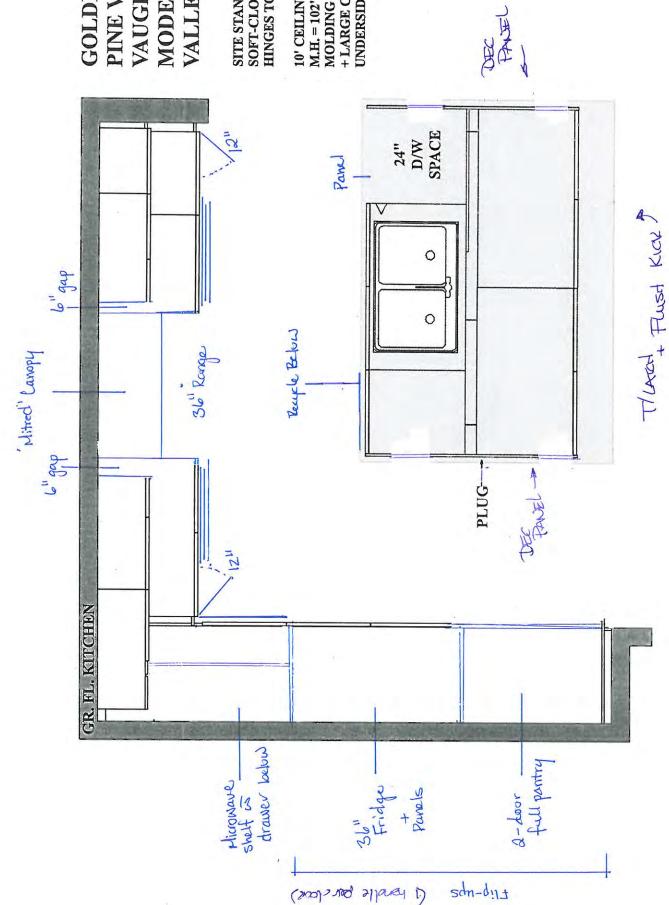


(1 hardle parchaux)


# MODEL: (4002) VALLEYVIEW VAUGHAN, ONTARIO GOLDPARK HOMES PINE VALLEY


SITE STANDARD: WHITE 3/4" EXTENSION SOFT-CLOSE DRAWERS & STANDARD SLAM DOOR HINGES TO VANITIES ONE TOP DRAWER WHERE POSSIBLE THROUGHOUT EACH VANITY, ONE BANK OF DRAWERS WHERE POSSIBLE THROUGHOUT EACH MASTER ENSUITE VANITY

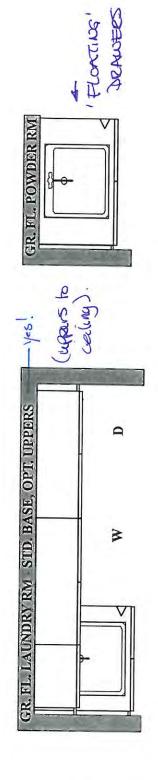



DEAUTERS







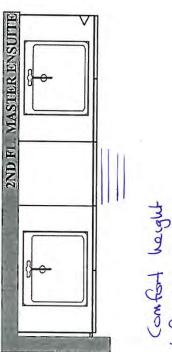



\*

# GOEMANS APPLIANCES

**APPLIANCE SPECIFICATIONS** 

Expect More. Get More.



PRO.	JECT	PART	'N	FR:
rnu.		PANI	IN	CK:

SHIP TO:


#### **REMINDER:**

To ensure a smooth project it is the responsibility of the homeowner / purchaser of appliances to share all the attached specifications with their cabinet provider, contractor, or any other tradesperson so they have the information required to complete their work accurately. Product specifications are for planning purposes only and are subject to change without notice. Refer to installation instructions shipped with the product before cutting cabinets, counters, panels, etc.

Goemans Appliances assumes no liability for product specifications.



## Full Spec Package



# Goemans Appliances

goemans.com

#### mike ALBANESE

4165780719

#### Search 20210429172604857SC

Version 3.8

Sat, Nov 27, 2021 2:33 PM EST



enterprise.steelcod.com/sp/goem/WUEAFVZ W

### SILVIA PALMA

Models	Pages
WM4500HBA LG Washer	3-7
DLEX4500B LG Dryer	8-13
HR1934-2 DF G Miele Range	14-18
DAR1130 Miele Range Insert Hood	19-37
<b>DFI664</b> Asko Dishwasher	38-40

#### Note about page numbers:

Because the original manufacturer's documents are not altered in any way, the page numbers displayed on the page may not correspond to the page number within this package.

All specifications are intended for initial planning purposes only. Manufacturers reserve the right to change specifications at any time without notice. Always consult the installation instructions found on the manufacturer's website or included with the appliances before installation.

ThinQ® TECHNOLOGY

SmartDiagnosis™ (v3.0)

#### LG LAUNDRY

## **WM4500HBA**

5.8 cu.ft. Capacity Front Load Washer

TurboWash™ 360 Steam Technology LG ThinQ Technology (Wi-Fi Enabled) AI DDTM 2019 Energy Star Most Efficient ezDispenseCartridge (Auto Detergent Dispense) SmartDiagnosis™



CAPACITY

Child Lock\*

Leveling Legs

Auto Suds Removal

Easy Loading TilTub™

Enjoy new ways to control your home with LG smart appliances

- Start the laundry while you're out shopping
  Get alerts when the cycle is finished
  Works with the LG ThinQ® app







#### Capacity (cu.ft.) **APPEARANCE** Design Look Front Control Intelligent Electronic Controls with LED Display Touch Buttons Dial-A-Cycle<sup>TA</sup> ENERGY 2019 Energy Star Most Efficient CEE Tier WASH PROGRAMS Normal, Heavy Duty, Bedding, Sanitary, Allergiene™, Bright White, Tub Clean, Delicates, Perm. Press, No. of Programs - 14 Sportswear, Towels, Speed Wash, Rinse+Spin, Downloaded TurboWash®, Steam, Fresh Care, Pre-wash, Remote Start, Delay Wash, Wi-Fi, Add Item, Extra Rinse, Control Lock, Drum Light, ColdWash, Spin Only, Detergent Level, No of Options - 15 Softener Level No. of Wash/Rinse Temps Extra Hot, Hot, Warm, Cold, Tap Cold Spin Speeds No. of Water Levels Load Sensing No. of Soil Levels **FABRIC CARE FEATURES** TurboWash® 360 SenseClean™ System Steam Technology Sanitary Cycle Allergiene™ Cycle ColdWash™ Option CONVENIENCE FEATURES (Washer) TrueBalance™ Anti-Vibration System ezDispense cartridge(Detergent, Softener), Main Wash, Bleach(cup) 4 Tray Dispenser LoDecibel™ Quiet Operation End of Cycle Signal LoadSense

4 Adjustable Legs

3/10/ (V3.0)	•
Wi-Fi	
Remote Start and Cycle Monitor	*
Energy Monitoring	
MOTOR	
Motor Type	Inverter Direct Drive Motor
Max RPM	1,300
Axis	Horizontal
MATERIALS AND FINISHES	
NeveRust™ Stainless Steel Drum with STS Lifters	
Cabinet	VCM
Control Panel	Plastic
Top Plate	Painted Steel
Door / Rim	Glass/Chrome (With Dark Black Tinted Square Cover)
All Available Colours	Black Steel (B)
POWER SOURCE	
Ratings	UL Listed
Electrical Requirements	120V, 10 Amps
Туре	Electric
OPTIONS/ACCESSORIES	
Pedestal	WDP4B
Pedestal (WxHxD)	27" x 14 1/8" x 30 3/4"
Sidekick™ Pedestal Washer	WD100CB
Sidekick Pedestal Washer (WxHxD)	27" x 14 1/8" x 30 3/4" (50 9/16" D with door open)
DIMENSIONS	A SA CAN CALLED STORY
Product (WxHxD)	27" x 39" x 33 1/4" (55" D with door open)
Carton (WxHxD)	29 23/32" x 43 4/32" x 33 28/32"
Weight (Product/Carton)	201.5 / 215.2 lbs
LIMITED WARRANTY	
	1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor
UPC CODES	
WM4500HBA	048231026772

772454073052


048231026451

772454059896

DLEX4500B

WDP4B

KSTK1



#### **WARNING**

 Certain internal parts are intentionally not grounded and may present a risk of electric shock only during servicing. Service personnel- Do not contact the following parts while the appliance is energized: pump, valve, motor, control board.

#### **Tools Needed**



- Pliers
- Plat-Blade Screwdriver
- B Level

#### Choosing the Proper Location

Check the following requirements for the install location before installing the washer.

- Allow for sufficient space between the walls and the washer for installation.
- Make sure that the floor is clean, dry and free of dust, dirt, water and oil so the leveling feet cannot slide easily. Leveling feet that can move or slide on the floor can contribute to excess vibration and noise.
- If the floor has too much flex, reinforce it to make it more rigid. If the floor is not solid, it may cause severe vibration and noise.
- If a drain pan must be used, take extra care to follow the instructions provided with the drain pan and make sure the leveling feet are adjusted for firm and even contact with the pan. Use of drain pans and failure to properly level the washer may result in increased vibration and noise during operation.

#### Power Outlet

- The power outlet must be within 60 inches (1.5 m) of either side of the washer.
- Position the washer so that the outlet and plug are easily accessible.
- Do not overload the outlet with more than one appliance.
- The outlet must be grounded in accordance with current electrical wiring codes and regulations.
- · Use a time-delay fuse or circuit breaker.


 It is the personal responsibility and obligation of the washer owner to have a proper outlet installed by a qualified electrician.

#### Flooring


- To minimize noise and vibration, install the washer on a level, solidly constructed floor capable of supporting the washer without flexing or bouncing.
- The washer must be installed on firm flooring to minimize vibration during the spin cycle.
   Concrete flooring is best, but a wood floor is sufficient, provided it is built to FHA standards.
- The floor under the washer must not slope more than 1 inch (2.5 cm) from front to back or side to side.
- Installing on carpeting and soft tile surfaces is not recommended.
- Never install the washer on a platform or weakly supported structure.

#### Floor Installation

To ensure sufficient clearance for water inlet hoses, drain hose and airflow, allow minimum clearances of at least 1 inch (2.5 cm) at the sides and 4 inches (10 cm) behind the washer. Be sure to allow for wall, door, or floor moldings that may increase the required clearances.




<b>Dimensions and Clearances</b>	
A	20" (51.5 cm)
В	53 1/4" (135.5 cm)
С	33 1/4" (84 cm)
D	4" (10 cm)



Dimensions and Clearances		
E	1" (2.5 cm)	
F	27" (70 cm)	
G	1/4" (0.5 cm)	

#### Stacking or Pedestal Installation

The washer can be stacked under a dryer or on top of a pedestal or pedestal washer.



<b>Dimensions and Clearances</b>	
А	33 1/4" (84 cm)
В	4" (10 cm)
С	1" (0.5 cm)
D	27" (70 cm)
E	77 1/2" (196.8 cm)
F	1/4" (0.5 cm)
F	1/4" (0.5 cm)

#### NOTE

- Refer to the instructions packaged with the optional pedestal kit before stacking appliance on pedestal.
- · Do not use a drain pan with a pedestal or pedestal washer installation as it can block the drawer. Using a drain pan may result in increased vibration and noise during operation.

#### **Unpacking and Removing** Shipping Material

Remove all shipping materials from the washer for proper operation and inspect it for shipping damage.

#### **CAUTION**


· Failure to remove shipping materials can cause excessive noise and vibration.

#### Unpacking Shipping Material

\*Some models do not ship with drum support.


Lift the washer off the foam base.

- · After removing the carton and shipping material, lift the washer off the foam base.
- Make sure the plastic drum support \*\* comes off with the base and is not stuck to the bottom of the washer.
- If you must lay the washer down to remove the carton base 2, always protect the side of the washer and lay it carefully on its side. Do not lay the washer on its front or back.



#### **Removing Shipping Material**

- Remove the bolt assemblies.
  - Starting with the bottom two shipping bolts 3, use the included wrench to fully loosen all 4 shipping bolts by turning them counterclockwise.
  - · Remove the bolt assemblies (bolts and retainers) by wiggling them slightly while pulling them out.



- Install the hole caps.
  - Locate the hole caps 


    included in the accessory pack or attached to the back of



· Let the water drain into a bucket, and check the water temperature to make sure you've connected the hoses to the correct faucets.



- Attach the inlet hoses to the back of the washer.
  - · Attach the hot water inlet hose to the hot water inlet on the back of the washer. Attach the cold water inlet hose to the cold water inlet on the back of the washer.
  - Tighten the fittings securely. Turn on both faucets all the way and check for leaks at both ends of the hoses.



#### Connecting the Drain Hose

Connect the drain hose to either a standpipe or laundry tub.

#### WARNING

· The drain hose should always be properly secured. Failure to properly secure the drain hose can result in flooding and property damage.


#### NOTE

- · The drain must be installed in accordance with any applicable local codes and regulations.
- · Make sure that the drain hose is not stretched, pinched, crushed, or kinked.
- · The end of the drain hose should be located a minimum of 24" (61 cm) and a maximum of 96" (244 cm) above the bottom of the washer.
- · For best results, locate the end of the drain hose no higher than 66" (168 cm) above the bottom of the washer. As the drain outlet is raised


- beyond 66" (168 cm), the drain function will be increasingly affected.
- Never create an airtight seal between the hose and the drain with tape or other means. If no air gap is present, water can be siphoned out of the drum resulting in poor wash/rinse performance or clothing damage.

#### Using a Standpipe to Drain

- Clip the end of the hose into the elbow bracket.
  - · Connect the elbow bracket @ within 4 inches (10 cm) of the end of the drain hose. If the drain hose is extended more than 4 inches (10 cm) beyond the end of the elbow bracket, mold or microorganisms could spread to the inside of the washer.



Insert the end of the drain hose into the standpipe.



Use the provided tie strap 2 to secure the drain hose in place.



If the water valves and drain are built into the wall, fasten the drain hose to one of the water

#### LG LAUNDRY

#### DLEX4500B / DLGX4501B

7.4 cu.ft. Front Load Dryer with TurboSteam™ and Built-In Intelligence

7.4 cu. ft. Ultra Large Capacity TurboSteam™ Technology Al Fabric Sensor/ Smart Pairing™ LG ThinQ® Technology / Proactive Customer Care FlowSense™ Duct Clogging and Lint Filter Indicators **ENERGY STAR® Certified** Closet Depth LoDecibel™ Quiet Operation Reversible Door Wrinkle Care Option


**AVAILABLE COLORS** 



BLACK STEEL







- Use the ThinQ® app to start the laundry while you're out
- · Get alerts when the cycle is finished

Front Load Dryer

WM4500HBA

Black Steel (B)

Start, Drum Light, Signal

Less Dry, Damp Dry

Ultra Low

7.4 cu. ft.

Yes

Yes

Yes

Yes

 With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle





SUMMARY

Matching Washer

APPEARANCE

LED Display

Dial-A-Cycle™

Touch Buttons

No. of Programs

No. of Options

Options

DRYER PROGRAMS

Programs (Sensor Drv)

Temperature Settings

Drying Levels

Manual Dry Times

Intelligent Electronic Controls with

Type

Capacity

Sensor Dry

Steam









#### POWER SOURCE

Ratings CSA Listed 120V, 15 Amps (Gas) / 240V 30 Electrical Requirements Amps (Electric) Туре Electric, Gas BTU Rating 10 000 Feet **OPTIONS** LP Conversion Kit 383EEL3002D Side Venting Kit 383EEL9001B Pedestal WDP4B 27 x 14 1/8 x 30 3/4 (50 1/2 D Pedestal (WxHxD) with door open) DIMENSIONS (ELECTRIC) Product (WxHxD) Depth with Door Open

27" x 38 11/16" x 29 3/4" Carton (WxHxD) 29 1/2" x 42 1/4" x 31 1/4" Weight (Product) 136 lbs Weight (Carton) 155 lbs DIMENSIONS (GAS) Product (WxHxD) 27" x 38 11/16" x 29 3/4"


Depth with Door Open Carton (WxHxD) 29 1/2" x 42 1/4" x 31 1/4" Weight (Product) 139.4 lbs Weight (Carton) 158.4 lbs LIMITED WARRANTY

> 1 Year 10 Years

048231026789 048231026796 048231026772


#### 14 INSTALLATION

hoses with the provided tie strap 3 (ribbed side on inside).




#### Using the Laundry Tub to Drain


- Clip the end of the hose into the elbow bracket.
  - Connect the elbow bracket ① within 4 inches (10 cm) of the end of the drain hose. If the drain hose is extended more than 4 inches (10 cm) beyond the end of the elbow bracket, mold or microorganisms could spread to the inside of the washer.



2 Hang the end of the drain hose over the side of the laundry tub.



3 Use the provided tie strap to secure the drain hose in place.



#### Leveling the Washer

The drum of the washer spins at very high speeds. To minimize vibration, noise, and unwanted movement, the floor must be a solid, level surface.

#### **A** CAUTION


- Using the washer without leveling it may cause excess vibration and noise, leading to a washer malfunction.
- Adjust the leveling feet only as far as necessary to level the washer. Extending the leveling feet more than necessary can cause the washer to vibrate.

#### NOTE


 Before installing the washer, make sure that the floor is clean, dry and free of dust, dirt, water and oil so the washer feet cannot slide easily.
 Feet that move or slide on the floor can contribute to excessive vibration and noise.

#### How to Level the Washer

- 1 Position the washer in its final location.
  - Take special care not to pinch, strain, or crush the water and drain hoses. If you have a carpenter's level ①, you can use it to check that the washer is level. The slope beneath the washer should not exceed 1 inch, and all 4 leveling feet must rest firmly on the floor.



- 2 Adjust the leveling feet.
  - Turn all 4 leveling feet in one direction to raise the washer or the other direction to lower it.



# PineValley PV 50 (SP) Nov. 28/21

#### Installation Location Requirements

#### **WARNING**

Read all installation instructions completely before installing and operating your dryer! It is important that
you review this entire manual before installing and using your dryer. Detailed instructions concerning
electrical connections, gas connections, and exhaust requirements are provided on the following pages.

#### The installation requires:


- A location that allows for proper exhaust installation. A gas dryer must be exhausted to the outdoors. See Venting the Dryer.
- A grounded electrical outlet located within 2 ft. (61 cm) of either side of the dryer. See Connecting Electric Dryers.
- A sturdy floor to support the total dryer weight of 200 lb (90.7 kg). The combined weight of a companion appliance should also be considered.
- No other fuel-burning appliance can be installed in the same closet as a dryer.
- · Additional clearances might be required for wall, door and floor moldings.
- Companion appliance spacing should also be considered.


#### NOTE


- The floor must be level, with a maximum slope of 1 inch (2.5 cm) under the entire dryer. Clothes may not tumble properly, and automatic sensor cycles may not operate correctly if the dryer is not level.
- For garage installation, you will need to place the dryer at least 18 inches (45.7 cm) above the floor. The standard pedestal height is 15 inches (38 cm). You will need 18 inches (45.7 cm) from the garage floor to the bottom of the dryer.
- Do not operate your dryer at temperatures below 45 °F (7 °C). At lower temperatures, the dryer might not shut off at the end of an automatic cycle. This can result in longer drying times.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.
- Check code requirements that limit, or do not permit, installation of the dryer in garages, closets, mobile homes or sleeping quarters. Contact your local building inspector.


P.V. 50 (81) Nov. 28/24

#### Clearances









#### Installation Spacing for Recessed Area or Closet Installation

The following clearances are recommended for this dryer. This dryer has been tested for clearances of 1 inch (2.5 cm) on the sides and rear. Recommended clearances should be considered for the following reasons:

- Additional clearances should be considered for ease of installation and servicing.
- Additional clearances should be considered on all sides of the dryer to reduce noise transfer. For closet
  installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered
  doors with equivalent ventilation openings are acceptable.


#### Closet Ventilation Requirements

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm²) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm²) must be installed no more than one foot above the floor. Install vent grills in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

#### NOTE

 There should be at least a little space around the dryer (or any other appliance) to eliminate the transfer of vibration from one appliance to another. If there is enough vibration, it could cause appliances to make noise or come into contact, causing paint damage and further increasing noise. (P) Now 28/24

#### Installation Spacing for Recessed Area or Closet, with Stacked Washer and Dryer

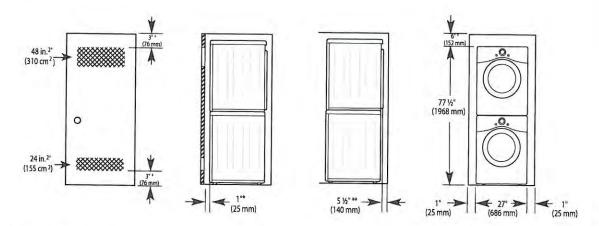


<sup>\*</sup> Required spacing

#### Installation Spacing for Cabinet

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

\* Required spacing

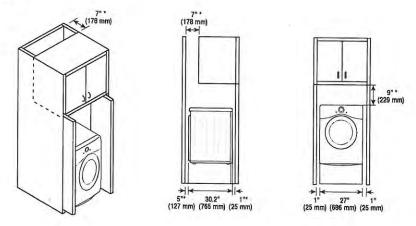

<sup>\*\*</sup> For side or bottom venting, 2-inch (5.1 cm) of spacing is allowed.

#### Venting the Dryer

#### **WARNING**

To reduce the risk of fire or explosion, electric shock, property damage, injury to persons or death when using this appliance, follow basic safety precautions, including the following:

- · Do not crush or collapse ductwork.
- Do not allow ductwork to rest on or contact sharp objects.
- If connecting to existing ductwork, make sure it is suitable and clean before installing the dryer.
- Venting must conform to local building codes.
- · Gas dryers MUST exhaust to the outdoors.
- Use only 4-inch (10.2 cm) rigid, semi-rigid or flexible metal ductwork inside the dryer cabinet and for venting outside.
- To reduce the risk of fire, combustion, or accumulation of combustible gases, DO NOT exhaust dryer air into an enclosed and unventilated area, such as an attic, wall, ceiling, crawl space, chimney, gas vent, or concealed space of a building.
- To reduce the risk of fire, DO NOT exhaust the dryer with plastic or thin foil ducting.
- The exhaust duct must be 4-inch (10.2 cm) in diameter with no obstructions. The exhaust duct should be kept as short as possible. Make sure to clean any old ducts before installing your new dryer.
- Rigid, semi-rigid or flexible metal ducting is recommended for use between the dryer and the wall. All non-rigid metal transition duct must be UL-listed. Use of other materials for transition duct could affect drying time.
- DO NOT use sheet metal screws or other fasteners which extend into the duct that could catch lint and reduce the efficiency of the exhaust system. Secure all joints with duct tape.
- Do not exceed the recommended duct length limitations noted in the chart. Failure to follow these instructions may result in extended drying times, fire or death.

#### **WARNING**

- Ductwork is not provided with the dryer. You should obtain the necessary ductwork locally.
   The vent hood should have hinged dampers to prevent backdraft when the dryer is not in use.
- The total length of flexible metal duct must not exceed 8 ft. (2.4 m).

#### Ductwork

Wall Cap Type	Number of 90° Elbows	Maximum length of 4-inch diameter rigid metal duct
Recommended	0	65 ft.(19.8 m)
	1	55 ft.(16.8 m)
	2	47 ft.(14.3 m)
- 3	3	36 ft.(11.0 m)
a: 4" (10.2 cm)	4	28 ft.(8.5 m)
Use only for short	0	55 ft.(16.8 m)
run installations	1	47 ft.(14.3 m)
	2	41 ft.(12.5 m)
	3	30 ft.(9.1 m)
b: 2.5" (6.35 cm)	4	22 ft.(6.7 m)

#### NOTE

- Deduct 6 ft. (1.8 m) for each additional elbow. Do not use more than four 90° elbows.
- In Canada, only those foil-type flexible ducts, if any, specifically identified for use with the appliance by the manufacturer should be used. In the United States, only those foil-type flexible ducts, if any, specifically identified for use with the appliance by the manufacturer and that comply with the Outline for Clothes Dryer Transition Duct, Subject 2158A, should be used.

# Ameralley PV 58P Nov 28/21


#### **Routing and Connecting Ductwork**

#### NOTE


Follow the guidelines below to maximize drying performance and reduce lint buildup and condensation in the ductwork. Ductwork and fittings are NOT included and must be purchased separately.

- Use 4-inch (10.2 cm) diameter rigid, semi-rigid or flexible metal ductwork.
- The exhaust duct run should be as short as possible.
- · Use as few elbow joints as possible.
- The male end of each section of exhaust duct must point away from the dryer.
- · Use duct tape on all duct joints.
- Insulate ductwork that runs through unheated areas in order to reduce condensation and lint buildup on duct surfaces.
- Incorrect or inadequate exhaust systems are not covered by the dryer warranty. Dryer failures or service required because of such exhaust systems will not be covered by the dryer warranty.


#### **Correct Venting**



#### **Incorrect Venting**









#### 36" All Gas and Dual Fuel Range

SPECIFICATIONS			
Overall Unit Dimensions	35 <sup>15</sup> / <sub>16</sub> " (915 mm) W	x 351/2" - 37" (902 - 940 mm) H x 261/2" (678 mm) D [Depth to control panel]	
Oven Door Clearance	25" (635 mm)		
Niche			
Minimum Cabinet Niche Opening	36" (915 mm) W x 35¹/₂" (901 mm) H		
Gas			
Gas Line Connection		1/2" NPT	
Operational Altitudes			
High Altitude	<ul><li>Griddle in LP: HR 1136-</li><li>Grill in G: HR 1135-1 G,</li></ul>	langes will function up to 9,800 ft. in altitude without adjustment; the following exception of the interest of the following exception of the following exc	
Electrical	HR 113x-1	HR 193x-2 DF	
Electrical Requirements	120V, 60Hz, 15A	120/208-240V, 60Hz, 30A	
Power Cord	NEMA 5-15p, 5' 11" (1.8m)		
Plumbing	HR 113x-1	HR 193x-2 DF	
Plumbing Requirements	An Inline water filter, like activated carbon, is required to reduce mineral deport Do not connect to a Reverse Osmosis (RO) water system. Connect to a cold supply only. Must be connected to a shut-off valve. The water shut-off valve accessible after installation. The water pressure must be between 14.5 and 1 (1 and 10 bars). If the pressure is higher, install a pressure reducing valve.		
Plumbed Hose Connection	-	Supplied hose: flexible braided 4'11" (1.5 m) with 3/6" O.D. compression fitting for connection to a shut off valve. The total hose length must not exceed 24.5 ft. (7.5 m).	
Shipping	HR 113x-1	HR 193x-2 DF	
Shipping Weight		448.6 lbs (203.5 kg)	
Shipping Dimensions	4	.35/18" (1100 mm) W x 52" (1,294 mm) H x 311/2" (800 mm) D	
Installation Accessories	HR 113x-1	HR 193x-2 DF	
12" Backguard	RBGAG1236	RBGDF1236	
20" Backguard	RBGAG2036	RBGDF2036	
40" Backsplash	RBS36	RBS36	
Support			
Call Miele		(800) 999-1360	
Miele Website		<sup>4</sup> ∂www.mieleusa.com	
20/20 Link	₹82020technologies.com		

#### All Gas:



#### Duel Fuel:



#### Only Burners:



HR 1134-1 Item 25113461USA

HR 1134-1 LP Item 25113462USA



HR 1934-2 DF Item 25193471USA

HR 1934-2 DF LP Item 25193472USA

#### With Grill:



HR 1135-1 Item 25113561USA



HR 1935-2 DF Item 25193571USA

#### With Griddle:




HR 1136-1 Item 25113661USA

HR 1136-1 LP Item 25113662USA



HR 1936-2 DF Item 25193671USA


HR 1936-2 DF LP Item 25193672USA Page 2 of 5






#### 36" All Gas and Dual Fuel Range


#### PRODUCT DIMENSIONS

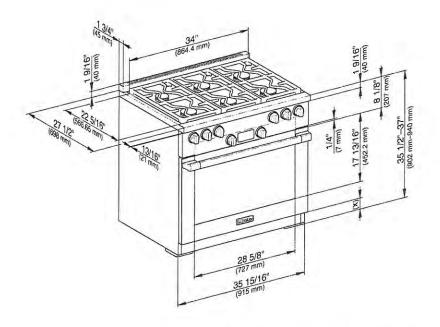





- (x) = Toe-kick height adjustment 5" 6 1/2" (127 mm 165.1 mm)
- E = Electrical connection
- G = Gas connection
- W = Water connection (HR 193x -2 Only)

#### SIDE VIEW

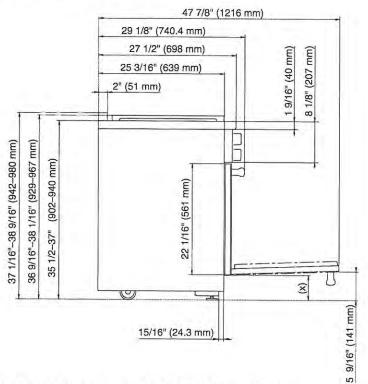

#### **BULLNOSE DETAILS**





#### Dual Fuel 36" Range BTU Output

#### HR1934-2 Burners

(1) 12,500 BTU (G/LP); (2) 13,600 BTU (G)

Gas Burners:


13,000 BTU (LP); (3) 19,500 BTU (G/LP)

Total BTU Output

98,200 BTU (G) 97,000 BTU (LP)



36" HR 1934-2 DF Range

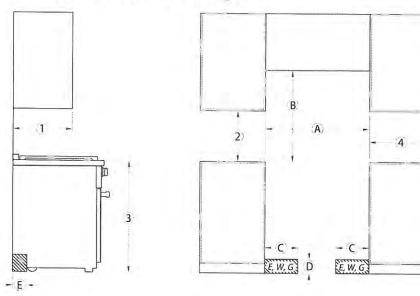


©, ©, © The shaded area represents the installation area for the connections: E = Electrical connection, W = Water connection (HR 193x-2 DF only), G = Gas Connectoin

Position	Dimensions	Description			
<b>(1)</b>	13" (330 mm)	Maximum depth of top cabinet			
(2)	18" (457 mm)	Minimum distance to bottom edge of top cabin			
(3)	35 1/2"-37" (901-940 mm)	Distance from the floor to cooktop surface			
(4)	10" (254 mm)	Minimum distance to combustible surfaces.			
(A)	min. 36" (915 mm)	Niche width Please contact Miele Technical Service for more information.			
B	37" (940 mm)	Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface.			
	36" (915 mm)	Minimum distance between the top of the cooking area and the bottom of the Miele Range Hood (DAR model with DRxB XL blower).			
	30" (762 mm)	Minimum distance between the top of the cooking area and the bottom of the Miele Range Hood (DAR model with DRxB XXL blower).			
	Refer to the Install Appliance dimens hood (S)).	lation instructions for the Miele venti ions (Distance between cooktop and	lation hood, I ventilation		
	For all other hoods please consult the manufacturer's specifications for required distances.				
©	approx. 13 3/4" (350 mm)	Maximum connection width right and left	Position of the wall		
(D)	approx. 4 1/2" (115 mm)	Maximum connection height	socket		
(E)	approx. 2 13/16" (72 mm)	Maximum connection depth			

#### Note:

Please observe safe distances to rear combustible surfaces of 12" (305 mm) clearances. For zero clearance installation, Miele Backguards will satisfy the required distance to combustible surfaces. The Miele Backguard is available in 12" (305 mm) or 20" (508 mm) heights.



### Míele

#### 36" All Gas and Dual Fuel Range

#### All Gas 36" Range BTU Output HR1134-1 Burners (1) 8,000 BTU (G/LP); Gas Burners: (2) 9,000 BTU (G/LP); (3) 19,500 BTU (G/LP) Total BTU Output 84,500 BTU (G/LP) HR1135-1 Burners (1) 9,000 BTU (G); Gas Burners: (1) 8,000 BTU (G); (2) 19,500 BTU (G) Grill Burner: 19,000 BTU (G) Total BTU Output 75,000 BTU (G) HR1136-1 Burners (1) 9,000 BTU (G/LP); (1) 8,000 BTU (G/LP); Gas Burners: (2) 19,500 BTU (G/LP) 13.000 BTU (G) Griddle Burner:

 Oven Burners (HR113x-1 Only)

 Oven Top
 22,000 BTU (G);

 Burners
 20,150 BTU (LP)

14,300 BTU (LP)

69,000 BTU (G)

70,300 BTU (LP)

78,100 BTU (G)

78,800 BTU (LP)

 Burners
 20,150 BTU (LP)


 Oven Bottom
 25,500 BTU (G);

 Burner
 27,500 BTU (LP)

Total BTU Output

#### Dual Fuel 36" Range BTU Output HR1935-2 Burners (1) 12,500 BTU (G); Gas Burners: (1) 13,600 BTU (G); (2) 19,500 BTU (G) Grill Burner: 19,000 BTU (G) Total BTU Output 84,100 BTU (G) HR1936-2 Burners (1) 12,500 BTU (G/LP); (1) 13,600 BTU (G) Gas Burners: 13,000 BTU (LP); (2) 19,500 BTU (G/LP) 13,000 BTU (G) Griddle Burner: 14,300 BTU (LP)

# - 1) - 3



©, D, E The shaded area represents the installation area for the connections:

E = Electrical connection, W = Water connection (HR 193x-2 DF only), G = Gas Connection

Position	Dimensions	Description			
①	13" (330 mm)	Maximum depth of top cabinet			
(2)	18" (457 mm)	Minimum distance to bottom edge	of top cabinet		
(3)	35 1/2"-37" (901-940 mm)	Distance from the floor to cooktop surface			
(4)	10" (254 mm)	Minimum distance to combustible	m distance to combustible surfaces.		
A	min. 36"	Niche width	1.		
	(915 mm)	Please contact Miele Technical Service for more information.			
(B)	37" (940 mm)	Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface.			
	30" (762 mm)	Minimum distance between the top of the cooking area and the bottom of the Miele Range Hood (DAR model with DRxB XL or DRxB XXL blower).			
		allation instructions for the Miele ventilation hood, nsions (Distance between cooktop and ventilation			
	For all other hoods please consult the manufacturer's specifications for required distances.				
(C)	approx. 13 3/4" (350 mm)	Maximum connection width right and left	Position of the wall		
( <u>D</u> )	approx. 4 1/2" (115 mm)	Maximum connection height	socket		
( <b>E</b> )	approx. 2 13/16" (72 mm)	Maximum connection depth			

#### Note:

Total BTU Output

Please observe safe distances to rear combustible surfaces of 12" (305 mm) clearances. For zero clearance installation, Miele Backguards will satisfy the required distance to combustible surfaces. The Miele Backguard is available in 12" (305 mm) or 20" (508 mm) heights.




Pine Valley P.V. 50
36" Range Insert Hood

Pine Valley P.V. 50
Nov 28/21

DAR 1130









#### **DAR 1130** Features:

- · Recessed knob controls
- · Dishwasher-safe stainless steel baffle filters
- 4 fan speeds including Intensive
- · Hood interior with CleanCover
- · LED ClearView lighting
- · Auto-Vent safety sensor

#### **SPECIFICATIONS**

DAR 1130 - Item 28113050USA

Overall Unit Width 337/16" (850mm) Overall Unit Height 175/8" (448mm) Overall Unit Depth 2213/16" (579mm)

Cabinet

Minimum Cabinet Cut-Out Width 321/2" (825 mm) Minimum Cabinet Width 339/16" (852 mm) Minimum Cabinet Cut-Out Depth 215/8" (550 mm) Minimum Cabinet Cut-Out Height 1711/16" (450 mm)

Lighting

Number of lights and wattage 3 LED lights @ 2 watts each

Fan

Fan Speeds Maximum CFM With DR\*B XL 700 CFM Maximum CFM With DR\*B XXL 1100 CFM

Duct

Recommended Duct Diameter With DR\*B XL 8" (203 mm) 😽 Recommended Duct Diameter With DR\*B XXL 10" (254 mm)

Electrical

Electrical Requirements 120V, 60Hz, 15 Amps

Power Cord Yes - NEMA 5-15 plug, length 2' 6" (0.75 m)

Shipping

Shipping Weight 77.2 lbs. (35kg)

4111/16" (1050mm) W x 28" (710mm) H x Shipping Dimensions


293/16" (740mm) D

800.999.1360

Support Call Miele

Miele Website

<sup>⁴</sup>⊕www.mieleusa.com 20/20 Link €2020technologies.com





DRIB XL

Internal Range Hood Blower - 700 CFM



DRIB XXL

Internal Range Hood Blower - 1100 CFM



DREB XL

External Range Hood Blower - 700 CFM




DREB XXL

External Range Hood Blower - 1100 CFM




**DRRV 1200** 


Rear Venting Adapter







#### PRODUCT DIMENSIONS

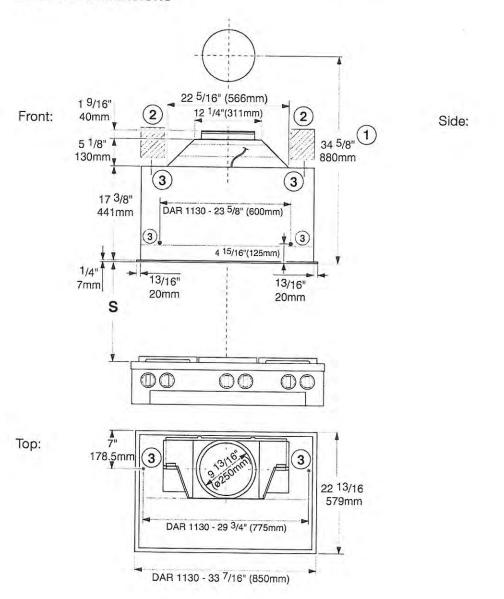






- Minimum height required for exhaust air penetration when using a vent duct.
- 2 Recommended installation area for the electrical connection.
- 3 Attachment points: there must be a sub-construction capable of bearing the load in the area of the attachment point.







#### **CABINET DIMENSIONS**




Front:




Side:



Top:



## 36" Range Hood Insert DAR 1130






DISTANCE BETWEEN COOKTOP AND VENTILATION HOOD (S)

	Distance between cooktop and ventilation hood (S)			(S)
Miele Range Wall / Insert Hood	DAR 1120, DAR 1220 (30")	The second of the second	DAR 1230 6")	DAR 1150, DAR 1250 (48")
Internal / External Miele blowers	DRIB/DREB XL (700 cfm)	DRIB/DREB XL (700 cfm)	DRIB/DREB XXL (1100 cfm)	DRIB/DREB XXL (1100 cfm)
Miele electric cooktops		24" (61	10 mm)	
Miele barbeque and fryer (electric)		26" (66	60 mm)	
Multi-burner Miele gas cooktop, ≤ 43,000 BTU/h (12.6 kW), none of the burners > 19,800 BTU/h (5.8 kW)	26" (660 mm)			
Multi-burner Miele gas cooktop, > 43,000 BTU/h (12.6 kW) and ≤ 92,200 BTU/h (27.0 kW), none of the burners > 19,800 BTU/h (5.8 kW)	30" (760 mm)			
Multi-burner Miele gas cooktop, > 92,200 BTU/h (27.0 kW) and ≤ 112,600 BTU (33.0 kW), none of the burners > 19,800 BTU/h (5.8 kW)	not possible	36" (910 mm)	30" (76	60 mm)
Multi-burner Miele gas cooktop, > 112,200 BTU/h (33.0 kW) and ≤ 142,600 BTU (41.8 kW) none of the burners > 19,800 BTU/h (5.8 kW)	no poss		36" (91	0 mm)
Multi-burner Miele gas cooktop, > 142,600 BTU/h (41.8 kW)	not possible			
Multi-burner Miele gas cooktop, one of the burners > 19,800 BTU/h (5.8 kW)	not possible			
Miele single-burner gas cooktop (wok) ≤ 20,500 BTU/h (6.0 kW)	26" (660 mm)			
Miele single-burner gas cooktop (wok) > 20,500 BTU/h, (6.0 kW), ≤ 27,600 BTU/h (8.1 kW)	30" (760 mm)			
Miele single-burner gas cooktop (wok) > 27,600 BTU/h (8.1 kW)	not possible			

## 36" Range Hood Insert DAR 1130





HOOD-BLOWER COMBINATION GUIDE

The following appliance combinations are possible:

		Extraction mode with internal blower	Vented mode with external blower	Recirculation mode	Ducting cover
	Range Insert DAR 1120 (30")	Blower DRIB XL or DRIB XXL*	Blower DREB XL or DREB XXL*	1-0	1
	Range Insert DAR 1130 (36")	Blower DRIB XL or DRIB XXL	blower DREB XL or DREB XXL	1-1-3	1
	Range Insert DAR 1150 (36")	Blower DRIB XXL	Blower DREB XXL	-	2: 2:
	Range Wall Hood DAR 1220 (30")	Blower DRIB XL or DRIB XXL*	Blower DREB XL or DREB XXL <sup>4</sup>	blower DRIB XL + recirculation kit DRUU 30**	DRDC 3006 (6") DRDC 3012 (12") DRDC 3018 (18") DRDC 3024 (24")
	Range Wall Hood DAR 1230 (36")	Blower DRIB XL or DRIB XXL	blower DREB XL or DREB XXL	Blower DRIB XL + recirculation kit DRUU 36**	DRDC 3606 (6") DRDC 3612 (12") DRDC 3618 (18") DRDC 3624 (24")
	Range Wall Hood DAR 1250 (48")	Blower DRIB XXL	Blower DREB XXL		DRDC 4806 (6") DRDC 4812 (12") DRDC 4818 (18") DRDC 4824 (24")
	Range wall hood DAR 1260 (60")	Blower DRIB XXL	Blower DREB XXL	-1	DRDC 6006 (6") DRDC 6012 (12") DRDC 6018 (18") DRDC 6024 (24 )

<sup>\*</sup>not recommended

<sup>\*\*</sup>The DRDC duct cover can also be installed above the recirculation kit panel.


Pine Valley P. V. 50 (SP) Nov. 28 |21

DRIB XL INTERNAL RANGE HOOD BLOWER (Optional Accesory) 700 CFM




DRIB XXL INTERNAL RANGE HOOD BLOWER (Optional Accesory) 1100 CFM



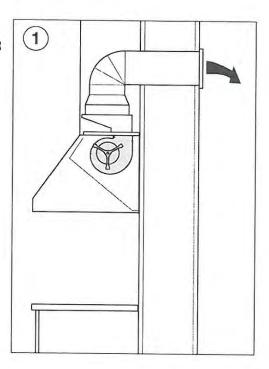


① Air extraction with internal blower DRIB XXL






DREB XL EXTERNAL RANGE HOOD BLOWER (Optional Accesory) 700 CFM

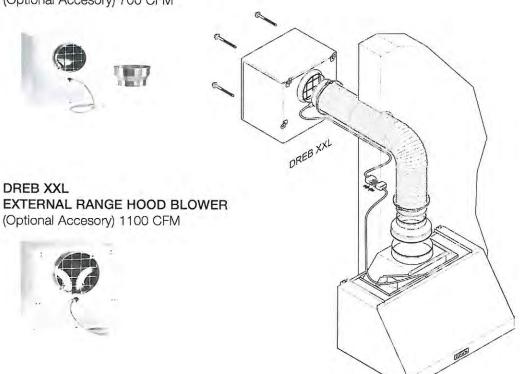

Pine Valley P. V. 50 (SP) Nov. 28/21


DRRV 1200 REAR VENTING ADAPTER (Optional Accesory)



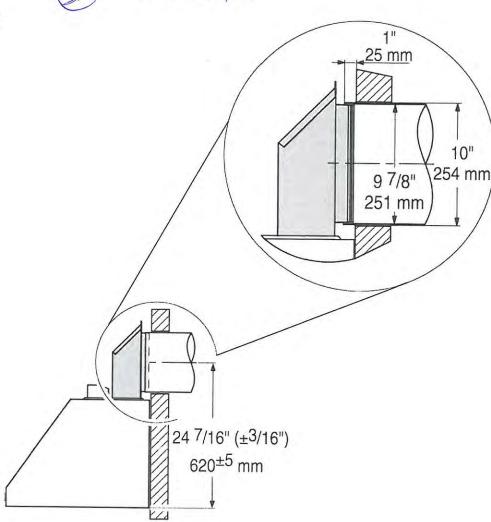

Front:

Side:



#### 40 SERIES DF1664



#### **FEATURES**

Accepts custom panel and handle

Premium height-adjustable upper rack and premium lower rack

Top tray with Instant Lift™

Heavy-duty stainless steel construction

Nylon-coated steel racks

Turbo Drying™ system

16 place-setting capacity

Quiet operation-42 dB(A)

9Spray™ wash system

Hidden controls

LED lit interior

LED display

Delayed start

ADA height compliant


#### ACCESSORIES

Stainless steel front panel with tubular or pro handle

Stainless steel tubular or pro handle

Accessories available through an authorized Asko dealer. For local dealer information, visit the where to buy section of our website, askona.com.



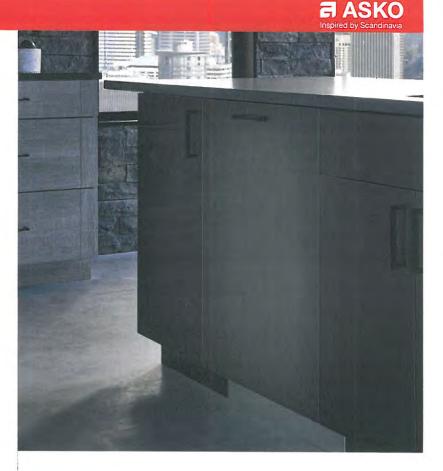

#### **PROGRAMS**

- Normal Wash
- Eco Wash
- Sanitation Wash
- Time Program
- Plastic Wash
- Hygiene Wash
- Crystal Glass
- Lower Half Wash
- Upper Half Wash
- · Self-Cleaning
- · Rinse and Hold




#### PRODUCT SPECIFICATIONS

Model	DFI664	
Width	23 /8"	
Height	32 / 4"** - 34 / /4"	
Depth	22"	
Door Clearance	245/8"	
Weight	115 lb	
Electrical Supply	115 VAC, 60 H	
Service	15 amp dedicated circuit	
Receptacle	3-prong grounding-type	
Power Cord	4'	
Water Connection	6' PEX tubing with "/e" NPT female connection	
Drain Connection	5' corrugated tubing	
Pressure	4.2-140 psi	


Product dimensions do not include panel and handle. Dimensions will vary with panel thickness.

Electrical supply, plumbing supply, and drain should be located in an adjacent cubinet. If not, they must be located within the shaded area shown in the illustrations below.

#### ELECTRICAL | PLUMBING



#### DIMENSIONS

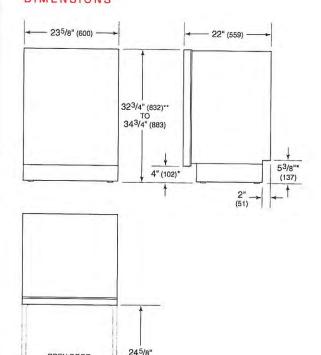


(625)

\*Dimension will vary with product height. "Can be reduced to 321/4" (819).


# PINEVULLEY PUSTO NOVZEZI

#### INSTALLATION

OPEN DOOR

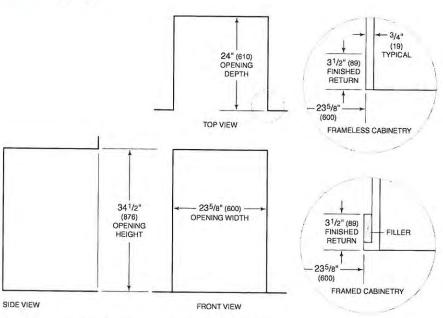

NOTE: 31/2" (89) finished returns will be visible and should be finished to match cabinetry.



#### Custom Panel

#### PANEL READY

IMPORTANT NOTE: The size of the custom door panel is directly related to the size of the opening.

The two most common dishwasher opening widths are 24" (610) and 235/8" (60 cm). For all other widths, the panel should be 1/4" (6) less than the opening to achieve minimum reveals. The minimum panel width is 233/8" (594).


The most common dishwasher opening height is 341/2" (876). The panel dimensions in the chart below are based on a 341/2" (876) opening, with a 4" (102) toe kick and 3/8" (10) top reveal. For all other opening and toe kick heights, the panel must be adjusted accordingly. The minimum panel height is 28" (711). The minimum toe kick height is 4" (102).

Finish all sides of the custom panel. They may be visible when the door is open.

PANEL DIMENSIONS	W	H
23 <sup>5</sup> /8" (60 cm) Opening	233/8" (594)	301/8" (765)
24" (610) Opening	233/4" (603)	301/8" (765)

#### PANEL REQUIREMENTS

Max Weight (including handle)	20 lb (9 kg)
Min Thickness	3/4" (19)



Panel dimensions

#### ADA CUSTOM PANEL HEIGHT

The American with Disabilities Act limits the countertop height to 34" (864). Differing countertop thickness will affect the overall panel height.

Typical panel dimensions are based on a 321/2" (826) opening height with a 4" (102) toe kick and 3/8" (10) top reveal. The panel height cannot be less than 28" (711). Refer to the chart below for typical panel dimensions.

PANEL DIMENSIONS (ADA)	w	н
23 <sup>5</sup> /8" (60 cm) Opening	233/8" (594)	28 <sup>1</sup> /8" (714)
24" (610) Opening	233/4" (603)	281/8" (714)

#### PANEL REQUIREMENTS

Max Weight (including handle)			20 lb (9 kg)
Min Thickness			3/4" (19)

Nov. 28/2



#### FEATURES

Rigorously tested to ensure decades of use

Exceptional support from Madison, WI-based Customer Care team

LED Lighting for brighter interior

Dual refrigeration keeps food fresher longer

Air purification system fights spoilage, odors

Discreet interior water dispense with advanced filtration

Microprocessor control assures peak performance

Crispers and deli drawers in low-temp, high-humidity zones for optimum freshness

Over-and-under refrigerator/freezer storage

Freshness cards for maximum food preservation

Magnetic door seal system locks in cold air

Automatic ice maker with "max ice" feature

Adjustable shelves for maximum convenience

Overlay design accepts cabinetry panels of all kinds

#### **ACCESSORIES**

36" Stainless Steel Kickplate

66" Dual Flush Inset Stainless Grille Panel

90° Door Stop

Air Purification Cartridge

Custom Front Panel Mounting Kit

Custom Side Panel Mounting Kit

**Dual Installation Kit** 

Dual Installation Kit with 66" Grille Frame

Dual Installation Kit with 66" Pro Louvered Grille - Flush Inset

Dual Installation Kit with 72" Grille Frame

Dual Installation Kit with 72" Louvered Grille

Dual Installation Kit with 72" Pro Louvered Grille-Flush Inset

Egg Container

Extended Framed Handle Kit

Framed Handle Kit

Framed Louvered Grille Insert

Framed Stainless Steel Front Panels


Framed White Front Panels

Grille Frame - 83"

Grille Frame - 88"







#### PRODUCT DETAILS

#### REFRIGERATOR

- · 3 Adjustable glass shelves
- · 1 Stationary glass shelf
- · 1 High-humidity drawer with dividers
- · 1 Storage drawer with dividers
- 2 Adjustable door shelves
- · 1 Stationary door shelf
- · Adjustable dairy compartment

#### **FREEZER**

- · Full-extension roll-out freezer drawer
- Two-tier wire storage baskets
- · Automatic ice maker



#### PRODUCT SPECIFICATIONS


Model BI-36UID/O Dimensions 36"W x 84"H x 24"D Door Clearance 37 1/4" Drawer Clearance 23 5/8" Weight 515 lbs Refrigerator Capacity 16.4 cu. ft. Freezer Capacity 5.3 cu. ft. Electrical Supply 115 VAC, 60 Hz Electrical Service 15 amp dedicated circuit

#### ELECTRICAL

Receptacle

#### PLUMBING

3-prong grounding-type




PANEL SPECIFICATIONS For complete panels specifications including width/height. weight requirements, thickness requirements and offset details visit <a href="mailto:subzero-wolf.com/builtinconfigurator">subzero-wolf.com/builtinconfigurator</a>.

NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified


#### INTERIOR VIEW



This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

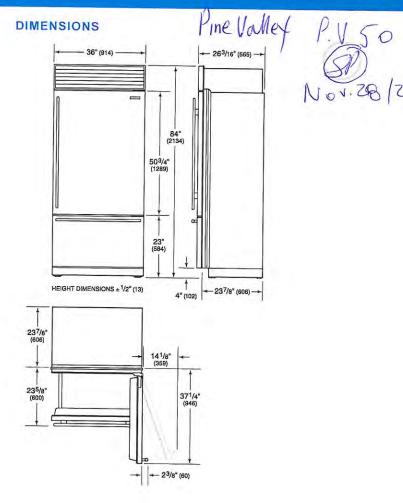


#### FLUSH INSET INSTALLATION

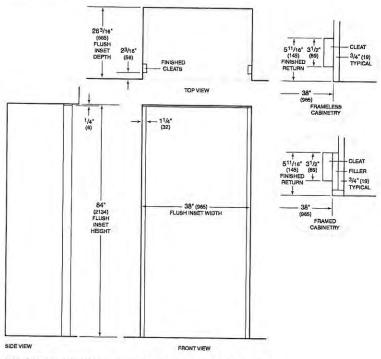

NOTE:  $3^{\circ}1^{\circ}$  (se) finished returns and shaded areas will be visible and should be finished to match cabinetry. Shaded line represents profile of unit with  ${}^{3}4^{\circ}$  (19) panel.

		* 1 <del>*</del>	



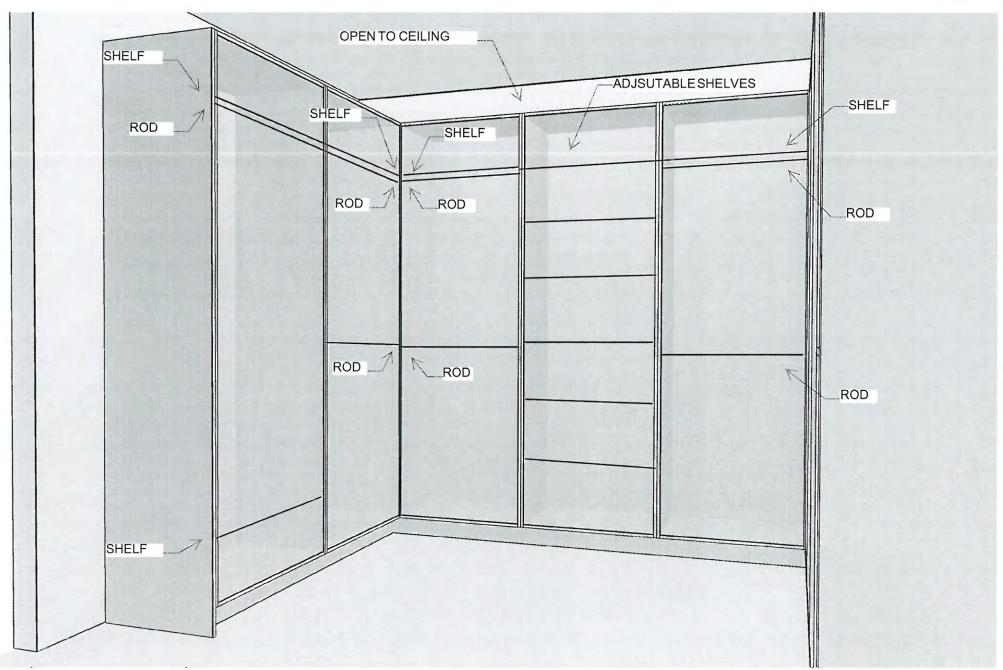



#### STONE COUNTERTOP EDGE PROFILES

	STANDARD 2CM EASED EDGE	LOCATION:
	UPGRADE 3CM EASED EDGE	LOCATION:
* AS 501	LARE AS POSSIBLE Please!	* Kitchen , Ronder Room, Laundry, Master Ensuite, Shared Ensuite, Ensuite 2
	UPGRADE 4CM MITRED EDGE	LOCATION:
	UPGRADE 2CM OGEE EDGE	LOCATION:
LOT#: PV-50 SIGNATURE:	DATE: Aug.25, 202	1
SIGNATURE:		



H001-02	H001-03	H001-04
		тоисн-latch
H009-03	H009-09	
H011-03	H011-05	H011-06
		*NO HARDWARE  *thru-out, except kitchen
H033-01  MIMER: NO HARDWARE OR HOLES THRU-OUT: HOMER REPENSE AND WARRANTY.	H039-03  DWNER IS RESPONSIBLE FOR THE INSTALLATION	N OF THEIR OWN HARDWARE AFTER CLOSING AT
LOT# PV-50 DATE: A	ug 25; 2021	
SIGNATURE:		



#### BH-082-03

Pull - 'Matte Black'



# \* kitchen

LOT# PV-60	DATE: Ang 25, 2021	
SIGNATURE:		
SIGNATURE:		



### BAH-083-03

Appliance Pull - 'Matte Black'



### LOCATION:

\* kitchen

LOT# PV-60	DATE: Aug. 25, 2021	
SIGNATURE:		
SIGNATURE:		

CHROME\* - STANDARD



### **MOEN - ALIGN**

One-Handle Pulldown Kitchen Faucet




STAINLESS (SRS)	
MATTE BLACK (BL)	
BRUSHED GOLD (BG)	
MODEL: 7565 Chrome / 7565SRS Stainless / 7565BL Matte B	Black / 7565BG Brushed Gold
Lot# PV-50 Date: Aug 25, 7021	Room: Kitchen
Signature:	



BLANCO - QUATRUS R15 U SUPER SINGLE Stainless Steel - Undermount 32" x 18"





Stainless Steel

MODEL 401518 Stainless Steel

Lot# PV-50	
Room: kitchen	Signature:
Date: Aug. 15, 2021	Signature:



# BLANCO - QUATRUS R15 LAUNDRY SINK + MOEN - SLEEK SINGLE HANDLE PULLOUT FAUCET





\*CHROME ONLY + STAINLESS STEEL

MODEL: 7864 Faucet / 401802 Stainless Steel Sink

Lot# Py-50	Date: Aug. 25, 2021	Room: Laundry	
Signature:	)		
Signature:			



### CILA

### Contrac Soft White 1 Piece Elongated Bowl w/ Concealed Skirted Trap-Way



**DESCRIPTION:** Soft White, 17" plus height for greater comfort, Soft white tank lever

**DIMENSIONS:** 15 3/8" W x 28 1/2" D x 30 1/8" H


MODEL: 4710BOXU

Lot# PV- 50	Date: Aug 25 2021	Room: * thru-out *	
Signature:			
Signature:			



### MT6X6

Shower Door Handle





MT6X6 Shower Door Handle

6" x 6" back-to-back 3/4" dia. tube Cut and mitred corners with washers

CHROME -	> shared Ensuite
MATTE BLAC	CK - Master Ensute

Lot# PV- 50	Date: Aug 25 2021	Room: * see above *	
Signature:			
Signature:			
	<u> </u>		





Tissue Holder Mason - Chrome

Towel Bar Mason - Chrome

### Please select one of the following:

SIGNATURE:

SIGNATURE:


	INSTALL STANDARD BATHROOM ACCESSORIES THRU OUT (tissue holder + towel bar) *location as per vendors discretion*	r.	<u>)</u>
Ø	*DO NOT* INSTALL STANDARD BATHROOM ACCESSORIES THRU OUT *tissue holder + towel bar will not be provided*	- 1	· • • • • • • • • • • • • • • • • • • •
LOT	# PV-50 DATE: Aug. 25, 2021		



### LINCOLN PARK DOOR



1	0	0	T	10	N	

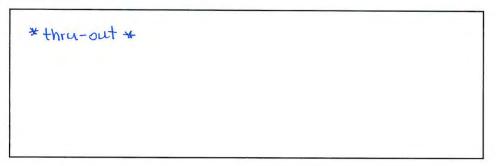


LOT# PY- 50	DATE: Aug 25 2021	14.	
SIGNATURE:			
SIGNATURE:			



urchaser(s):	a M. Palma	
	79	
tandard Hood Fan Deletio	n .	
e acknowledge that the b	ouilder's standard hood fan will not be inst	holle
Ve acknowledge that the koon or supply, install and/or	ouilder's standard hood fan will not be inst r credit. We will install our own hood fan	alled. after clo
o not supply, install and/or	ouilder's standard hood fan will not be inst r credit. We will install our own hood fan	alled. after clo



## Range Hood - Mitred Square



Lot# PY - 50		
Room: Kitchen	Signature: Shulmh	
Date: Aug. 25 , 2021	Signature:	



### MOEN - ALIGN

Two-Handle Adjustable Widespread Lav Faucet with Lift Rod Drain



CHROME	or.
BRUSHED NICKEL (BN)	
BRUSHED GOLD (BG)	
MATTE BLACK (BL)	
MODEL: T6193 / 69000	
Lot# PV-50 Date: JWy 22 , 2021	Room: Ensuite 2 + Ensuite 3/4
Signature:	
Signature:	



#### **MOEN - ARRIS**

Posi-Temp Tub/Shower Faucet with 3 Function Transfer Valve/Trim and Slide Bar with Handshower



CHROME	→ Ensuite 2 +	Ensuite 3/4
BRUSHED	NICKEL (BN)	
MATTE BLA	ACK (BL) - Maste	r Ensuite.


MODEL: TS22003EP / U361CI / UTS23005 / 62320 / 3887EP / A725

Lot# PV- 50	Date: July 22, 2021	Room: Master Ensuite + Ensuite 2, Ensuite 3/4
Signature:	)	
Signature:		



### **MOEN - ARRIS**

Two-Handle Adjustable Widespread Lav Faucet with Drain Assembly

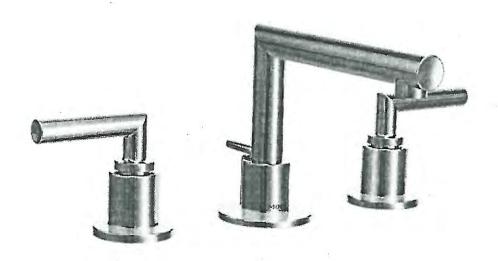


CHROME	
BRUSHED NICKEL (BN)	
MATTE BLACK (BL)	
MODEL: TS43002 / 69000	
Lot# PV-50 Date: July 22, 2021	Room: Master Ensuite + Powder Room
Signature	
Signature:	



### MOEN - ALIGN

Single Freestanding Tub Filler

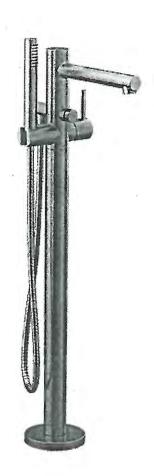

CHROME (EP)		
BRUSHED NICKEL (BN)		
MATTE BLACK (BL)		
BRUSHED GOLD (BG)		
MODEL: 395 / TS50100		
Lot# PV-50 Date: July 22 12021	Room: Master Ensuite	
Signature:		
Signature:	i	
		in .