

**CERAMIC** 

48 28Jul21

2856

37 28Jul21

2856

43 28Jul21

2856 19 28Jul21

2856 20 28Jul21

2856

DisciplineMS.rpt 23feb21

DIRECTION

MASTER ENSUITE: TILE, SHOWER FLOOR, LEVEL 2 - HEX

MASTER ENSUITE: TILE GROUT UPGRADE, SHOWER FLOOR, UPG GROUT

ENGINEERED HARDWOOD, 3/4" THK, WIRE BRUSHED TEXTURE, UVF FINISH

MASTER ENSUITE: TILE GROUT UPGRADE, FLOOR

Invoice Oty Description

#### **CONSTRUCTION SUMMARY**

Lot: 54

Model: 40.02 A VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

Invoice	Qty.	Description
2818	1	ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS
18Jun21 NoCat		
2818	1	**CUSTOM LAYOUT** ENSUITE $3/4$ : INSTALL TWO SEPARATE ENSUITES, EACH WITH FRAMELESS SHOWER - SEE PLAN
18Jun21 NoCat		
2856 39 28Jul21	1	FRONT FOYER: TILE, FLOOR , LEVEL 6 - 24X24" LAID IN STRAIGHT, STACKED PATTERN.
2856 39 28Jul21	1	POWDER ROOM: TILE, FLOOR , LEVEL 6 - 24X24" LAID IN STRAIGHT, STACKED PATTERN.
2856 43 28Jul21	1	ENSUITE 3: TILE, SHOWER FLOOR, LEVEL 2 - HEX
2856 48 28Jul21	1	ENSUITE 3: TILE, WALL, LEVEL 2 - 10X16" LAID HORIZONTAL STACKED
2856 43 28Jul21	1	ENSUITE 4: TILE, SHOWER FLOOR, LEVEL 2 - HEX
2856	1	ENSUITE 4: TILE, WALL, LEVEL 2 - 10X16" LAID HORIZONTAL STACKED

MASTER ENSUITE: TILE, FLOOR, LEVEL 1 - 12X24" LAID IN STRAIGHT, STACKED PATTERN. SEE PLAN FOR TILE

28Jul21 KITCHEN/BREAKFAST: DO NOT SUPPLY / INSTALL CERAMIC - CREDIT
NoCat

KITCHEN + THRU OUT STANDARD AREAS: MAIN HALL, DINING ROOM, GREAT ROOM/BREAKFAST, UPPER HALL, MASTER BEDROOM, BEDROOM 2, BEDROOM 3, BEDROOM 4 - VINTAGE SERIES, 6-1/" WHITE OAK \*\*R + Q\*\*, NSS

Page 1 of 11



Lot: 54

Model: 40.02 A VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### **CERAMIC**

Invoice	Qty.	Description
2994	-1	**CREDIT: FRONT FOYER: TILE, FLOOR LEVEL 6 TO LEVEL 5 FROM PE 2856
09Sep22 NoCat		
2994	-1	**CREDIT: POWDER ROOM: TILE, FLOOR LEVEL 6 TO LEVEL 5 FROM PE 2856
09Sep22 NoCat		
2994	1	MASTER ENSUITE: TILE, FLOOR, UPGRADE TO LEVEL 4 - 12X24" LAID IN STRAIGHT, STACKED PATTERN. SEE PLAN FOR TILE DIRECTION
09Sep22 NoCat		

#### DRYWALL

Invoice	Qty.	Description
2818 72,351 18Jun21 **	2	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME
2818	1	FRONT EXTERIOR: ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE)
18Jun21 NoCat		
2818	1	REAR EXTERIOR: ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE)
18Jun21 NoCat		
2818	1	ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS
18Jun21 NoCat		
2818	1	THRU OUT 2ND FLOOR: INCREASE HEIGHT OF DOOR TO 8FT SECOND FLOOR - PER DOOR
18Jun21 NoCat		
2818	1	**CUSTOM LAYOUT** DINING ROOM: CREATE OPENING FROM DINING ROOM TO GREAT ROOM - APPROX. 6 FOOT WIDE - SEE PLAN
18Jun21 NoCat		
2818	1	**CUSTOM LAYOUT** ENSUITE 3/4: INSTALL TWO SEPARATE ENSUITES, EACH WITH FRAMELESS SHOWER - SEE PLAN
18Jun21 NoCat		
2818	1	**CUSTOM LAYOUT** MASTER ENSUITE: ENCLOSE TOILET AREA - INCLUDES ADDITIONAL EXHAUST FAN AND CEILING LIGHT FIXTURE WITH SEPARATE SWITCH
18Jun21 NoCat		VANITY RESIZED TO ACCOMMODATE

DisciplineMS.rpt 23feb21 Page 2 of 11



Lot: 54

Model: 40.02 A VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### **ELECTRICAL**

ELECT		
Invoice	Qty.	Description
2818 72,351 18Jun21 **	2	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME
2818 72,292 18Jun21	1	FRONT EXTERIOR: ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE)
2818 72,292 18Jun21	1	REAR EXTERIOR: ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE)
2818 72,273 18Jun21	1	KITCHEN: 110V WALL RECEPTACLE ON SEPARATE CIRCUIT - GAS FIRED APPLIANCE - FOR AUX. EQUIPMENT - NOT A STOVE PLUG
2818 72,306 18Jun21	1	KITCHEN: RELOCATE FRIDGE FROM STANDARD LOCATION - APPROX. "NEW" LOCATION AS PER ATTACHED DRAWINGS
2818 72,665 18Jun21	1	KITCHEN: 240V WALL RECEPTACLE ON SEPARATE CIRCUIT FOR BUILT-IN OVEN - APPROX. LOCATION AS PER ATTACHED DRAWINGS
2818 72,272 18Jun21	1	KITCHEN: 110V WALL RECEPTACLE ON SEPARATE CIRCUIT - FOR MICROWAVE - MICROWAVE NOT INCLUDED
2818 72,268 18Jun21	1	BREAKFAST: INTERIOR WALL OUTLET: 110V WALL INTERIOR RECEPTACLE ON EXISTING CIRCUIT - SEE PLAN
2818 72,307 18Jun21	1	KITCHEN: FIXTURE: RELOCATE STANDARD CEILING MOUNT FIXTURE TO APPROX. CENTRE ON CEILING ABOVE KITCHEN ISLAND
2818 72,289 18Jun21	6	KITCHEN: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH - INCLUDES ONE SWITCH INCLUDED IN APS
2818 72,289 18Jun21	2	KITCHEN: 4" E/S LED INTERIOR POT LIGHT - GROUND FLOOR - EACH
2818 72,307 18Jun21	1	UPPER HALL: FIXTURE: RELOCATE STANDARD CEILING MOUNT FIXTURE TO APPROX. CENTRE ON CEILING AT OTB
2818 72,307 18Jun21	1	MASTER ENSUITE: FIXTURE: RELOCATE STANDARD CEILING MOUNT FIXTURE TO APPROX. CENTRE ABOVE FREE STANDING TUB

DisciplineMS.rpt 23feb21



Lot: 54

Model: 40.02 A VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### **ELECTRICAL**

Invoice	Qty.	Description
2818	1	PINE VALLEY MODEL 40.02 VALLEYVIEW ELEV A - 9 FOOT BASEMENT CEILING HEIGHT IN LIEU OF STANDARD 8 FOOT CEILING.
18Jun21 NoCat		
2818	1	KITCHEN/BREAKFAST: INSTALL TALLER GARDEN DOOR INCLUDING SIDE LITE(S) - APPROX. 96"H
18Jun21 NoCat		
2818	1	THRU OUT 2ND FLOOR: INCREASE HEIGHT OF DOOR TO 8FT SECOND FLOOR - PER DOOR
18Jun21 NoCat		
2818	1	**CUSTOM LAYOUT** DINING ROOM: CREATE OPENING FROM DINING ROOM TO GREAT ROOM - APPROX. 6 FOOT WIDE - SEE PLAN
18Jun21 NoCat		
2818	1	**CUSTOM LAYOUT** ENSUITE 3/4: INSTALL TWO SEPARATE ENSUITES, EACH WITH FRAMELESS SHOWER - SEE PLAN
18Jun21 NoCat		
2818	1	**CUSTOM LAYOUT** MASTER ENSUITE: ENCLOSE TOILET AREA - INCLUDES ADDITIONAL EXHAUST FAN AND CEILING LIGHT FIXTURE WITH SEPARATE SWITCH
18Jun21 NoCat		VANITY RESIZED TO ACCOMMODATE
2856 72,269	1	KITCHEN: INTERIOR WALL OUTLET: 110V WALL INTERIOR RECEPTACLE ON SEPARATE CIRCUIT - FOR FREEZER
28Jul21		
2856	1	KITCHEN: UPGRADE FULL HEIGHT BACKSPLASH - LEVEL 3
28Jul21 NoCat		

#### **EXTERIOR DOORS**

		DOORS	
Invoice	Qty.	Description	
2818	1	KITCHEN/BREAKFAST: INSTALL TALLER GARDEN DOOR INCLUDING SIDE LITE(S) - APPROX. 96"H	
18Jun21 NoCat			

#### **FORM - FORMING**

Invoice	Qty.	Description
2818	2	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME
72,351		
18Jun21 **		

#### **FORMING**

I OKWII.	110	
Invoice	Qty.	Description
2818 72,193 18Jun21	1 1	PINE VALLEY MODEL 40.02 VALLEYVIEW ELEV A - 9 FOOT BASEMENT CEILING HEIGHT IN LIEU OF STANDARD 8 FOOT CEILING.

DisciplineMS.rpt 23feb21 Page 4 of 11



Lot: 54

Model: 40.02 A VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### **FRAMING**

Invoice	Qty.	Description
2818	1	**CUSTOM LAYOUT** DINING ROOM: CREATE OPENING FROM DINING ROOM TO GREAT ROOM - APPROX. 6 FOOT WIDE - SEE PLAN
18Jun21 NoCat		
2818	1	**CUSTOM LAYOUT** ENSUITE 3/4: INSTALL TWO SEPARATE ENSUITES, EACH WITH FRAMELESS SHOWER - SEE PLAN
18Jun21 NoCat		**THIS IS A DEPOSIT TO MOVE FORWARD AND COMPLETE DRAWINGS. COMPLETE PRICING TO FOLLOW, DEPOSIT WILL BE APPLIED TO CUSTOM PRICE**
2818	1	**CUSTOM LAYOUT** MASTER ENSUITE: ENCLOSE TOILET AREA - INCLUDES ADDITIONAL EXHAUST FAN AND CEILING LIGHT FIXTURE WITH SEPARATE SWITCH
18Jun21 NoCat		VANITY RESIZED TO ACCOMMODATE
2818	1	FRONT EXTERIOR: ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE)
18Jun21 NoCat		
2818	1	KITCHEN/BREAKFAST: INSTALL TALLER GARDEN DOOR INCLUDING SIDE LITE(S) - APPROX. 96"H
18Jun21 NoCat		
2818	1	REAR EXTERIOR: ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE)
18Jun21 NoCat		
2818	1	ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS
18Jun21 NoCat		
2818	1	THRU OUT 2ND FLOOR: INCREASE HEIGHT OF DOOR TO 8FT SECOND FLOOR - PER DOOR
18Jun21 NoCat		
2884	1	ENSUITE 3/4: INSTALL 2 SEPARATE ENSUITES
26Aug21 NoCat		(balance of item 28 pe.2818)

## GLASS AND MIRROR

GLASS.	GLASS AND MIRROR		
Invoice	Qty.	Description	
2818	1	ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS	
18Jun21 NoCat			
2818	_	**CUSTOM LAYOUT** ENSUITE 3/4: INSTALL TWO SEPARATE ENSUITES, EACH WITH FRAMELESS SHOWER - SEE PLAN	
18Jun21 NoCat			

DisciplineMS.rpt 23feb21 Page 5 of 11



Lot: 54

Model: 40.02 A VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### **GRANITE MARBLE QUARTZ**

		TABLE QUARTE
Invoice	Qty.	Description
2818	1	ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS
18Jun21 NoCat		
2818	1	**CUSTOM LAYOUT** ENSUITE $3/4$ : INSTALL TWO SEPARATE ENSUITES, EACH WITH FRAMELESS SHOWER - SEE PLAN
18Jun21 NoCat		
2856	1	KITCHEN: UPGRADE QUARTZ COUNTERTOP - LEVEL 3
28Jul21 NoCat		
2856	1	KITCHEN: UPGRADE FULL HEIGHT BACKSPLASH - LEVEL 3
28Jul21 NoCat		
2856	1	ENSUITE 3: UPGRADE 2 QUARTZ COUNTER
28Jul21 NoCat		
2856	1	ENSUITE 4: UPGRADE 2 QUARTZ COUNTER
28Jul21 NoCat		

## II A DDWOOD

HARDWOOD		
Invoice	Qty.	Description
2818	1	**CUSTOM LAYOUT** DINING ROOM: CREATE OPENING FROM DINING ROOM TO GREAT ROOM - APPROX. 6 FOOT WIDE - SEE PLAN
18Jun21 NoCat		
2856	1	KITCHEN + THRU OUT STANDARD AREAS: MAIN HALL, DINING ROOM, GREAT ROOM/BREAKFAST, UPPER HALL,
7		MASTER BEDROOM, BEDROOM 2, BEDROOM 3, BEDROOM 4 - VINTAGE SERIES, 6-1/" WHITE OAK **R + Q**, NSS ENGINEERED HARDWOOD, 3/4" THK, WIRE BRUSHED TEXTURE, UVF FINISH
28Jul21		ENGLIDENCE TEMES TO COE, S. C. TIME, WHILE ENCORED TEMESTEE, C. VI THINGIT
1		

DisciplineMS.rpt 23feb21 Page 6 of 11



Lot: 54

Model: 40.02 A VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

H	17	٨	•	٦
	v	H		

Invoice	Qty.	Description
2818 72,238 18Jun21	1	3.5 TON AC - WITH LOW VOLTAGE WIRING & WALL BRACKETS (13ACX)
2818	1	GARAGE: INSTALL COMPLETE CENTRAL VAC SYSTEM - CYCLOVAC 215
18Jun21 NoCat		
2818 72,224	1	KITCHEN: GAS LINE ROUGH-IN - MAIN FLOOR FOR APPLIANCE - SEE PLAN FOR APPROX. LOCATION
18Jun21		FINAL LOCATION, ORIENTATION AND CONNECTION TO BE COMPLETED BY A LICENSED GAS FITTER AND ARRANGED BY HOME OWNER AFTER CLOSING AT THEIR OWN EXPENSE AND WARRANTY
2818 72,217	1	KITCHEN: UPGRADE TO 8" DUCT (EXTERIOR WALL) IN LIEU OF STANDARD OFFERING
18Jun21		
2818	1	PINE VALLEY MODEL 40.02 VALLEYVIEW ELEV A - 9 FOOT BASEMENT CEILING HEIGHT IN LIEU OF STANDARD 8 FOOT CEILING.
18Jun21 NoCat		
2818	1	3.5 TON AC - WITH LOW VOLTAGE WIRING & WALL BRACKETS (13ACX)
18Jun21 ** NoCat		
2818	1	ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS
18Jun21 NoCat		
2818	1	**CUSTOM LAYOUT** MASTER ENSUITE: ENCLOSE TOILET AREA - INCLUDES ADDITIONAL EXHAUST FAN AND CEILING LIGHT FIXTURE WITH SEPARATE SWITCH
18Jun21 NoCat		VANITY RESIZED TO ACCOMMODATE

INTERI	INTERIOR TRIM /MOULDINGS		
Invoice	Qty.	Description	
2818 72,351	2	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME	
18Jun21 **			

DisciplineMS.rpt 23feb21 Page 7 of 11



Lot: 54

Model: 40.02 A VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### INTERIOR TRIM AND DOORS

Invoice	Qty.	Description
2818 72,644 18Jun21	17	THRU OUT 2ND FLOOR: INCREASE HEIGHT OF DOOR TO 8FT SECOND FLOOR - PER DOOR
2818	1	KITCHEN/BREAKFAST: INSTALL TALLER GARDEN DOOR INCLUDING SIDE LITE(S) - APPROX. 96"H
18Jun21 NoCat		
2818	1	ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS
18Jun21 NoCat		
2818	1	**CUSTOM LAYOUT** ENSUITE 3/4: INSTALL TWO SEPARATE ENSUITES, EACH WITH FRAMELESS SHOWER - SEE PLAN
18Jun21 NoCat		
2818	1	**CUSTOM LAYOUT** MASTER ENSUITE: ENCLOSE TOILET AREA - INCLUDES ADDITIONAL EXHAUST FAN AND CEILING LIGHT FIXTURE WITH SEPARATE SWITCH
18Jun21 NoCat		VANITY RESIZED TO ACCOMMODATE
2856 100,670 28Jul21	1	THRU OUT; UPGRADE 3 1/2" STEP BEVEL CASING, 7 1/4" BASE BOARD - UPGRADE
2856 155,356	1	THRU OUT: UPGRADE INTERIOR DOORS TO LINCOLN PARK,
28Jul21		UPGRADE

DisciplineMS.rpt 23feb21 Page 8 of 11



Lot: 54

Model: 40.02 A VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

## KITCHEN AND BATH CABINETRY

Invoice	Qty.	Description
2818	1	KITCHEN: RELOCATE FRIDGE FROM STANDARD LOCATION - APPROX. "NEW" LOCATION AS PER ATTACHED DRAWINGS
18Jun21 NoCat		
2818	1	ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS
18Jun21 NoCat		
2818	1	KITCHEN: UPGRADE TO 8" DUCT (EXTERIOR WALL) IN LIEU OF STANDARD OFFERING
18Jun21 NoCat		
2818	1	**CUSTOM LAYOUT** ENSUITE 3/4: INSTALL TWO SEPARATE ENSUITES, EACH WITH FRAMELESS SHOWER - SEE PLAN
18Jun21 NoCat		
2856	1	THRU OUT: SEE ATTACHED CABINETRY SCHEDULE
28Jul21 NoCat		
2856	1	KITCHEN: UPGRADE FULL HEIGHT BACKSPLASH - LEVEL 3
28Jul21 NoCat		

#### **MASONRY**

MISONI			
Invoice	Qty.	Description	
2818	1	FRONT EXTERIOR: ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE)	
18Jun21 NoCat			
2818	1	KITCHEN/BREAKFAST: INSTALL TALLER GARDEN DOOR INCLUDING SIDE LITE(S) - APPROX. 96"H	
18Jun21 NoCat			
2818	1	REAR EXTERIOR: ADDITIONAL EXTERIOR COACH LIGHT ON SAME SWITCH (BUILDERS STANDARD FIXTURE)	
18Jun21 NoCat			

#### **NETWORK AND WIRING**

Invoice	Qty.	Description
2818 72,264 18Jun21	1	LAUNDRY ROOM: ROUGH - IN FOR EXTRA SECURITY KEY PAD
2818 72,260 18Jun21	1	CONDUIT PIPE - FROM ATTIC TO BASEMENT - BY ELECTRICAL PANEL IN BASEMENT TO APPROX. CENTRE IN ATTIC

DisciplineMS.rpt 23feb21 Page 9 of 11



Lot: 54

Model: 40.02 A VALLEYVIEW

Project/Phase: Pine Valley Forevergreen / 1

$\mathbf{n}$	•	NΤ	П
$\boldsymbol{\nu}$	Λ.	INI	

Invoice	Qty.	Description
2818	1	KITCHEN/BREAKFAST: INSTALL TALLER GARDEN DOOR INCLUDING SIDE LITE(S) - APPROX. 96"H
18Jun21 NoCat		
2818	1	ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS
18Jun21 NoCat		
2818	1	THRU OUT 2ND FLOOR: INCREASE HEIGHT OF DOOR TO 8FT SECOND FLOOR - PER DOOR
18Jun21 NoCat		
2818	1	**CUSTOM LAYOUT** DINING ROOM: CREATE OPENING FROM DINING ROOM TO GREAT ROOM - APPROX. 6 FOOT WIDE - SEE PLAN
18Jun21 NoCat		
2818	1	**CUSTOM LAYOUT** ENSUITE 3/4: INSTALL TWO SEPARATE ENSUITES, EACH WITH FRAMELESS SHOWER - SEE PLAN
18Jun21 NoCat		
2856	2	MAIN STAIRS: 2ND FLOOR TO BASEMENT: STAIN STAIRS AND LANDINGS
28Jul21 NoCat		WILL NOT MATCH HARDWOOD IN COLOUR, SPECIES OR TEXTURE

#### **PAINTING**

Invoice	Qty.	Description

	2818	2	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME
	72,351		
1	18Jun21 *		

#### PANL - FRAMING

I ANL -	TANE-TRAVING		
Invoice	Qty.	Description	
2818 72,351	2	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME	
18Jun21 **			

DisciplineMS.rpt 23feb21 Page 10 of 11



Lot: 54

Model: 40.02 A VALLEYVIEW

**Project/Phase: Pine Valley Forevergreen / 1** 

#### **PLUMBING**

Invoice	Qty.	Description
2818	1	KITCHEN: RELOCATE KITCHEN SINK TO BE APPROX. CENTERED WITHIN ISLAND
18Jun21 NoCat		
2818 72,332 18Jun21	1	KITCHEN: ROUGH-IN 1/4" COLD WATER LINE TO FRIDGE
2818 72,350 18Jun21	1	ENSUITE 2: REPLACE STANDARD TUB TO FRAMELESS GLASS SHOWER ENCLOSURE WITH GLASS SHOWER DOOR - COMPLETE WITH BUILDERS STANDARD OFFERINGS
2818 72,349 18Jun21	1	MASTER ENSUITE: RELOCATE STANDARD FREE STANDING TUB TO APPROX. CENTRE WITH REAR WINDOW - SEE PLAN
2818 18Jun21 NoCat	1	PINE VALLEY MODEL 40.02 VALLEYVIEW ELEV A - 9 FOOT BASEMENT CEILING HEIGHT IN LIEU OF STANDARD 8 FOOT CEILING.
2818 18Jun21 NoCat	1	**CUSTOM LAYOUT** ENSUITE 3/4: INSTALL TWO SEPARATE ENSUITES, EACH WITH FRAMELESS SHOWER - SEE PLAN
2856 28Jul21 NoCat	1	KITCHEN: UPGRADE SINK
2856 72,332 28Jul21	1	**REVISED FROM STRUCTURAL ORDER PE# 2818** KITCHEN: ROUGH-IN 1/4" COLD WATER LINE TO FREEZER INSTEAD OF FRIDGE

#### **ROUGH CARPENTRY**

NOCOL	COUGH CHILD LIVINI			
Invoice	Qty.	Description		
2818	2	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME		
72,351			ĺ	
18Jun21 **				

#### STAIRS AND RAILINGS

Invoice	Qty.	Description
2970	1	MAIN STAIRS: UPGRADE - EUROLINE (ALL PLAIN) PICKET, 3" HALF-ROUND W/V-GROOVE HANDRAIL, 3 1/2" ALL SQUARE POST WITH PYRAMID TOP POST CAP. PACKAGE A-2.
14Apr22 NoCat		

#### WINDOWS - BASEMENT

Invoice	Qty.	Description
2818	2	BASEMENT WINDOWS - UPGRADE BASEMENT WINDOW SIZE TO 30 " X 24" - 8" FRAME
72,351		
18Jun21 **		

DisciplineMS.rpt 23feb21 Page 11 of 11

#### GOLDPARI INTERIOR COLOUR SCHEME \*\*\* NOTE: This is not an approved document. Document must be locked \*\*\* Scheduled Closing Date: December 2, 2021 Purchasers: KAMSHAD TOURI & MAHTAB SABOURI Property: 54 of Plan -Telephone Res. / Bus: / Project: Pine Valley Forevergreen - Phase 1 Decor Advisor: Amanda Ceresino Model and Elevation: 40.02 A VALLEYVIEW Layout Changes: Yes No Sketch Attached: Yes No Exterior Colour Scheme: 1. Cabinetry Style and Colour Counter Hardware Kitchen / Breakfast \*2-tone \*Quartz: Desert Silver attachd Laundry Room Bowery 'Fabro' P-Lam: White attachd Powder Room \*Broadway II HiGloss 'Taupe' Quartz: 'Ice Snow' attachd Ensuite 4 Bowery 'Pewter' \*Quartz: White Shimmer attachd Master Ensuite Bowery 'Ello' Bathroom Quartz: Ice Snow attachd Second Ensuite Bathroom (If Applicable) Bowery 'Tan' Quartz: Nordic Loft attachd Ensuite 3 Modena 'Classic White' \*Quartz: White Shimmer attachd Comment KITCHEN: Uppers + Island: Bowery 'Fabro' / Bases and Tall Pantries: \*Manhattan 'Oyster' 2. Floor Tile Selection REVISED: SEPT. 7, 2000. Entrance Vestibule \*24x24" Reve 'Neige' 04 x 04 Himalaya White polished Main Hall Kitchen / Breakfast see hardwood Laundry Room 13x13" Costa 'White' Powder Room \*24x24" Reve 'Neige' at xat Himalaya Winte Polished **Ensuite 4** 13x13 New Byzantine 'Azzuro Blue' Master Ensuite \*12x24" Land 'Anthracite' + charcoal grout IOXOH FUSION BLOCK MANTE **Bathroom** Second Ensuite 13x13" Costa 'White' matte Bathroom (If Applicable) Lower Landing 13x13" Costa 'White' (basement foyer) (If Applicable) Ensuite 3 13x13" New Byzantine 'Azzuro Blue' Comment ENSUITE 4 SHOWER FLOOR: \*Quebec Hex 'Black' // ENSUITE 2 SHOWER FLOOR: 2x2" Standard 'White' // ENSUITE 3 SHOWER FLOOR: \*Quebec Hex 'Black' // MASTER ENSUITE SHOWER FLOOR: \*Quebec Hex 'Black' // MASTER ENSUITE SHOWER FLOOR: \*Quebec Hex 'Black' matte + charcoal grout Quebec Hex

		N₹.	3 2022.
. Wall Tile			
Trail IIIO	Selection	Listello/Inserts	Describe
Ensuite 3	*10x16" Duomo 'Blanco' matte	Yes No	
Master Ensuite Bathroom			
Tub Deck		Yes No	
Shower Stall	8x10" Venus 'Anthracite'	Yes No	
Bathroom Walls	EXDO MEDIEM DIGHT	Yes No	
Second Ensuite Bathroom (If Applicable)	8x10" Venus 'Grey'	Yes No	
Ensuite 4	*10x16" Duomo 'Blanco' matte	Yes No	
Kitchen Backsplash	Yes No	Backsplash	Behind Fridge
Comment	same as quartz countertop		
		Revised	(MX)

C600000

Page 1 of 4

GOLDPARK INTERIOR COLOUR SCHEME \*\*\* NOTE: This is not an approved document. Document must be locked \*\*\* Scheduled Closing Date: December 2, 2021 Purchasers: KAMSHAD TOURI & MAHTAB SABOURI Property: 54 of Plan -Telephone Res. / Bus: / Project: Pine Valley Forevergreen - Phase 1 Decor Advisor: Amanda Ceresino Model and Elevation: 40.02 A VALLEYVIEW 4. Plumbing Fixtures Second Ensuite Powder Room Master Ensuite Bathroom Other Room - Specify Other Washroom Comment 5. Hardwood Flooring Type and Stain Type and Stain Main Hall **Upper Landing** Kitchen / Breakfast \*3/4x61/2" wht oak R+Q 'Atlantis' Upper Hall Living Room Master Bedroom **Dining Room** Bedroom #2 Family Room Bedroom #3 Den/Library Bedroom #4 **Entrance Vestibule** Bedroom #5 Lower Landing Other Room - Specify (If Applicable) \*3/4x61/2" wht oak R+Q 'Atlantis' thru out standard areas Comment 6. Carpeting Upgrade Description **Ground Floor** Second Floor Type Area Upgrade Underpad Capped Runner - \*Upgrade Carpet on Stairs Comment 7. Fireplace Living Room Family Room Other Room - Specify Purchased As Per Plan N/A Purchased As Per Plan N/A Purchased As Per Plan N/A 0 0  $\circ$ 0 0 Fireplace Type Standard Gas Mantle Type Mediterranean Colour / Stain Arctic White N/A Surround Hearth None Comment REVISED 890F.612020 eee attach

#### GOLD PARK WORTH MORE INTERIOR COLOUR SCHEME \*\*\* NOTE: This is not an approved document. Document must be locked \*\*\* Scheduled Closing Date: December 2, 2021 KAMSHAD TOURI & MAHTAB SABOURI Purchasers: Property: 54 of Plan -Telephone Res. / Bus: / Project: Pine Valley Forevergreen - Phase 1 Decor Advisor: Amanda Ceresino Model and Elevation: 40.02 A VALLEYVIEW 8. Trim Carpentry Interior Doors \*Lincoln Park Front Door Glass Inserts Standard Door Handles Standard Interior Trim \*Board 4 Comment 9. Plaster Mouldings and Medallions Standard Throughout O Yes O No **Entrance Vestibule** Kitchen/Breakfast Main Hall Den/Library Living Room Lower Landing Dining Room Other Room - Specify Family Room Comment 10. Railings and Spindles Railing Package Standard Package 2 Railing Colour \*Mirage Rock Cliff Spindle Colour \*Mirage Rock Cliff Stringer / Riser \*Mirage Rock Cliff Treads \*Mirage Rock Cliff Oak Stairs O N/A Yes O No Comment 11. Wall Paint / Ceilings Throughout Finished Areas Warm Grey Trim Paint White **Smooth Ceilings Ground Floor** Second Floor Note

Comment

GOLDPAR	K	INTERIOR COLOUR SCHEME	
WORTH	MORE" *** NOTE: This is	not an approved document. Document must be locke	d ***
Purchasers:	KAMSHAD TOURI & MAHT	Scheduled Closing Date: December 2, 2021  AB SABOURI Property 54 of Disc.	
Telephone Res. / Bus:		AB SABOURI Property: 54 of Plan - Project: Pine Valley Forevergreen - Phase 1	
Decor Advisor:	Amanda Ceresino	Model and Elevation: 40.02 A VALLEYVIEW	
12. Electrical			
Hood Fan Wh	ite Stainless N/A	Above Kitchen Cabinet Light Yes	
Standard Appliance	s	Below Kitchen Cabinet Light Yes	No
Over The Range Mic	crowave		
Chimney Style Fan			
Comment			
13. Heating and A	ir Conditioning		
Air Conditioning	yes	Gas Provisions Stove yes	
Gas Provisions Drye	none none	Gas Provisions Barbecue std	
Comment			
15. Disclaimers ar			
		selection, but not necessarily identical due to variances in manufacturing.  In the day of the day	
3) The Purchaser acknowle	estenting on a state of the control of the control of the control of the control of the state of the control o	tion form is signed and dated, no further changes will be permitted other	
The Purchaser acknowled	edges reading and accepting the "Go	old Park Homes Decor Centre Disclaimers" form. This document contains	
other miscellaneous dis	sclaimers. ion is final and approved by:		
		Revised Sept. 6, 3003	
Signature: N	Date.	uly 14, 2021 escalbach	
	V	Page 4 of 4	1

#### **Yolande Somerville**

From:

Mahtab Sabouri <mahtabsabouri@gmail.com>

Sent:

September 6, 2022 3:38 PM

To:

Yolande Somerville

Cc:

Kamshad Touri

Subject:

Re: PV-54 Floor Tile Reselection \*\*RESPONSE REQUIRED\*\*

Hi Chanel,

This selection "24x24 Himalaya White" is confirmed.

Regards,

Mahtab

On Tue, Sep 6, 2022 at 1:01 PM Yolande Somerville < <a href="mailto:ysomerville@goldparkhomes.com">ysomerville@goldparkhomes.com</a>> wrote:

Good afternoon Mahtab,

It was a pleasure having you in the studio today.

The image below is the tile reselection you made today for the floor tile in the Powder Room and Entrance.



Please respond back to this email to confirm your reselection for the 24x24 Himalaya White.


Thank you,

Chanel

Yolande Somerville	
From: Sent: To: Cc: Subject:	Kamshad Touri <kamshad@gmail.com> September 8, 2022 11:13 PM Yolande Somerville Mahtab Sabouri Re: PV-54 Master Ensuite Shower Floor **Reselection**</kamshad@gmail.com>
Follow Up Flag: Flag Status:	Follow up Flagged
like Gold park that other option, so we guys and we need soon as possible.	o lie horizontally.  ower floor, Mahtab was there just recently and it is so unfortunate for a great company t doesn't know what is in their inventory. first of all you did not provide any what will happen if i don't approve it? Secondly, we are not as professional as you I to see the options, texture and colour to be able to decide. We like this to be done as We both are working with very busy schedules. We try to accommodate as much but it th recurrent short notices. I would like to come and see the option before making any
On Thu, Sep 8, 2022 at 2:1	17 PM Yolande Somerville < <u>ysomerville@goldparkhomes.com</u> > wrote:
Good afternoon Mahtab	and Kamshad,
The tilers are working on vertically or horizontally	your master ensuite and would like to know if you'd like th <mark>e shower wall tiles</mark> t <b>o be laid ir</b>
Also, the Quebec Hex Da	rk Grey tiles selected for the shower floor are not available.

I took a look, and the **Quebec Hex Black Matte** is available.

Please see below for a picture of the new layout for your approval.

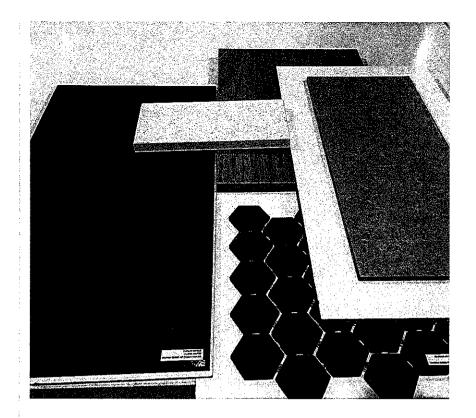

Please let me know as soon as you can. The tilers are waiting for a response back.

Thank you,

Chanel

#### **Yolande Somerville**

From:

Mahtab Sabouri < mahtabsabouri@gmail.com>

Sent:

September 6, 2022 4:40 PM

To:

Yolande Somerville

Cc:

Kamshad Touri

Subject:

Re: PV-54 Floor Tile Reselection \*\*RESPONSE REQUIRED\*\*

Hi Chanel,

All is correct.

Thank you so much.

On Tue, Sep 6, 2022 at 4:37 PM Yolande Somerville < <a href="mailto:ysomerville@goldparkhomes.com">ysomerville@goldparkhomes.com</a>> wrote:

Good afternoon Mahtab,

Thank you for your response.


The image did not send correctly.

To reconfirm you will be proceeding with the following changes (image is below):

Floor Tile – 12x24 Fusion Black Matte

Shower Floor Tile - Quebec Hex Dark Grey

Shower Wall Tile – Madison Light Grey Matte

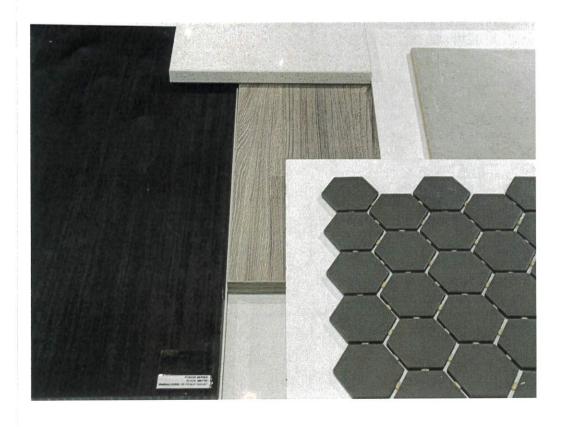




#### PV - 54 Cabinetry Schedule

ROOM	DESCRIPTION	PRICE	QTY	TOTA
KITCHEN	STANDARD UPPERS AND ISLAND - BOWERY 'FABRO'		1	
	UPGRADE BASES AND TALL (PANTRIES + FRIDGE + WALL OVEN) FROM SERIES 2 TO SERIES 3 -			
	MANHATTAN 'OYSTER'		1	
	FLAT FURRING IN LIEU OF CROWN		1	
	ADD CABINET ABOVE RANGETOP FOR HOOD FAN INSERT		1	
	ADJUST BASE CABINETRY FOR 36" RANGETOP (N/C)		1	
	ADD POTS AND PANS DRAWERS BELOW COOKTOP		1	
	CONVERT BASE CABINETS TO BASE POTS AND PANS DRAWERS		2	
	CONVERT CABINETRY TO TALL DEEP PANTRY UNIT - 30"W 2 DOOR		1	
	CONVERT CABINETRY TO TALL DEEP BUILT IN OVEN UNIT WITH DRAWER BELOW		1	
	ADD SPICE PULL OUT ACCESSORY TO BASE CABINET		1	
	RETURN TRIP FOR HARDWOOD		1	
	*NOTE: NO HARDWARE/NO HOLES THRU OUT - PURCHASER IS RESPONSIBLE FOR THEIR OWN			
	HARDWARE AFTER CLOSING AT THEIR OWN EXPENSE AND WARRANTY*		1	
	ADD TWO-BIN RECYCLE CENTRE TO ISLAND		1	
POWDER ROOM	UPGRADE FROM SERIES 2 TO SERIES 3 - BROADWAY II HI-GLOSS 'TAUPE'		1	
	CABINE	TRY TOTAL:	Ve. 15 1	


OT#:7V-54 DATE: July 27, 2021	
IGNATURE:	
GNATURE:	

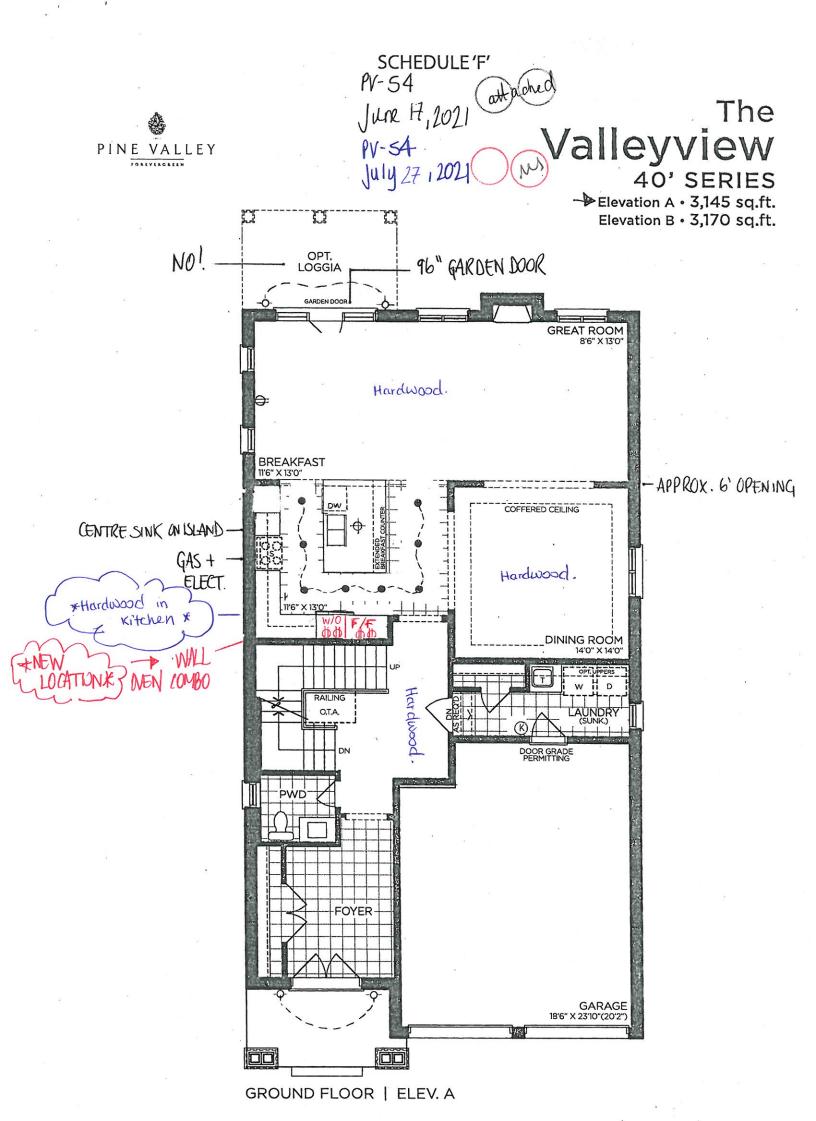


**VENDOR PURCHASER PURCHASER** 

## GOLDPARK

notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4002

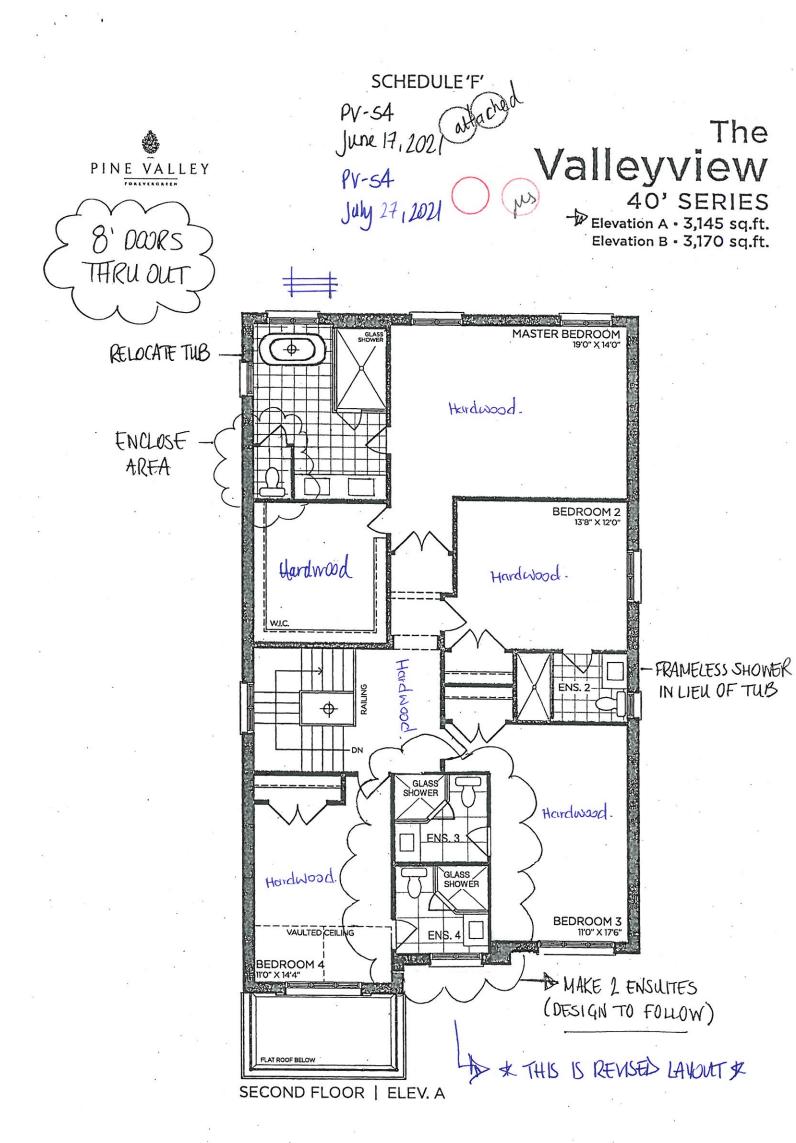





## GOLDPARK

WORTH MORI

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased, E. & O.E. 4002

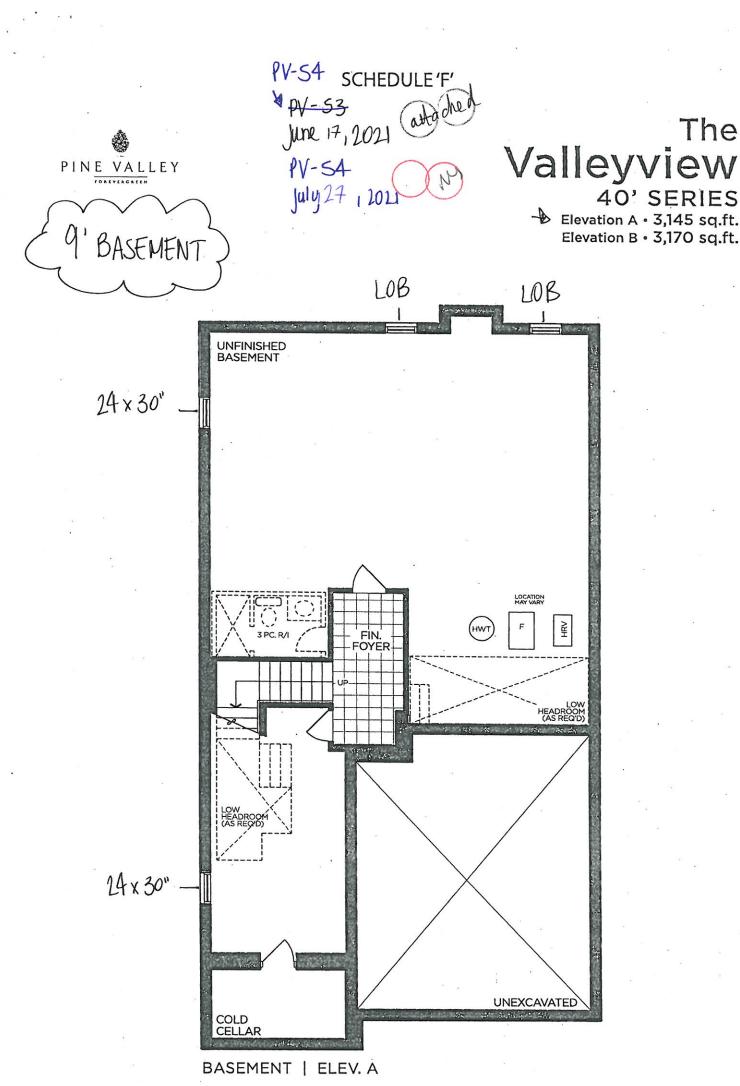




# GOLDPARK

The

Prices, figures, illustrations, sizes, features and finishes are subject to change without notice. Areas and dimensions are approximate and actual usable floor space may vary from the stated area. Layout may be reverse of the unit purchased. E. & O.E. 4002

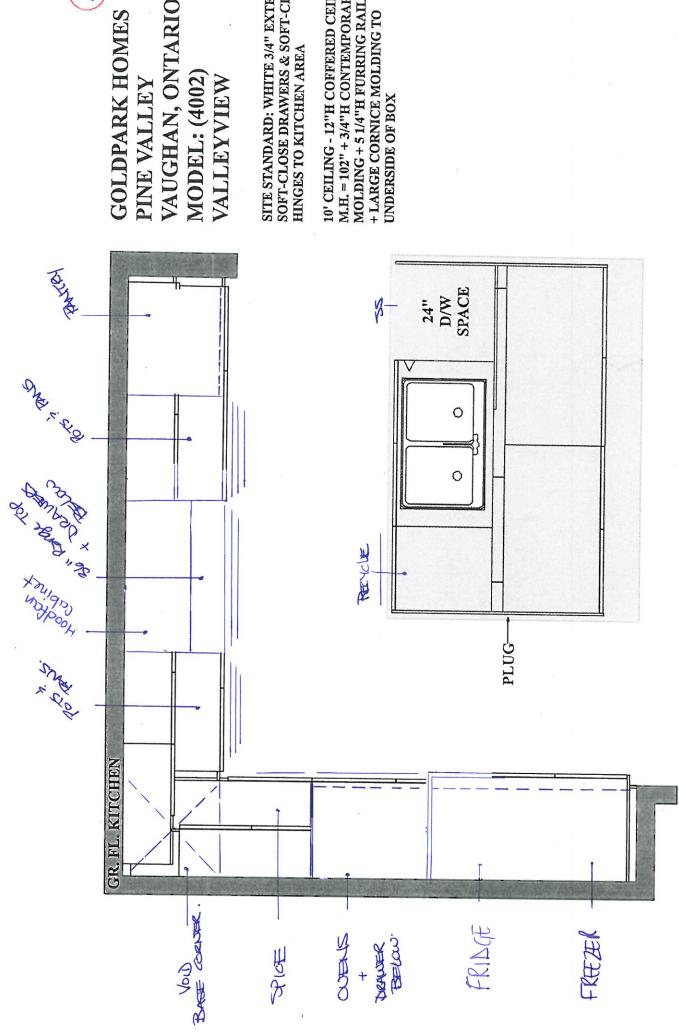

July 27 2021 为上出 GOLDPARK HOMES PINE VALLEY

SITE STANDARD: WHITE 3/4" EXTENSION SOFT-CLOSE DRAWERS & SOFT-CLOSE HINGES TO KITCHEN AREA

10' CEILING - 12"H COFFERED CEILING -M.H. = 102" + 3/4"H CONTEMPORARY MOLDING + 5 1/4"H FURRING RAIL + LARGE CORNICE MOLDING TO UNDERSIDE OF BOX

PLAN VIEW


) P5-54. July 27 Z62,

# VAUGHAN, ONTARIO GOLDPARK HOMES PINE VALLEY

MODEL: (4002) VALLEYVIEW


SITE STANDARD: WHITE 3/4" EXTENSION SOFT-CLOSE DRAWERS & STANDARD SLAM DOOR HINGES TO VANITIES

ONE TOP DRAWER WHERE POSSIBLE THROUGHOUT EACH VANITY, ONE BANK OF DRAWERS WHERE POSSIBLE THROUGHOUT EACH MASTER ENSUITE VANITY





GR. FL. POWDER RM


1001





2ND FL. BED 3 & 4 BATH











\*



## STONE COUNTERTOP EDGE PROFILES

	STANDARD 2CM EASED EDGE	LOCATION:  * thru - nut*
	UPGRADE 3CM EASED EDGE	LOCATION:
	UPGRADE 4CM MITRED EDGE	LOCATION:
	UPGRADE 2CM OGEE EDGE	LOCATION:
GNATURE:	DATE: JWY 27, 202	




H001-02	H001-03	H001-04
H009-03	H009-09	TOUCH-LATCH
H011-03	H011-05	H011-06
H033-01  LAUNAY ROOM  DISCLAIMER: NO HARDWARE OR HOLES THRU-OUT: HOME	H039-03	* thru-out *  (except Laundry)
VN EXPENSE AND WARRANTY.	- The management of the management	THEIR OWN HARDWARE AFTER CLOSING AT THEIR
LOT # PV-54 DATE:	July 27, 2021	
SIGNATURE:		
SIGNATURE:		



BLANCO - QUATRUS R15 U 2 Stainless Steel - Undermount 32" x 18"








Stainless Steel


MODEL 401519 Stainless Steel

Lot# PV-54	
Room: Kitchen	Signature:
Date: July 27 (702)	Signature:

## BATHROOM ACCESSORIES







Tissue Holder Mason - Chrome


Towel Bar Mason - Chrome

Please select one of the following:	
INSTALL STANDARD BATHROOM ACCESSORIES THRU OUT (tissue holder + towel bar) *location as per vendors discretion*	
*DO NOT* INSTALL STANDARD BATHROOM ACCESSORIES THRU OUT *tissue holder + towel bar will not be provided*	• • • • • • • • • • • • • • • • • • •
LOT # PV-54 DATE: July 24, 12021	
SIGNATURE:	
SIGNATURE:	·



#### SDK106

Shower Door Knob



SDK106 Shower Door Knob


1-3/16" dia. Contemporary Style

**CHROME** 

Lot# PV-54	Date: July 27, 2021	Room: * thru - out *	
Signature:			
Signature:			



## LINCOLN PARK DOOR



10	CAT	101	
1 ( )	CAT	11 11	١1.
	COL	101	V .

\* thiu-out \*

LOT# PV-5H	DATE: July 24, 2021	
SIGNATURE:		
SIGNATURE:		




Project:	Pine Valley	9			Lot: 5
					a a
Purchaser	(s): Kamshad	Touri)	- Mahtab	Sabouri	
			***		
Standard H	lood Fan Deletion	i ,	,		
We acknow Do not supp	rledge that the booly, install and/or	uilder's stan credit. We	dard hood fan will install our	will not be in own hood fa	stalled. n after closing
Signature:	(ms)				
Signature:					
	11 00 4001	*			
Date:	July 27, 2021		•		ē



#### DWHD770WFP SAPPHIRE® 7-PROGRAM DISHWASHER

PROFESSIONAL SERIES HANDLE





Also Available In: DWHD770WFM - Flat Stainless Steel Panel with Masterpiece® Series Handle DWHD770WPR - Custom Panel

#### FEATURES & BENEFITS

- $\bigstar$  StarDry<sup>™</sup> No one dries better. Star Dry with Zeolite: the ultra-powerful program that dries dishes better so place settings, glassware, and even sturdy plastics and containers with hard-to-reach crevices are ready for use immediately after each cycle
- $\bigstar$  Push to Open dishwasher opens with either a push or pull, so loading is easier, even when your hands are full
- $\bigstar$  Sapphire Glow $^{ ext{@}}$  light illuminates with the sparkling blue light when the dishwasher is open
  - Adjustable Chef's Tool Drawer® delivers added loading capacity as well as flexibility to accommodate larger or smaller items, wider ends and utensil handles
  - Flexible folding tines fold down to accommodate larger pots, pans, and dishes and add flexibility to hold items twice as wide as previous models and significantly wider than competitor
  - Exceptionally Quiet 42 dBA for a peaceful kitchen
  - Thermador Connected Experience by Home Connect brings exclusive dish features that keep you connected. Always.

ACCESSORIES (OPTIONAL)	
Dishwasher Supply and Drainage Hose Extension 76 3/4"	SGZ1010UC
Dishwasher Accessory Kit	SMZ5000
Fine Silverware Carafe	SMZ5002UC
Junction Box	SMZPCJB1UC







Fine Silverware Carafe

GENERAL PROPERTIES	RESERVATION DATE
Number Of Wash Cycles	7
Number Of Options	7
NSF®-Certified* Sanitize Option	Yes
dBA	42
Third Rack	Adjustable Chef's Tool Drawer®
Rack Adjustability	Rackmatic 3-Stage
Tub Material	Stainless Steel
Control Type	Premium Touch Contro
Concealed Water Heating Element	Yes
Leak Protection System	24/7 AquaStop®
Water Softener	Yes
Five-Level Wash	Yes
Childlock	No
Home Connect (Wi-Fi Enabled)	Yes
EFFICIENCY	William Straight Straight Straight
Water Usage Per Cycle (g)	3.5 g
Energy Efficiency Class	Tier 1
ENERGY STAR® Certified	Yes
Total Annual Energy Consumption (kWh)	269 kWh
Total Annual Water Consumption (g)	623.5 g
CAPACITY	TO DESCRIPTION OF THE
Number Of Place Settings	16
TECHNICAL DETAILS	第5次的 艾克克克特克洛
Watts (W)	1,440 W
Current (A)	12 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power Cord Length (in)	67"
Power Cord Install Length from Corner of Unit when Facing the Door (in)**	Left - 45" Right - 56"
Minimum Water Pressure (lb/sin)	14
Max. Temperature for Water Intake	140° F
ength Inlet Hose (in)	N/A
ength Outlet Hose (in)	79"

\*Certification to NSF/ANSI Standard 184 for residential dishwashers
\*\*September 2020 running production change to remove adhesive routing clips for power
cord. These clips and the edge protector are now included in the dishwasher accessory kit
#SMZEPCC1UC.

DIMENSIONS & WEIGHT

Adjustable Feet

Net Weight (lbs)

Required Cutout Size (HxWxD) (in)

Overall Appliance Dimensions (HxWxD) (in)

33 <sup>7</sup>/8" x 23 <sup>9</sup>/16" x 23 <sup>3</sup>/4"

Min. x 24"

Yes

109 lbs

33 7/8" Min. x 23 5/8"




### DWHD770WFP SAPPHIRE® 7-PROGRAM DISHWASHER

PROFESSIONAL SERIES HANDLE



WARRANTY	TO DESCRIPTION OF STREET AND STREET OF THE PARTY.
Limited Warranty, Entire Appliance, Parts and Labor	2 Year
Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only	3rd to 5th Year
Limited Warranty for Racks (Does Not Include Rack Components); Parts Only	3rd to 5th Year
Limited Warranty for Rust-through On Inner Tub Liner; Parts Only	Lifetime

#### DISHWASHER & CUTOUT DIMENSIONS

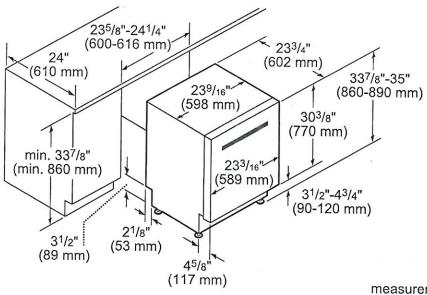

measurements in inches and mm

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.


1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.



#### T301R905SP 30-INCH BUILT-IN FRESH FOOD COLUMN FREEDOM® COLLECTION, PANEL-READY
















#### FEATURES & BENEFITS

- Full Stainless Steel Inner Liner
- Freedom® Hinge enables true flush design
- Auto Door Opening provides the opening of the door with just a slight push or pull
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES	DEPARTMENT OF THE PARTY OF
Refrigerator	36°F (2°C) to 46°F (8°C)
Temperature Controlled Drawer	30°F (-1°C) to 38°F (3°C)
SuperCool	36°F (2°C) for approximately 6 hours
Energy Saving (Economy) Mode	43°F (6°C)

Home Connect™ (Wi-Fi Enabled)	Yes
Panel Ready	Yes
Reversible Door Swing	
SoftClose® Door	Yes
SoftClose® Drawers	Yes
Carbon Air Filter	Yes
Lighting	Yes
Lighting	LED Sidewall and Theater Lighting
Refrigerator Shelves	4
Adjustable Shelves	3
Shelf Material	Glass w/Aluminum Profile
Full Extension Drawers @ 115° Door Opening Angle	Yes
Full Extension Drawers @ 90° Door Opening Angle	Yes
General Use Drawer	1
Humidity Managed Drawer	1
Temperature Controlled Drawer	1
Door Bins	3
Gallon Door Bins	1
Door Open Alarm	Yes
Open Door Assist	Yes
Special Modes	Sabbath, Economy, Vacation
CAPACITY	A CANAL DESIGNATION
Total Capacity (cu. ft.)	16.8 cu. ft.
PERFORMANCE	
Dedicated Evaporator & Compressor System	Yes
Freeflow® Cold Air System	Yes
SuperCool	Yes
TECHNICAL DETAILS	
Watts (W)	350 W
Current (A)	15 A
Volts (V)	110-120 V
Frequency (Hz)	60 Hz
Power Cord Length (in.)	118
Plug Type	120V-3 Prong
DIMENSIONS & WEIGHT	
Appliance Dimensions (H x W x D) (in.)	83 <sup>3</sup> /4"* × 29 <sup>3</sup> /4" × 24
Required Cutout Size (H x W x D) (in.)	84" x 30" x 25"
Net / Gross Weight (lbs)	366 / 403 lbs
EFFICIENCY	TOTAL STANFAR
ENERGY STAR® Certified	Yes
Appual Engray Consumption	279 kWh
Annual Energy Consumption	

<sup>\*</sup>Height adjustable + / -1/2" (+ / -13 mm)




#### T30IR905SP 30-INCH BUILT-IN FRESH FOOD COLUMN FREEDOM® COLLECTION, PANEL-READY




2 Year
3rd to 6th Year
7th to 12th Year
Lifetime

<sup>\*</sup>Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

#### **CUTOUT DIMENSIONS**

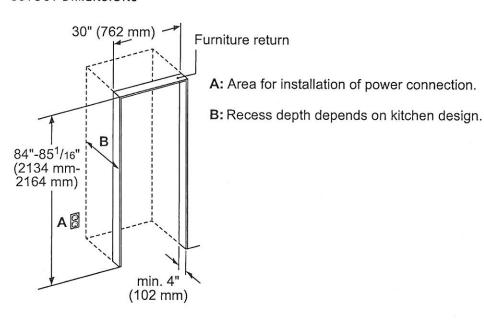

#### TOP VIEW CLEARANCE

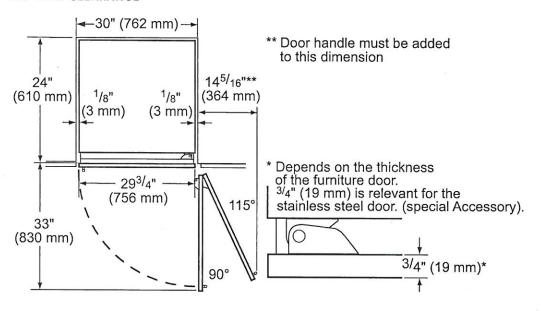

Page 2 of 3




#### T301R905SP

## 30-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY



#### PRODUCT AND PANEL DIMENSIONS

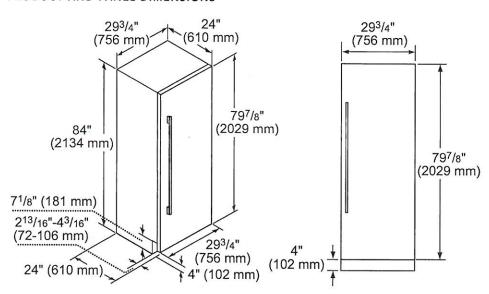

### ACCESSORIES (OPTIONAL)

#### FLAT STAINLESS STEEL DOOR PANELS

30-Inch Flat Stainless Steel Door Panel



TFL30IR800 For use with Handle TFL30IR905 Handleless

#### HANDLES

Choose between two options:

PR36HNDL20 36-Inch Professional Series Handle

> MS36HNDL20 36-Inch Masterpiece® Series Handle

#### STORAGE



SPRODBIN10 Small Produce Bin



LPRODBIN10 Large Produce Bin




30PRODRAIL 30-Inch Produce Railing



30HFGALBIN 30-Inch Half Gallon Bin

#### FRAMEKIT10

Freedom® Frame Kit
For any custom column installation
in 24-inch deep cutouts. With two
metal side trims whose placement
between the interior cutout wall and
the appliance helps overcome the
challenge of unfinished cabinet returns.




HEATRKIT20 - 13W @ 120V

Freedom® Heater Kit When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this sealing kit is included. For all other (nontraditional, i.e. two wine columns, two bottom freezers, etc.) sideby-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2021 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.




FREEDOM® COLLECTION, PANEL-READY

### T18IF905SP 18-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER

Thermador.\*\*













#### FEATURES & BENEFITS

- Full Stainless Steel Inner Liner
- Freedom® Hinge enables true flush design
- Auto Door Opening provides the opening of the door with just a slight push or pull
- Energy Efficient Diamond Ice made with twist tray technology
- Smooth Filtered Lighting for clear and easy viewing of all
- SoftClose® Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions


TEMPERATURE RANGES	A CHARLES AND A CHARLES
Freezer	-11°F (-24°C) to 7°F (-14°C)
SuperFreeze®	-22°F (-30°C) for approximately 52 hours
Energy Saving (Economy) Mode	3°F (-16°C)

GENERAL PROPERTIES	
Home Connect™ (Wi-Fi Enabled)	Yes
Panel Ready	Yes
Reversible Door Swing	Yes
SoftClose® Door	Yes*
SoftClose® Drawers	Yes
Lighting	LED Sidewall and Theater Lighting
Freezer Shelves	4
Adjustable Shelves	3
Shelf Material	Glass w/Aluminum Profile
Full Extension Drawers @ 115° Door Opening Angle	Yes
General Use Drawer	2
Door Bins	4
External LED Proximity Sensor	No
Oversized Dispenser Opening	No
Chilled Water, Crushed and Cubed Ice	No
Rapid Water Replenishment System	No
Ice Maker with Diamond Ice System	Yes
Door Open Alarm	Yes
Open Door Assist	Yes
Special Modes	Sabbath, Economy, Vacation

	Vacation		
CAPACITY			
Total Capacity (cu. ft.)	8.6 cu. ft.		
PERFORMANCE			
Dedicated Evaporator & Compressor System	Yes		
SuperFreeze®	Yes		
Defrost Process	Frost-Free		
TECHNICAL DETAILS	NAME OF THE PARTY		
Watts (W)	350 W		
Current (A)	15 A		
Volts (V)	110-120 V		
Frequency (Hz)	60 Hz		
Power Cord Length (in.)	118		
Plug Type	120V-3 Prong		
DIMENSIONS & WEIGHT	WAS TO SEE THE PROPERTY OF THE PARTY OF THE		
Appliance Dimensions (H x W x D) (in.)	83 <sup>3</sup> / <sub>4</sub> "** x 17 <sup>3</sup> / <sub>4</sub> " x 24"		
Required Cutout Size (H x W x D) (in.)	84" x 18" x 25"		
Net / Gross Weight (lbs)	273 / 302 lbs		
EFFICIENCY	MESTALLER		
ENERGY STAR® Qualified	Yes		
Annual Energy Consumption	404 kWh		

<sup>\*</sup>To verify if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-900-735-4328.

\*\*Height adjustable + / -1/2\* (+ / -13 mm)



# T18IF905SP 18-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER FREEDOM® COLLECTION, PANEL-READY




WARRANTY
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect
Limited Warranty for Sealed Refrigeration System\*; Parts and Labor


Limited Warranty for Sealed Refrigeration System\*; Parts Only

To 12th Year
Limited Warranty for Stainless Steel Rust-Through

#### CUTOUT DIMENSIONS

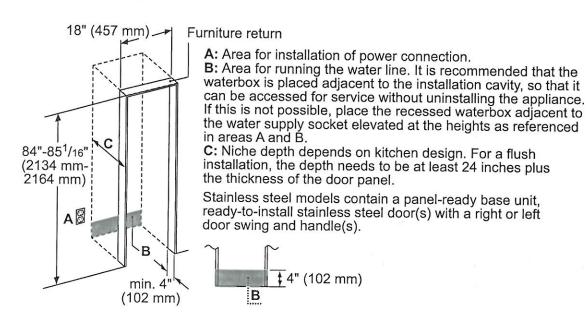


#### TOP VIEW CLEARANCE



- \*\* Door handle must be added to this dimension
- \* Depends on the thickness of the furniture door.

  3/4" (19 mm) is relevant for the stainless steel door. (special Accessory).



<sup>\*</sup>Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing




## T18IF905SP

#### 18-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER

FREEDOM® COLLECTION, PANEL-READY

Thermador\*

#### PRODUCT AND PANEL DIMENSIONS

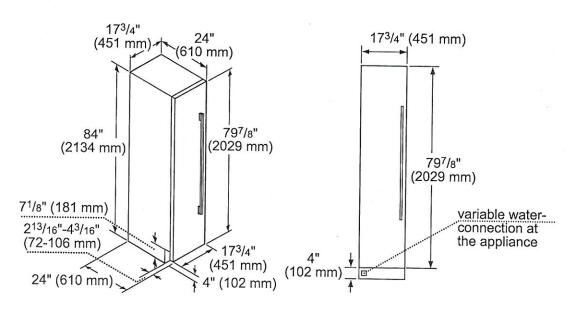

#### ACCESSORIES (OPTIONAL)

#### FLAT STAINLESS STEEL DOOR PANELS

18-Inch Flat Stainless Steel Door Panel



NOTE: Handleless Panels should not be installed on units without the Soft-Close capability. If you are uncertain if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328.

#### **HANDLES**

Choose between two options:



MS36HNDL20 36-Inch Masterpiece® Series Handle

#### STORAGE



ICEBUCKETL Large Ice Bucket

#### FILTERS



REPLFLTR55 Freedom® Water Filter Replacement water filter for use in all freezer and bottom freezer models

side-by-side a sealing kit must be used. For combinations that involve a freezer column, this sealing kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

#### FRAMEKIT10


Freedom® Frame Kit

For any custom column installation in 24-inch deep cutouts. With two metal side trims whose placement between the interior cutout wall and the appliance helps overcome the challenge of unfinished cabinet returns.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.



HEATRKIT20 - 13W @ 120V Freedom® Heater Kit

When two appliances are installed



#### PODMC301W 30-INCH DOUBLE COMBINATION BUILT-IN OVEN WITH SPEED OVEN













### FEATURES & BENEFITS

- Specially crafted gray glass on stainless steel for a luxurious look and finish
- Designed for flexibility—standard or flush installation into kitchen cabinets
- Speed oven with microwave capability can broil and convection
- Large commercial style rotisserie with 12 pound capacity
- Multi-point Meat Probe to better capture temperature in roast and poultry

#### ACCESSORIES (INCLUDED)

Upper Cavity: Metal Turntable, Rack, Ceramic Tray; Lower Cavity: 3 Telescopic Racks, Multi-point Meat Probe, Max Broil Pan, Rotisserie

## WARRANTY

Limited Warranty Parts and Labor

2 Year

#### GENERAL PROPERTIES

Heating Modes - Upper Cavity

36 CookSmart<sup>™</sup> Auto Programs (including True Convection, Speed Convection, Broil, Convection Broil, Heating Programs, Keep Warm) and Microwave Programs

Heating Modes - Lower Cavity

(16) Bake, Broil, Max Broil, Roast, Convection Bake, Convection Broil, Max Convection Broil, Convection Roast, Proof, Warm, Pizza, True Convection, Dehydrate, Speed Convection, Slow Roast, Rotisserie

Sabbath	Yes  Easy Clean and Self Clean 3	
Cleaning Type – Lower		
Telescopic Rack(s)		
Illumination Type	Upper Cavity Lower Cavity	LED Halogen
Interior Lights	1 2	
Home Connect (Wi-Fi E	Yes, Lower Oven Only	

Home Connect (VVI-1 1 LI)	res, Lower Oven Only		
OVEN PERFORMAN	Bartar Periodes		
Microwave Power		1,000 W	
		600 W / 1,750 W 2,400 / 1,000 / 3,800 W	
Convection Element	Upper Cavity	1,700 W	
	Lower Cavity	2.000 W	

Lower Cav	11y 2,000 W
TECHNICAL DETAILS	
Watts	10,200 W
Circuit Breaker	50 A
Volts; Frequency	240 / 208 V; 60 Hz
Plug Type	Fixed Connection, No Plug
Conduit	60" 4-Wire
Energy Source	Electric

Overall Appliance Dimensions (HxWxD)	49" x 29 3/4" x 24 1/2"
Trim Overlaps (Top – Sides – Bottom)	1/2" - 9/16" - 0"
Required Cutout Size (HxWxD) – Standard	48 1/2" x 28 1/2" x 23 1/2"
Required Cutout Size (HxWxD) – Flush	49 1/8" x 30" x 24 1/2"
Speed Oven Capacity	1.6 cu. ft.
Oven Capacity	4.5 cu. ft.
Overall Lower Oven Interior Dimensions (HxWxD)	17 <sup>3</sup> / <sub>4</sub> " × 24" × 17 <sup>7</sup> / <sub>8</sub> "
Usable Lower Oven Interior Dimensions (HxWxD)	13 <sup>1</sup> /2" × 21 <sup>5</sup> /8" × 16 <sup>1</sup> /4"
Net Weight	267 lbs





## PODMC301W 30-INCH DOUBLE COMBINATION BUILT-IN OVEN WITH SPEED OVEN




PROFESSIONAL SERIES

#### 30-INCH DOUBLE COMBINATION OVEN WITH SPEED OVEN

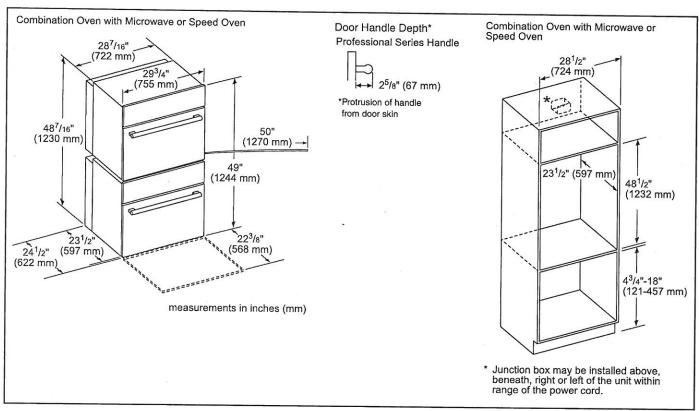

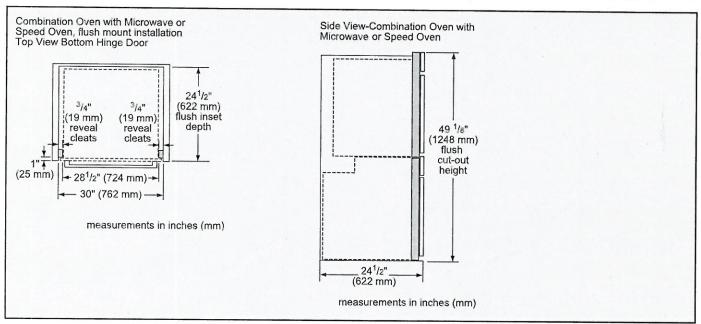





## PODMC301W 30-INCH DOUBLE COMBINATION BUILT-IN OVEN WITH SPEED OVEN



PROFESSIONAL SERIES

#### INSTALLATION DETAILS

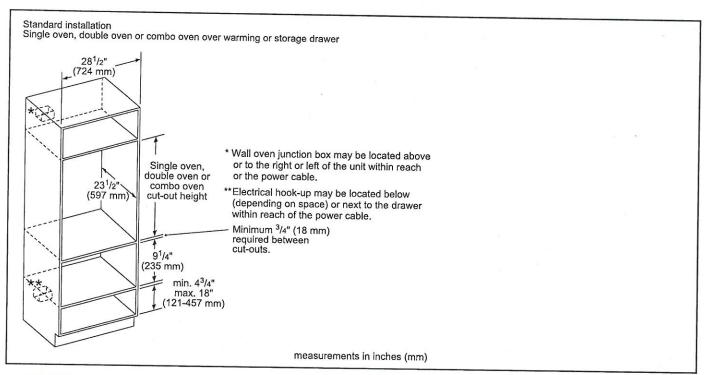

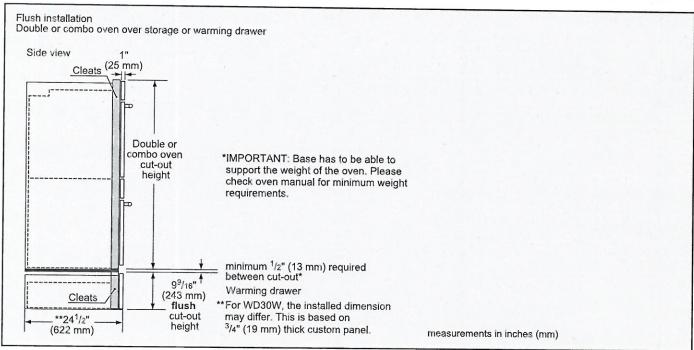

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada.

Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.










#### FEATURES & BENEFITS

- ★- Patented Pedestal Star® Burner with QuickClean Base® designed for easy surface cleaning and superior heat spread for any size pan
- ★- Precision simmering capabilities as low as 100°F (375 BTU) with 2 ExtraLow<sup>®</sup> Simmer burners
- ★- LED Downlighting—hidden discreetly above the control panel provides functional and stylish illumination

GENERAL PROPERTIES	Residence of the Land Control
Controls	Metal Knobs
Sealed Burners	Yes
Grate Material	Cast Iron
BURNER PERFORMANCE	
Total Number of Cooktop Burners	6
Power of Front Left Burner (NG)	18,000 and XLO (NG)
Power of Back Left Burner (NG)	15,000 and XLO (NG)
Power of Back Center Burner (NG)	15,000 (NG)
Power of Front Center Burner (NG)	18,000 (NG)
Power of Center 12" Electric Griddle (W)	N/A
Power of Center 12" Electric Grill (W)	N/A
Power of Back Right Burner (NG)	15,000 (NG)
Power of Front Right Burner (NG)	18,000 (NG)
TECHNICAL DETAILS	LANCE VIEWS TOURS
Circuit Breaker (A)	15 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Plug Type / Receptacle	120V-3 Prong NEMA 5-15
Power Cord Length (in)	65"
Energy Source	Gas
Gas Type	Natural Gas 6" Water Column (14.9 mb) Min. (USA)
Alternative Gas Type	LP 11" Water Column (27.4 mb) Min. (USA)
Convertible To LP (Kit Required)	Yes
DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (HxWxD) (in)	8 1/8" x 35 15/16" x 25 13/16"
Required Cutout Size (HxWxD) (in)	7 11/ <sub>16</sub> " × 35 1/ <sub>8</sub> " × 22 <sup>13/</sup> <sub>16</sub> "
Minimum Distance From Rear Wall (in)	6" Min. to Combustible Surface
Net Weight (lbs)	142 lbs
VARRANTY	Chromatan base





## ACCESSORIES (OPTIONAL)



**PAGRIDDLE** Griddle Sits on Top of Grates Over 2 Star Burners



PA12CHPBLK 12" Cutting Board



**PWOKRINGHC** Wok Ring



PA36WLBC 10" Low Backguard





**PAKNOBLUWR** Metallic Blue Knob Kit



**PALPKITHW** LP Conversion Kit, Pro Rangetops (4 & 6 Burners)

#### 36" RANGETOP SIDE VIEW





- A: Cabinet face for installation
- with projecting control panel.


  B: Cabinet face for installation with flush control panel.
- C: Side flange





## 36-INCH RANGETOP CUTOUT DIMENSIONS

\* Minimum recommended hood width equals that of the range or cooktop.

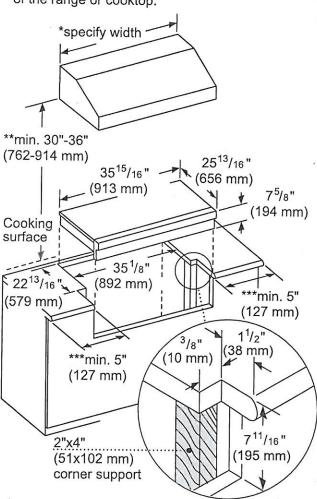

- \*\* 36" minimum clearance from cooking surface to combustible surfaces.
- \*\*\* 5" minimum clearance from cooking surface to combustible side wall.

Note: Most hoods contain combustible components that must be considered when planning the installation.

measurements in inches (mm)

Page 3 of 5



## PCG366W 36-INCH GAS RANGETOP


PROFESSIONAL SERIES, PORCELAIN COOKTOP SURFACE



#### 36-INCH RANGETOP GAS LOCATION

The gas and electrical supply must be located in an area that is accessible without requiring removal of the rangetop. The appliance electrical power cord and gas pipe connection are located on the left rear underside of the rangetop.

The junction box must be located within 3 feet (~900 mm) of the rangetop connection.

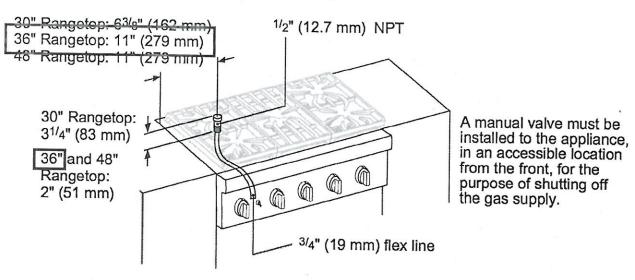

#### measurements in inches (mm)

#### NATURAL GAS REQUIREMENTS:

Inlet Connection: 1/2" NPT (min. 3/4" dia. flex line)

Supply Pressure: 6" min. to 14" max. water column (14.9 mb to 34.9 mb)

Manifold Pressure: 5" water column (12.5 mb)

#### PROPANE GAS REQUIREMENTS:

Inlet Connection: 1/2" NPT (min. 3/4" dia. flex line)

Supply Pressure: 11" min. to 14" max. water column (27.4 mb to 34.9 mb)


Manifold Pressure: 10" water column (24.9 mb)

#### ELECTRICAL SUPPLY

IMPORTANT: The cord supplied with all-burner gas rangetops requires a NEMA 5-15 receptacle as shown here. Local codes my require a different wiring method.




WARNING: This appliance is equipped with a three-prong grounding plug for protection against shock hazard and should be plugged directly into a properly grounded receptacle. DO NOT cut or remove the grounding prong from this plug. DO NOT ALTER THIS PLUG.



Thermador.\*\*

#### 36-INCH RANGETOP CLEARANCES

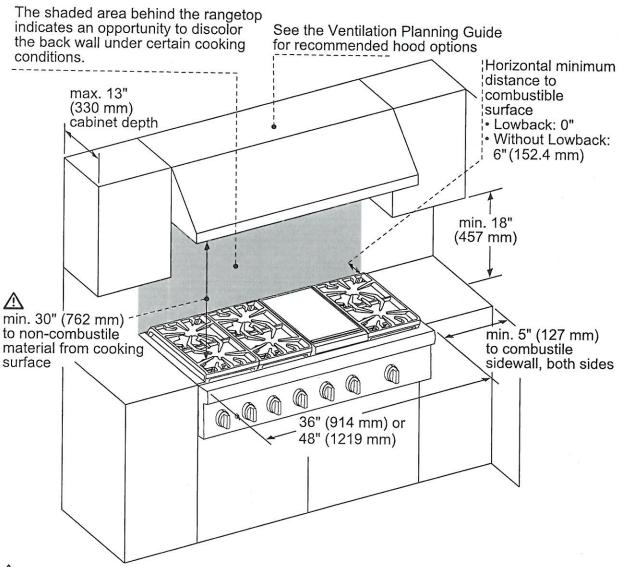

As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances must be approved by the local codes and/or by the local authority having jurisdiction.

#### measurements in inches (mm)

NOTE: A 36-inch minimum clearance is required between the top of the cooking surface and the bottom of an unprotected cabinet. A 30-inch clearance can be used when the bottom of the wood or metal cabinet is protected by not less than 1/4 inch of a flame retardant material covered with not less than No. 28 MSG sheet steel, 0.015 inch (0.4 mm) thick stainless steel, 0.024 inch (0.6 mm) aluminum, or 0.020 inch (0.5 mm) thick copper.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada.

Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2019 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Page 5 of 5



### VCIN36GWS 36-INCH CUSTOM INSERT

PROFESSIONAL® SERIES











#### FEATURES & BENEFITS

- Revel in creative freedom with Professional® Series custom inserts that can blend in with cabinetry or make a bold statement
- $\bigstar$  Equipped with the Thermador Connected Experience by Home Connect™
  - Powerfully Quiet® system accepts integral, inline, and remote blowers
  - Beautiful illumination with multi-level, vivid LED lights
  - Features automatic mode, delay shut-off, and check filter light

## ACCESSORIES (OPTIONAL)

25 ft. Blower Connector Cable - EXTNCB25W

For use with the following inline and remote blowers: VTR630W, VTR1030W, VTR1330W, VTI610W, VTI1010W

Roofplates

RFPLT600P - For use with 600 CFM remote blower VTR630W


RFPLT1000P - For use with 1000 CFM remote blower VTR1030W and 1300 CFM blower VTR1330W

VCIN Trim Notes

NOTE: VCIN\_GWS series custom insert models include hood trim pieces to complete the installation.


Remote Control Panel

REMCPW - Ability to vertically install on cabinetry or wall to control hood in a convenient location



GENERAL PROPERTIES	Market Market Market			
Features				
Multi-Level LED Lights with Fading Transition Filter Reminder Light, Delay Shut-Off	s, Automatic Mode, Check			
Operating Mode	Ducted			
Maximum CFM	Blower Sold Separately			
Number of Speed Settings 4-Stage				
Number of Lights	2			
Bulb Type	LED			
Light Lumens	100 – 150			
Light Color (°K)	3500 – 4000			
Total Power of the Lamps (W)	2.4 W			
Damper Included	Yes			
Grease Filter Material	Washable Stainless Steel			
Grease Filter Type	Stainless-Steel Commercial Style Baffle Filter			
Home Connect™ (Wi-Fi Enabled)	Yes			
TECHNICAL DETAILS				
Watts (W)	See Chart on Page 3			
Current (A)	See Chart on Page 3			
Volts (V)	120 V			
Frequency (Hz)	60 Hz			
Plug Type	Fixed Connection			
Power Cord / Conduit Length (in)	Direct Wire at Junction Box			
DIMENSIONS & WEIGHT	THE THE PROPERTY OF			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in)	12 <sup>13</sup> / <sub>16</sub> " x 33 <sup>3</sup> / <sub>4</sub> " x 22"			
Minimum Required Distance Above Gas / Electric Cooking Surface	30" Electric / 30" Gas			
Diameter of Air Duct (in.) Top	10"			
Net Weight (lbs)	54 lbs			
ACCESSORIES (REQUIRED)	GENERAL WARRANT			

Blower (Sold Separately)	
BLOWER OPTIONS	图显示文字联合70年9
Remote Blowers	VTR630W - 600 CFM
(Mounted to Roof or External Wall)	VTR1030W - 1000 CFM
	VTR1330W - 1300 CFM
Inline Blowers	VTI610W - 600 CFM
(Mounted Between Kitchen and External Wall)	VTI1010W - 1000 CFM
Integrated Blower (Mounted in Hood)	VTN630W - 600 CFM
	VTN1090R - 1000 CFM
WARRANTY	SALES SERVICES SERVICES
Limited Warranty Parts and Labor	2 Year




## VCIN36GWS 36-INCH CUSTOM INSERT PROFESSIONAL® SERIES



#### HOOD DIMENSIONS

NOTE: VCIN Custom Insert models include hood trim pieces.

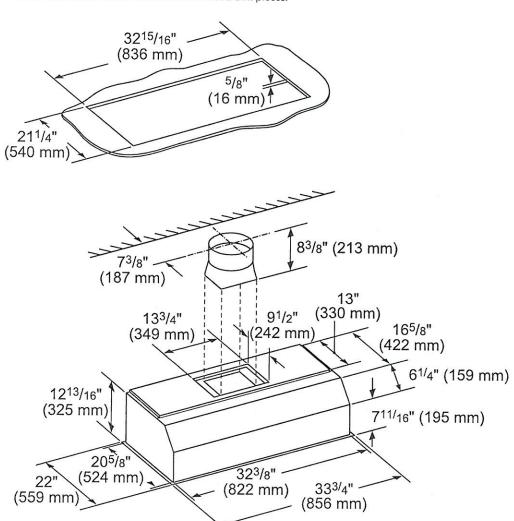

measurements in inches (mm)




## VCIN36GWS 36-INCH CUSTOM INSERT PROFESSIONAL® SERIES



			ELECTRIC LOAD						
MODEL	DESCRIPTION		VTN630W	VTN1090R	VTI610W	VTI1010W	VTR630W	VTR1030W	VTR1330W
VCIN36GWS	36" Custom Insert	Amps	4.0	7.4	5.9	7.8	5.9	7.8	11.3
		Watts	480	888	708	936	708	936	1,356

REMOTE BLOWERS (MOUNTED TO ROOF OR EXTERNAL WALL)

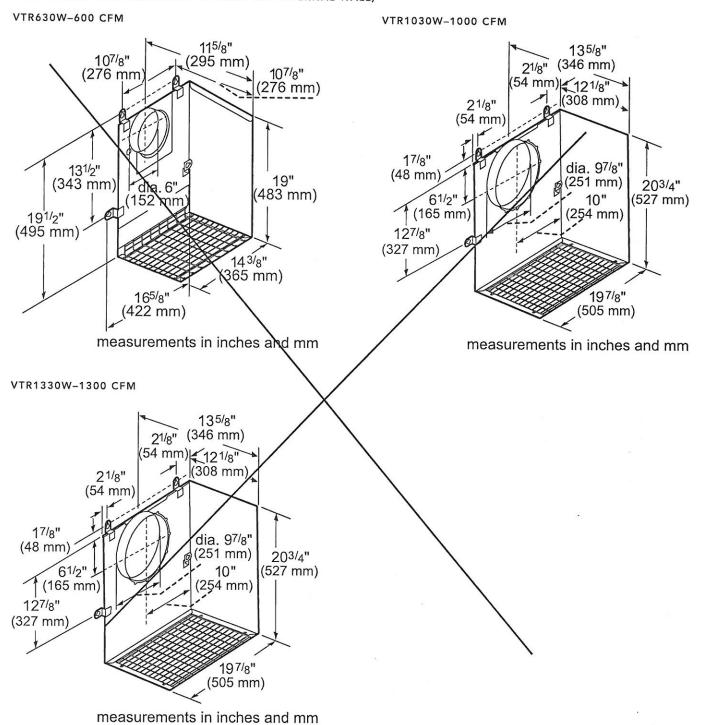

Page 3 of 5

AI DD™

Steam Technology

**ENERGY STAR® Qualified** 

SmartDiagnosis™

**Touch Control Panel** 

ThinQ™ Technology (Wi-Fi Enabled)

LG ThinQ<sup>™</sup> - Start the laundry while you're out shopping - Get alerts when the cycle is finished - Works with the LG ThinQ® app


Leveling Legs


Wi-Fi

Thing TECHNOLOGY SmartDiagnosis™ (v3.0)

Remote Start and Cycle Monitor **Energy Monitoring** 

Enjoy new ways to control your home with LG smart appliances



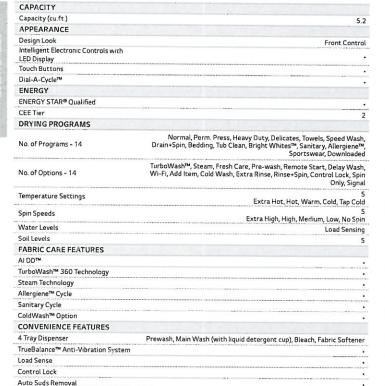





MOTOR         Motor Type         Inverter Direct Drive Motor           Motor Speed         Variable           Max RPM         1,300           Axis         Horizontal           MATERIALS AND FINISHES           NeveRust™ Stainless Steel Drum         €           Cabinet         PCM           Control Panel         PCM           Control Panel         Plastic           Top Plate         Painted           Door / Rim         Glass/Chrome           All Available Colours         Black Steel (B)           POWER SOURCE           Ratings         UL Listed           Electrical Requirements         120V. 10 Amps           Electric         PCM           OPTIONS           Pedestal         27" x 14 1/8" x 30 3/4"           SideKick™ Pedestal Washer         XSTK1	Tub Clean Coach	***************************************
Motor Speed         Variable           Max RPM         1,300           Axis         Horizontal           MATERIALS AND FINISHES         NeveRust™ Stainless Steel Drum         c           Cabinet         PCM           Control Panel         PLASTIC           Top Plate         Painted           Door Cover         Tempered Glass Door           Door J Rim         Glass/Chrome           All Available Colours         Black Steel (B)           POWER SOURCE         Black Steel (B)           Ratings         UL Listed           Electrical Requirements         120V, 10 Amps           Type         Electric           OPTIONS         V0100CB           SideKick™ Pedestal Washer         W0100CB           Stacking Kit         KSTK1           DIMENSIONS         KSTK1           DIMENSIONS         27" x 14 1/8" x 30 3/4"           Stacking Kit         KSTK1           UNIMENSIONS         27" x 39" x 30" 1/4"           Stacking Kit         KSTK1           UNIMENSIONS         27" x 39" x 30" 1/4"           Veight (Product/Carton)         27" x 39" x 30" 1/4"           Weight (Product/Carton)         198.4 lbs / 212.1 lbs           LIMITED WARRA	MOTOR	
Max RPM         1,300           Axis         Horizontal           MATERIALS AND FINISHES         Horizontal           NeveRust™ Stainless Steel Drum         Cabinet         PCM           Cabinet         PCM           Control Panel         Plastic           Top Plate         Painted           Door / Rim         Glass/Chrome           All Available Colours         Black Steel (B)           POWER SOURCE         Black Steel (B)           Ratings         UL Listed           Electrical Requirements         120V, 10 Amps           Type         Electric           OPTIONS         Pedestal           Sideklick™ Pedestal Washer         27" x 14 1/8" x 30 3/4"           Stacking Kit         KSTK1           DIMENSIONS         27" x 39" x 30 1/4"           Product (WxHxD)         27" x 39" x 30 1/4"           Veight (Product/Carton)         198 x 10x 12x 10x 10x 10x 10x 10x 10x 10x 10x 10x 10	Motor Type	Inverter Direct Drive Motor
Axis         Horizontal           MATERIALS AND FINISHES         Horizontal           NeveRust™ Stainless Steel Drum         •           Cabinet         PCM           Control Panel         Plastic           Top Plate         Painted           Door Cover         Tempered Glass Door           Door J Rim         Glass/Chrome           All Available Colours         Black Steel (B)           POWER SOURCE           Ratings         UL Listed           Electrical Requirements         120V. 10 Amps           Type         Electric           OPTIONS           Pedestal         27° x 14 1/8° x 30 3/4°           SideKick™ Pedestal Washer         27° x 14 1/8° x 30 3/4°           Stacking Kit         KSTK1           DIMENSIONS           DIMENSIONS           Product (WxHxD)         27° x 39° x 30 1/4°           Carton (WxHxD)         27° x 39° x 30 1/3°           Weight (Product/Carton)         15° (With door open)           LIMITED WARRANTY         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor         UPC CODES           WM4100HBA         772454073260         772454073260         PC CODES           WM4	Motor Speed	Variable
MATERIALS AND FINISHES           NeveRust™ Stainless Steel Drum         .           Cabinet         PCM           Control Panel         Plastic           Top Plate         Painted           Door Cover         Tempered Glass Door           Door J (Rim         Glass/Chrome           All Available Colours         Black Steel (B)           POWER SOURE           Ratings         UL Listed           Electrical Requirements         120V, 10 Amps           Type         Electric           OPTIONS           Pedestal         WDP4B           27" x 14 1/8" x 30 3/4"           SideKick™ Pedestal Washer         27" x 14 1/8" x 30 3/4"           Stacking Kit         KSTK1           DIMENSIONS           Forduct (WxHxD)         22"" x 39" x 30 1/4"           S5" (With door open)         55" (With door open)           Carton (WxHxD)         29 23/32" x 42 27/32" x 31 17/32"           Weight (Product/Carton)         198 x 4 lbs / 212.1 lbs           LIMITED WARRANTY         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor           UPC CODES           WM4100HBA         772454073260           DIEX4	Max RPM	1,300
NeveRustr™ Stainless Steel Drum         PCM           Cabinet         PCM           Control Panel         Plastic           Top Plate         Painted           Door Cover         Tempered Glass Door           Door / Rim         Glass/Chrome           All Available Colours         Black Steel (B)           POWER SOURCE           Ratings         UL Listed           Electrical Requirements         120V, 10 Amps           Type         Beach Steel Work           Pedestal         27" x 14 1/8" x 30 3/4"           SideKick™ Pedestal Washer         WD100C8           Stacking Kit         KTKT           DIMENSIONS         XTK           Product (WHxD)         27" x 39" x 30" 1/4" 55" (With door open)           Carton (WxHxD)         27" x 39" x 30" 1/4" 55" (With door open)           LIMITED WARRANTY         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor           UPC CODES         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor           UPC CODES         77245 4073267           WM4100HBA         77245 4073266           DLEX4200B         77245 4073266           DLEX4200B         77245 4073366           WD100CB         77245 4073366	Axis	Horizontal
Cabinet         PCM           Control Panel         Plastic           Top Plate         Painted           Door Cover         Tempered Class Door Door / Rim           Door J Kim         Glass/Chrome           All Available Colours         Black Steel (B)           POWER SOURCE           Ratings         UL Listed           Electrical Requirements         120V, 10 Amps           Type         Electric           OPTIONS           Pedestal         27" x 14 1/8" x 30 3/4"           SideKick™ Pedestal Washer         27" x 14 1/8" x 30 3/4"           Stacking Kit         KSTK1           DIMENSIONS           Product (WxHxD)         27" x 39" x 30 1/4"           S5" (With door open)         55" (With door open)           Carton (WxHxD)         29 23/32" x 42 27/32" x 31 17/32"           Weight (Product/Carton)         19 x 4 y 2 x 32" x 42 27/32" x 31 17/32"           UPC CODES         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor           UPC CODES         77245 4073366           WM4100 HBA         77245 4073366           DLEX4200B         77245 4073366           DLEX4200B         77245 4073366           WDEAB <t< td=""><td>MATERIALS AND FINISHES</td><td></td></t<>	MATERIALS AND FINISHES	
Control Panel         Plastic           Top Plate         Painted           Door Cover         Tempered Glass Door           Door / Rim         Glass/Chrome           All Available Colours         Black Steel (B)           POWER SOURCE           Ratings         UL Listed           Electrical Requirements         120V, 10 Amps           Type         Electric           OPTIONS           Pedestal         27" x 14 1/8" x 30 3/4"           SideKick™ Pedestal Washer         27" x 14 1/8" x 30 3/4"           Stacking Kit         KSTK1           DIMENSIONS           UPC (WxHxD)         27" x 39" x 30 1/4"           S5" (With door open)         55" (With door open)           Carton (WxHxD)         27" x 39" x 30 1/3"           Weight (Product/Carton)         198.4 lbs / 212.1 lbs           LIMITED WARRANTY         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor           UPC CODES         WM4100HBA         77.2454073267           DLEX4200B         77.2454073266           DLEX4200B         77.2454073366           WD100CB         77.2454073366           WD2BB         048231026451	NeveRust™ Stainless Steel Drum	
Top Plate         Painted           Door Cover         Tempered Glass Door           Door Jrim         Glass/Chrome           All Available Colours         Black Steel (B)           POWER SOURCE           Ratings         UL Listed           Electrical Requirements         120V. 10 Amps           Type         Electric           OPTIONS           SideKick™ Pedestal         27" x 14 1/8" x 30 3/4"           Stacking Kit         KSTK1           DIMENSIONS           Carton (WxHxD)         27" x 39" x 30 1/4"           S" (Wrth door open)         55" (Wrth door open)           Carton (WxHxD)         29 23/32" x 42 27/32" x 31 17/32"           Weight (Product/Carton)         198.4 lbs / 212.1 lbs           LIMITED WARRANTY         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor           UPC CODES         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor           UPC CODES         77245 4073260           DLEX4200B         77245 4073260           DLEX4201B         77245 4073366           WD100CB         77245 4073366           WD2BB         0 48231026451	Cabinet	PCM
Door Cover         Tempered Glass Door Door / Rim         Glass/Chrome           All Available Colours         Black Steel (B)           POWER SOURCE           Ratings         UL Listed           Electrical Requirements         120V, 10 Amps           Type         Electric           OPTIONS         WDP4B           SideKick™ Pedestal         27" x 14 1/8" x 30 3/4"           SideKick™ Pedestal Washer         27" x 14 1/8" x 30 3/4"           Stacking Kit         KSTK1           DIMENSIONS         KSTK1           Product (WxHxD)         55" (With door open)           Carton (WxHxD)         29 23/32" x 42 27/32" x 31 17/32"           Weight (Product/Carton)         198.4 lbs / 212.1 lbs           LIMITED WARRANTY         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor         UPC CODES           WM4100HBA         772454073250           DLEX4200B         772454073366           WDLGX4201B         772454073366           WD100CB         772454071366           WDPAB         048231026451	Control Panel	Plastic
Door / Rim         Glass/Chrome           All Available Colours         Black Steel (B)           POWER SOURCE         Black Steel (B)           Ratings         UL Listed           Electrical Requirements         120V, 10 Amps           Type         Electric           OPTIONS         WD100CB           SideKick™ Pedestal Washer         WD100CB         27" x 14 1/8" x 30 3/4"           Stacking Kit         KSTK1           DIMENSIONS         55" (With door open)           Carton (WxHxD)         27" x 39" x 30 1/4" 55" (With door open)           Carton (WxHxD)         29 23/32" x 42 27/32" x 31 17/32"           Weight (Product/Carton)         198.4 lbs / 212.1 lbs           LIMITED WARRANTY         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor         UPC CODES           WM4100HBA         77245 4073250           DLEX4200B         77245 4073267           DLGX4201B         77245 4071806           WDP4B         048231026451	Top Plate	Painted
All Available Colours         Black Steel (B)           POWER SOURCE         Ratings         UL Listed           Electrical Requirements         120V, 10 Amps           Type         Electrical Type           OPTIONS         WDP04B           Pedestal         27" x 14 1/8" x 30 3/4"           SideKick™ Pedestal Washer         WD100CB           Stacking Kit         KSTK1           DIMENSIONS         55" (With door open)           Carton (WXHXD)         27" x 39" x 30 1/4" 55" (With door open)           Weight (Product/Carton)         198.4 lbs / 212.1 lbs           LIMITED WARRANTY         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor           UPC CODES         77245 4073250           WM4100HBA         77245 4073250           DLEX4200B         77245 4073267           DLEX4200B         77245 4071806           WD100CB         77245 4071806           WDP4B         048231026451	Door Cover	Tempered Glass Door
POWER SOURCE           Ratings         UL Listed           Electrical Requirements         120V, 10 Amps           Type         Electric           OPTIONS         Topa (MD) 100 CB           Pedestal         27" x 14 1/8" x 30 3/4"           SideKick™ Pedestal Washer         WD100CB           Stacking Kit         KSTK1           DIMENSIONS           Carton (WxHxD)         27" x 39" x 30" x 42 27/32" x 31 17/32"           Veight (Product/Carton)         55" (With door open)           LIMITED WAPRANTY           1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor           UPC CODES           WM4100HBA         77.2454073267           DLEX4200B         77.2454073267           DLEX4201B         77.2454073366           WD100CB         77.2454073366           WDP3B         048231026451	Door / Rim	Glass/Chrome
POWER SOURCE           Ratings         UL Listed           Electrical Requirements         120V, 10 Amps           Type         Electric           OPTIONS         WDP04B           Pedestal         27" x 14 1/8" x 30 3/8"           SideKick™ Pedestal Washer         WD100CB           Stacking Kit         KSTK1           DIMENSIONS         27" x 39" x 30 1/4" 55" (With door open)           Carton (WXHXD)         27" x 39" x 30 1/4" 55" (With door open)           Carton (WXHXD)         29 23/32" x 42 27/32" x 31 17/32"           Weight (Product/Carton)         198.4 lbs / 212.1 lbs           LIMITED WARRANTY         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor           UPC CODES         WM4100HBA         77.245 4073.250           DLEX4200B         77.245 4073.267           DLEX4200B         77.245 4073.366           WD100CB         77.245 4073.366           WD2BB         048231026451	All Available Colours	Black Steel (B)
Electrical Requirements  Type  Type  Flectric  OPTIONS  Pedestal  SideKick™ Pedestal Washer  Stacking Kit  DIMENSIONS  Product (WxHxD)  Carton (WxHxD)  Carton (WxHxD)  Stacking Kit  Stacking Kit  DIMENSIONS  Product (WxHxD)  Tyr x 14 1/8 x 30 3/4 x 45 x 30 x 3/4 x	POWER SOURCE	
Type         Electric           OPTIONS           Pedestal         WDP4B 27" x 14 1/8" x 30 3/4"           SideKick™ Pedestal Washer         WD100CB 27" x 14 1/8" x 30 3/4"           Stacking Kit         KSTK1           DIMENSIONS           Product (WxHxD)         27" x 39" x 30" 1/4" 55" (With door open)           Carton (WxHxD)         29 23/32" x 42 27/32" x 31 17/32"           Weight (Product/Carton)         198.4 lbs / 212.1 lbs           LIMITED WARRANTY           UPC CODES           WM4100HBA         77245 4073250           DLEX4200B         77245 4073260           DLEX4200B         77245 4073260           WD100CB         77245 4073260           WD100CB         77245 4073260           WD100CB         77245 4073260           WD28         048231026451	Ratings	UL Listed
Type         Electric           OPTIONS           Pedestal         27" x 14 1/8" x 30 3/4"           SideKick™ Pedestal Washer         27" x 14 1/8" x 30 3/4"           Stacking Kit         KSTK1           DIMENSIONS           Product (WxHxD)         27" x 39" x 30" x 30" 1/4" 55" (With door open)           Carton (WxHxD)         29 23/32" x 42 27/32" x 31 17/32"           Weight (Product/Carton)         198.4 lbs / 212.1 lbs           LIMITED WARRANTY         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor           UPC CODES         WM4100HBA         77245 4073250           DLEX4200B         77245 4073267           DLGX4201B         77245 4073366           WD100CB         77245 4071805           WD100CB         9048231026451	Electrical Requirements	120V. 10 Amps
Pedestal         WDP48 27" x 14 1/8" x 30 3/4" N0100CB           SideKick™ Pedestal Washer         WD100CB 27" x 14 1/8" x 30 3/4" N0 3/4"	Туре	The state of the s
SideKick™ Pedestal Washer         27" x 14 1/8" x 30 3/4" MD100CB           SideKick™ Pedestal Washer         27" x 14 1/8" x 30 3/4" X 14	OPTIONS	
SideKink™ Pedestal Washer         WD100CB 27" x 14 1/8" x 30 3/4"           Stacking Kit         KSTK1           DIMENSIONS           Product (WxHxD)         27" x 39" x 30" 1/4" 55" (With droor open)           Carton (WxHxD)         29 23/32" x 42 27/32" x 31 1/332"           Weight (Product/Carton)         198.4 lbs / 212.1 lbs           LIMITED WARRANTY         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor           UPC CODES         WM4100HBA         772454073267           DLEX4200B         772454073267           DLGX4201B         772454073866           WD100CB         772454071806           WDP4B         048231026451	Pedestal	
Stacking Kit         KSTK1           DIMENSIONS           Product (WxHxD)         27" x 39" x 30 1/4" 55" (With door open) 55" (With door open) 75" (With do	SideKick™ Pedestal Washer	WD100CB
Product (WXHXD)         27"x39" x 30 1/4" 55" (With door open)           Carton (WXHXD)         29 23/32" x 42 27/32" x 31 17/32"           Weight (Product/Carton)         198.4 lbs / 212.1 lbs           LIMITED WARRANTY         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor           UPC CODES         WM4100HBA         77245 4073250           DLEX4200B         77245 4073267           DLGX4201B         77245 4073366           WD100CB         77245 4071805           WDP4B         048231026451	Stacking Kit	
S5" (With door open)	DIMENSIONS	
Carton (WxHxD)         29 23/32" x 42 27/32" x 31 17/32"           Weight (Product/Carton)         198.4 lbs / 212.1 lbs           LIMITED WARRANTY         1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor           UPC CODES           WM4100HBA         772454073250           DLEX4200B         772454073267           DLGX4201B         772454073366           WD100CB         772454071805           WDP4B         048231026451	Product (WxHxD)	
LIMITED WARRANTY           1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor           UPC CODES           WM4100HBA         772454073250           DLEX4200B         772454073267           DLEX4201B         772454073366           WD100CB         77245407180S           WDP4B         048231026451	Carton (WxHxD)	29 23/32" x 42 27/32" x 31 17/32"
1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor       UPC CODES     77245 4073250       WM4100HBA     77245 4073267       DLEX4200B     77245 4073267       DLGX4201B     77245 4073366       WD100CB     77245 4071805       WDP4B     048231026451	Weight (Product/Carton)	198.4 lbs / 212.1 lbs
UPC CODES           WM4100HBA         772454073250           DLEX4200B         772454073267           DLGX4201B         772454073366           WD100CB         772454071805           WDP4B         048231026451	LIMITED WARRANTY	
WM4100HBA     772454073250       DLEX4200B     772454073267       DLGX4201B     772454073366       WD100CB     772454071805       WDP4B     048231026451	1 Year Parts and	Labour, 3 Years on Drum, 10 Years on Direct Drive Motor
DLEX4200B     772454073267       DLGX4201B     772454073366       WD100CB     772454071805       WDP4B     048231026451	UPC CODES	
DLGX4201B         772454073366           WD100CB         772454071805           WDP4B         048231026451	WM4100HBA	772454073250
WD100CB 772454071805 WDP4B 048231026451	DLEX4200B	772454073267
WDP4B 048231026451	DLGX4201B	772454073366
WDP4B 048231026451	WD100CB	772454071805
KSTK1 772454059896	WDP4B	199,4100 169440 169440 1694 1694 1694 1694 1694 1694 1694 1694
	KSTK1	772454059896

4 Adjustable Legs



#### 10 INSTALLATION

#### **WARNING**

 Certain internal parts are intentionally not grounded and may present a risk of electric shock only during servicing. Service personnel- Do not contact the following parts while the appliance is energized: pump, valve, motor, control board.

#### **Tools Needed**



- O Pliers
- Flat-Blade Screwdriver
- 8 Level

## Choosing the Proper Location

Check the following requirements for the install location before installing the washer.

- Allow for sufficient space between the walls and the washer for installation.
- Make sure that the floor is clean, dry and free of dust, dirt, water and oil so the leveling feet cannot slide easily. Leveling feet that can move or slide on the floor can contribute to excess vibration and noise.
- If the floor has too much flex, reinforce it to make it more rigid. If the floor is not solid, it may cause severe vibration and noise.
- If a drain pan must be used, take extra care to follow the instructions provided with the drain pan and make sure the leveling feet are adjusted for firm and even contact with the pan. Use of drain pans and failure to properly level the washer may result in increased vibration and noise during operation.

#### **Power Outlet**

- The power outlet must be within 60 inches (1.5 m) of either side of the washer.
- Position the washer so that the outlet and plug are easily accessible.
- Do not overload the outlet with more than one appliance.
- The outlet must be grounded in accordance with current electrical wiring codes and regulations.
- Use a time-delay fuse or circuit breaker.


 It is the personal responsibility and obligation of the washer owner to have a proper outlet installed by a qualified electrician.


#### Flooring

- To minimize noise and vibration, install the washer on a level, solidly constructed floor capable of supporting the washer without flexing or bouncing.
- The washer must be installed on firm flooring to minimize vibration during the spin cycle.
   Concrete flooring is best, but a wood floor is sufficient, provided it is built to FHA standards.
- The floor under the washer must not slope more than 1 inch (2.5 cm) from front to back or side to side.
- Installing on carpeting and soft tile surfaces is not recommended.
- Never install the washer on a platform or weakly supported structure.

#### Floor Installation

To ensure sufficient clearance for water inlet hoses, drain hose and airflow, allow minimum clearances of at least 1 inch (2.5 cm) at the sides and 4 inches (10 cm) behind the washer. Be sure to allow for wall, door, or floor moldings that may increase the required clearances.






Dimensions and Clearances	
А	24 3/4" (62.6 cm)
В	55" (139.6 cm)
С	30 1/4" (77 cm)
D	4" (10 cm)
E	1" (2.5 cm)
	, (2.0 0.11)



Dim	Dimensions and Clearances		
F	27" (70 cm)		
G	1/4" (0.5 cm)		

#### Stacking or Pedestal Installation

The washer can be stacked under a dryer or on top of a pedestal or pedestal washer.



Dimensions and Clearances		
A	30 1/4" (77 cm)	
В	4" (10 cm)	
С	1" (0.5 cm)	
D	27" (70 cm)	
Е	77 1/2" (196.8 cm)	
F	1/4" (0.5 cm)	

#### NOTE

- Refer to the instructions packaged with the optional pedestal kit before stacking appliance on pedestal.
- · Do not use a drain pan with a pedestal or pedestal washer installation as it can block the drawer. Using a drain pan may result in increased vibration and noise during operation.

## **Unpacking and Removing** Shipping Material


Remove all shipping materials from the washer for proper operation and inspect it for shipping damage.

## **A** CAUTION

· Failure to remove shipping materials can cause excessive noise and vibration.


#### Unpacking Shipping Material

- \* This feature is only available on some models. Lift the washer off the foam base.
- · After removing the carton and shipping material, lift the washer off the foam base.
- Make sure the plastic drum support ①\* comes off with the base and is not stuck to the bottom of the washer.
- If you must lay the washer down to remove the carton base ②, always protect the side of the washer and lay it carefully on its side. Do not lay the washer on its front or back.



## **Removing Shipping Material**

- Remove the bolt assemblies.
  - Starting with the bottom two shipping bolts 3 , use the included wrench to fully loosen all 4 shipping bolts by turning them counterclockwise.
  - Remove the bolt assemblies (bolts and retainers) by wiggling them slightly while pulling them out.



- Install the hole caps.
  - Locate the hole caps @ included in the accessory pack or attached to the back of

HOME APPLIANCES

#### **LG LAUNDRY**

## DLEX4200\_ / DLGX4201

7.4 cu.ft. Front Load Dryer with TurboSteam™ and **Built-In Intelligence** 

7.4 cu. ft. Ultra Large Capacity TurboSteam™ Technology Al Fabric Sensor/ Smart Pairing™ LG ThinQ® Technology / Proactive Customer Care Tempered Glass Door FlowSense™ Duct Clogging and Lint Filter Indicators ENERGY STAR® Certified Closet Depth LoDecibel™ Quiet Operation Reversible Door Wrinkle Care Option

AVAILABLE COLORS




BLACK STEEL





works with the Google Assistant alexa



Use the ThinQ® app to start the laundry while you're out
 Get alerts when the cycle is finished

 With Smart Pairing<sup>™</sup>, the washer can tell the dryer to select a compatible drying cycle






FABRIC CARE FEATURES			
A.I Dry	Yes Yes		
Sensor Dry			
Precise Temperature Control with Variable Heater	Yes		
Steam	TurboSteam™		
CONVENIENCE FEATURES			
3 Minute Installation Check	Yes		
LoDecibel™ Quiet Operation	Yes		
End of Cycle Signal	Yes		
Drum Light	Yes		
Reversible Door	Yes		
FlowSense™ Duct Clogging Indicator	Yes		
Wrinkle Care Option	Yes		
Child Lock	Yes		
Venting Option	Electric: 4 Way Venting / Gas: 3 Way Venting		
4 Adjustable Legs	Yes		
Remaining Time Display/Status Indicator(s)	Yes		
ThinQ® TECHNOLOGY	the standard of the state of the state of the state of		
SmartDiagnosis™ (v3.0)	Yes		
Wi-Fi	Yes		
Remote Start and Cycle Monitor	Yes		
Energy Monitoring	Yes (Wi-Fi)		
ENERGY			
ENERGY STAR® Certified	Yes		
CEF	Electric: 3.94 / Gas: 3.49		
MATERIALS AND FINISHES			
Aluminized Alloy Steel Drum	Yes		
Tub Rear	Painted		
Cabinet	Painted Steel		
Door	Glass Door w/ Chrome trim		
All Available Colors	White (W), Black Steel (B)		

POWER SOURCE	
Ratings	CSA Listed
Electrical Requirements	120V, 15 Amps (Gas) / 240V 30 Amps (Electric)
Туре	Electric, Gas
BTU Rating	10,000 Feet
OPTIONS	
LP Conversion Kit	383EEL3002D
Side Venting Kit	383EEL9001B
Pedestal	WDP4W, WDP4B
Pedestal (WxHxD)	27 x 14 1/8 x 30 3/4 (50 1/2 D with door open)
DIMENSIONS (ELECTRIC)	
Product (WxHxD)	27" x 39" x 30 1/8"
Depth with Door Open	51 3/8"
Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Weight (Product)	125.3 lbs.
Weight (Carton)	142.6 lbs.
DIMENSIONS (GAS)	
Product (WxHxD)	27" x 39" x 30 1/8"
Depth with Door Open	51 3/8"
Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Weight (Product)	139.34 lbs.
Weight (Carton)	155.0 lbs.
LIMITED WARRANTY	
Parts & Labor	1 Year
Drum	10 Years
UPC CODES	
DLEX4200W (White)	048231028417
DLGX4201W (White)	048231028424
WM4200HWA (White)	048231028301
DLEX4200B (Black Steel)	048231028394
DLGX4201B (Black Steel)	048231028400
WM4200HBA (Black Steel)	048231028295











#### 12 INSTALLATION

#### Clearances









## Installation Spacing for Recessed Area or Closet Installation

The following clearances are recommended for this dryer. This dryer has been tested for clearances of 1 inch (2.5 cm) on the sides and rear. Recommended clearances should be considered for the following reasons:

- Additional clearances should be considered for ease of installation and servicing.
- Additional clearances should be considered on all sides of the dryer to reduce noise transfer. For closet
  installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered
  doors with equivalent ventilation openings are acceptable.


#### **Closet Ventilation Requirements**

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm²) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm²) must be installed no more than one foot above the floor. Install vent grilles in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

#### NOTE

• There should be at least a little space around the dryer (or any other appliance) to eliminate the transfer of vibration from one appliance to another. If there is enough vibration, it could cause appliances to make noise or come into contact, causing paint damage and further increasing noise.

## Installation Spacing for Recessed Area or Closet, with Stacked Washer and Dryer

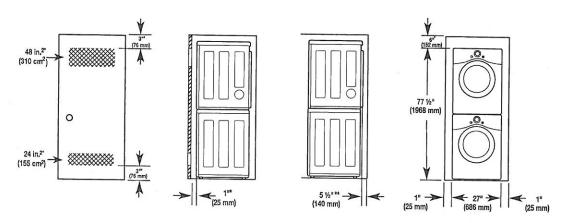


<sup>\*</sup> Required spacing


### Installation Spacing for Cabinet


fr-54 m July 24, 2021

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

\* Required spacing







<sup>\*\*</sup> For side or bottom venting, 2-inch (5.1 cm) of spacing is allowed.

# GOLDPARK WORTH MORE

TO: Gold Park Homes	
DATE: July 27, 2021	
sme: Pine Valley	
ют: 54	
I/We the undersigned, hereby authorize Mah-	
to act on my/our behalf in all matters relating to o and extras for the above mentioned Lot, including relating to these matters. Any and all acts carried	without limitation, signing of all documents out by Marriab Sahouri
on my/our behalf shall have the same effect as ac The authorization is valid under further written no	ts of my/our own and are irrevocable.  otice from the undersigned.
	et Jul Eup
WITNESS Name:	Name: Karyshad Touri
WITNESS Name:	PURCHASER Name: