

EWP DESIGN INC.

(905) 832-2250

FAX (905) 832-0286

RESPONSIBILITIES AND SPECIFICATIONS

RESPONSIBILITIES

1. EWP DESIGN INC. is responsible for the design of trusses as individual components.
2. It is the responsibility of others to ascertain that the design loads utilized on each drawing meet or exceed the actual dead load imposed by the structure, the live load imposed by the intended use and the snow load imposed by local building code or authorities with jurisdictions.
3. All dimensions are to be verified by the owner, contractor, architect or other authorities with jurisdictions before truss fabrication.
4. EWP DESIGN INC. bears no responsibility for the erection of trusses. Persons erecting trusses are cautioned to seek professional advice regarding the temporary and permanent bracing for the system. Bracing shown on EWP DESIGN INC. drawing is specified for the truss as a component only and forms an integral part of the truss design.
5. It is the truss manufacturer's responsibility to ensure that trusses are manufactured in conformance with specifications of EWP DESIGN INC. as outlined below.

SPECIFICATIONS

1. Trusses designed by EWP DESIGN INC. conform to the relevant section of the Ontario Building Code of Canada (Part 9 or Part 4) or to the Canadian code for farm buildings, whichever applies to the building type, as indicated on the EWP DESIGN INC. drawings, and conform to the design procedures established by the Truss Plate Institute of Canada. Unit stresses used for truss designs are as per the edition of CSA-O86 shown on EWP DESIGN INC. drawings.
2. Lumber is to be the size, species and grade as specified on EWP DESIGN INC. drawings.
3. Moisture content of lumber shall not exceed 19% in service unless specified otherwise.
4. Metal connector plates shall be applied to both faces of truss at each joint and shall be positioned as specified.
5. Top chords of trusses are assumed to be continuously braced laterally by roof sheathing or by purlins at intervals not exceeding 12.5 times the thickness of top chord member.
6. Bottom chords shall be laterally braced at intervals not exceeding 3M (10') o.c., where rigid ceiling is not applied directly to the underside of chords.


THESE DRAWINGS CONSTITUTE THE PROPERTY OF EWP DESIGN INC., SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY THE ALPA LUMBER GROUP, AND WILL BE RETRACTED BY EWP DESIGN INC. IF UTILIZED FOR ANY OTHER PURPOSE.

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318402	J04		1	TRUSS DESC. JT 45147	E20035275

Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 13:44:21 2020 Page 1

ID:MF8iiriaTok7DlbpT4B71Xys4PG-CoMj0TV9uXoYJM901lbB6 yDT27ggtxjhEaw4zXjQ8

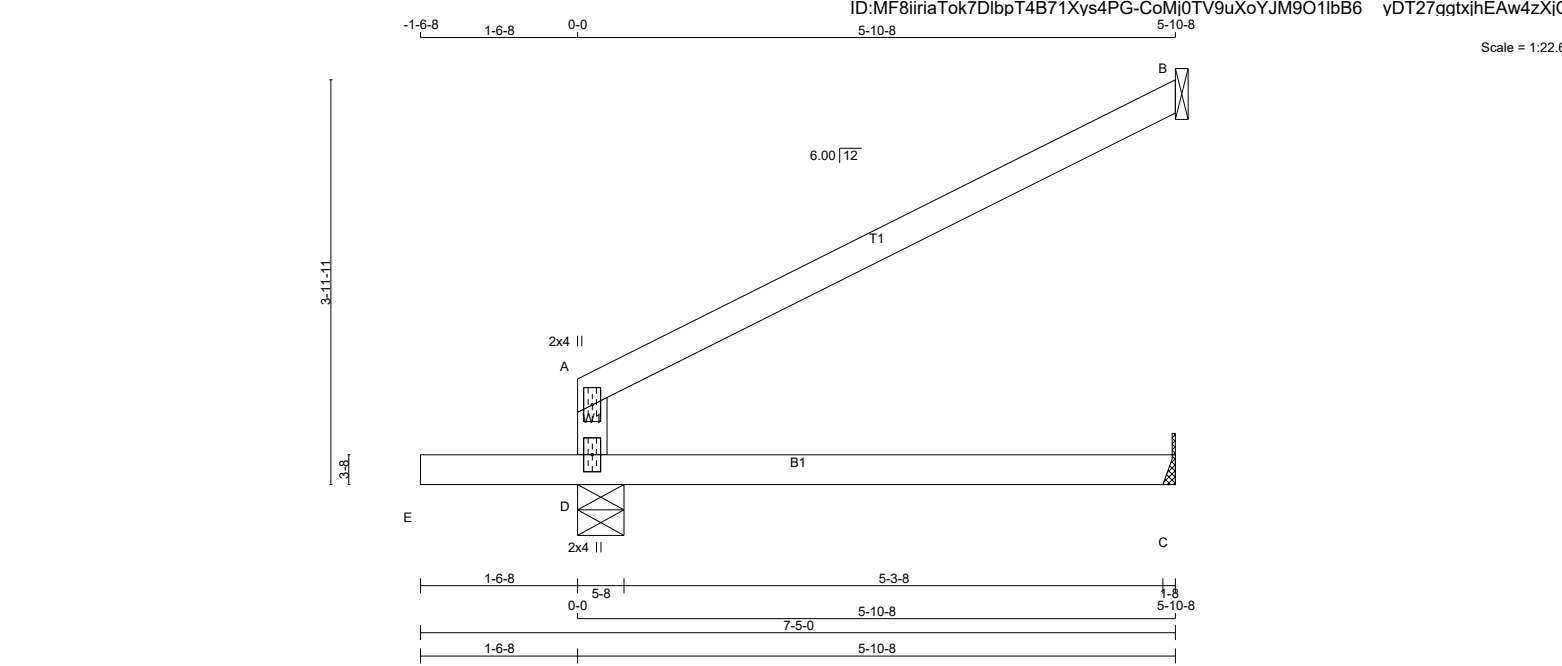

TOTAL WEIGHT = 5 X 17 = 84 lb [M]

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	DRY	LUMBER
D - A	2x4	DRY	No.2
A - B	2x4	DRY	No.2
E - C	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)			
JT	TYPE	PLATES	W LEN Y X
A	TMV+p	MT20	2.0 4.0
D	BMV1+p	MT20	2.0 4.0

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
D	489	0	489	0	0
B	186	0	186	0	0
C	41	0	46	0	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT C. MINIMUM BEARING LENGTH AT JOINT C = 1-8.

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) B

UNFACTORED REACTIONS

1ST LCASE	MAX./MIN. COMPONENT REACTIONS
JT	COMBINED SNOW LIVE PERM.LIVE WIND DEAD SOIL
D	349 211 / 0 0 / 0 0 / 0 138 / 0 0 / 0
B	129 100 / 0 0 / 0 0 / 0 29 / 0 0 / 0
C	33 0 / 0 0 / 0 0 / 0 33 / 0 0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) D, B

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	MAX. FACTORED LC1 MAX. (CSI (LC))	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH	FR-TO
FR-TO		FROM TO					
D-A	-272 / 0	0.0	0.0 0.34 (1)				7.81
A-B	-19 / 0	-78.0	-78.0 0.34 (1)				6.25
E-D	0 / 0	-96.5	-96.5 0.16 (1)				10.00
D-C	0 / 0	-18.5	-18.5 0.19 (4)				10.00

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 21.0 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(TL)= L/360 (0.20")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.02")

CANTILEVER DEFLECTION:
ALLOWABLE DEFL.(LL)= L/120 (0.19")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/120 (0.19")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01")

CSI: TC=0.34/1.00 (A-D:1) , BC=0.19/1.00 (C-D:4) , WB=0.00/1.00 (n/a:0) , SSI=0.19/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.15 (A) (INPUT = 0.90)
JSI METAL= 0.11 (A) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



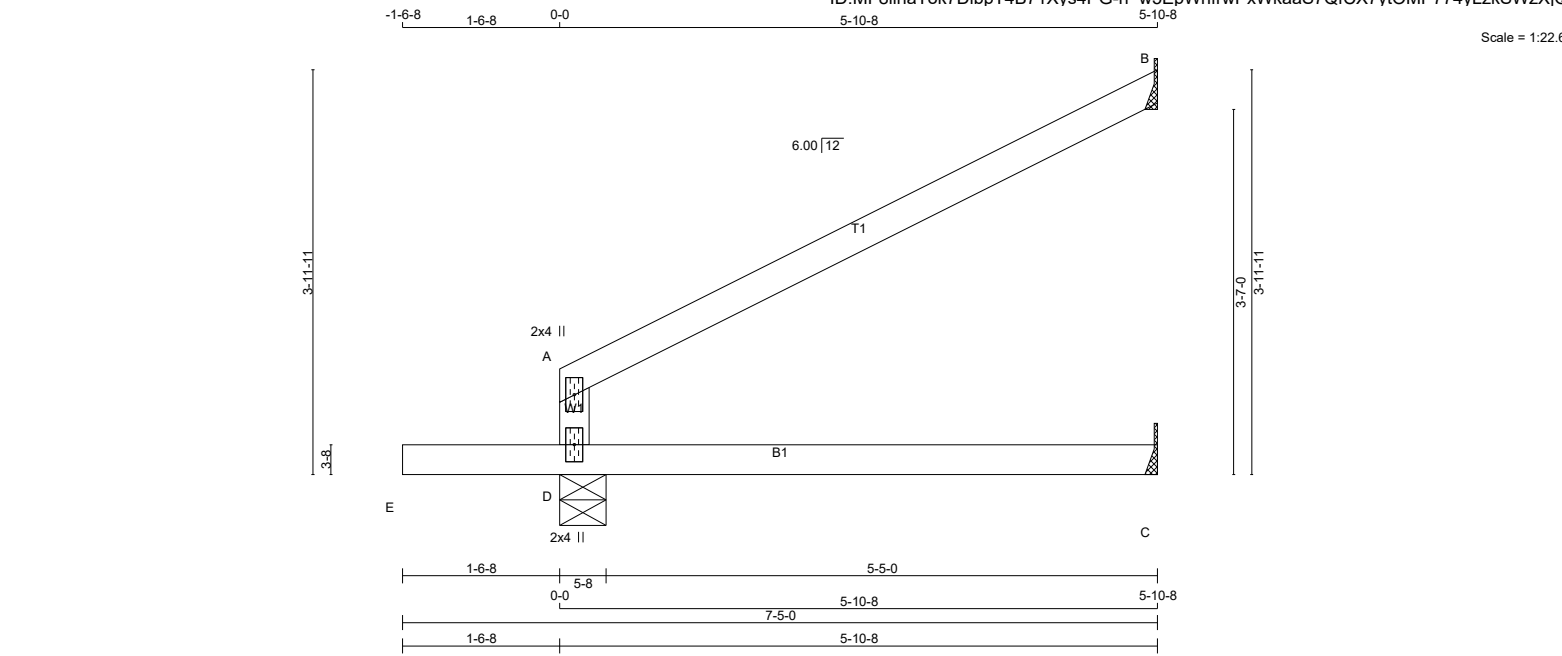

TOTAL WEIGHT = 5 X 17 = 84 lb [M]

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	DRY
D - A	2x4	DRY	No.2
A - B	2x4	DRY	No.2
E - C	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)			
JT	TYPE	PLATES	W L E N Y X
A	TMV+p	MT20	2.0 4.0
D	BMV1+p	MT20	2.0 4.0

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG	
JT		VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	
D		489	0	489	0	0	5-8	1-8	
B		186	0	186	0	0	MECHANICAL		
C		41	0	46	0	0	MECHANICAL		

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT B, C. MINIMUM BEARING LENGTH AT JOINT B = 1-8, JOINT C = 1-8.

BEVELED PLATE OR SHIM REQUIRED TO PROVIDE FULL BEARING SURFACE WITH TRUSS CHORD AT JT(S): B

UNFACTORED REACTIONS		1ST LCASE		MAX./MIN. COMPONENT REACTIONS	
JT		COMBINED		SNOW	LIVE
D		349	211 / 0	0 / 0	0 / 0
B		129	100 / 0	0 / 0	0 / 0
C		33	0 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) D

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS		MAX. FACTORED FORCE (LBS)		FACTORED VERT. LOAD LC1 (PLF)		MAX. CS1 (LC)		WEBS		MAX. FACTORED FORCE (LBS)		MAX. CS1 (LC)	
MEMB.								MEMB.					
FR-TO								FR-TO					
D-A		-272 / 0	0.0	0.0	0.34 (1)	7.81							
A-B		-19 / 0	-78.0	-78.0	0.34 (1)	6.25							
E-D		0 / 0	-96.5	-96.5	0.16 (1)	10.00							
D-C		0 / 0	-18.5	-18.5	0.19 (4)	10.00							

DESIGN CRITERIA

SPECIFIED LOADS:			
TOP CH.	LL	=	21.0 PSF
	DL	=	6.0 PSF
BOT CH.	LL	=	0.0 PSF
	DL	=	7.4 PSF
TOTAL LOAD = 34.4 PSF			

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(TL)= L/360 (0.20")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.02")

CANTILEVER DEFLECTION:
ALLOWABLE DEFL.(LL)= L/120 (0.19")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/120 (0.19")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01")

CSI: TC=0.34/1.00 (A-D:1) , BC=0.19/1.00 (C-D:4) , WB=0.00/1.00 (n/a:0) , SSI=0.19/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES			
PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788	1987 1873


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.15 (A) (INPUT = 0.90)
JSI METAL= 0.11 (A) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



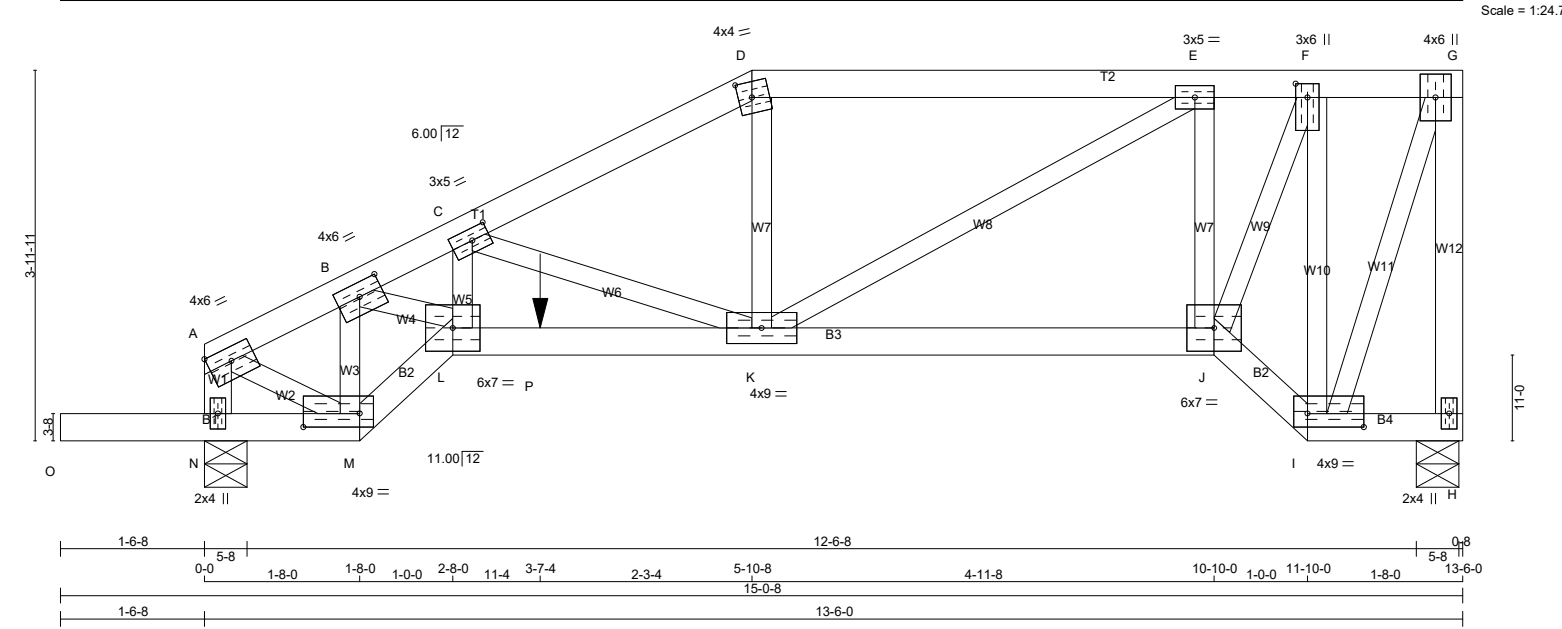

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY No.2	SPF
D - G	2x4	DRY No.2	SPF
H - G	2x4	DRY No.2	SPF
N - A	2x4	DRY No.2	SPF
O - M	2x4	DRY No.2	SPF
M - L	2x4	DRY No.2	SPF
L - J	2x4	DRY No.2	SPF
J - I	2x4	DRY No.2	SPF
I - H	2x4	DRY No.2	SPF
ALL WEBS EXCEPT	2x3	DRY No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMVW-t	MT20	4.0	6.0	1.75 Edge
B	TMWW-t	MT20	4.0	6.0	1.75 3.00
C	TMWW-t	MT20	3.0	5.0	1.50 2.25
D	TTW-m	MT20	4.0	4.0	2.00 1.75
E	TMWW-t	MT20	3.0	5.0	
F	TMWW-t	MT20	3.0	6.0	1.75 1.50
G	TMVW-p	MT20	4.0	6.0	
H	BMV1+p	MT20	2.0	4.0	
I	BBWW-l	MT20	4.0	9.0	1.75 7.25
J	BBWW-l	MT20	6.0	7.0	
K	BMWWW-t	MT20	4.0	9.0	
L	BBWW-l	MT20	6.0	7.0	
M	BBWW-l	MT20	4.0	9.0	1.75 7.25
N	BMV1+p	MT20	2.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	UP	IN-SX
H	1346	0	1346	0	5-8
N	1522	0	1522	0	5-8

UNFACTORED REACTIONS		1ST LCASE	MAX./MIN. COMPONENT REACTIONS
JT	COMBINED	SNOW	LIVE PERM.LIVE
H	958	592 / 0	0 / 0
N	1084	665 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H, N

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.78 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS		WEBS	
MEMB.	MAX. FACTORED FORCE (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)
FR-TO		FR-TO	
A-B	-1449 / 0	M-B	-1636 / 0
B-C	-3109 / 0	B-L	0 / 1825
C-D	-2038 / 0	L-C	0 / 625
D-E	-1845 / 0	C-K	-979 / 0
E-F	-1116 / 0	K-D	0 / 634
F-G	-532 / 0	K-E	0 / 807
H-G	-1316 / 0	J-E	-840 / 0
N-A	-1273 / 0	J-F	0 / 1680
O-N	0 / 0	I-F	-1529 / 0
N-M	-1 / 0	I-G	0 / 1283
M-L	0 / 1587	A-M	0 / 1394
L-P	0 / 2739		
P-K	0 / 2739		
K-J	0 / 1148		
J-I	0 / 663		
I-H	0 / 0		

FACTORED CONCENTRATED LOADS (LBS)		FACE	DIR.	TYPE	HEEL	CONN.
JT	LOC.	LC1	MAX-	MAX+	FRONT	VERT
P	3-7-4	-432	-432	---	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:	
TOP CH.	LL = 21.0 PSF
	DL = 6.0 PSF
BOT CH.	LL = 0.0 PSF
	DL = 7.4 PSF
TOTAL LOAD	= 34.4 PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

GIRDER TYPE: CStdGirder
START DISTANCE = 3-7-4
START SPAN CARRIED = 5-10-8
END DISTANCE = 11-10-0
END SPAN CARRIED = 5-10-8
END WALL WIDTH = 0-0
APPLIED TO FRONT SIDE OF BOTTOM CHORD.
- ADDTL LOADS BASED ON 55 % OF GSL.

GIRDER TYPE: CPrimeHip
LEFT SETBACK = 5-10-8
RIGHT SETBACK = 0-0
END SETBACK = 5-10-8
END WALL WIDTH = 0-0
CORNER FRAMING TYPE: CONVENTIONAL
END JACK TYPE: CONVENTIONAL
APPLIED TO FRONT SIDE
- ADDTL LOADS BASED ON 55 % OF GSL.
LOADS APPLIED TO FIRST 1-8-0 OF SPAN MEASURED FROM THE RIGHT.

*** NON STANDARD GIRDER ***
ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD


ALLOWABLE DEFL.(LL)= L/360 (0.45")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.08")
ALLOWABLE DEFL.(TL)= L/360 (0.45")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.16")

CANTILEVER DEFLECTION:
ALLOWABLE DEFL.(LL)= L/120 (0.19")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/120 (0.19")

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 14:02:17 2020 Page 1



PLATE ROTATION TOL. = 5.0 Deg.
JSI GRIP= 0.89 (J) (INPUT = 0.90)
JSI METAL= 0.61 (T) (INPUT = 1.00)

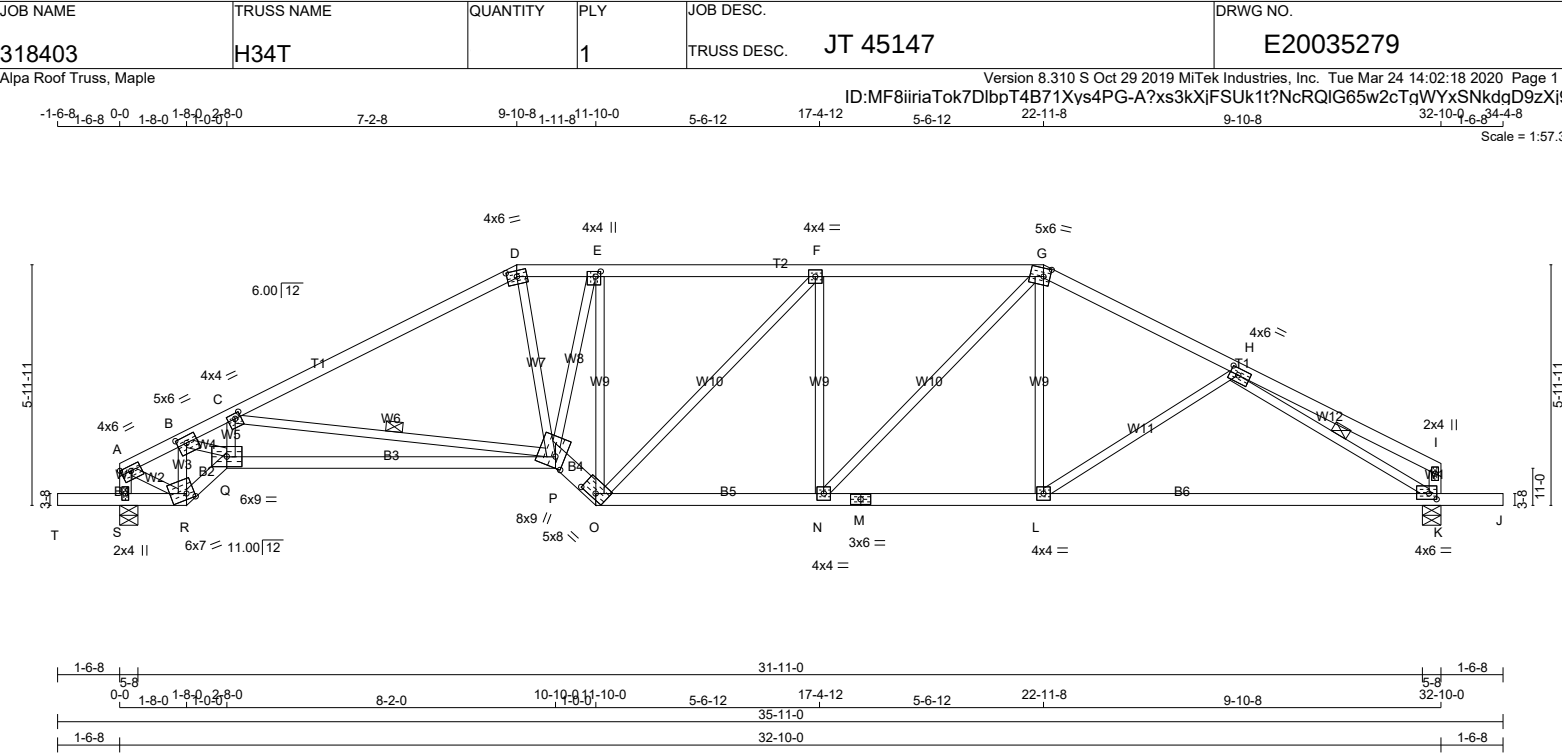

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY No.2	SPF
D - G	2x4	DRY No.2	SPF
G - I	2x4	DRY No.2	SPF
S - A	2x4	DRY No.2	SPF
K - I	2x4	DRY No.2	SPF
T - R	2x4	DRY No.2	SPF
R - Q	2x4	DRY No.2	SPF
Q - P	2x4	DRY No.2	SPF
P - O	2x6	DRY No.2	SPF
O - M	2x4	DRY No.2	SPF
M - J	2x4	DRY No.2	SPF
ALL WEBS EXCEPT	2x3	DRY No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW-t	MT20	4.0	6.0	1.50	3.00
B	TMWW-t	MT20	5.0	6.0	2.00	2.75
C	TMWW-t	MT20	4.0	4.0	1.50	1.75
D	TTW-m	MT20	4.0	6.0	1.75	3.00
E	TMWW-t	MT20	4.0	4.0	1.50	1.50
F	TMWW-t	MT20	4.0	4.0		
G	TTWW-m	MT20	5.0	6.0	2.50	2.00
H	TMWW-t	MT20	4.0	6.0	2.00	2.50
I	TMV+p	MT20	2.0	4.0		
K	BMVW1-t	MT20	4.0	6.0	1.75	2.25
L	BMWW-t	MT20	4.0	4.0		
M	BS-t	MT20	3.0	6.0		
N	BMWW-t	MT20	4.0	4.0		
O	BBWW-h	MT20	5.0	8.0	1.50	4.50
P	BMBWWW+m	MT20	8.0	9.0	3.25	2.75
Q	BBWW-l	MT20	6.0	9.0		
R	BBWW-m	MT20	6.0	7.0	1.75	2.25
S	BMV1+p	MT20	2.0	4.0		

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	DOWN	IN-SX	IN-SX
S	1736	0	5-8	2-9
K	1729	0	5-8	1-13

UNFACTORED REACTIONS

1ST LCASE	MAX./MIN. COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
S	1238	755 / 0	0 / 0	0 / 0	0 / 0	482 / 0	0 / 0
K	1233	752 / 0	0 / 0	0 / 0	0 / 0	480 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.10 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-P, H-K.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING
TOTAL LOAD CASES: (4)

C H O R D S					W E B S				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH	FR-TO	CS (LC)
FR-TO		FROM	TO		FR-TO				
A - B	-1692 / 0	-78.0	-78.0	0.16 (1)	4.97	R - B	-1910 / 0		0.28 (1)
B - C	-3891 / 0	-78.0	-78.0	0.49 (1)	3.10	B - Q	0 / 2559		0.58 (1)
C - D	-2554 / 0	-78.0	-78.0	0.69 (1)	3.67	Q - C	0 / 153		0.05 (4)
D - E	-2443 / 0	-78.0	-78.0	0.17 (1)	4.27	C - P	-1362 / 0		0.61 (1)
E - F	-2150 / 0	-78.0	-78.0	0.34 (1)	4.32	D - P	0 / 884		0.20 (1)
F - G	-2319 / 0	-78.0	-78.0	0.36 (1)	4.17	P - E	0 / 1411		0.32 (1)
G - H	-2195 / 0	-78.0	-78.0	0.29 (1)	4.35	O - E	-1681 / 0		0.93 (1)
H - I	0 / 18	-78.0	-78.0	0.28 (1)	10.00	O - F	-240 / 0		0.30 (1)
S - A	-1503 / 0	0.0	0.0	0.15 (1)	6.70	N - F	-330 / 0		0.18 (1)
K - I	-156 / 0	0.0	0.0	0.02 (1)	7.81	N - G	0 / 528		0.12 (1)
						L - G	0 / 281		0.07 (4)
T - S	0 / 0	-96.5	-96.5	0.16 (1)	10.00	L - H	-177 / 10		0.11 (1)
S - R	-1 / 0	-18.5	-18.5	0.12 (1)	10.00	A - R	0 / 1609		0.36 (1)
R - Q	0 / 1830	-18.5	-18.5	0.30 (1)	10.00	H - K	-2489 / 0		0.64 (1)
Q - P	0 / 3615	-18.5	-18.5	0.79 (1)	10.00				
P - O	0 / 2875	-18.5	-18.5	0.34 (1)	10.00				
O - N	0 / 2320	-18.5	-18.5	0.46 (1)	10.00				
N - M	0 / 1950	-18.5	-18.5	0.58 (4)	10.00				
M - L	0 / 1950	-18.5	-18.5	0.58 (4)	10.00				
L - K	0 / 2092	-18.5	-18.5	0.57 (4)	10.00				
K - J	0 / 0	-96.5	-96.5	0.16 (1)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL =	21.0	PSF
	DL =	6.0	PSF
BOT CH.	LL =	0.0	PSF
	DL =	7.4	PSF
TOTAL LOAD	=	34.4	PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.09")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.17")
ALLOWABLE DEFL.(TL)= L/360 (1.09")
CALCULATED VERT. DEFL.(TL)= L/ 809 (0.49")

CANTILEVER DEFLECTION:
ALLOWABLE DEFL.(LL)= L/120 (0.19")
CALCULATED VERT. DEFL.(LL)= L/ 344 (0.05")
ALLOWABLE DEFL.(TL)= L/120 (0.19")
CALCULATED VERT. DEFL.(TL)= L/ 177 (0.10")

CSI: TC=0.69/1.00 (C-D:1), BC=0.79/1.00 (P-Q:1), WB=0.93/1.00 (E-O:1), SSI=0.29/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE LEFT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES


PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
	MAX	MIN	MAX
MT20	650	371	1747
	788		1987
			1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (C) (INPUT = 0.90)
JSI METAL= 0.56 (M) (INPUT = 1.00)

Scale = 1:57.3



PATTERN-LOADING CHECK APPLIED TO THIS TRUSS

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318403	H42TA		3	TRUSS DESC. JT 45147	E20035280(2)

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW-t	MT20	4.0	6.0	2.00	2.25
B	TMWW-t	MT20	4.0	4.0	2.00	1.75
C	TMWW-t	MT20	4.0	4.0	1.75	1.75
D	TMWW-t	MT20	4.0	4.0	1.50	1.25
E	TTWW+m	MT20	4.0	6.0	Edge	
F	TMWWW-t	MT20	5.0	14.0	1.50	7.00
G	TMWW+t	MT20	4.0	4.0	1.50	1.50
H	TTW-m	MT20	4.0	4.0		
I	TMWW-t	MT20	4.0	4.0	1.50	1.50
J	TMVW-p	MT20	5.0	6.0	2.00	2.75
L	BMV1+p	MT20	2.0	4.0		
M	BMWW-t	MT20	5.0	6.0	2.75	2.75
N	BMWWW-t	MT20	5.0	8.0	2.25	4.00
O	BS-t	MT20	4.0	6.0		
P	BMWW+t	MT20	4.0	6.0	2.25	1.50
Q	BMW1+t	MT20	6.0	9.0	Edge	3.00
R	BBWW-h	MT20	6.0	7.0	2.75	2.25
S	BBWW-l	MT20	7.0	8.0	1.00	4.00
T	BMWW+t	MT20	4.0	6.0		
U	BBWW-l	MT20	7.0	8.0	4.50	4.00
V	BBWW-h	MT20	7.0	8.0	3.00	4.00
W	BMV1+p	MT20	2.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (G) (INPUT = 0.90)

JSI METAL= 0.58 (P) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318403	J04T		1	TRUSS DESC. JT 45147	E20035281

Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 14:02:21 2020 Page 1

ID:MF8iiriaTok7DlbpT4B71Xys4PG-bad?hmZcYNsluKijlZ Sukjacqelj63u3irKqUzXj9G

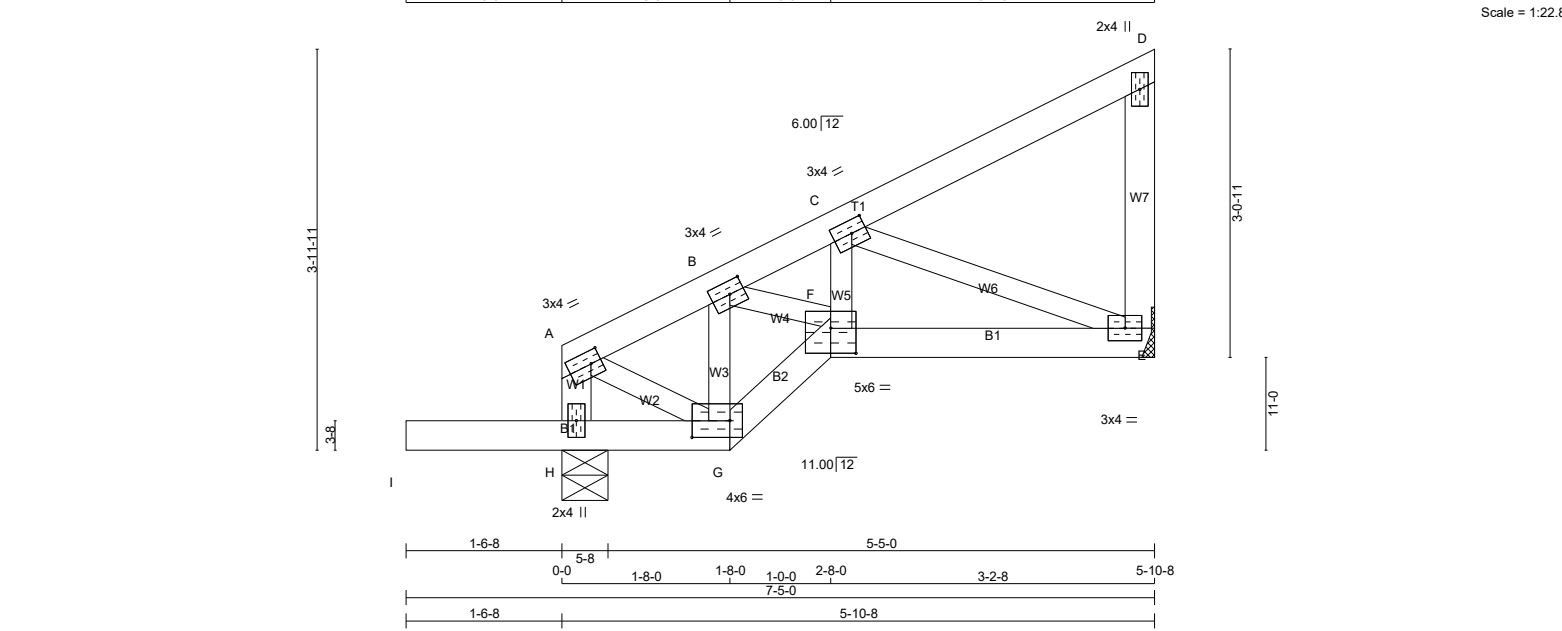

TOTAL WEIGHT = 3 X 26 = 79 lb

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
H - A	2x4	DRY	No.2
A - D	2x4	DRY	No.2
E - D	2x4	DRY	No.2
I - G	2x4	DRY	No.2
G - F	2x4	DRY	No.2
F - E	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
DRY: SEASONED LUMBER.			

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMVW-t	MT20	3.0	4.0	1.50 1.25
B	TMWW-t	MT20	3.0	4.0	1.50 1.75
C	TMWW-t	MT20	3.0	4.0	1.50 1.75
D	TMV+p	MT20	2.0	4.0	
E	BMVW1-t	MT20	3.0	4.0	
F	BBWW-I	MT20	5.0	6.0	3.00 3.00
G	BBWW-I	MT20	4.0	6.0	2.00 4.50
H	BMV1+p	MT20	2.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM	FACTORED	INPUT	REQRD
		GROSS REACTION	GROSS REACTION	DOWN	BRG	BRG
JT	VERT	HORZ	HORZ	UPLIFT	IN-SX	IN-SX
H	452	0	452	0	5-8	1-8
E	264	0	264	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

UNFACTORED REACTIONS

JT	1ST LCASE	MAX./MIN. COMPONENT REACTIONS					
		COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD
H	322	197 / 0	0 / 0	0 / 0	0 / 0	0 / 0	125 / 0
E	188	115 / 0	0 / 0	0 / 0	0 / 0	0 / 0	73 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)
FR-TO		FROM	TO		FR-TO		
H-A	-219 / 0	0.0	0.0 0.02 (1)	7.81	A-G	0 / 184	0.04 (1)
A-B	-191 / 0	-78.0	-78.0 0.03 (1)	6.25	G-B	-256 / 0	0.04 (1)
B-C	-376 / 0	-78.0	-78.0 0.08 (1)	6.25	B-F	0 / 230	0.05 (1)
C-D	-8 / 0	-78.0	-78.0 0.09 (1)	10.00	F-C	0 / 76	0.02 (4)
E-D	-102 / 0	0.0	0.0 0.02 (1)	7.81	C-E	-375 / 0	0.08 (1)
I-H	0 / 0	-96.5	-96.5 0.16 (1)	10.00			
H-G	-1 / 0	-18.5	-18.5 0.16 (1)	10.00			
G-F	0 / 206	-18.5	-18.5 0.04 (1)	10.00			
F-E	0 / 350	-18.5	-18.5 0.09 (1)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:			
TOP CH.	LL	=	21.0 PSF
	DL	=	6.0 PSF
BOT CH.	LL	=	0.0 PSF
	DL	=	7.4 PSF
TOTAL LOAD = 34.4 PSF			

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.20")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.20")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01")

CANTILEVER DEFLECTION:
ALLOWABLE DEFL.(LL)= L/120 (0.19")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/120 (0.19")
CALCULATED VERT. DEFL.(TL) = L/ 681 (0.03")

CSI: TC=0.09/1.00 (C-D:1) , BC=0.16/1.00 (G-H:1) , WB=0.08/1.00 (C-E:1) , SSI=0.12/1.00 (H-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES					
PLATE	GRIP(DRY)	SHEAR	SECTION		
	(PS)	(PLI)	(PLI)		
	MAX MIN	MAX MIN	MAX MIN		
MT20	650	371	1747	788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.50 (E) (INPUT = 0.90)
JSI METAL= 0.12 (E) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318403	J04TA		1	TRUSS DESC. JT 45147	E20035282

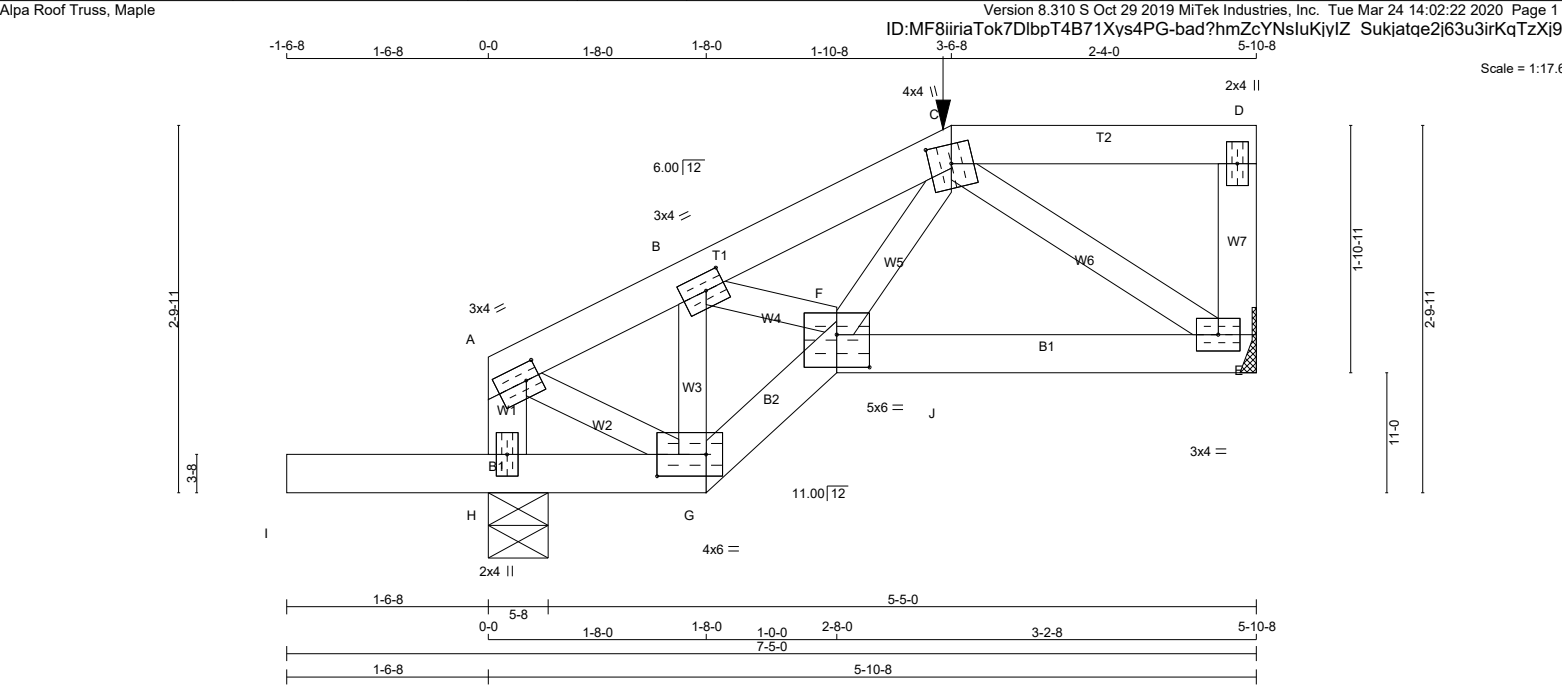

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
A - C	2x4	DRY	No.2	SPF
C - D	2x4	DRY	No.2	SPF
E - D	2x4	DRY	No.2	SPF
H - A	2x4	DRY	No.2	SPF
I - G	2x4	DRY	No.2	SPF
G - F	2x4	DRY	No.2	SPF
F - E	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW-t	MT20	3.0	4.0	1.50	1.25
B	TMWW-t	MT20	3.0	4.0	1.50	1.75
C	TTWW+m	MT20	4.0	4.0	1.75	2.00
D	TMV+p	MT20	2.0	4.0		
E	BMVW1-t	MT20	3.0	4.0		
F	BBWW-I	MT20	5.0	6.0	3.00	3.00
G	BBWW-I	MT20	4.0	6.0	2.00	4.50
H	BMV1+p	MT20	2.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT DOWN	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
E	398	0	398	0	0
H	524	0	524	0	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

UNFACTORED REACTIONS

1ST LCASE	MAX./MIN. COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
E	283	176 / 0	0 / 0	0 / 0	0 / 0	107 / 0	0 / 0
H	374	224 / 0	0 / 0	0 / 0	0 / 0	150 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED FORCE (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)	
FR-TO		FROM TO	CSI (LC)	UNBRAC LENGTH	FR-TO		CSI (LC)	
A-B	-280 / 0	-78.0	-78.0	0.03 (1)	6.25	G-B	-354 / 0	0.06 (1)
B-C	-489 / 0	-78.0	-78.0	0.05 (1)	6.25	B-F	0 / 229	0.06 (1)
C-D	0 / 0	-73.5	-73.5	0.07 (1)	10.00	F-C	0 / 220	0.05 (1)
E-D	-86 / 0	0.0	0.0	0.01 (1)	7.81	C-E	-394 / 0	0.08 (1)
H-A	-285 / 0	0.0	0.0	0.03 (1)	7.81	A-G	0 / 276	0.07 (1)
I-H	0 / 0	-96.5	-96.5	0.17 (1)	10.00			
H-G	-1 / 0	-25.6	-25.6	0.17 (1)	10.00			
G-F	0 / 312	-25.6	-25.6	0.06 (1)	10.00			
F-J	0 / 326	-25.6	-25.6	0.16 (1)	10.00			
J-E	0 / 326	-60.1	-60.1	0.16 (1)	10.00			

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	3-6-8	-94	-94	---	FRONT	VERT	TOTAL	---	C1

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	21.0	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	34.4	PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

GIRDER TYPE: CPrimeHip
LEFT SETBACK = 3-6-8
RIGHT SETBACK = 0-0
END SETBACK = 3-6-8
END WALL WIDTH = 0-0
CORNER FRAMING TYPE: CONVENTIONAL
END JACK TYPE: PARTIAL
APPLIED TO FRONT SIDE
- ADDTL LOADS BASED ON 55 % OF GSL.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.20")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/360 (0.20")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.02")

CANTILEVER DEFLECTION:
ALLOWABLE DEFL.(LL)= L/120 (0.19")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/120 (0.19")
CALCULATED VERT. DEFL.(TL) = L/ 704 (0.03")

CSI: TC=0.07/1.00 (C-D:1), BC=0.17/1.00 (G-H:1), WB=0.08/1.00 (C-E:1), SSI=0.13/1.00 (H-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS= 1.00


COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



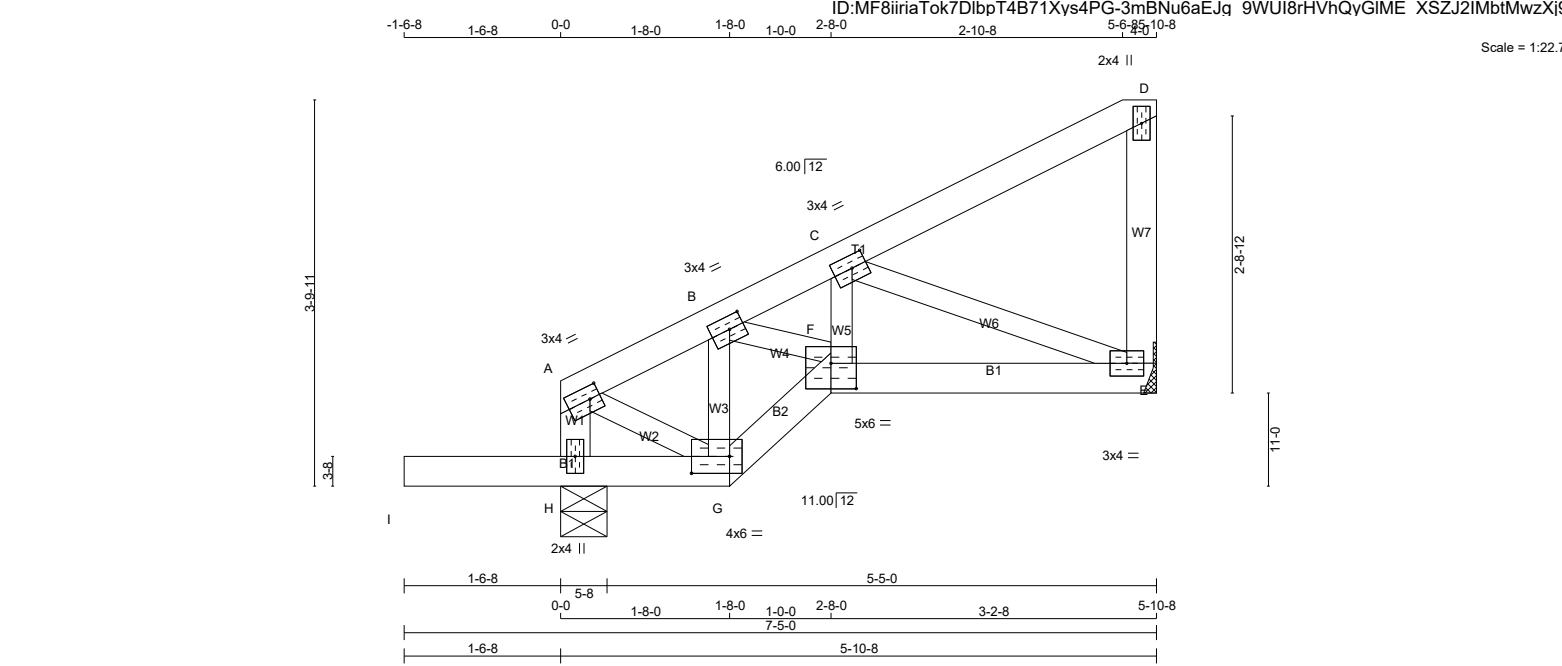

TOTAL WEIGHT = 26 lb

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - D	2x4	DRY	No.2
E - D	2x4	DRY	No.2
H - A	2x4	DRY	No.2
I - G	2x4	DRY	No.2
G - F	2x4	DRY	No.2
F - E	2x4	DRY	No.2

ALL WEBS 2x3 DRY No.2 EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT TYPE	PLATES	W	LEN	Y	X
A	TMVW-t	MT20	3.0	4.0	1.50 1.25
B	TMWW-t	MT20	3.0	4.0	1.50 1.75
C	TMWW-t	MT20	3.0	4.0	1.50 1.75
D	TMV+p	MT20	2.0	4.0	
E	BMVW1-t	MT20	3.0	4.0	
F	BBWW-I	MT20	5.0	6.0	3.00 3.00
G	BBWW-I	MT20	4.0	6.0	2.00 4.50
H	BMV1+p	MT20	2.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	REQRD
JT	GROSS REACTION	GROSS REACTION	DOWN	BRG	BRG
JT	VERT	HORZ	HORZ	UPLIFT	IN-SX
E	264	0	264	0	MECHANICAL
H	452	0	452	0	5-8 1-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

UNFACTORED REACTIONS

JT	1ST LCASE	MAX/MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
E	188	115 / 0	0 / 0	0 / 0	0 / 0	0 / 0	73 / 0	0 / 0
H	322	197 / 0	0 / 0	0 / 0	0 / 0	0 / 0	125 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS		WEBS	
MEMB.	MAX. FACTORED FORCE (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)
FR-TO		FR-TO	
A-B	-191 / 0	G-B	-256 / 0
B-C	-376 / 0	B-F	0 / 230
C-D	-8 / 0	F-C	0 / 76
E-D	-102 / 0	C-E	-375 / 0
H-A	-219 / 0	A-G	0 / 184
I-H	0 / 0		
H-G	-1 / 0		
G-F	0 / 206		
F-E	0 / 350		

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	21.0	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD	=	34.4	PSF	

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.20")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.20")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01")

CANTILEVER DEFLECTION:
ALLOWABLE DEFL.(LL)= L/120 (0.19")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/120 (0.19")
CALCULATED VERT. DEFL.(TL) = L/ 681 (0.03")

CSI: TC=0.09/1.00 (C-D:1) , BC=0.16/1.00 (G-H:1) ,
WB=0.08/1.00 (C-E:1) , SSI=0.12/1.00 (H-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.50 (E) (INPUT = 0.90)
JSI METAL= 0.12 (E) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H1		1	TRUSS DESC. JT 45147	E20035295

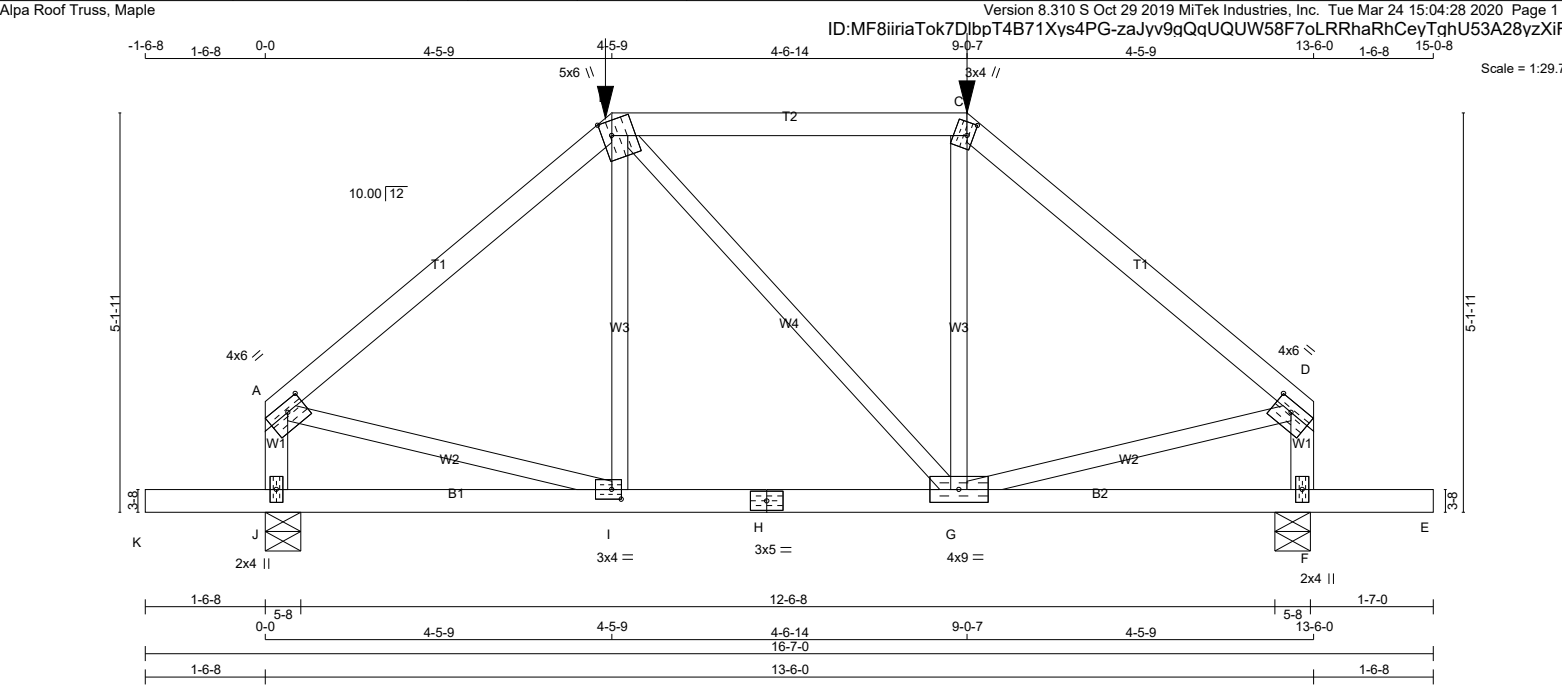


LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER A - B 2x4 DRY No.2 B - C 2x4 DRY No.2 C - D 2x4 DRY No.2 J - A 2x4 DRY No.2 F - D 2x4 DRY No.2 K - H 2x4 DRY No.2 H - E 2x4 DRY No.2 ALL WEBS 2x3 DRY No.2 EXCEPT DRY: SEASONED LUMBER.				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS <table><tr><th></th><th>FACTORED GROSS REACTION</th><th>MAXIMUM FACTORED GROSS REACTION</th><th>INPUT BRG</th><th>REQRD BRG</th></tr><tr><th>JT</th><th>VERT</th><th>HORZ</th><th>DOWN</th><th>HORZ</th><th>UPLIFT</th><th>IN-SX</th><th>IN-SX</th></tr><tr><td>J</td><td>1244</td><td>0</td><td>1244</td><td>0</td><td>0</td><td>5-8</td><td>1-13</td></tr><tr><td>F</td><td>1244</td><td>0</td><td>1244</td><td>0</td><td>0</td><td>5-8</td><td>1-13</td></tr></table> UNFACTORED REACTIONS <table><tr><th>JT</th><th>1ST LCASE COMBINED</th><th>MAX./MIN. COMPONENT REACTIONS</th><th>SNOW</th><th>LIVE</th><th>PERM.LIVE</th><th>WIND</th><th>DEAD</th><th>SOIL</th></tr><tr><td>J</td><td>888</td><td>534 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>354 / 0</td><td>0 / 0</td></tr><tr><td>F</td><td>888</td><td>534 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>354 / 0</td><td>0 / 0</td></tr></table> BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) J, F BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.68 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. LOADING TOTAL LOAD CASES: (4) <table><tr><th colspan="4">CHORDS</th><th colspan="4">WEBS</th></tr><tr><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>FACTORED VERT. (PLF)</th><th>MAX. FACTORED LC1 (LC)</th><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>MAX. FACTORED LC1 (LC)</th><th></th></tr><tr><td>FR-TO</td><td></td><td>FROM</td><td>TO</td><td>FR-TO</td><td></td><td></td><td></td></tr><tr><td>A - B</td><td>-1054 / 0</td><td>-78.0</td><td>-78.0 0.33 (1)</td><td>5.68</td><td>I - B</td><td>0 / 133</td><td>0.05 (4)</td></tr><tr><td>B - C</td><td>-810 / 0</td><td>-89.1</td><td>-89.1 0.37 (1)</td><td>6.16</td><td>B - G</td><td>0 / 0</td><td>0.00 (1)</td></tr><tr><td>C - D</td><td>-1054 / 0</td><td>-78.0</td><td>-78.0 0.33 (1)</td><td>5.68</td><td>G - C</td><td>0 / 133</td><td>0.05 (4)</td></tr><tr><td>J - A</td><td>-1043 / 0</td><td>0.0</td><td>0.0 0.12 (1)</td><td>7.66</td><td>A - I</td><td>0 / 830</td><td>0.21 (1)</td></tr><tr><td>F - D</td><td>-1043 / 0</td><td>0.0</td><td>0.0 0.12 (1)</td><td>7.66</td><td>G - D</td><td>0 / 830</td><td>0.21 (1)</td></tr><tr><td>K - J</td><td>0 / 0</td><td>-96.5</td><td>-96.5 0.17 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>J - I</td><td>0 / 0</td><td>-33.0</td><td>-33.0 0.19 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>I - H</td><td>0 / 809</td><td>-83.1</td><td>-83.1 0.30 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>H - G</td><td>0 / 809</td><td>-83.1</td><td>-83.1 0.30 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>G - F</td><td>0 / 0</td><td>-33.0</td><td>-33.0 0.19 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>F - E</td><td>0 / 0</td><td>-96.5</td><td>-96.5 0.17 (1)</td><td>10.00</td><td></td><td></td><td></td></tr></table> FACTORED CONCENTRATED LOADS (LBS) <table><tr><th>JT</th><th>LOC.</th><th>LC1</th><th>MAX-</th><th>MAX+</th><th>FACE</th><th>DIR.</th><th>TYPE</th><th>HEEL</th><th>CONN.</th></tr><tr><td>B</td><td>4-5-9</td><td>-211</td><td>-211</td><td>---</td><td>FRONT</td><td>VERT</td><td>TOTAL</td><td>---</td><td>C1</td></tr><tr><td>C</td><td>9-0-7</td><td>-211</td><td>-211</td><td>---</td><td>FRONT</td><td>VERT</td><td>TOTAL</td><td>---</td><td>C1</td></tr></table>					FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG	JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	J	1244	0	1244	0	0	5-8	1-13	F	1244	0	1244	0	0	5-8	1-13	JT	1ST LCASE COMBINED	MAX./MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL	J	888	534 / 0	0 / 0	0 / 0	0 / 0	0 / 0	354 / 0	0 / 0	F	888	534 / 0	0 / 0	0 / 0	0 / 0	0 / 0	354 / 0	0 / 0	CHORDS				WEBS				MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. (PLF)	MAX. FACTORED LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED LC1 (LC)		FR-TO		FROM	TO	FR-TO				A - B	-1054 / 0	-78.0	-78.0 0.33 (1)	5.68	I - B	0 / 133	0.05 (4)	B - C	-810 / 0	-89.1	-89.1 0.37 (1)	6.16	B - G	0 / 0	0.00 (1)	C - D	-1054 / 0	-78.0	-78.0 0.33 (1)	5.68	G - C	0 / 133	0.05 (4)	J - A	-1043 / 0	0.0	0.0 0.12 (1)	7.66	A - I	0 / 830	0.21 (1)	F - D	-1043 / 0	0.0	0.0 0.12 (1)	7.66	G - D	0 / 830	0.21 (1)	K - J	0 / 0	-96.5	-96.5 0.17 (1)	10.00				J - I	0 / 0	-33.0	-33.0 0.19 (4)	10.00				I - H	0 / 809	-83.1	-83.1 0.30 (1)	10.00				H - G	0 / 809	-83.1	-83.1 0.30 (1)	10.00				G - F	0 / 0	-33.0	-33.0 0.19 (4)	10.00				F - E	0 / 0	-96.5	-96.5 0.17 (1)	10.00				JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.	B	4-5-9	-211	-211	---	FRONT	VERT	TOTAL	---	C1	C	9-0-7	-211	-211	---	FRONT	VERT	TOTAL	---	C1	DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM GIRDER TYPE: CPrimeHip SIDE SETBACK = 4-5-9 END SETBACK = 5-1-11 END WALL WIDTH = 0-0 CORNER FRAMING TYPE: CONVENTIONAL END JACK TYPE: PARTIAL APPLIED TO FRONT SIDE - ADDT'L LOADS BASED ON 55 % OF GSL. THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF CBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD ALLOWABLE DEFL.(LL)= L/360 (0.45") CALCULATED VERT. DEFL.(LL) = L/ 999 (0.03") ALLOWABLE DEFL.(TL)= L/360 (0.45") CALCULATED VERT. DEFL.(TL) = L/ 999 (0.05") CANTILEVER DEFLECTION: ALLOWABLE DEFL.(LL)= L/120 (0.19") CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01") ALLOWABLE DEFL.(TL)= L/120 (0.19") CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01") CSI: TC=0.37/1.00 (B-C:1) , BC=0.30/1.00 (G-I:1) , WB=0.21/1.00 (D-G:1) , SI=0.17/1.00 (B-C:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00 COMP=1.00 SHEAR=1.00 TENS= 1.00 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg.			
	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG																																																																																																																																																																																																													
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX																																																																																																																																																																																																										
J	1244	0	1244	0	0	5-8	1-13																																																																																																																																																																																																										
F	1244	0	1244	0	0	5-8	1-13																																																																																																																																																																																																										
JT	1ST LCASE COMBINED	MAX./MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL																																																																																																																																																																																																									
J	888	534 / 0	0 / 0	0 / 0	0 / 0	0 / 0	354 / 0	0 / 0																																																																																																																																																																																																									
F	888	534 / 0	0 / 0	0 / 0	0 / 0	0 / 0	354 / 0	0 / 0																																																																																																																																																																																																									
CHORDS				WEBS																																																																																																																																																																																																													
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. (PLF)	MAX. FACTORED LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED LC1 (LC)																																																																																																																																																																																																											
FR-TO		FROM	TO	FR-TO																																																																																																																																																																																																													
A - B	-1054 / 0	-78.0	-78.0 0.33 (1)	5.68	I - B	0 / 133	0.05 (4)																																																																																																																																																																																																										
B - C	-810 / 0	-89.1	-89.1 0.37 (1)	6.16	B - G	0 / 0	0.00 (1)																																																																																																																																																																																																										
C - D	-1054 / 0	-78.0	-78.0 0.33 (1)	5.68	G - C	0 / 133	0.05 (4)																																																																																																																																																																																																										
J - A	-1043 / 0	0.0	0.0 0.12 (1)	7.66	A - I	0 / 830	0.21 (1)																																																																																																																																																																																																										
F - D	-1043 / 0	0.0	0.0 0.12 (1)	7.66	G - D	0 / 830	0.21 (1)																																																																																																																																																																																																										
K - J	0 / 0	-96.5	-96.5 0.17 (1)	10.00																																																																																																																																																																																																													
J - I	0 / 0	-33.0	-33.0 0.19 (4)	10.00																																																																																																																																																																																																													
I - H	0 / 809	-83.1	-83.1 0.30 (1)	10.00																																																																																																																																																																																																													
H - G	0 / 809	-83.1	-83.1 0.30 (1)	10.00																																																																																																																																																																																																													
G - F	0 / 0	-33.0	-33.0 0.19 (4)	10.00																																																																																																																																																																																																													
F - E	0 / 0	-96.5	-96.5 0.17 (1)	10.00																																																																																																																																																																																																													
JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.																																																																																																																																																																																																								
B	4-5-9	-211	-211	---	FRONT	VERT	TOTAL	---	C1																																																																																																																																																																																																								
C	9-0-7	-211	-211	---	FRONT	VERT	TOTAL	---	C1																																																																																																																																																																																																								
LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2				TOTAL WEIGHT = 60 lb [M]																																																																																																																																																																																																													
				CONTINUED ON PAGE 2																																																																																																																																																																																																													

Scale = 1:36.2



JSI GRIP= 0.62 (G) (INPUT = 0.90)
JSI METAL= 0.18 (D) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H3		1	TRUSS DESC. JT 45147	E20035297

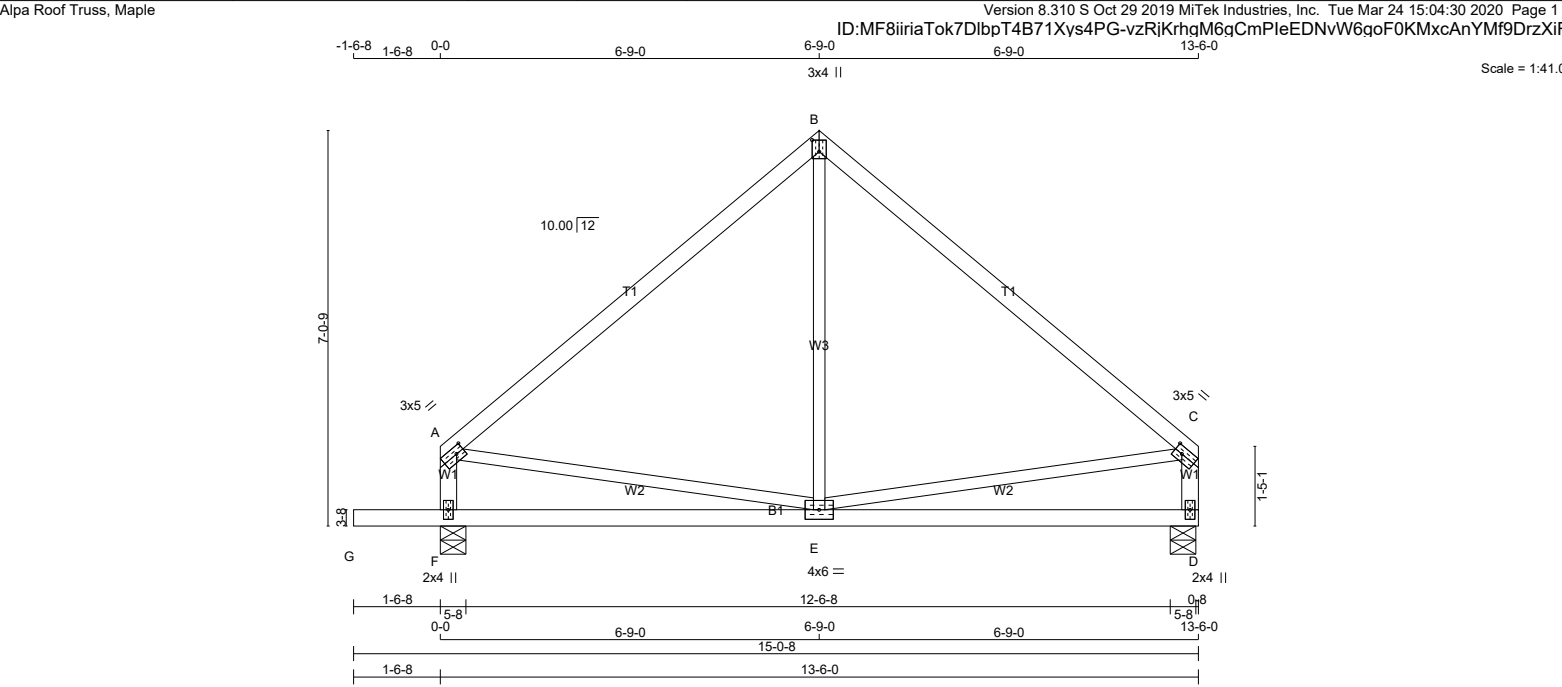

LUMBER				
N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - B	2x4	DRY	2100F 1.8E	SPF
B - C	2x4	DRY	2100F 1.8E	SPF
F - A	2x4	DRY	No.2	SPF
D - C	2x4	DRY	No.2	SPF
G - D	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
EXCEPT				
DRY: SEASONED LUMBER.				

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMVW-t	MT20	3.0	5.0	1.50 1.75
B	TTW+p	MT20	3.0	4.0	2.50 1.50
C	TMVW-t	MT20	3.0	5.0	1.50 1.75
D	BMV1+p	MT20	2.0	4.0	
E	BMWWW-t	MT20	4.0	6.0	
F	BMV1+p	MT20	2.0	4.0	

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
D	651	0	651	0	0
F	800	0	800	0	0

UNFACTORED REACTIONS		1ST LCASE	MAX./MIN. COMPONENT REACTIONS				
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
D	464	283 / 0	0 / 0	0 / 0	0 / 0	181 / 0	0 / 0
F	570	348 / 0	0 / 0	0 / 0	0 / 0	222 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) D, F

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING		TOTAL LOAD CASES: (4)			
		CHORDS		WEBS	
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRAC LENGTH	MEMB. MAX. FACTORED FORCE (LBS) MAX CSI (LC)
FR-TO		FROM	TO		FR-TO
A-B	-446 / 0	-78.0	-78.0 0.30 (1)	6.25	E-B 0 / 128 0.04 (4)
B-C	-446 / 0	-78.0	-78.0 0.30 (1)	6.25	A-E 0 / 347 0.08 (1)
F-A	-604 / 0	0.0	0.0 0.06 (1)	7.81	E-C 0 / 347 0.08 (1)
D-C	-604 / 0	0.0	0.0 0.06 (1)	7.81	
G-F	0 / 0	-96.5	-96.5 0.16 (1)	10.00	
F-E	0 / 0	-18.5	-18.5 0.24 (4)	10.00	
E-D	0 / 0	-18.5	-18.5 0.24 (4)	10.00	

DESIGN CRITERIA

SPECIFIED LOADS:			
TOP	CH.	LL	= 21.0 PSF
	DL	=	6.0 PSF
BOT	CH.	LL	= 0.0 PSF
	DL	=	7.4 PSF
TOTAL LOAD = 34.4 PSF			

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.45")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.45")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.05")

CANTILEVER DEFLECTION:
ALLOWABLE DEFL.(LL)= L/120 (0.19")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/120 (0.19")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01")

CSI: TC=0.30/1.00 (A-B:1) , BC=0.24/1.00 (E-F:4) , WB=0.08/1.00 (C-E:1) , SSI=0.16/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .


NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.51 (A) (INPUT = 0.90)
JSI METAL= 0.18 (A) (INPUT = 1.00)

Scale = 1:56.5



JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN
J	27-4-10	-397	-397	---	FRONT	VERT	TOTAL	---	C1

AUTOSOLVE HEELS OFF

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H41A		3	TRUSS DESC. JT 45147	E20035298(2)

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMV+p	MT20	2.0	4.0		
B	TMWW-t	MT20	4.0	6.0	1.75	2.00
C	TTWW-m	MT20	5.0	6.0	2.00	2.25
D	TMWW-t	MT20	4.0	4.0	1.50	2.00
E	TMW+w	MT20	2.0	4.0		
F	TMWW+t	MT20	4.0	6.0	2.00	2.00
G	TS-t	MT20	3.0	6.0		
H	TMW+w	MT20	2.0	4.0		
I	TMWW-t	MT20	4.0	4.0	1.50	2.00
J	TTWW-m	MT20	5.0	6.0	2.00	2.25
K	TMWW-t	MT20	4.0	6.0	1.75	2.00
L	TMV+p	MT20	2.0	4.0		
N	BMVW1-t	MT20	5.0	6.0	2.50	2.75
O	BMWW+t	MT20	4.0	6.0		
P	BMWW-t	MT20	4.0	4.0	2.00	1.50
Q	BS-t	MT20	4.0	6.0		
R	BMWWW+t	MT20	8.0	9.0	Edge	4.00
S	BMWWW1+t	MT20	8.0	9.0	Edge	4.00
T	BS-t	MT20	4.0	6.0		
U	BMWW-t	MT20	4.0	4.0	2.00	1.50
V	BMWW+t	MT20	4.0	6.0		
W	BMVW1-t	MT20	5.0	6.0	2.50	2.75

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

PATTERN-LOADING CHECK APPLIED TO THIS TRUSS.

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PS)	(PL)	(PL)
	MAX	MIN	MAX MIN
MT20	650	371	1747 788 1987 1873


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (B) (INPUT = 0.90)
JSI METAL= 0.94 (F) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



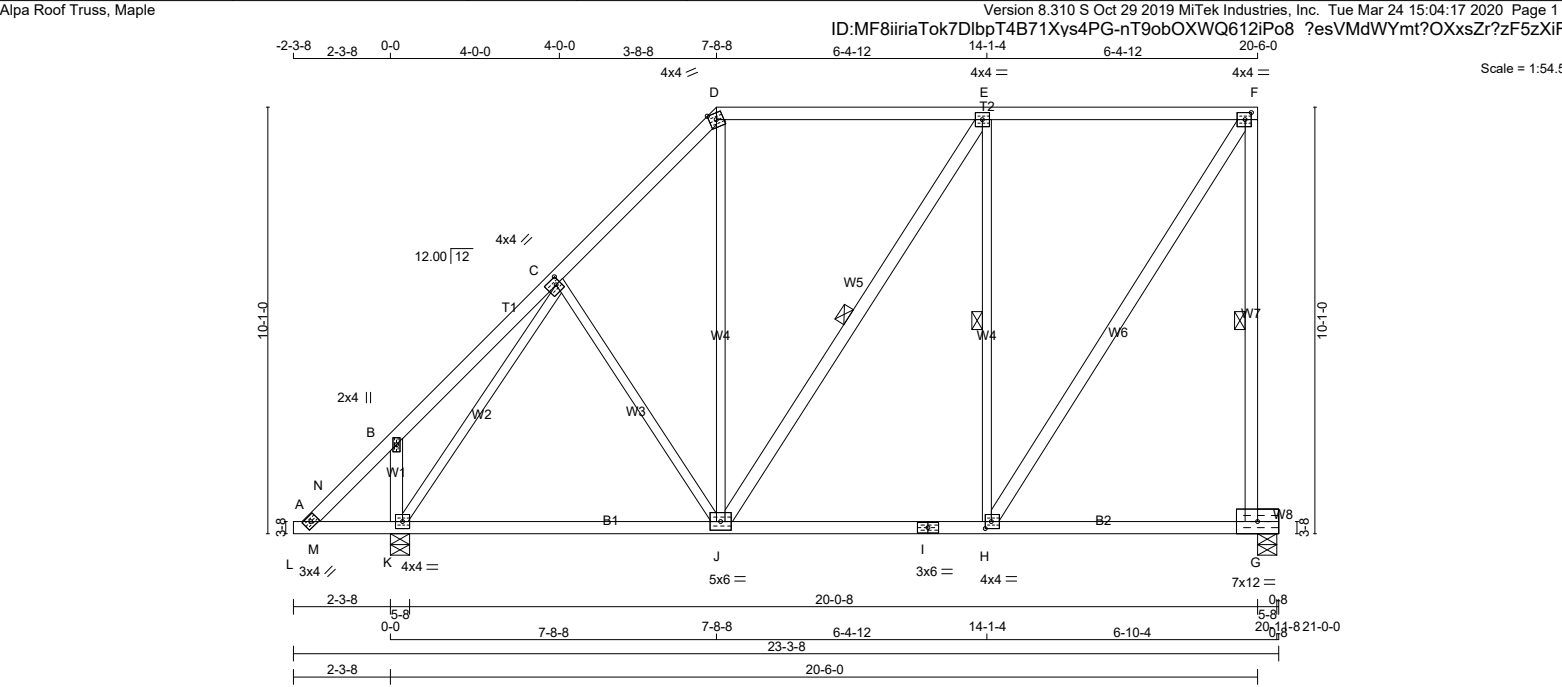

LUMBER

N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF
D - F	2x4	DRY	No.2	SPF
G - F	2x4	DRY	No.2	SPF
K - B	2x4	DRY	No.2	SPF
L - I	2x4	DRY	No.2	SPF
I - G	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF
J - E	2x4	DRY	No.2	SPF
H - F	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TBM-h	MT20	3.0	4.0		
B	TMV+p	MT20	2.0	4.0		
C	TMWW-t	MT20	4.0	4.0	2.00	1.25
D	TTW-m	MT20	4.0	4.0		Edge
E	TMWW-t	MT20	4.0	4.0		
F	TMVW-t	MT20	4.0	4.0	2.00	1.75
G	BMVW1-t	MT20	7.0	12.0		
H	BMWW-t	MT20	4.0	4.0	2.00	1.75
I	BS-t	MT20	3.0	6.0		
J	BMWWW-t	MT20	5.0	6.0		
K	BMVW1-t	MT20	4.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	IN-SX
G	1044	0	1044	0
K	1238	0	1238	0

UNFACTORED REACTIONS

JT	1ST LCASE	MAX./MIN. COMPONENT REACTIONS	DEAD	SOIL
JT	COMBINED	SNOW	LIVE	PERM.LIVE
G	750	426 / 0	0 / 0	0 / 0
K	886	522 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) G, K

BRACING

FOR SECTION D-F, MAX. PURLIN SPACING = 2.00 FT.

FOR OTHER SECTIONS, TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF F-G, E-J, E-H.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. LC1 CSI (LC)
FR-TO		FROM TO			FR-TO		
A-N	0 / 41	-78.0 -78.0	0.04 (4)	10.00	J-D	0 / 177	0.05 (4)
N-B	-15 / 52	-78.0 -78.0	0.13 (1)	6.25	J-E	-21 / 0	0.02 (1)
B-C	-16 / 25	-78.0 -78.0	0.16 (1)	6.25	H-E	-661 / 0	0.46 (1)
C-D	-734 / 0	-78.0 -78.0	0.14 (1)	6.25	H-F	0 / 943	0.15 (1)
D-E	-504 / 0	-85.5 -85.5	0.45 (1)	2.00	K-C	-984 / 0	0.91 (1)
E-F	-516 / 0	-85.5 -85.5	0.45 (1)	2.00	C-J	-40 / 21	0.04 (1)
G-F	-996 / 0	0.0 0.0	0.49 (1)	6.25	M-N	-70 / 0	0.00 (1)
K-B	-258 / 0	0.0 0.0	0.03 (1)	7.81			
L-A	0 / 0	-33.5 -33.5	0.00 (4)	10.00			
A-M	-15 / 12	-18.5 -18.5	0.02 (4)	6.25			
M-K	-15 / 12	-18.5 -18.5	0.21 (4)	6.25			
K-J	0 / 525	-18.5 -18.5	0.26 (4)	10.00			
J-I	0 / 516	-18.5 -18.5	0.23 (4)	10.00			
I-H	0 / 516	-18.5 -18.5	0.23 (4)	10.00			
H-G	0 / 0	-18.5 -18.5	0.17 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	21.0	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD	=	34.4	PSF	

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON PIGGYBACK TRUSS WITH SLOPES OF 6.00/12 AND -6.00/12 AND RESPECTIVE WALL HEIGHTS OF 0-0 AND 0-0 AND AN ADDITIONAL DEAD LOAD OF 3.0 P.S.F.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018 , ABC 2019

- PART 9 OF OBC 2012 (2019 AMENDMENT)

- CSA 086-14

- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.68")

CALCULATED VERT. DEFL.(LL) = L/ 999 (0.02")

ALLOWABLE DEFL.(TL)= L/360 (0.68")

CALCULATED VERT. DEFL.(TL) = L/ 999 (0.07")

CANTILEVER DEFLECTION:

ALLOWABLE DEFL.(LL)= L/1319 (0.19")

CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")

ALLOWABLE DEFL.(TL)= L/1319 (0.19")

CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01")

CSI: TC=0.49/1.00 (F-G:1), BC=0.26/1.00 (J-K:4), WB=0.91/1.00 (C-K:1), SSI=0.27/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PSI)	(PLI)	(PLI)
	MAX	MIN	MAX
MT20	650	371	1747


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.81 (C) (INPUT = 0.90)

JSI METAL= 0.33 (C) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	G1G		1	TRUSS DESC. JT 45147	E20035300

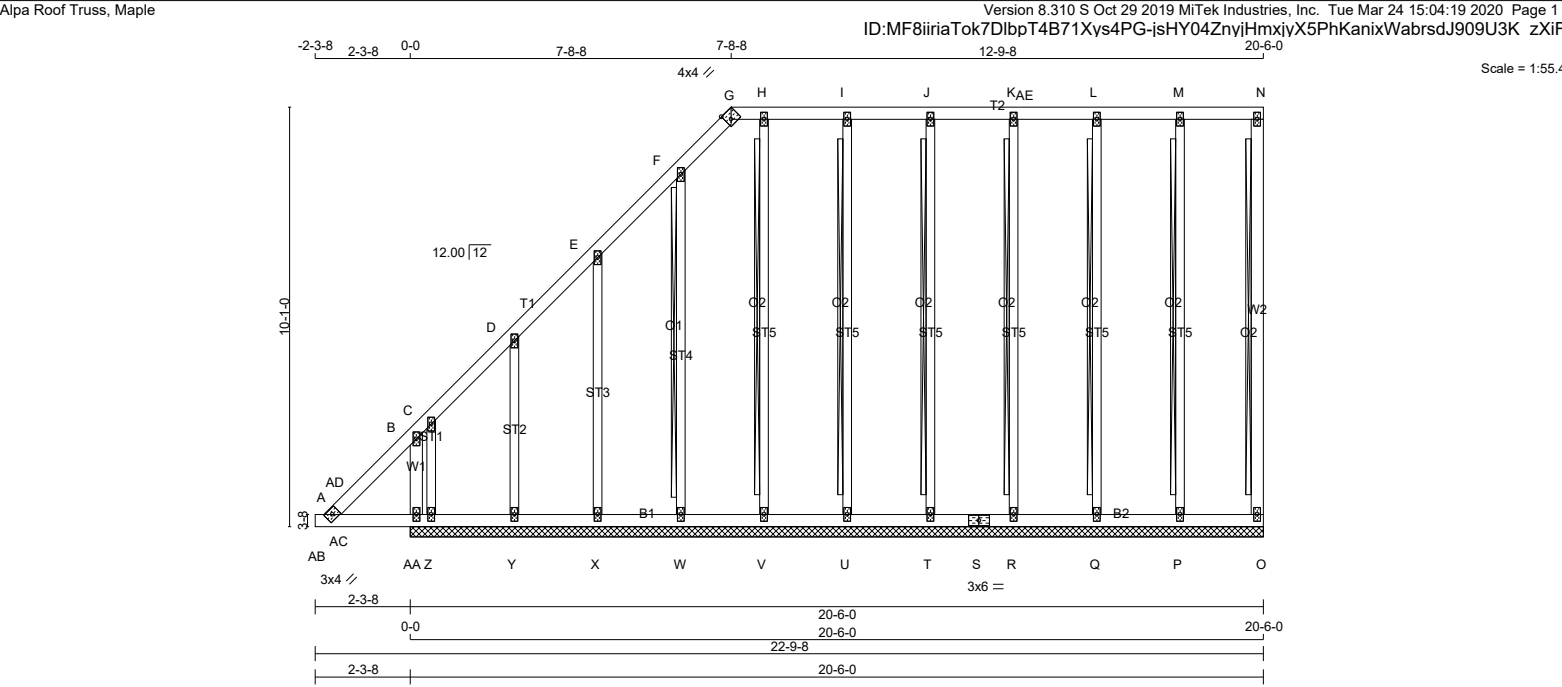


LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. AA- B 2x4 DRY No.2 SPF A - G 2x4 DRY No.2 SPF G - N 2x4 DRY No.2 SPF O - N 2x4 DRY No.2 SPF AB- S 2x4 DRY No.2 SPF S - O 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF ALL GABLE WEBS 2x3 DRY No.2 SPF DRY: SEASONED LUMBER. GABLE STUDS SPACED AT 2-0-0 OC.					DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS. THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE. <u>PROVIDE ANCHORAGE AT BEARING JOINT Z FOR 382 LBS. FACTORED UPLIFT BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S)</u> BRACING FOR SECTION G-N, MAX. PURLIN SPACING = 2.00 FT. FOR OTHER SECTIONS, TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. 2x4 DRY SPF No.2 T-BRACE AT N-O, M-P, L-Q, K-R, J-T, I-U, H-V, F-W FASTEN T AND I-BRACES TO NARROW EDGE OF WEB WITH ONE ROW PER PLY OF 3" COMMON WIRE NAILS @ 6" O.C. WITH 3" MINIMUM END DISTANCE. BRACE MUST COVER 90% OF WEB LENGTH. END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW LOADING TOTAL LOAD CASES: (4)					DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN./C LOADING IN FLAT SECTION BASED ON PIGGYBACK TRUSS WITH SLOPES OF 6.00/12 AND -6.00/12 AND RESPECTIVE WALL HEIGHTS OF 0-0 AND 0-0 AND AN ADDITIONAL DEAD LOAD OF 3.0 P.S.F. THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF BCBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD CSI: TC=0.14/1.00 (B-AD:1) , BC=0.17/1.00 (AA-AC:1) , WB=0.15/1.00 (H-V:1) , SSI=0.22/1.00 (Z-AA:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.41 (G) (INPUT = 0.90) JSI METAL= 0.18 (B) (INPUT = 1.00)																																																																																																																																																																																																																																																			
PLATES (table is in inches) JT TYPE PLATES W LEN Y X A TBM-h MT20 3.0 4.0 B TMV+p MT20 2.0 4.0 C, D, E, F, H, I, J, K, L, M C TMW+w MT20 2.0 4.0 G TT-h MT20 4.0 4.0 Edge 1.50 N TMV+p MT20 2.0 4.0 O BMV1+p MT20 2.0 4.0 P, Q, R, T, U, V, W, X, Y, Z P BMW1+w MT20 2.0 4.0 S BS-t MT20 3.0 6.0 AA BMV1+p MT20 2.0 4.0 Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.					<table><tr><th colspan="3">CHORDS</th><th colspan="3">WEBS</th></tr><tr><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>FACTORED VERT. LOAD (PLF)</th><th>MAX UNBRACED LENGTH (LC)</th><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>MAX UNBRACED LENGTH (LC)</th></tr><tr><td>FR-TO</td><td></td><td>FROM TO</td><td></td><td>FR-TO</td><td></td><td></td></tr><tr><td>AA- B</td><td>-347 / 0</td><td>0.0 0.0</td><td>0.04 (1) 7.81</td><td>P- M</td><td>-187 / 0</td><td>0.15 (1)</td></tr><tr><td>A-AD</td><td>0 / 26</td><td>-78.0 -78.0</td><td>0.02 (1) 10.00</td><td>Q- L</td><td>-170 / 0</td><td>0.14 (1)</td></tr><tr><td>AD- B</td><td>0 / 31</td><td>-78.0 -78.0</td><td>0.14 (1) 10.00</td><td>R- K</td><td>-171 / 0</td><td>0.14 (1)</td></tr><tr><td>B- C</td><td>-155 / 0</td><td>-78.0 -78.0</td><td>0.14 (1) 6.25</td><td>T- J</td><td>-173 / 0</td><td>0.14 (1)</td></tr><tr><td>C- D</td><td>-8 / 0</td><td>-78.0 -78.0</td><td>0.04 (1) 10.00</td><td>U- I</td><td>-158 / 0</td><td>0.13 (1)</td></tr><tr><td>D- E</td><td>-7 / 0</td><td>-78.0 -78.0</td><td>0.04 (1) 10.00</td><td>V- H</td><td>-190 / 0</td><td>0.15 (1)</td></tr><tr><td>E- F</td><td>0 / 0</td><td>-78.0 -78.0</td><td>0.04 (1) 10.00</td><td>W- F</td><td>-156 / 0</td><td>0.09 (1)</td></tr><tr><td>F- G</td><td>-18 / 0</td><td>-78.0 -78.0</td><td>0.04 (1) 6.25</td><td>X- E</td><td>-148 / 0</td><td>0.12 (1)</td></tr><tr><td>G- H</td><td>0 / 2</td><td>-85.5 -85.5</td><td>0.07 (1) 2.00</td><td>Y- D</td><td>-159 / 0</td><td>0.06 (1)</td></tr><tr><td>H- I</td><td>0 / 0</td><td>-85.5 -85.5</td><td>0.06 (1) 10.00</td><td>Z- C</td><td>0 / 121</td><td>0.03 (1)</td></tr><tr><td>I- J</td><td>0 / 0</td><td>-85.5 -85.5</td><td>0.04 (1) 10.00</td><td>AC-AD</td><td>-80 / 0</td><td>0.00 (1)</td></tr><tr><td>J-AE</td><td>0 / 0</td><td>-85.5 -85.5</td><td>0.04 (1) 10.00</td><td></td><td></td><td></td></tr><tr><td>AE- K</td><td>0 / 0</td><td>-85.5 -85.5</td><td>0.04 (1) 10.00</td><td></td><td></td><td></td></tr><tr><td>K- L</td><td>0 / 0</td><td>-85.5 -85.5</td><td>0.04 (1) 10.00</td><td></td><td></td><td></td></tr><tr><td>L- M</td><td>0 / 0</td><td>-85.5 -85.5</td><td>0.04 (1) 10.00</td><td></td><td></td><td></td></tr><tr><td>M- N</td><td>0 / 0</td><td>-85.5 -85.5</td><td>0.04 (1) 10.00</td><td></td><td></td><td></td></tr><tr><td>O- N</td><td>-70 / 0</td><td>0.0 0.0</td><td>0.05 (1) 7.81</td><td></td><td></td><td></td></tr><tr><td>AB- A</td><td>0 / 0</td><td>-33.5 -33.5</td><td>0.00 (4) 10.00</td><td></td><td></td><td></td></tr><tr><td>A-AC</td><td>-1 / 3</td><td>-18.5 -18.5</td><td>0.01 (1) 10.00</td><td></td><td></td><td></td></tr><tr><td>AC-AA</td><td>-1 / 3</td><td>-18.5 -18.5</td><td>0.17 (1) 10.00</td><td></td><td></td><td></td></tr><tr><td>AA- Z</td><td>-1 / 3</td><td>-18.5 -18.5</td><td>0.17 (1) 10.00</td><td></td><td></td><td></td></tr><tr><td>Z- Y</td><td>0 / 8</td><td>-18.5 -18.5</td><td>0.02 (4) 10.00</td><td></td><td></td><td></td></tr><tr><td>Y- X</td><td>0 / 4</td><td>-18.5 -18.5</td><td>0.02 (4) 10.00</td><td></td><td></td><td></td></tr><tr><td>X- W</td><td>0 / 2</td><td>-18.5 -18.5</td><td>0.01 (4) 10.00</td><td></td><td></td><td></td></tr><tr><td>W- V</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.01 (4) 10.00</td><td></td><td></td><td></td></tr><tr><td>V- U</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.01 (4) 10.00</td><td></td><td></td><td></td></tr><tr><td>U- T</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.01 (4) 10.00</td><td></td><td></td><td></td></tr><tr><td>T- S</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.01 (4) 10.00</td><td></td><td></td><td></td></tr><tr><td>S- R</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.01 (4) 10.00</td><td></td><td></td><td></td></tr><tr><td>R- Q</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.01 (4) 10.00</td><td></td><td></td><td></td></tr><tr><td>Q- P</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.02 (4) 10.00</td><td></td><td></td><td></td></tr><tr><td>P- O</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.02 (4) 10.00</td><td></td><td></td><td></td></tr></table>					CHORDS			WEBS			MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX UNBRACED LENGTH (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX UNBRACED LENGTH (LC)	FR-TO		FROM TO		FR-TO			AA- B	-347 / 0	0.0 0.0	0.04 (1) 7.81	P- M	-187 / 0	0.15 (1)	A-AD	0 / 26	-78.0 -78.0	0.02 (1) 10.00	Q- L	-170 / 0	0.14 (1)	AD- B	0 / 31	-78.0 -78.0	0.14 (1) 10.00	R- K	-171 / 0	0.14 (1)	B- C	-155 / 0	-78.0 -78.0	0.14 (1) 6.25	T- J	-173 / 0	0.14 (1)	C- D	-8 / 0	-78.0 -78.0	0.04 (1) 10.00	U- I	-158 / 0	0.13 (1)	D- E	-7 / 0	-78.0 -78.0	0.04 (1) 10.00	V- H	-190 / 0	0.15 (1)	E- F	0 / 0	-78.0 -78.0	0.04 (1) 10.00	W- F	-156 / 0	0.09 (1)	F- G	-18 / 0	-78.0 -78.0	0.04 (1) 6.25	X- E	-148 / 0	0.12 (1)	G- H	0 / 2	-85.5 -85.5	0.07 (1) 2.00	Y- D	-159 / 0	0.06 (1)	H- I	0 / 0	-85.5 -85.5	0.06 (1) 10.00	Z- C	0 / 121	0.03 (1)	I- J	0 / 0	-85.5 -85.5	0.04 (1) 10.00	AC-AD	-80 / 0	0.00 (1)	J-AE	0 / 0	-85.5 -85.5	0.04 (1) 10.00				AE- K	0 / 0	-85.5 -85.5	0.04 (1) 10.00				K- L	0 / 0	-85.5 -85.5	0.04 (1) 10.00				L- M	0 / 0	-85.5 -85.5	0.04 (1) 10.00				M- N	0 / 0	-85.5 -85.5	0.04 (1) 10.00				O- N	-70 / 0	0.0 0.0	0.05 (1) 7.81				AB- A	0 / 0	-33.5 -33.5	0.00 (4) 10.00				A-AC	-1 / 3	-18.5 -18.5	0.01 (1) 10.00				AC-AA	-1 / 3	-18.5 -18.5	0.17 (1) 10.00				AA- Z	-1 / 3	-18.5 -18.5	0.17 (1) 10.00				Z- Y	0 / 8	-18.5 -18.5	0.02 (4) 10.00				Y- X	0 / 4	-18.5 -18.5	0.02 (4) 10.00				X- W	0 / 2	-18.5 -18.5	0.01 (4) 10.00				W- V	0 / 0	-18.5 -18.5	0.01 (4) 10.00				V- U	0 / 0	-18.5 -18.5	0.01 (4) 10.00				U- T	0 / 0	-18.5 -18.5	0.01 (4) 10.00				T- S	0 / 0	-18.5 -18.5	0.01 (4) 10.00				S- R	0 / 0	-18.5 -18.5	0.01 (4) 10.00				R- Q	0 / 0	-18.5 -18.5	0.01 (4) 10.00				Q- P	0 / 0	-18.5 -18.5	0.02 (4) 10.00				P- O	0 / 0	-18.5 -18.5	0.02 (4) 10.00			
CHORDS			WEBS																																																																																																																																																																																																																																																										
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX UNBRACED LENGTH (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX UNBRACED LENGTH (LC)																																																																																																																																																																																																																																																							
FR-TO		FROM TO		FR-TO																																																																																																																																																																																																																																																									
AA- B	-347 / 0	0.0 0.0	0.04 (1) 7.81	P- M	-187 / 0	0.15 (1)																																																																																																																																																																																																																																																							
A-AD	0 / 26	-78.0 -78.0	0.02 (1) 10.00	Q- L	-170 / 0	0.14 (1)																																																																																																																																																																																																																																																							
AD- B	0 / 31	-78.0 -78.0	0.14 (1) 10.00	R- K	-171 / 0	0.14 (1)																																																																																																																																																																																																																																																							
B- C	-155 / 0	-78.0 -78.0	0.14 (1) 6.25	T- J	-173 / 0	0.14 (1)																																																																																																																																																																																																																																																							
C- D	-8 / 0	-78.0 -78.0	0.04 (1) 10.00	U- I	-158 / 0	0.13 (1)																																																																																																																																																																																																																																																							
D- E	-7 / 0	-78.0 -78.0	0.04 (1) 10.00	V- H	-190 / 0	0.15 (1)																																																																																																																																																																																																																																																							
E- F	0 / 0	-78.0 -78.0	0.04 (1) 10.00	W- F	-156 / 0	0.09 (1)																																																																																																																																																																																																																																																							
F- G	-18 / 0	-78.0 -78.0	0.04 (1) 6.25	X- E	-148 / 0	0.12 (1)																																																																																																																																																																																																																																																							
G- H	0 / 2	-85.5 -85.5	0.07 (1) 2.00	Y- D	-159 / 0	0.06 (1)																																																																																																																																																																																																																																																							
H- I	0 / 0	-85.5 -85.5	0.06 (1) 10.00	Z- C	0 / 121	0.03 (1)																																																																																																																																																																																																																																																							
I- J	0 / 0	-85.5 -85.5	0.04 (1) 10.00	AC-AD	-80 / 0	0.00 (1)																																																																																																																																																																																																																																																							
J-AE	0 / 0	-85.5 -85.5	0.04 (1) 10.00																																																																																																																																																																																																																																																										
AE- K	0 / 0	-85.5 -85.5	0.04 (1) 10.00																																																																																																																																																																																																																																																										
K- L	0 / 0	-85.5 -85.5	0.04 (1) 10.00																																																																																																																																																																																																																																																										
L- M	0 / 0	-85.5 -85.5	0.04 (1) 10.00																																																																																																																																																																																																																																																										
M- N	0 / 0	-85.5 -85.5	0.04 (1) 10.00																																																																																																																																																																																																																																																										
O- N	-70 / 0	0.0 0.0	0.05 (1) 7.81																																																																																																																																																																																																																																																										
AB- A	0 / 0	-33.5 -33.5	0.00 (4) 10.00																																																																																																																																																																																																																																																										
A-AC	-1 / 3	-18.5 -18.5	0.01 (1) 10.00																																																																																																																																																																																																																																																										
AC-AA	-1 / 3	-18.5 -18.5	0.17 (1) 10.00																																																																																																																																																																																																																																																										
AA- Z	-1 / 3	-18.5 -18.5	0.17 (1) 10.00																																																																																																																																																																																																																																																										
Z- Y	0 / 8	-18.5 -18.5	0.02 (4) 10.00																																																																																																																																																																																																																																																										
Y- X	0 / 4	-18.5 -18.5	0.02 (4) 10.00																																																																																																																																																																																																																																																										
X- W	0 / 2	-18.5 -18.5	0.01 (4) 10.00																																																																																																																																																																																																																																																										
W- V	0 / 0	-18.5 -18.5	0.01 (4) 10.00																																																																																																																																																																																																																																																										
V- U	0 / 0	-18.5 -18.5	0.01 (4) 10.00																																																																																																																																																																																																																																																										
U- T	0 / 0	-18.5 -18.5	0.01 (4) 10.00																																																																																																																																																																																																																																																										
T- S	0 / 0	-18.5 -18.5	0.01 (4) 10.00																																																																																																																																																																																																																																																										
S- R	0 / 0	-18.5 -18.5	0.01 (4) 10.00																																																																																																																																																																																																																																																										
R- Q	0 / 0	-18.5 -18.5	0.01 (4) 10.00																																																																																																																																																																																																																																																										
Q- P	0 / 0	-18.5 -18.5	0.02 (4) 10.00																																																																																																																																																																																																																																																										
P- O	0 / 0	-18.5 -18.5	0.02 (4) 10.00																																																																																																																																																																																																																																																										
LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2																																																																																																																																																																																																																																																													





JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	G2P		1	TRUSS DESC. JT 45147	E20035301

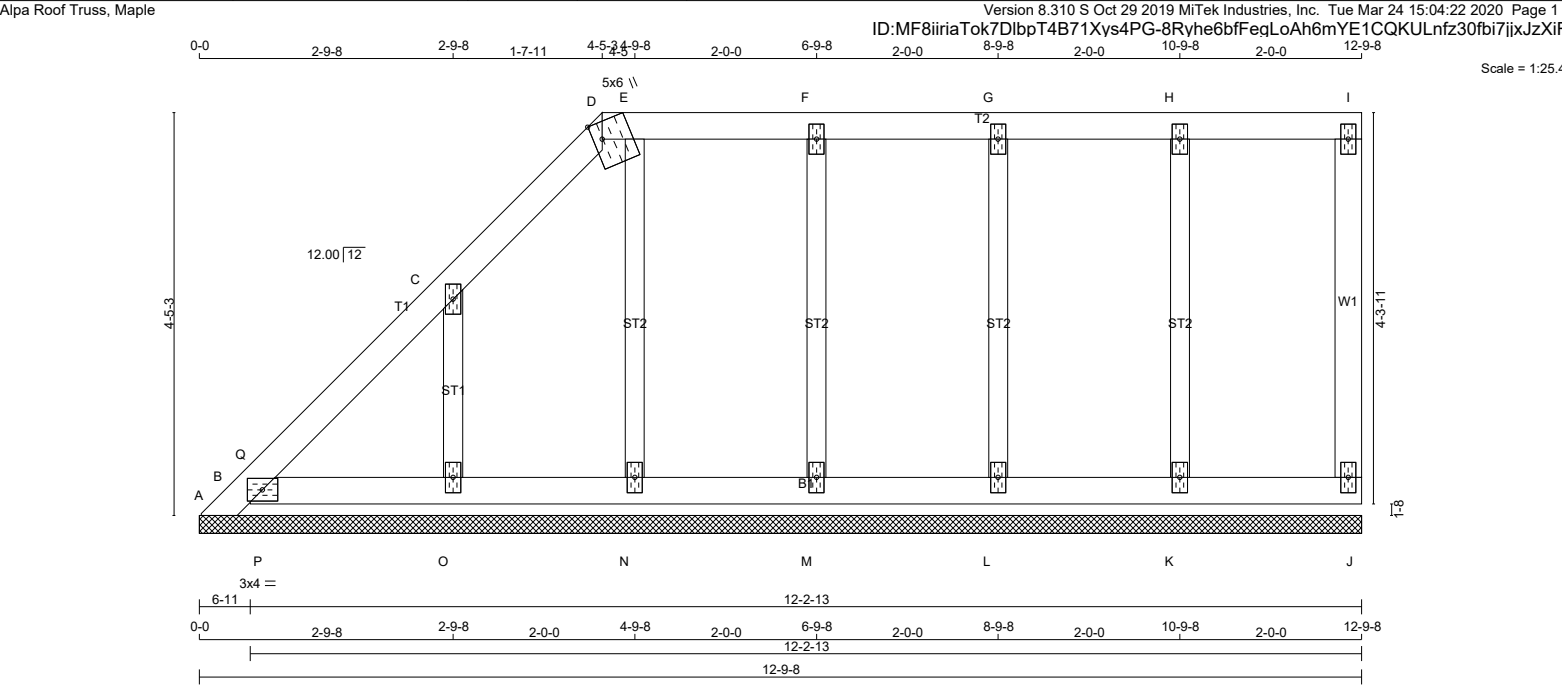

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. A - D 2x4 DRY No.2 SPF D - I 2x4 DRY No.2 SPF J - I 2x4 DRY No.2 SPF B - J 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF ALL GABLE WEBS 2x3 DRY No.2 SPF DRY: SEASONED LUMBER. GABLE STUDS SPACED AT 2'-0" OC.					DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS. THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE. BEVELED PLATE OR SHIM REQUIRED TO PROVIDE FULL BEARING SURFACE WITH TRUSS CHORD AT JT(S): J , K , L , M , N , O PROVIDE ANCHORAGE AT BEARING JOINT A FOR 150 LBS. FACTORED UPLIFT BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. LOADING TOTAL LOAD CASES: (4) <table><thead><tr><th colspan="4">CHORDS</th><th colspan="4">WEBS</th></tr><tr><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>FACTORED VERT. LOAD (PLF)</th><th>MAX LC1 (LC)</th><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>MAX LC1 (LC)</th><th>UNBRAC LENGTH</th></tr><tr><th>FR-TO</th><th></th><th>FROM TO</th><th></th><th>FR-TO</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>A- B</td><td>0 / 31</td><td>-96.5 -96.5</td><td>0.03 (1)</td><td>K- H</td><td>-174 / 0</td><td>0.05 (1)</td><td></td></tr><tr><td>B- Q</td><td>-53 / 0</td><td>-78.0 -78.0</td><td>0.03 (1)</td><td>L- G</td><td>-152 / 0</td><td>0.04 (1)</td><td></td></tr><tr><td>Q- C</td><td>-4 / 0</td><td>-78.0 -78.0</td><td>0.04 (1)</td><td>M- F</td><td>-159 / 0</td><td>0.04 (1)</td><td></td></tr><tr><td>C- D</td><td>-12 / 0</td><td>-78.0 -78.0</td><td>0.04 (1)</td><td>N- E</td><td>-155 / 0</td><td>0.04 (1)</td><td></td></tr><tr><td>D- E</td><td>0 / 5</td><td>-78.0 -78.0</td><td>0.03 (1)</td><td>O- C</td><td>-163 / 0</td><td>0.03 (1)</td><td></td></tr><tr><td>E- F</td><td>0 / 0</td><td>-78.0 -78.0</td><td>0.04 (1)</td><td>P- Q</td><td>-21 / 24</td><td>0.00 (1)</td><td></td></tr><tr><td>F- G</td><td>0 / 0</td><td>-78.0 -78.0</td><td>0.04 (1)</td><td></td><td></td><td></td><td></td></tr><tr><td>G- H</td><td>0 / 0</td><td>-78.0 -78.0</td><td>0.04 (1)</td><td></td><td></td><td></td><td></td></tr><tr><td>H- I</td><td>0 / 0</td><td>-78.0 -78.0</td><td>0.04 (1)</td><td></td><td></td><td></td><td></td></tr><tr><td>J- I</td><td>-63 / 0</td><td>0.0 0.0</td><td>0.02 (1)</td><td></td><td></td><td></td><td>7.81</td></tr><tr><td>B- P</td><td>0 / 8</td><td>-18.5 -18.5</td><td>0.01 (1)</td><td></td><td></td><td></td><td>10.00</td></tr><tr><td>P- O</td><td>0 / 8</td><td>-18.5 -18.5</td><td>0.02 (4)</td><td></td><td></td><td></td><td>10.00</td></tr><tr><td>O- N</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.02 (4)</td><td></td><td></td><td></td><td>10.00</td></tr><tr><td>N- M</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.02 (4)</td><td></td><td></td><td></td><td>10.00</td></tr><tr><td>M- L</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.02 (4)</td><td></td><td></td><td></td><td>10.00</td></tr><tr><td>L- K</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.02 (4)</td><td></td><td></td><td></td><td>10.00</td></tr><tr><td>K- J</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.02 (4)</td><td></td><td></td><td></td><td>10.00</td></tr></tbody></table>					CHORDS				WEBS				MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX LC1 (LC)	UNBRAC LENGTH	FR-TO		FROM TO		FR-TO				A- B	0 / 31	-96.5 -96.5	0.03 (1)	K- H	-174 / 0	0.05 (1)		B- Q	-53 / 0	-78.0 -78.0	0.03 (1)	L- G	-152 / 0	0.04 (1)		Q- C	-4 / 0	-78.0 -78.0	0.04 (1)	M- F	-159 / 0	0.04 (1)		C- D	-12 / 0	-78.0 -78.0	0.04 (1)	N- E	-155 / 0	0.04 (1)		D- E	0 / 5	-78.0 -78.0	0.03 (1)	O- C	-163 / 0	0.03 (1)		E- F	0 / 0	-78.0 -78.0	0.04 (1)	P- Q	-21 / 24	0.00 (1)		F- G	0 / 0	-78.0 -78.0	0.04 (1)					G- H	0 / 0	-78.0 -78.0	0.04 (1)					H- I	0 / 0	-78.0 -78.0	0.04 (1)					J- I	-63 / 0	0.0 0.0	0.02 (1)				7.81	B- P	0 / 8	-18.5 -18.5	0.01 (1)				10.00	P- O	0 / 8	-18.5 -18.5	0.02 (4)				10.00	O- N	0 / 0	-18.5 -18.5	0.02 (4)				10.00	N- M	0 / 0	-18.5 -18.5	0.02 (4)				10.00	M- L	0 / 0	-18.5 -18.5	0.02 (4)				10.00	L- K	0 / 0	-18.5 -18.5	0.02 (4)				10.00	K- J	0 / 0	-18.5 -18.5	0.02 (4)				10.00	DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF BCBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD CSI: TC=0.04/1.00 (C-D:1) , BC=0.02/1.00 (O-P:4) , WB=0.05/1.00 (H-K:1) , SSI=0.07/1.00 (H-I:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873				
CHORDS				WEBS																																																																																																																																																																										
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX LC1 (LC)	UNBRAC LENGTH																																																																																																																																																																							
FR-TO		FROM TO		FR-TO																																																																																																																																																																										
A- B	0 / 31	-96.5 -96.5	0.03 (1)	K- H	-174 / 0	0.05 (1)																																																																																																																																																																								
B- Q	-53 / 0	-78.0 -78.0	0.03 (1)	L- G	-152 / 0	0.04 (1)																																																																																																																																																																								
Q- C	-4 / 0	-78.0 -78.0	0.04 (1)	M- F	-159 / 0	0.04 (1)																																																																																																																																																																								
C- D	-12 / 0	-78.0 -78.0	0.04 (1)	N- E	-155 / 0	0.04 (1)																																																																																																																																																																								
D- E	0 / 5	-78.0 -78.0	0.03 (1)	O- C	-163 / 0	0.03 (1)																																																																																																																																																																								
E- F	0 / 0	-78.0 -78.0	0.04 (1)	P- Q	-21 / 24	0.00 (1)																																																																																																																																																																								
F- G	0 / 0	-78.0 -78.0	0.04 (1)																																																																																																																																																																											
G- H	0 / 0	-78.0 -78.0	0.04 (1)																																																																																																																																																																											
H- I	0 / 0	-78.0 -78.0	0.04 (1)																																																																																																																																																																											
J- I	-63 / 0	0.0 0.0	0.02 (1)				7.81																																																																																																																																																																							
B- P	0 / 8	-18.5 -18.5	0.01 (1)				10.00																																																																																																																																																																							
P- O	0 / 8	-18.5 -18.5	0.02 (4)				10.00																																																																																																																																																																							
O- N	0 / 0	-18.5 -18.5	0.02 (4)				10.00																																																																																																																																																																							
N- M	0 / 0	-18.5 -18.5	0.02 (4)				10.00																																																																																																																																																																							
M- L	0 / 0	-18.5 -18.5	0.02 (4)				10.00																																																																																																																																																																							
L- K	0 / 0	-18.5 -18.5	0.02 (4)				10.00																																																																																																																																																																							
K- J	0 / 0	-18.5 -18.5	0.02 (4)				10.00																																																																																																																																																																							
PLATES (table is in inches) JT TYPE PLATES W LEN Y X B TMB1-I MT20 3.0 4.0 C, F, G, H C TMW+w MT20 2.0 4.0 D D TTW+m MT20 5.0 6.0 Edge 1.25 E I TMV+p MT20 2.0 4.0 J BMV1+p MT20 2.0 4.0 K, L, M, N, O K BMW1+w MT20 2.0 4.0 Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.																																																																																																																																																																														

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 15:04:23 2020 Page 1



TOTAL WEIGHT = 55 lb

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
B	TMB1-l	MT20	3.0	4.0	1.50	2.50
C	TMW+w	MT20	2.0	4.0		
D	TTW+m	MT20	3.0	4.0		
E	TMVW-t	MT20	3.0	4.0		
F	BMV1+p	MT20	2.0	4.0		
G	BMWVWV1-t	MT20	4.0	6.0		

	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQD BRG
JT	VERT	HORZ	DOWN	HORZ	IN-SX	IN-SX
F	249	0	249	0	0	12-2-13
B	338	0	338	0	0	12-2-13
G	628	0	628	0	0	12-2-13

1ST LCASE MAX./MIN. COMPONENT REACTIONS

JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
F	177	111 / 0	0 / 0	0 / 0	0 / 0	66 / 0	0 / 0
B	240	153 / 0	0 / 0	0 / 0	0 / 0	87 / 0	0 / 0
G	448	268 / 0	0 / 0	0 / 0	0 / 0	180 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, B, G

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-F, E-G.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEB S			
MAX. FACTORED		FACTORED		MAX. FACTORED			
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX. CSI (LC)	MAX. UNBRAC	MEMB.	FORCE (LBS)	MAX. CSI (LC)
FR-TO		FROM TO		LENGTH	FR-TO		
A-B	0 / 11	-78.0	-78.0 0.01 (1)	10.00	C-D	-228 / 0	0.08 (1)
B-I	-372 / 0	-78.0	-78.0 0.08 (4)	6.25	G-D	-321 / 0	0.27 (1)
I-C	-196 / 0	-78.0	-78.0 0.15 (1)	6.25	G-E	-13 / 3	0.01 (1)
C-D	-19 / 0	-78.0	-78.0 0.14 (1)	6.25	H-I	0 / 211	0.00 (1)
D-E	-2 / 8	-78.0	-78.0 0.43 (1)	10.00			
F-E	-212 / 0	0.0	0.0 0.05 (1)	6.25			
B-H	0 / 160	-18.5	-18.5 0.08 (4)	10.00			
H-G	0 / 160	-18.5	-18.5 0.19 (4)	10.00			
G-F	0 / 0	-18.5	-18.5 0.18 (4)	10.00			

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL	=	21.0	PSF
		DL	=	6.0	PSF
BOT	CH.	LL	=	0.0	PSF
		DL	=	7.4	PSF
TOTAL LOAD				=	34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE
OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.43/1.00 (D-E:1), BC=0.19/1.00 (G-H:4),
WB=0.27/1.00 (D-G:1), SSI=0.18/1.00 (B-H:4)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .


NAIL VALUES						
PLATE	GRIP(DRY)		SHEAR		SECTION	
	(PSI)		(PLI)		(PLI)	
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.49 (D) (INPUT = 0.90)
JSI METAL= 0.11 (D) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	G4P		1	TRUSS DESC. JT 45147	E20035303

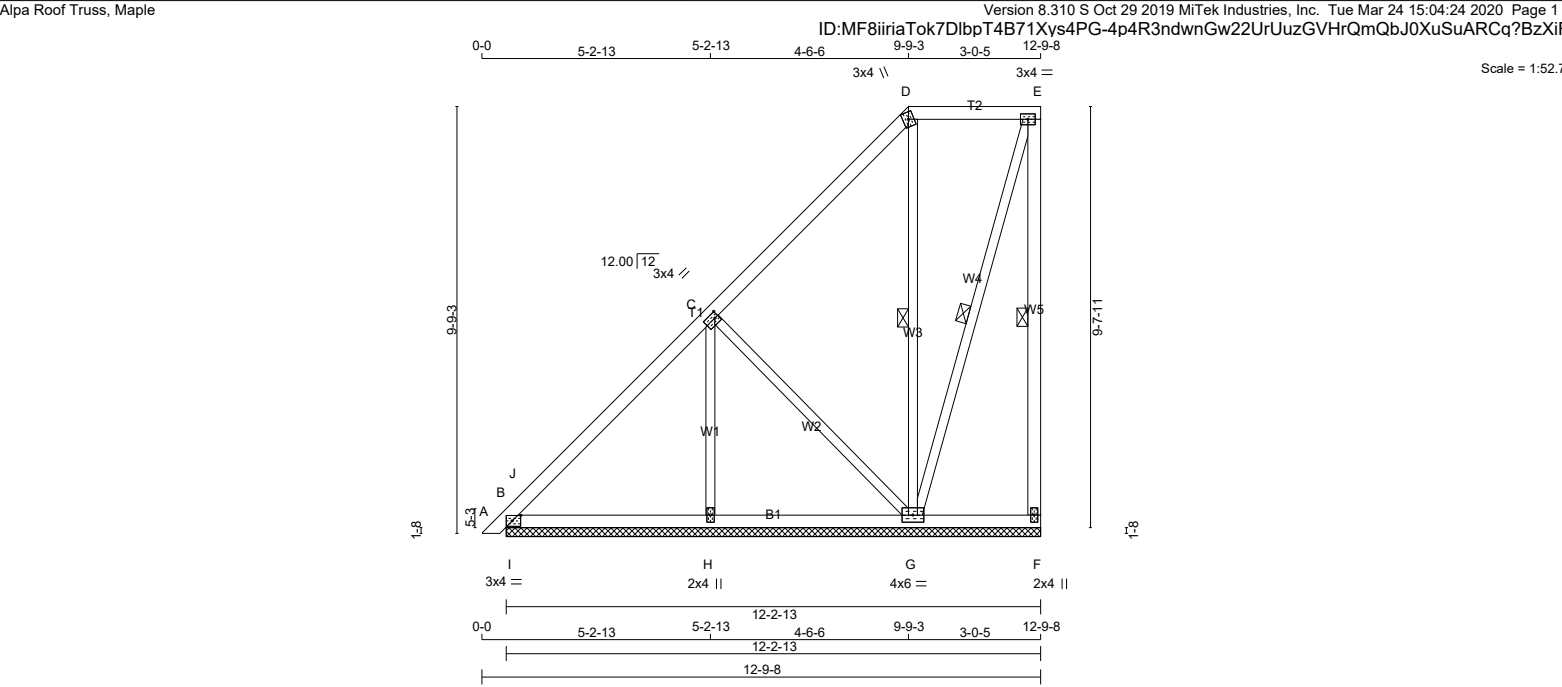

LUMBER				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER				DESIGN CRITERIA			
N. L. G. A. RULES				BEARINGS				SPECIFIED LOADS:			
CHORDS	SIZE	LUMBER	DESCR.	FACTORED	MAXIMUM FACTORED	INPUT	REQRD	TOP	CH.	LL	
A - D	2x4	DRY	No.2	GROSS REACTION	GROSS REACTION	BRG	BRG	DL			
D - E	2x4	DRY	No.2	VERT	DOWN	IN-SX	IN-SX	BOT	CH.	LL	
F - E	2x4	DRY	No.2	HORZ	HORZ	UPLIFT	UPLIFT	DL			
B - F	2x4	DRY	No.2					TOTAL LOAD			
ALL WEBS	2x3	DRY	No.2								
DRY: SEASONED LUMBER.											

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMB1-I	MT20	3.0	4.0	1.50 2.50
C	TMWW-t	MT20	3.0	4.0	1.50 1.00
D	TTW+m	MT20	3.0	4.0	
E	TMVW-t	MT20	3.0	4.0	
F	BMV1+p	MT20	2.0	4.0	
G	BMWW1-t	MT20	4.0	6.0	
H	BMW1+w	MT20	2.0	4.0	

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



LOADING				UNFACTORED REACTIONS			
TOTAL LOAD CASES: (4)				1ST LCASE	MAX./MIN. COMPONENT REACTIONS		
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
F	87	55 / 0	0 / 0	0 / 0	0 / 0	32 / 0	0 / 0
B	222	148 / 0	0 / 0	0 / 0	0 / 0	74 / 0	0 / 0
H	237	129 / 0	0 / 0	0 / 0	0 / 0	108 / 0	0 / 0
G	319	200 / 0	0 / 0	0 / 0	0 / 0	119 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, B, H, G

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-F, D-G, E-G.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 11	-78.0 -78.0	0.01 (1)	H-C	-208 / 0	0.08 (1)	
B-J	-63 / 0	-78.0 -78.0	0.05 (1)	C-G	-155 / 0	0.13 (1)	
J-C	-126 / 0	-78.0 -78.0	0.26 (1)	G-D	-255 / 0	0.16 (1)	
C-D	-27 / 0	-78.0 -78.0	0.26 (1)	G-E	-16 / 0	0.01 (1)	
D-E	0 / 5	-78.0 -78.0	0.12 (1)	I-J	-298 / 1	0.00 (1)	
F-E	-102 / 0	0.0 0.0	0.05 (1)				
B-I	0 / 106	-18.5 -18.5	0.10 (1)				
I-H	0 / 106	-18.5 -18.5	0.11 (1)				
H-G	0 / 106	-18.5 -18.5	0.11 (4)				
G-F	0 / 0	-18.5 -18.5	0.06 (4)				

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.26/1.00 (C-J:1), BC=0.11/1.00 (H-I:1), WB=0.16/1.00 (D-G:1), SSI=0.25/1.00 (B-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX	MIN	MAX
MT20	650	371	1747
	788	1987	1873


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.29 (B) (INPUT = 0.90)

JSI METAL= 0.07 (D) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	G5P		1	TRUSS DESC. JT 45147	E20035304

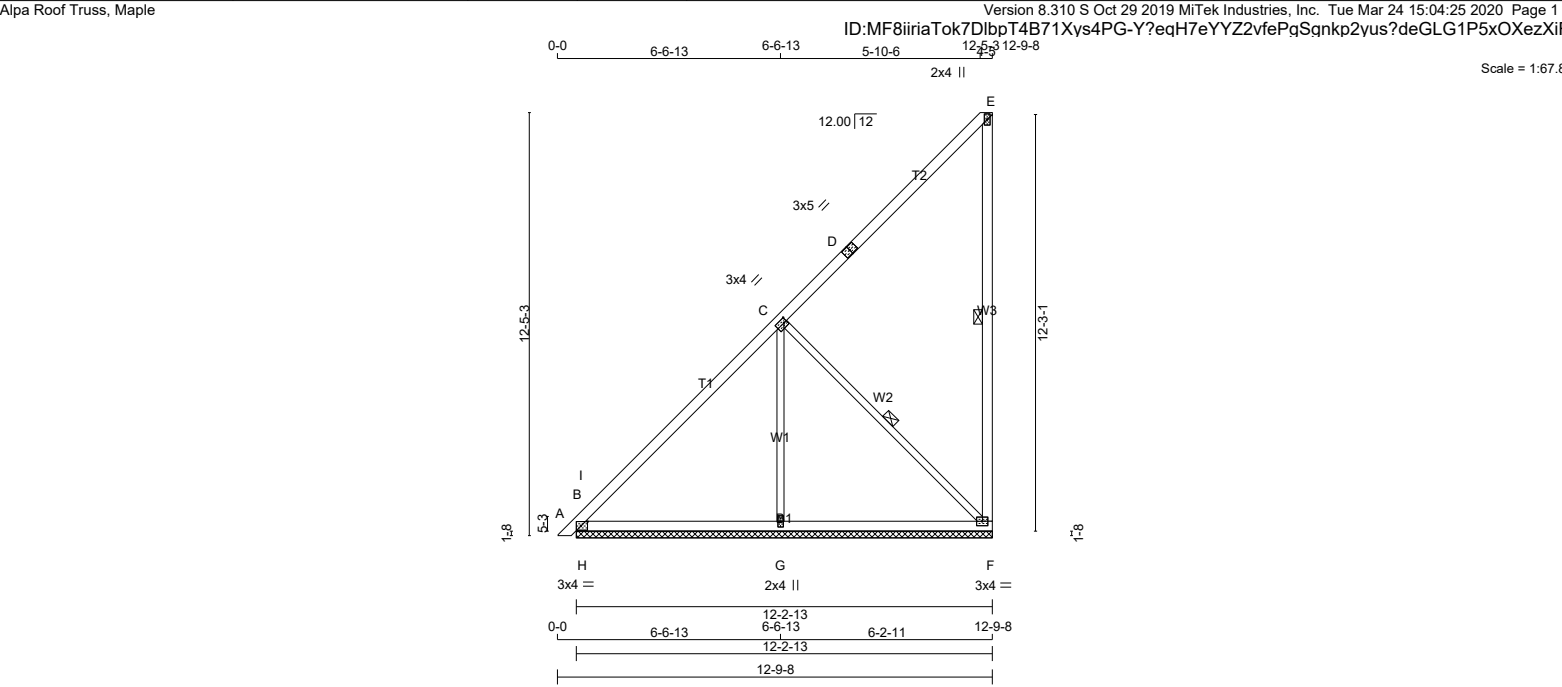


LUMBER					DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER										DESIGN CRITERIA					[M]
N. L. G. A. RULES					BEARINGS										SPECIFIED LOADS:					
CHORDS	SIZE		LUMBER	DESCR.	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG	TOP CH.	LL	=	21.0	PSF					
A - D	2x4	DRY	No.2	SPF	JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX		DL	=	6.0	PSF			
D - E	2x4	DRY	No.2	SPF	F	373	0	373	0	0	12-2-13	2-0-7		BOT CH.	LL	=	0.0	PSF		
F - E	2x4	DRY	No.2	SPF	B	400	0	400	0	0	12-2-13	2-0-7			DL	=	7.4	PSF		
B - F	2x4	DRY	No.2	SPF	G	442	0	442	0	0	12-2-13	2-0-7		TOTAL LOAD	=	34.4	PSF			
ALL WEBS 2x3 DRY: SEASONED LUMBER.																				

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMB1-I	MT20	3.0	4.0	1.50 2.50
C	TMWW-I	MT20	3.0	4.0	1.50 1.00
D	TS-I	MT20	3.0	5.0	
E	TMV+p	MT20	2.0	4.0	
F	BMVW1-I	MT20	3.0	4.0	
G	BMW1+w	MT20	2.0	4.0	

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	G6P		1	TRUSS DESC. JT 45147	E20035305

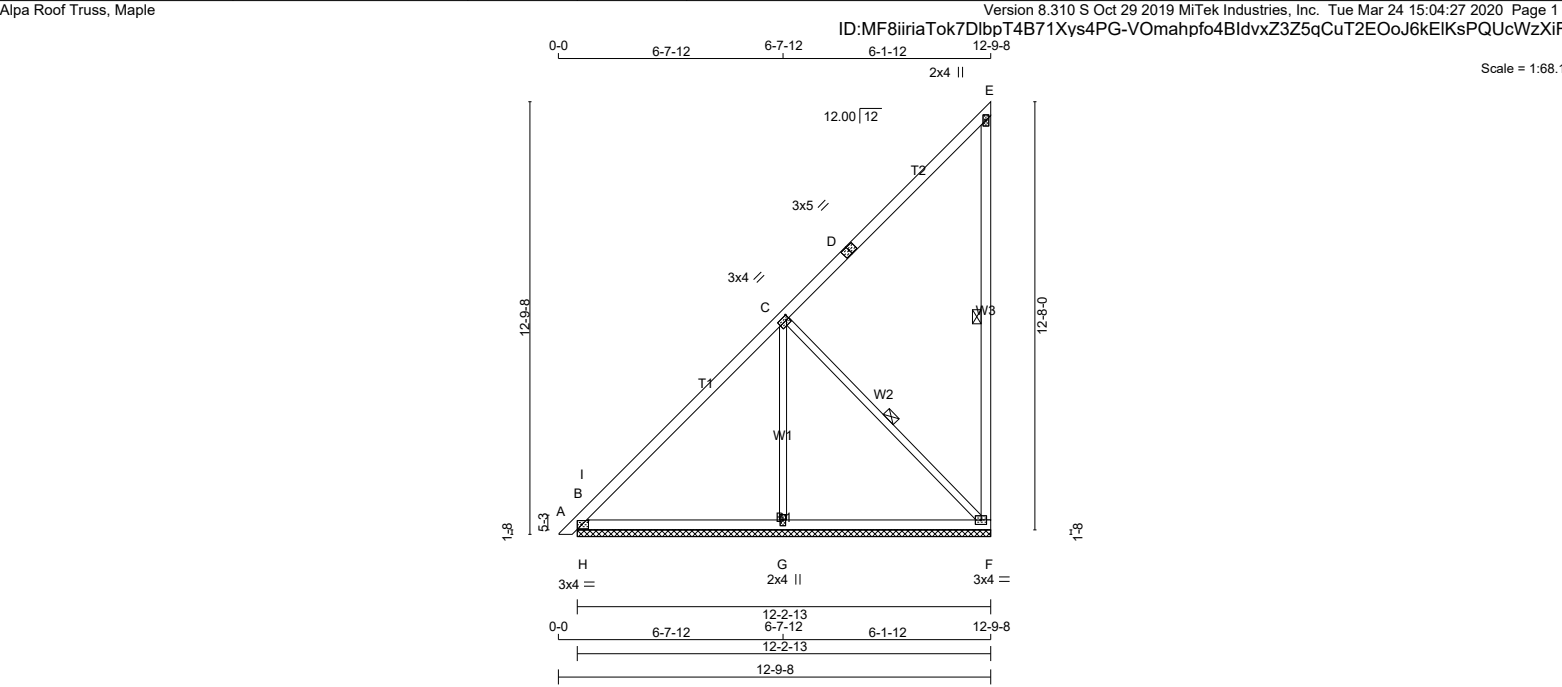

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. A - D 2x4 DRY No.2 SPF D - E 2x4 DRY No.2 SPF F - E 2x4 DRY No.2 SPF B - F 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF DRY: SEASONED LUMBER.							DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS <table><tr><th></th><th colspan="2">FACTORED GROSS REACTION</th><th colspan="2">MAXIMUM FACTORED GROSS REACTION</th><th>INPUT BRG</th><th>REQRD BRG</th></tr><tr><th>JT</th><th>VERT</th><th>HORZ</th><th>DOWN</th><th>HORZ</th><th>UPLIFT</th><th>IN-SX</th></tr><tr><td>F</td><td>373</td><td>0</td><td>373</td><td>0</td><td>0</td><td>12-2-13 2-0-2</td></tr><tr><td>B</td><td>406</td><td>0</td><td>406</td><td>0</td><td>0</td><td>12-2-13 2-0-2</td></tr><tr><td>G</td><td>436</td><td>0</td><td>436</td><td>0</td><td>0</td><td>12-2-13 2-0-2</td></tr></table> UNFACTORED REACTIONS <table><tr><th>JT</th><th>1ST LCASE</th><th colspan="6">MAX./MIN. COMPONENT REACTIONS</th></tr><tr><th></th><th>COMBINED</th><th>SNOW</th><th>LIVE</th><th>PERM.LIVE</th><th>WIND</th><th>DEAD</th><th>SOIL</th></tr><tr><td>F</td><td>264</td><td>174 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>90 / 0</td><td>0 / 0</td></tr><tr><td>B</td><td>286</td><td>192 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>94 / 0</td><td>0 / 0</td></tr><tr><td>G</td><td>315</td><td>166 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>149 / 0</td><td>0 / 0</td></tr></table> BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, B, G BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. 1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-F, C-F. END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW LOADING TOTAL LOAD CASES: (4) <table><tr><th colspan="4">CHORDS</th><th colspan="4">WEBS</th></tr><tr><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>FACTORED VERT. LOAD (PLF)</th><th>LC1 MAX CSI (LC)</th><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>MAX CSI (LC)</th></tr><tr><td>FR-TO</td><td></td><td>FROM TO</td><td></td><td>FR-TO</td><td></td><td></td></tr><tr><td>A- B</td><td>0 / 11</td><td>-78.0 -78.0</td><td>0.01 (1)</td><td>10.00</td><td>G- C</td><td>-270 / 0 0.19 (1)</td></tr><tr><td>B- I</td><td>-77 / 31</td><td>-78.0 -78.0</td><td>0.10 (1)</td><td>6.25</td><td>C- F</td><td>-211 / 0 0.11 (1)</td></tr><tr><td>I- C</td><td>-179 / 0</td><td>-78.0 -78.0</td><td>0.47 (1)</td><td>6.25</td><td>H- I</td><td>-487 / 0 0.00 (1)</td></tr><tr><td>C- D</td><td>-39 / 0</td><td>-78.0 -78.0</td><td>0.46 (1)</td><td>6.25</td><td></td><td></td></tr><tr><td>D- E</td><td>-39 / 0</td><td>-78.0 -78.0</td><td>0.46 (1)</td><td>6.25</td><td></td><td></td></tr><tr><td>F- E</td><td>-185 / 0</td><td>0.0 0.0</td><td>0.16 (1)</td><td>6.25</td><td></td><td></td></tr><tr><td>B- H</td><td>0 / 149</td><td>-18.5 -18.5</td><td>0.16 (1)</td><td>10.00</td><td></td><td></td></tr><tr><td>H- G</td><td>0 / 149</td><td>-18.5 -18.5</td><td>0.21 (4)</td><td>10.00</td><td></td><td></td></tr><tr><td>G- F</td><td>0 / 149</td><td>-18.5 -18.5</td><td>0.21 (4)</td><td>10.00</td><td></td><td></td></tr></table>								FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG	JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	F	373	0	373	0	0	12-2-13 2-0-2	B	406	0	406	0	0	12-2-13 2-0-2	G	436	0	436	0	0	12-2-13 2-0-2	JT	1ST LCASE	MAX./MIN. COMPONENT REACTIONS							COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL	F	264	174 / 0	0 / 0	0 / 0	0 / 0	90 / 0	0 / 0	B	286	192 / 0	0 / 0	0 / 0	0 / 0	94 / 0	0 / 0	G	315	166 / 0	0 / 0	0 / 0	0 / 0	149 / 0	0 / 0	CHORDS				WEBS				MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)	FR-TO		FROM TO		FR-TO			A- B	0 / 11	-78.0 -78.0	0.01 (1)	10.00	G- C	-270 / 0 0.19 (1)	B- I	-77 / 31	-78.0 -78.0	0.10 (1)	6.25	C- F	-211 / 0 0.11 (1)	I- C	-179 / 0	-78.0 -78.0	0.47 (1)	6.25	H- I	-487 / 0 0.00 (1)	C- D	-39 / 0	-78.0 -78.0	0.46 (1)	6.25			D- E	-39 / 0	-78.0 -78.0	0.46 (1)	6.25			F- E	-185 / 0	0.0 0.0	0.16 (1)	6.25			B- H	0 / 149	-18.5 -18.5	0.16 (1)	10.00			H- G	0 / 149	-18.5 -18.5	0.21 (4)	10.00			G- F	0 / 149	-18.5 -18.5	0.21 (4)	10.00		
	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG																																																																																																																																																																							
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX																																																																																																																																																																							
F	373	0	373	0	0	12-2-13 2-0-2																																																																																																																																																																							
B	406	0	406	0	0	12-2-13 2-0-2																																																																																																																																																																							
G	436	0	436	0	0	12-2-13 2-0-2																																																																																																																																																																							
JT	1ST LCASE	MAX./MIN. COMPONENT REACTIONS																																																																																																																																																																											
	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL																																																																																																																																																																						
F	264	174 / 0	0 / 0	0 / 0	0 / 0	90 / 0	0 / 0																																																																																																																																																																						
B	286	192 / 0	0 / 0	0 / 0	0 / 0	94 / 0	0 / 0																																																																																																																																																																						
G	315	166 / 0	0 / 0	0 / 0	0 / 0	149 / 0	0 / 0																																																																																																																																																																						
CHORDS				WEBS																																																																																																																																																																									
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)																																																																																																																																																																							
FR-TO		FROM TO		FR-TO																																																																																																																																																																									
A- B	0 / 11	-78.0 -78.0	0.01 (1)	10.00	G- C	-270 / 0 0.19 (1)																																																																																																																																																																							
B- I	-77 / 31	-78.0 -78.0	0.10 (1)	6.25	C- F	-211 / 0 0.11 (1)																																																																																																																																																																							
I- C	-179 / 0	-78.0 -78.0	0.47 (1)	6.25	H- I	-487 / 0 0.00 (1)																																																																																																																																																																							
C- D	-39 / 0	-78.0 -78.0	0.46 (1)	6.25																																																																																																																																																																									
D- E	-39 / 0	-78.0 -78.0	0.46 (1)	6.25																																																																																																																																																																									
F- E	-185 / 0	0.0 0.0	0.16 (1)	6.25																																																																																																																																																																									
B- H	0 / 149	-18.5 -18.5	0.16 (1)	10.00																																																																																																																																																																									
H- G	0 / 149	-18.5 -18.5	0.21 (4)	10.00																																																																																																																																																																									
G- F	0 / 149	-18.5 -18.5	0.21 (4)	10.00																																																																																																																																																																									
PLATES (table is in inches) <table><tr><th>JT</th><th>TYPE</th><th>PLATES</th><th>W</th><th>LEN</th><th>Y</th><th>X</th></tr><tr><td>B</td><td>TMB1-I</td><td>MT20</td><td>3.0</td><td>4.0</td><td>1.50</td><td>2.50</td></tr><tr><td>C</td><td>TMWW-t</td><td>MT20</td><td>3.0</td><td>4.0</td><td>1.50</td><td>1.00</td></tr><tr><td>D</td><td>TS-t</td><td>MT20</td><td>3.0</td><td>5.0</td><td></td><td></td></tr><tr><td>E</td><td>TMV+p</td><td>MT20</td><td>2.0</td><td>4.0</td><td></td><td></td></tr><tr><td>F</td><td>BMVW1-t</td><td>MT20</td><td>3.0</td><td>4.0</td><td></td><td></td></tr><tr><td>G</td><td>BMW1+w</td><td>MT20</td><td>2.0</td><td>4.0</td><td></td><td></td></tr></table>							JT	TYPE	PLATES	W	LEN	Y	X	B	TMB1-I	MT20	3.0	4.0	1.50	2.50	C	TMWW-t	MT20	3.0	4.0	1.50	1.00	D	TS-t	MT20	3.0	5.0			E	TMV+p	MT20	2.0	4.0			F	BMVW1-t	MT20	3.0	4.0			G	BMW1+w	MT20	2.0	4.0			DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF BCBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD CSI: TC=0.47/1.00 (C-I:1) , BC=0.21/1.00 (G-H:4) , WB=0.19/1.00 (C-G:1) , SSI=0.40/1.00 (B-H:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.63 (D) (INPUT = 0.90) JSI METAL= 0.21 (D) (INPUT = 1.00)																																																																																																																					
JT	TYPE	PLATES	W	LEN	Y	X																																																																																																																																																																							
B	TMB1-I	MT20	3.0	4.0	1.50	2.50																																																																																																																																																																							
C	TMWW-t	MT20	3.0	4.0	1.50	1.00																																																																																																																																																																							
D	TS-t	MT20	3.0	5.0																																																																																																																																																																									
E	TMV+p	MT20	2.0	4.0																																																																																																																																																																									
F	BMVW1-t	MT20	3.0	4.0																																																																																																																																																																									
G	BMW1+w	MT20	2.0	4.0																																																																																																																																																																									
LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2																																																																																																																																																																													

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H5S		1	TRUSS DESC. JT 45147	E20035306

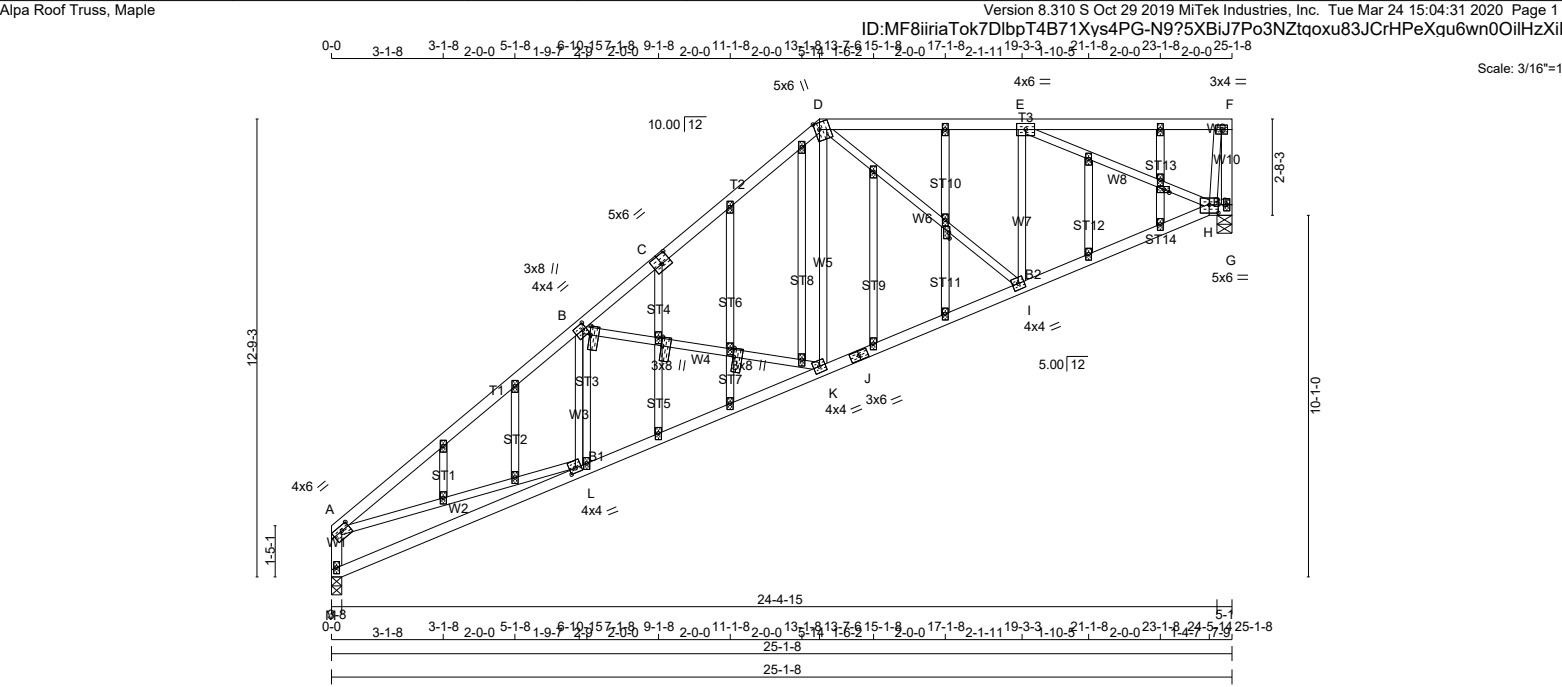

LUMBER				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER				DESIGN CRITERIA			
N. L. G. A. RULES				BEARINGS				SPECIFIED LOADS:			
CHORDS	SIZE	LUMBER	DESCR.	FACTORED	MAXIMUM FACTORED	INPUT	REQRD	TOP CH.	LL	DL	PSF
A - C	2x4	DRY	SPF	GROSS REACTION	GROSS REACTION	BRG	BRG	BOT CH.	LL	DL	PSF
C - D	2x4	DRY	SPF	JT VERT	JT VERT	IN-SX	IN-SX	TOTAL LOAD			
D - F	2x4	DRY	SPF	G -348	0	0	3-1				
G - F	2x4	DRY	SPF	H 1600	0	1600	5-1				
M - A	2x4	DRY	SPF	M 1172	0	1172	3-8				
M - J	2x4	DRY	SPF								
J - H	2x4	DRY	SPF								
H - G	2x4	DRY	SPF								

ALL WEBS	2x3	DRY	No.2	SPF	UNFACTORED REACTIONS						
EXCEPT					1ST LCASE	MAX./MIN. COMPONENT REACTIONS					
ALL GABLE WEBS					JT COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
2x3	DRY	No.2	SPF		G -249	0/-148	0/0	0/0	0/0	0/-101	0/0
DRY: SEASONED LUMBER.					H 1141	693/0	0/0	0/0	0/0	449/0	0/0
					M 835	510/0	0/0	0/0	0/0	325/0	0/0

GABLE STUDS SPACED AT 2'-0" OC.

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) G, H, M

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.61 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.


ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

PLATES (table is in inches)				LOADING			
JT TYPE	PLATES	W	LEN Y X	TOTAL LOAD CASES: (4)			
A TMVW-t	MT20	4.0	6.0 1.50 2.75	CHORDS			
B TMWW-t	MT20	4.0	4.0 2.00 1.25	MEMB. FORCE VERT. LOAD LC1 MAX. MAX. MEMB. FORCE MAX			
B, Z, AC				MAX. FACTORED FACTORED (PLF) CSI (LC) UNBRAC LENGTH FR-TO			
C NP+t	MT20	3.0	8.0 3.00 0.25	WEBS			
C TSW-I	MT20	5.0	6.0 3.00 3.00	MAX. FACTORED MAX. FACTORED			
D TTWW+m	MT20	5.0	6.0 2.25 1.50	MEMB. FORCE MAX			
E TMVW-t	MT20	4.0	6.0	MAX. FACTORED MAX. FACTORED			
F TMVW-t	MT20	3.0	4.0	MEMB. FORCE MAX			
G BMV1+p	MT20	2.0	4.0	MAX. FACTORED MAX. FACTORED			
H BBWW1-I	MT20	5.0	6.0 2.75 3.00	MEMB. FORCE MAX			
I BMWW-t	MT20	4.0	4.0	MAX. FACTORED MAX. FACTORED			
J BS-t	MT20	3.0	6.0	MEMB. FORCE MAX			
K BMWW-t	MT20	4.0	4.0	MAX. FACTORED MAX. FACTORED			
L BMWW-t	MT20	4.0	4.0 1.50 2.00	MEMB. FORCE MAX			
L, N, O, P, Q, R, S, T, U, V, W, X, Y, Z, AA, AB, AC, AD, AE, AF, AG, AH				MAX. FACTORED MAX. FACTORED			
L NP+w	MT20	2.0	4.0	MEMB. FORCE MAX			
M BMV1+p	MT20	2.0	4.0	MAX. FACTORED MAX. FACTORED			
P NP-p	MT20	2.0	4.0 1.00 1.75	MEMB. FORCE MAX			
U NP+w	MT20	2.0	4.0 2.00 0.25	MAX. FACTORED MAX. FACTORED			

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H6S		1	TRUSS DESC. JT 45147	E20035307

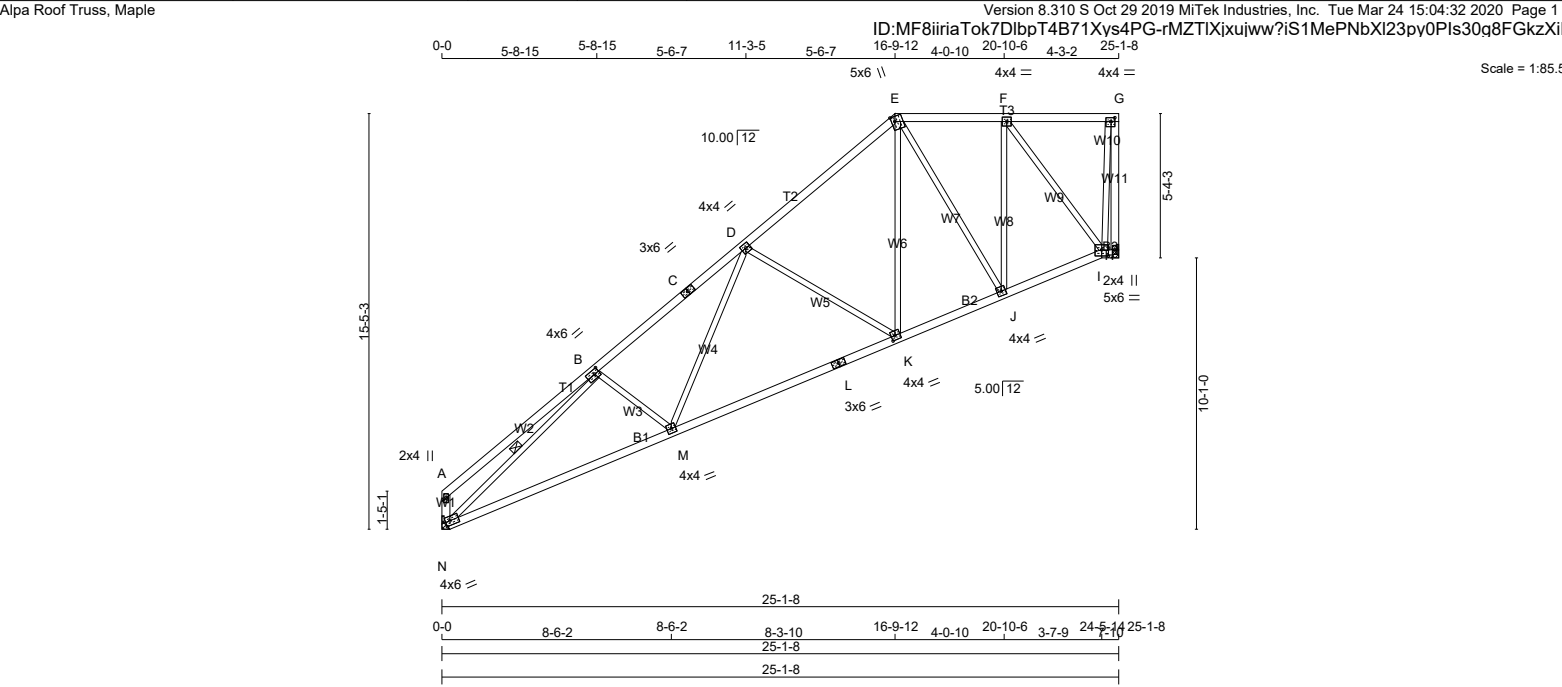

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
A - C	2x4	DRY	No.2	SPF
C - E	2x4	DRY	No.2	SPF
E - G	2x4	DRY	No.2	SPF
H - G	2x4	DRY	No.2	SPF
N - A	2x4	DRY	No.2	SPF
N - L	2x4	DRY	No.2	SPF
L - I	2x4	DRY	No.2	SPF
I - H	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
EXCEPT				
DRY: SEASONED LUMBER.				

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
A	TMV+p	MT20	2.0	4.0
B	TMWW-t	MT20	4.0	6.0 2.00 2.25
C	TS-t	MT20	3.0	6.0
D	TMWW-t	MT20	4.0	4.0
E	TTWW+m	MT20	5.0	6.0 2.25 1.50
F	TMWW-t	MT20	4.0	4.0
G	TMVW-t	MT20	4.0	4.0 1.75 1.75
H	BMV1+p	MT20	2.0	4.0
I	BBWW-l	MT20	5.0	6.0 2.75 3.00
J	BMWW-t	MT20	4.0	4.0
K	BMWW-t	MT20	4.0	4.0 2.00 1.75
L	BS-t	MT20	3.0	6.0
M	BMWW-t	MT20	4.0	4.0
N	BMVW1-t	MT20	4.0	6.0 2.00 2.00

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

FACTORED		MAXIMUM FACTORED		INPUT		REQRD	
GROSS REACTION		GROSS REACTION		BRG		BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
H	1212	0	1212	0	0	MECHANICAL	
N	1212	0	1212	0	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H, N. MINIMUM BEARING LENGTH AT JOINT H = 1-8, JOINT N = 3-8.

UNFACTORED REACTIONS

1ST LCASE	MAX./MIN. COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
H	864	527 / 0	0 / 0	0 / 0	0 / 0	337 / 0	0 / 0
N	864	527 / 0	0 / 0	0 / 0	0 / 0	337 / 0	0 / 0

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.61 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF B-N.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. LC1 CSI (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 25	-78.0 -78.0	0.30 (1)	10.00	B-M	-116 / 17	0.03 (1)
B-C	-1883 / 0	-78.0 -78.0	0.35 (1)	4.61	M-D	0 / 371	0.08 (1)
C-D	-1883 / 0	-78.0 -78.0	0.35 (1)	4.61	D-K	-581 / 0	0.49 (1)
D-E	-1098 / 0	-78.0 -78.0	0.31 (1)	5.68	K-E	0 / 633	0.14 (1)
E-F	-680 / 0	-78.0 -78.0	0.18 (1)	6.25	E-J	-282 / 0	0.33 (1)
F-G	-135 / 0	-78.0 -78.0	0.17 (1)	6.25	J-F	0 / 361	0.08 (1)
H-G	-1206 / 0	0.0 0.0	0.60 (1)	7.29	F-I	-935 / 0	0.64 (1)
N-A	-180 / 0	0.0 0.0	0.02 (1)	7.81	I-G	0 / 1086	0.24 (1)
					N-B	-2226 / 0	0.96 (1)
N-M	0 / 1672	-18.5 -18.5	0.49 (4)	10.00			
M-L	0 / 1419	-18.5 -18.5	0.46 (4)	10.00			
L-K	0 / 1419	-18.5 -18.5	0.46 (4)	10.00			
K-J	0 / 892	-18.5 -18.5	0.25 (4)	10.00			
J-I	0 / 735	-18.5 -18.5	0.15 (1)	10.00			
I-H	0 / 0	-18.5 -18.5	0.00 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL	=	21.0	PSF
		DL	=	6.0	PSF
BOT	CH.	LL	=	0.0	PSF
		DL	=	7.4	PSF
TOTAL LOAD					= 34.4 PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.84")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.08")
ALLOWABLE DEFL.(TL)= L/360 (0.84")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.22")

CSI: TC=0.60/1.00 (G-H:1), BC=0.49/1.00 (M-N:4), WB=0.96/1.00 (B-N:1), SSI=0.16/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX MIN	MAX MIN	MAX MIN
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (G) (INPUT = 0.90)
JSI METAL= 0.51 (L) (INPUT = 1.00)

Scale = 1:99.5


JSI GRIP= 0.86 (A) (INPUT = 0.90)
JSI METAL= 0.57 (L) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H8S		1	TRUSS DESC. JT 45147	E20035309

Alpa Roof Truss, Maple


Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 15:04:34 2020 Page 1

ID:MF8iiriaTok7DlbpT4B71Xys4PG-nkhD9CIBQKAeE0cPT3SrhvqN6dfOtGfMT dMLczXiEx

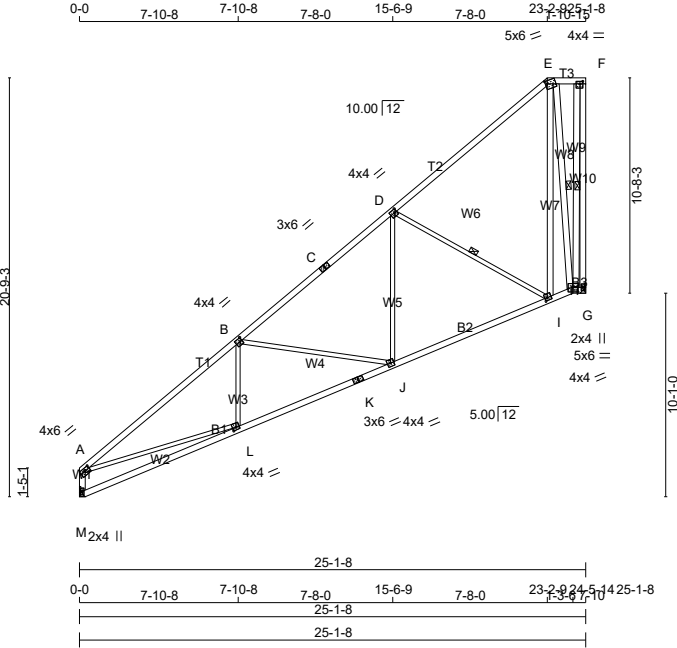

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR.				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS				DESIGN CRITERIA								
A - C	2x4	DRY	2100F 1.8E	SPF	FACTORED	MAXIMUM FACTORED	INPUT	REQRD	SPECIFIED LOADS:							
C - E	2x4	DRY	2100F 1.8E	SPF	GROSS REACTION	GROSS REACTION	BRG	BRG	TOP CH. LL = 21.0 PSF							
E - F	2x4	DRY	No.2	SPF	JT VERT HORZ	DOWN HORZ UPLIFT	IN-SX	IN-SX	DL = 6.0 PSF							
G - F	2x4	DRY	No.2	SPF	G 1212 0	1212 0 0	MECHANICAL		BOT CH. LL = 0.0 PSF							
M - A	2x4	DRY	No.2	SPF	M 1212 0	1212 0 0	MECHANICAL		DL = 7.4 PSF							
M - K	2x4	DRY	No.2	SPF	A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT G, M. MINIMUM BEARING LENGTH AT JOINT G = 1-8, JOINT M = 3-8.				TOTAL LOAD = 34.4 PSF							
K - H	2x4	DRY	No.2	SPF					SPACING = 24.0 IN. C/C							
H - G	2x4	DRY	No.2	SPF												
ALL WEBS EXCEPT I - E 2x4 DRY No.2 SPF				SPF	UNFACTORED REACTIONS				LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM							
E - H 2x4 DRY No.2 SPF	SPF									THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015						
H - F 2x4 DRY No.2 SPF	SPF									THIS DESIGN COMPLIES WITH: - PART 9 OF BCBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014						
DRY: SEASONED LUMBER.												(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD				
PLATES (table is in inches)												ALLOWABLE DEFL.(LL)= L/360 (0.84") CALCULATED VERT. DEFL.(LL) = L/ 999 (0.08") ALLOWABLE DEFL.(TL)= L/360 (0.84") CALCULATED VERT. DEFL.(TL) = L/ 999 (0.19")				
JT	TYPE	PLATES	W	LEN	Y	X	CHORDS				WEBS					
A	TMVW-t	MT20	4.0	6.0	1.50	2.75	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX. CSI (LC)	UNBRAC LENGTH	FR-TO	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)	
B	TMWW-t	MT20	4.0	4.0	2.00	1.25	FR-TO		FROM TO			FR-TO				
C	TS-t	MT20	3.0	6.0			A-B	-2033 / 0	-78.0	-78.0	0.50 (1)	5.18	L-B	-81 / 87	0.03 (4)	
D	TMWW-t	MT20	4.0	4.0	2.00	1.25	B-C	-1312 / 0	-78.0	-78.0	0.37 (1)	6.24	B-J	-590 / 0	0.75 (1)	
E	TTWW-m	MT20	5.0	6.0	1.75	1.00	C-D	-1312 / 0	-78.0	-78.0	0.37 (1)	6.24	J-D	0 / 488	0.11 (1)	
F	TMVW-t	MT20	4.0	4.0	1.50	1.75	D-E	-284 / 0	-78.0	-78.0	0.37 (1)	6.25	D-I	-940 / 0	0.53 (1)	
G	BMV1+p	MT20	2.0	4.0			E-F	-69 / 0	-78.0	-78.0	0.04 (1)	6.25	I-E	0 / 915	0.15 (1)	
H	BBWW-I	MT20	5.0	6.0	2.75	3.00	G-F	-1206 / 0	0.0	0.0	0.69 (1)	5.83	E-H	-1080 / 0	0.64 (1)	
I	BMWW-t	MT20	4.0	4.0	1.75	1.50	M-A	-1151 / 0	0.0	0.0	0.12 (1)	7.42	H-F	0 / 1134	0.18 (1)	
J	BMWW-t	MT20	4.0	4.0									A-L	0 / 1646	0.37 (1)	
K	BS-t	MT20	3.0	6.0			M-L	0 / 6	-18.5	-18.5	0.26 (4)	10.00				
L	BMWW-t	MT20	4.0	4.0	1.50	2.00	L-K	0 / 1721	-18.5	-18.5	0.43 (4)	10.00				
M	BMV1+p	MT20	2.0	4.0			K-J	0 / 1721	-18.5	-18.5	0.43 (4)	10.00				
								J-I	0 / 1089	-18.5	-18.5	0.31 (4)	10.00			
								I-H	0 / 203	-18.5	-18.5	0.18 (4)	10.00			
								H-G	0 / 0	-18.5	-18.5	0.00 (4)	10.00			

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H9S		1	TRUSS DESC. JT 45147	E20035310

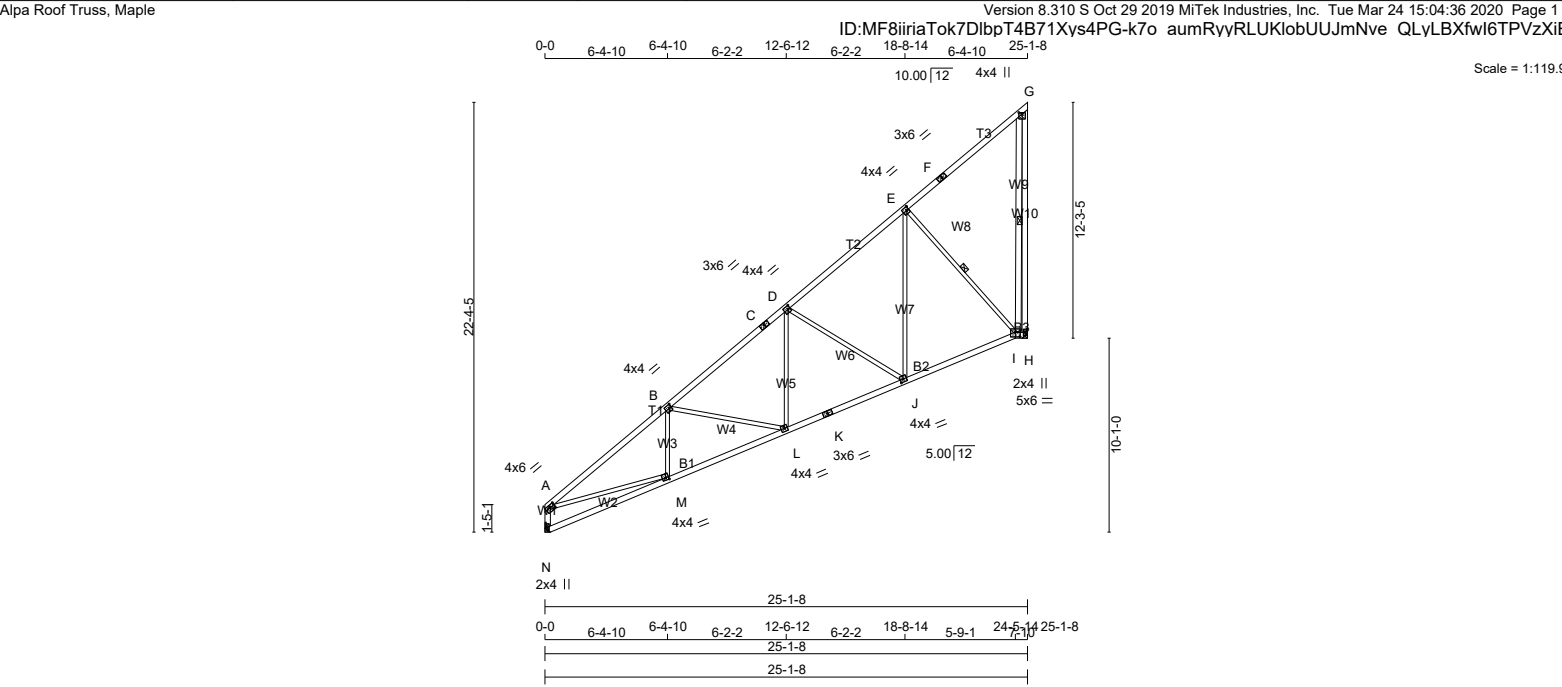

LUMBER				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER										DESIGN CRITERIA				[M][F]
N. L. G. A. RULES																		
CHORDS SIZE																		
LUMBER																		
DESCR.																		
N - A 2x4 DRY No.2 SPF																		
A - C 2x4 DRY No.2 SPF																		
C - F 2x4 DRY No.2 SPF																		
F - G 2x4 DRY No.2 SPF																		
H - G 2x4 DRY No.2 SPF																		
N - K 2x4 DRY No.2 SPF																		
K - I 2x4 DRY No.2 SPF																		
I - H 2x4 DRY No.2 SPF																		
ALL WEBS 2x3 DRY No.2 SPF																		
EXCEPT																		
I - G 2x4 DRY No.2 SPF																		
DRY: SEASONED LUMBER.																		


PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW-t	MT20	4.0	6.0	1.50	2.75
B, D, E						
B	TMWW-t	MT20	4.0	4.0	2.00	1.25
C	TS-t	MT20	3.0	6.0		
F	TS-t	MT20	3.0	6.0		
G	TMVW+p	MT20	4.0	4.0	1.00	2.00
H	BMV1+p	MT20	2.0	4.0		
I	BBWW-l	MT20	5.0	6.0	2.75	3.00
J	BMWW-t	MT20	4.0	4.0	2.00	1.75
K	BS-t	MT20	3.0	6.0		
L	BMWW-t	MT20	4.0	4.0		
M	BMWW-t	MT20	4.0	4.0	1.50	2.00
N	BMV1+p	MT20	2.0	4.0		

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



CHORDS MAX. FACTORED FORCE (LBS)					WEBS MAX. FACTORED FORCE (LBS)				
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1	MAX. CSI (LC)	MEMB.	FORCE (LBS)	MAX. CSI (LC)		
FR-TO		FROM TO			FR-TO				
N-A	-1161 / 0	0.0	0.0	0.12 (1)	A-M	0 / 1641	0.37 (1)		
A-B	-2049 / 0	-78.0	-78.0	0.54 (1)	M-B	-167 / 32	0.04 (1)		
B-C	-1603 / 0	-78.0	-78.0	0.42 (1)	B-L	-381 / 0	0.28 (1)		
C-D	-1603 / 0	-78.0	-78.0	0.42 (1)	L-D	0 / 342	0.08 (1)		
D-E	-878 / 0	-78.0	-78.0	0.37 (1)	D-J	-634 / 0	0.66 (1)		
E-F	-106 / 0	-78.0	-78.0	0.38 (1)	J-E	0 / 685	0.15 (1)		
F-G	-106 / 0	-78.0	-78.0	0.38 (1)	E-I	-958 / 0	0.51 (1)		
H-G	-1206 / 0	0.0	0.0	0.99 (1)	I-G	0 / 1057	0.17 (1)		
N-M	0 / 5	-18.5	-18.5	0.17 (4)					
M-L	0 / 1727	-18.5	-18.5	0.36 (1)					
L-K	0 / 1326	-18.5	-18.5	0.30 (1)					
K-J	0 / 1326	-18.5	-18.5	0.30 (1)					
J-I	0 / 737	-18.5	-18.5	0.23 (4)					
I-H	0 / 0	-18.5	-18.5	0.00 (4)					

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 15:06:30 2020 Page 1



Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

K-J	0/919	-18.5	-18.5	0.50 (4)	10.00
J-I	0/685	-18.5	-18.5	0.49 (4)	10.00
I-H	0/685	-18.5	-18.5	0.49 (4)	10.00
H-G	0/0	-18.5	-18.5	0.19 (4)	10.00
G-F	0/0	-96.5	-96.5	0.01 (1)	10.00
G-E	-1182/0	0.0	0.0	0.57 (1)	5.87


JSI GRIP= 0.84 (E) (INPUT = 0.90)
JSI METAL= 0.44 (B) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H10G		1	TRUSS DESC. JT 45147	E20035312

Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 15:04:38 2020 Page 1

ID:MF8iiriaTok7DlbpT4B71Xys4PG-qWwk?aoiUZh3jdVAvWnro?DNE6lpD3yOcbaUNzXiEt

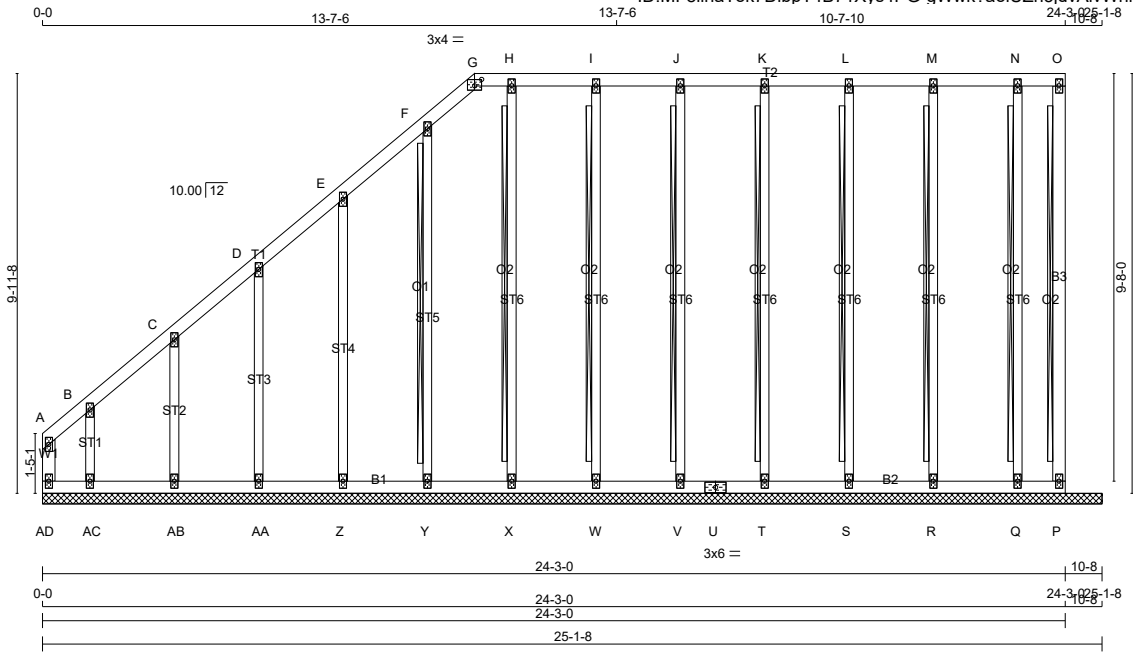

TOTAL WEIGHT = 145 lb

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE		LUMBER	DESCR.
AD- A	2x4	DRY	No.2	SPF
A - G	2x4	DRY	No.2	SPF
G - O	2x4	DRY	No.2	SPF
AD- U	2x4	DRY	No.2	SPF
U - P	2x4	DRY	No.2	SPF
P - O	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF
ALL GABLE WEBS	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				
GABLE STUDS SPACED AT 2'-0" OC.				

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
A	TMV+p	MT20	2.0	4.0
B, C, D, E, F, H, I, J, K, L, M, N				
B	TMW+w	MT20	2.0	4.0
G	TT-I	MT20	3.0	4.0
O	TMV+p	MT20	2.0	4.0
P	BMV1+p	MT20	2.0	4.0
Q, R, S, T, V, W, X, Y, Z, AA, AB, AC				
Q	BMW1+w	MT20	2.0	4.0
U	BS-t	MT20	3.0	6.0
AD	BMV1+p	MT20	2.0	4.0

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS.

THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE.

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S)

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

2x4 DRY SPF No.2 T-BRACE AT O-P, N-Q, M-R, L-S, K-T, J-V, I-W, H-X, F-Y

FASTEN T AND I-BRACES TO NARROW EDGE OF WEB WITH ONE ROW PER PLY OF 3" COMMON WIRE NAILS @ 6" O.C. WITH 3" MINIMUM END DISTANCE. BRACE MUST COVER 90% OF WEB LENGTH.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING				
TOTAL LOAD CASES: (4)				
CHORDS				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH (LC)	MEMB.
FR-TO		FROM TO		FR-TO
AD- A	-46 / 0	0.0 0.0 0.01 (1)	7.81	Q- N
A- B	-17 / 0	-78.0 -78.0 0.02 (1)	6.25	R- M
B- C	-12 / 0	-78.0 -78.0 0.04 (1)	6.25	S- L
C- D	-10 / 0	-78.0 -78.0 0.04 (1)	10.00	T- K
D- E	-6 / 0	-78.0 -78.0 0.04 (1)	10.00	V- J
E- F	-3 / 0	-78.0 -78.0 0.04 (1)	10.00	W- I
F- G	-23 / 0	-78.0 -78.0 0.04 (1)	6.25	X- H
G- H	0 / 0	-78.0 -78.0 0.04 (1)	10.00	Y- F
H- I	0 / 0	-78.0 -78.0 0.04 (1)	10.00	Z- E
I- J	0 / 0	-78.0 -78.0 0.04 (1)	10.00	AA- D
J- K	0 / 0	-78.0 -78.0 0.04 (1)	10.00	AB- C
K- L	0 / 0	-78.0 -78.0 0.04 (1)	10.00	AC- B
L- M	0 / 0	-78.0 -78.0 0.04 (1)	10.00	
M- N	0 / 0	-78.0 -78.0 0.04 (1)	10.00	
N- O	0 / 0	-78.0 -78.0 0.02 (1)	10.00	

DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL	=	21.0	PSF
		DL	=	6.0	PSF
BOT	CH.	LL	=	0.0	PSF
		DL	=	7.4	PSF
TOTAL LOAD					= 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.04/1.00 (B-C:1) , BC=0.02/1.00 (AB-AC:4) , WB=0.15/1.00 (E-Z:1) , SSI=0.07/1.00 (M-N:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.64 (G) (INPUT = 0.90)
JSI METAL= 0.08 (C) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



AD-AC	0 / 17	-18.5 -18.5 0.01 (1)	10.00
AC-AB	0 / 11	-18.5 -18.5 0.02 (4)	10.00
AB-AA	0 / 7	-18.5 -18.5 0.02 (4)	10.00
AA-Z	0 / 4	-18.5 -18.5 0.01 (4)	10.00
Z-Y	0 / 2	-18.5 -18.5 0.01 (4)	10.00
Y-X	0 / 0	-18.5 -18.5 0.01 (4)	10.00
X-W	0 / 0	-18.5 -18.5 0.01 (4)	10.00
W-V	0 / 0	-18.5 -18.5 0.01 (4)	10.00
V-U	0 / 0	-18.5 -18.5 0.01 (4)	10.00
U-T	0 / 0	-18.5 -18.5 0.01 (4)	10.00
T-S	0 / 0	-18.5 -18.5 0.01 (4)	10.00
S-R	0 / 0	-18.5 -18.5 0.02 (4)	10.00
R-Q	0 / 0	-18.5 -18.5 0.02 (4)	10.00
Q-P	0 / 0	-18.5 -18.5 0.01 (4)	10.00
P-O	-30 / 0	0.0 0.0 0.01 (1)	7.81

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H11P		1	TRUSS DESC. JT 45147	E20035313


Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 15:04:39 2020 Page 1

ID:MF8iiriaTok7DlbpT4B71Xys4PG-8iU6DwoKFtpwLnUNGc200?XOweSqYIC5dGK70qzXIEs

13-7-610-7-1024-3-010-825-1-8

Scale = 1:24.4

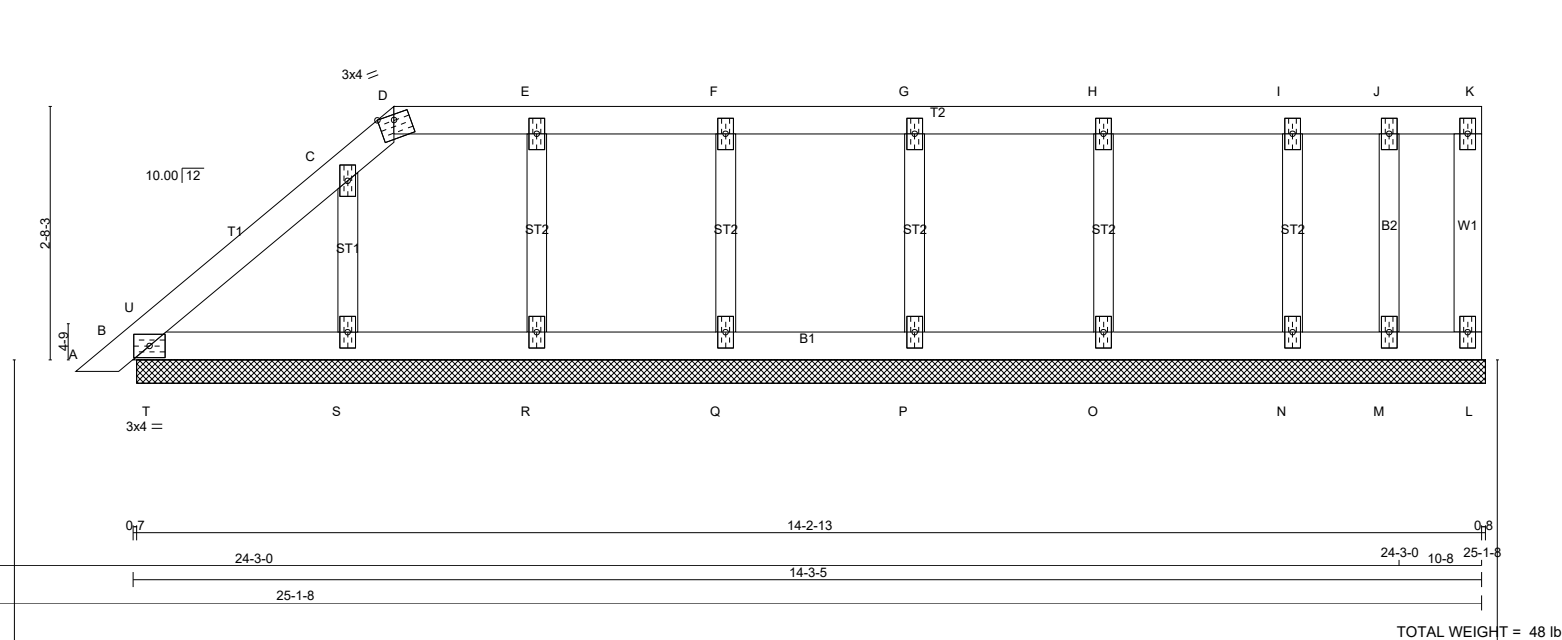

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. A - D 2x4 DRY No.2 SPF D - K 2x4 DRY No.2 SPF L - K 2x4 DRY No.2 SPF M - J 2x3 DRY No.2 SPF B - L 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF ALL GABLE WEBS 2x3 DRY No.2 SPF DRY: SEASONED LUMBER. GABLE STUDS SPACED AT 2-0-0 OC.				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS. THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE. BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT. OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. LOADING TOTAL LOAD CASES: (4) CHORDS MAX. FACTORED FORCE (LBS) FACTORED VERT. LOAD (PLF) MAX. FACTORED CSI (LC) MEMB. FR-TO FROM TO A-B 0 / 12 -78.0 -78.0 0.02 (1) 10.00 B-U -12 / 0 -78.0 -78.0 0.01 (4) 6.25 U-C 0 / 1 -78.0 -78.0 0.05 (1) 10.00 C-D -42 / 0 -78.0 -78.0 0.05 (1) 6.25 D-E 0 / 0 -78.0 -78.0 0.04 (1) 10.00 E-F 0 / 0 -78.0 -78.0 0.04 (1) 10.00 F-G 0 / 0 -78.0 -78.0 0.04 (1) 10.00 G-H 0 / 0 -78.0 -78.0 0.04 (1) 10.00 H-I 0 / 0 -78.0 -78.0 0.04 (1) 10.00 I-J 0 / 0 -78.0 -78.0 0.02 (1) 10.00 J-K 0 / 0 -78.0 -78.0 0.01 (1) 10.00 L-K -33 / 0 0.0 0.0 0.00 (1) 7.81 M-J -71 / 0 0.0 0.0 0.01 (1) 7.81 B-T 0 / 9 -18.5 -18.5 0.03 (1) 10.00 T-S 0 / 9 -18.5 -18.5 0.03 (1) 10.00 S-R 0 / 0 -18.5 -18.5 0.02 (4) 10.00 R-Q 0 / 0 -18.5 -18.5 0.02 (4) 10.00 Q-P 0 / 0 -18.5 -18.5 0.02 (4) 10.00 P-O 0 / 0 -18.5 -18.5 0.02 (4) 10.00 O-N 0 / 0 -18.5 -18.5 0.02 (4) 10.00 N-M 0 / 0 -18.5 -18.5 0.01 (4) 10.00 M-L 0 / 0 -18.5 -18.5 0.00 (4) 10.00 WEBS MAX. FACTORED FORCE (LBS) MAX. FACTORED CSI (LC) MEMB. FR-TO N-I -126 / 0 0.02 (1) 10.00 O-H -161 / 0 0.03 (1) 10.00 P-G -155 / 0 0.03 (1) 10.00 Q-F -155 / 0 0.03 (1) 10.00 R-E -156 / 0 0.03 (1) 10.00 S-C -173 / 0 0.03 (1) 10.00 T-U -65 / 0 0.00 (1) 10.00				DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF BCBC 2018, ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD CSI: TC=0.05/1.00 (C-U:1), BC=0.03/1.00 (S-T:1), WB=0.03/1.00 (H-O:1), SSI=0.06/1.00 (H-I:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 AUTOSOLVE RIGHT HEEL ONLY TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.12 (C) (INPUT = 0.90) JSI METAL= 0.09 (C) (INPUT = 1.00)			
---	--	--	--	---	--	--	--	--	--	--	--

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



Alpa Roof Truss, Maple



10-10	VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH	SPACING = 24.0 IN. C/C	10-10
	UNFACTORED REACTIONS	LOADING IN FLAT SECTION BASED ON A SLOPE	

	BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.	- PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED
--	--	--

	LOADING TOTAL LOAD CASES: (4)	RAVENS/EXPOSED TO WIND ROOF LIVE LOAD	
--	----------------------------------	--	--

		PLATE	GRIP(DRY)		SHEAR		SECTION	
			(PSI)		(PLI)		(PLI)	
			MAX	MIN	MAX	MIN	MAX	MIN
		MT20	650	371	1747	788	1987	1873


A circular professional engineer seal for the Province of Ontario. The outer ring contains the text "LICENSED PROFESSIONAL ENGINEER" at the top and "PROVINCE OF ONTARIO" at the bottom. The center of the seal features the name "Y. WIDYA" and the license number "100225448". Below the license number is the date "03/24/2020". A blue ink signature is written across the seal, overlapping the name and license number.

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H13P		1	TRUSS DESC. JT 45147	E20035315

Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 15:04:40 2020 Page 1

ID:MF8iiriaTok7DlbpT4B71Xys4PG-cu2UQGpy0Axxnyx3ZqKZFwD4SJ2kAH4FFrw4qYGzXiEr

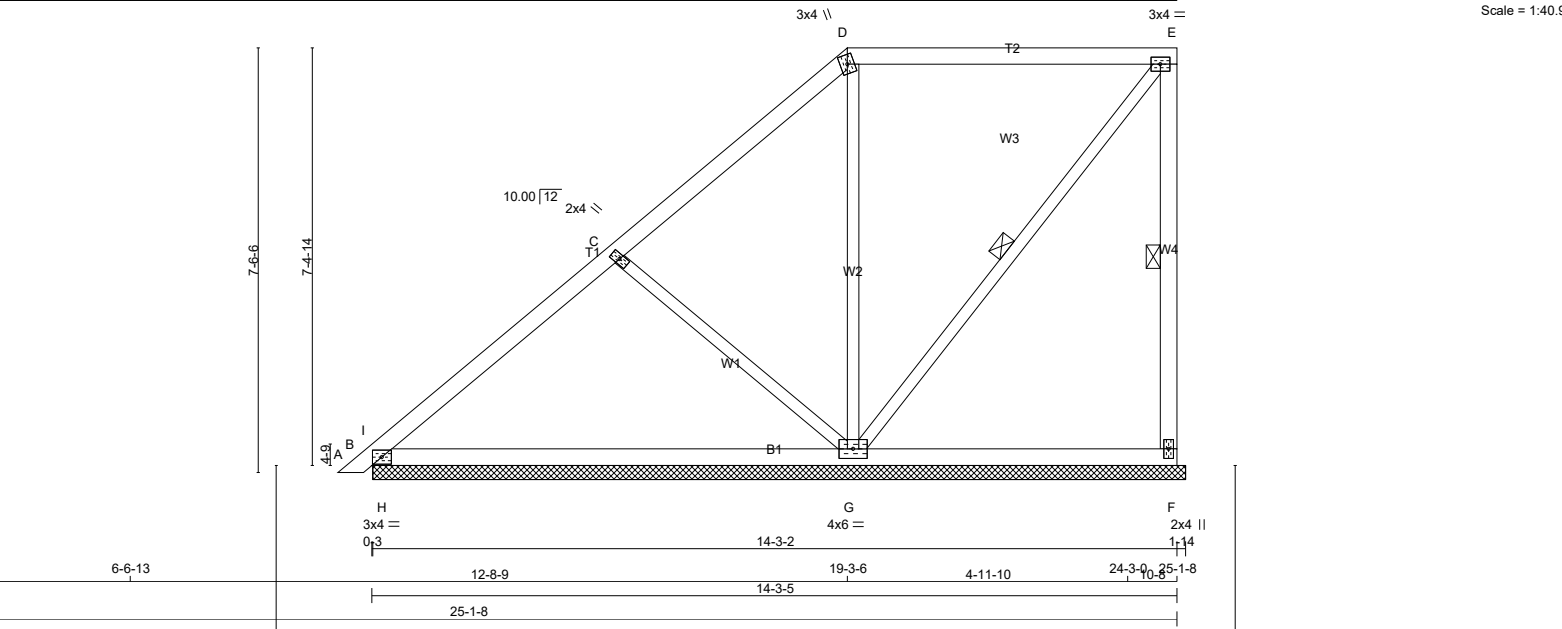

LUMBER N. L. G. A. RULES CHORDS SIZE A - D 2x4 DRY D - E 2x4 DRY F - E 2x4 DRY B - F 2x4 DRY ALL WEBS 2x3 DRY DRY: SEASONED LUMBER.					LUMBER No.2 No.2 No.2 No.2 No.2		DESCR. SPF SPF SPF SPF SPF		DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS <table><tr><th></th><th colspan="2">FACTORED GROSS REACTION</th><th colspan="2">MAXIMUM FACTORED GROSS REACTION</th><th colspan="2">INPUT BRG</th><th colspan="2">REQRD BRG</th></tr><tr><th>JT</th><th>VERT</th><th>HORZ</th><th>DOWN</th><th>HORZ</th><th>UPLIFT</th><th>IN-SX</th><th>IN-SX</th></tr><tr><td>F</td><td>222</td><td>0</td><td>222</td><td>0</td><td>0</td><td>14-5-0 (14-3-2)</td><td>8-13</td></tr><tr><td>B</td><td>415</td><td>0</td><td>415</td><td>0</td><td>0</td><td>14-5-0 (14-3-2)</td><td>8-13</td></tr><tr><td>G</td><td>780</td><td>0</td><td>780</td><td>0</td><td>0</td><td>14-5-0 (14-3-2)</td><td>8-13</td></tr></table> VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH UNFACTORED REACTIONS <table><tr><th>JT</th><th>1ST LCASE</th><th>MAX./MIN. SNOW</th><th>MIN. COMPONENT LIVE</th><th>PERM. LIVE</th><th>WIND</th><th>DEAD</th><th>SOIL</th></tr><tr><td>F</td><td>158</td><td>98 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>60 / 0</td><td>0 / 0</td></tr><tr><td>B</td><td>295</td><td>186 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>109 / 0</td><td>0 / 0</td></tr><tr><td>G</td><td>557</td><td>336 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>220 / 0</td><td>0 / 0</td></tr></table> BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, B, G BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED. 1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-F, E-G. END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW LOADING TOTAL LOAD CASES: (4) <table><tr><th colspan="4">CHORDS</th><th colspan="4">WEBS</th></tr><tr><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>FACTORED VERT. LOAD (PLF)</th><th>MAX. LOAD LC1 (LC)</th><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>MAX. UNBRACED LENGTH</th><th>MEMB. MAX. FACTORED FORCE (LBS)</th></tr><tr><td>FR-TO</td><td></td><td>FROM</td><td>TO</td><td>FR-TO</td><td></td><td></td><td></td></tr><tr><td>A-B</td><td>0 / 12</td><td>-78.0</td><td>-78.0</td><td>0.02 (1)</td><td>G-D</td><td>-367 / 0</td><td>0.36 (1)</td></tr><tr><td>B-I</td><td>-458 / 0</td><td>-78.0</td><td>-78.0</td><td>0.16 (4)</td><td>C-G</td><td>-326 / 0</td><td>0.17 (1)</td></tr><tr><td>I-C</td><td>-253 / 0</td><td>-78.0</td><td>-78.0</td><td>0.25 (1)</td><td>G-E</td><td>-48 / 0</td><td>0.03 (1)</td></tr><tr><td>C-D</td><td>-6 / 5</td><td>-78.0</td><td>-78.0</td><td>0.24 (1)</td><td>H-I</td><td>0 / 300</td><td>0.00 (1)</td></tr><tr><td>D-E</td><td>0 / 30</td><td>-78.0</td><td>-78.0</td><td>0.46 (1)</td><td></td><td></td><td></td></tr><tr><td>F-E</td><td>-190 / 0</td><td>0.0</td><td>0.0</td><td>0.05 (1)</td><td></td><td></td><td></td></tr><tr><td>B-H</td><td>0 / 223</td><td>-18.5</td><td>-18.5</td><td>0.14 (4)</td><td></td><td></td><td></td></tr><tr><td>H-G</td><td>0 / 223</td><td>-18.5</td><td>-18.5</td><td>0.28 (4)</td><td></td><td></td><td></td></tr><tr><td>G-F</td><td>0 / 0</td><td>-18.5</td><td>-18.5</td><td>0.26 (4)</td><td></td><td></td><td></td></tr></table>								FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG		JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	F	222	0	222	0	0	14-5-0 (14-3-2)	8-13	B	415	0	415	0	0	14-5-0 (14-3-2)	8-13	G	780	0	780	0	0	14-5-0 (14-3-2)	8-13	JT	1ST LCASE	MAX./MIN. SNOW	MIN. COMPONENT LIVE	PERM. LIVE	WIND	DEAD	SOIL	F	158	98 / 0	0 / 0	0 / 0	0 / 0	60 / 0	0 / 0	B	295	186 / 0	0 / 0	0 / 0	0 / 0	109 / 0	0 / 0	G	557	336 / 0	0 / 0	0 / 0	0 / 0	220 / 0	0 / 0	CHORDS				WEBS				MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LOAD LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH	MEMB. MAX. FACTORED FORCE (LBS)	FR-TO		FROM	TO	FR-TO				A-B	0 / 12	-78.0	-78.0	0.02 (1)	G-D	-367 / 0	0.36 (1)	B-I	-458 / 0	-78.0	-78.0	0.16 (4)	C-G	-326 / 0	0.17 (1)	I-C	-253 / 0	-78.0	-78.0	0.25 (1)	G-E	-48 / 0	0.03 (1)	C-D	-6 / 5	-78.0	-78.0	0.24 (1)	H-I	0 / 300	0.00 (1)	D-E	0 / 30	-78.0	-78.0	0.46 (1)				F-E	-190 / 0	0.0	0.0	0.05 (1)				B-H	0 / 223	-18.5	-18.5	0.14 (4)				H-G	0 / 223	-18.5	-18.5	0.28 (4)				G-F	0 / 0	-18.5	-18.5	0.26 (4)			
	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG																																																																																																																																																																																	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX																																																																																																																																																																																	
F	222	0	222	0	0	14-5-0 (14-3-2)	8-13																																																																																																																																																																																	
B	415	0	415	0	0	14-5-0 (14-3-2)	8-13																																																																																																																																																																																	
G	780	0	780	0	0	14-5-0 (14-3-2)	8-13																																																																																																																																																																																	
JT	1ST LCASE	MAX./MIN. SNOW	MIN. COMPONENT LIVE	PERM. LIVE	WIND	DEAD	SOIL																																																																																																																																																																																	
F	158	98 / 0	0 / 0	0 / 0	0 / 0	60 / 0	0 / 0																																																																																																																																																																																	
B	295	186 / 0	0 / 0	0 / 0	0 / 0	109 / 0	0 / 0																																																																																																																																																																																	
G	557	336 / 0	0 / 0	0 / 0	0 / 0	220 / 0	0 / 0																																																																																																																																																																																	
CHORDS				WEBS																																																																																																																																																																																				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LOAD LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH	MEMB. MAX. FACTORED FORCE (LBS)																																																																																																																																																																																	
FR-TO		FROM	TO	FR-TO																																																																																																																																																																																				
A-B	0 / 12	-78.0	-78.0	0.02 (1)	G-D	-367 / 0	0.36 (1)																																																																																																																																																																																	
B-I	-458 / 0	-78.0	-78.0	0.16 (4)	C-G	-326 / 0	0.17 (1)																																																																																																																																																																																	
I-C	-253 / 0	-78.0	-78.0	0.25 (1)	G-E	-48 / 0	0.03 (1)																																																																																																																																																																																	
C-D	-6 / 5	-78.0	-78.0	0.24 (1)	H-I	0 / 300	0.00 (1)																																																																																																																																																																																	
D-E	0 / 30	-78.0	-78.0	0.46 (1)																																																																																																																																																																																				
F-E	-190 / 0	0.0	0.0	0.05 (1)																																																																																																																																																																																				
B-H	0 / 223	-18.5	-18.5	0.14 (4)																																																																																																																																																																																				
H-G	0 / 223	-18.5	-18.5	0.28 (4)																																																																																																																																																																																				
G-F	0 / 0	-18.5	-18.5	0.26 (4)																																																																																																																																																																																				
									DESIGN CRITERIA				[M]																																																																																																																																																																											
									SPECIFIED LOADS:																																																																																																																																																																															
									TOP	CH.	LL	=	21.0	PSF																																																																																																																																																																										
											DL	=	6.0	PSF																																																																																																																																																																										
									BOT	CH.	LL	=	0.0	PSF																																																																																																																																																																										
											DL	=	7.4	PSF																																																																																																																																																																										
									TOTAL	LOAD	=	34.4	PSF																																																																																																																																																																											

JT	TYPE	PLATES	W	LEN	Y	X
B	TMB1-I	MT20	3.0	4.0		
C	TMW+w	MT20	2.0	4.0		
D	TTW+m	MT20	3.0	4.0		
E	TMVW-t	MT20	3.0	4.0		
F	BMV1+p	MT20	2.0	4.0		
G	BMWWW1-t	MT20	4.0	6.0		

DESIGN CRITERIA	
SPECIFIED LOADS:	
TOP CH.	LL = 21.0 PSF
	DL = 6.0 PSF
BOT CH.	LL = 0.0 PSF
	DL = 7.4 PSF
TOTAL LOAD	= 34.4 PSF
SPACING = 24.0 IN. C/C	

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.46/1.00 (D-E:1), BC=0.28/1.00 (G-H:4), WB=0.36/1.00 (D-G:1), SSI=0.27/1.00 (B-H:4)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES			
PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX	MIN	MAX	MIN
MT20	650	371	1747
	788	1887	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.45 (D) (INPUT = 0.90)
JSI METAL= 0.11 (D) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H14P		1	TRUSS DESC. JT 45147	E20035316

Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 15:04:41 2020 Page 1

ID:MF8iiriaTok7DlbpT4B71Xys4PG-44ctdcqanU3ea5eIO14UTQdeeR6?0ZyO4apE5izXiEq

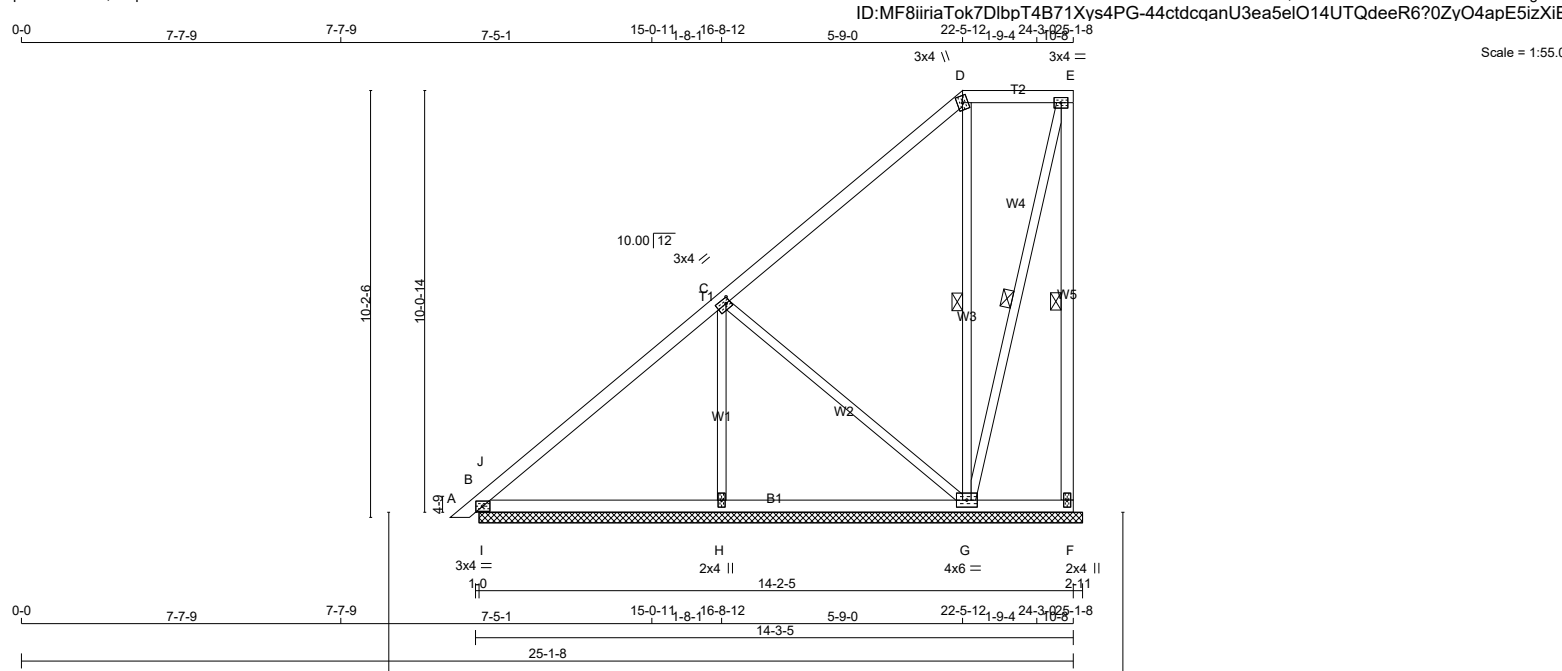

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	
A - D	2x4	DRY	No.2
D - E	2x4	DRY	No.2
F - E	2x4	DRY	No.2
B - F	2x4	DRY	No.2
ALL WEBS 2x3 DRY No.2			
DRY: SEASONED LUMBER.			

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMB1-I	MT20	3.0	4.0	
C	TMWW-t	MT20	3.0	4.0	1.50 1.25
D	TTW+m	MT20	3.0	4.0	
E	TMVW-t	MT20	3.0	4.0	
F	BMV1+p	MT20	2.0	4.0	
G	BMWWW1-t	MT20	4.0	6.0	
H	BMW1+w	MT20	2.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

		BEARINGS			
		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT		VERT	HORZ	DOWN	HORZ UPLIFT
F	92	0	92	0	0
B	362	0	362	0	0
G	488	0	488	0	0
H	476	0	476	0	0

VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH

UNFACTORED REACTIONS

		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
F	64	44 / 0	0 / 0	0 / 0	0 / 0	21 / 0	0 / 0
B	256	169 / 0	0 / 0	0 / 0	0 / 0	86 / 0	0 / 0
G	347	214 / 0	0 / 0	0 / 0	0 / 0	133 / 0	0 / 0
H	342	194 / 0	0 / 0	0 / 0	0 / 0	148 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, B, G, H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-F, D-G, E-G.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

		CHORDS				WEBS			
		MAX. FACTORED	FACTORED			MAX. FACTORED	FACTORED		
MEMB.		FORCE (LBS)	VERT. LOAD (PLF)	LC1	MAX CSI (LC)	MEMB.	FORCE (LBS)	MAX CSI (LC)	
FR-TO			FROM	TO	LENGTH	FR-TO			
A-B	0 / 12	-78.0	-78.0	0.02 (1)	10.00	G-D	-277 / 0	0.19 (1)	
B-J	-71 / 0	-78.0	-78.0	0.07 (1)	6.25	H-C	-322 / 0	0.13 (1)	
J-C	-136 / 0	-78.0	-78.0	0.42 (1)	6.25	C-G	-170 / 0	0.20 (1)	
C-D	-29 / 0	-78.0	-78.0	0.42 (1)	6.25	G-E	-26 / 0	0.02 (1)	
D-E	0 / 6	-78.0	-78.0	0.09 (1)	10.00	I-J	-364 / 6	0.00 (1)	
F-E	-78 / 0	0.0	0.0	0.04 (1)	6.25				
B-I	0 / 127	-18.5	-18.5	0.16 (1)	10.00				
I-H	0 / 127	-18.5	-18.5	0.17 (4)	10.00				
H-G	0 / 127	-18.5	-18.5	0.17 (4)	10.00				
G-F	0 / 0	-18.5	-18.5	0.08 (4)	10.00				

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 21.0 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.42/1.00 (C-J:1), BC=0.17/1.00 (H-I:4), WB=0.20/1.00 (C-G:1), SSI=0.30/1.00 (B-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.36 (C) (INPUT = 0.90)
JSI METAL= 0.09 (D) (INPUT = 1.00)


JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H15P		1	TRUSS DESC. JT 45147	E20035317

Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 15:04:42 2020 Page 1

ID:MF8iiriaTok7DlbpT4B71Xys4PG-YHAFrxrCXoBVCFDyxIbj?e9lrrQSI0UYJEZnd8zXiEp

24-3-0 25-1-8

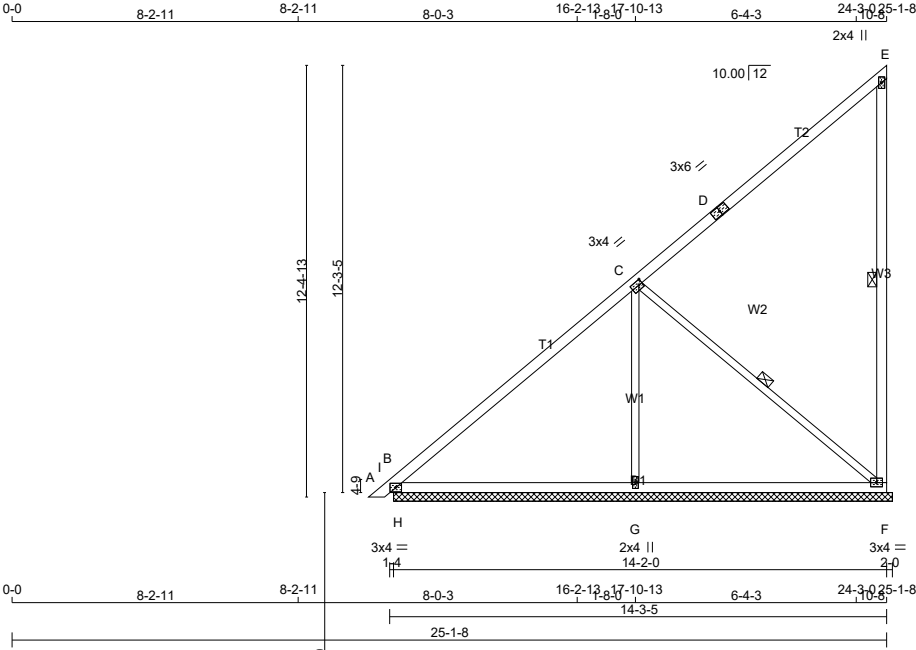

TOTAL WEIGHT = 4 X 63 = 254 lb [M]

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	DRY	LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF
D - E	2x4	DRY	No.2	SPF
F - E	2x4	DRY	No.2	SPF
B - F	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMB1-I	MT20	3.0	4.0	
C	TMWW-I	MT20	3.0	4.0	1.50 1.25
D	TS-I	MT20	3.0	6.0	
E	TMV+p	MT20	2.0	4.0	
F	BMVW1-I	MT20	3.0	4.0	
G	BMW1+w	MT20	2.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG	
JT		VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	
F		396	0	396	0	0	14-4-0 (14-2-0)	1-15	
B		429	0	429	0	0	14-4-0 (14-2-0)	1-15	
G		592	0	592	0	0	14-4-0 (14-2-0)	1-15	

VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
F	280	183 / 0	0 / 0	0 / 0	0 / 0	97 / 0	0 / 0
B	303	202 / 0	0 / 0	0 / 0	0 / 0	101 / 0	0 / 0
G	426	236 / 0	0 / 0	0 / 0	0 / 0	190 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, B, G

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-F, C-F.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LOAD LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH	MAX. FACTORED FORCE (LBS)
FR-TO		FROM	TO	FR-TO			
A-B	0 / 12	-78.0	-78.0 0.02 (1)	G-C	-399 / 0	10.00	0.25 (1)
B-I	-81 / 0	-78.0	-78.0 0.11 (1)	C-F	-209 / 0	6.25	0.12 (1)
I-C	-174 / 0	-78.0	-78.0 0.65 (1)	H-I	-500 / 0	6.25	0.00 (1)
C-D	-41 / 0	-78.0	-78.0 0.63 (1)			6.25	
D-E	-41 / 0	-78.0	-78.0 0.63 (1)			6.25	
F-E	-217 / 0	0.0	0.0 0.18 (1)			6.25	
B-H	0 / 162	-18.5	-18.5 0.21 (1)			10.00	
H-G	0 / 162	-18.5	-18.5 0.29 (4)			10.00	
G-F	0 / 162	-18.5	-18.5 0.29 (4)			10.00	

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 21.0 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN./C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.65/1.00 (C-I:1) , BC=0.29/1.00 (G-H:4) , WB=0.25/1.00 (C-G:1) , SSI=0.41/1.00 (B-H:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES					
PLATE	GRIP(DRY)	SHEAR	SECTION		
	(PSI)	(PLI)	(PLI)		
	MAX MIN	MAX MIN	MAX MIN		
MT20	650 371	1747 788	1987 1873		


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.77 (D) (INPUT = 0.90)
JSI METAL= 0.36 (D) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



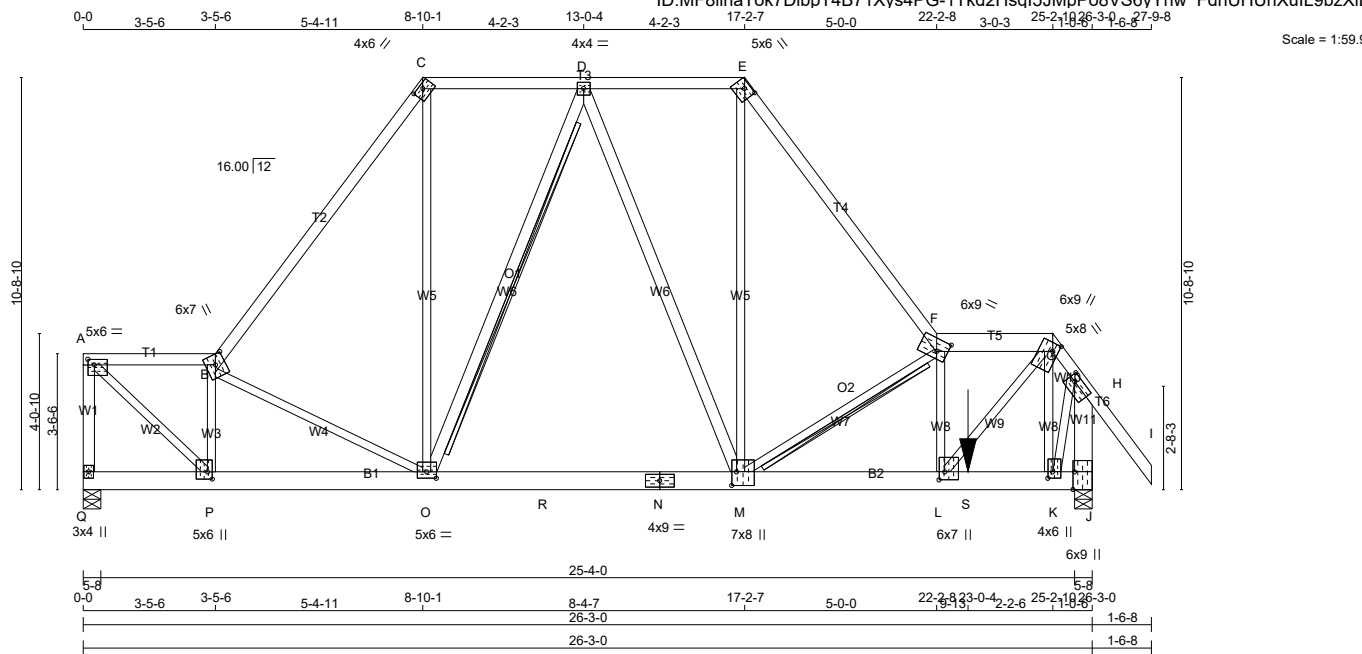

TOTAL WEIGHT = 166 lb

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE		LUMBER	DESCR
Q - A	2x4	DRY	No.2	SPF
A - B	2x4	DRY	No.2	SPF
B - C	2x4	DRY	1650F 1.5E	SPF
C - E	2x4	DRY	No.2	SPF
E - F	2x4	DRY	1650F 1.5E	SPF
F - G	2x6	DRY	No.2	SPF
G - I	2x4	DRY	No.2	SPF
J - H	2x6	DRY	No.2	SPF
Q - N	2x6	DRY	1650F 1.5E	SPF
N - J	2x6	DRY	1650F 1.5E	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF
O - D	2x4	DRY	No.2	SPF
D - M	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
A	TMWw-t	MT20	5.0	6.0	1.75	2.00
B	TTWW+m	MT20	6.0	7.0	3.25	3.00
C	TTW-h	MT20	4.0	6.0	1.25	3.00
D	TMWw-t	MT20	4.0	4.0		
E	TTW-h	MT20	5.0	6.0	1.75	3.00
F	TTWW-m	MT20	6.0	9.0	3.75	3.25
G	TTWW+m	MT20	6.0	9.0	2.50	1.75
H	TMWw-t	MT20	5.0	8.0	2.00	2.00
J	BMV1+t	MT20	6.0	9.0	Edge	0.50
K	BMWw+t	MT20	4.0	6.0	2.00	1.50
L	BMWw+t	MT20	6.0	7.0	2.50	1.75
M	BMWWw+t	MT20	7.0	8.0	4.25	1.50
N	BS-t	MT20	4.0	9.0		
O	BMWWw-t	MT20	5.0	6.0	2.00	3.00
P	BMWw+t	MT20	5.0	6.0	2.25	1.50
Q	BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER
BEARINGS

	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION			INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
Q	2191	0	2191	0	0	5-8	3-10
J	3672	0	3672	0	0	5-8	5-8

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
Q	1565	939 / 0	0 / 0	0 / 0	0 / 0	626 / 0	0 / 0
J	2618	1598 / 0	0 / 0	0 / 0	0 / 0	1020 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) Q, J
BEARING SIZE FACTOR = 1.15 AT JNT(S) J (BASED ON SUPPORT DEPTH = 1-8)

BRACING

FOR SECTION C-E, MAX. PURLIN SPACING = 2.00 FT.
FOR OTHER SECTIONS, TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.90 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

2x4 DRY SPF No.2 T-BRACE AT D-O, F-M

FASTEN T AND I-BRACES TO NARROW EDGE OF WEB WITH ONE ROW PER PLY OF 3" COMMON WIRE NAILS @ 6" O.C. WITH 3" MINIMUM END DISTANCE. BRACE MUST COVER 90% OF WEB LENGTH.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS					WEB S			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1	MAX CSI (LC)	MAX. UNBRAC	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)
FR-TO		FROM TO			LENGTH	FR-TO		
Q-A	-2081 / 0	0.0	0.0	0.39 (1)	5.81	A-P	0 / 2877	0.71 (1)
A-B	-2091 / 0	-78.0	-78.0	0.24 (1)	4.43	P-B	-2113 / 0	0.45 (1)
B-C	-2599 / 0	-78.0	-78.0	0.67 (1)	4.3	B-O	-692 / 0	0.50 (1)
C-D	-1576 / 0	-85.5	-85.5	0.27 (1)	2.00	O-C	0 / 1707	0.42 (1)
D-E	-2058 / 0	-85.5	-85.5	0.30 (1)	2.00	O-D	-864 / 0	0.78 (1)
E-F	-3405 / 0	-78.0	-78.0	0.69 (1)	3.90	D-M	0 / 450	0.08 (1)
F-G	-3507 / 0	-78.0	-78.0	0.13 (1)	4.4	M-E	0 / 2367	0.59 (1)
G-H	-1767 / 0	-78.0	-78.0	0.20 (1)	4.78	M-F	-1870 / 0	0.58 (1)
H-I	0 / 52	-78.0	-78.0	0.17 (1)	10.00	L-F	-1968 / 0	0.46 (1)
J-H	-3946 / 0	0.0	0.0	0.40 (1)	5.35	L-G	0 / 3914	0.97 (1)
						K-G	-1744 / 0	0.41 (1)
						K-H	0 / 2531	0.63 (1)
Q-P	0 / 0	-18.5	-18.5	0.13 (1)	10.00			
P-O	0 / 2162	-18.5	-18.5	0.44 (1)	10.00			
O-R	0 / 1894	-18.5	-18.5	0.66 (1)	10.00			
R-N	0 / 1894	-239.3	-239.3	0.66 (1)	10.00			
N-M	0 / 1894	-239.3	-239.3	0.66 (1)	10.00			
M-L	0 / 3565	-239.3	-239.3	0.79 (1)	10.00			
L-S	0 / 1041	-239.3	-239.3	0.25 (1)	10.00			
S-K	0 / 1041	-18.5	-18.5	0.25 (1)	10.00			
K-J	0 / 0	-18.5	-18.5	0.14 (1)	10.00			

FACTORED CONCENTRATED LOADS (LBS)

FACTORED CONCENTRATED LOADS (EDS)									
JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
S	23-0-4	-704	-704	---	FRONT	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) **C1:** A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:

TOP	CH.	LL =	21.0	PSF
		DL =	6.0	PSF
BOT	CH.	LL =	0.0	PSF
		DL =	7.4	PSF
TOTAL LOAD			= 34.4	PSF

SPACING = 24.0 IN. C/C

LOADING IN HIGHEST FLAT SECTION BASED ON
PIGGYBACK TRUSS WITH SLOPES OF 6.00/12
AND -6.00/12 AND RESPECTIVE WALL HEIGHTS
OF 0-0 AND 0-0 AND AN ADDITIONAL DEAD
LOAD OF 3.0 P.S.F.

LOADING IN OTHER FLAT SECTIONS BASED ON
A SLOPE OF 6.00/12 AND 6.00/12

GIRDER TYPE: CStdGirder
START DISTANCE = 12-0-0
START SPAN CARRIED = 11-1-14
END DISTANCE = 23-0-4
END SPAN CARRIED = 11-1-14
END WALL WIDTH = 0-0
APPLIED TO FRONT SIDE OF BOTTOM CHORD.
- ADD'L LOADS BASED ON 55 % OF GSL.

*** NON STANDARD GIRDER ***
ADDT'L USER-DEFINED LOADS APPLIED TO ALL
LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
-OVERHANG NOT TO BE ALTERED OR CUT OFF

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.87")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.19")
ALLOWABLE DEFL.(TL)= L/360 (0.87")
CALCULATED VERT. DEFL.(TL) = L/ 808 (0.39")

CSI: TC=0.69/1.00 (E-F:1) , BC=0.79/1.00 (L-M:1) ,
WB=0.97/1.00 (G-L:1) , SSI=0.60/1.00 (M-O:1)


DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE LEFT HEEL ONLY


CONTINUED ON PAGE 2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H17		1	TRUSS DESC. JT 45147	E20035319

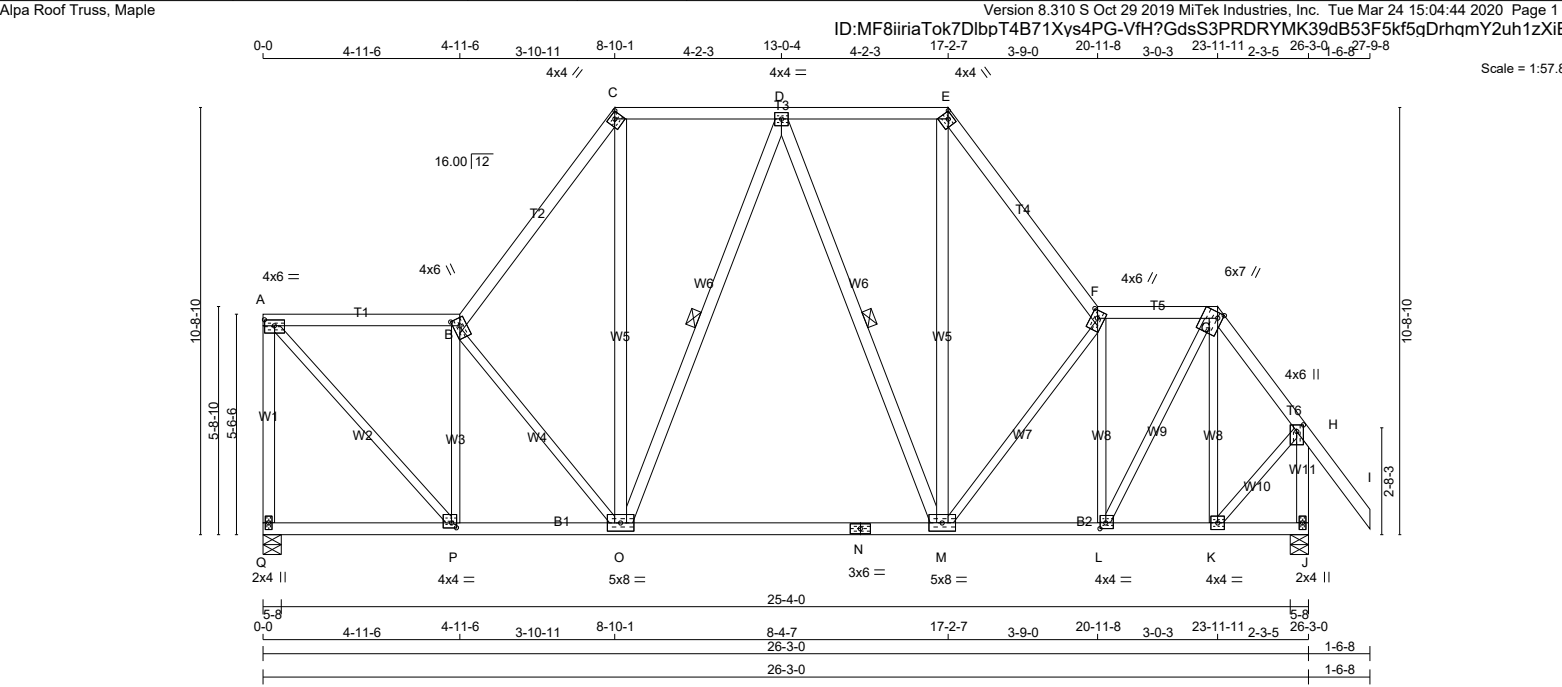

LUMBER N. L. G. A. RULES CHORDS SIZE Q - A 2x4 DRY No.2 A - B 2x4 DRY No.2 B - C 2x4 DRY No.2 C - E 2x4 DRY No.2 E - F 2x4 DRY No.2 F - G 2x4 DRY No.2 G - I 2x4 DRY No.2 J - H 2x4 DRY No.2 Q - N 2x4 DRY No.2 N - J 2x4 DRY No.2 ALL WEBS 2x3 DRY No.2 EXCEPT O - C 2x4 DRY No.2 O - D 2x4 DRY No.2 D - M 2x4 DRY No.2 M - E 2x4 DRY No.2 DRY: SEASONED LUMBER.				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS FACTORED GROSS REACTION JT VERT 1294 0 Q 1294 0 J 1431 0 MAXIMUM FACTORED GROSS REACTION DOWN 1294 0 HORZ 1431 0 INPUT BRG IN-SX 5-8 UP-LIFT 5-8 REQRD BRG IN-SX 1-15 UP-LIFT 2-2 UNFACTORED REACTIONS 1ST LCASE JT COMBINED Q 925 J 1020 SNOW 549 / 0 623 / 0 LIVE 0 / 0 0 / 0 PERM.LIVE 0 / 0 0 / 0 WIND 0 / 0 0 / 0 DEAD 376 / 0 397 / 0 SOIL 0 / 0 0 / 0 BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) Q, J BRACING FOR SECTION C-E, MAX. PURLIN SPACING = 2.00 FT. FOR OTHER SECTIONS, TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.60 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. 1 LATERAL BRACE(S) AT 1/2 LENGTH OF D-O, D-M. END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW LOADING TOTAL LOAD CASES: (4) CHORDS MEMB. MAX. FACTORED FORCE (LBS) FR-TO Q-A -1252 / 0 A-B -987 / 0 B-C -1234 / 0 C-D -749 / 0 D-E -755 / 0 E-F -1243 / 0 F-G -988 / 0 G-H -878 / 0 H-I 0 / 52 J-H -1421 / 0 Q-P 0 / 0 P-O 0 / 1007 O-N 0 / 835 N-M 0 / 835 M-L 0 / 1006 L-K 0 / 491 K-J 0 / 0 VERT. LOAD (PLF) -78.0 -78.0 -78.0 -85.5 -85.5 -78.0 -78.0 -78.0 -78.0 0.0 -18.5 -18.5 -18.5 -18.5 -18.5 -18.5 -18.5 0.0 LC1 MAX 0.0 0.26 (1) 0.18 (1) 0.19 (1) 0.19 (1) 0.17 (1) 0.10 (1) 0.12 (1) 0.15 (1) 0.0 0.10 (4) 0.29 (4) 0.28 (4) 0.28 (4) 0.30 (4) 0.12 (1) 0.05 (4) MAX. UNBRACED LENGTH 7.19 5.97 5.60 2.00 2.00 5.60 6.17 6.25 10.00 6.84 10.00 10.00 10.00 10.00 10.00 10.00 10.00 WEBS MEMB. MAX. FACTORED FORCE (LBS) FR-TO A-P 0 / 1455 P-B -998 / 0 B-O -435 / 0 O-C 0 / 689 C-D -235 / 0 D-M -219 / 0 M-E 0 / 702 E-F -443 / 0 F-G -899 / 0 G-H 0 / 1045 H-I -403 / 0 I-J 0 / 692 A-P 0 / 1455 P-B -998 / 0 B-O -435 / 0 O-C 0 / 689 C-D -235 / 0 D-M -219 / 0 M-E 0 / 702 E-F -443 / 0 F-G -899 / 0 G-H 0 / 1045 H-I -403 / 0 I-J 0 / 692 MAX. FACTORED CSI (LC) 0.33 (1) 0.46 (1) 0.33 (1) 0.11 (1) 0.16 (1) 0.15 (1) 0.11 (1) 0.35 (1) 0.45 (1) 0.24 (1) 0.20 (1) 0.16 (1) DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN./C/C LOADING IN HIGHEST FLAT SECTION BASED ON PIGGYBACK TRUSS WITH SLOPES OF 6.00/12 AND -6.00/12 AND RESPECTIVE WALL HEIGHTS OF 0-0 AND 0-0 AND AN ADDITIONAL DEAD LOAD OF 3.0 P.S.F. LOADING IN OTHER FLAT SECTIONS BASED ON A SLOPE OF 6.00/12 AND 6.00/12 THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF BCBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 DESIGN ASSUMPTIONS -OVERHANG NOT TO BE ALTERED OR CUT OFF. (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD ALLOWABLE DEFL.(LL)= L/360 (0.87") CALCULATED VERT. DEFL.(LL)= L/ 999 (0.05") ALLOWABLE DEFL.(TL)= L/360 (0.87") CALCULATED VERT. DEFL.(TL)= L/ 999 (0.16") CSI: TC=0.69/1.00 (A-Q:1) , BC=0.30/1.00 (L-M:4) , WB=0.46/1.00 (B-P:1) , SSI=0.17/1.00 (C-D:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.90 (L) (INPUT = 0.90) JSI METAL= 0.34 (E) (INPUT = 1.00)			
PLATES (table is in inches) JT TYPE PLATES W LEN Y X A TMVW-t MT20 4.0 6.0 1.75 3.00 B TTWW+m MT20 4.0 6.0 2.25 2.00 C TTW-h MT20 4.0 4.0 Edge D TMWW-t MT20 4.0 4.0 E TTW-h MT20 4.0 4.0 Edge F TTWW+m MT20 4.0 6.0 2.25 2.00 G TTWW+m MT20 6.0 7.0 Edge 1.50 H TMVW+p MT20 4.0 6.0 2.00 2.00 J BMV1+p MT20 2.0 4.0 K BMWW-t MT20 4.0 4.0 L BMWW-t MT20 4.0 4.0 1.75 1.75 M BMWWW-t MT20 5.0 8.0 N BS-t MT20 3.0 6.0 O BMWWW-t MT20 5.0 8.0 P BMWW-t MT20 4.0 4.0 1.50 1.50 Q BMV1+p MT20 2.0 4.0 Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.				LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2			

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H18		1	TRUSS DESC. JT 45147	E20035320

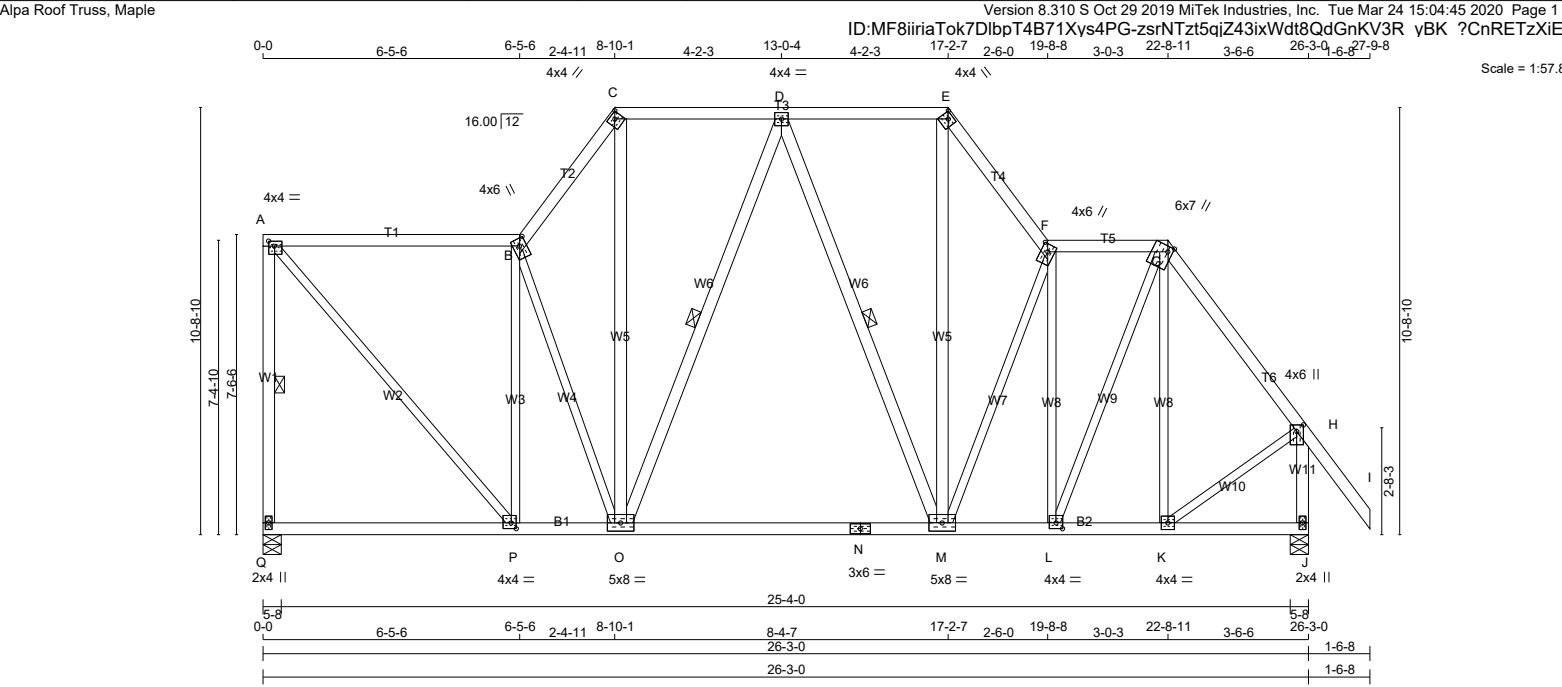

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
Q - A	2x4	DRY	No.2
A - B	2x4	DRY	No.2
B - C	2x4	DRY	No.2
C - E	2x4	DRY	No.2
E - F	2x4	DRY	No.2
F - G	2x4	DRY	No.2
G - I	2x4	DRY	No.2
J - H	2x4	DRY	No.2
Q - N	2x4	DRY	No.2
N - J	2x4	DRY	No.2
ALL WEBS EXCEPT	2x3	DRY	No.2
O - C	2x4	DRY	No.2
O - D	2x4	DRY	No.2
D - M	2x4	DRY	No.2
M - E	2x4	DRY	No.2

SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMVW-t	MT20	4.0	4.0	1.50 1.75
B	TTWW+m	MT20	4.0	6.0	2.25 2.00
C	TTW-h	MT20	4.0	4.0	Edge
D	TMWW-t	MT20	4.0	4.0	
E	TTW-h	MT20	4.0	4.0	Edge
F	TTWW+m	MT20	4.0	6.0	2.25 2.00
G	TTWW+m	MT20	6.0	7.0	Edge 1.50
H	TMVW+p	MT20	4.0	6.0	2.00 2.00
J	BMV1+p	MT20	2.0	4.0	
K	BMWW-t	MT20	4.0	4.0	
L	BMWW-t	MT20	4.0	4.0	1.75 2.00
M	BMWWW-t	MT20	5.0	8.0	
N	BS-t	MT20	3.0	6.0	
O	BMWWW-t	MT20	5.0	8.0	
P	BMWW-t	MT20	4.0	4.0	1.75 1.50
Q	BMV1+p	MT20	2.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
Q	1298	0	1298	0	0
J	1427	0	1427	0	0

UNFACTORED REACTIONS		1ST LCASE	MAX./MIN. COMPONENT REACTIONS
JT	COMBINED	SNOW	LIVE PERM.LIVE
Q	928	551 / 0	0 / 0
J	1017	621 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) Q, J

BRACING
FOR SECTION C-E, MAX. PURLIN SPACING = 2.00 FT.
FOR OTHER SECTIONS, TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.68 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF A-Q, D-O, D-M.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING
TOTAL LOAD CASES: (4)

CHORDS		WEBS	
MEMB.	FORCE (LBS)	MEMB.	FORCE (LBS)
FR-TO	FROM TO	FR-TO	FROM TO
Q-A	-1247 / 0	A-P	0 / 1332
A-B	-878 / 0	P-B	-920 / 0
B-C	-1237 / 0	B-O	-447 / 0
C-D	-752 / 0	O-C	0 / 750
D-E	-762 / 0	O-D	-240 / 0
E-F	-1253 / 0	D-M	-213 / 0
F-G	-896 / 0	M-E	0 / 759
G-H	-964 / 0	M-F	-444 / 0
H-I	0 / 52	L-F	-802 / 0
J-H	-1403 / 0	L-G	0 / 852
		K-G	-269 / 0
		K-H	0 / 679

Q-P	0 / 0	-18.5	-18.5	0.16 (4)	10.00
P-O	0 / 891	-18.5	-18.5	0.27 (4)	10.00
O-N	0 / 839	-18.5	-18.5	0.29 (4)	10.00
N-M	0 / 839	-18.5	-18.5	0.29 (4)	10.00
M-L	0 / 908	-18.5	-18.5	0.30 (4)	10.00
L-K	0 / 570	-18.5	-18.5	0.14 (1)	10.00
K-J	0 / 0	-18.5	-18.5	0.07 (4)	10.00

DESIGN CRITERIA

SPECIFIED LOADS:			
TOP CH.	LL	=	21.0 PSF
	DL	=	6.0 PSF
BOT CH.	LL	=	0.0 PSF
	DL	=	7.4 PSF
TOTAL LOAD	=	34.4	PSF

SPACING = 24.0 IN./C

LOADING IN HIGHEST FLAT SECTION BASED ON PIGGYBACK TRUSS WITH SLOPES OF 6.00/12 AND -6.00/12 AND RESPECTIVE WALL HEIGHTS OF 0-0 AND 0-0 AND AN ADDITIONAL DEAD LOAD OF 3.0 P.S.F.

LOADING IN OTHER FLAT SECTIONS BASED ON A SLOPE OF 6.00/12 AND 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.88")
CALCULATED VERT. DEFL.(LL) = L/999 (0.05")
ALLOWABLE DEFL.(TL)= L/360 (0.88")
CALCULATED VERT. DEFL.(TL) = L/999 (0.17")

CSI: TC=0.43/1.00 (A-B:1) , BC=0.30/1.00 (L-M:4) , WB=0.95/1.00 (B-P:1) , SSI=0.20/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LBS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES					
PLATE	GRIP(DRY)	SHEAR	SECTION	(PSI)	(PLI)
MT20	650	371	1747	788	1987

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.88 (P) (INPUT = 0.90)
JSI METAL= 0.37 (E) (INPUT = 1.00)

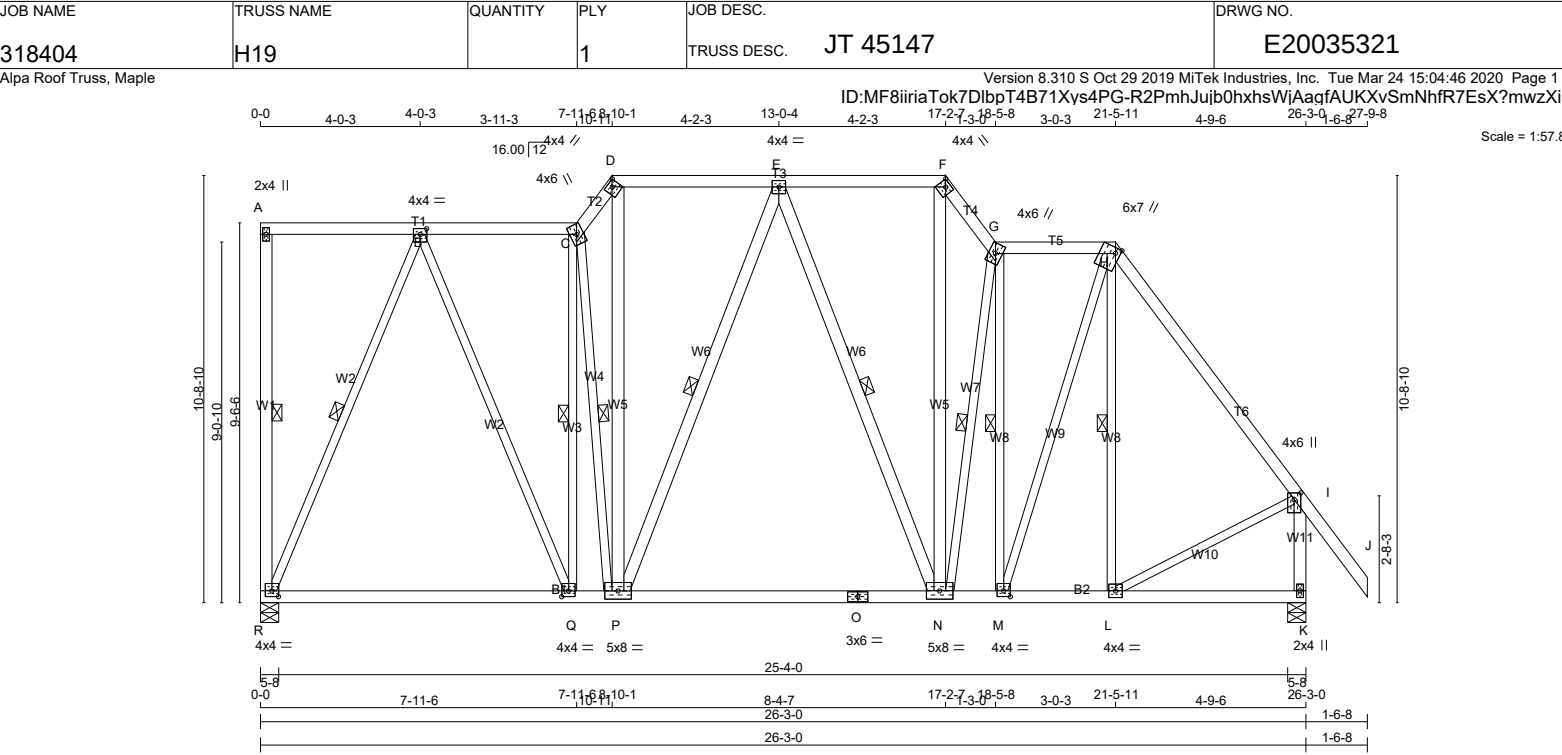

LUMBER

N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
R - A	2x4	DRY	No.2	SPF
A - C	2x4	DRY	No.2	SPF
C - D	2x4	DRY	No.2	SPF
D - F	2x4	DRY	No.2	SPF
F - G	2x4	DRY	No.2	SPF
G - H	2x4	DRY	No.2	SPF
H - J	2x4	DRY	No.2	SPF
K - I	2x4	DRY	No.2	SPF
R - O	2x4	DRY	No.2	SPF
O - K	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF
P - D	2x4	DRY	No.2	SPF
P - E	2x4	DRY	No.2	SPF
E - N	2x4	DRY	No.2	SPF
N - F	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMV+p	MT20	2.0	4.0		
B	TMWW-t	MT20	4.0	4.0	1.75	2.00
C	TTWW+m	MT20	4.0	6.0		
D	TTW-h	MT20	4.0	4.0	Edge	
E	TMWW-t	MT20	4.0	4.0		
F	TTW-h	MT20	4.0	4.0	Edge	
G	TTWW+m	MT20	4.0	6.0		
H	TTWW+m	MT20	6.0	7.0	Edge	1.50
I	TMVW+p	MT20	4.0	6.0	2.00	2.00
K	BMV1+p	MT20	2.0	4.0		
L	BMWW-t	MT20	4.0	4.0		
M	BMWW-t	MT20	4.0	4.0	1.75	2.00
N	BMWWW-t	MT20	5.0	8.0		
O	BS-t	MT20	3.0	6.0		
P	BMWWW-t	MT20	5.0	8.0		
Q	BMWW-t	MT20	4.0	4.0	1.75	2.00
R	BMVW1-t	MT20	4.0	4.0	1.75	2.00

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	DOWN	IN-SX	IN-SX
R	1298	0	5-8	1-8
K	1427	0	5-8	2-2

UNFACTORED REACTIONS

	1ST LCASE	MAX /MIN. COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL	
R	928	551 / 0	0 / 0	0 / 0	0 / 0	377 / 0	0 / 0	
K	1017	621 / 0	0 / 0	0 / 0	0 / 0	397 / 0	0 / 0	

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, K

BRACING
FOR SECTION D-F, MAX. PURLIN SPACING = 2.00 FT.
FOR OTHER SECTIONS, TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.73 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF A-R, C-Q, C-P, E-P, E-N, G-N, G-M, H-L, B-R.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO		FROM TO		FR-TO			
R-A	-118 / 0	0.0	0.0 0.05 (1)	Q-C	-619 / 0	0.37 (1)	
A-B	0 / 0	-78.0	-78.0 0.21 (1)	C-P	-532 / 0	0.33 (1)	
B-C	-795 / 0	-78.0	-78.0 0.17 (1)	P-D	0 / 809	0.13 (1)	
C-D	-1237 / 0	-78.0	-78.0 0.02 (1)	P-E	-238 / 0	0.16 (1)	
D-E	-753 / 0	-85.5	-85.5 0.19 (1)	E-N	-215 / 0	0.15 (1)	
E-F	-762 / 0	-85.5	-85.5 0.19 (1)	N-F	0 / 806	0.13 (1)	
F-G	-1252 / 0	-78.0	-78.0 0.03 (1)	N-G	-446 / 0	0.24 (1)	
G-H	-813 / 0	-78.0	-78.0 0.10 (1)	M-G	-728 / 0	0.39 (1)	
H-I	-994 / 0	-78.0	-78.0 0.26 (1)	M-H	0 / 698	0.16 (1)	
I-J	0 / 52	-78.0	-78.0 0.15 (1)	L-H	-169 / 0	0.09 (1)	
K-I	-1392 / 0	0.0	0.0 0.20 (1)	L-I	0 / 656	0.15 (1)	
				R-B	-1223 / 0	0.89 (1)	
				B-Q	0 / 805	0.18 (1)	
R-Q	0 / 487	-18.5	-18.5 0.32 (4)				
Q-P	0 / 802	-18.5	-18.5 0.35 (4)				
P-O	0 / 840	-18.5	-18.5 0.29 (4)				
O-N	0 / 840	-18.5	-18.5 0.29 (4)				
N-M	0 / 822	-18.5	-18.5 0.29 (4)				
M-L	0 / 592	-18.5	-18.5 0.17 (4)				
L-K	0 / 0	-18.5	-18.5 0.11 (4)				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	21.0	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	34.4	PSF

SPACING = 24.0 IN./C

LOADING IN HIGHEST FLAT SECTION BASED ON PIGGYBACK TRUSS WITH SLOPES OF 6.00/12 AND -6.00/12 AND RESPECTIVE WALL HEIGHTS OF 0-0 AND 0-0 AND AN ADDITIONAL DEAD LOAD OF 3.0 P.S.F.

LOADING IN OTHER FLAT SECTIONS BASED ON A SLOPE OF 6.00/12 AND 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.88")
CALCULATED VERT. DEFL.(LL) = L/999 (0.05")
ALLOWABLE DEFL.(TL)= L/360 (0.88")
CALCULATED VERT. DEFL.(TL) = L/999 (0.15")

CSI: TC=0.26/1.00 (H-I:1), BC=0.35/1.00 (P-Q:4), WB=0.89/1.00 (B-R:1), SSI=0.17/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LBS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP (DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
MT20	650	371	1747
	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.79 (M) (INPUT = 0.90)
JSI METAL= 0.39 (I) (INPUT = 1.00)

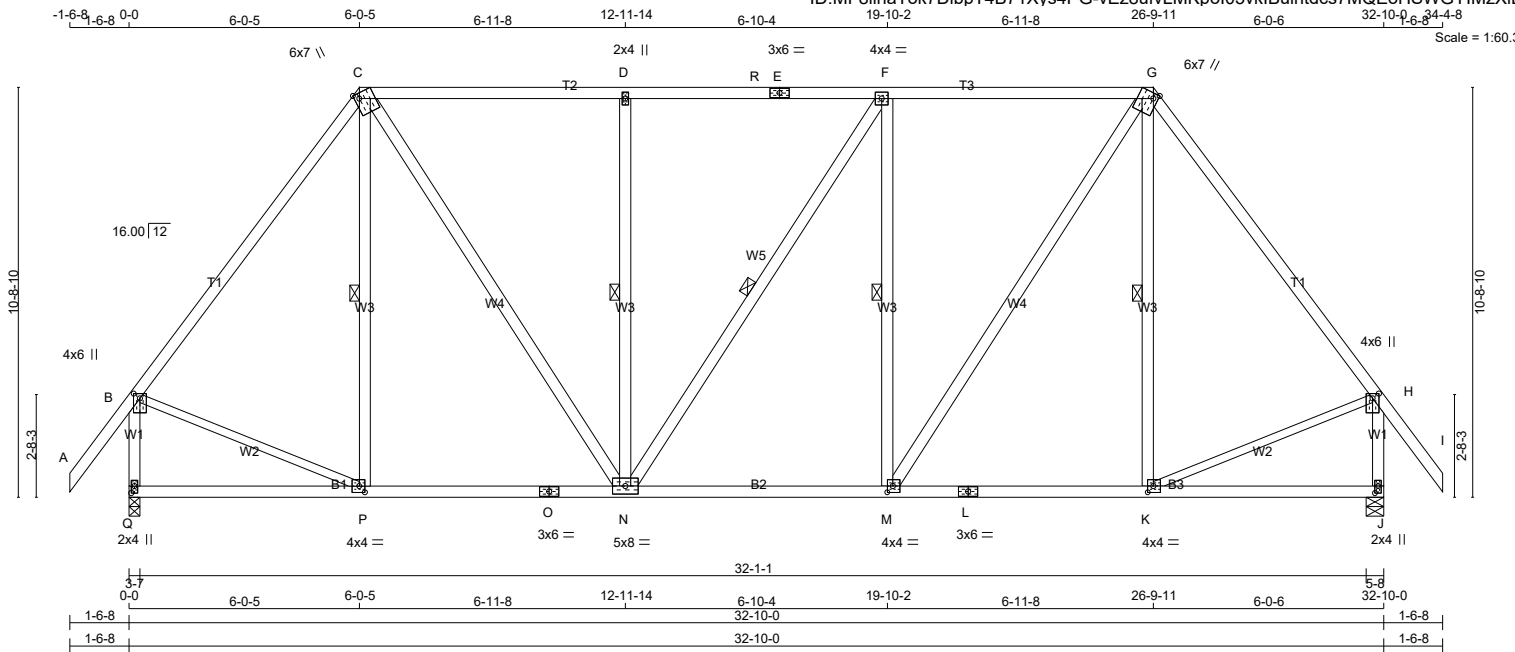

TOTAL WEIGHT = 6 X 194 = 1162 lb

LUMBER				
N L G A	RULES			
CHORDS	SIZE		LUMBER	DESCR
A - C	2x4	DRY	2100F 1.8E	SPF
C - E	2x4	DRY	No.2	SPF
E - G	2x4	DRY	No.2	SPF
G - I	2x4	DRY	2100F 1.8E	SPF
Q - B	2x4	DRY	No.2	SPF
J - H	2x4	DRY	No.2	SPF
Q - O	2x4	DRY	No.2	SPF
O - L	2x4	DRY	No.2	SPF
L - J	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x4	DRY	No.2	SPF
B - P	2x3	DRY	No.2	SPF
K - H	2x3	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	MTWW+p	MT20	4.0	6.0	1.50	2.00
C	TTWW+m	MT20	6.0	7.0	Edge	1.50
D	MTW+w	MT20	2.0	4.0		
E	TS-t	MT20	3.0	6.0		
F	MTWW-t	MT20	4.0	4.0		
G	TTWW+m	MT20	6.0	7.0	Edge	1.50
H	MTWW+p	MT20	4.0	6.0	1.50	2.00
J	BMV1+p	MT20	2.0	4.0	2.25	1.00
K, M, P						
K	BMWW-t	MT20	4.0	4.0	2.00	1.75
L	BS-t	MT20	3.0	6.0		
N	BMWWW-t	MT20	5.0	8.0		
O	BS-t	MT20	3.0	6.0		
Q	BMV1+p	MT20	2.0	4.0	2.25	1.00

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION			INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
Q	1791	0	1791	0	0	3-7	2-5
J	1791	0	1791	0	0	5-8	2-10

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
Q	1281	759 / 0	0 / 0	0 / 0	0 / 0	522 / 0	0 / 0
J	1281	759 / 0	0 / 0	0 / 0	0 / 0	522 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) Q, J

BRACING

FOR SECTION C-G, MAX. PURLIN SPACING = 2.00 FT.
FOR OTHER SECTIONS, TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

1 LATERAL BRACE(S) AT 1/ 2 LENGTH OF C-P, D-N, F-N, F-M, G-K.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

C H O R D S				W E B S			
MAX. FACTORED		FACTORED		MAX. FACTORED			
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX. CSI (LC)	MAX. UNBRAC	MEMB.	FORCE (LBS)	MAX. CSI (LC)
FR-TO		FROM TO		LENGTH	FR-TO		
A-B	0 / 52	-78.0	-78.0 0.10 (1)	10.00	P-C	-164 / 20	0.10 (1)
B-C	-1350 / 0	-78.0	-78.0 0.28 (1)	6.25	C-N	0 / 918	0.15 (1)
C-D	-1316 / 0	-85.5	-85.5 0.52 (1)	2.00	N-D	-638 / 0	0.37 (1)
D-R	-1316 / 0	-85.5	-85.5 0.46 (1)	2.00	N-F	-1 / 0	0.00 (1)
R-E	-1316 / 0	-85.5	-85.5 0.46 (1)	2.00	M-F	-639 / 0	0.37 (1)
E-F	-1316 / 0	-85.5	-85.5 0.46 (1)	2.00	M-G	0 / 920	0.15 (1)
F-G	-1317 / 0	-85.5	-85.5 0.52 (1)	2.00	K-G	-165 / 20	0.10 (1)
G-H	-1350 / 0	-78.0	-78.0 0.28 (1)	6.25	B-P	0 / 861	0.19 (1)
H-I	0 / 52	-78.0	-78.0 0.10 (1)	10.00	K-H	0 / 861	0.19 (1)
Q-B	-1747 / 0	0.0	0.0 0.25 (1)	6.30			
J-H	-1747 / 0	0.0	0.0 0.25 (1)	6.30			

Q- P	0 / 0	-18.5	-18.5	0.19 (4)	10.00
P- O	0 / 805	-18.5	-18.5	0.27 (4)	10.00
O- N	0 / 805	-18.5	-18.5	0.27 (4)	10.00
N- M	0 / 1317	-18.5	-18.5	0.30 (4)	10.00
M- L	0 / 805	-18.5	-18.5	0.27 (4)	10.00
L- K	0 / 805	-18.5	-18.5	0.27 (4)	10.00
K- J	0 / 0	-18.5	-18.5	0.19 (4)	10.00

DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL =	21.0	PSF
		DL =	6.0	PSF
BOT	CH.	LL =	0.0	PSF
		DL =	7.4	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON
PIGGYBACK TRUSS WITH SLOPES OF 6.00/12
AND -6.00/12 AND RESPECTIVE WALL HEIGHTS
OF 0-0 AND 0-0 AND AN ADDITIONAL DEAD
LOAD OF 3.0 P.S.F.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.09")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.04")
ALLOWABLE DEFL.(TL)= L/360 (1.09")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.11")

CSI: TC=0.52/1.00 (F-G:1), BC=0.30/1.00 (M-N:4),
WB=0.37/1.00 (F-M:1), SSI=0.28/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES						
PLATE	GRIP(DRY)		SHEAR		SECTION	
	(PSI)		(PLI)		(PLI)	
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.81 (B) (INPUT = 0.90)
JSI METAL= 0.57 (B) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H20A		2	TRUSS DESC. JT 45147	E20035323

Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 15:04:49 2020 Page 1

ID:MF8iiriaTok7DlbpT4B71Xys4PG-rd5uJLwbux3VYKFIsjDMo6yxGqiiu4qawqlfNFzX(Ei

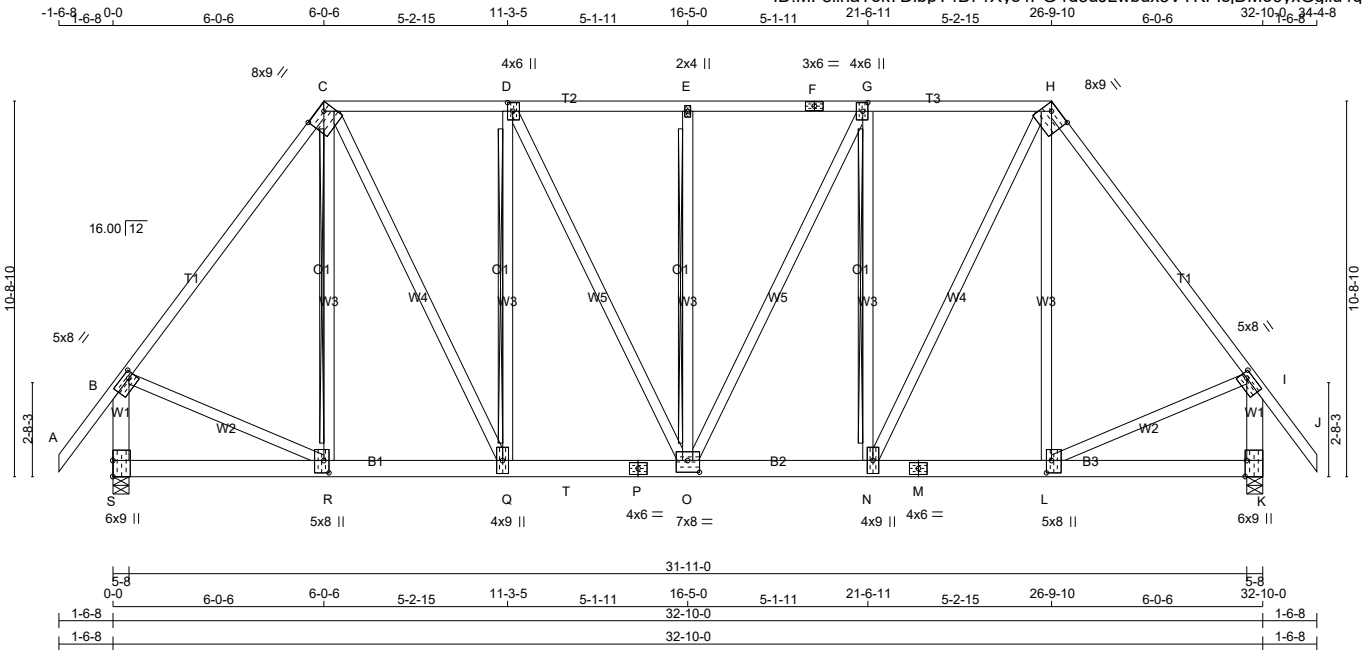

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - C	2x4	DRY	2100F 1.8E
C - F	2x4	DRY	No.2
F - H	2x4	DRY	No.2
H - J	2x4	DRY	2100F 1.8E
S - B	2x6	DRY	No.2
K - I	2x6	DRY	No.2
S - P	2x6	DRY	1650F 1.5E
P - M	2x6	DRY	1650F 1.5E
M - K	2x6	DRY	1650F 1.5E
ALL WEBS EXCEPT	2x4	DRY	No.2

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
A - C	12	TOP
C - F	12	TOP
F - H	12	TOP
H - J	12	TOP
S - B	12	TOP
K - I	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
S - P	9	SIDE(278.9)
P - M	9	SIDE(278.9)
M - K	9	SIDE(278.9)
WEBS : (0.122"x3") SPIRAL NAILS		
2x4	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
S	5054	0	5054	0	0	5-8	2-12
K	9433	0	9433	0	0	5-8	5-8

UNFACTORED REACTIONS

1ST LCASE	MAX /MIN. COMPONENT REACTIONS
JT	COMBINED
S	3601 2213 / 0
K	6723 4118 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K
BEARING SIZE FACTOR = 1.15 AT JNT(S) K (BASED ON SUPPORT DEPTH = 1-8)

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.63 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

2x6 DRY SPF No.2 T-BRACE AT C-R, D-Q, E-O, G-N

FASTEN T AND I-BRACES TO NARROW EDGE OF WEB WITH ONE ROW PER PLY OF 3" COMMON WIRE NAILS @ 6" O.C. WITH 3" MINIMUM END DISTANCE. BRACE MUST COVER 90% OF WEB LENGTH.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1 CSI (LC)	MEMB.	MAX. FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1 CSI (LC)
FR-TO		FROM TO		FR-TO			
A - B	0 / 52	-78.0 -78.0	0.06 (1)	10.00	R - C	-937 / 0	0.16 (1)
B - C	-4566 / 0	-78.0 -78.0	0.38 (1)	5.19	C - Q	0 / 4661	0.41 (1)
C - D	-4831 / 0	-78.0 -78.0	0.29 (1)	4.17	Q - D	-3503 / 0	0.59 (1)
D - E	-6366 / 0	-78.0 -78.0	0.37 (1)	3.63	D - O	0 / 3447	0.30 (1)
E - F	-6366 / 0	-78.0 -78.0	0.37 (1)	3.63	O - E	-367 / 0	0.06 (1)
F - G	-6366 / 0	-78.0 -78.0	0.37 (1)	3.63	G - G	0 / 282	0.02 (1)
G - H	-6240 / 0	-78.0 -78.0	0.37 (1)	3.67	N - G	-655 / 0	0.11 (1)
H - I	-7499 / 0	-78.0 -78.0	0.70 (1)	4.21	N - H	0 / 3805	0.34 (1)
I - J	0 / 52	-78.0 -78.0	0.06 (1)	10.00	L - H	0 / 2164	0.19 (1)
S - B	-5002 / 0	0.0 0.0	0.25 (1)	6.50	B - R	0 / 2899	0.26 (1)
K - I	-7981 / 0	0.0 0.0	0.40 (1)	5.33	L - I	0 / 4761	0.42 (1)
S - R	0 / 0	-18.5 -18.5	0.03 (4)	10.00			
R - Q	0 / 2716	-18.5 -18.5	0.21 (1)	10.00			
Q - T	0 / 4832	-18.5 -18.5	0.49 (1)	10.00			
T - P	0 / 4832	-576.2 -576.2	0.49 (1)	10.00			
P - O	0 / 4832	-576.2 -576.2	0.49 (1)	10.00			
O - N	0 / 6240	-576.2 -576.2	0.55 (1)	10.00			
N - M	0 / 4513	-576.2 -576.2	0.70 (1)	10.00			
M - L	0 / 4513	-576.2 -576.2	0.70 (1)	10.00			
L - K	0 / 0	-576.2 -576.2	0.51 (1)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	21.0	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	34.4	PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

GIRDER TYPE: CSldGirder
START DISTANCE = 13-0-0
START SPAN CARRIED = 25-1-8
END DISTANCE = 32-10-0
END SPAN CARRIED = 25-1-8
END WALL WIDTH = 0-0
APPLIED TO FRONT SIDE OF BOTTOM CHORD.
- ADDTL LOADS BASED ON 55 % OF GSL.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.09")
CALCULATED VERT. DEFL.(LL)= L/ 999 (0.11")
ALLOWABLE DEFL.(TL)= L/360 (1.09")
CALCULATED VERT. DEFL.(TL)= L/ 999 (0.23")

CSI: TC=0.70/1.00 (H-I:1), BC=0.70/1.00 (L-N:1), WB=0.59/1.00 (D-Q:1), SSI=0.70/1.00 (K-L:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (L) (INPUT = 0.90)
JSI METAL= 0.96 (P) (INPUT = 1.00)



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H20A		2	TRUSS DESC. JT 45147	E20035323(2)

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-t	MT20	5.0	8.0	2.00	2.00
C	TTWW-h	MT20	8.0	9.0	2.00	6.25
D	TMWW+t	MT20	4.0	6.0	3.00	1.75
E	TMW+w	MT20	2.0	4.0		
F	TS-t	MT20	3.0	6.0		
G	TMWW+t	MT20	4.0	6.0	3.00	1.75
H	TTWW-h	MT20	8.0	9.0	2.00	6.25
I	TMVW-t	MT20	5.0	8.0	2.00	2.00
K	BMV1+t	MT20	6.0	9.0	Edge	0.50
L	BMWW+t	MT20	5.0	8.0	4.25	1.75
M	BS-t	MT20	4.0	6.0		
N	BMWW+t	MT20	4.0	9.0		
O	BMWWW-t	MT20	7.0	8.0	4.00	4.00
P	BS-t	MT20	4.0	6.0		
Q	BMWW+t	MT20	4.0	9.0		
R	BMWW+t	MT20	5.0	8.0	4.25	1.75
S	BMV1+t	MT20	6.0	9.0	5.50	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H21P		1	TRUSS DESC. JT 45147	E20035324


Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 15:04:50 2020 Page 1

ID:MF8iiriaTok7DlbpT4B71Xys4PG-JpfGWgxDFBm9TqUPQkbKKV4149yde5j8UVcVhzXiEh

0-02-6-02-6-07-10-1010-4-107-10-1018-3-52-6-020-9-5

Scale = 1:33.9

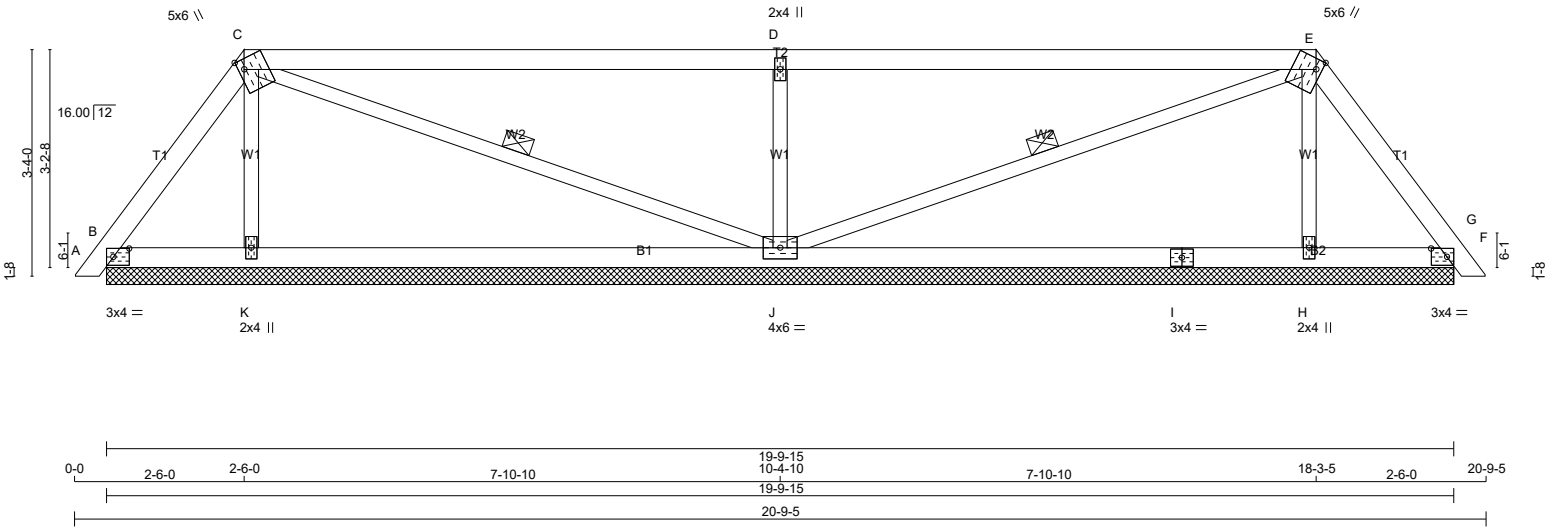

TOTAL WEIGHT = 2 X 70 = 139 lb


LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. A - C 2x4 DRY No.2 SPF C - E 2x4 DRY No.2 SPF E - G 2x4 DRY No.2 SPF B - I 2x4 DRY No.2 SPF I - F 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF DRY: SEASONED LUMBER.					DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS <table><tr><th rowspan="2">JT</th><th colspan="2">FACTORED GROSS REACTION</th><th colspan="2">MAXIMUM FACTORED GROSS REACTION</th><th rowspan="2">INPUT BRG</th><th colspan="2">REQRD BRG</th></tr><tr><th>VERT</th><th>HORZ</th><th>DOWN</th><th>HORZ</th><th>IN-SX</th><th>IN-SX</th></tr><tr><td>B</td><td>173</td><td>0</td><td>173</td><td>0</td><td>0</td><td>19-9-15 (4-0-2)0-4</td><td></td></tr><tr><td>K</td><td>339</td><td>0</td><td>339</td><td>0</td><td>0</td><td>19-9-15 (4-0-2)0-4</td><td></td></tr><tr><td>J</td><td>944</td><td>0</td><td>944</td><td>0</td><td>0</td><td>19-9-15 (4-0-2)0-4</td><td></td></tr><tr><td>H</td><td>339</td><td>0</td><td>339</td><td>0</td><td>0</td><td>19-9-15 (4-0-2)0-4</td><td></td></tr><tr><td>F</td><td>173</td><td>0</td><td>173</td><td>0</td><td>0</td><td>19-9-15 (4-0-2)0-4</td><td></td></tr></table> VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH UNFACTORED REACTIONS <table><tr><th rowspan="2">JT</th><th colspan="2">1ST LCASE COMBINED</th><th colspan="2">SNOW LIVE</th><th rowspan="2">PERM LIVE</th><th rowspan="2">WIND</th><th rowspan="2">DEAD</th><th rowspan="2">SOIL</th></tr><tr><th>MAX</th><th>MIN</th><th>MAX</th><th>MIN</th></tr><tr><td>B</td><td>118</td><td>101 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>18 / 0</td><td>0 / 0</td></tr><tr><td>K</td><td>247</td><td>117 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>130 / 0</td><td>0 / 0</td></tr><tr><td>J</td><td>670</td><td>426 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>244 / 0</td><td>0 / 0</td></tr><tr><td>H</td><td>247</td><td>117 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>130 / 0</td><td>0 / 0</td></tr><tr><td>F</td><td>118</td><td>101 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>18 / 0</td><td>0 / 0</td></tr></table> BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, K, J, H, F BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. 1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-J, E-J. LOADING TOTAL LOAD CASES: (4) <table><tr><th colspan="4">CHORDS</th><th colspan="4">WEBS</th></tr><tr><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>FACTORED VERT. LOAD (PLF)</th><th>MAX LC1 (LC)</th><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>MAX LC1 (LC)</th><th></th></tr><tr><td>FR-TO</td><td></td><td>FROM TO</td><td></td><td>FR-TO</td><td></td><td></td><td></td></tr><tr><td>A-B</td><td>0 / 10</td><td>-78.0 -78.0</td><td>0.01 (1)</td><td>10.00</td><td>K-C</td><td>-218 / 0</td><td>0.04 (1)</td></tr><tr><td>B-C</td><td>-98 / 0</td><td>-78.0 -78.0</td><td>0.05 (1)</td><td>6.25</td><td>C-J</td><td>-34 / 0</td><td>0.02 (1)</td></tr><tr><td>C-D</td><td>-16 / 0</td><td>-78.0 -78.0</td><td>0.83 (1)</td><td>6.25</td><td>J-D</td><td>-768 / 0</td><td>0.14 (1)</td></tr><tr><td>D-E</td><td>-16 / 0</td><td>-78.0 -78.0</td><td>0.83 (1)</td><td>6.25</td><td>J-E</td><td>-34 / 0</td><td>0.02 (1)</td></tr><tr><td>E-F</td><td>-98 / 0</td><td>-78.0 -78.0</td><td>0.05 (1)</td><td>6.25</td><td>H-E</td><td>-218 / 0</td><td>0.04 (1)</td></tr><tr><td>F-G</td><td>0 / 10</td><td>-78.0 -78.0</td><td>0.01 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>B-K</td><td>0 / 57</td><td>-18.5 -18.5</td><td>0.17 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>K-J</td><td>0 / 49</td><td>-18.5 -18.5</td><td>0.25 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>J-I</td><td>0 / 49</td><td>-18.5 -18.5</td><td>0.25 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>I-H</td><td>0 / 49</td><td>-18.5 -18.5</td><td>0.25 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>H-F</td><td>0 / 57</td><td>-18.5 -18.5</td><td>0.17 (4)</td><td>10.00</td><td></td><td></td><td></td></tr></table>										JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG		VERT	HORZ	DOWN	HORZ	IN-SX	IN-SX	B	173	0	173	0	0	19-9-15 (4-0-2)0-4		K	339	0	339	0	0	19-9-15 (4-0-2)0-4		J	944	0	944	0	0	19-9-15 (4-0-2)0-4		H	339	0	339	0	0	19-9-15 (4-0-2)0-4		F	173	0	173	0	0	19-9-15 (4-0-2)0-4		JT	1ST LCASE COMBINED		SNOW LIVE		PERM LIVE	WIND	DEAD	SOIL	MAX	MIN	MAX	MIN	B	118	101 / 0	0 / 0	0 / 0	0 / 0	0 / 0	18 / 0	0 / 0	K	247	117 / 0	0 / 0	0 / 0	0 / 0	0 / 0	130 / 0	0 / 0	J	670	426 / 0	0 / 0	0 / 0	0 / 0	0 / 0	244 / 0	0 / 0	H	247	117 / 0	0 / 0	0 / 0	0 / 0	0 / 0	130 / 0	0 / 0	F	118	101 / 0	0 / 0	0 / 0	0 / 0	0 / 0	18 / 0	0 / 0	CHORDS				WEBS				MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX LC1 (LC)		FR-TO		FROM TO		FR-TO				A-B	0 / 10	-78.0 -78.0	0.01 (1)	10.00	K-C	-218 / 0	0.04 (1)	B-C	-98 / 0	-78.0 -78.0	0.05 (1)	6.25	C-J	-34 / 0	0.02 (1)	C-D	-16 / 0	-78.0 -78.0	0.83 (1)	6.25	J-D	-768 / 0	0.14 (1)	D-E	-16 / 0	-78.0 -78.0	0.83 (1)	6.25	J-E	-34 / 0	0.02 (1)	E-F	-98 / 0	-78.0 -78.0	0.05 (1)	6.25	H-E	-218 / 0	0.04 (1)	F-G	0 / 10	-78.0 -78.0	0.01 (1)	10.00				B-K	0 / 57	-18.5 -18.5	0.17 (4)	10.00				K-J	0 / 49	-18.5 -18.5	0.25 (4)	10.00				J-I	0 / 49	-18.5 -18.5	0.25 (4)	10.00				I-H	0 / 49	-18.5 -18.5	0.25 (4)	10.00				H-F	0 / 57	-18.5 -18.5	0.17 (4)	10.00				DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF BCBC 2018, ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD CSI: TC=0.83/1.00 (D-E:1), BC=0.25/1.00 (H-J:4), WB=0.14/1.00 (D-J:1), SSI=0.30/1.00 (C-D:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT. NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.88 (J) (INPUT = 0.90) JSI METAL= 0.16 (D) (INPUT = 1.00)			
JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG																																																																																																																																																																																																																																												
	VERT	HORZ	DOWN	HORZ		IN-SX	IN-SX																																																																																																																																																																																																																																											
B	173	0	173	0	0	19-9-15 (4-0-2)0-4																																																																																																																																																																																																																																												
K	339	0	339	0	0	19-9-15 (4-0-2)0-4																																																																																																																																																																																																																																												
J	944	0	944	0	0	19-9-15 (4-0-2)0-4																																																																																																																																																																																																																																												
H	339	0	339	0	0	19-9-15 (4-0-2)0-4																																																																																																																																																																																																																																												
F	173	0	173	0	0	19-9-15 (4-0-2)0-4																																																																																																																																																																																																																																												
JT	1ST LCASE COMBINED		SNOW LIVE		PERM LIVE	WIND	DEAD	SOIL																																																																																																																																																																																																																																										
	MAX	MIN	MAX	MIN																																																																																																																																																																																																																																														
B	118	101 / 0	0 / 0	0 / 0	0 / 0	0 / 0	18 / 0	0 / 0																																																																																																																																																																																																																																										
K	247	117 / 0	0 / 0	0 / 0	0 / 0	0 / 0	130 / 0	0 / 0																																																																																																																																																																																																																																										
J	670	426 / 0	0 / 0	0 / 0	0 / 0	0 / 0	244 / 0	0 / 0																																																																																																																																																																																																																																										
H	247	117 / 0	0 / 0	0 / 0	0 / 0	0 / 0	130 / 0	0 / 0																																																																																																																																																																																																																																										
F	118	101 / 0	0 / 0	0 / 0	0 / 0	0 / 0	18 / 0	0 / 0																																																																																																																																																																																																																																										
CHORDS				WEBS																																																																																																																																																																																																																																														
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX LC1 (LC)																																																																																																																																																																																																																																												
FR-TO		FROM TO		FR-TO																																																																																																																																																																																																																																														
A-B	0 / 10	-78.0 -78.0	0.01 (1)	10.00	K-C	-218 / 0	0.04 (1)																																																																																																																																																																																																																																											
B-C	-98 / 0	-78.0 -78.0	0.05 (1)	6.25	C-J	-34 / 0	0.02 (1)																																																																																																																																																																																																																																											
C-D	-16 / 0	-78.0 -78.0	0.83 (1)	6.25	J-D	-768 / 0	0.14 (1)																																																																																																																																																																																																																																											
D-E	-16 / 0	-78.0 -78.0	0.83 (1)	6.25	J-E	-34 / 0	0.02 (1)																																																																																																																																																																																																																																											
E-F	-98 / 0	-78.0 -78.0	0.05 (1)	6.25	H-E	-218 / 0	0.04 (1)																																																																																																																																																																																																																																											
F-G	0 / 10	-78.0 -78.0	0.01 (1)	10.00																																																																																																																																																																																																																																														
B-K	0 / 57	-18.5 -18.5	0.17 (4)	10.00																																																																																																																																																																																																																																														
K-J	0 / 49	-18.5 -18.5	0.25 (4)	10.00																																																																																																																																																																																																																																														
J-I	0 / 49	-18.5 -18.5	0.25 (4)	10.00																																																																																																																																																																																																																																														
I-H	0 / 49	-18.5 -18.5	0.25 (4)	10.00																																																																																																																																																																																																																																														
H-F	0 / 57	-18.5 -18.5	0.17 (4)	10.00																																																																																																																																																																																																																																														

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



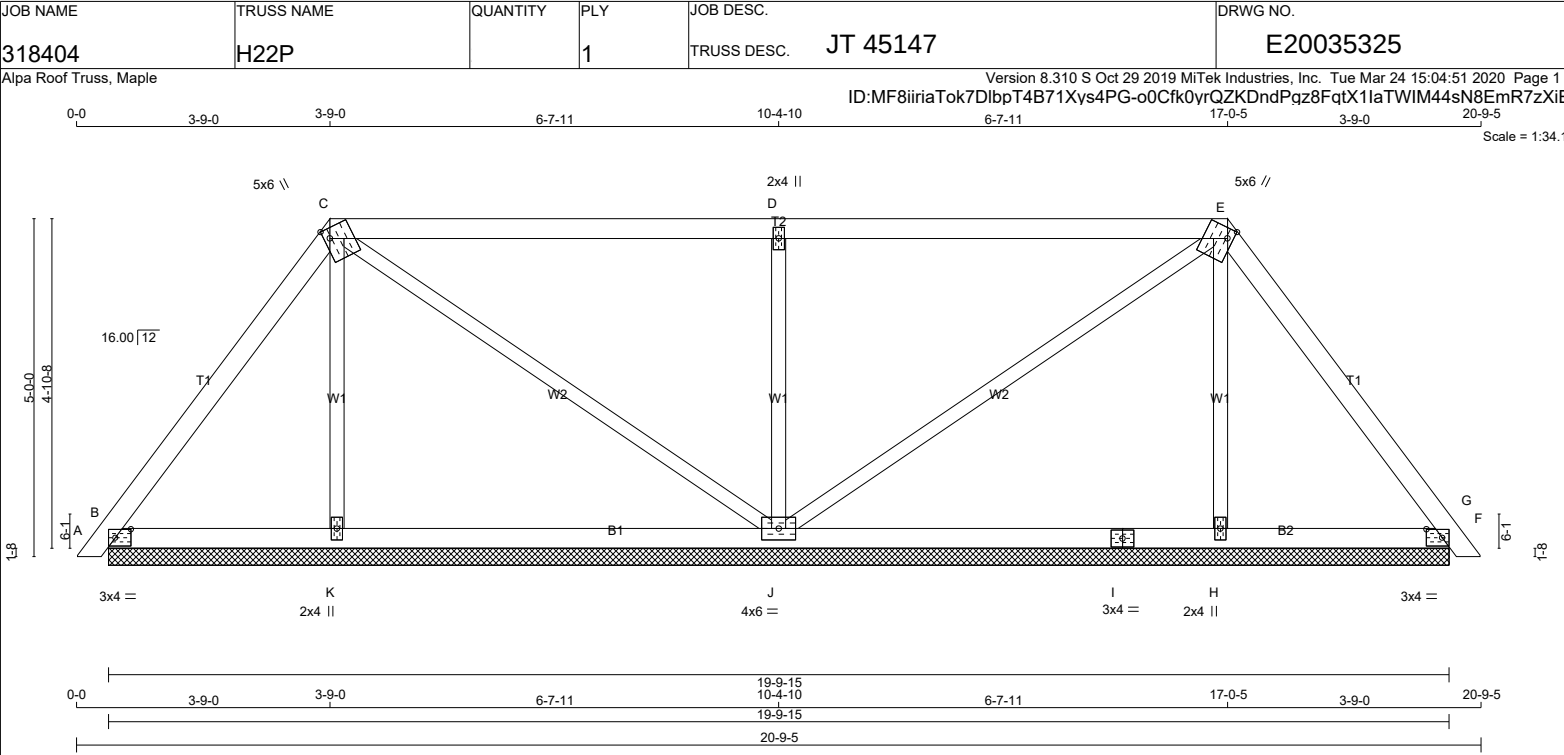

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2
C - E	2x4	DRY	No.2
E - G	2x4	DRY	No.2
B - I	2x4	DRY	No.2
I - F	2x4	DRY	No.2

ALL WEBS 2x3 DRY No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMB1-I	MT20	3.0	4.0	1.50	2.75
C	TTWW+m	MT20	5.0	6.0	1.75	1.00
D	TMW+w	MT20	2.0	4.0		
E	TTWW+m	MT20	5.0	6.0	1.75	1.00
F	TMB1-I	MT20	3.0	4.0	1.50	2.75
H	BMW1+w	MT20	2.0	4.0		
I	BS-I	MT20	3.0	4.0		
J	BMW1+w	MT20	4.0	6.0		
K	BMW1+w	MT20	2.0	4.0		

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
	VERT	HORZ	DOWN	HORZ
B	262	0	262	0
K	299	0	299	0
J	847	0	847	0
H	299	0	299	0
F	262	0	262	0

VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH

UNFACTORED REACTIONS

JT	1ST LCASE	MAX / MIN	COMPONENT REACTIONS
	COMBINED	SNOW	LIVE
B	183	132 / 0	0 / 0
K	218	105 / 0	0 / 0
J	600	387 / 0	0 / 0
H	218	105 / 0	0 / 0
F	183	132 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, K, J, H, F

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH (LC1)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH (LC1)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 10	-78.0 -78.0	0.01 (1)	K-C	-196 / 0	0.07 (1)	
B-C	-111 / 0	-78.0 -78.0	0.14 (1)	C-J	-64 / 0	0.08 (1)	
C-D	-7 / 0	-78.0 -78.0	0.58 (1)	J-D	-646 / 0	0.23 (1)	
D-E	-7 / 0	-78.0 -78.0	0.58 (1)	J-E	-64 / 0	0.08 (1)	
E-F	-111 / 0	-78.0 -78.0	0.14 (1)	H-E	-196 / 0	0.07 (1)	
F-G	0 / 10	-78.0 -78.0	0.01 (1)				
B-K	0 / 65	-18.5 -18.5	0.12 (4)				
K-J	0 / 61	-18.5 -18.5	0.18 (4)				
J-I	0 / 61	-18.5 -18.5	0.18 (4)				
I-H	0 / 61	-18.5 -18.5	0.18 (4)				
H-F	0 / 65	-18.5 -18.5	0.12 (4)				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 21.0 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.58/1.00 (C-D:1), BC=0.18/1.00 (H-J:4), WB=0.23/1.00 (D-J:1), SSI=0.25/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES


PLATE	GRIP(DRY) (PSI)	SHEAR (PLI)	SECTION (PLI)
MT20	650	371	1747
	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.64 (J) (INPUT = 0.90)
JSI METAL= 0.14 (D) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H23P		1	TRUSS DESC. JT 45147	E20035326

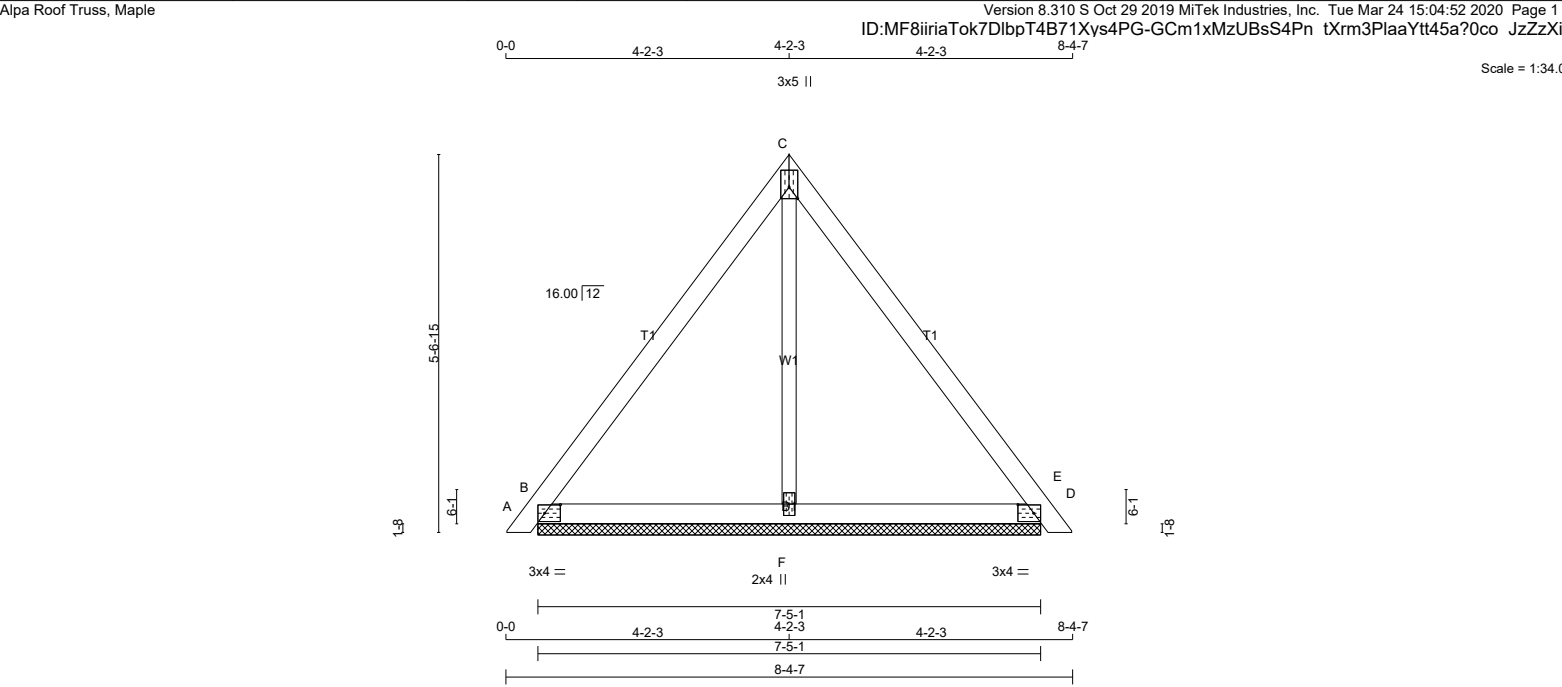

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. A - C 2x4 DRY No.2 SPF C - E 2x4 DRY No.2 SPF B - D 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF DRY: SEASONED LUMBER.							DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS <table><tr><th></th><th colspan="2">FACTORED GROSS REACTION</th><th colspan="2">MAXIMUM FACTORED GROSS REACTION</th><th>INPUT BRG</th><th>REQRD BRG</th></tr><tr><th>JT</th><th>VERT</th><th>HORZ</th><th>DOWN</th><th>HORZ</th><th>UPLIFT</th><th>IN-SX</th></tr><tr><td>B</td><td>277</td><td>0</td><td>277</td><td>0</td><td>0</td><td>7-5-1</td></tr><tr><td>D</td><td>277</td><td>0</td><td>277</td><td>0</td><td>0</td><td>7-5-1</td></tr><tr><td>F</td><td>216</td><td>0</td><td>216</td><td>0</td><td>0</td><td>7-5-1</td></tr></table> UNFACTORED REACTIONS <table><tr><th>JT</th><th>1ST LCASE</th><th colspan="6">MAX./MIN. COMPONENT REACTIONS</th></tr><tr><th></th><th></th><th>SNOW</th><th>LIVE</th><th>PERM.LIVE</th><th>WIND</th><th>DEAD</th><th>SOIL</th></tr><tr><td>B</td><td>195</td><td>135 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>59 / 0</td><td>0 / 0</td></tr><tr><td>D</td><td>195</td><td>135 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>59 / 0</td><td>0 / 0</td></tr><tr><td>F</td><td>159</td><td>70 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>89 / 0</td><td>0 / 0</td></tr></table> BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) B, D, F BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. LOADING TOTAL LOAD CASES: (4) <table><tr><th colspan="4">CHORDS</th><th colspan="4">WEBS</th></tr><tr><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>FACTORED VERT. LOAD (PLF)</th><th>MAX LC1</th><th>MAX. UNBRACED LENGTH</th><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>MAX LC1</th></tr><tr><td>FR-TO</td><td></td><td>FROM</td><td>TO</td><td></td><td>FR-TO</td><td></td><td></td></tr><tr><td>A- B</td><td>0 / 10</td><td>-78.0</td><td>-78.0</td><td>0.01 (1)</td><td>10.00</td><td>F- C</td><td>-130 / 0</td></tr><tr><td>B- C</td><td>-98 / 0</td><td>-78.0</td><td>-78.0</td><td>0.18 (1)</td><td>6.25</td><td></td><td></td></tr><tr><td>C- D</td><td>-98 / 0</td><td>-78.0</td><td>-78.0</td><td>0.18 (1)</td><td>6.25</td><td></td><td></td></tr><tr><td>D- E</td><td>0 / 10</td><td>-78.0</td><td>-78.0</td><td>0.01 (1)</td><td>10.00</td><td></td><td></td></tr><tr><td>B- F</td><td>0 / 58</td><td>-18.5</td><td>-18.5</td><td>0.08 (4)</td><td>10.00</td><td></td><td></td></tr><tr><td>F- D</td><td>0 / 58</td><td>-18.5</td><td>-18.5</td><td>0.08 (4)</td><td>10.00</td><td></td><td></td></tr></table>								FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG	JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	B	277	0	277	0	0	7-5-1	D	277	0	277	0	0	7-5-1	F	216	0	216	0	0	7-5-1	JT	1ST LCASE	MAX./MIN. COMPONENT REACTIONS								SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL	B	195	135 / 0	0 / 0	0 / 0	0 / 0	59 / 0	0 / 0	D	195	135 / 0	0 / 0	0 / 0	0 / 0	59 / 0	0 / 0	F	159	70 / 0	0 / 0	0 / 0	0 / 0	89 / 0	0 / 0	CHORDS				WEBS				MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX LC1	FR-TO		FROM	TO		FR-TO			A- B	0 / 10	-78.0	-78.0	0.01 (1)	10.00	F- C	-130 / 0	B- C	-98 / 0	-78.0	-78.0	0.18 (1)	6.25			C- D	-98 / 0	-78.0	-78.0	0.18 (1)	6.25			D- E	0 / 10	-78.0	-78.0	0.01 (1)	10.00			B- F	0 / 58	-18.5	-18.5	0.08 (4)	10.00			F- D	0 / 58	-18.5	-18.5	0.08 (4)	10.00			DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF BCBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD CSI: TC=0.18/1.00 (B-C:1) , BC=0.08/1.00 (B-F:4) , WB=0.05/1.00 (C-F:1) , SSI=0.07/1.00 (B-C:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.31 (D) (INPUT = 0.90) JSI METAL= 0.12 (D) (INPUT = 1.00)						
	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG																																																																																																																																																																	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX																																																																																																																																																																	
B	277	0	277	0	0	7-5-1																																																																																																																																																																	
D	277	0	277	0	0	7-5-1																																																																																																																																																																	
F	216	0	216	0	0	7-5-1																																																																																																																																																																	
JT	1ST LCASE	MAX./MIN. COMPONENT REACTIONS																																																																																																																																																																					
		SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL																																																																																																																																																																
B	195	135 / 0	0 / 0	0 / 0	0 / 0	59 / 0	0 / 0																																																																																																																																																																
D	195	135 / 0	0 / 0	0 / 0	0 / 0	59 / 0	0 / 0																																																																																																																																																																
F	159	70 / 0	0 / 0	0 / 0	0 / 0	89 / 0	0 / 0																																																																																																																																																																
CHORDS				WEBS																																																																																																																																																																			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX LC1																																																																																																																																																																
FR-TO		FROM	TO		FR-TO																																																																																																																																																																		
A- B	0 / 10	-78.0	-78.0	0.01 (1)	10.00	F- C	-130 / 0																																																																																																																																																																
B- C	-98 / 0	-78.0	-78.0	0.18 (1)	6.25																																																																																																																																																																		
C- D	-98 / 0	-78.0	-78.0	0.18 (1)	6.25																																																																																																																																																																		
D- E	0 / 10	-78.0	-78.0	0.01 (1)	10.00																																																																																																																																																																		
B- F	0 / 58	-18.5	-18.5	0.08 (4)	10.00																																																																																																																																																																		
F- D	0 / 58	-18.5	-18.5	0.08 (4)	10.00																																																																																																																																																																		
PLATES (table is in inches) <table><tr><th>JT</th><th>TYPE</th><th>PLATES</th><th>W</th><th>LEN</th><th>Y</th><th>X</th></tr><tr><td>B</td><td>TMB1-I</td><td>MT20</td><td>3.0</td><td>4.0</td><td>1.50</td><td>2.75</td></tr><tr><td>C</td><td>TTW+p</td><td>MT20</td><td>3.0</td><td>5.0</td><td>2.00</td><td>Edge</td></tr><tr><td>D</td><td>TMB1-I</td><td>MT20</td><td>3.0</td><td>4.0</td><td>1.50</td><td>2.75</td></tr><tr><td>F</td><td>BMW1+w</td><td>MT20</td><td>2.0</td><td>4.0</td><td></td><td></td></tr></table> Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.														JT	TYPE	PLATES	W	LEN	Y	X	B	TMB1-I	MT20	3.0	4.0	1.50	2.75	C	TTW+p	MT20	3.0	5.0	2.00	Edge	D	TMB1-I	MT20	3.0	4.0	1.50	2.75	F	BMW1+w	MT20	2.0	4.0			TOTAL WEIGHT = 4 X 28 = 113 lb [M]																																																																																																																						
JT	TYPE	PLATES	W	LEN	Y	X																																																																																																																																																																	
B	TMB1-I	MT20	3.0	4.0	1.50	2.75																																																																																																																																																																	
C	TTW+p	MT20	3.0	5.0	2.00	Edge																																																																																																																																																																	
D	TMB1-I	MT20	3.0	4.0	1.50	2.75																																																																																																																																																																	
F	BMW1+w	MT20	2.0	4.0																																																																																																																																																																			
LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2																																																																																																																																																																							
																																																																																																																																																																							

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 15:04:54 2020 Page 1



TOTAL WEIGHT = 2 X 67 = 133 lb

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRAC	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)
FR-TO		FROM	TO	LENGTH	FR-TO		
A-B	-1334 / 0	-78.0	-78.0 0.25 (1)	5.33	G-B	0 / 620	0.14 (1)
B-C	-344 / 0	-78.0	-78.0 0.33 (1)	6.25	B-F	-648 / 0	0.41 (1)
C-D	-313 / 0	-78.0	-78.0 0.19 (1)	6.25	F-C	0 / 146	0.05 (4)
H-A	-582 / 0	0.0	0.0 0.04 (1)	7.81	F-D	0 / 245	0.06 (1)
E-D	-577 / 0	0.0	0.0 0.16 (1)	7.81	A-G	0 / 1006	0.23 (1)
H-G	0 / 0	-18.5	-18.5 0.03 (4)	10.00			
G-F	0 / 807	-18.5	-18.5 0.22 (4)	10.00			
F-E	0 / 0	-18.5	-18.5 0.15 (4)	10.00			


JSI GRIP= 0.80 (F) (INPUT = 0.90)
JSI METAL= 0.42 (G) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H25T		1	TRUSS DESC. JT 45147	E20035328

Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 15:04:55 2020 Page 1

ID:MF8iiriaTok7DlbpT4B71Xys4PG-gnS9aO?MUUnqfGfIRcZKm1NC3c5trlsVSIICzauzXiEc

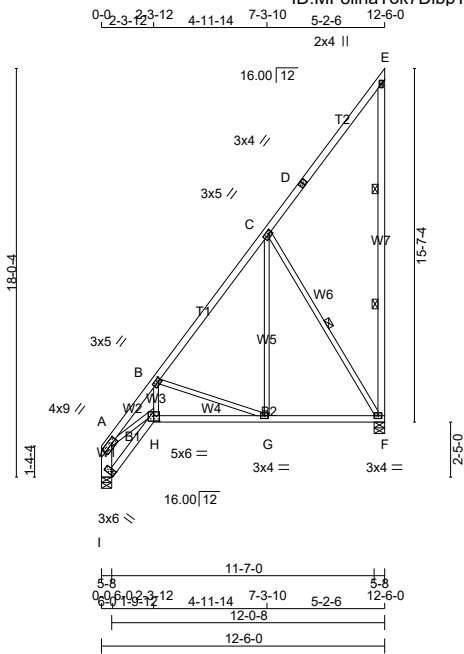

TOTAL WEIGHT = 5 X 81 = 404 lb

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
A - D	2x4	DRY	No.2	SPF
D - E	2x4	DRY	No.2	SPF
F - E	2x4	DRY	No.2	SPF
I - A	2x6	DRY	No.2	SPF
I - H	2x4	DRY	No.2	SPF
H - F	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
EXCEPT				
DRY: SEASONED LUMBER.				

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW-t	MT20	4.0	9.0	2.00	3.00
B	TMWW-t	MT20	3.0	5.0	1.50	1.50
C	TMWW-t	MT20	3.0	5.0	1.50	1.50
D	TS-t	MT20	3.0	4.0		
E	TMV+p	MT20	2.0	4.0		
F	BMVW1-t	MT20	3.0	4.0		
G	BMWW-t	MT20	3.0	4.0		
H	BBWW-t	MT20	5.0	6.0	3.00	3.00
I	BVM1-t	MT20	3.0	6.0	Edge	
Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.						

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQRD	
		GROSS REACTION		GROSS REACTION		BRG		BRG	
JT	VERT	HORZ		DOWN	HORZ	UPLIFT	IN-SX	IN-SX	
F	603	0		603	0	0	5-8	1-8	
I	603	0		603	0	0	5-8	5-8	

UNFACTORED REACTIONS							
1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
F	430	262 / 0	0 / 0	0 / 0	0 / 0	168 / 0	0 / 0
I	430	262 / 0	0 / 0	0 / 0	0 / 0	168 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, I
BEARING SIZE FACTOR = 1.15 AT JNT(S) I (BASED ON SUPPORT DEPTH = 1-8)

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.68 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

2 LATERAL BRACE(S) AT 1/3 LENGTH OF E-F.
1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-F.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING				TOTAL LOAD CASES: (4)			
CHORDS				WEBS			
MAX. FACTORED		FACTORED		MAX. FACTORED		FACTORED	
MEMB.	FORCE	VERT. LOAD	LC1 MAX	MEMB.	FORCE	MAX	
	(LBS)	(PLF)	CSI (LC)		(LBS)	CSI (LC)	
FR-TO		FROM TO		LENGTH FR-TO			
A-B	-1237 / 0	-78.0 -78.0	0.10 (1)	5.68	H-B	0 / 556	0.13 (1)
B-C	-400 / 0	-78.0 -78.0	0.25 (1)	6.25	B-G	-499 / 0	0.23 (1)
C-D	-35 / 0	-78.0 -78.0	0.26 (1)	6.25	G-C	0 / 279	0.07 (4)
D-E	-35 / 0	-78.0 -78.0	0.26 (1)	6.25	C-F	-480 / 0	0.33 (1)
F-E	-159 / 0	0.0 0.0	0.09 (1)	6.25	A-H	0 / 903	0.20 (1)
I-A	-582 / 0	0.0 0.0	0.04 (1)	7.81			
I-H	0 / 0	-18.5 -18.5	0.03 (4)	10.00			
H-G	0 / 724	-18.5 -18.5	0.20 (4)	10.00			
G-F	0 / 255	-18.5 -18.5	0.16 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:		
TOP CH.	LL =	21.0 PSF
	DL =	6.0 PSF
BOT CH.	LL =	0.0 PSF
	DL =	7.4 PSF
TOTAL LOAD = 34.4 PSF		

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.42")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.02")
ALLOWABLE DEFL.(TL)= L/360 (0.42")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.05")

CSI: TC=0.26/1.00 (C-E:1) , BC=0.20/1.00 (G-H:4) , WB=0.33/1.00 (C-F:1) , SSI=0.12/1.00 (C-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES			
PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
MAX	MIN	MAX	MIN
MT20	650	371	1747
	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.67 (G) (INPUT = 0.90)
JSI METAL= 0.38 (H) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H26		1	TRUSS DESC. JT 45147	E20035329

Alpa Roof Truss, Maple

ID:MF8iiriaTok7DlbpT4B71Xys4PG-8z0Ynk0 E5yWtOHemhr?abkCzUC61LFbXPYX6LzXiEb

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 15:04:56 2020 Page 1

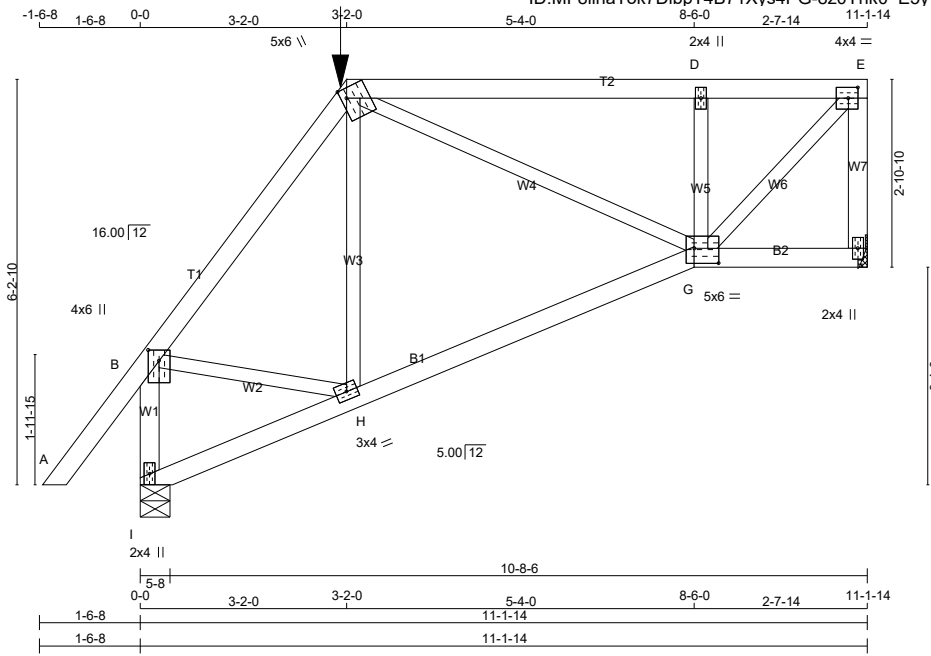

TOTAL WEIGHT = 51 lb [M]

LUMBER				
N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF
C - E	2x4	DRY	No.2	SPF
F - E	2x4	DRY	No.2	SPF
I - B	2x4	DRY	No.2	SPF
I - G	2x4	DRY	No.2	SPF
G - F	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	6.0	2.00 2.00
C	TTWW+m	MT20	5.0	6.0	1.75 1.00
D	TMW+w	MT20	2.0	4.0	
E	TMVW-t	MT20	4.0	4.0	2.00 1.75
F	BMV1+p	MT20	2.0	4.0	
G	BBWWW-p	MT20	5.0	6.0	2.75 4.50
H	BMWW-t	MT20	3.0	4.0	
I	BMV1+p	MT20	2.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
F	704	0	704	0	0
I	790	0	790	0	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

JT	1ST LCASE	MAX. MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
F	502	307 / 0	0 / 0	0 / 0	0 / 0	0 / 0	195 / 0	0 / 0
I	561	354 / 0	0 / 0	0 / 0	0 / 0	0 / 0	208 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)	
FR-TO		FROM	TO	FR-TO			
A-B	0 / 43	-78.0	-78.0 0.12 (1)	10.00	H-C	-68 / 66	0.03 (1)
B-C	-609 / 0	-78.0	-78.0 0.16 (1)	6.25	C-G	0 / 310	0.08 (1)
C-D	-641 / 0	-100.7	-100.7 0.41 (1)	6.25	G-D	-547 / 0	0.10 (1)
D-E	-664 / 0	-100.7	-100.7 0.40 (1)	6.25	G-E	0 / 926	0.23 (1)
F-E	-673 / 0	0.0	0.0 0.10 (1)	7.81	B-H	0 / 366	0.09 (1)
I-B	-769 / 0	0.0	0.0 0.10 (1)	7.81			
I-H	0 / 8	-23.9	-23.9 0.16 (4)	10.00			
H-G	0 / 387	-23.9	-23.9 0.20 (4)	10.00			
G-F	0 / 0	-23.9	-23.9 0.05 (4)	10.00			

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	3-2-0	-69	-69	---	FRONT	VERT	TOTAL	---	C1

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	21.0	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	34.4	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

GIRDER TYPE: CPrimeHip
LEFT SETBACK = 3-2-0
RIGHT SETBACK = 0-0
END SETBACK = 3-2-0
END WALL WIDTH = 0-0
CORNER FRAMING TYPE: CONVENTIONAL
END JACK TYPE: CONVENTIONAL
APPLIED TO FRONT SIDE
- ADDTL LOADS BASED ON 55 % OF GSL.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.37")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/360 (0.37")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.04")

CSI: TC=0.41/1.00 (C-D:1) , BC=0.20/1.00 (G-H:4) , WB=0.23/1.00 (E-G:1) , SSI=0.28/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES					
PLATE	GRIP(DRY)	SHEAR	SECTION	(PSI)	(PLI)
				MAX	MIN
MT20	650	371	1747	788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.78 (E) (INPUT = 0.90)
JSI METAL= 0.32 (G) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H27		1	TRUSS DESC. JT 45147	E20035330

Alpa Roof Truss, Maple

Version 8.310 S Oct 29 2019 MiTek Industries, Inc. Tue Mar 24 15:04:57 2020 Page 1

ID:MF8iiriaTok7DlbpT4B71Xys4PG-c9aw 40c?P4NVYsqKOME6oHODuZMmp0lI3h4fnzXiEa

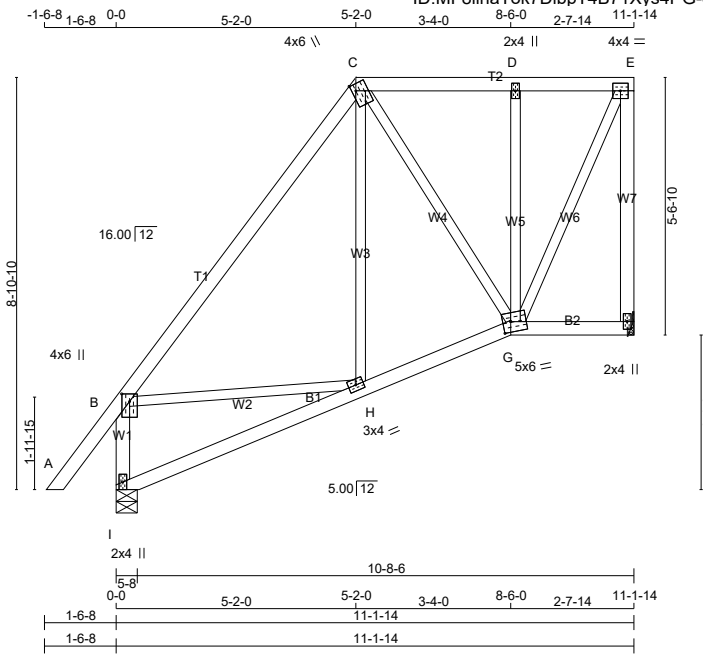

TOTAL WEIGHT = 63 lb [M]

LUMBER				
N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF
C - E	2x4	DRY	No.2	SPF
F - E	2x4	DRY	No.2	SPF
I - B	2x4	DRY	No.2	SPF
I - G	2x4	DRY	No.2	SPF
G - F	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)				
JT TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	6.0 2.00 2.00
C	TTWW+m	MT20	4.0	6.0 1.75 1.00
D	TMW+w	MT20	2.0	4.0
E	TMVW-t	MT20	4.0	4.0
F	BMV1+p	MT20	2.0	4.0
G	BBWWW-m	MT20	5.0	6.0 2.75 2.00
H	BMWW-t	MT20	3.0	4.0
I	BMV1+p	MT20	2.0	4.0

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
F	538	0	538	0	0
I	646	0	646	0	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

JT	1ST LCASE	MAX./MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
F	384	234 / 0	0 / 0	0 / 0	0 / 0	0 / 0	150 / 0	0 / 0
I	458	292 / 0	0 / 0	0 / 0	0 / 0	0 / 0	166 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)
FR-TO		FROM TO			FR-TO		
A-B	0 / 43	-78.0	-78.0 0.11 (1)	10.00	H-C	0 / 81	0.03 (4)
B-C	-392 / 0	-78.0	-78.0 0.38 (1)	6.25	C-G	-27 / 0	0.02 (4)
C-D	-220 / 0	-78.0	-78.0 0.11 (1)	6.25	G-D	-286 / 0	0.13 (1)
D-E	-226 / 0	-78.0	-78.0 0.11 (1)	6.25	G-E	0 / 500	0.11 (1)
F-E	-514 / 0	0.0	0.0 0.28 (1)	7.81	B-H	0 / 235	0.05 (1)
I-B	-606 / 0	0.0	0.0 0.07 (1)	7.81			
I-H	0 / 4	-18.5	-18.5 0.11 (4)	10.00			
H-G	0 / 248	-18.5	-18.5 0.13 (4)	10.00			
G-F	0 / 0	-18.5	-18.5 0.04 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL	=	21.0	PSF
		DL	=	6.0	PSF
BOT	CH.	LL	=	0.0	PSF
		DL	=	7.4	PSF
TOTAL	LOAD	=	34.4	PSF	

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.37")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/360 (0.37")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.03")

CSI: TC=0.38/1.00 (B-C:1), BC=0.13/1.00 (G-H:4), WB=0.13/1.00 (D-G:1), SSI=0.12/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES				
PLATE	GRIP(DRY)	SHEAR	SECTION	
(PSI)	(PLI)	(PLI)		
MAX MIN	MAX MIN	MAX MIN		
MT20	650	371	1747	788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.59 (E) (INPUT = 0.90)
JSI METAL= 0.22 (I) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H28		1	TRUSS DESC. JT 45147	E20035331

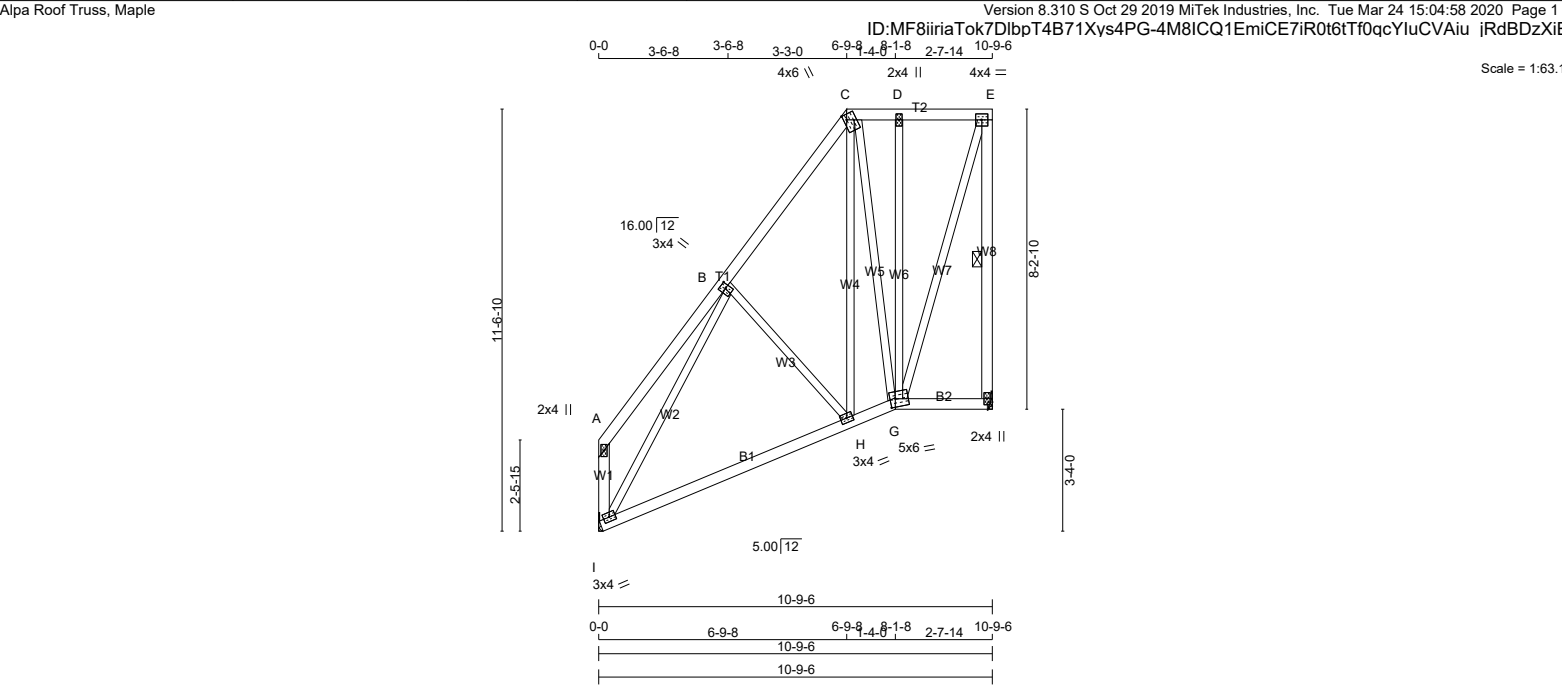

LUMBER				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER				DESIGN CRITERIA			
N. L. G. A. RULES				BEARINGS				SPECIFIED LOADS:			
CHORDS	SIZE	DRY	LUMBER	DESCR.	FACTORED	MAXIMUM	FACTORED	INPUT	REQRD	TOP	CH.
A - C	2x4	DRY	No.2	SPF	GROSS REACTION	GROSS REACTION	DOWN	BRG	BRG	LL	LL
C - E	2x4	DRY	No.2	SPF	VERT	HORZ	HORZ	IN-SX	IN-SX	DL	DL
F - E	2x4	DRY	No.2	SPF	F	520	0	520	0	0	0
I - A	2x4	DRY	No.2	SPF	I	520	0	520	0	0	0
I - G	2x4	DRY	No.2	SPF	A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F, I. MINIMUM BEARING LENGTH AT JOINT F = 1-8, JOINT I = 1-8.						
G - F	2x4	DRY	No.2	SPF							
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF							

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMV+p	MT20	2.0	4.0	
B	TMWW+t	MT20	3.0	4.0	1.75 1.25
C	TTWW+m	MT20	4.0	6.0	1.75 1.00
D	TMW+w	MT20	2.0	4.0	
E	TMVW-t	MT20	4.0	4.0	
F	BMV1+p	MT20	2.0	4.0	
G	BBWWW-m	MT20	5.0	6.0	2.75 1.75
H	BMWW-t	MT20	3.0	4.0	
I	BMVW1-t	MT20	3.0	4.0	

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



UNFACTORED REACTIONS									
JT	1ST LCASE	MAX./MIN.	COMPONENT	REACTIONS					
F	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL		
I	371	226 / 0	0 / 0	0 / 0	0 / 0	144 / 0	0 / 0		
I	371	226 / 0	0 / 0	0 / 0	0 / 0	144 / 0	0 / 0		
BRACING									
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.									
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.									
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.									
1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-F.									
END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW									
LOADING									
TOTAL LOAD CASES: (4)									
CHORDS									
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1	MAX. CSI (LC)
FR-TO		FROM	TO		FR-TO		FROM	TO	
A-B	0 / 25	-78.0	-78.0	0.15 (1)	10.00	H-C	0 / 261		0.07 (4)
B-C	-297 / 0	-78.0	-78.0	0.11 (1)	6.25	C-G	-185 / 0		0.25 (1)
C-D	-134 / 0	-78.0	-78.0	0.03 (1)	6.25	G-D	-186 / 0		0.25 (1)
D-E	-137 / 0	-78.0	-78.0	0.06 (1)	6.25	G-E	0 / 431		0.10 (1)
F-E	-496 / 0	0.0	0.0	0.15 (1)	6.25	I-B	-522 / 0		0.55 (1)
I-A	-101 / 0	0.0	0.0	0.01 (1)	7.81	B-H	-109 / 0		0.05 (1)
I-H	0 / 261	-18.5	-18.5	0.22 (4)	10.00				
H-G	0 / 155	-18.5	-18.5	0.21 (4)	10.00				
G-F	0 / 0	-18.5	-18.5	0.04 (4)	10.00				

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.36")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/360 (0.36")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.07")

CSI: TC=0.15/1.00 (E-F:1) , BC=0.22/1.00 (H-I:4) , WB=0.55/1.00 (B-I:1) , SSI=0.10/1.00 (G-H:4)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .


NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.88 (B) (INPUT = 0.90)
JSI METAL= 0.31 (B) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H29		1	TRUSS DESC. JT 45147	E20035332

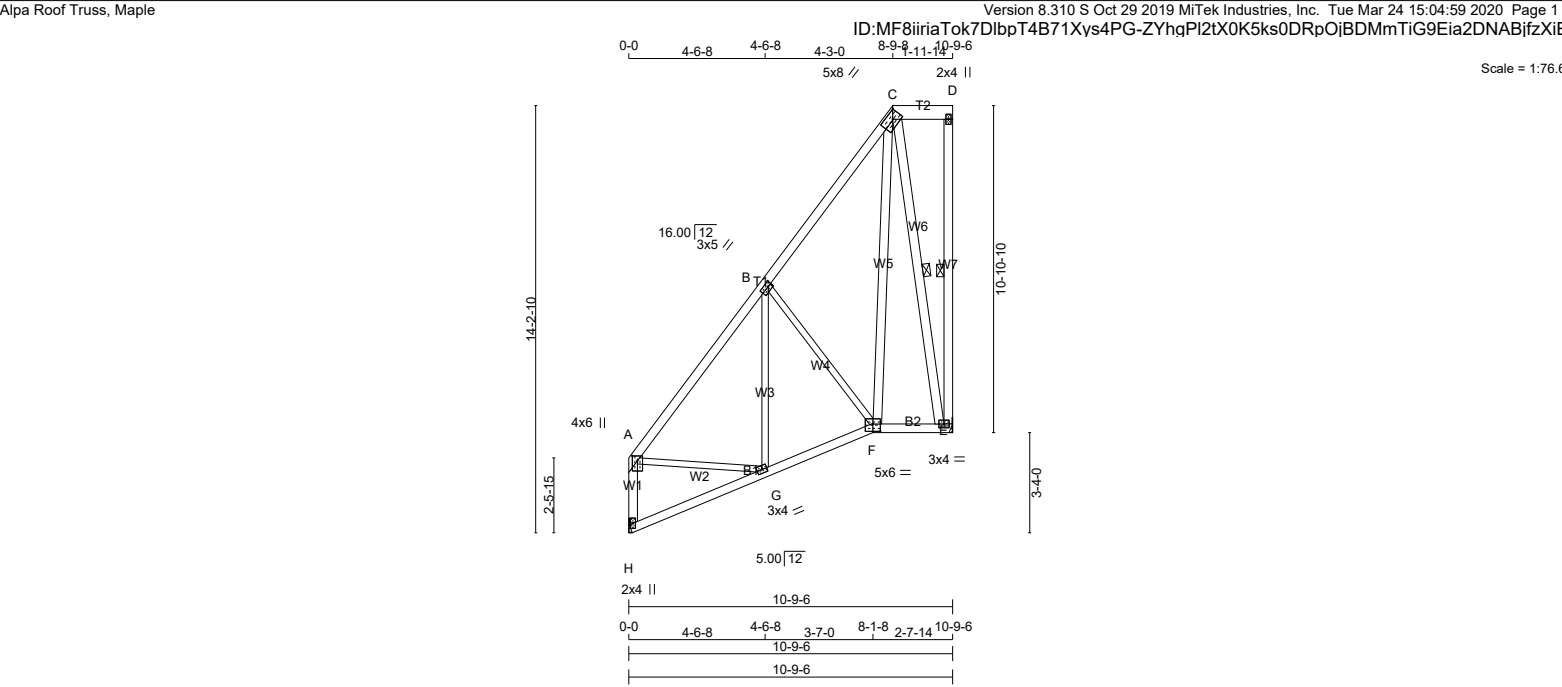

LUMBER				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER										DESIGN CRITERIA									
N. L. G. A. RULES		SIZE		LUMBER		DESCR.		BEARINGS				SPECIFIED LOADS:											
A - C	2x4	DRY	No.2	SPF		FACTORED		MAXIMUM FACTORED		INPUT		REQRD		TOP	CH.	LL	=	21.0	PSF				
C - D	2x6	DRY	No.2	SPF		GROSS REACTION		GROSS REACTION		BRG		BRG				DL	=	6.0	PSF				
E - D	2x4	DRY	No.2	SPF		JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX										
H - A	2x4	DRY	No.2	SPF		E	520	0	520	0	0	MECHANICAL		BOT	CH.	LL	=	0.0	PSF				
H - F	2x4	DRY	No.2	SPF		H	520	0	520	0	0	MECHANICAL				DL	=	7.4	PSF				
F - E	2x4	DRY	No.2	SPF		TOTAL LOAD = 34.4 PSF																	
ALL WEBS EXCEPT				2x3	DRY	No.2	SPF		A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E, H. MINIMUM BEARING LENGTH AT JOINT E = 1-8, JOINT H = 1-8.										SPACING = 24.0 IN. C/C				
F - C	2x4	DRY	No.2	SPF																LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM			
C - E	2x4	DRY	No.2	SPF																THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015			
DRY: SEASONED LUMBER.																							

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW+p	MT20	4.0	6.0	2.00	2.00
B	TMWW-t	MT20	3.0	5.0	1.50	1.50
C	TTWW-h	MT20	5.0	8.0	2.50	3.25
D	TMV+p	MT20	2.0	4.0		
E	BMVW1-t	MT20	3.0	4.0		
F	BBWW-t	MT20	5.0	6.0	3.00	3.00
G	BMWW-t	MT20	3.0	4.0		
H	BMV1+p	MT20	2.0	4.0		


LOADING										CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")			
TOTAL LOAD CASES: (4)										ALLOWABLE DEFL.(TL)= L/360 (0.36")			
										CALCULATED VERT. DEFL.(TL)= L/ 999 (0.02")			
CHORDS					WEBS								
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 (LC)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. LC1 (LC)			CSI: TC=0.20/1.00 (A-B:1) , BC=0.11/1.00 (F-G:4) , WB=0.26/1.00 (C-E:1) , SSI=0.10/1.00 (A-B:1)			
FR-TO		FROM TO			FR-TO					DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10			
A- B	-387 / 0	-78.0 -78.0	0.20 (1)	6.25	A- G	0 / 252	0.06 (1)			COMPANION LIVE LOAD FACTOR = 1.00			
B- C	-205 / 0	-78.0 -78.0	0.19 (1)	6.25	G- B	-26 / 59	0.02 (4)						
C- D	0 / 0	-78.0 -78.0	0.03 (1)	10.00	B- F	-251 / 0	0.16 (1)						
E- D	-78 / 0	0.0 0.0	0.05 (1)	6.25	F- C	0 / 355	0.06 (1)						
H- A	-486 / 0	0.0 0.0	0.07 (1)	7.81	C- E	-426 / 0	0.26 (1)			TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .			
H- G	0 / 4	-18.5 -18.5	0.09 (4)	10.00									
G- F	0 / 269	-18.5 -18.5	0.11 (4)	10.00									
F- E	0 / 79	-18.5 -18.5	0.05 (4)	10.00									

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




NAIL VALUES			
PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788	1987 1873
PLATE PLACEMENT TOL. = 0.250 inches			
PLATE ROTATION TOL. = 5.0 Deg.			
JSI GRIP= 0.43 (E) (INPUT = 0.90)			
JSI METAL= 0.17 (H) (INPUT = 1.00)			

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H30		1	TRUSS DESC. JT 45147	E20035333

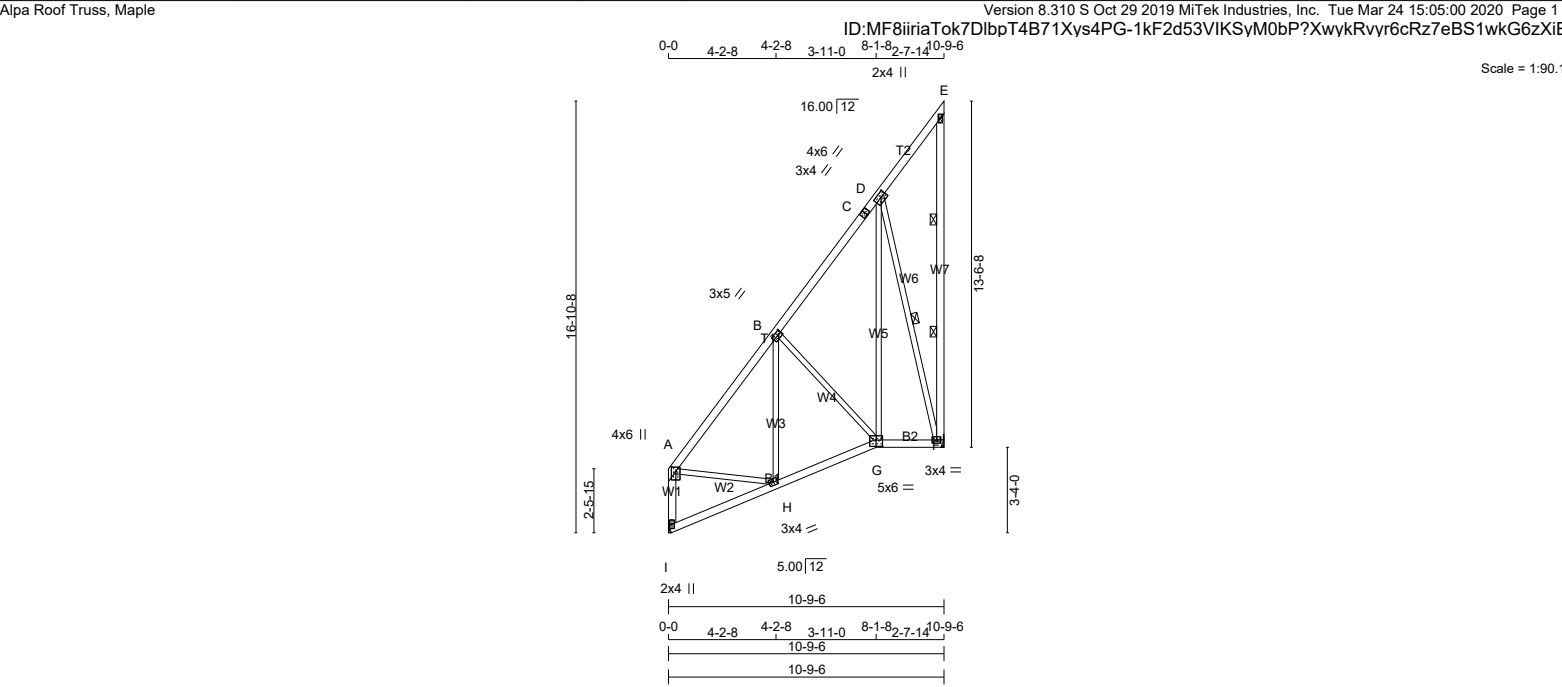

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. I - A 2x4 DRY No.2 SPF A - C 2x4 DRY No.2 SPF C - E 2x4 DRY No.2 SPF F - E 2x4 DRY No.2 SPF I - G 2x4 DRY No.2 SPF G - F 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF DRY: SEASONED LUMBER.										DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS FACTORED GROSS REACTION MAXIMUM FACTORED GROSS REACTION INPUT REQD DOWN HORZ UPLIFT IN-SX IN-SX JT 520 0 520 0 0 MECHANICAL I 520 0 520 0 0 MECHANICAL F 520 0 520 0 0 MECHANICAL A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT I, F. MINIMUM BEARING LENGTH AT JOINT I = 1-8, JOINT F = 1-8.										DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF BCBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD ALLOWABLE DEFL.(LL)= L/360 (0.36") CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01") ALLOWABLE DEFL.(TL)= L/360 (0.36") CALCULATED VERT. DEFL.(TL) = L/ 999 (0.02") CSI: TC=0.16/1.00 (A-B:1) , BC=0.11/1.00 (G-H:4) , WB=0.33/1.00 (D-F:1) , SSI=0.09/1.00 (A-B:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.65 (F) (INPUT = 0.90) JSI METAL= 0.18 (I) (INPUT = 1.00)									
PLATES (table is in inches) JT TYPE PLATES W LEN Y X A TMVW+p MT20 4.0 6.0 2.00 2.00 B TMWW-t MT20 3.0 5.0 1.50 1.50 C TS-t MT20 3.0 4.0 D TMWW-t MT20 4.0 6.0 2.00 2.50 E TMV+p MT20 2.0 4.0 F BMVW1-t MT20 3.0 4.0 G BBWW-I MT20 5.0 6.0 3.00 3.00 H BMWW-t MT20 3.0 4.0 I BMV1+p MT20 2.0 4.0										UNFACTORED REACTIONS 1ST LCASE MAX./MIN. COMPONENT REACTIONS JT COMBINED SNOW LIVE PERM.LIVE WIND DEAD SOIL I 371 226 / 0 0 / 0 0 / 0 0 / 0 144 / 0 0 / 0 F 371 226 / 0 0 / 0 0 / 0 0 / 0 144 / 0 0 / 0 BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. 2 LATERAL BRACE(S) AT 1/ 3 LENGTH OF E-F. 1 LATERAL BRACE(S) AT 1/ 2 LENGTH OF D-F. END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW LOADING TOTAL LOAD CASES: (4) CHORDS WEBS MEMB. MAX. FACTORED FORCE (LBS) VERT. LOAD (PLF) MAX. FACTORED UNBRACED LENGTH FR-TO MEMB. MAX. FACTORED FORCE (LBS) MAX. FACTORED UNBRACED LENGTH FR-TO FR-TO FROM TO CSI (LC) FR-TO FR-TO CSI (LC) I- A -489 / 0 0.0 0.0 0.07 (1) 7.81 G- D 0 / 310 0.07 (1) A- B -393 / 0 -78.0 -78.0 0.16 (1) 6.25 D- F -440 / 0 0.33 (1) B- C -205 / 0 -78.0 -78.0 0.15 (1) 6.25 A- H 0 / 253 0.06 (1) C- D -205 / 0 -78.0 -78.0 0.15 (1) 6.25 H- B -36 / 54 0.02 (1) D- E -23 / 0 -78.0 -78.0 0.08 (1) 6.25 B- G -206 / 0 0.13 (1) F- E -70 / 0 0.0 0.0 0.03 (1) 6.25 I- H 0 / 4 -18.5 -18.5 0.09 (4) 10.00 H- G 0 / 269 -18.5 -18.5 0.11 (4) 10.00 G- F 0 / 111 -18.5 -18.5 0.05 (4) 10.00																			
LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2																													

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H31		1	TRUSS DESC. JT 45147	E20035334

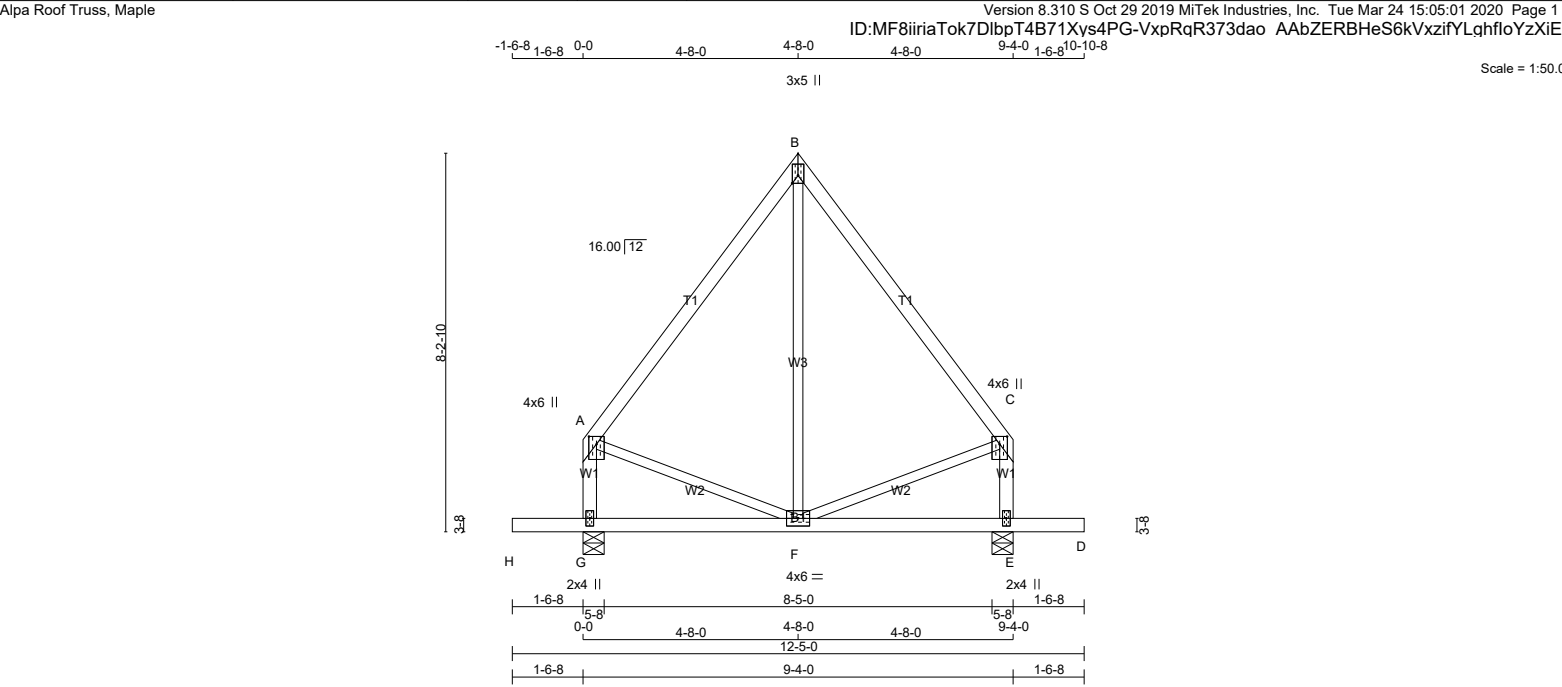

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
A - B	2x4	DRY	No.2	SPF
B - C	2x4	DRY	No.2	SPF
G - A	2x4	DRY	No.2	SPF
E - C	2x4	DRY	No.2	SPF
H - D	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
EXCEPT				

DRY: SEASONED LUMBER.

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW+p	MT20	4.0	6.0	2.00	2.00
B	TTW+p	MT20	3.0	5.0	2.00	Edge
C	TMVW+p	MT20	4.0	6.0	2.00	2.00
E	BMV1+p	MT20	2.0	4.0		
F	BMWW+t	MT20	4.0	6.0		
G	BMV1+p	MT20	2.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
G	599	0	599	0	0
E	599	0	599	0	0

UNFACTORED REACTIONS							
JT	1ST LCASE	MAX. /MIN. COMPONENT REACTIONS					
G	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
E	427	261 / 0	0 / 0	0 / 0	0 / 0	166 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) G, E

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING									
TOTAL LOAD CASES: (4)									
CHORDS					WEBS				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)		
FR-TO		FROM	TO		FR-TO				
A-B	-234 / 0	-78.0	-78.0	0.22 (1)	6.25	F-B	0 / 79	0.03 (4)	
B-C	-234 / 0	-78.0	-78.0	0.22 (1)	6.25	A-F	0 / 148	0.03 (1)	
G-A	-417 / 0	0.0	0.0	0.05 (1)	7.81	F-C	0 / 148	0.03 (1)	
E-C	-417 / 0	0.0	0.0	0.05 (1)	7.81				
H-G	0 / 0	-96.5	-96.5	0.16 (1)	10.00				
G-F	0 / 0	-18.5	-18.5	0.11 (4)	10.00				
F-E	0 / 0	-18.5	-18.5	0.11 (4)	10.00				
E-D	0 / 0	-96.5	-96.5	0.16 (1)	10.00				

TOTAL WEIGHT = 3 X 50 = 150 lb

DESIGN CRITERIA

SPECIFIED LOADS:		
TOP CH.	LL	= 21.0 PSF
	DL	= 6.0 PSF
BOT CH.	LL	= 0.0 PSF
	DL	= 7.4 PSF
TOTAL LOAD		= 34.4 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.31")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.31")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01")

CANTILEVER DEFLECTION:
ALLOWABLE DEFL.(LL)= L/120 (0.19")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/120 (0.19")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01")

CSI: TC=0.22/1.00 (B-C:1) , BC=0.16/1.00 (D-E:1) , WB=0.03/1.00 (C-F:1) , SSI=0.12/1.00 (G-H:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .


NAIL VALUES				
PLATE	GRIP(DRY)	SHEAR	SECTION	
(PSI)	(PLI)	(PLI)		
MT20	650	371	1747	788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.23 (A) (INPUT = 0.90)
JSI METAL= 0.12 (C) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318404	H31G		1	TRUSS DESC. JT 45147	E20035335

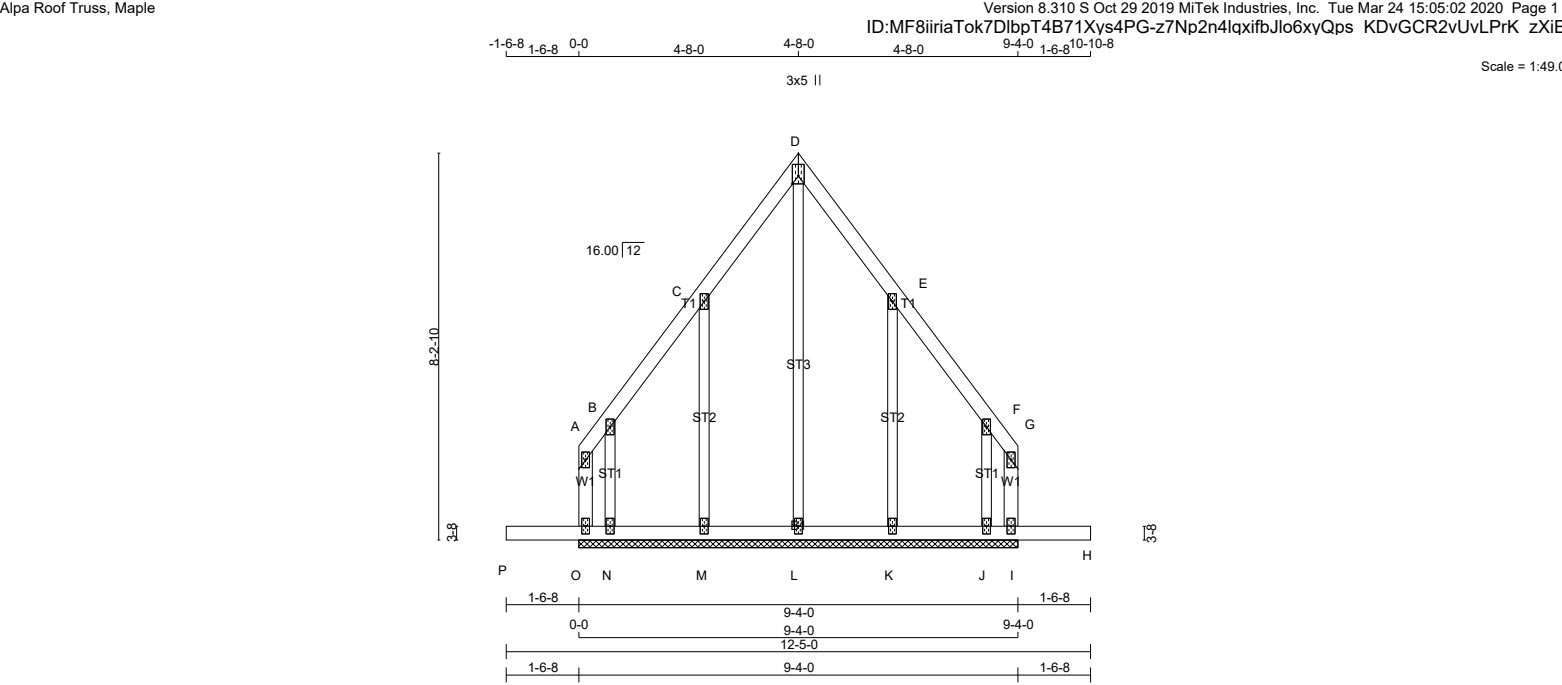

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. O - A 2x4 DRY No.2 SPF A - D 2x4 DRY No.2 SPF D - G 2x4 DRY No.2 SPF I - G 2x4 DRY No.2 SPF P - H 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF ALL GABLE WEBS 2x3 DRY No.2 SPF DRY: SEASONED LUMBER. GABLE STUDS SPACED AT 2'-0" OC.					DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS. THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE. PROVIDE ANCHORAGE AT BEARING JOINT N FOR 150 LBS. FACTORED UPLIFT PROVIDE ANCHORAGE AT BEARING JOINT J FOR 150 LBS. FACTORED UPLIFT BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. LOADING TOTAL LOAD CASES: (4)					DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF BCBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 DESIGN ASSUMPTIONS -OVERHANG NOT TO BE ALTERED OR CUT OFF. (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD CSI: TC=0.04/1.00 (B-C:1) , BC=0.16/1.00 (H-I:1) , WB=0.22/1.00 (D-L:1) , SSI=0.14/1.00 (I-J:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.17 (D) (INPUT = 0.90) JSI METAL= 0.08 (E) (INPUT = 1.00)																																																																																																																																																							
PLATES (table is in inches) JT TYPE PLATES W LEN Y X A TMV+p MT20 2.0 4.0 B, C, E, F B TMW+w MT20 2.0 4.0 D TTW+p MT20 3.0 5.0 2.00 Edge G TMV+p MT20 2.0 4.0 I BMV1+p MT20 2.0 4.0 J, K, L, M, N J BMW1+w MT20 2.0 4.0 O BMV1+p MT20 2.0 4.0 Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.					<table><tr><th colspan="2">CHORDS</th><th colspan="2">FACTORED</th><th colspan="2">WEBS</th><th colspan="2">FACTORED</th></tr><tr><th>MEMB.</th><th>FORCE (LBS)</th><th>VERT. LOAD (PLF)</th><th>LC1 MAX CSI (LC)</th><th>MEMB.</th><th>FORCE (LBS)</th><th>MAX CSI (LC)</th><th></th></tr><tr><td>FR-TO</td><td></td><td>FROM TO</td><td></td><td>FR-TO</td><td></td><td></td><td></td></tr><tr><td>O- A</td><td>-20 / 0</td><td>0.0 0.0</td><td>0.02 (1)</td><td>7.81</td><td>L- D</td><td>-178 / 0</td><td>0.22 (1)</td></tr><tr><td>A- B</td><td>0 / 5</td><td>-78.0 -78.0</td><td>0.02 (1)</td><td>10.00</td><td>M- C</td><td>-165 / 0</td><td>0.07 (1)</td></tr><tr><td>B- C</td><td>0 / 10</td><td>-78.0 -78.0</td><td>0.04 (1)</td><td>10.00</td><td>N- B</td><td>-90 / 0</td><td>0.02 (1)</td></tr><tr><td>C- D</td><td>0 / 9</td><td>-78.0 -78.0</td><td>0.04 (1)</td><td>10.00</td><td>K- E</td><td>-165 / 0</td><td>0.07 (1)</td></tr><tr><td>D- E</td><td>0 / 9</td><td>-78.0 -78.0</td><td>0.04 (1)</td><td>10.00</td><td>J- F</td><td>-90 / 0</td><td>0.02 (1)</td></tr><tr><td>E- F</td><td>0 / 10</td><td>-78.0 -78.0</td><td>0.04 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>F- G</td><td>0 / 5</td><td>-78.0 -78.0</td><td>0.02 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>I- G</td><td>-20 / 0</td><td>0.0 0.0</td><td>0.02 (1)</td><td>7.81</td><td></td><td></td><td></td></tr><tr><td>P- O</td><td>0 / 0</td><td>-96.5 -96.5</td><td>0.16 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>O- N</td><td>-3 / 2</td><td>-18.5 -18.5</td><td>0.14 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>N- M</td><td>-4 / 0</td><td>-18.5 -18.5</td><td>0.02 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>M- L</td><td>-6 / 0</td><td>-18.5 -18.5</td><td>0.02 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>L- K</td><td>-6 / 0</td><td>-18.5 -18.5</td><td>0.02 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>K- J</td><td>-4 / 0</td><td>-18.5 -18.5</td><td>0.02 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>J- I</td><td>-3 / 2</td><td>-18.5 -18.5</td><td>0.14 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>I- H</td><td>0 / 0</td><td>-96.5 -96.5</td><td>0.16 (1)</td><td>10.00</td><td></td><td></td><td></td></tr></table>					CHORDS		FACTORED		WEBS		FACTORED		MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MEMB.	FORCE (LBS)	MAX CSI (LC)		FR-TO		FROM TO		FR-TO				O- A	-20 / 0	0.0 0.0	0.02 (1)	7.81	L- D	-178 / 0	0.22 (1)	A- B	0 / 5	-78.0 -78.0	0.02 (1)	10.00	M- C	-165 / 0	0.07 (1)	B- C	0 / 10	-78.0 -78.0	0.04 (1)	10.00	N- B	-90 / 0	0.02 (1)	C- D	0 / 9	-78.0 -78.0	0.04 (1)	10.00	K- E	-165 / 0	0.07 (1)	D- E	0 / 9	-78.0 -78.0	0.04 (1)	10.00	J- F	-90 / 0	0.02 (1)	E- F	0 / 10	-78.0 -78.0	0.04 (1)	10.00				F- G	0 / 5	-78.0 -78.0	0.02 (1)	10.00				I- G	-20 / 0	0.0 0.0	0.02 (1)	7.81				P- O	0 / 0	-96.5 -96.5	0.16 (1)	10.00				O- N	-3 / 2	-18.5 -18.5	0.14 (1)	10.00				N- M	-4 / 0	-18.5 -18.5	0.02 (4)	10.00				M- L	-6 / 0	-18.5 -18.5	0.02 (4)	10.00				L- K	-6 / 0	-18.5 -18.5	0.02 (4)	10.00				K- J	-4 / 0	-18.5 -18.5	0.02 (4)	10.00				J- I	-3 / 2	-18.5 -18.5	0.14 (1)	10.00				I- H	0 / 0	-96.5 -96.5	0.16 (1)	10.00			
CHORDS		FACTORED		WEBS		FACTORED																																																																																																																																																											
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MEMB.	FORCE (LBS)	MAX CSI (LC)																																																																																																																																																											
FR-TO		FROM TO		FR-TO																																																																																																																																																													
O- A	-20 / 0	0.0 0.0	0.02 (1)	7.81	L- D	-178 / 0	0.22 (1)																																																																																																																																																										
A- B	0 / 5	-78.0 -78.0	0.02 (1)	10.00	M- C	-165 / 0	0.07 (1)																																																																																																																																																										
B- C	0 / 10	-78.0 -78.0	0.04 (1)	10.00	N- B	-90 / 0	0.02 (1)																																																																																																																																																										
C- D	0 / 9	-78.0 -78.0	0.04 (1)	10.00	K- E	-165 / 0	0.07 (1)																																																																																																																																																										
D- E	0 / 9	-78.0 -78.0	0.04 (1)	10.00	J- F	-90 / 0	0.02 (1)																																																																																																																																																										
E- F	0 / 10	-78.0 -78.0	0.04 (1)	10.00																																																																																																																																																													
F- G	0 / 5	-78.0 -78.0	0.02 (1)	10.00																																																																																																																																																													
I- G	-20 / 0	0.0 0.0	0.02 (1)	7.81																																																																																																																																																													
P- O	0 / 0	-96.5 -96.5	0.16 (1)	10.00																																																																																																																																																													
O- N	-3 / 2	-18.5 -18.5	0.14 (1)	10.00																																																																																																																																																													
N- M	-4 / 0	-18.5 -18.5	0.02 (4)	10.00																																																																																																																																																													
M- L	-6 / 0	-18.5 -18.5	0.02 (4)	10.00																																																																																																																																																													
L- K	-6 / 0	-18.5 -18.5	0.02 (4)	10.00																																																																																																																																																													
K- J	-4 / 0	-18.5 -18.5	0.02 (4)	10.00																																																																																																																																																													
J- I	-3 / 2	-18.5 -18.5	0.14 (1)	10.00																																																																																																																																																													
I- H	0 / 0	-96.5 -96.5	0.16 (1)	10.00																																																																																																																																																													
LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2																																																																																																																																																																	

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318405	H10T	5	1	TRUSS DESC. JT 45147	E20035338

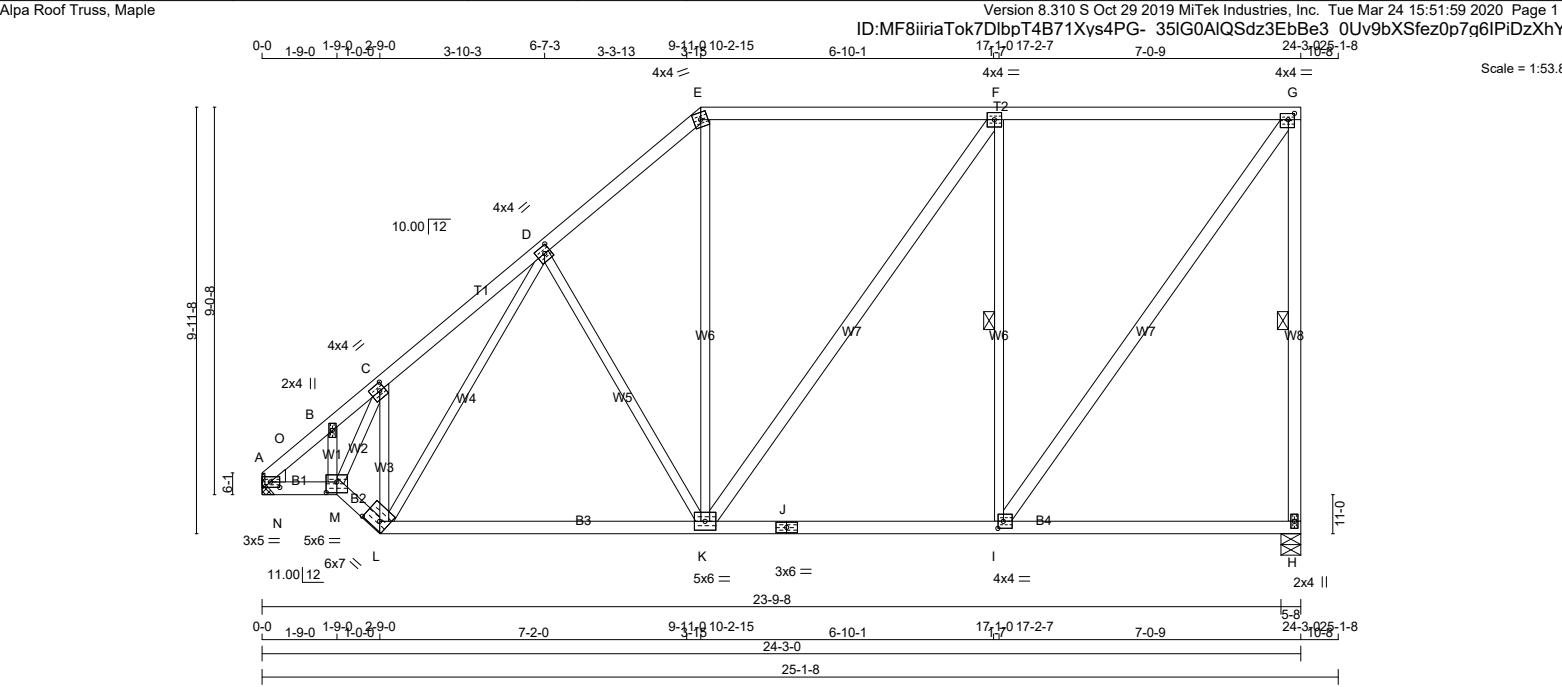

LUMBER				
N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - E	2x4	DRY	No.2	SPF
E - G	2x4	DRY	No.2	SPF
A - M	2x4	DRY	No.2	SPF
M - L	2x4	DRY	No.2	SPF
L - J	2x4	DRY	No.2	SPF
J - H	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF
H - G	2x4	DRY	No.2	SPF
K - F	2x4	DRY	No.2	SPF
I - G	2x4	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMBH1-I	MT20	3.0	5.0	1.50 2.50
B	TMW+w	MT20	2.0	4.0	
C	TMWW-t	MT20	4.0	4.0	2.00 1.50
D	TMWW-t	MT20	4.0	4.0	2.00 1.75
E	TTW-m	MT20	4.0	4.0	
F	TMWW-t	MT20	4.0	4.0	
G	TMWW-t	MT20	4.0	4.0	1.75 1.75
H	BMW1+w	MT20	2.0	4.0	
I	BMWW-t	MT20	4.0	4.0	2.00 1.50
J	BS-t	MT20	3.0	6.0	
K	BMWW-t	MT20	5.0	6.0	
L	BBWW-h	MT20	6.0	7.0	2.25 4.50
M	BBWW-l	MT20	5.0	6.0	3.00 3.00

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG	HEEL
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX
H	1237	0	1237	0	0	5-8
A	1193	0	1193	0	0	MECHANICAL

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT A. MINIMUM BEARING LENGTH AT JOINT A = 3-8.

UNFACTORED REACTIONS		1ST LCASE	MAX./MIN. COMPONENT REACTIONS				
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
H	888	506 / 0	0 / 0	0 / 0	0 / 0	382 / 0	0 / 0
A	853	506 / 0	0 / 0	0 / 0	0 / 0	347 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

BRACING
FOR SECTION E-G, MAX. PURLIN SPACING = 2.00 FT.
FOR OTHER SECTIONS, TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.04 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF G-H, F-I.

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO		FROM TO		FR-TO			
A-O	-1682 / 0	-78.0 -78.0	0.11 (1)	M-B	0 / 149	0.03 (1)	
O-B	-1581 / 0	-78.0 -78.0	0.12 (1)	M-C	0 / 734	0.17 (1)	
B-C	-1441 / 0	-78.0 -78.0	0.12 (1)	L-C	-743 / 0	0.17 (1)	
C-D	-1151 / 0	-78.0 -78.0	0.14 (1)	H-G	-1185 / 0	0.57 (1)	
D-E	-997 / 0	-78.0 -78.0	0.13 (1)	K-E	0 / 290	0.07 (1)	
E-F	-751 / 0	-85.5 -85.5	0.54 (1)	K-F	0 / 111	0.02 (1)	
F-G	-687 / 0	-85.5 -85.5	0.54 (1)	I-F	-827 / 0	0.56 (1)	
				I-G	0 / 1183	0.19 (1)	
A-N	0 / 1143	-18.5 -18.5	0.22 (1)	L-D	0 / 18	0.01 (4)	
N-M	0 / 1143	-18.5 -18.5	0.22 (1)	D-K	-271 / 0	0.31 (1)	
M-L	0 / 1179	-18.5 -18.5	0.19 (1)	N-O	0 / 82	0.00 (1)	
L-K	0 / 882	-18.5 -18.5	0.32 (4)				
K-J	0 / 687	-18.5 -18.5	0.31 (4)				
J-I	0 / 687	-18.5 -18.5	0.31 (4)				
I-H	0 / 0	-18.5 -18.5	0.19 (4)				

DESIGN CRITERIA

SPECIFIED LOADS:			
TOP CH.	LL	=	21.0 PSF
	DL	=	6.0 PSF
BOT CH.	LL	=	0.0 PSF
	DL	=	7.4 PSF
TOTAL LOAD = 34.4 PSF			

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON PIGGYBACK TRUSS WITH SLOPES OF 6.00/12 AND -6.00/12 AND RESPECTIVE WALL HEIGHTS OF 0-0 AND 0-0 AND AN ADDITIONAL DEAD LOAD OF 3.0 P.S.F.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.80")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.03")
ALLOWABLE DEFL.(TL)= L/360 (0.80")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.14")

CSI: TC=0.54/1.00 (E-F:1) , BC=0.32/1.00 (K-L:4) , WB=0.57/1.00 (G-H:1) , SSI=0.29/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES					
PLATE	GRIP(DRY)	SHEAR	SECTION		
	(PSI)	(PLI)	(PLI)		
	MAX MIN	MAX MIN	MAX MIN		
MT20	650 371	1747 788	1987 1873		

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.88 (I) (INPUT = 0.90)
JSI METAL= 0.38 (A) (INPUT = 1.00)

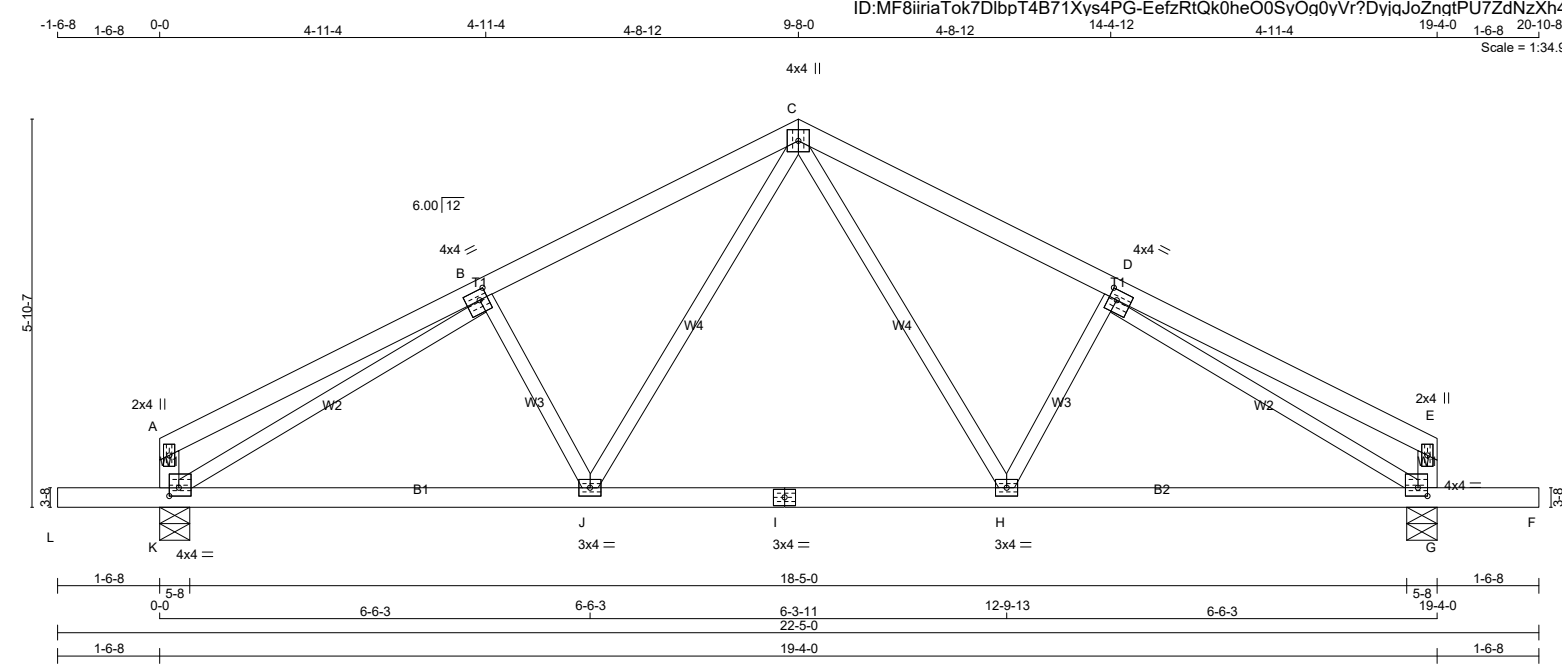

TOTAL WEIGHT = 4 X 76 = 304 lb

LUMBER				
N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF
C - E	2x4	DRY	No.2	SPF
K - A	2x4	DRY	No.2	SPF
G - E	2x4	DRY	No.2	SPF
L - I	2x4	DRY	No.2	SPF
I - F	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

PLATES (table is in inches)				
JT TYPE	PLATES	W	LEN	Y X
A	TMV+p	MT20	2.0	4.0
B	TMWW-t	MT20	4.0	4.0 1.75 1.50
C	TTWW+p	MT20	4.0	4.0
D	TMWW-t	MT20	4.0	4.0 1.75 1.50
E	TMV+p	MT20	2.0	4.0
G	BMVW1-t	MT20	4.0	4.0 1.50 1.75
H	BMWW-t	MT20	3.0	4.0
I	BS-t	MT20	3.0	4.0
J	BMWW-t	MT20	3.0	4.0
K	BMVW1-t	MT20	4.0	4.0 1.50 1.75

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
K	1081	0	1081	0	0	5-8	1-8
G	1081	0	1081	0	0	5-8	1-8

UNFACTORED REACTIONS		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
K	771	471 / 0	0 / 0	0 / 0	0 / 0	300 / 0	0 / 0
G	771	471 / 0	0 / 0	0 / 0	0 / 0	300 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) K, G

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.67 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

CHORDS				WEBS			
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	MAX. CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	FORCE (LBS)	MAX. FACTORED CSI (LC)
FR-TO		FROM	TO		FR-TO		
A-B	0 / 19	-78.0	-78.0 0.29 (1)	10.00	C-H	0 / 414	0.09 (1)
B-C	-1148 / 0	-78.0	-78.0 0.24 (1)	5.67	H-D	-262 / 0	0.06 (1)
C-D	-1148 / 0	-78.0	-78.0 0.24 (1)	5.67	J-C	0 / 414	0.09 (1)
D-E	0 / 19	-78.0	-78.0 0.29 (1)	10.00	B-J	-262 / 0	0.06 (1)
K-A	-145 / 0	0.0	0.0 0.01 (1)	7.81	K-B	-1352 / 0	0.74 (1)
G-E	-145 / 0	0.0	0.0 0.01 (1)	7.81	D-G	-1352 / 0	0.74 (1)
L-K	0 / 0	-96.5	-96.5 0.16 (1)	10.00			
K-J	0 / 1133	-18.5	-18.5 0.28 (4)	10.00			
J-I	0 / 806	-18.5	-18.5 0.25 (4)	10.00			
I-H	0 / 806	-18.5	-18.5 0.25 (4)	10.00			
H-G	0 / 1133	-18.5	-18.5 0.28 (4)	10.00			
G-F	0 / 0	-96.5	-96.5 0.16 (1)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 21.0 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN./C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF CBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.64")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.04")
ALLOWABLE DEFL.(TL)= L/360 (0.64")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.09")

CANTILEVER DEFLECTION:
ALLOWABLE DEFL.(LL)= L/120 (0.19")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/120 (0.19")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01")

CSI: TC=0.29/1.00 (A-B:1) , BC=0.28/1.00 (J-K:4) , WB=0.74/1.00 (B-K:1) , SSI=0.16/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.87 (K) (INPUT = 0.90)
JSI METAL= 0.46 (D) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
318446	H45G		1	TRUSS DESC. JT 45147	E20035342

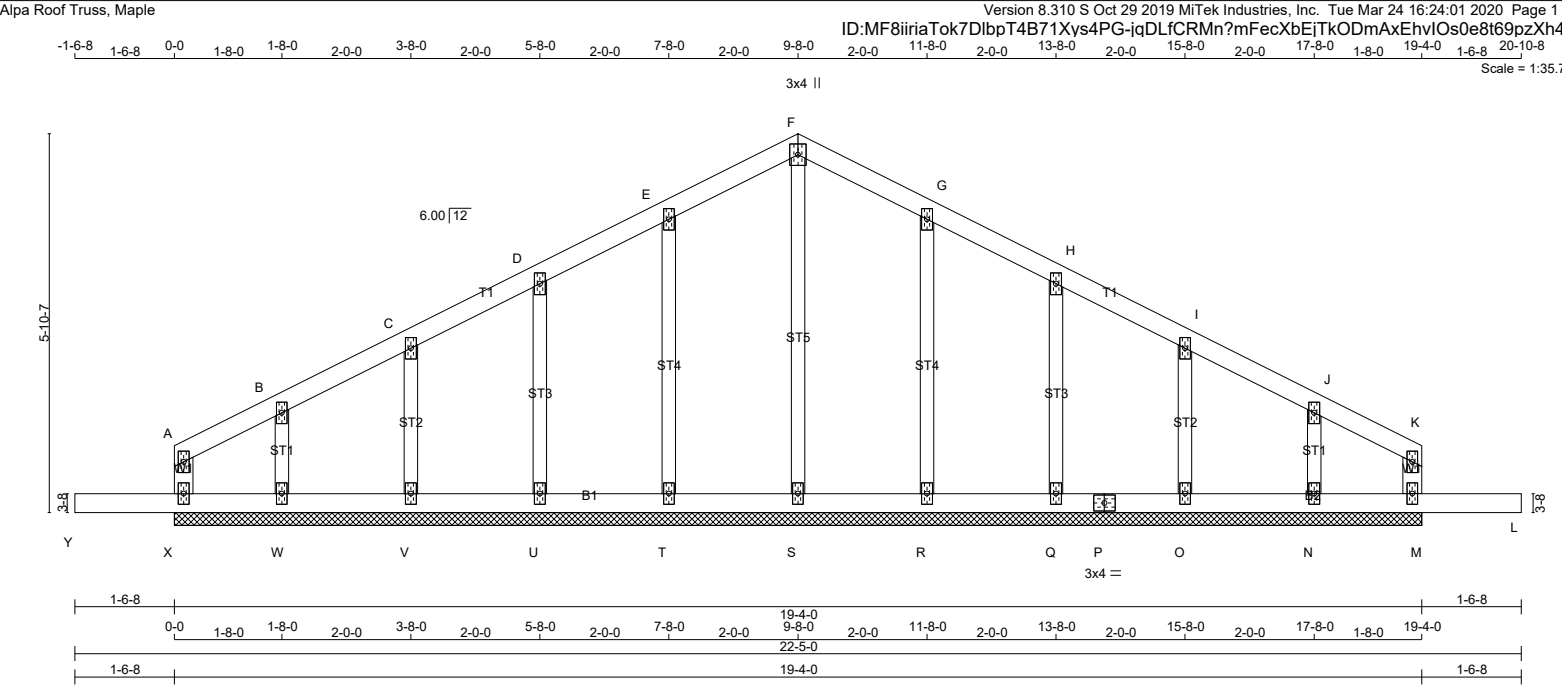

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. A - F 2x4 DRY No.2 SPF F - K 2x4 DRY No.2 SPF X - A 2x4 DRY No.2 SPF M - K 2x4 DRY No.2 SPF Y - P 2x4 DRY No.2 SPF P - L 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF ALL GABLE WEBS 2x3 DRY No.2 SPF DRY: SEASONED LUMBER. GABLE STUDS SPACED AT 2-0-0 OC.				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS THIS TRUSS DESIGNED FOR CONTINUOUS BEARINGS. THIS TRUSS REQUIRES RIGID SHEATHING ON EXPOSED FACE. BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. LOADING TOTAL LOAD CASES: (4) CHORDS MAX. FACTORED FORCE (LBS) FACTORED VERT. LOAD (PLF) MAX. FACTORED VERT. LOAD (PLF) MAX. FACTORED VERT. LOAD (PLF) MEMB. FR-TO FROM TO CSI (LC) UNBRAC LENGTH FR-TO MEMB. MAX. FACTORED FORCE (LBS) MAX. FACTORED VERT. LOAD (PLF) A-B 0 / 32 -78.0 -78.0 0.04 (1) 10.00 S-F -202 / 0 0.11 (1) B-C 0 / 42 -78.0 -78.0 0.04 (1) 10.00 T-E -161 / 0 0.06 (1) C-D 0 / 44 -78.0 -78.0 0.04 (1) 10.00 U-D -152 / 0 0.04 (1) D-E 0 / 49 -78.0 -78.0 0.05 (1) 10.00 V-C -159 / 0 0.03 (1) E-F 0 / 50 -78.0 -78.0 0.05 (1) 10.00 W-B -130 / 0 0.02 (1) F-G 0 / 50 -78.0 -78.0 0.05 (1) 10.00 R-G -161 / 0 0.06 (1) G-H 0 / 49 -78.0 -78.0 0.05 (1) 10.00 Q-H -152 / 0 0.04 (1) H-I 0 / 44 -78.0 -78.0 0.04 (1) 10.00 O-I -159 / 0 0.03 (1) I-J 0 / 42 -78.0 -78.0 0.04 (1) 10.00 N-J -130 / 0 0.02 (1) J-K 0 / 32 -78.0 -78.0 0.04 (1) 10.00 X-A -51 / 0 0.0 0.0 0.06 (1) 7.81 M-K -51 / 0 0.0 0.0 0.06 (1) 7.81 Y-X 0 / 0 -96.5 -96.5 0.16 (1) 10.00 X-W -30 / 0 -18.5 -18.5 0.09 (1) 6.25 W-V -36 / 0 -18.5 -18.5 0.02 (4) 6.25 V-U -40 / 0 -18.5 -18.5 0.02 (4) 6.25 U-T -43 / 0 -18.5 -18.5 0.01 (4) 6.25 T-S -45 / 0 -18.5 -18.5 0.01 (4) 6.25 S-R -45 / 0 -18.5 -18.5 0.01 (4) 6.25 R-Q -43 / 0 -18.5 -18.5 0.01 (4) 6.25 Q-P -40 / 0 -18.5 -18.5 0.02 (4) 6.25 P-O -40 / 0 -18.5 -18.5 0.02 (4) 6.25 O-N -36 / 0 -18.5 -18.5 0.02 (4) 6.25 N-M -30 / 0 -18.5 -18.5 0.09 (1) 6.25 M-L 0 / 0 -96.5 -96.5 0.16 (1) 10.00				DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF CBC 2018, ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 DESIGN ASSUMPTIONS -OVERHANG NOT TO BE ALTERED OR CUT OFF. (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD CSI: TC=0.06/1.00 (K-M:1), BC=0.16/1.00 (L-M:1), WB=0.11/1.00 (F-S:1), SSI=0.12/1.00 (X-Y:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT. NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.67 (F) (INPUT = 0.90) JSI METAL= 0.07 (G) (INPUT = 1.00)			
---	--	--	--	---	--	--	--	--	--	--	--

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



December 18, 2019

Re: Expiration Date for Technical Bulletins Extended to 4/1/2020

Please be advised that the expiration date of the Technical Bulletins listed below has been extended until April 1, 2020.

T-SPECCP17	T-SPECH17	T-SPECDSHGUS17R
T-SPECHGUS17-R	T-SPECHHUS17-R	T-SPECHUS17
T-SPECLF17	T-SPECLT17	T-SPECLU17
T-SPECCLUL17	T-SPECLUS17	T-SPECSUR17
T-SPECTBE17	T-SPECTC17	T-SPECTHGB17
T-SPECTHGBHV17	T-SPECTHGQ17	T-SPECTHGW17
T-SPECLSULSSU17	T-SPECHTHGQ17	T-SPECSTHGQ17

Should you have any questions or concerns regarding the above, please contact me at your convenience.

Sincerely,



Brent Bunting, P.Eng.
Simpson Strong-Tie Canada, Ltd.



LUS – Double Shear Joist Hangers



All LUS hangers have double shear nailing. This patented innovation distributes the load through two points on each joist nail for greater strength. It also allows the use of fewer nails, faster installation and the use of common nails for all connections.

Material: 18 gauge

Finish: G90 galvanized

Design:


- Factored resistances are in accordance with CSA O86-14.
- Uplift resistances have been increased 15%. No further increase is permitted.
- Wood shear is not considered in the factored resistances given. The specifier must ensure that the joist and header capacities are capable of withstanding these loads.

Installation:


- Use all specified fasteners.
- Nails: 16d = 0.162" dia. x 3½" long common wire, 10d = 0.148" x 3" long common wire.
- Double shear nails must be driven at an angle through the joist or truss into the header to achieve the table loads.
- Not designed for welded or nailer applications.

Options:

- These hangers cannot be modified

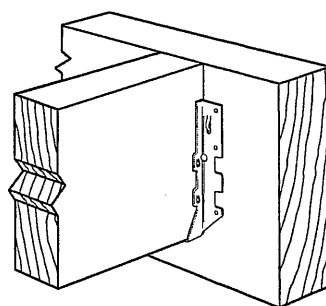


Typical LUS Installation

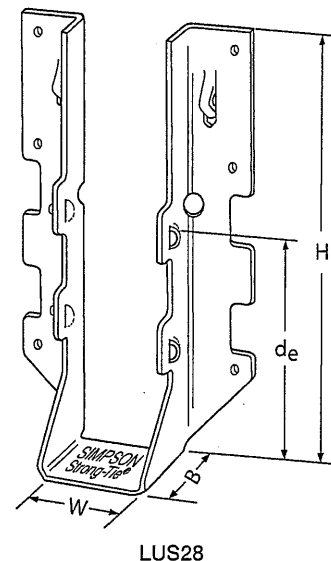


Model No.	Ga.	Dimensions (in.)				Fasteners		Factored Resistance (lb.)			
		W	H	B	d _e ¹	Face	Joist	D.Fir-L		S-P-F	
								Uplift	Normal	Uplift	Normal
								(K _p =1.15)	(K _p =1.00)	(K _p =1.15)	(K _p =1.00)
LUS24	18	1⅞	3⅞	1¾	1 15/16	(4) 10d	(2) 10d	710	1630	645	1155
LUS24-2	18	3⅞	3⅞	2	1 13/16	(4) 16d	(2) 16d	835	2020	590	1435
LUS26	18	1⅞	4¾	1¾	3⅞	(4) 10d	(4) 10d	1420	2170	1290	1630
LUS26-2	18	3⅞	4⅞	2	4	(4) 16d	(4) 16d	1720	2595	1545	1920
LUS26-3	18	4⅞	4⅞	2	3¼	(4) 16d	(4) 16d	1720	2595	1545	2340
LUS28	18	1⅞	6⅞	1¾	3¾	(6) 10d	(6) 10d	1420	2520	1290	1790
LUS28-2	18	3⅞	7	2	4	(6) 16d	(4) 16d	1720	3325	1545	2575
LUS28-3	18	4⅞	6¼	2	3¼	(6) 16d	(4) 16d	1720	3325	1545	2375
LUS210	18	1⅞	7 13/16	1¾	3⅞	(8) 10d	(4) 10d	1420	2785	1290	2210
LUS210-2	18	3⅞	9	2	6	(8) 16d	(6) 16d	2580	4500	2320	3195
LUS210-3	18	4⅞	8¾	2	5¼	(8) 16d	(6) 16d	2580	3345	2320	2375

1. d_e is the distance from the seat of the hanger to the highest joist nail.




Dome Double Shear Nailing prevents tabs breaking off (available on some models).

U.S. Patent 5,603,580



Double Shear Nailing Top View.

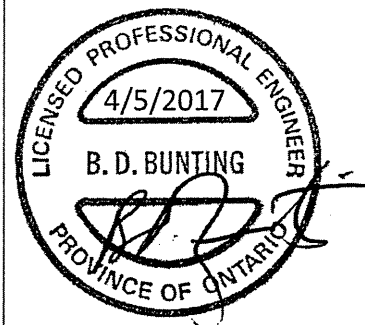

LIMIT STATES DESIGN

This technical bulletin is effective until June 30, 2019, and reflects information available as of March 1, 2017. This information is updated periodically and should not be relied upon after June 30, 2019. Contact Simpson Strong-Tie for current information and limited warranty or see strongtie.com.

© 2017 Simpson Strong-Tie Company Inc.

T-SPECLUS17 3/17 exp. 6/19

(800) 999-5099
strongtie.com

HUS/LJS – Double Shear Joist Hangers



All hangers have double shear nailing. This patented innovation distributes the load through two points on each joist nail for greater strength. It also allows the use of fewer nails, faster installation and the use of common nails for all connections. Do not bend or remove tabs.

Material: See table

Finish: G90 galvanized

Design:


- Factored resistances are in accordance with CSA O86-14.
- Uplift resistances have been increased 15%. No further increase is permitted.
- Wood shear is not considered in the factored resistances given. The specifier must ensure that the joist and header capacities are capable of withstanding these loads.

Installation:


- Use all specified fasteners
- Nails: 16d = 0.162" dia. x 3½" long common wire
- Double shear nails must be driven at an angle through the joist or truss into the header to achieve the table loads
- Not designed for welded or nailer applications

Options:


- See current catalogue for options

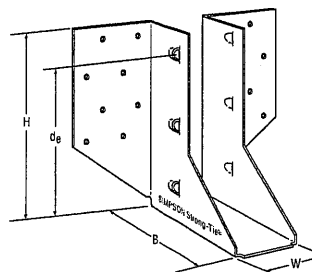


LJS26DS

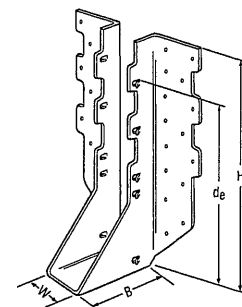


HUS210
(HUS26, HUS28, similar)

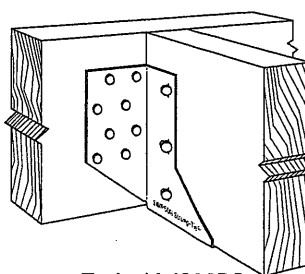

Typical LJS26DS
Installation

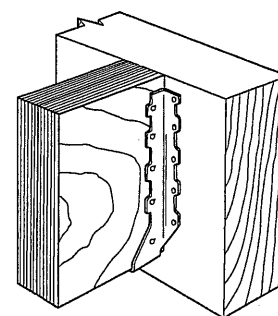


Typical HUS
Installation

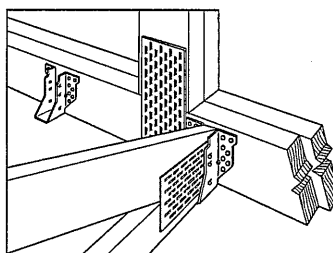

Typical HUS Installation
(Truss Designer to provide fastener
quantity for connecting multiple
members together)


Model No.	Ga.	Dimensions (in.)				Fasteners		Factored Resistance (lb.)			
		W	H	B	d _e ¹	Face	Joist	D.Fir-L		S-P-F	
								Uplift (K ₀ =1.15)	Normal (K ₀ =1.00)	Uplift (K ₀ =1.15)	Normal (K ₀ =1.00)
LJS26DS	18	1⅞	5	3½	4⅝	(16) 16d	(6) 16d	2055	4265	1460	4115
HUS26	16	1⅞	5⅝	3	3⅞	(14) 16d	(6) 16d	2705	4940	2065	3875
HUS28	16	1⅞	7⅝	3	6⅝	(22) 16d	(8) 16d	3605	5365	2675	4345
HUS210	16	1⅞	9⅝	3	7⅞	(30) 16d	(10) 16d	4505	5795	4010	4740
HUS1.81/10	16	1⅞	9	3	8	(30) 16d	(10) 16d	4505	6450	4010	5200

1. d_e is the distance from the seat of the hanger to the highest joist nail.




Dome Double Shear Nailing prevents tabs breaking off (available on some models).

U.S. Patent 5,603,580



Double Shear Nailing Side View. Do not bend tab back.



Double Shear Nailing Top View.




LIMIT
STATES
DESIGN

This technical bulletin is effective until June 30, 2019, and reflects information available as of March 1, 2017. This information is updated periodically and should not be relied upon after June 30, 2019. Contact Simpson Strong-Tie for current information and limited warranty or see strongtie.com

© 2017 Simpson Strong-Tie Company Inc.

T-SPECHUS17 3/17 exp. 6/19

(800) 999-5099
strongtie.com

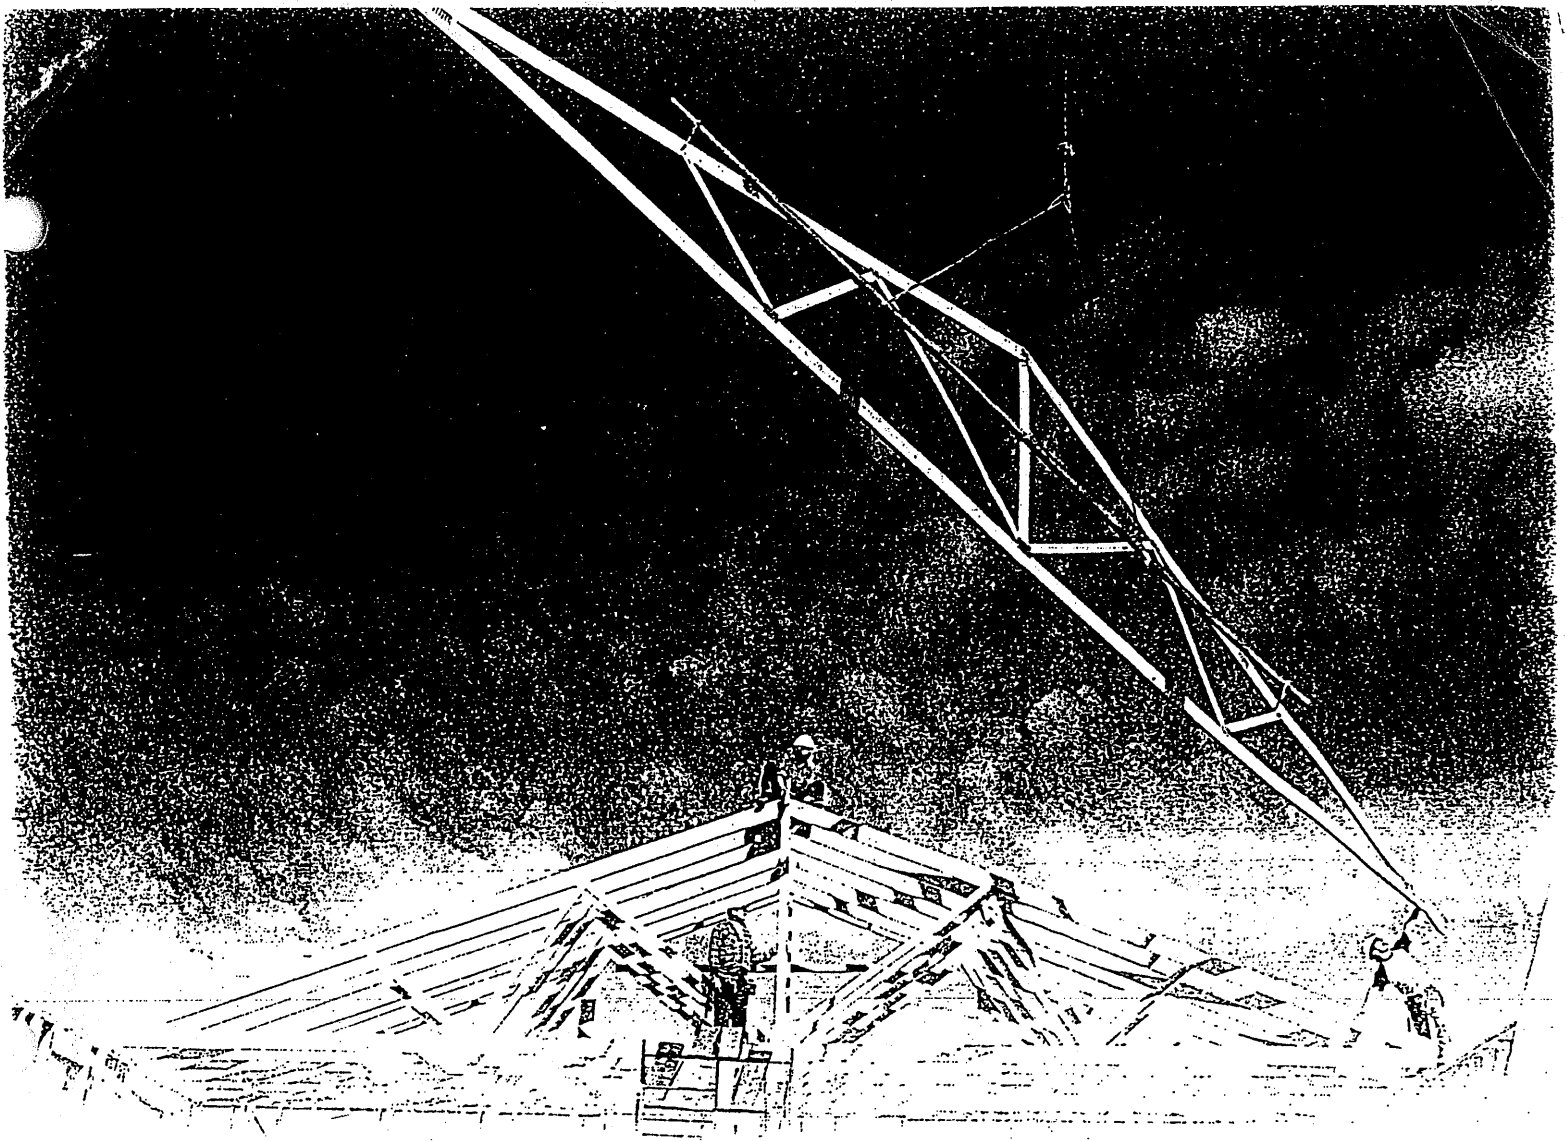


Wood Truss Installation

**A Guide to proper handling, erecting and bracing
metal plate connected wood trusses**

Table of Content

Warning.....	4
1 Unloading & Lifting.....	5
2 Job Site Handling.....	5
3 Hoisting.....	6
4 Beginning the Erection Process.....	7
5 Erection Tolerance.....	8
6 Bracing.....	8
7 Bracing Requirements for 3 Planes of Roof.....	9
8 Stacking Materials.....	10
Caution Notes.....	11

Warning



General

Familiarity with the Construction Design Documents, the Truss Design Drawings, and Truss Placement Plans (if required by the Construction Design Documents) is required to properly erect, brace, and connect the trusses to the building system.

All of the care and quality involved in the design and manufacture of wood trusses can be jeopardized if the trusses are not properly handled, erected, and braced.

The consequences of improper handling, erecting, and bracing may be a collapse of the structure, which at best is a substantial loss of time and materials, and at worst is a loss of life. The majority of truss accidents occur during truss installation and not as a result of improper design or manufacture.

Prior to truss erection, the builder/erector shall meet with the erection crew for a safety and planning meeting, making sure each crew member understands his or her roles and responsibilities during the erection process.

Temporary Erection Bracing

Trusses are not marked in any way to identify the frequency, or location of temporary erection bracing.

All temporary bracing shall comply with the latest edition of *Commentary and Recommendations for Handling, Installing & Bracing Metal Plate Connected Wood Trusses* (HIB), published by the Truss Plate Institute, and/or as specified in the Construction Design Documents prepared by the building designer.

Permanent Truss Bracing

Permanent bracing for the roof or floor trusses is the responsibility of the building designer and should be shown on the Construction Design Documents. Permanent bracing locations for individual compression members of a wood truss are shown on the Truss Design Drawings, and shall be installed by the building or erection contractor. This bracing is needed for the proper performance of individual trusses within the roof or floor system. The design and connection of the bracing to the truss and then to the overall building system is the responsibility of the building designer, and is in addition to the permanent bracing plan, which is also specified by the building designer.

Special Design Requirements


Special design requirements, such as wind bracing, portal bracing, seismic bracing, diaphragms, shear walls, or other load transfer elements and their connections to wood trusses must be considered separately by the building designer, who shall determine size, location, and method of connections for all bracing as needed to resist these forces.

1

Unloading & Lifting

Never handle trusses flat

Beginning with the unloading process, and throughout all phases of construction, care must be taken to avoid lateral bending of trusses, which can cause damage to the lumber and metal connector plates at the joints.


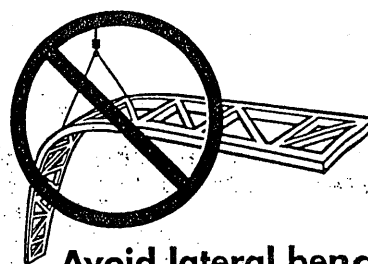


Avoid lateral bending

- Use special care in windy weather.
- If using a crane within 10 feet of an electric line, contact the local power company.
- If using a crane within 5 miles of an airport, contact the airport 30 days prior to erection to learn about any safety regulations that must be followed.


2

Job Site Handling

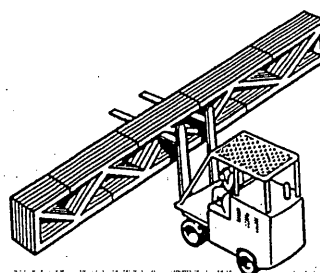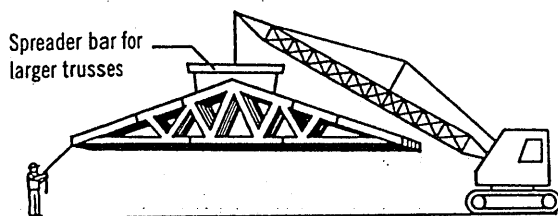


All trusses should be picked up at the top chords in a vertical position only

Proper banding and smooth ground allow for unloading of trusses without damage. This should be done as close to the building site as possible to minimize handling. Do not break banding until installation begins. Hand erection of trusses is allowed, provided excessive lateral bending is prevented.

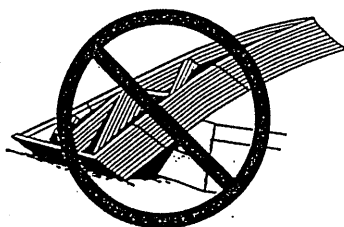


Do not store unbraced bundles upright

If trusses are stored vertically they shall be braced in a manner that will prevent tipping or topping. Generally cutting of the banding is done just prior to installation.

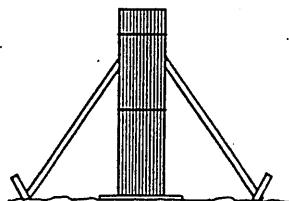

Do not store on uneven ground

If trusses are stored horizontally, blocking should be used on eight to ten foot centers, or as required, to minimize lateral bending and moisture gain.

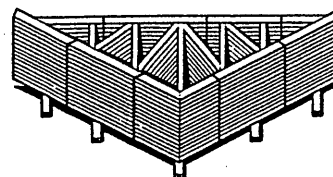


Care should be exercised when removing banding to avoid damaging trusses.


During long term storage, trusses shall be protected from the environment in a manner that provides for adequate ventilation of the trusses. If tarpaulins or other material is used, the ends shall be left open for ventilation. Plastic is not recommended, since it can trap moisture.

3 Hoisting


All trusses that are erected one at a time shall be held safely in position by the erection equipment until such time as all necessary bracing has been installed and the ends of the trusses are securely fastened to the building.

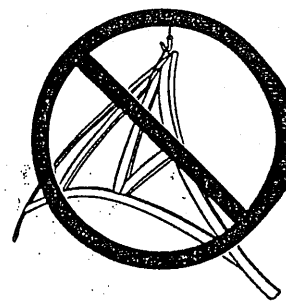


Avoid lateral bending

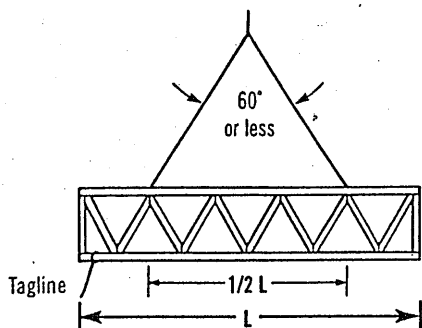


$L \leq 30'$

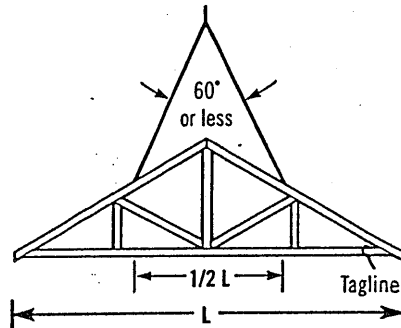


Truss sling is acceptable where these criteria are met.

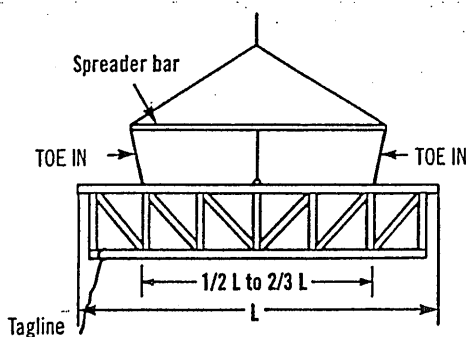


$30' < L \leq 60'$

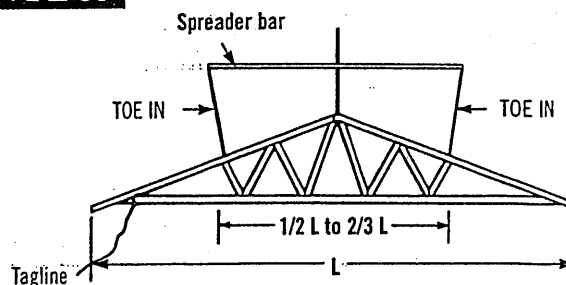

Use spreader bar in all other cases. It should be noted that the lines from the ends of the spreader bar "TOE IN"; if these lines should "TOE OUT" the truss may fold in half.

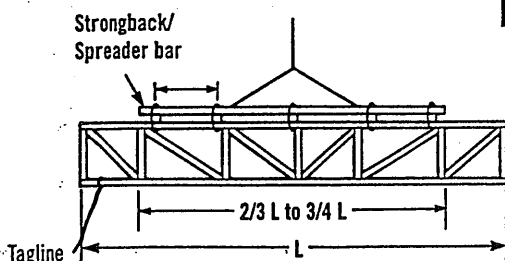

$L > 60'$

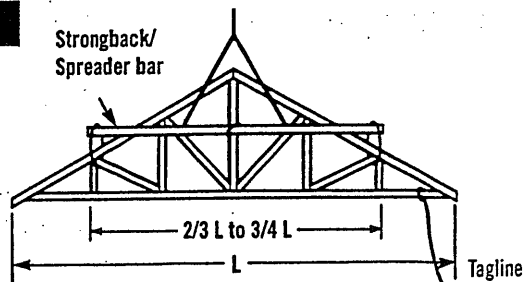


For lifting trusses with spans in excess of 60 feet, it is recommended that a strongback/spreader bar be used as illustrated. The strongback/spreader bar should be attached to the top chord and web members at intervals of approximately 10 feet. Further, the strongback/spreader bar should be at or above the mid-height of the truss to prevent overturning. The strongback/spreader bar can be of any material with sufficient strength to safely carry the weight of the truss and sufficient rigidity to adequately resist bending of the truss.

4 Beginning the Erection Process

It is important for the builder or erection contractor to provide substantial bracing for the first truss erected. The two or more trusses making up the rest of the first set are tied to and rely upon the first truss for stability. Likewise, after this first set of trusses is adequately cross-braced, the remaining trusses installed rely upon this first set for stability. Thus, the performance of the truss bracing system depends to a great extent on how well the first group of trusses is braced.

Ground Brace - Exterior




One satisfactory method ties the first unit of trusses off to a series of braces that are attached to a stake driven into the ground and securely anchored. The ground brace itself should be supported as shown below or it is apt to buckle. Additional ground braces in the opposite direction, inside the building, are also recommended.

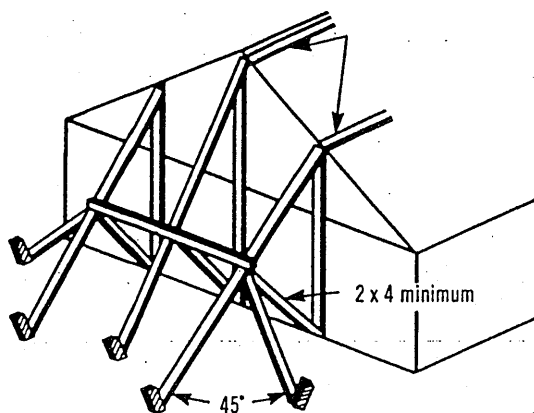

Note: Locate ground braces for first truss directly in line with all rows of top chord continuous lateral bracing (either temporary or permanent).

Ground Brace - Interior

Another satisfactory method where height of building or ground conditions prohibit bracing from the exterior is to tie the first truss rigidly in place from the interior at the floor level, provided the floor is substantially completed and capable of supporting the ground bracing forces. Securely fasten the first truss to the middle of the building. Brace the bracing similar to exterior ground bracing shown at left. Set trusses from the middle toward the end of the building. Properly cross-brace the first set of trusses before removing floor braces and setting remaining trusses.

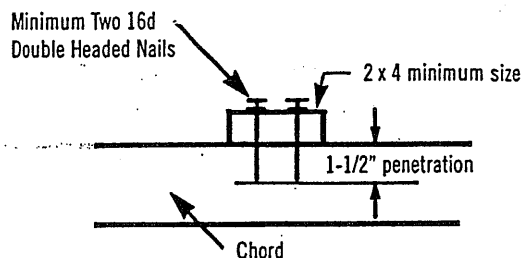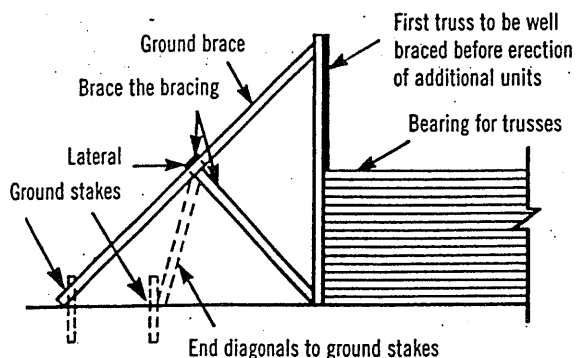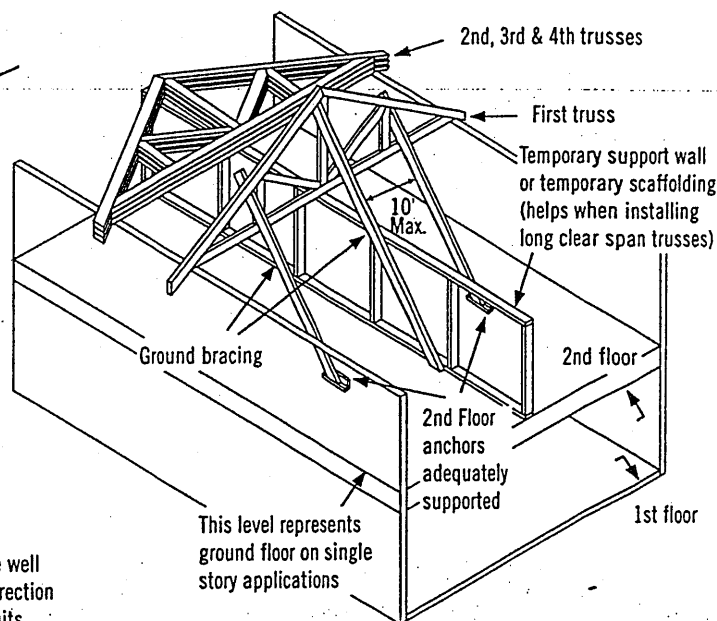


Inadequate size of bracing material or inadequate fastening is a major cause of erection dominoing.


5 Erection Tolerance

Complying with erection tolerances is critical to achieving an acceptable roof or floor line, and to accomplishing effective bracing. Setting trusses within tolerance the first time will prevent the need for the hazardous practice of respacing or adjusting trusses when roof sheathing or roof purlins are installed. Trusses leaning or bowing can cause nails to miss the top chords when sheathing is applied, and create cumulative stresses on the bracing, which is a frequent cause of dominoing.


When sheathing, make sure nails are driven into the top chord of the trusses.

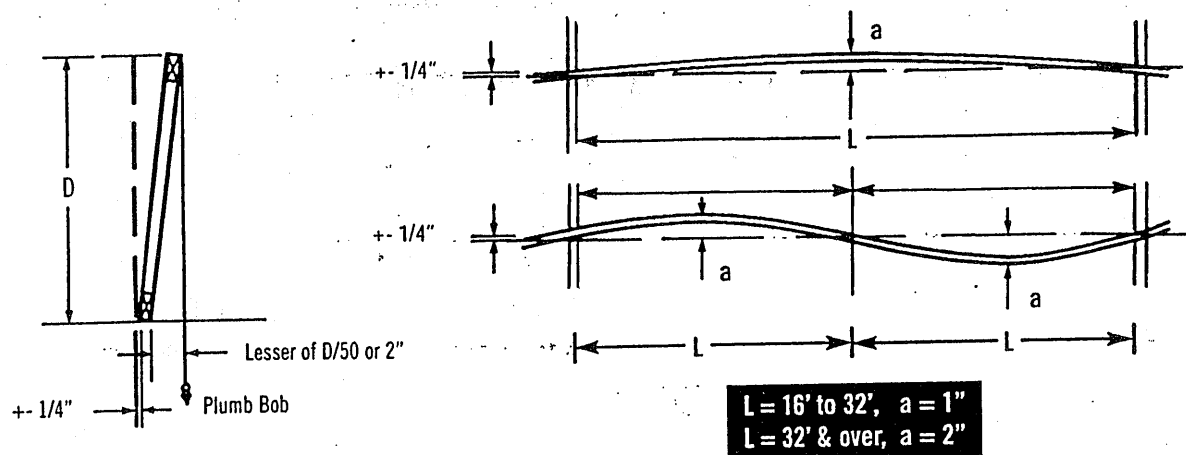

6 Bracing

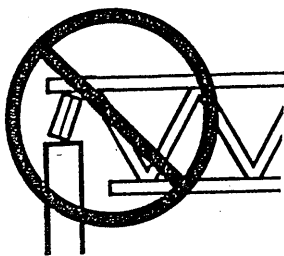


Do not install trusses on temporarily connected supports

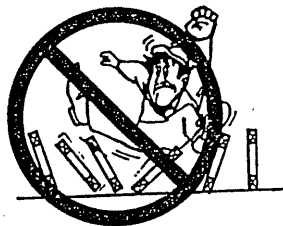

Do not walk on unbraced trusses



Do not walk on trusses or gable ends lying flat

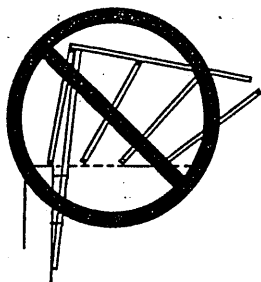


Nails in withdrawal (parallel to force)

All anchors, hangers, tie-downs, seats, bearing ledgers, etc., that are part of the supporting structure shall be accurately and properly placed and permanently attached before truss installation begins. No trusses shall ever be installed on anchors or ties that have temporary connections to the supporting structure.

Nailing scabs to the end of the building to brace the first truss is not recommended.

All nailing of bracing should be done so that nails are driven perpendicular to the direction of force, as shown at right.

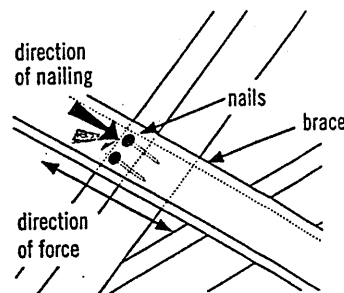


Well nailed (perpendicular to force)

7 Bracing Requirements for 3 Planes of Roof

Temporary erection bracing must be applied to three planes of the roof system to ensure stability: Plane 1) Top Chord (sheathing), Plane 2) Bottom Chord (ceiling plane), and Plane 3) Web Member plane or vertical plane perpendicular to trusses.

1) Top Chord Plane

Most important to the builder or erection contractor is bracing in the plane of the top chord. Truss top chords are susceptible to lateral buckling before they are braced or sheathed.

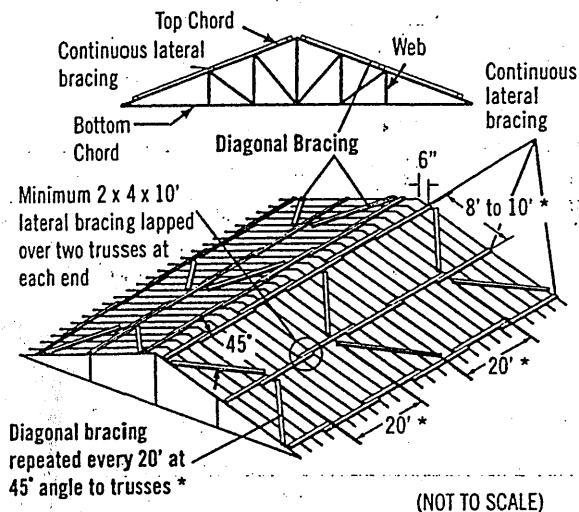


Exact spacing between trusses should be maintained as bracing is installed to avoid the hazardous practice of removing bracing to adjust spacing. This act of "adjusting spacing" can cause trusses to topple if connections are removed at the wrong time.

3) Web Member Plane

"X" bracing, as shown, is critical in preventing trusses from leaning or dominoing. Repeat as shown to create a succession of rigid units.


X-bracing should be installed on vertical web members wherever possible, at or near lateral bracing. Plywood or OSB may be substituted for X-bracing.

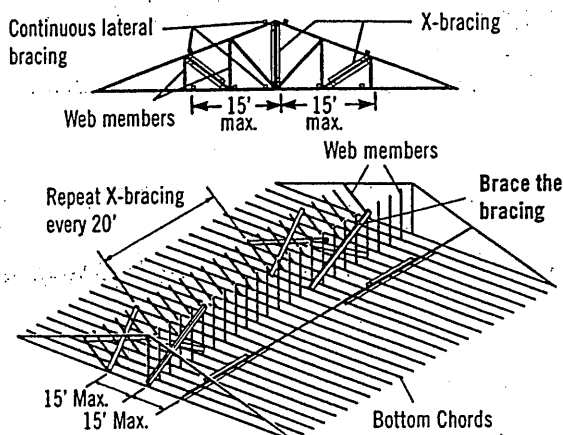

Note: Top chords and some web members are not shown, in order to make drawings more readable.


2) Bottom Chord Plane

In order to hold proper spacing on the bottom chord, temporary bracing is recommended on the top of the bottom chord.

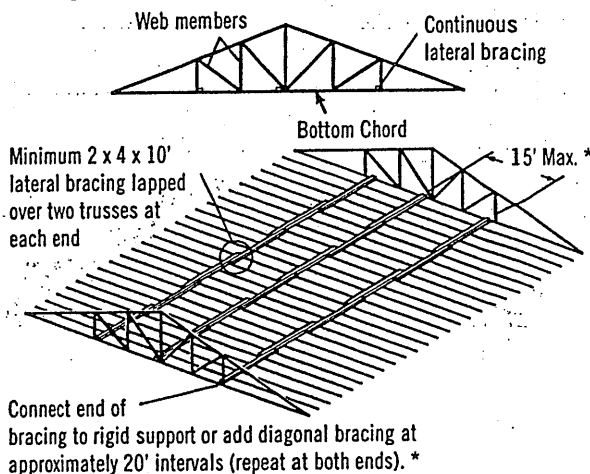


* Long spans, heavy loads or other spacing configurations may require closer spacing between lateral bracing and closer intervals between diagonals. Consult the building designer or HIB and DSB (Recommended Design Specification for Temporary Bracing of Metal-Plate Connected Wood Trusses) for details.

Diagonal or cross-bracing is very important!

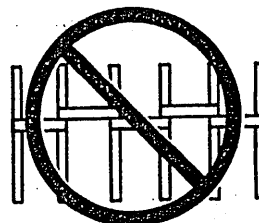

Do not use short blocks to brace individual trusses without a specific bracing plan detailing their use


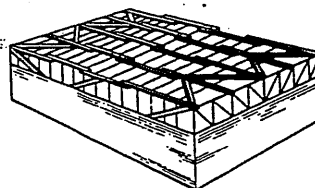


Bracing requirements using the same principles apply to parallel chord trusses

8 Stacking Materials

Do not proceed with building completion until all bracing is securely and properly in place


Never stack materials on unbraced or inadequately braced trusses

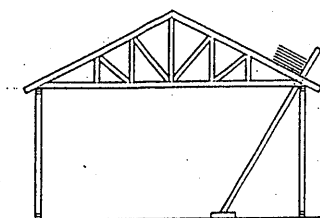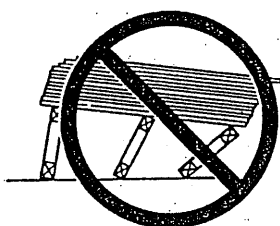


Platform must be rigidly braced

Proper distribution of construction materials is a must during construction.



Never stack materials near a peak

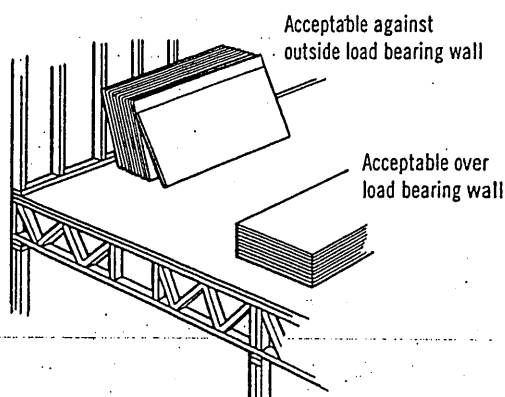

Never stack materials on the cantilever of a truss

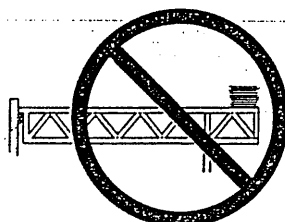


Always stack materials over two or more trusses.

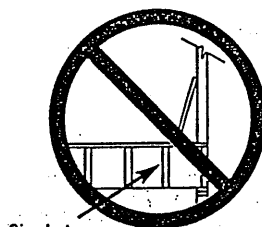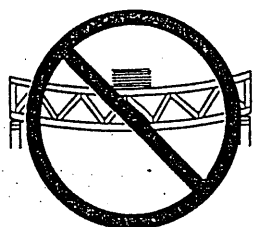



Single truss

Never overload small groups or single trusses. Position load over as many trusses as possible.

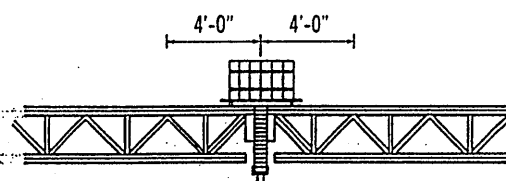

Roofing and mechanical contractors are cautioned to stack materials only along outside supporting members or directly over inside supporting members. Trusses are not designed for dynamic loads (i.e., moving vehicles). Extreme care should be taken when loading and stacking construction materials (rolled roofing, mechanical equipment, etc.) on the roof or floor system.

Never cut any structural member of a truss.

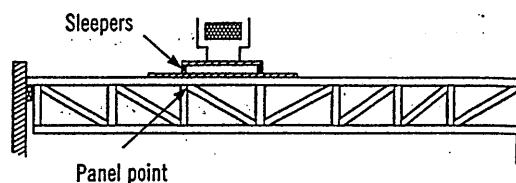

Sleepers

Panel point

Sleepers for mechanical equipment should be located at panel points (joints) or over main supporting members, and only on trusses that have been designed for such loads.

Caution Notes

Errors in building lines and/or dimensions, or errors by others shall be corrected by the contractor or responsible construction trade subcontractor or supplier before erection of trusses begins.

Cutting of nonstructural overhangs is considered a part of normal erection and shall be done by the builder or erection contractor.

Any field modification that involves the cutting, drilling, or relocation of any structural truss member or connector plate shall not be done without the approval of the truss manufacturer or a licensed design professional.

The methods and procedures outlined are intended to ensure that the overall construction techniques employed will put floor and roof trusses safely in place in a completed structure. These recommendations for bracing wood trusses originate from the collective experience of leading technical personnel in the wood truss industry, but must, due to the nature of responsibilities involved, be presented only as a guide for use by a qualified building designer, builder, or erection contractor. Thus, the Wood Truss Council of America expressly disclaims any responsibility for damages arising from the use, application, or reliance on the recommendations and information contained herein.

[Selected text and figures referenced or reproduced from HIB and DSB by permission of the Truss Plate Institute, Madison, WI.]

THE CANADIAN WOOD TRUSS ASSOCIATION



L'ASSOCIATION CANADIENNE DES FABRICANTS DE FERMES DE BOIS

1400 Blair Place, Suite 210, Ottawa, ON K1J 9B8
Tel.: 613-747-5544 Fax: 613-747-6264



Wood Truss Council of America

One WTCA Center
6300 Enterprise Lane, Madison, WI 53719-1140
Tel.: 608-274-4849 Fax: 608-274-3329
wtca@woodtruss.com www.woodtruss.com