

TM-8-3
APRIL 8 2025



HOME APPLIANCES

LG COOKING



WCEP6427F

1.7 / 4.7 cu. ft. Smart Combination Wall Oven with True Convection, InstaView®, Air Fry, Steam Sous Vide

KEY FEATURES

- 6.4 cu. ft. Large Capacity
- ThinQ® Technology with ThinQ Care
- True Convection Technology with Air Fry
- TurboCook™ Speed Oven (Upper)
- Steam Sous Vide and Steam Cooking (Lower)
- EasyClean® and Self Clean
- Backlit SmoothTouch® Glass Controls
- InstaView® and WideView™ Window

AVAILABLE COLORS



PRINTPROOF® STAINLESS STEEL

SMART APPLIANCE

ThinQ Care

Proactive Smart Alerts to Keep Your Appliances Running Smoothly

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.



PRODUCT FEATURES

SUMMARY		LOWER OVEN FEATURES		ACCESSORIES	
Type	Combination Wall Oven	Capacity (cu. ft.)	4.7	Glass Tray (Upper Oven)	Yes
Total Oven Capacity (cu. ft.)	6.4 (1.7 Upper / 4.7 Lower)	EasyClean®	Yes (10mins)	Metal Tray (Upper Oven)	Yes
Available Colors	PrintProof® Stainless Steel	Self Clean	Yes (3, 4, 5 hours)	Rack (Upper Oven)	Yes
PrintProof® Finish	Yes	Convection Type	True Convection	Temperature probe	Yes
UPPER OVEN FEATURES		Convection Conversion	Yes	Heavy Duty Rack	Yes (2)
Capacity (cu. ft.)	1.7	Convection Element Power	2000W	Air Fry Tray	Yes
Interior	Stainless Steel	Bake Element Power	2500W	POWER/RATINGS	
Speed Oven	Yes	Variable Warm	Yes (High, Med, Low)	Amp at 240V	40A
Convection Technology	Yes	Broil Element Power	2,500W inner / 1,500W outer	kW at 240V	7.8kW
Microwave Power Output	950W	Variable Broil	Yes (Full, Center / Low, Med, High)	Required Power Supply	120 / 240 VAC, 120 / 208 VAC
Convection Element Power	1500W	Number of Rack Position	5	DIMENSIONS & WEIGHT	
Broil Element Power	1200W	12 hrs. Auto Shut-off	Yes	Product Dimensions (WxHxD)	29 3/4" x 43 13/16" x 23 3/8"
Bake Element Power	375W	InstaView®	Yes	Standard Cut-out Dimensions (WxHxD)	"Min. 28 1/2"" x 43 7/16"" x 24"" Max. 28 5/8"" x 43 1/2"" x 24""
Air Fry	Yes	Air Fry	Yes	Flush Cut-out Dimensions (WxHxD)	30" x 44" x 25"
Dehydrate	Yes	Steam Assist	Yes	Shipping Dimensions (WxHxD)	33" x 50" x 30"
Defrost Presets	Meat, Poultry, Fish, Bread	Oven Modes	Convection Bake / Convection Roast / Bake / Broil / Steam Bake / Steam Roast / Steam Sous-Vide / Air Fry / Frozen Meal / Warm / Proof / Favorite	Product Weight (lbs.)	200 lbs.
Oven Modes	Auto Cook, Broil, Convection Bake, Defrost, Melt, Microwave, Popcorn, Proof, Sensor Cook, Soften, Speed Cook, Warm, Air Fry, Dehydrate		Shipping Weight (lbs.)	234 lbs.	
Sensor Cook	Beverage, Casserole, Chicken, Pasta, Pizza, Dinner Plate, Rice, Soup, Vegetable	Maintenance Modes	EasyClean® / Self Clean / Descaling / Drying	LIMITED WARRANTY	
	Bacon, Bagels, Baked Potatoe, Brownie, Canned Vegetable, Cod fillets, Corn Dog, Fresh Vegetable, Frozen Chicken Wings, Frozen Fries, Frozen Chicken Nuggets , Frozen Pizza, Frozen Soft Pretzels, Frozen Vegetable, Garlic Bread, Hamburger, Lamb chops, Meat Loaf, Nachos, Oatmeal, Pork Chops, Quinoa, Ribeye Steak, Rice, Salmon Steak, Sausage, Sirloin Steak, Tenderloin	CONTROL		Parts & Labor	1 Year
Auto Cook	Butter, Cream Cheese, Frosting, Ice Cream	Oven Control Type	Backlit SmoothTouch™ Glass Controls	UPC CODES	
	Butter, Caramel, Cheese, Chocolate, Marshmallow	Display	LED Display	WCEP6427F (PrintProof® Stainless Steel)	048231344326
Soften		Language	English		
		Clock	12 hr or 24 hr		
Melt		Temperature Unit of Measure	Fahrenheit / Celcius		
		Certified Sabbath Mode	Yes		
		SMART FEATURES			
		ThinQ® (Wi-Fi Enabled)	Yes		
		Check & Control	Yes		
		Voice Control	Yes (Google, Alexa)		
		Smart Recipe (3rd Party Recipe App)	Sidechef		
		ThinQ Care	Yes		
		SmartDiagnosis™	Yes		


TKA-8-3
APRIL 8 2025

NA36N7755TS

36" Gas Cooktop

Installing Your Cooktop

Can be installed over a single oven.


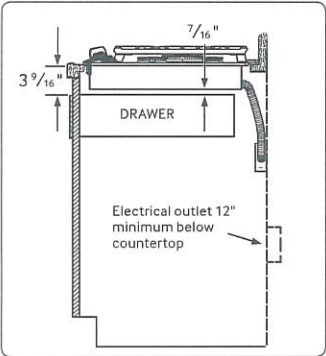


All horizontal clearances must be maintained for a minimum of 18" above the cooking surface.

Allow 7/16" minimum vertical clearance from the cooktop bottom (or 39/16") minimum depth from the countertop to any combustible surfaces, including the upper edge of a drawer installed below the cooktop.

See built-in oven installation for complete installation instructions.

Maintain the following minimum clearance dimensions.

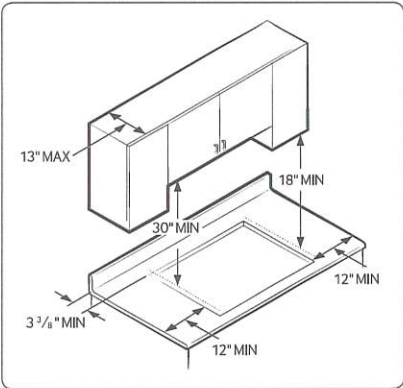

Total Power (BTU)

- 59K

Power Source

- 120V/60Hz

Gas Cooktop (BTU)

- Right Front: 13K
- Left Front: 9.5K
- Right Rear: 5K Simmer
- Left Rear: 9.5K
- Center: 22K (Dual)


Warranty

One (1) Year All Parts and Labour


Dimensions

Cooktop Dimensions

Refer to installation manual for more details.

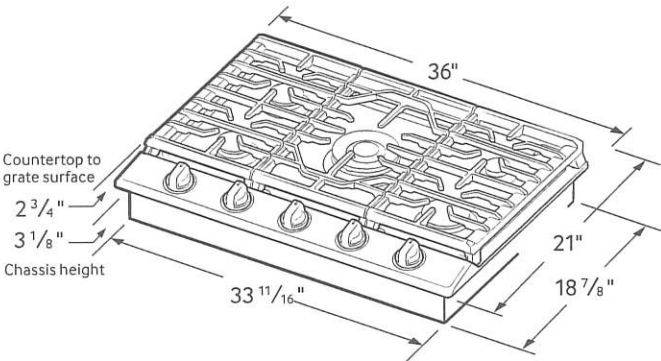

Cut-out Dimensions of Countertop

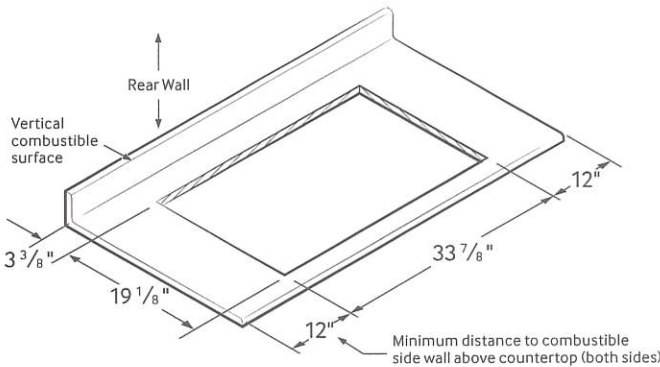

COLOUR	MODEL #	UPC CODE
Stainless Steel	NA36N7755TS	887276183572
Black Stainless Steel	NA36N7755TG	887276183503

PLEASE VISIT [SAMSUNG.COM](https://www.samsung.com) FOR OUR LATEST UPDATES.

Actual colour may vary. Design, specifications, and colour availability are subject to change without notice. Non-metric weights and measurements are approximate. © 2016 Samsung Electronics Canada Inc. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co., Ltd., used with permission.

SAMSUNG

TA-8-3
APRIL 8 2025



HOME APPLIANCES

LG REFRIGERATION

LRFXC2606_

26 cu. ft. Counter Depth MAX Refrigerator

- Industry's Largest 26 cu. ft. Counter Depth Capacity
- Dual Ice maker – Cubed and Crush
- Cool Guard
- Door Cooling+
- Flat Door Design with Handle
- Smart Inverter

AVAILABLE COLORS

- PRINTPROOF™ STAINLESS STEEL
- PRINTPROOF™ BLACK STAINLESS STEEL



Proactive Smart Alerts to Keep Your Appliances Running Smoothly

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

ThinQ Care

CAPACITY		REFRIGERATOR		DIMENSIONS/CLEARANCES/WEIGHTS	
Refrigerator (cu. ft.)	16.9 cu. ft.	No. of Shelves	4 split (4 Fixed)	Product (W x H x D)	35 3/4" x 70 1/4" x 31 5/8"
Freezer (cu. ft.)	8.6 cu. ft.	Shelf Construction	Spill Protector/Tempered Glass	Width	35 3/4"
Total Capacity (cu. ft.)	25.5 cu. ft.	Shelf Trim	White Décor	Height (to Top of Hinge)	70 1/4"
ENERGY		No. of Crisper Bins	2	Depth (with Handles)	31 5/8"
ENERGY STAR® Qualified	Yes	Pantry (Glide N Serve)	Yes (Normal)	Width (Door Open 90° without Handle)	40"
Energy Consumption (kWh/Year)	699	Cool Guard	Yes	Width (Door Open 90° with Handle)	44 7/8"
WATER & ICE SYSTEM		Fresh Air Filter	Yes	Width (Door Fully Open without Handle)	56 3/4"
Ice & Water Dispenser	Yes	Light	Yes	Height (to Top of Case)	68 7/8"
In-door Ice maker	Yes (1)	REFRIGERATOR DOOR		Depth without Door	24 3/4"
In-door Ice maker Ice Type	Cubed / Crushed	No. of Bins	4 (Left Door), 4 (Right Door)	Depth without Handles	29 1/8"
In-door Ice maker Daily Production	3.0 / 3.3 (IcePlus) lbs.	Door Shape	Flat	Depth (to Hinge Cover)	18 1/4"
In-door Ice maker Storage Capacity	3.0 lbs.	Handle Type	Bar	Depth (Total with Door Open)	43 5/8"
No. Freezer Ice maker	Yes (1)	FREEZER		Depth (Draw Open Fully without Handle)	48 7/8"
Freezer Ice maker Ice Type	Cubed	Door Type	Pull Drawer	Installation Clearance	Sides 1/8", Top 1", Back 2"
Freezer Ice maker Daily Production	2.5 / 2.7 (IcePlus) lbs.	Handle Type	Smart Pull™ Handle	Carton Dimensions (WxHxD)	38" x 72" x 31"
Freezer Ice maker Storage Capacity	4.0 lbs.	Drawers / Shelves	2-Tier Organization	Weight (Unit/Carton)	291 lbs. / 313 lbs.
Ice Plus	Yes	Freezer Light	Upper LED Lighting	LIMITED WARRANTY	
Filtration System	1 stage		Lower No	Parts & Labor	1 Year
Filter	LT1000P	SMART TECHNOLOGY		Sealed System (Parts & Labor)	5 Years
COOLING		Smart Diagnosis	Yes	Compressor (Parts & Labor)	5 Years
Compressor Type	Smart Inverter	Wi-Fi	Yes	Linear Compressor (Parts & Labor)	6 - 10 Years
Evaporator	Yes (1)	ThinQ®	Yes	UPC CODES	
Multi Air Flow Cooling	Yes	ThinQ® Care	Yes	LRFXC2606S (PrintProof™ Stainless Steel)	195174057339
Temperature Sensors	2	MATERIALS AND FINISHES		LRFXC2606D (PrintProof™ Black Stainless Steel)	TBD
Refrigerant	Low GWP, Zero ODP and More	Hidden Hinges	Yes		
	Energy Efficient Refrigerant (R600a / 57g / 2.01oz)	Surface	Smooth		
CONVENIENCE		Handles	Matching Commercial Handles		
Display Type	Smooth Touch Control / White LED	All Available Colors	PrintProof™ Stainless Steel, PrintProof™ Black Stainless Steel		
Temperature Controls	Electronic/Digital	Insulation	Low GWP and Zero ODP Blowing Agent		
Door Alarm	Yes				
Child Lock	Yes				
Auto Closing Door Hinge	Yes				
Decibel™ Quiet Operation	Yes				
Sabbath Mode	Yes				
ADA Compliant	Yes				

TM-8-3
APRIL 8 2025

55




24" Dishwasher

DETAILED PLANNING DIMENSIONS GUIDE

Applies to all model numbers starting with;
KDFE104K, KDFE204K, KDTE204K, KDTE204LPA, KDFM404K,
KDTM404K, KDPM604K, KDTM604K, KDPM704K, KDTM704K,
KDTM704LPA, KDPM804K, KDTM804K

PRODUCT DIMENSIONS

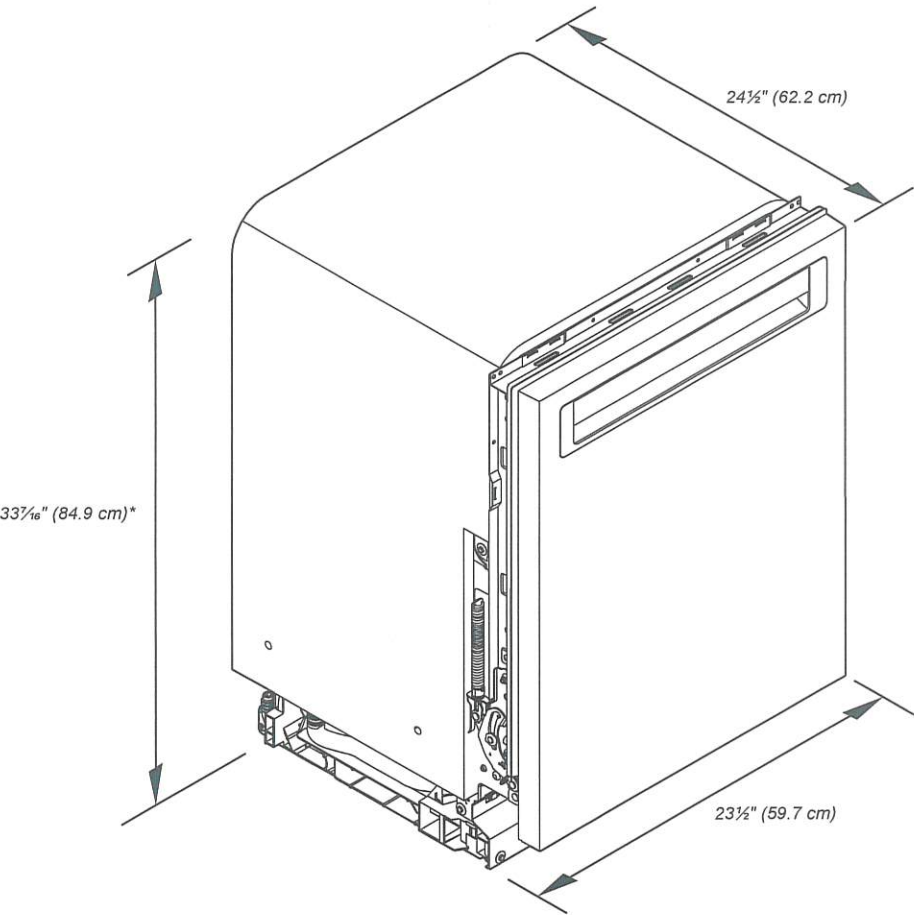

*Dishwasher can be raised 1 1/16" (3.7 cm) with feet fully extended.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

TM-8-3 45
APRIL 8 2025

KitchenAid®

24" Dishwasher
DETAILED PLANNING DIMENSIONS GUIDE

PRODUCT DIMENSIONS (CONTD.)

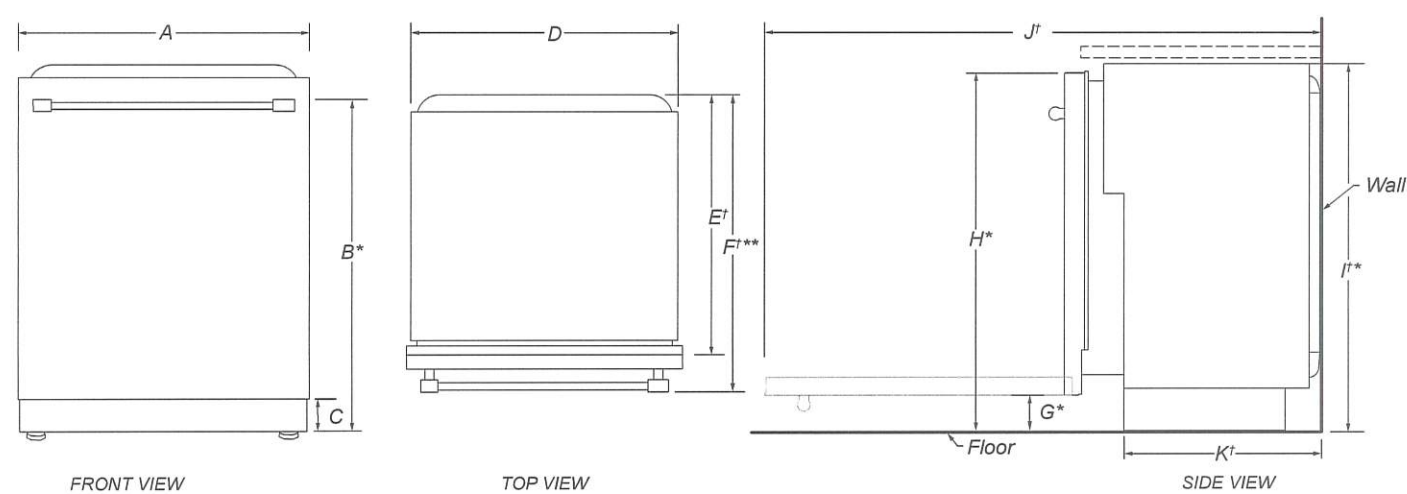

	DESCRIPTION	DIMENSIONS
A	Width of door	23½" (59.7 cm)
B*	Height to top of handle	30⅜" (78.3 cm)
C	Height of adjustable toe kick	3⅝" (8.4 cm) - min. 4⅞" (11.8 cm) - max.
D	Width of recessed dishwasher	22⅝" (57.4 cm)
E†	Depth without door	22⅝" (57.5 cm)
F†**	Depth with Towel Bar Handle	26⅞" (68.3 cm)
	Depth with Pocket Handle	24½" (62.6 cm)
	Depth of Panel-Ready Models	24" (61.0 cm)
G*	Height to bottom of door (min.)	3⅝" (8.4 cm)
H*	Height to top of door (min.)	33⅞" (84.9 cm)
I†*	Height of recessed dishwasher (min.)	33⅝" (85.4 cm)
J†	Depth with door fully open (min.)	50⅜" (127.4 cm)
K†	Depth with toe kick (min.)	20⅜" (52.9 cm)

†Insulation blanket thickness adds up to 11/16" (1.8 cm) but can crush up to 1/8" (0.3 cm).

*Dishwasher can be raised 1⅞" (3.7 cm) with feet fully extended.

**For panel-ready models, dishwasher depth is 24" (61.0 cm), not including the 3/4" (1.9 cm) custom door panel.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

TM-8-3 55
APRIL 8 2025

KitchenAid® **24" Dishwasher**
DETAILED PLANNING DIMENSIONS GUIDE

OPENING/CLEARANCE DIMENSIONS

IMPORTANT: Check that all surfaces have no protrusions that would prohibit dishwasher installation.

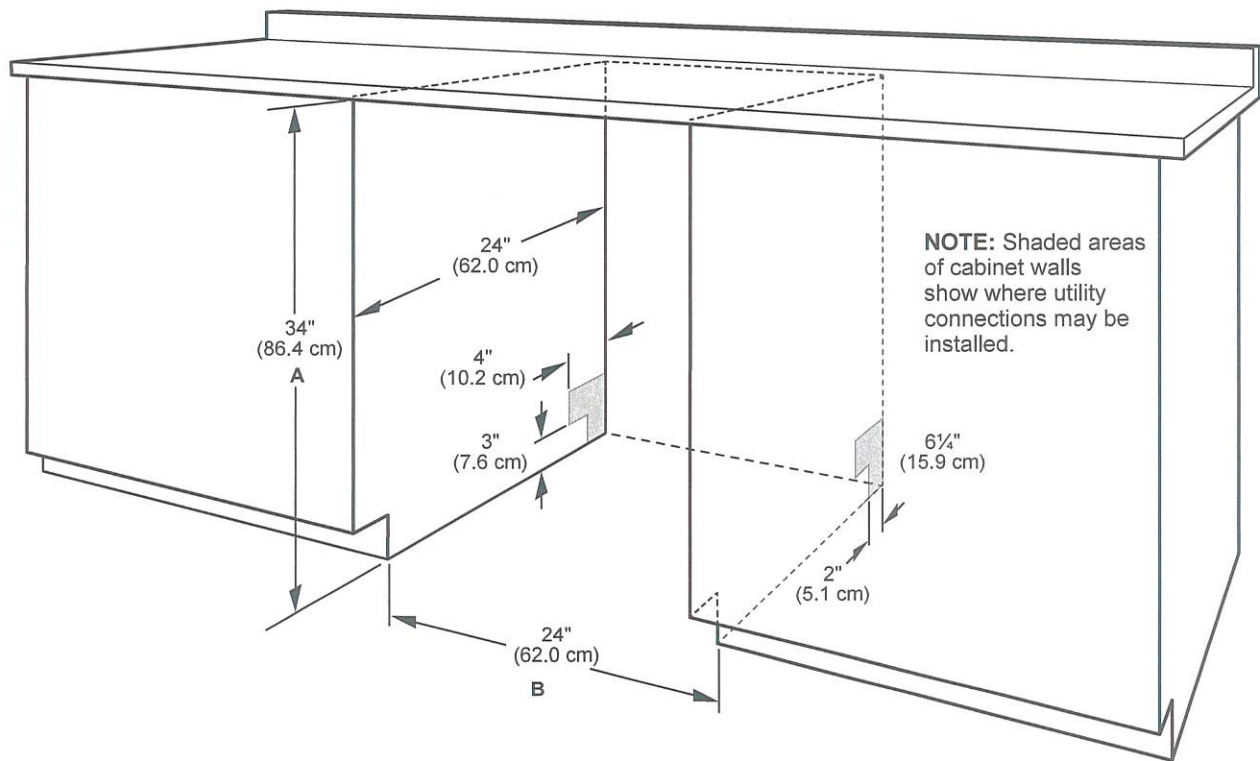

- A. Measured from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the wheels and perforated area of insulation (blanket) on dishwasher.
 - B. Minimum, measured from narrowest point of opening.
- NOTE:** Corner locations require a 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

TM-8-3
APRIL 8 2025


55

DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/ IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

NOTE: Do not connect multiple drain hoses together.

- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

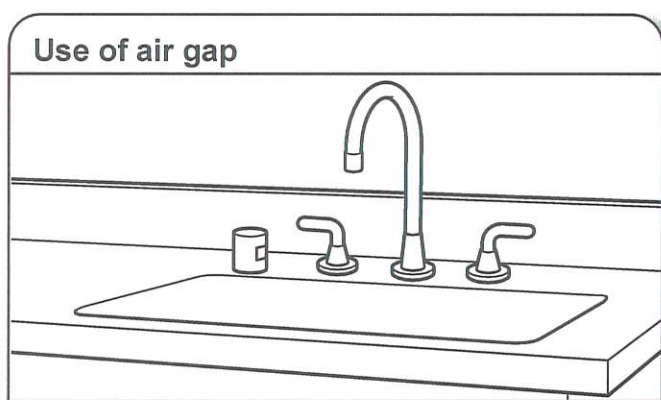

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
 - A hot water line with 20 psi to 120 psi (138 kPa to 862 kPa) water pressure can be verified by a licensed plumber.
 - 120°F (49°C) water at dishwasher.
 - 3/8" (0.95 cm) O.D. copper tubing with compression fitting or flexible braided water supply line.
- NOTE:** 1/2" (1.3 cm) minimum plastic tubing is not recommended.
- A 90° elbow with 3/4" (0.95 cm) hose connection with rubber washer.
 - Do not solder within 6" (15.2 cm) of the water inlet valve.
 - If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

⚠ WARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02169-7471

You Must Have:

- 120 V, 60 Hz, AC only, 15 A or 20 A, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker.

Circuit Requirements:

- The dishwasher may be installed on the same circuit as a garbage disposal providing that the branch circuit cannot exceed rated circuit load and must comply with all governing codes and regulations such as but not limited to National Electrical Code, ANSI/NFPA 70 - latest edition.
- No electrical connections other than the dishwasher power and ground connections can be made inside of the dishwasher terminal box.

If connecting dishwasher with a power supply cord:

- Use UL Listed power cord kit marked for use with dishwasher.



- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



If connecting dishwasher with direct wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief.



TRN-8-3
APRIL 8 2025


HOME APPLIANCES

LG LAUNDRY

DLEX4200_ / DLGX4201_
7.4 cu.ft. Front Load Dryer with TurboSteam™ and
Built-In Intelligence

- 7.4 cu. ft. Ultra Large Capacity
- TurboSteam™ Technology
- AI Fabric Sensor/ Smart Pairing™
- LG ThinQ® Technology / Proactive Customer Care
- Tempered Glass Door
- FlowSense™ Duct Clogging and Lint Filter Indicators
- ENERGY STAR® Certified
- Closet Depth
- LoDecibel™ Quiet Operation
- Reversible Door
- Wrinkle Care Option

AVAILABLE COLORS



LG ThinQ®

Enjoy new ways to control your
home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle


SUMMARY	
Type	Front Load Dryer
Capacity	7.4 cu. ft.
Matching Washer	WM4200HWA, WM4200HBA
Sensor Dry	Yes
Steam	Yes
Color	White (W), Black Steel (B)
APPEARANCE	
Intelligent Electronic Controls with LED Display	Yes
Dial-A-Cycle™	Yes
Touch Buttons	Yes
DRYER PROGRAMS	
No. of Programs	14
Programs (Sensor Dry)	Normal, Heavy Duty, Bedding, Small Load, Anti Bacterial, Steam-Sanitary™, SteamFresh™, Perm Press, Delicates, Sportswear, Towels, Speed Dry (Manual Dry), Air Dry (Manual Dry), Downloaded
No. of Options	12
Options	More Time, Less Time, Damp Dry Signal, Wrinkle Care, Control Lock, Wi-Fi, Energy Saver, TurboSteam™, Reduce Static, Remote Start, Drum Light, Signal
Temperature Settings	High, Med.High, Medium, Low, Ultra Low
Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry
Manual Dry Times	60 min., 50 min., 40 min., 30 min., 20 min., More Time/Less Time

FABRIC CARE FEATURES	
A.I Dry	Yes
Sensor Dry	Yes
Precise Temperature Control with Variable Heater	Yes
Steam	TurboSteam™
CONVENIENCE FEATURES	
3 Minute Installation Check	Yes
LoDecibel™ Quiet Operation	Yes
End of Cycle Signal	Yes
Drum Light	Yes
Reversible Door	Yes
FlowSense™ Duct Clogging Indicator	Yes
Wrinkle Care Option	Yes
Child Lock	Yes
Venting Option	Electric: 4 Way Venting / Gas: 3 Way Venting
4 Adjustable Legs	Yes
Remaining Time Display/Status Indicator(s)	Yes
ThinQ® TECHNOLOGY	
SmartDiagnosis™ (v3.0)	Yes
Wi-Fi	Yes
Remote Start and Cycle Monitor	Yes
Energy Monitoring	Yes (Wi-Fi)
ENERGY	
ENERGY STAR® Certified	Yes
CEF	Electric: 3.94 / Gas: 3.49
MATERIALS AND FINISHES	
Aluminized Alloy Steel Drum	Yes
Tub Rear	Painted
Cabinet	Painted Steel
Door	Tempered Glass Door
All Available Colors	White (W), Black Steel (B)

POWER SOURCE	
Ratings	CSA Listed
Electrical Requirements	120V, 15 Amps (Gas) / 240V 30 Amps (Electric)
Type	Electric, Gas
BTU Rating	20,000 Feet
OPTIONS	
LP Conversion Kit	383EEL3002D
Side Venting Kit	3911EZ9131X
Pedestal	WDP4W, WDP4B
Pedestal (WxHxD)	27 x 14 1/8 x 30 3/4 (50 1/2 D with door open)
DIMENSIONS (ELECTRIC)	
Product (WxHxD)	27" x 39" x 30 1/8"
Depth with Door Open	51 3/8"
Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Weight (Product)	125.3 lbs.
Weight (Carton)	142.6 lbs.
DIMENSIONS (GAS)	
Product (WxHxD)	27" x 39" x 30 1/8"
Depth with Door Open	51 3/8"
Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Weight (Product)	139.34 lbs.
Weight (Carton)	155.0 lbs.
LIMITED WARRANTY	
Parts & Labor	1 Year
Drum	3 Years
UPC CODES	
DLEX4200W (White)	048231028417
DLGX4201W (White)	048231028424
WM4200HWA (White)	048231028301
DLEX4200B (Black Steel)	048231028394
DLGX4201B (Black Steel)	048231028400
WM4200HBA (Black Steel)	048231028295

Dimensions and Clearances

Measure the current cutout dimensions and compare them to the cutout dimensions shown below. Little or no cabinet work may be necessary. The image may differ from the actual model.

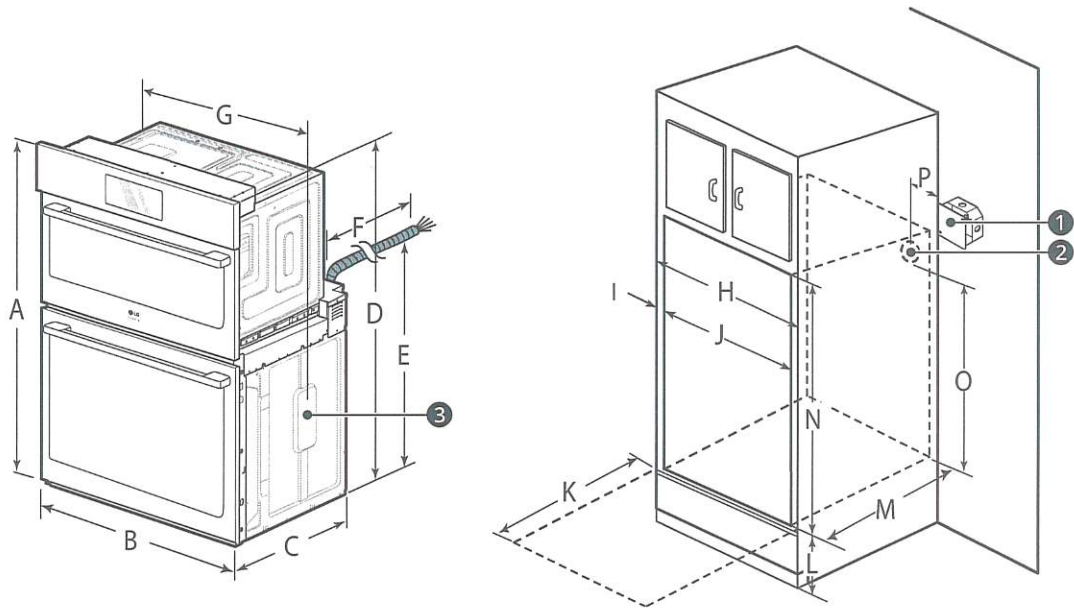

ENGLISH

List		Dimensions
A	Height	43 13/16" (111.3 cm)
B	Width	29 3/4" (75.5 cm)
C	Depth	23 3/8" (59.3 cm)
D	Height (standard installation)	43 3/16" (109.7 cm)
E	Height (power cord)	25 7/8" (65.6 cm)
F	Length (power cord)	60" (152.4 cm)
G	Width (standard installation)	28 7/16" (72.2 cm)
H	Cabinet width	30" (76.2 cm)
I	Overlap of oven	1" (2.5 cm)
J	Cutout width	28 1/2" Min. (72.4 cm) 28 5/8" Max. (72.7 cm)
K	Depth of open door	23" (58.4 cm)
L	Cutout location from floor	12" (30.5 cm)
M	Cutout depth	24" Min. (61.0 cm)
N	Cutout height	43 7/16" Min. (110.3 cm) 43 1/2" Max. (110.5 cm)
O	Height of conduit opening from floor of cutout	39 27/32" (101.2 cm)
P	Distance of conduit opening from side of cabinet	5" (12.7 cm)

TRA-8-3
APRIL 8 2025



HOME APPLIANCES

LG LAUNDRY

WM4100HBA

5.2 cu. ft. Capacity Front Load Washer

TurboWash™ 360 Technology

AI DD™

Steam Technology

ENERGY STAR® Qualified

SmartDiagnosis™

Touch Control Panel

ThinQ™ Technology (Wi-Fi Enabled)

Enjoy new ways to control your home with LG smart appliances

- Start the laundry while you're out shopping
- Get alerts when the cycle is finished
- Works with the LG ThinQ® app



CAPACITY	
Capacity (cu.ft.)	5.2
APPEARANCE	
Design Look	Front Control
Intelligent Electronic Controls with LED Display	•
Touch Buttons	•
Dial-A-Cycle™	•
ENERGY	
ENERGY STAR® Qualified	•
CEE Tier	2
DRYING PROGRAMS	
No. of Programs - 14	Normal, Perm. Press, Heavy Duty, Delicates, Towels, Speed Wash, Drain+Spin, Bedding, Tub Clean, Bright Whites™, Sanitary, Allergiene™, Sportswear, Downloaded
No. of Options - 14	TurboWash™, Steam, Fresh Care, Pre-wash, Remote Start, Delay Wash, Wi-Fi, Add Item, Cold Wash, Extra Rinse, Rinse+Spin, Control Lock, Spin Only, Signal
Temperature Settings	Extra Hot, Hot, Warm, Cold, Tap Cold
Spin Speeds	5
Water Levels	Extra High, High, Medium, Low, No Spin
Soil Levels	Load Sensing
Soil Levels	5
FABRIC CARE FEATURES	
AI DD™	•
TurboWash™ 360 Technology	•
Steam Technology	•
Allergiene™ Cycle	•
Sanitary Cycle	•
ColdWash™ Option	•
CONVENIENCE FEATURES	
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener
TrueBalance™ Anti-Vibration System	•
Load Sense	•
Control Lock	•
Auto Suds Removal	•
Leveling Legs	4 Adjustable Legs
ThinQ® TECHNOLOGY	
SmartDiagnosis™ (v3.0)	•
Wi-Fi	•
Remote Start and Cycle Monitor	•
Energy Monitoring	•

Tub Clean Coach	•
MOTOR	
Motor Type	Inverter Direct Drive Motor
Motor Speed	Variable
Max RPM	1,300
Axis	Horizontal
MATERIALS AND FINISHES	
NeveRust™ Stainless Steel Drum	•
Cabinet	PCM
Control Panel	Plastic
Top Plate	Painted
Door Cover	Tempered Glass Door
Door / Rim	Glass/Chrome
All Available Colours	Black Steel (B)
POWER SOURCE	
Ratings	UL Listed
Electrical Requirements	120V, 10 Amps
Type	Electric
OPTIONS	
Pedestal	WDP4B 27" x 14 1/8" x 30 3/4"
SideKick™ Pedestal Washer	WD100CB 27" x 14 1/8" x 30 3/4"
Stacking Kit	KSTK1
DIMENSIONS	
Product (WxHxD)	27" x 39" x 30 1/4" 55" (With door open)
Carton (WxHxD)	29 23/32" x 42 27/32" x 31 17/32"
Weight (Product/Carton)	198.4 lbs / 212.1 lbs
LIMITED WARRANTY	
1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor	
UPC CODES	
WM4100HBA	772454073250
DLEX4200B	772454073267
DLGX4201B	772454073366
WD100CB	772454071805
WDP4B	048231026451
KSTK1	772454059896