




RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION

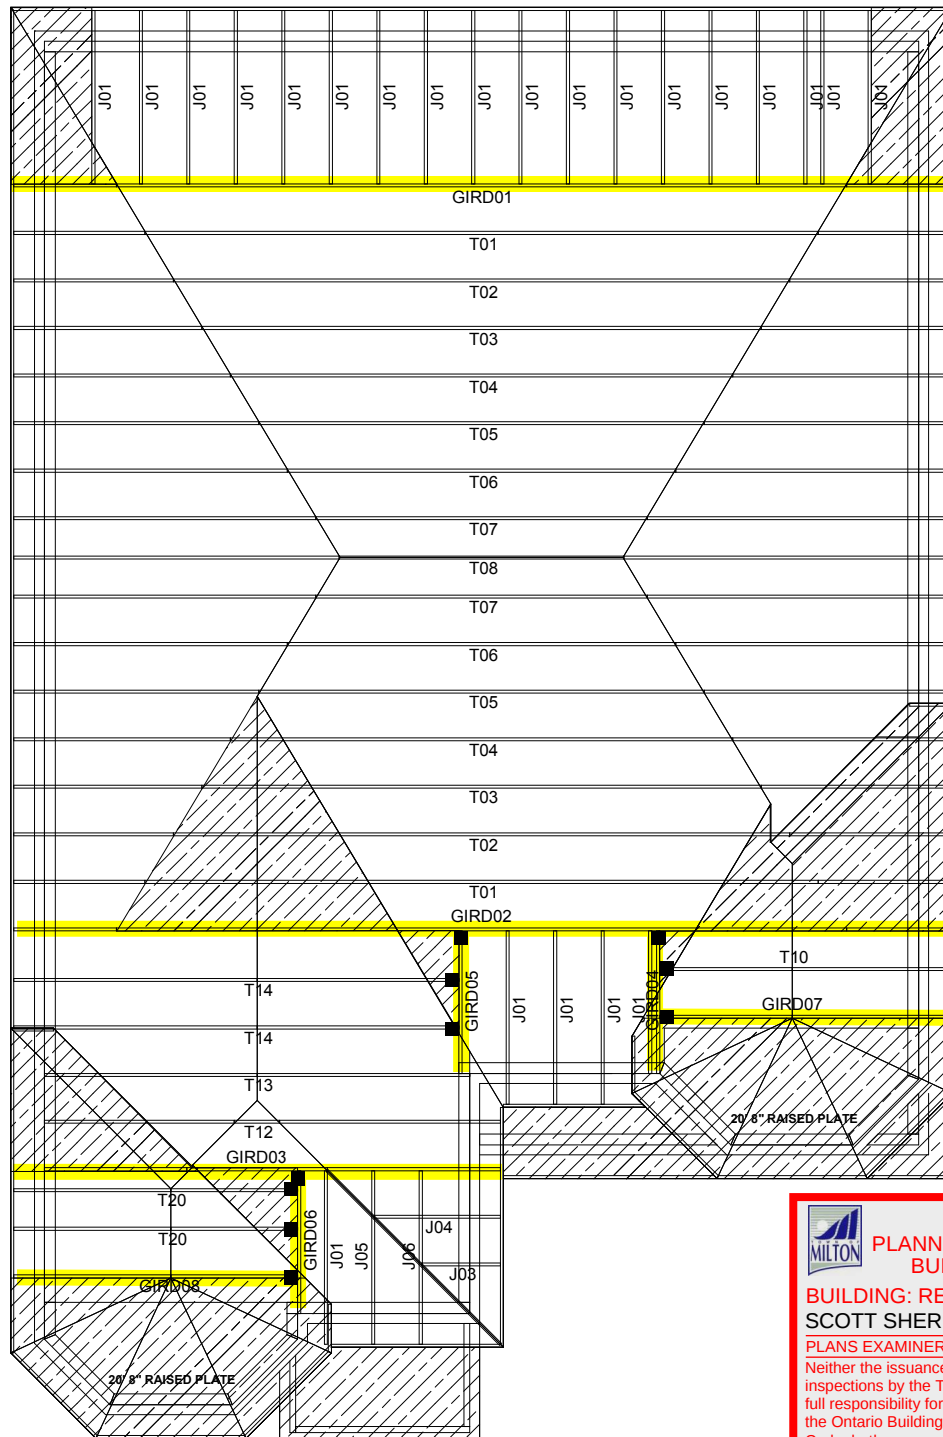

TOWN OF MILTON  
PLANNING AND DEVELOPMENT  
BUILDING PERMIT: 17-4690

BUILDING: REVIEWED

SCOTT SHERRIFFS

APR 19, 2017

PLANS EXAMINER

DATE

Neither the issuance of a permit nor carrying out of inspections by the Town of Milton relieves the owner from full responsibility for compliance with the provisions of the Ontario Building Code Act and the Ontario Building Code, both as amended, as well as other applicable statutes and regulations of the Province of Ontario, By-laws of the Region of Halton and Town of Milton



CONVENTIONAL  
FRAMING BY OTHERS

ALL CONVENTIONAL FRAMING TO CONFORM WITH PART 9 OF THE O.B.C. ROOF RAFTERS THAT CROSS MEET OVER TRUSSES TO BE 2x4 S.P.F. @ 24"O/C WITH A 2x4 VERTICAL POST TO THE TRUSS UNDERNEATH EACH CROSS POINT. VERTICAL POST LONGER THAN 6' TO HAVE LATERAL BRACING SO THAT THE DISTANCE BETWEEN END POINT AND BETWEEN ROWS OF BRACING DOES NOT EXCEED 6'.

HANGER LEGEND:

▼ LUS24  
● HGUS26

■ LJS26DS  
✕ HGUS26-2

SIZE AND LOCATION OF CONVENTIONAL FRAMING IS APPROXIMATE. ALL AREAS MAY NOT BE SHOWN. REFER TO ARCHITECTURAL PLANS FOR DETAILS.

Model: **LOT 100 JUNIPER 9 EL 3**

Customer: GREENPARK

Project: LECCO RIDGE

Location: MILTON

Date: 3/24/2017 Drawn by: BB

**ENGINEERING NOTE PAGE (ENP-1)**  
**PLEASE READ PRIOR TO INSTALLATION**

**RESPONSIBILITIES**

THIS DESIGN IS FOR AN INDIVIDUAL BUILDING COMPONENT AND HAS BEEN BASED ON INFORMATION PROVIDED BY THE DESIGN OFFICE OF KOTT LUMBER. THE UNDERSIGNED ENGINEER DISCLAIMS ANY RESPONSIBILITY FOR DAMAGES AS A RESULT OF FAULTY OR INCORRECT INFORMATION, SPECIFICATION AND/OR DESIGNS FURNISHED TO THE ENGINEER. THE UNDERSIGNED ENGINEER IS ONLY RESPONSIBLE FOR THE STRUCTURAL INTEGRITY OF THIS BUILDING COMPONENT FOR THE CONDITIONS AND LOADS SHOWN ON THIS DRAWING. THE STRUCTURAL INTEGRITY OF THE BUILDING AND THE VERIFICATION OF THE DIMENSIONS AND THE DESIGN LOADS USED ARE THE RESPONSIBILITY OF THE BUILDING DESIGNER.

TRUSSES ARE DESIGNED IN CONFORMANCE WITH THE RELEVANT SECTIONS OF THE NATIONAL BUILDING CODE OF CANADA OR THE CANADIAN CODE FOR FARM BUILDINGS, WHICHEVER APPLIES TO THE BUILDING TYPE INDICATED ON THE DRAWING

IT IS THE RESPONSIBILITY OF KOTT LUMBER TO ENSURE THAT TRUSSES ARE MANUFACTURED IN CONFORMANCE WITH THESE DESIGNS AND WITH THE SPECIFICATIONS OUTLINED BELOW. THE UNDERSIGNED ENGINEER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**USE AND OCCUPANCY**

- The building is of the type indicated on the drawing

**LOADING**

- The truss loading intensity and distribution as well as load transfer mechanism is that indicated on the drawing
- No buildings, trees, parapets or other projections higher than the roof for which the trusses are used are located within a distance less than ten (10) times the difference in height, or five metres (16 ft) whichever is greater, unless the drawing indicates that the snow drifting has been taken into account

**HANDLING, INSTALLATION AND BRACING**

- The trusses must be handled and installed by a qualified professional as per the supplied document titled *Information for Truss Installers* and the BCSI-B1 and BCSI-B3 Summary Sheets
- The compression chords are laterally braced by continuous rigid diaphragm sheathing or as specified on the drawing
- Temporary and permanent bracing must be installed as indicated on the truss drawing and according to the BCSI-B1 and BCSI-B3 Summary Sheets. Bracing for the lateral stability of the truss is to be provided by the building designer
- **It is recommended that a Professional Engineer's advice be obtained for the bracing of trusses spanning more than 12.37m (40'-7")**

**SUPPORTS**

- The trusses are to be supported at the bearing points indicated and anchored to the supports where considered necessary by the designer of the overall structure
- Bearing sizes shown are the minimum required to prevent crushing of the truss members and do not necessarily take into account stability of the overall building structure
- Elevation of bearings must be carefully checked and shimmed to alignment for solid bearings
- Adequate wood truss bearing is the responsibility of the building designer.

**DIMENSIONS**

- Geometry of the truss and dimensions indicated on the drawing are identical to those of the installed truss.

WHERE CONTINUOUS LATERAL BRACING IS REQUIRED FOR WEBS BUT CAN NOT BE PROVIDED SUBSTITUTE EACH WITH ONE SPF #2 2" X 4" T-BRACE COVERING 90% OF WEB LENGTH AND FASTENED TO EDGE OF WEB USING 3 1/4" SPIRAL NAILS @ 6" C/C


RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION

01/29/2013

KOTT - Stouffville, ON, CGC

ENG JOB: PT0317-204

ATTACH TRUSS TO NON LOAD BEARING WALLS USING SIMPSON STC CLIP OR EQ.

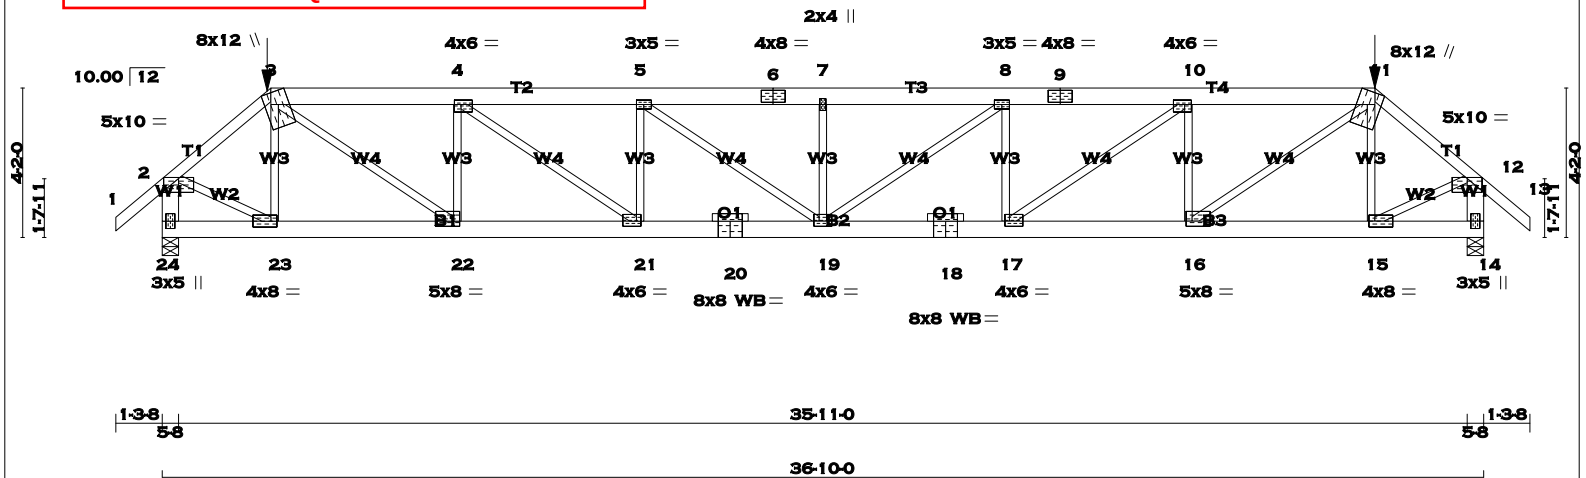

TOTAL WEIGHT = 192 lb [M]

| LUMBER            |      |        |            |
|-------------------|------|--------|------------|
| N. L. G. A. RULES |      |        |            |
| CHORDS            | SIZE | LUMBER | DESCR.     |
| 1 - 3             | 2x4  | DRY    | No.2       |
| 3 - 6             | 2x6  | DRY    | No.2       |
| 6 - 9             | 2x6  | DRY    | No.2       |
| 9 - 11            | 2x6  | DRY    | No.2       |
| 11 - 13           | 2x4  | DRY    | No.2       |
| 24 - 2            | 2x6  | DRY    | No.2       |
| 14 - 12           | 2x6  | DRY    | No.2       |
| 24 - 20           | 2x6  | DRY    | 2100F 1.8E |
| 20 - 18           | 2x6  | DRY    | 2100F 1.8E |
| 18 - 14           | 2x6  | DRY    | 2100F 1.8E |
| ALL WEBS          | 2x3  | DRY    | No.2       |
| EXCEPT            |      |        | SPF        |

DRY: SEASONED LUMBER.

| PLATES (table is in inches) |        |        |     |                |
|-----------------------------|--------|--------|-----|----------------|
| JT                          | TYPE   | PLATES | W   | LEN Y X        |
| 2                           | TMVW-p | MT20   | 5.0 | 10.0 Edge      |
| 3                           | TTWW+m | MT20   | 8.0 | 12.0 Edge 3.50 |
| 4                           | TMWW-t | MT20   | 4.0 | 6.0 1.50 2.25  |
| 5                           | TMWW-t | MT20   | 3.0 | 5.0            |
| 6                           | TS-t   | MT20   | 4.0 | 8.0            |
| 7                           | TMW+w  | MT20   | 2.0 | 4.0            |
| 8                           | TMWW-t | MT20   | 3.0 | 5.0            |
| 9                           | TS-t   | MT20   | 4.0 | 8.0            |
| 10                          | TMWW-t | MT20   | 4.0 | 6.0 1.50 2.25  |
| 11                          | TTWW+m | MT20   | 8.0 | 12.0 Edge 3.50 |
| 12                          | TMVW-p | MT20   | 5.0 | 10.0 Edge      |
| 14                          | BMV1+p | MT20   | 3.0 | 5.0            |
| 15                          | BMWW-t | MT20   | 4.0 | 8.0 2.00 2.00  |
| 16                          | BMWW-t | MT20   | 5.0 | 8.0 1.75 2.00  |
| 17                          | BMWW-t | MT20   | 4.0 | 6.0 1.75 1.50  |
| 18                          | BS-t   | MT20   | 8.0 | 8.0            |
| 19                          | BMWW-t | MT20   | 4.0 | 6.0 1.75 3.00  |
| 20                          | BS-t   | MT20   | 8.0 | 8.0            |
| 21                          | BMWW-t | MT20   | 4.0 | 6.0 1.75 1.50  |
| 22                          | BMWW-t | MT20   | 5.0 | 8.0 1.75 2.00  |
| 23                          | BMWW-t | MT20   | 4.0 | 8.0 2.00 2.00  |
| 24                          | BMV1+p | MT20   | 3.0 | 5.0            |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

WB - INDICATES BLOCKING REQUIRED

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |                         |                                 |                 |
|----------|-------------------------|---------------------------------|-----------------|
|          | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT REQRD BRG |
| JT       | VERT                    | HORZ                            | DOWN            |
| 24       | 3369                    | 0                               | 3369 0 0        |
| 14       | 3369                    | 0                               | 3369 0 0        |

| UNFACTORED REACTIONS |           |          |           |           |       |         |
|----------------------|-----------|----------|-----------|-----------|-------|---------|
| JT                   | 1ST LCASE | MAX/MIN. | COMPONENT | REACTIONS |       |         |
| 24                   | COMBINED  | SNOW     | LIVE      | PERM.LIVE | WIND  | DEAD    |
| 24                   | 2363      | 1662 / 0 | 0 / 0     | 0 / 0     | 0 / 0 | 700 / 0 |
| 14                   | 2363      | 1662 / 0 | 0 / 0     | 0 / 0     | 0 / 0 | 700 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 24, 14

BRACING  
TOP CHORD TO BE SHEATHED OR MAX. PURLINE SPACING = 2.54 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

| LOADING               |                           |                           |                                     |
|-----------------------|---------------------------|---------------------------|-------------------------------------|
| TOTAL LOAD CASES: (4) |                           |                           |                                     |
| CHORDS                |                           |                           |                                     |
| MEMB.                 | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (LC1) (LC) |
| FR-TO                 |                           | FROM TO                   | LENGTH FR-TO                        |
| 1-2                   | 0 / 34                    | -77.3 -77.3               | 0.12 (1)                            |
| 2-3                   | -3346 / 0                 | -77.3 -77.3               | 0.31 (1)                            |
| 3-4                   | -5803 / 0                 | -145.8 -145.8             | 0.53 (1)                            |
| 4-5                   | -7657 / 0                 | -145.8 -145.8             | 0.68 (1)                            |
| 5-6                   | -8265 / 0                 | -145.8 -145.8             | 0.72 (1)                            |
| 6-7                   | -8265 / 0                 | -145.8 -145.8             | 0.72 (1)                            |
| 7-8                   | -8265 / 0                 | -145.8 -145.8             | 0.72 (1)                            |
| 8-9                   | -7657 / 0                 | -145.8 -145.8             | 0.68 (1)                            |
| 9-10                  | -7657 / 0                 | -145.8 -145.8             | 0.68 (1)                            |
| 10-11                 | -5803 / 0                 | -145.8 -145.8             | 0.53 (1)                            |
| 11-12                 | -3346 / 0                 | -77.3 -77.3               | 0.31 (1)                            |
| 12-13                 | 0 / 34                    | -77.3 -77.3               | 0.12 (1)                            |
| 24-2                  | -3361 / 0                 | 0.0 0.0                   | 0.25 (1)                            |
| 14-12                 | -3361 / 0                 | 0.0 0.0                   | 0.25 (1)                            |
| 24-23                 | 0 / 0                     | -33.0 -33.0               | 0.06 (1)                            |
| 23-22                 | 0 / 2557                  | -33.0 -33.0               | 0.19 (1)                            |
| 22-21                 | 0 / 5803                  | -33.0 -33.0               | 0.37 (1)                            |
| 21-20                 | 0 / 7657                  | -33.0 -33.0               | 0.47 (1)                            |
| 20-19                 | 0 / 7657                  | -33.0 -33.0               | 0.47 (1)                            |
| 19-18                 | 0 / 7657                  | -33.0 -33.0               | 0.47 (1)                            |
| 18-17                 | 0 / 7657                  | -33.0 -33.0               | 0.47 (1)                            |
| 17-16                 | 0 / 5803                  | -33.0 -33.0               | 0.37 (1)                            |
| 16-15                 | 0 / 2557                  | -33.0 -33.0               | 0.19 (1)                            |
| 15-14                 | 0 / 0                     | -33.0 -33.0               | 0.06 (1)                            |

| FACTORED CONCENTRATED LOADS (LBS) |         |      |           |
|-----------------------------------|---------|------|-----------|
| JT                                | LOC.    | LC1  | MAX- MAX+ |
| 3                                 | 3-0-6   | -176 | -176      |
| 11                                | 33-9-10 | -176 | -176      |

| FACE DIR. |         |      |           |
|-----------|---------|------|-----------|
| JT        | LOC.    | LC1  | MAX- MAX+ |
| 3         | 3-0-6   | -176 | -176      |
| 11        | 33-9-10 | -176 | -176      |

DESIGN CRITERIA

SPECIFIED LOADS:  
TOP CH. LL = 23.3 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.0 PSF  
TOTAL LOAD = 33.3 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

GIRDER TYPE: CPrimeHip  
SIDE SETBACK = 3-0-6  
END SETBACK = 6-0-0  
END WALL WIDTH = 5-8  
CORNER FRAMING TYPE: CONVENTIONAL  
END JACK TYPE: CONVENTIONAL  
APPLIED TO FRONT SIDE  
- ADDTL LOADS BASED ON 55 % OF GSL.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC2010

THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012, BCBC 2012, ABC 2014  
- CSA 086-09  
- TPIC 2011

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.23")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.43")  
ALLOWABLE DEFL.(TL)= L/360 (1.23")  
CALCULATED VERT. DEFL.(TL) = L/586 (0.75")

CSI: TC=0.72 (5-7:1), BC=0.47 (17-19:1), WB=0.99 (3-22:1), SSI=0.29 (3-4:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00 COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

| NAIL VALUES |           |         |         |
|-------------|-----------|---------|---------|
| PLATE       | GRIP(DRY) | SHEAR   | SECTION |
| (PSI)       | (PLI)     | (PLI)   | (PLI)   |
| MAX MIN     | MAX MIN   | MAX MIN | MAX MIN |
| MT20        | 618       | 354     | 1667    |


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (22) (INPUT = 0.90 )  
JSI METAL= 0.94 (20) (INPUT = 1.00 )




RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION

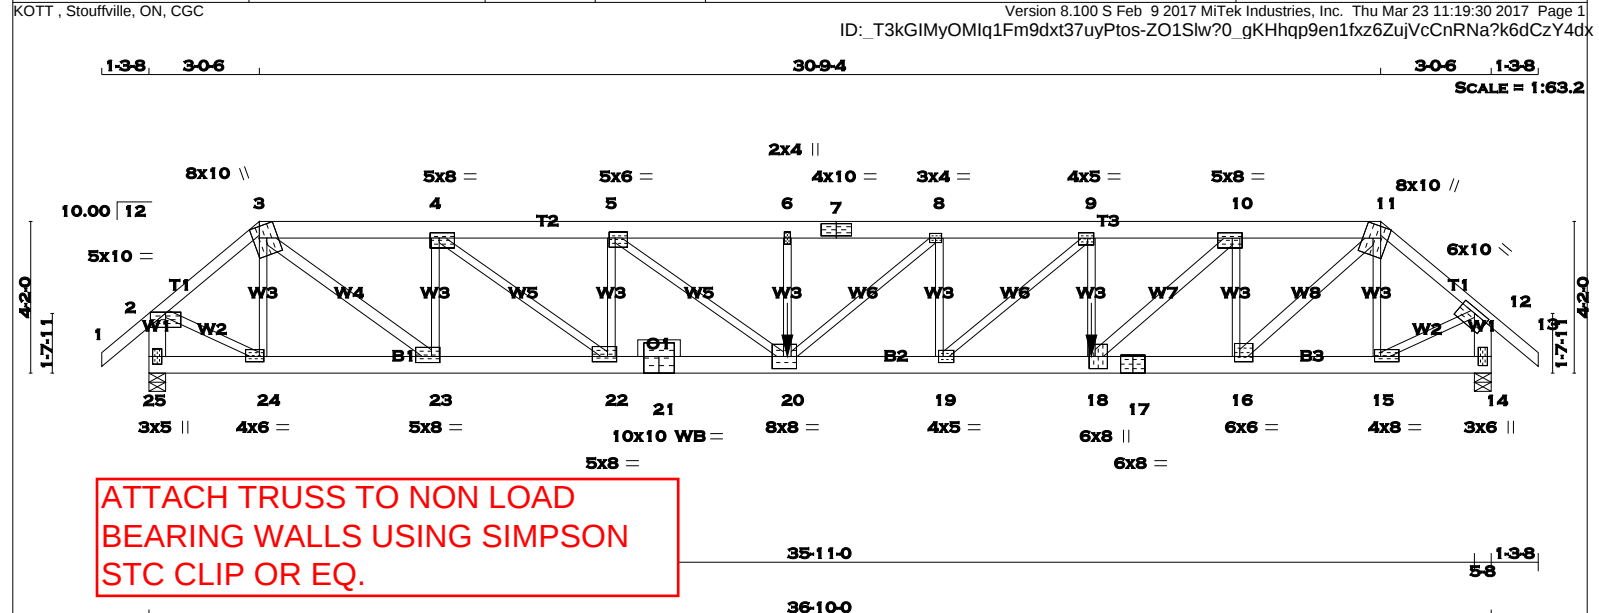

|                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| <b>LUMBER</b><br>N. L. G. A. RULES<br>CHORDS SIZE LUMBER DESCR. 1 - 3 2x4 DRY 1650F 1.5E SPF 3 - 7 2x6 DRY 2100F 1.8E SPF 7 - 11 2x6 DRY 2100F 1.8E SPF 11- 13 2x4 DRY 1650F 1.5E SPF 25- 2 2x6 DRY No.2 SPF 14- 12 2x6 DRY No.2 SPF 25- 21 2x6 DRY 2100F 1.8E SPF 21- 17 2x6 DRY 2100F 1.8E SPF 17- 14 2x6 DRY 2100F 1.8E SPF ALL WEBS 2x3 DRY No.2 SPF EXCEPT 3 - 23 2x4 DRY No.2 SPF 18- 10 2x4 DRY No.2 SPF 16- 11 2x4 DRY No.2 SPF DRY: SEASONED LUMBER. |  |  | <b>DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER</b><br><b>BEARINGS</b> FACTORED MAXIMUM FACTORED INPUT REQRD GROSS REACTION GROSS REACTION BRG BRG JT VERT HORZ DOWN HORZ UPLIFT IN-SX IN-SX 25 3269 0 3269 0 0 5-8 5-8 14 3887 0 3887 0 0 5-8 5-8 UNFACTORED REACTIONS 1ST LCASE MAX./MIN. COMPONENT REACTIONS JT COMBINED SNOW LIVE PERM.LIVE WIND DEAD SOIL 25 2292 1617 / 0 0 / 0 0 / 0 675 / 0 0 / 0 14 2725 1920 / 0 0 / 0 0 / 0 805 / 0 0 / 0 BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 25, 14 BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.14 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. LOADING TOTAL LOAD CASES: (4) CHORDS MAX. FACTORED FORCE (LBS) FACTORED VERT. LOAD (PLF) MAX. UNBRACED LENGTH (LC) WEBS MAX. FACTORED FORCE (LBS) MAX. UNBRACED LENGTH (LC) FR-TO MEMB. FROM TO 1-2 0 / 34 -77.3 -77.3 0.10 (1) 10.00 24-3 -873 / 0 0.21 (1) 2-3 -3238 / 0 -77.3 -77.3 0.18 (1) 4.26 3-23 0 / 4393 0.78 (1) 3-4 -5949 / 0 -77.3 -77.3 0.15 (1) 4.33 23-4 -2601 / 0 0.64 (1) 4-5 -8755 / 0 -77.3 -77.3 0.25 (1) 3.61 4-22 0 / 3538 0.88 (1) 5-6 -10947 / 0 -77.3 -77.3 0.40 (1) 3.14 22-5 -2062 / 0 0.50 (1) 6-7 -10947 / 0 -77.3 -77.3 0.37 (1) 3.15 5-20 0 / 2764 0.68 (1) 7-8 -10947 / 0 -77.3 -77.3 0.37 (1) 3.15 20-8 -305 / 0 0.07 (1) 8-9 -10766 / 0 -77.3 -77.3 0.36 (1) 3.19 20-9 0 / 243 0.06 (1) 9-10 -9599 / 0 -77.3 -77.3 0.29 (1) 3.42 19-8 -513 / 0 0.13 (1) 10-11 -6506 / 0 -77.3 -77.3 0.16 (1) 4.17 19-9 0 / 1561 0.39 (1) 11-12 -3895 / 0 -77.3 -77.3 0.21 (1) 3.92 18-9 -1324 / 0 0.32 (1) 12-13 0 / 34 -77.3 -77.3 0.10 (1) 10.00 18-10 0 / 4234 0.75 (1) 25-2 -3260 / 0 0.0 0.0 0.24 (1) 5.83 16-10 -3252 / 0 0.80 (1) 14-12 -3876 / 0 0.0 0.0 0.29 (1) 5.39 16-11 0 / 4849 0.86 (1) 25-24 0 / 0 -17.5 -17.5 0.02 (4) 10.00 2-24 0 / 2678 0.66 (1) 24-23 0 / 2471 -17.5 -17.5 0.15 (1) 10.00 15-12 0 / 3221 0.80 (1) 23-22 0 / 5949 -17.5 -17.5 0.35 (1) 10.00 22-21 0 / 8755 -17.5 -17.5 0.53 (1) 10.00 21-20 0 / 8755 -17.5 -17.5 0.53 (1) 10.00 20-19 0 / 10766 -101.5 -101.5 0.68 (1) 10.00 19-18 0 / 9599 -101.5 -101.5 0.60 (1) 10.00 18-17 0 / 6506 -17.5 -17.5 0.39 (1) 10.00 17-16 0 / 6506 -17.5 -17.5 0.39 (1) 10.00 16-15 0 / 2972 -17.5 -17.5 0.18 (1) 10.00 15-14 0 / 0 -17.5 -17.5 0.02 (1) 10.00 FACTORED CONCENTRATED LOADS (LBS) JT LOC. LC1 MAX- MAX+ FACE DIR. TYPE 18 25-10-6 -1384 -1384 --- FRONT VERT TOTAL 20 17-6-4 -1364 -1364 --- FRONT VERT TOTAL |  |  | <b>DESIGN CRITERIA</b><br>*** SPECIAL LOADS ANALYSIS ***<br>GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.<br>LOADS WERE DERIVED FROM USER INPUT<br>NO FURTHER MODIFICATIONS WERE MADE<br>SPECIFIED LOADS:<br>TOP CH. LL = 23.3 PSF<br>DL = 3.0 PSF<br>BOT CH. LL = 0.0 PSF<br>DL = 7.0 PSF<br>TOTAL LOAD = 33.3 PSF<br>SPACING = 24.0 IN. C/C<br>LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM<br>GIRDER TYPE: CStdGirder<br>START DISTANCE = 17-6-4<br>START SPAN CARRIED = 6-0-0<br>END DISTANCE = 25-10-6<br>END SPAN CARRIED = 6-0-0<br>END WALL WIDTH = 5-8<br>APPLIED TO FRONT SIDE OF BOTTOM CHORD.<br>- ADDTL LOADS BASED ON 55 % OF GSL.<br>*** NON STANDARD GIRDER ***<br>ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.<br>THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010<br>THIS DESIGN COMPLIES WITH:<br>- PART 9 OF OBC 2012, BCBC 2012, ABC 2014<br>- CSA 086-09<br>- TPIC 2011<br>(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD<br>ALLOWABLE DEFL.(LL)= L/360 (1.23")<br>CALCULATED VERT. DEFL.(LL)= L/957 (0.46")<br>ALLOWABLE DEFL.(TL)= L/360 (1.23")<br>CALCULATED VERT. DEFL.(TL)= L/544 (0.81")<br>CSI: TC=0.40 (5-6-1), BC=0.68 (19-20:1), WB=0.88 (4-22:1), SSI=0.18 (19-20:1)<br>DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00 COMP=1.00 SHEAR=1.00 TENS=1.00<br>COMPANION LIVE LOAD FACTOR = 0.50<br>TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.<br>NAIL VALUES<br>PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)<br>MAX MIN MAX MIN MAX MIN<br>MT20 618 354 1667 822 2284 1656<br>PLATE PLACEMENT TOL. = 0.250 inches<br>PLATE ROTATION TOL. = 5.0 Deg.<br>JSI GRIP= 0.90 (90%) JSI PLU= 90% JSI METAL= 1.00 (100%) JSI INF= 1.00 (100%)<br>TOTAL WEIGHT = 202 lb [M] |  |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION

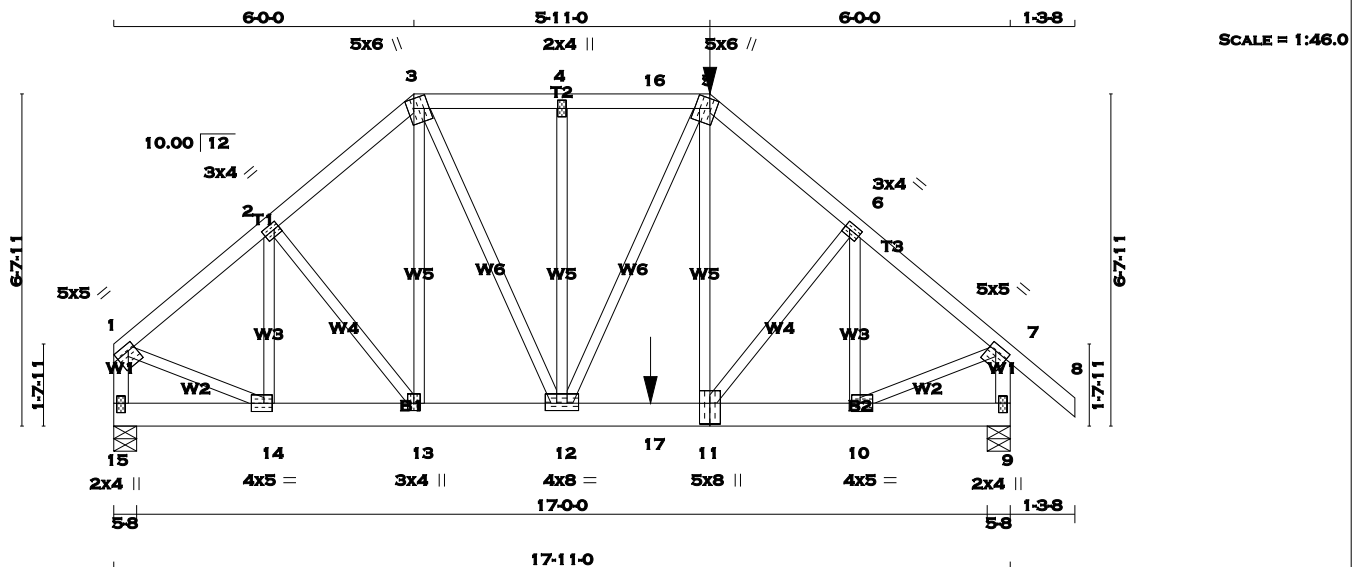

| LUMBER                |      |        |        |
|-----------------------|------|--------|--------|
| N. L. G. A. RULES     |      |        |        |
| CHORDS                | SIZE | LUMBER | DESCR. |
| 1 - 3                 | 2x4  | DRY    | No.2   |
| 3 - 5                 | 2x4  | DRY    | No.2   |
| 5 - 8                 | 2x4  | DRY    | No.2   |
| 15 - 1                | 2x4  | DRY    | No.2   |
| 9 - 7                 | 2x4  | DRY    | No.2   |
| 15 - 11               | 2x6  | DRY    | No.2   |
| 11 - 9                | 2x6  | DRY    | No.2   |
| ALL WEBS EXCEPT       | 2x3  | DRY    | No.2   |
| DRY: SEASONED LUMBER. |      |        |        |

| PLATES (table is in inches) |        |        |     |     |           |
|-----------------------------|--------|--------|-----|-----|-----------|
| JT                          | TYPE   | PLATES | W   | LEN | X         |
| 1                           | TMVW-t | MT20   | 5.0 | 5.0 | 1.50 1.75 |
| 2                           | TMVW-t | MT20   | 3.0 | 4.0 | 1.50 1.25 |
| 3                           | TTWW+m | MT20   | 5.0 | 6.0 | 2.25 1.50 |
| 4                           | TMVW-w | MT20   | 2.0 | 4.0 |           |
| 5                           | TTWW+m | MT20   | 5.0 | 6.0 | 2.25 1.50 |
| 6                           | TMVW-t | MT20   | 3.0 | 4.0 | 1.50 1.25 |
| 7                           | TMVW-t | MT20   | 5.0 | 5.0 | 1.50 1.75 |
| 9                           | BMV1+p | MT20   | 2.0 | 4.0 | 2.25 1.00 |
| 10                          | BMVW-t | MT20   | 4.0 | 5.0 | 2.00 2.00 |
| 11                          | BSWW+I | MT20   | 5.0 | 8.0 | 5.00 2.50 |
| 12                          | BMVW-t | MT20   | 4.0 | 8.0 | 1.75 4.00 |
| 13                          | BMVW-t | MT20   | 3.0 | 4.0 | 1.75 1.50 |
| 14                          | BMVW-t | MT20   | 4.0 | 5.0 | 2.00 2.00 |
| 15                          | BMV1+p | MT20   | 2.0 | 4.0 | 2.25 1.00 |

A SIZE FOR SIZE SUBSTITUTION OF MI TEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

**HANGERS NOTES**  
1) SPECIAL HANGER(S) OR CONNECTION(S) REQUIRED TO SUPPORT CONCENTRATED LOAD(S) 348.1 lbs FACTORED DOWN AT 11-11-0 ON TOP CHORD, AND 1047.3 lbs FACTORED DOWN AT 10-8-12 ON BOTTOM CHORD. DESIGN FOR UNSPECIFIED CONNECTION(S) IS DELEGATED TO THE BUILDING DESIGNER.



**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

| BEARINGS                |      |                                 |        |
|-------------------------|------|---------------------------------|--------|
| FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |        |
| JT                      | VERT | HORZ                            | UPLIFT |
| 15                      | 1439 | 0                               | 0      |
| 9                       | 1956 | 0                               | 0      |

| UNFACTORED REACTIONS |           |          |           |           |       |         |
|----------------------|-----------|----------|-----------|-----------|-------|---------|
| JT                   | 1ST LCASE | MAX/MIN. | COMPONENT | REACTIONS |       |         |
| 15                   | 1009      | 712 / 0  | LIVE      | PERM.LIVE | WIND  | DEAD    |
| 9                    | 1373      | 960 / 0  | 0 / 0     | 0 / 0     | 0 / 0 | 413 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 15, 9

**BRACING**  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.64 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

**LOADING**  
TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                                |
|--------|---------------------------|---------------------------|--------------------------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (LC1) |
| FR-TO  |                           | FROM                      | TO                             |
| 1-2    | -1373 / 0                 | -77.3                     | -77.3 0.15 (1)                 |
| 2-3    | -1467 / 0                 | -77.3                     | -77.3 0.15 (1)                 |
| 3-4    | -1489 / 0                 | -77.3                     | -77.3 0.14 (1)                 |
| 4-16   | -1489 / 0                 | -77.3                     | -77.3 0.15 (1)                 |
| 16-5   | -1489 / 0                 | -145.8                    | -145.8 0.15 (1)                |
| 5-6    | -1962 / 0                 | -77.3                     | -77.3 0.16 (1)                 |
| 6-7    | -1769 / 0                 | -77.3                     | -77.3 0.15 (1)                 |
| 7-8    | 0 / 34                    | -77.3                     | -77.3 0.12 (1)                 |
| 15-1   | -1404 / 0                 | 0.0                       | 0.0 0.16 (1)                   |
| 9-7    | -1886 / 0                 | 0.0                       | 0.0 0.22 (1)                   |
| 15-14  | 0 / 0                     | -17.5                     | -17.5 0.02 (1)                 |
| 14-13  | 0 / 1067                  | -17.5                     | -17.5 0.16 (1)                 |
| 13-12  | 0 / 1108                  | -17.5                     | -17.5 0.27 (1)                 |
| 12-17  | 0 / 1501                  | -17.5                     | -17.5 0.59 (1)                 |
| 17-11  | 0 / 1501                  | -33.0                     | -33.0 0.59 (1)                 |
| 11-10  | 0 / 1370                  | -33.0                     | -33.0 0.32 (1)                 |
| 10-9   | 0 / 0                     | -33.0                     | -33.0 0.05 (1)                 |

| FACTORED CONCENTRATED LOADS (LBS) |         |       |       |
|-----------------------------------|---------|-------|-------|
| JT                                | LOC.    | LC1   | MAX-  |
| 5                                 | 11-11-0 | -348  | -348  |
| 17                                | 10-8-12 | -1047 | -1047 |

| FACE |         |       |       |
|------|---------|-------|-------|
| JT   | LOC.    | LC1   | MAX-  |
| 5    | 11-11-0 | -348  | -348  |
| 17   | 10-8-12 | -1047 | -1047 |

| DIR. |         |       |       |
|------|---------|-------|-------|
| JT   | LOC.    | LC1   | MAX-  |
| 5    | 11-11-0 | -348  | -348  |
| 17   | 10-8-12 | -1047 | -1047 |

| TYPE |         |       |       |
|------|---------|-------|-------|
| JT   | LOC.    | LC1   | MAX-  |
| 5    | 11-11-0 | -348  | -348  |
| 17   | 10-8-12 | -1047 | -1047 |

**DESIGN CRITERIA**

\*\*\* SPECIAL LOADS ANALYSIS \*\*\*  
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.  
LOADS WERE DERIVED FROM USER INPUT  
NO FURTHER MODIFICATIONS WERE MADE

| SPECIFIED LOADS: |    |          |          |
|------------------|----|----------|----------|
| TOP CH.          | LL | =        | 23.3 PSF |
| BOT CH.          | LL | =        | 0.0 PSF  |
| TOTAL LOAD       | =  | 33.3 PSF |          |

**SPACING = 24.0 IN. C/C**

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

GIRDER TYPE: CPrimeHip  
SIDE SETBACK = 6-0-0  
END SETBACK = 6-0-0  
END WALL WIDTH = 5-8  
CORNER FRAMING TYPE: CONVENTIONAL  
END JACK TYPE: CONVENTIONAL  
APPLIED TO FRONT SIDE  
- ADDTL LOADS BASED ON 55 % OF GSL.  
LOADS APPLIED TO FIRST 7-2-4 OF SPAN MEASURED FROM THE RIGHT.

\*\*\* NON STANDARD GIRDER \*\*\*  
ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010

THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012, BCBC 2012, ABC 2014  
- CSA 086-09  
- TPIC 2011

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.60")  
CALCULATED DEFL.(LL) = L/999 (0.04")  
ALLOWABLE DEFL.(TL)= L/360 (0.60")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.07")

CSI: TC=0.22 (7-9-1), BC=0.59 (11-12-1), WB=0.36 (7-10-1), SSI=0.46 (11-12-1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00


COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

| NAIL VALUES |           |          |           |
|-------------|-----------|----------|-----------|
| PLATE       | GRIP(DRY) | SHEAR    | SECTION   |
| (PSI)       | (PLI)     | (PLI)    | (PLI)     |
| MAX MIN     | MAX MIN   | MAX MIN  | MAX MIN   |
| MT20        | 618 354   | 1667 822 | 2284 1656 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 0.0 degrees

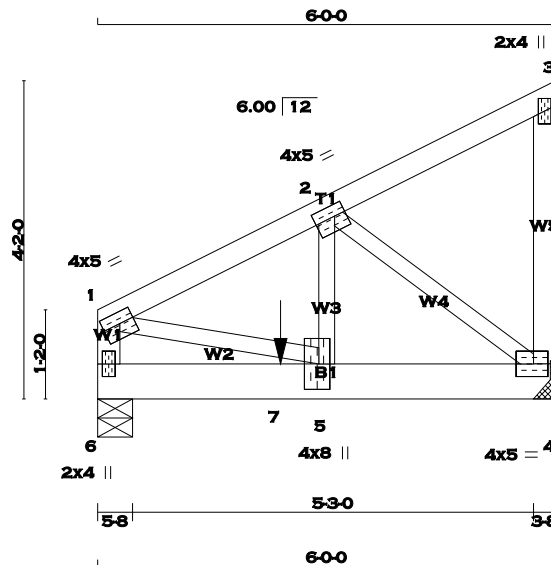

SCALE = 1:30.2

TOTAL WEIGHT = 29 lb

| LUMBER            |      |        |        |     |
|-------------------|------|--------|--------|-----|
| N. L. G. A. RULES |      |        |        |     |
| CHORDS            | SIZE | LUMBER | DESCR. |     |
| 1 - 3             | 2x4  | DRY    | No.2   | SPF |
| 4 - 3             | 2x4  | DRY    | No.2   | SPF |
| 6 - 1             | 2x4  | DRY    | No.2   | SPF |
| 6 - 4             | 2x6  | DRY    | No.2   | SPF |

ALL WEBS 2x3 DRY No.2 SPF  
EXCEPT

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| 1  | TMWW-t  | MT20   | 4.0 | 5.0 | 1.75 | 2.25 |
| 2  | TMWW-t  | MT20   | 4.0 | 5.0 | 1.75 | 1.75 |
| 3  | TMV+p   | MT20   | 2.0 | 4.0 |      |      |
| 4  | BMVW1-t | MT20   | 4.0 | 5.0 | 2.00 | 2.25 |
| 5  | BMWW+t  | MT20   | 4.0 | 8.0 | 4.00 | 1.75 |
| 6  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |

A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

**HANGERS NOTES**

1) SPECIAL HANGER(S) OR CONNECTION(S) REQUIRED TO SUPPORT CONCENTRATED LOAD(S) 850.7 lbs FACTORED DOWN AT 2-4-12 ON BOTTOM CHORD. DESIGN FOR UNSPECIFIED CONNECTION(S) IS DELEGATED TO THE BUILDING DESIGNER.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

| BEARINGS                |      |      |                                 |      |        |
|-------------------------|------|------|---------------------------------|------|--------|
| FACTORED GROSS REACTION |      |      | MAXIMUM FACTORED GROSS REACTION |      |        |
| JT                      | VERT | HORZ | DOWN                            | HORZ | UPLIFT |
| 4                       | 1384 | 0    | 1384                            | 0    | 0      |
| 6                       | 1267 | 0    | 1267                            | 0    | 0      |

**UNFACTORED REACTIONS**

| 1ST LCASE |          | MAX./MIN. COMPONENT REACTIONS |       |           |       |         |       |
|-----------|----------|-------------------------------|-------|-----------|-------|---------|-------|
| JT        | COMBINED | SNOW                          | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
| 4         | 971      | 679 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 292 / 0 | 0 / 0 |
| 6         | 889      | 622 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 267 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 6

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.45 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| CHORDS |                           |                  |                        | WEBS  |                           |                        |          |
|--------|---------------------------|------------------|------------------------|-------|---------------------------|------------------------|----------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PLF) | MAX. FACTORED LC1 (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. FACTORED LC1 (LC) |          |
| FR-TO  |                           | FROM TO          |                        | FR-TO |                           |                        |          |
| 1-2    | -1345 / 0                 | -77.3 -77.3      | 0.12 (1)               | 5.45  | 5-2                       | 0 / 1252               | 0.31 (1) |
| 2-3    | -9 / 0                    | -77.3 -77.3      | 0.09 (1)               | 10.00 | 2-4                       | -1520 / 0              | 0.37 (1) |
| 4-3    | -96 / 0                   | 0.0 0.0          | 0.02 (1)               | 7.81  | 1-5                       | 0 / 1251               | 0.31 (1) |
| 6-1    | -1015 / 0                 | 0.0 0.0          | 0.11 (1)               | 7.74  |                           |                        |          |
| 6-7    | 0 / 0                     | -102.3 -102.3    | 0.23 (1)               | 10.00 |                           |                        |          |
| 7-5    | 0 / 0                     | -302.7 -302.7    | 0.23 (1)               | 10.00 |                           |                        |          |
| 5-4    | 0 / 1211                  | -302.7 -302.7    | 0.34 (1)               | 10.00 |                           |                        |          |

**FACTORED CONCENTRATED LOADS (LBS)**

| JT | LOC.   | LC1  | MAX- | MAX+ | FACE  | DIR. | TYPE  |
|----|--------|------|------|------|-------|------|-------|
| 7  | 2-4-12 | -851 | -851 | ---  | FRONT | VERT | TOTAL |

**DESIGN CRITERIA**

\*\*\* SPECIAL LOADS ANALYSIS \*\*\*  
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.  
LOADS WERE DERIVED FROM USER INPUT  
NO FURTHER MODIFICATIONS WERE MADE

**SPECIFIED LOADS:**

|            |     |    |   |      |            |
|------------|-----|----|---|------|------------|
| TOP        | CH. | LL | = | 23.3 | PSF        |
|            |     | DL | = | 3.0  | PSF        |
| BOT        | CH. | LL | = | 0.0  | PSF        |
|            |     | DL | = | 7.0  | PSF        |
| TOTAL LOAD |     |    |   |      | = 33.3 PSF |

**SPACING = 24.0 IN./C**

GIRDER TYPE: CStdGirder  
START DISTANCE = 2-4-12  
START SPAN CARRIED = 10-10-14  
END DISTANCE = 6-0-0  
END SPAN CARRIED = 10-10-14  
END WALL WIDTH = 5-8  
APPLIED TO FRONT SIDE OF BOTTOM CHORD.  
- ADDTL LOADS BASED ON 55 % OF GSL.

GIRDER TYPE: CStdGirder  
START DISTANCE = 0-0  
START SPAN CARRIED = 5-6-15  
END DISTANCE = 6-0-0  
END SPAN CARRIED = 5-6-15  
END WALL WIDTH = 0-0  
APPLIED TO FRONT SIDE OF BOTTOM CHORD.  
- ADDTL LOADS BASED ON 55 % OF GSL.

\*\*\* NON STANDARD GIRDER \*\*\*  
ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2010

THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012, BCBC 2012, ABC 2014  
- CSA 086-09  
- TPIC 2011

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")  
ALLOWABLE DEFL.(TL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.03")

CSI: TC=0.12 (1-2:1), BC=0.34 (4-5:1), WB=0.37 (2-4:1), SSI=0.68 (5-6:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00


COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION  
(PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 251 1667 822 2284 1656



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION

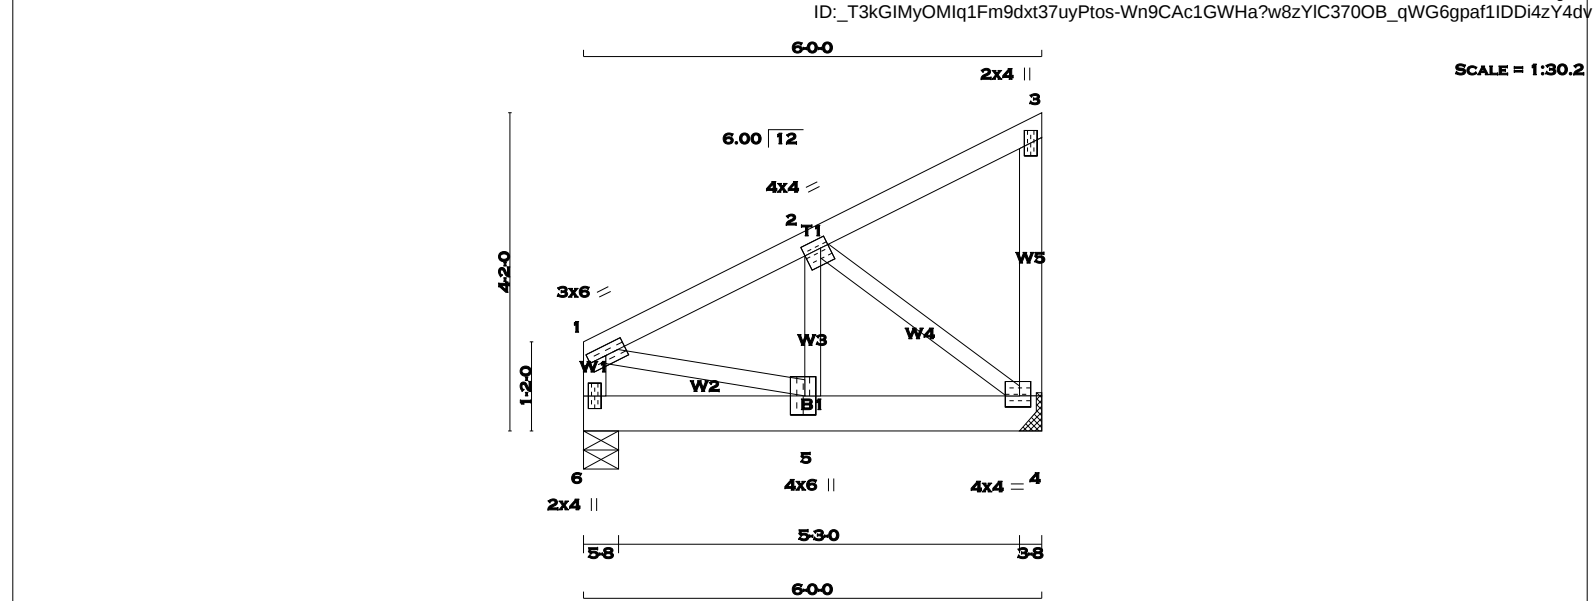

TOTAL WEIGHT = 29 lb  
[M]

| LUMBER            |        |      |        |  | DESCR. |
|-------------------|--------|------|--------|--|--------|
| N. L. G. A. RULES | CHORDS | SIZE | LUMBER |  |        |
| 1 - 3             | 2x4    | DRY  | No.2   |  | SPF    |
| 4 - 3             | 2x4    | DRY  | No.2   |  | SPF    |
| 6 - 1             | 2x4    | DRY  | No.2   |  | SPF    |
| 6 - 4             | 2x6    | DRY  | No.2   |  | SPF    |
| ALL WEBS EXCEPT   | 2x3    | DRY  | No.2   |  | SPF    |

DRY: SEASONED LUMBER.

| PLATES (table is in inches) |         |        |     |     |      |      |
|-----------------------------|---------|--------|-----|-----|------|------|
| JT                          | TYPE    | PLATES | W   | LEN | Y    | X    |
| 1                           | TMVW-t  | MT20   | 3.0 | 6.0 | 1.50 | 2.75 |
| 2                           | TMVW-t  | MT20   | 4.0 | 4.0 | 1.50 | 1.25 |
| 3                           | TMV+p   | MT20   | 2.0 | 4.0 |      |      |
| 4                           | BMVW1-t | MT20   | 4.0 | 4.0 | 1.75 | 1.75 |
| 5                           | BMVW-t  | MT20   | 4.0 | 6.0 | 3.00 | 1.75 |
| 6                           | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |

A SIZE FOR SIZE SUBSTITUTION OF MI TEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

| BEARINGS |  | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG |                     | REQRD BRG |     |
|----------|--|-------------------------|------|---------------------------------|------|-----------|---------------------|-----------|-----|
| JT       |  | VERT                    | HORZ | DOWN                            | HORZ | UPLIFT    | IN-SX               | IN-SX     |     |
| 4        |  | 1363                    | 0    | 1363                            | 0    | 0         | HANGER BY OTHERS    |           |     |
| 6        |  | 1363                    | 0    | 1363                            | 0    | 0         | MIN. SEAT SIZE: 3-8 | 5-8       | 5-8 |

**UNFACTORED REACTIONS**

| 1ST LCASE |          | MAX./MIN. COMPONENT REACTIONS |       |           |       |         |       |  |
|-----------|----------|-------------------------------|-------|-----------|-------|---------|-------|--|
| JT        | COMBINED | SNOW                          | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |  |
| 4         | 957      | 669 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 288 / 0 | 0 / 0 |  |
| 6         | 957      | 669 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 288 / 0 | 0 / 0 |  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 6

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.76 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| CHORDS |                  | FACTORED         |        |               |                | WEBS  |                  |                        |  |
|--------|------------------|------------------|--------|---------------|----------------|-------|------------------|------------------------|--|
| MEMB.  | MAX. FORCE (LBS) | VERT. LOAD (PLF) | LC1    | MAX. CSI (LC) | UNBRAC. LENGTH | MEMB. | MAX. FORCE (LBS) | MAX. FACTORED CSI (LC) |  |
| FR-TO  |                  | FROM             | TO     |               |                | FR-TO |                  |                        |  |
| 1-2    | -1162 / 0        | -77.3            | -77.3  | 0.11 (1)      | 5.76           | 5-2   | 0 / 1045         | 0.26 (1)               |  |
| 2-3    | -9 / 0           | -77.3            | -77.3  | 0.09 (1)      | 10.00          | 2-4   | -1315 / 0        | 0.32 (1)               |  |
| 4-3    | -95 / 0          | 0.0              | 0.0    | 0.02 (1)      | 7.81           | 1-5   | 0 / 1082         | 0.27 (1)               |  |
| 6-1    | -890 / 0         | 0.0              | 0.0    | 0.10 (1)      | 7.81           |       |                  |                        |  |
| 6-5    | 0 / 0            | -377.1           | -377.1 | 0.22 (1)      | 10.00          |       |                  |                        |  |
| 5-4    | 0 / 1048         | -377.1           | -377.1 | 0.36 (1)      | 10.00          |       |                  |                        |  |

**DESIGN CRITERIA**

| SPECIFIED LOADS: |    |      |          |
|------------------|----|------|----------|
| TOP CH.          | LL | =    | 23.3 PSF |
|                  | DL | =    | 3.0 PSF  |
| BOT CH.          | LL | =    | 0.0 PSF  |
|                  | DL | =    | 7.0 PSF  |
| TOTAL LOAD       | =  | 33.3 | PSF      |

**SPACING = 24.0 IN. C/C**

GIRDER TYPE: CStdGirder  
START DISTANCE = 0-0  
START SPAN CARRIED = 17-5-8  
END DISTANCE = 6-0-0  
END SPAN CARRIED = 17-5-8  
END WALL WIDTH = 3-8  
APPLIED TO FRONT SIDE OF BOTTOM CHORD.  
- ADDTL LOADS BASED ON 55 % OF GSL.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010

THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012 , BCBC 2012 , ABC 2014  
- CSA 086-09  
- TPIC 2011

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")  
ALLOWABLE DEFL.(TL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.03")

CSI: TC=0.11 (1-2:1) , BC=0.36 (4-5:1) , WB=0.32 (2-4:1) , SSI=0.44 (5-6:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

| NAIL VALUES |           |       |         |         |           |
|-------------|-----------|-------|---------|---------|-----------|
| PLATE       | GRIP(DRY) | SHEAR | SECTION | (PLI)   | (PLI)     |
|             |           |       |         | MAX MIN | MAX MIN   |
| MT20        | 618       | 354   | 1667    | 822     | 2284 1656 |

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.87 (1) (INPUT = 0.90 )  
JSI METAL= 0.39 (2) (INPUT = 1.00 )



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION



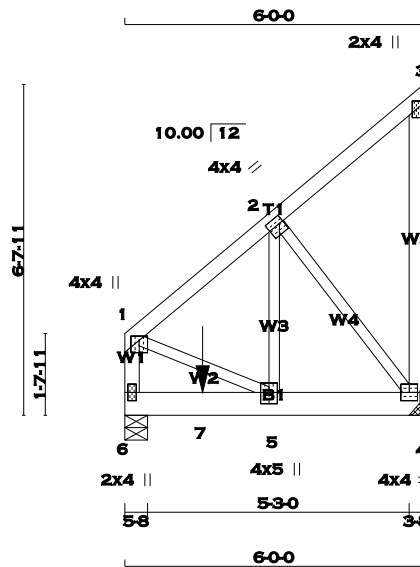

SCALE = 1:46.2

TOTAL WEIGHT = 36 lb

| LUMBER            |        |      |        |  | DESCR. |
|-------------------|--------|------|--------|--|--------|
| N. L. G. A. RULES | CHORDS | SIZE | LUMBER |  |        |
| 1 - 3             | 2x4    | DRY  | No.2   |  | SPF    |
| 4 - 3             | 2x4    | DRY  | No.2   |  | SPF    |
| 6 - 1             | 2x4    | DRY  | No.2   |  | SPF    |
| 6 - 4             | 2x6    | DRY  | No.2   |  | SPF    |
| ALL WEBS EXCEPT   |        |      |        |  | SPF    |
| 2x3               |        |      |        |  | DRY    |
| No.2              |        |      |        |  |        |
| SPF               |        |      |        |  |        |

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| 1  | TMWV+p  | MT20   | 4.0 | 4.0 | 1.00 | 2.00 |
| 2  | TMWV-t  | MT20   | 4.0 | 4.0 | 1.75 | 1.00 |
| 3  | TMV+p   | MT20   | 2.0 | 4.0 |      |      |
| 4  | BMWV1-t | MT20   | 4.0 | 4.0 |      |      |
| 5  | BMWV+t  | MT20   | 4.0 | 5.0 | 2.75 | 2.00 |
| 6  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |

A SIZE FOR SIZE SUBSTITUTION OF MI TEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

**HANGERS NOTES**

- SPECIAL HANGER(S) OR CONNECTION(S) REQUIRED TO SUPPORT CONCENTRATED LOAD(S) 837.8 lbs FACTORED DOWN AT 1-6-12 ON BOTTOM CHORD. DESIGN FOR UNSPECIFIED CONNECTION(S) IS DELEGATED TO THE BUILDING DESIGNER.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

| FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG |        | REQRD BRG        |                     |
|-------------------------|------|---------------------------------|------|-----------|--------|------------------|---------------------|
| JT                      | VERT | HORZ                            | DOWN | HORZ      | UPLIFT | IN-SX            | IN-SX               |
| 4                       | 1047 | 0                               | 1047 | 0         | 0      | HANGER BY OTHERS | MIN. SEAT SIZE: 3-8 |
| 6                       | 1223 | 0                               | 1223 | 0         | 0      | 5-8              | 5-8                 |

**UNFACTORED REACTIONS**

| JT | 1ST LCASE | MAX./MIN. | SNOW  | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
|----|-----------|-----------|-------|-------|-----------|-------|---------|-------|
| 4  | 735       | 514 / 0   | 0 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 221 / 0 | 0 / 0 |
| 6  | 859       | 601 / 0   | 0 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 258 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 6

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| CHORDS |                           |                  |                        | WEBS                 |       |                           |                        |
|--------|---------------------------|------------------|------------------------|----------------------|-------|---------------------------|------------------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PLF) | MAX. FACTORED LC1 (LC) | MAX. UNBRACED LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. FACTORED LC1 (LC) |
| FR-TO  |                           | FROM             | TO                     |                      | FR-TO |                           |                        |
| 1-2    | -764 / 0                  | -77.3            | -77.3 0.13 (1)         | 6.25                 | 5-2   | 0 / 960                   | 0.24 (1)               |
| 2-3    | -16 / 0                   | -77.3            | -77.3 0.12 (1)         | 6.25                 | 2-4   | -955 / 0                  | 0.34 (1)               |
| 4-3    | -90 / 0                   | 0.0              | 0.0 0.08 (1)           | 7.81                 | 1-5   | 0 / 647                   | 0.16 (1)               |
| 6-1    | -834 / 0                  | 0.0              | 0.0 0.10 (1)           | 7.81                 |       |                           |                        |
| 6-7    | 0 / 0                     | -17.5            | -17.5 0.43 (1)         | 10.00                |       |                           |                        |
| 7-5    | 0 / 0                     | -212.1           | -212.1 0.43 (1)        | 10.00                |       |                           |                        |
| 5-4    | 0 / 599                   | -212.1           | -212.1 0.31 (1)        | 10.00                |       |                           |                        |

**FACTORED CONCENTRATED LOADS (LBS)**

| JT | LOC.   | LC1  | MAX- | MAX+ | FACE  | DIR. | TYPE  |
|----|--------|------|------|------|-------|------|-------|
| 7  | 1-6-12 | -838 | -838 | ---  | FRONT | VERT | TOTAL |

**DESIGN CRITERIA**

\*\*\* SPECIAL LOADS ANALYSIS \*\*\*  
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.  
LOADS WERE DERIVED FROM USER INPUT  
NO FURTHER MODIFICATIONS WERE MADE

**SPECIFIED LOADS:**

|            |    |   |      |            |
|------------|----|---|------|------------|
| TOP CH.    | LL | = | 23.3 | PSF        |
|            | DL | = | 3.0  | PSF        |
| BOT CH.    | LL | = | 0.0  | PSF        |
|            | DL | = | 7.0  | PSF        |
| TOTAL LOAD |    |   |      | = 33.3 PSF |

**SPACING = 24.0 IN. C/C**

GIRDER TYPE: CStdGirder  
START DISTANCE = 1-6-12  
START SPAN CARRIED = 10-8-0  
END DISTANCE = 6-0-0  
END SPAN CARRIED = 10-8-0  
END WALL WIDTH = 5-8  
APPLIED TO FRONT SIDE OF BOTTOM CHORD.  
- ADDT'L LOADS BASED ON 55 % OF GSL.

\*\*\* NON STANDARD GIRDER \*\*\*  
ADDT'L USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010

THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012 , BCBC 2012 , ABC 2014  
- CSA 086-09  
- TPIC 2011

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.02")  
ALLOWABLE DEFL.(TL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.03")

CSI: TC=0.13 (1-2:1) , BC=0.43 (5-6:1) , WB=0.34 (2-4:1) , SSI=0.52 (5-6:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

| NAIL VALUES |           |       |         |     |      |
|-------------|-----------|-------|---------|-----|------|
| PLATE       | GRIP(DRY) | SHEAR | SECTION |     |      |
|             | (PSI)     | (PLI) | (PLI)   |     |      |
|             | MAX       | MIN   | MAX     | MIN | MAX  |
| MT20        | 618       | 354   | 1667    | 822 | 2284 |

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.84 (2) (INPUT = 0.90 )  
JSI METAL= 0.22 (4) (INPUT = 1.00 )



**RECEIVED**  
**TOWN OF MILTON**  
**MAR 29, 2017**  
**17-4690**  
**BUILDING DIVISION**



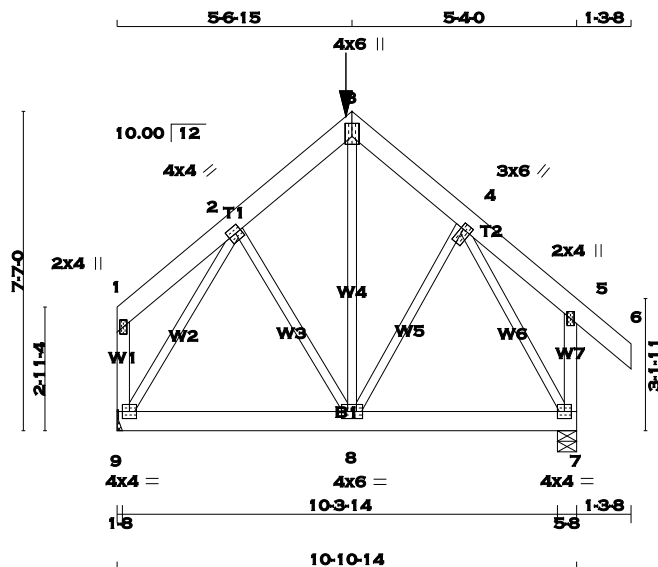

SCALE = 1:54.7

TOTAL WEIGHT = 76 lb [M]

| LUMBER            |        |      |        |  | DESCR. |
|-------------------|--------|------|--------|--|--------|
| N. L. G. A. RULES | CHORDS | SIZE | LUMBER |  |        |
| 1 - 3             | 2x6    | DRY  | No.2   |  | SPF    |
| 3 - 6             | 2x6    | DRY  | No.2   |  | SPF    |
| 9 - 1             | 2x4    | DRY  | No.2   |  | SPF    |
| 7 - 5             | 2x4    | DRY  | No.2   |  | SPF    |
| 9 - 7             | 2x6    | DRY  | No.2   |  | SPF    |
| ALL WEBS EXCEPT   | 2x3    | DRY  | No.2   |  | SPF    |

DRY: SEASONED LUMBER.

#### PLATES (table is in inches)

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| 1  | TMV+p   | MT20   | 2.0 | 4.0 |      |      |
| 2  | TMVW-t  | MT20   | 4.0 | 4.0 | 2.00 | 1.75 |
| 3  | TTW+p   | MT20   | 4.0 | 6.0 | 3.75 | 2.00 |
| 4  | TMVW+t  | MT20   | 3.0 | 6.0 | 1.75 | 0.75 |
| 5  | TMV+p   | MT20   | 2.0 | 4.0 |      |      |
| 7  | BMVW1-t | MT20   | 4.0 | 4.0 |      |      |
| 8  | BMVW1-t | MT20   | 4.0 | 6.0 |      |      |
| 9  | BMVW1-t | MT20   | 4.0 | 4.0 |      |      |

A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

#### HANGERS NOTES

- SPECIAL HANGER(S) OR CONNECTION(S) REQUIRED TO SUPPORT CONCENTRATED LOAD(S) 539.2 lbs FACTORED DOWN AT 5-6-15 ON TOP CHORD. DESIGN FOR UNSPECIFIED CONNECTION(S) IS DELEGATED TO THE BUILDING DESIGNER.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |  | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG |       | REQRD BRG        |       |
|----------|--|-------------------------|------|---------------------------------|------|-----------|-------|------------------|-------|
| JT       |  | VERT                    | HORZ | DOWN                            | HORZ | IN-SX     | IN-SX | IN-SX            | IN-SX |
| 9        |  | 849                     | 0    | 849                             | 0    | 0         |       | HANGER BY OTHERS |       |
| 7        |  | 973                     | 0    | 973                             | 0    | 0         | 5-8   | 5-8              |       |

#### UNFACTORED REACTIONS

| 1ST LCASE |          | MAX./MIN. COMPONENT REACTIONS |       | LIVE  |       | PERM.LIVE |       | WIND    |       | DEAD    |       | SOIL  |       |
|-----------|----------|-------------------------------|-------|-------|-------|-----------|-------|---------|-------|---------|-------|-------|-------|
| JT        | COMBINED | SNOW                          |       |       |       |           |       |         |       |         |       |       |       |
| 9         | 597      | 413 / 0                       | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 184 / 0 | 0 / 0 | 184 / 0 | 0 / 0 | 0 / 0 | 0 / 0 |
| 7         | 681      | 487 / 0                       | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 194 / 0 | 0 / 0 | 194 / 0 | 0 / 0 | 0 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 7

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |             | FACTORED         |          | MAX. FACTORED |               | WEBS  |             | FACTORED  |               |
|--------|-------------|------------------|----------|---------------|---------------|-------|-------------|-----------|---------------|
| MEMB.  | FORCE (LBS) | VERT. LOAD (PLF) | LC1 (LC) | MAX. (LC)     | UNBRAC LENGTH | MEMB. | FORCE (LBS) | MAX. (LC) | UNBRAC LENGTH |
| FR-TO  |             |                  |          |               |               | FR-TO |             |           |               |
| 1-2    | 0 / 10      | -77.3            | -77.3    | 0.04 (1)      | 10.00         | 2-8   | 0 / 82      | 0.02 (1)  | 10.00         |
| 2-3    | -591 / 0    | -77.3            | -77.3    | 0.04 (1)      | 6.25          | 8-3   | 0 / 128     | 0.05 (4)  | 6.25          |
| 3-4    | -590 / 0    | -77.3            | -77.3    | 0.04 (1)      | 6.25          | 8-4   | 0 / 117     | 0.03 (1)  | 6.25          |
| 4-5    | -1 / 9      | -77.3            | -77.3    | 0.04 (1)      | 10.00         | 9-2   | -799 / 0    | 0.37 (1)  | 10.00         |
| 5-6    | 0 / 36      | -77.3            | -77.3    | 0.06 (1)      | 10.00         | 4-7   | -808 / 0    | 0.38 (1)  | 10.00         |
| 9-1    | -92 / 0     | 0.0              | 0.0      | 0.01 (1)      | 7.81          |       |             |           |               |
| 7-5    | -200 / 0    | 0.0              | 0.0      | 0.03 (1)      | 7.81          |       |             |           |               |
| 9-8    | 0 / 405     | -30.1            | -30.1    | 0.15 (4)      | 10.00         |       |             |           |               |
| 8-7    | 0 / 390     | -30.1            | -30.1    | 0.15 (4)      | 10.00         |       |             |           |               |

#### FACTORED CONCENTRATED LOADS (LBS)

| JT | LOC.   | LC1  | MAX- | MAX+ | FACE  | DIR. | TYPE  |
|----|--------|------|------|------|-------|------|-------|
| 3  | 5-6-15 | -539 | -539 | ---  | FRONT | VERT | TOTAL |

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |      |      |     |
|------------|------|------|-----|
| TOP CH.    | LL = | 23.3 | PSF |
|            | DL = | 3.0  | PSF |
| BOT CH.    | LL = | 0.0  | PSF |
|            | DL = | 7.0  | PSF |
| TOTAL LOAD | =    | 33.3 | PSF |

##### SPACING = 24.0 IN. C/C

GIRDER TYPE: CPrimeHip  
LEFT SETBACK = 5-6-15  
RIGHT SETBACK = 5-4-0  
END SETBACK = 5-4-0  
END WALL WIDTH = 5-8  
CORNER FRAMING TYPE: CONVENTIONAL  
END JACK TYPE: CONVENTIONAL  
APPLIED TO FRONT SIDE  
- ADDTL LOADS BASED ON 55 % OF GSL.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010

THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012 , BCBC 2012 , ABC 2014  
- CSA 086-09  
- TPIC 2011

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.36")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")  
ALLOWABLE DEFL.(TL)= L/360 (0.36")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.02")

CSI: TC=0.06 (5-6:1) , BC=0.15 (8-9:4) , WB=0.38 (4-7:1) , SSI=0.12 (8-9:4)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION  
(PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1667 822 2284 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (4) (INPUT = 0.90 )  
JSI METAL= 0.33 (4) (INPUT = 1.00 )



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION



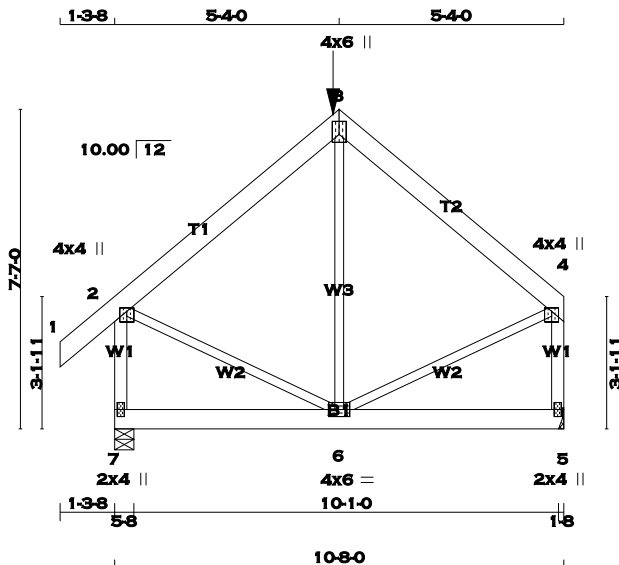

SCALE = 1:54.7

TOTAL WEIGHT = 68 lb

| LUMBER            |      |        |        |     |
|-------------------|------|--------|--------|-----|
| N. L. G. A. RULES |      |        |        |     |
| CHORDS            | SIZE | LUMBER | DESCR. |     |
| 1 - 3             | 2x6  | DRY    | No.2   | SPF |
| 3 - 4             | 2x6  | DRY    | No.2   | SPF |
| 7 - 2             | 2x4  | DRY    | No.2   | SPF |
| 5 - 4             | 2x4  | DRY    | No.2   | SPF |
| 7 - 5             | 2x6  | DRY    | No.2   | SPF |

ALL WEBS 2x3 DRY No.2 SPF  
EXCEPT

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| 2  | TMVW+p  | MT20   | 4.0 | 4.0 | 1.00 | 2.00 |
| 3  | TTW+p   | MT20   | 4.0 | 6.0 | 3.75 | 2.00 |
| 4  | TMVW+p  | MT20   | 4.0 | 4.0 | 1.00 | 2.00 |
| 5  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |
| 6  | BMVWW-t | MT20   | 4.0 | 6.0 |      |      |
| 7  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |

A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

**HANGERS NOTES**

- 1) SPECIAL HANGER(S) OR CONNECTION(S) REQUIRED TO SUPPORT CONCENTRATED LOAD(S) 527.1 lbs FACTORED DOWN AT 5-4-0 ON TOP CHORD. DESIGN FOR UNSPECIFIED CONNECTION(S) IS DELEGATED TO THE BUILDING DESIGNER.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

|                     | FACTORED       |      | MAXIMUM FACTORED |      | INPUT  | REQRD            |
|---------------------|----------------|------|------------------|------|--------|------------------|
|                     | GROSS REACTION |      | GROSS REACTION   |      | BRG    | BRG              |
| JT                  | VERT           | HORZ | DOWN             | HORZ | UPLIFT | IN-SX            |
| 7                   | 948            | 0    | 948              | 0    | 0      | 5-8              |
| 5                   | 836            | 0    | 836              | 0    | 0      | HANGER BY OTHERS |
| MIN. SEAT SIZE: 1-8 |                |      |                  |      |        |                  |

**UNFACTORED REACTIONS**

| 1ST LCASE |          | MAX./MIN. COMPONENT REACTIONS |       |           |       |         |       |
|-----------|----------|-------------------------------|-------|-----------|-------|---------|-------|
| JT        | COMBINED | SNOW                          | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
| 7         | 663      | 474 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 189 / 0 | 0 / 0 |
| 5         | 588      | 407 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 181 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 7

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| CHORDS        |          |            |          | WEBS          |       |       |            |
|---------------|----------|------------|----------|---------------|-------|-------|------------|
| MAX. FACTORED |          | FACTORED   |          | MAX. FACTORED |       |       |            |
| MEMB.         | FORCE    | VERT. LOAD | LC1 MAX. | MAX.          | MEMB. | FORCE | MAX.       |
|               | (LBS)    | (PLF)      | CSI (LC) | UNBRAC        |       | (LBS) | CSI (LC)   |
| FR-TO         |          | FROM       | TO       | LENGTH        | FR-TO |       |            |
| 1-2           | 0 / 36   | -77.3      | -77.3    | 0.06 (1)      | 10.00 | 6-3   | -226 / 102 |
| 2-3           | -557 / 0 | -77.3      | -77.3    | 0.21 (1)      | 6.25  | 2-6   | 0 / 477    |
| 3-4           | -557 / 0 | -77.3      | -77.3    | 0.21 (1)      | 6.25  | 6-4   | 0 / 477    |
| 7-2           | -884 / 0 | 0.0        | 0.0      | 0.14 (1)      | 7.81  |       |            |
| 5-4           | -773 / 0 | 0.0        | 0.0      | 0.12 (1)      | 7.81  |       |            |
|               |          |            |          |               |       |       |            |
| 7-6           | 0 / 0    | -30.1      | -30.1    | 0.13 (4)      | 10.00 |       |            |
| 6-5           | 0 / 0    | -30.1      | -30.1    | 0.13 (4)      | 10.00 |       |            |

**FACTORED CONCENTRATED LOADS (LBS)**

| JT | LOC.  | LC1  | MAX- | MAX+ | FACE  | DIR. | TYPE  |
|----|-------|------|------|------|-------|------|-------|
| 3  | 5-4-0 | -527 | -527 | ---  | FRONT | VERT | TOTAL |

**DESIGN CRITERIA**

SPECIFIED LOADS:  
TOP CH. LL = 23.3 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.0 PSF  
TOTAL LOAD = 33.3 PSF

**SPACING = 24.0 IN./C**

GIRDER TYPE: CPrimeHip  
SIDE SETBACK = 5-4-0  
END SETBACK = 5-4-0  
END WALL WIDTH = 5-8  
CORNER FRAMING TYPE: CONVENTIONAL  
END JACK TYPE: CONVENTIONAL  
APPLIED TO FRONT SIDE  
- ADDTL LOADS BASED ON 55 % OF GSL.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC2010

THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012, BCBC 2012, ABC 2014  
- CSA 086-09  
- TPIC 2011

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.36")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")  
ALLOWABLE DEFL.(TL)= L/360 (0.36")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.01")

CSI: TC=0.21 (2-3:1), BC=0.13 (6-7:4), WB=0.20 (3-6:1), SSI=0.11 (6-7:4)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION  
(PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1667 822 2284 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.72 (4) (INPUT = 0.90 )  
JSI METAL= 0.20 (4) (INPUT = 1.00 )



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION



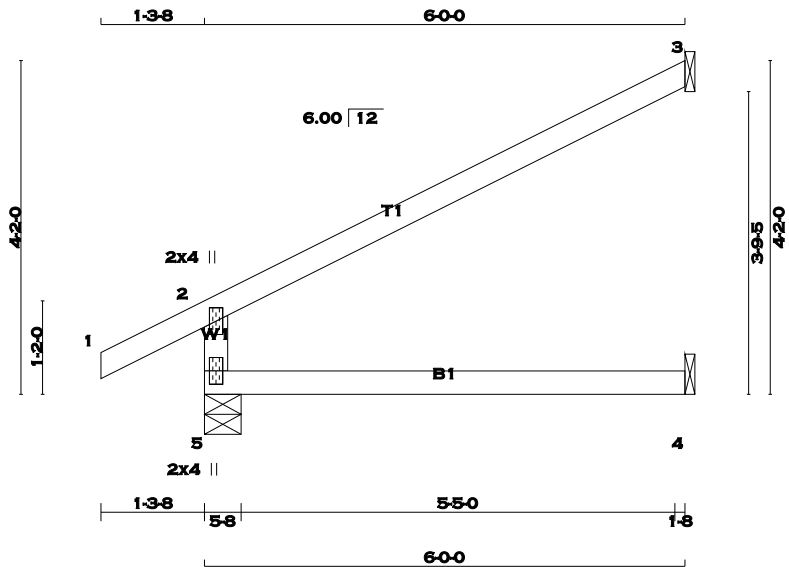

TOTAL WEIGHT = 23 X 17 = 393 lb [M]

| LUMBER            |        |      |        |  | DESCR. |
|-------------------|--------|------|--------|--|--------|
| N. L. G. A. RULES | CHORDS | SIZE | LUMBER |  |        |
| 5 - 2             | 2x4    | DRY  | No.2   |  | SPF    |
| 1 - 3             | 2x4    | DRY  | No.2   |  | SPF    |
| 5 - 4             | 2x4    | DRY  | No.2   |  | SPF    |

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE   | PLATES | W   | LEN | Y | X |
|----|--------|--------|-----|-----|---|---|
| 2  | TMV+p  | MT20   | 2.0 | 4.0 |   |   |
| 5  | BMV1+p | MT20   | 2.0 | 4.0 |   |   |

A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG |       | REQRD BRG |  |
|----|-------------------------|------|---------------------------------|------|-----------|-------|-----------|--|
|    | VERT                    | HORZ | DOWN                            | HORZ | UPLIFT    | IN-SX | IN-SX     |  |
| 5  | 457                     | 0    | 457                             | 0    | 0         | 5-8   | 5-8       |  |
| 3  | 174                     | 0    | 174                             | 0    | 0         | 1-8   | 1-8       |  |
| 4  | 43                      | 0    | 49                              | 0    | 0         | 1-8   | 1-8       |  |

SEE MITEK STANDARD DETAIL B37579H FOR CONNECTION TO JOINT(S) 3 , 4

**UNFACTORED REACTIONS**

| JT | 1ST LCASE COMBINED |      | MAX./MIN. SNOW |      | LIVE  |      | PERM.LIVE |      | WIND  |      | DEAD   |      | SOIL  |      |
|----|--------------------|------|----------------|------|-------|------|-----------|------|-------|------|--------|------|-------|------|
|    | VERT               | HORZ | DOWN           | HORZ | DOWN  | HORZ | DOWN      | HORZ | DOWN  | HORZ | DOWN   | HORZ | DOWN  | HORZ |
| 5  | 318                |      | 238 / 0        |      | 0 / 0 |      | 0 / 0     |      | 0 / 0 |      | 80 / 0 |      | 0 / 0 |      |
| 3  | 118                |      | 105 / 0        |      | 0 / 0 |      | 0 / 0     |      | 0 / 0 |      | 14 / 0 |      | 0 / 0 |      |
| 4  | 35                 |      | 0 / 0          |      | 0 / 0 |      | 0 / 0     |      | 0 / 0 |      | 35 / 0 |      | 0 / 0 |      |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 5

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| MEMB. | CHORDS MAX. FACTORED |                  | FACTORED |          | WEBS MAX. FACTORED |               |
|-------|----------------------|------------------|----------|----------|--------------------|---------------|
|       | FORCE (LBS)          | VERT. LOAD (PLF) | LC1 (LC) | UNBRAC   | FORCE (LBS)        | MAX. CSI (LC) |
| FR-TO |                      | FROM             | TO       | LENGTH   | FR-TO              |               |
| 5-2   | -395 / 0             | 0.0              | 0.0      | 0.13 (4) | 7.81               |               |
| 1-2   | 0 / 23               | -77.3            | -77.3    | 0.10 (1) | 10.00              |               |
| 2-3   | -26 / 0              | -77.3            | -77.3    | 0.47 (1) | 6.25               |               |
| 5-4   | 0 / 0                | -17.5            | -17.5    | 0.13 (4) | 10.00              |               |

**DESIGN CRITERIA**

SPECIFIED LOADS:  
TOP CH. LL = 23.3 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.0 PSF  
TOTAL LOAD = 33.3 PSF

**SPACING = 24.0 IN. C/C**

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010

THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012 , BCBC 2012 , ABC 2014  
- CSA 086-09  
- TPIC 2011

DESIGN ASSUMPTIONS  
-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")  
ALLOWABLE DEFL.(TL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.03")

CSI: TC=0.47 (2-3:1) , BC=0.13 (4-5:4) , WB=0.00 (n/a:0) , SSI=0.20 (2-3:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION  
(PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1667 822 2284 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.23 (2) (INPUT = 0.90 )  
JSI METAL= 0.09 (2) (INPUT = 1.00 )



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION



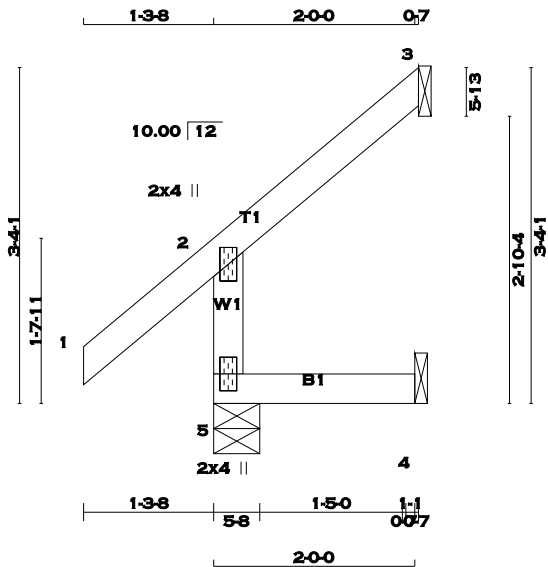

SCALE = 1:22.9

TOTAL WEIGHT = 9 lb [M]

| LUMBER            |        |      |        |      | DESCR. |
|-------------------|--------|------|--------|------|--------|
| N. L. G. A. RULES | CHORDS | SIZE | LUMBER | No.2 |        |
| 5 - 2             | 2x4    | DRY  | No.2   | SPF  |        |
| 1 - 3             | 2x4    | DRY  | No.2   | SPF  |        |
| 5 - 4             | 2x4    | DRY  | No.2   | SPF  |        |

DRY: SEASONED LUMBER.

| PLATES (table is in inches) |        |        |     |     |     |
|-----------------------------|--------|--------|-----|-----|-----|
| JT                          | TYPE   | PLATES | W   | LEN | Y X |
| 2                           | TMV+p  | MT20   | 2.0 | 4.0 |     |
| 5                           | BMV1+p | MT20   | 2.0 | 4.0 |     |

A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG |       | REQRD BRG |  |
|----|-------------------------|------|---------------------------------|------|-----------|-------|-----------|--|
|    | VERT                    | HORZ | DOWN                            | HORZ | UPLIFT    | IN-SX | IN-SX     |  |
| 5  | 224                     | 0    | 224                             | 0    | 0         | 5-8   | 5-8       |  |
| 3  | 60                      | 0    | 60                              | 0    | 0         | 1-8   | 1-8       |  |
| 4  | 16                      | 0    | 18                              | 0    | 0         | 1-8   | 1-8       |  |

SEE MITEK STANDARD DETAIL B37579H FOR CONNECTION TO JOINT(S) 3 , 4

**UNFACTORED REACTIONS**

| JT | 1ST LCASE |         | MAX./MIN. COMPONENT REACTIONS |       | LIVE  | PERM.LIVE | WIND   | DEAD  | SOIL  |
|----|-----------|---------|-------------------------------|-------|-------|-----------|--------|-------|-------|
|    | COMBINED  | SNOW    | VERT                          | HORZ  |       |           |        |       |       |
| 5  | 155       | 123 / 0 | 0 / 0                         | 0 / 0 | 0 / 0 | 0 / 0     | 31 / 0 | 0 / 0 | 0 / 0 |
| 3  | 41        | 36 / 0  | 0 / 0                         | 0 / 0 | 0 / 0 | 0 / 0     | 5 / 0  | 0 / 0 | 0 / 0 |
| 4  | 13        | 0 / 0   | 0 / 0                         | 0 / 0 | 0 / 0 | 0 / 0     | 13 / 0 | 0 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 5

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (5)

| MEMB. | CHORDS           |                  | FACTORED      |                  | WEBS              |               | FACTORED         |               |
|-------|------------------|------------------|---------------|------------------|-------------------|---------------|------------------|---------------|
|       | MAX. FORCE (LBS) | VERT. LOAD (PLF) | MAX. LC1 (LC) | MAX. UNBRAC (LC) | MEMB. FORCE (LBS) | MAX. LC1 (LC) | MAX. FORCE (LBS) | MAX. LC1 (LC) |
| FR-TO |                  |                  |               |                  | FR-TO             |               |                  |               |
| 5-2   | -205 / 0         | 0.0              | 0.0           | 0.01 (4)         | 7.81              |               |                  |               |
| 1-2   | 0 / 34           | -77.3            | -77.3         | 0.11 (1)         | 10.00             |               |                  |               |
| 2-3   | -12 / 0          | -77.3            | -77.3         | 0.05 (1)         | 6.25              |               |                  |               |
| 5-4   | 0 / 0            | -17.5            | -17.5         | 0.02 (4)         | 10.00             |               |                  |               |

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

**DESIGN CRITERIA**

SPECIFIED LOADS:  
TOP CH. LL = 23.3 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.0 PSF  
TOTAL LOAD = 33.3 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010

THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012 , BCBC 2012 , ABC 2014  
- CSA 086-09  
- TPIC 2011

DESIGN ASSUMPTIONS  
-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")  
ALLOWABLE DEFL.(TL)= L/360 (0.19")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.00")

CSI: TC=0.11 (1-2:1) , BC=0.02 (4-5:4) , WB=0.00 (n/a:0) , SSI=0.06 (1-2:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION  
(PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1667 822 2284 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.15 (2) (INPUT = 0.90 )  
JSI METAL= 0.06 (2) (INPUT = 1.00 )



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION



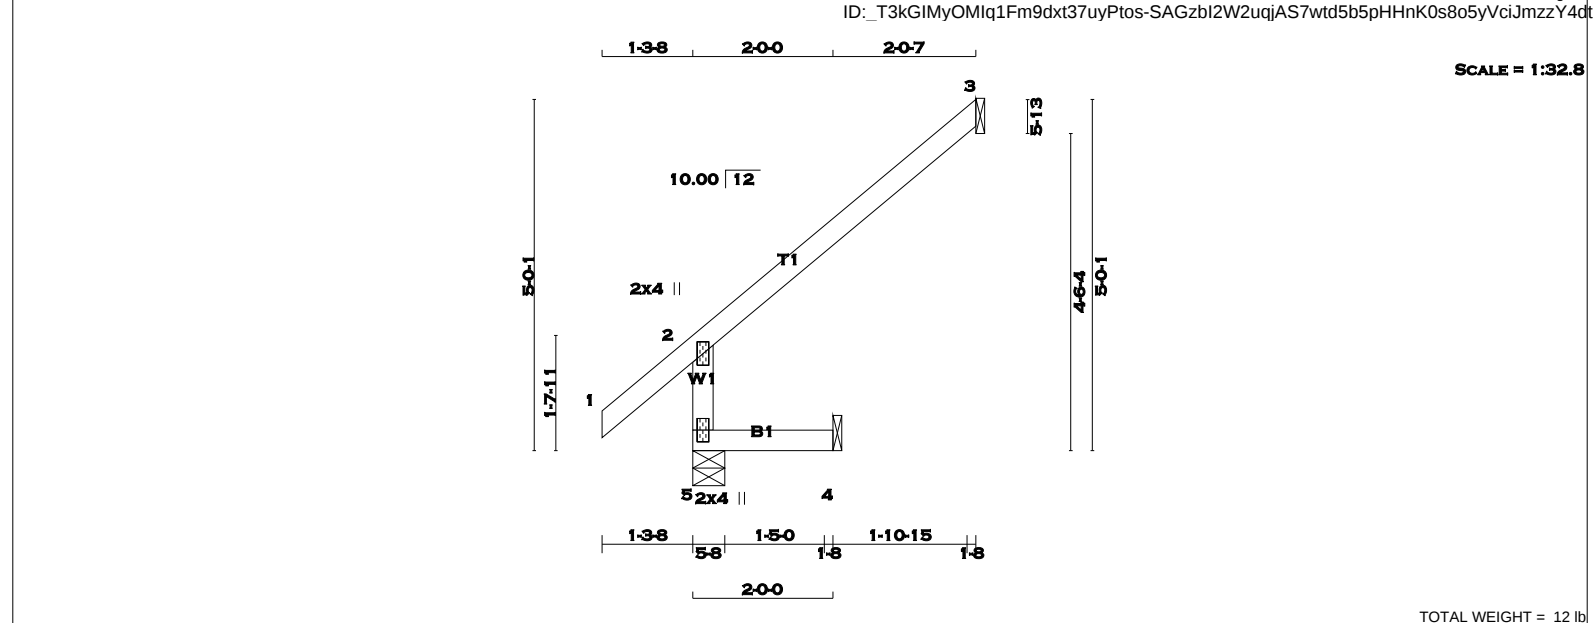

LUMBER

N. L. G. A. RULES

CHORDS

SIZE

DRY

No.2

DESCR.

SPF

SPF

SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT

TYPE

PLATES

W

LEN

Y

X

2

TMV+p

MT20

2.0

4.0

5

BMV1+p

MT20

2.0

4.0

A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

FACTORED

GROSS REACTION

MAXIMUM FACTORED

GROSS REACTION

INPUT

BRG

REQRD

BRG

JT

VERT

HORZ

DOWN

HORZ

UPLIFT

IN-SX

IN-SX

5

321

0

321

0

0

5-8

5-8

3

117

0

117

0

0

1-8

1-8

4

16

0

18

0

0

1-8

1-8

SEE MITEK STANDARD DETAIL B37579H FOR CONNECTION TO JOINT(S) 3 , 4

UNFACTORED REACTIONS

1ST LCASE

MAX./MIN. COMPONENT REACTIONS

JT

COMBINED

SNOW

LIVE

PERM.LIVE

WIND

DEAD

SOIL

5

221

182 / 0

0 / 0

0 / 0

0 / 0

39 / 0

0 / 0

3

80

71 / 0

0 / 0

0 / 0

0 / 0

9 / 0

0 / 0

4

13

0 / 0

0 / 0

0 / 0

0 / 0

13 / 0

0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 5

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS

MAX. FACTORED

FACTORED

VERT. LOAD

LC1

MAX

MAX.

MEMB.

FORCE

(LBS)

(PLF)

CSI (LC)

UNBRAC

MEMB.

FORCE

MAX

CSI (LC)

FR-TO

FROM

TO

LENGTH

FR-TO

5-2

-302 / 0

0.0

0.0

0.01 (4)

7.81

1-2

0 / 34

-77.3

-77.3

0.11 (1)

10.00

2-3

-25 / 0

-77.3

-77.3

0.21 (1)

6.25

5-4

0 / 0

-17.5

-17.5

0.02 (4)

10.00

WEBS

MAX. FACTORED

FORCE

MAX

CSI (LC)

ALLOWABLE DEFL.(LL)= L/360 (0.19")

CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")

ALLOWABLE DEFL.(TL)= L/360 (0.19")

CALCULATED VERT. DEFL.(TL) = L/ 999 (0.00")

CSI: TC=0.21 (2-3:1) , BC=0.02 (4-5:4) , WB=0.00 (n/a:0) , SSI=0.12 (2-3:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10

COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION

(PSI) (PLI) (PLI)

MAX MIN MAX MIN MAX MIN

MT20 618 354 1667 822 2284 1656

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.22 (2) (INPUT = 0.90 )

JSI METAL= 0.08 (2) (INPUT = 1.00 )

TOTAL WEIGHT = 12 lb [M]



RECEIVED

TOWN OF MILTON

MAR 29, 2017

17-4690


BUILDING DIVISION



KOTT , Stouffville, ON, CGC

Version 8.100 S Feb 9 2017 MiTek Industries, Inc. Thu Mar 23 11:19:35 2017 Page 1

ID: \_T3kGIMyOMIq1Fm9dxt37uyPtos-wMqLoe38pCyanci7QKdqe0pSWkKItFL6kGRtJPzY4ds

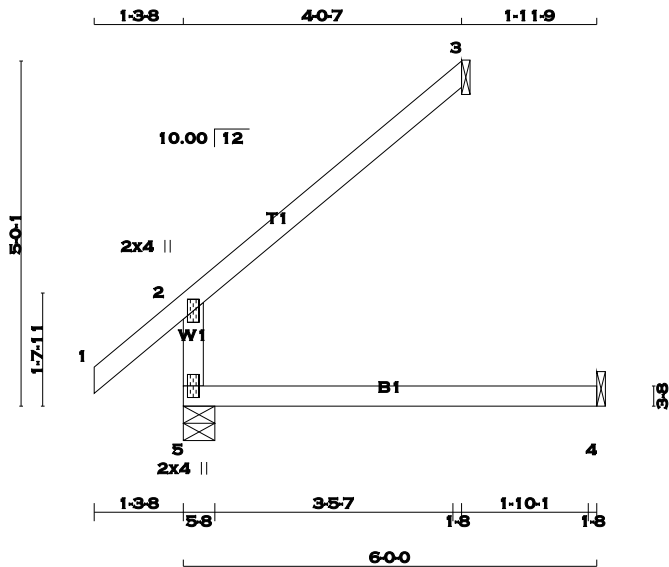

TOTAL WEIGHT = 16 lb [M]

| LUMBER            |      |        |      | DESCR. |
|-------------------|------|--------|------|--------|
| N. L. G. A. RULES | SIZE | LUMBER |      |        |
| CHORDS            | SIZE | No.2   |      | SPF    |
| 5 - 2             | 2x4  | DRY    | No.2 | SPF    |
| 1 - 3             | 2x4  | DRY    | No.2 | SPF    |
| 5 - 4             | 2x4  | DRY    | No.2 | SPF    |

DRY: SEASONED LUMBER.

PLATES (table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y | X |
|----|--------|--------|-----|-----|---|---|
| 2  | TMV+p  | MT20   | 2.0 | 4.0 |   |   |
| 5  | BMV1+p | MT20   | 2.0 | 4.0 |   |   |

A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG |       | REQRD BRG |  |
|----|-------------------------|------|---------------------------------|------|-----------|-------|-----------|--|
|    | VERT                    | HORZ | DOWN                            | HORZ | UPLIFT    | IN-SX | IN-SX     |  |
| 5  | 363                     | 0    | 363                             | 0    | 0         | 5-8   | 5-8       |  |
| 3  | 117                     | 0    | 117                             | 0    | 0         | 1-8   | 1-8       |  |
| 4  | 45                      | 0    | 50                              | 0    | 0         | 1-8   | 1-8       |  |

SEE MITEK STANDARD DETAIL B37579H FOR CONNECTION TO JOINT(S) 3 , 4

UNFACTORED REACTIONS

| JT | 1ST LCASE |         | MAX./MIN. COMPONENT REACTIONS |       | WIND  | DEAD   | SOIL  |
|----|-----------|---------|-------------------------------|-------|-------|--------|-------|
|    | COMBINED  | SNOW    | LIVE                          | PERM. |       |        |       |
| 5  | 254       | 182 / 0 | 0 / 0                         | 0 / 0 | 0 / 0 | 72 / 0 | 0 / 0 |
| 3  | 80        | 71 / 0  | 0 / 0                         | 0 / 0 | 0 / 0 | 9 / 0  | 0 / 0 |
| 4  | 36        | 0 / 0   | 0 / 0                         | 0 / 0 | 0 / 0 | 36 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 5, 3

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

| MEMB. | CHORDS           |                  | FACTORED |           | WEBS              |           | FACTORED          |           |
|-------|------------------|------------------|----------|-----------|-------------------|-----------|-------------------|-----------|
|       | MAX. FORCE (LBS) | VERT. LOAD (PLF) | LC1      | MAX. (LC) | MEMB. FORCE (LBS) | MAX. (LC) | MEMB. FORCE (LBS) | MAX. (LC) |
| FR-TO |                  | FROM TO          |          |           | FR-TO             |           |                   |           |
| 5-2   | -302 / 0         | 0.0              | 0.0      | 0.11 (4)  | 7.81              |           |                   |           |
| 1-2   | 0 / 34           | -77.3            | -77.3    | 0.11 (1)  | 10.00             |           |                   |           |
| 2-3   | -25 / 0          | -77.3            | -77.3    | 0.21 (1)  | 6.25              |           |                   |           |
| 5-4   | 0 / 0            | -17.5            | -17.5    | 0.13 (4)  | 10.00             |           |                   |           |

DESIGN CRITERIA

SPECIFIED LOADS:  
TOP CH. LL = 23.3 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.0 PSF  
TOTAL LOAD = 33.3 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010

THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012 , BCBC 2012 , ABC 2014  
- CSA 086-09  
- TPIC 2011

DESIGN ASSUMPTIONS  
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(TL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.04")

CSI: TC=0.21 (2-3:1) , BC=0.13 (4-5:4) , WB=0.00 (n/a:0) , SSI=0.12 (2-3:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION  
(PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1667 822 2284 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.22 (2) (INPUT = 0.90 )  
JSI METAL= 0.08 (2) (INPUT = 1.00 )



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION



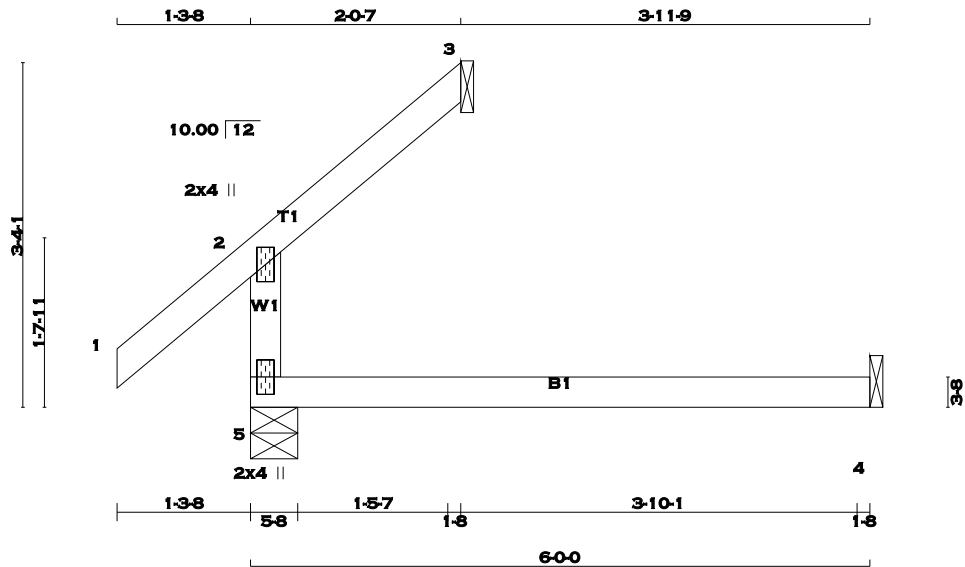

TOTAL WEIGHT = 13 lb [M]

| LUMBER            |      |        |      | DESCR. |
|-------------------|------|--------|------|--------|
| N. L. G. A. RULES | SIZE | LUMBER |      |        |
| CHORDS            | SIZE |        |      | SPF    |
| 5 - 2             | 2x4  | DRY    | No.2 | SPF    |
| 1 - 3             | 2x4  | DRY    | No.2 | SPF    |
| 5 - 4             | 2x4  | DRY    | No.2 | SPF    |

DRY: SEASONED LUMBER.

PLATES (table is in inches)

| JT | TYPE   | PLATES | W   | LEN | Y | X |
|----|--------|--------|-----|-----|---|---|
| 2  | TMV+p  | MT20   | 2.0 | 4.0 |   |   |
| 5  | BMV1+p | MT20   | 2.0 | 4.0 |   |   |

A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG |       | REQRD BRG |  |
|----|-------------------------|------|---------------------------------|------|-----------|-------|-----------|--|
|    | VERT                    | HORZ | DOWN                            | HORZ | UPLIFT    | IN-SX | IN-SX     |  |
| 5  | 265                     | 0    | 265                             | 0    | 0         | 5-8   | 5-8       |  |
| 3  | 60                      | 0    | 60                              | 0    | 0         | 1-8   | 1-8       |  |
| 4  | 45                      | 0    | 50                              | 0    | 0         | 1-8   | 1-8       |  |

SEE MITEK STANDARD DETAIL B37579H FOR CONNECTION TO JOINT(S) 3 , 4

UNFACTORED REACTIONS

| JT | 1ST LCASE |         | MAX./MIN. COMPONENT REACTIONS |       | WIND  | DEAD   | SOIL  |
|----|-----------|---------|-------------------------------|-------|-------|--------|-------|
|    | COMBINED  | SNOW    | LIVE                          | PERM. |       |        |       |
| 5  | 188       | 123 / 0 | 0 / 0                         | 0 / 0 | 0 / 0 | 64 / 0 | 0 / 0 |
| 3  | 41        | 36 / 0  | 0 / 0                         | 0 / 0 | 0 / 0 | 5 / 0  | 0 / 0 |
| 4  | 36        | 0 / 0   | 0 / 0                         | 0 / 0 | 0 / 0 | 36 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 5, 3

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

| MEMB. | CHORDS           |                  | FACTORED |               | WEBS              |               | FACTORED          |               |
|-------|------------------|------------------|----------|---------------|-------------------|---------------|-------------------|---------------|
|       | MAX. FORCE (LBS) | VERT. LOAD (PLF) | LC1      | MAX. CSI (LC) | MEMB. FORCE (LBS) | MAX. CSI (LC) | MEMB. FORCE (LBS) | MAX. CSI (LC) |
| FR-TO |                  |                  |          |               |                   |               |                   |               |
| 5-2   | -205 / 0         | 0.0              | 0.0      | 0.11 (4)      | 7.81              |               |                   |               |
| 1-2   | 0 / 34           | -77.3            | -77.3    | 0.11 (1)      | 10.00             |               |                   |               |
| 2-3   | -12 / 0          | -77.3            | -77.3    | 0.05 (1)      | 6.25              |               |                   |               |
| 5-4   | 0 / 0            | -17.5            | -17.5    | 0.13 (4)      | 10.00             |               |                   |               |

DESIGN CRITERIA

SPECIFIED LOADS:  
TOP CH. LL = 23.3 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.0 PSF  
TOTAL LOAD = 33.3 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010

THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012 , BCBC 2012 , ABC 2014  
- CSA 086-09  
- TPIC 2011

DESIGN ASSUMPTIONS  
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")  
ALLOWABLE DEFL.(TL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.04")

CSI: TC=0.11 (2-5:4) , BC=0.13 (4-5:4) , WB=0.00 (n/a:0) , SSI=0.08 (4-5:4)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION  
(PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1667 822 2284 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.15 (2) (INPUT = 0.90 )  
JSI METAL= 0.06 (2) (INPUT = 1.00 )



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION



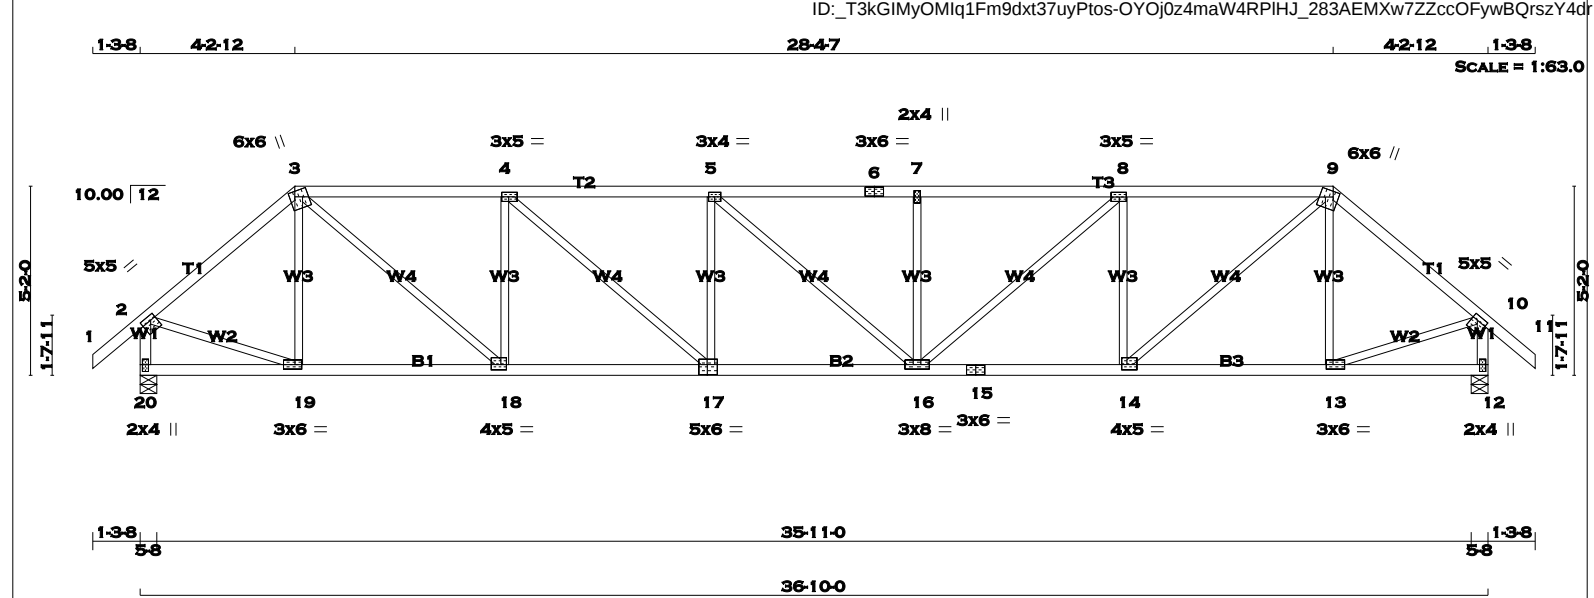

**LUMBER**  
N. L. G. A. RULES  
CHORDS SIZE LUMBER DESCR. 1 - 3 2x4 DRY No.2 SPF 3 - 6 2x4 DRY No.2 SPF 6 - 9 2x4 DRY No.2 SPF 9 - 11 2x4 DRY No.2 SPF 20 - 2 2x4 DRY No.2 SPF 12 - 10 2x4 DRY No.2 SPF 20 - 17 2x4 DRY No.2 SPF 17 - 15 2x4 DRY No.2 SPF 15 - 12 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF EXCEPT

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**  
JT TYPE PLATES W LEN Y X 2 TMVW-t MT20 5.0 5.0 1.50 1.75 3 TTWW+m MT20 6.0 6.0 1.75 1.75 4 TMVW-t MT20 3.0 5.0 1.50 2.25 5 TMVW-t MT20 3.0 4.0 2.25 1.00 6 TS-t MT20 3.0 6.0 2.25 1.00 7 TMW+w MT20 2.0 4.0 2.25 1.00 8 TMVW-t MT20 3.0 5.0 1.50 2.25 9 TTWW+m MT20 6.0 6.0 1.75 1.75 10 TMVW-t MT20 5.0 5.0 1.50 1.75 12 BMV1+p MT20 2.0 4.0 2.25 1.00 13 BMVW-t MT20 3.0 6.0 1.50 2.25 14 BMVW-t MT20 4.0 5.0 1.75 1.75 15 BS-t MT20 3.0 6.0 2.25 1.00 16 BMVW-t MT20 3.0 8.0 2.25 1.00 17 BSWW-t MT20 5.0 6.0 3.25 2.75 18 BMVW-t MT20 4.0 5.0 1.75 1.75 19 BMVW-t MT20 3.0 6.0 1.50 2.25 20 BMV1+p MT20 2.0 4.0 2.25 1.00

A SIZE FOR SIZE SUBSTITUTION OF MITTEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

| DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER |      |                         |      |                                 |      |           |       |           |  |
|-----------------------------------------------------------------------------------------------|------|-------------------------|------|---------------------------------|------|-----------|-------|-----------|--|
| BEARINGS                                                                                      |      |                         |      |                                 |      |           |       |           |  |
|                                                                                               |      | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG |       | REQRD BRG |  |
| JT                                                                                            |      | VERT                    | HORZ | DOWN                            | HORZ | UPLIFT    | IN-SX | IN-SX     |  |
| 20                                                                                            | 1854 | 0                       | 1854 | 0                               | 0    | 5-8       | 5-8   | 5-8       |  |
| 12                                                                                            | 1854 | 0                       | 1854 | 0                               | 0    | 5-8       | 5-8   | 5-8       |  |

| UNFACTORED REACTIONS |      |           |       |                              |           |       |         |       |  |
|----------------------|------|-----------|-------|------------------------------|-----------|-------|---------|-------|--|
|                      |      | 1ST LCASE |       | MAX/MIN. COMPONENT REACTIONS |           |       |         |       |  |
| JT                   |      | COMBINED  | SNOW  | LIVE                         | PERM.LIVE | WIND  | DEAD    | SOIL  |  |
| 20                   | 1299 | 922 / 0   | 0 / 0 | 0 / 0                        | 0 / 0     | 0 / 0 | 377 / 0 | 0 / 0 |  |
| 12                   | 1299 | 922 / 0   | 0 / 0 | 0 / 0                        | 0 / 0     | 0 / 0 | 377 / 0 | 0 / 0 |  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 20, 12

**BRACING**  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.38 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**  
TOTAL LOAD CASES: (4)


CHORDS  
MEMB. MAX. FACTORED FORCE (LBS) FACTORED VERT. LOAD (LBS) MAX. LC1 (LC) UNBRAC LENGTH FR-TO

WEBS  
MEMB. MAX. FACTORED FORCE (LBS) MAX. LC1 (LC) UNBRAC LENGTH FR-TO

| DESIGN CRITERIA                                                                                                                                                      |     |    |      |      |     |  |  |  |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----|------|------|-----|--|--|--|--|
| SPECIFIED LOADS:                                                                                                                                                     |     |    |      |      |     |  |  |  |  |
| TOP                                                                                                                                                                  | CH. | LL | =    | 23.3 | PSF |  |  |  |  |
|                                                                                                                                                                      |     | DL | =    | 3.0  | PSF |  |  |  |  |
| BOT                                                                                                                                                                  | CH. | LL | =    | 0.0  | PSF |  |  |  |  |
|                                                                                                                                                                      |     | DL | =    | 7.0  | PSF |  |  |  |  |
| TOTAL LOAD                                                                                                                                                           |     | =  | 33.3 | PSF  |     |  |  |  |  |
| SPACING = 24.0 IN. C/C                                                                                                                                               |     |    |      |      |     |  |  |  |  |
| LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM                                                                                                          |     |    |      |      |     |  |  |  |  |
| THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010                                                                           |     |    |      |      |     |  |  |  |  |
| THIS DESIGN COMPLIES WITH:<br>- PART 9 OF OBC 2012, BCBC 2012, ABC 2014<br>- CSA 086-09<br>- TPIC 2011                                                               |     |    |      |      |     |  |  |  |  |
| (55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD                                                                   |     |    |      |      |     |  |  |  |  |
| ALLOWABLE DEFL.(LL)= L/360 (1.23")<br>CALCULATED VERT. DEFL.(LL) = L/999 (0.22")<br>ALLOWABLE DEFL.(TL)= L/360 (1.23")<br>CALCULATED VERT. DEFL.(TL) = L/999 (0.39") |     |    |      |      |     |  |  |  |  |
| CSI: TC=0.62 (7-8:1), BC=0.58 (16-17:1), WB=0.40 (4-18:1), SSI=0.21 (8-9:1)                                                                                          |     |    |      |      |     |  |  |  |  |
| DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10<br>COMP=1.10 SHEAR=1.10 TENS= 1.10                                                                                            |     |    |      |      |     |  |  |  |  |
| COMPANION LIVE LOAD FACTOR = 0.50                                                                                                                                    |     |    |      |      |     |  |  |  |  |
| TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .                                                                   |     |    |      |      |     |  |  |  |  |
| NAIL VALUES<br>PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)<br>MAX MIN MAX MIN MAX MIN<br>MT20 618 354 1667 822 2284 1656                                         |     |    |      |      |     |  |  |  |  |
| PLATE PLACEMENT TOL. = 0.250 inches                                                                                                                                  |     |    |      |      |     |  |  |  |  |
| PLATE ROTATION TOL. = 5.0 Deg.                                                                                                                                       |     |    |      |      |     |  |  |  |  |
| JSI GRIP= 0.88 (19) (INPUT = 0.90 )<br>JSI METAL= 0.71 (15) (INPUT = 1.00 )                                                                                          |     |    |      |      |     |  |  |  |  |

| TOTAL LOAD CASES: (4) |           |               |                  |               |               |       |             |               |               |
|-----------------------|-----------|---------------|------------------|---------------|---------------|-------|-------------|---------------|---------------|
|                       |           | CHORDS        |                  | WEBS          |               |       |             |               |               |
|                       |           | MAX. FACTORED |                  | MAX. FACTORED |               |       |             |               |               |
| MEMB.                 |           | FORCE (LBS)   | VERT. LOAD (LBS) | MAX. LC1 (LC) | UNBRAC LENGTH | MEMB. | FORCE (LBS) | MAX. LC1 (LC) | UNBRAC LENGTH |
| FR-TO                 |           |               |                  |               |               | FR-TO |             |               |               |
| 1-2                   | 0 / 34    | -77.3         | -77.3            | 0.11 (1)      | 10.00         | 19-3  | -311 / 0    | 0.12 (1)      |               |
| 2-3                   | -1782 / 0 | -77.3         | -77.3            | 0.31 (1)      | 4.70          | 3-18  | 0 / 1709    | 0.38 (1)      |               |
| 3-4                   | -2663 / 0 | -77.3         | -77.3            | 0.54 (1)      | 3.77          | 18-4  | -1008 / 0   | 0.40 (1)      |               |
| 4-5                   | -3257 / 0 | -77.3         | -77.3            | 0.62 (1)      | 3.38          | 4-17  | 0 / 791     | 0.18 (1)      |               |
| 5-6                   | -3265 / 0 | -77.3         | -77.3            | 0.50 (1)      | 3.52          | 17-5  | -424 / 0    | 0.17 (1)      |               |
| 6-7                   | -3265 / 0 | -77.3         | -77.3            | 0.50 (1)      | 3.52          | 5-16  | 0 / 2       | 0.00 (4)      |               |
| 7-8                   | -3265 / 0 | -77.3         | -77.3            | 0.62 (1)      | 3.38          | 16-7  | -422 / 0    | 0.17 (1)      |               |
| 8-9                   | -2664 / 0 | -77.3         | -77.3            | 0.54 (1)      | 3.76          | 16-8  | 0 / 796     | 0.18 (1)      |               |
| 9-10                  | -1782 / 0 | -77.3         | -77.3            | 0.31 (1)      | 4.70          | 14-8  | -1007 / 0   | 0.40 (1)      |               |
| 10-11                 | 0 / 34    | -77.3         | -77.3            | 0.11 (1)      | 10.00         | 14-9  | 0 / 1710    | 0.38 (1)      |               |
| 20-2                  | -1826 / 0 | 0.0           | 0.0              | 0.19 (1)      | 6.20          | 13-9  | -312 / 0    | 0.12 (1)      |               |
| 12-10                 | -1826 / 0 | 0.0           | 0.0              | 0.19 (1)      | 6.20          | 2-19  | 0 / 1426    | 0.32 (1)      |               |
|                       |           |               |                  |               |               | 13-10 | 0 / 1426    | 0.32 (1)      |               |
| 20-19                 | 0 / 0     | -17.5         | -17.5            | 0.10 (4)      | 10.00         |       |             |               |               |
| 19-18                 | 0 / 1359  | -17.5         | -17.5            | 0.28 (1)      | 10.00         |       |             |               |               |
| 18-17                 | 0 / 2663  | -17.5         | -17.5            | 0.47 (1)      | 10.00         |       |             |               |               |
| 17-16                 | 0 / 3265  | -17.5         | -17.5            | 0.58 (1)      | 10.00         |       |             |               |               |
| 16-15                 | 0 / 2664  | -17.5         | -17.5            | 0.48 (1)      | 10.00         |       |             |               |               |
| 15-14                 | 0 / 2664  | -17.5         | -17.5            | 0.48 (1)      | 10.00         |       |             |               |               |
| 14-13                 | 0 / 1358  | -17.5         | -17.5            | 0.28 (1)      | 10.00         |       |             |               |               |
| 13-12                 | 0 / 0     | -17.5         | -17.5            | 0.10 (4)      | 10.00         |       |             |               |               |

RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION

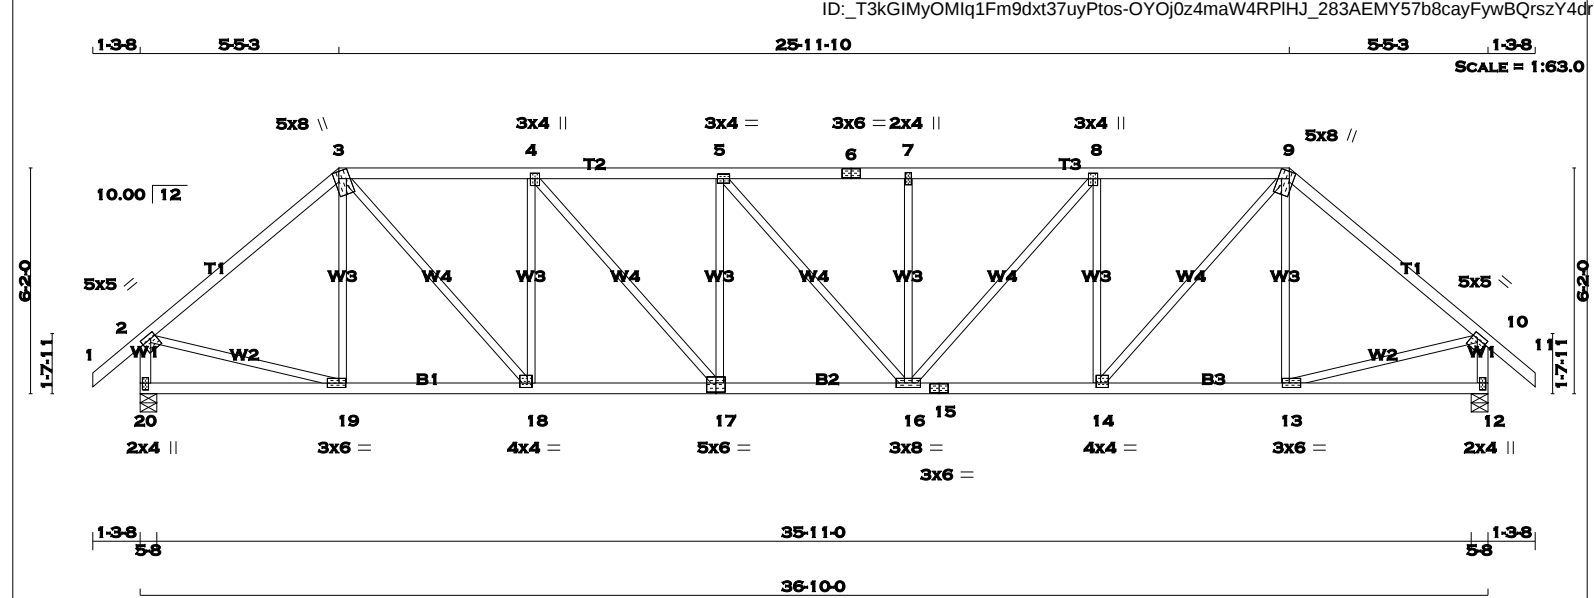

|                       |         |                                                                                                      |  |                                                                                                    |  |
|-----------------------|---------|------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------|--|
| <b>LUMBER</b>         |         | <b>DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER</b> |  | <b>DESIGN CRITERIA</b>                                                                             |  |
| N. L. G. A. RULES     |         | <b>BEARINGS</b>                                                                                      |  | SPECIFIED LOADS:                                                                                   |  |
| CHORDS                | SIZE    | FACTORED GROSS REACTION                                                                              |  | TOP CH. LL = 23.3 PSF                                                                              |  |
| 1 - 3                 | 2x4 DRY | No.2                                                                                                 |  | DL = 3.0 PSF                                                                                       |  |
| 3 - 6                 | 2x4 DRY | No.2                                                                                                 |  | BOT CH. LL = 0.0 PSF                                                                               |  |
| 6 - 9                 | 2x4 DRY | No.2                                                                                                 |  | DL = 7.0 PSF                                                                                       |  |
| 9 - 11                | 2x4 DRY | No.2                                                                                                 |  | TOTAL LOAD = 33.3 PSF                                                                              |  |
| 20 - 2                | 2x4 DRY | No.2                                                                                                 |  | <b>SPACING = 24.0 IN. C/C</b>                                                                      |  |
| 12 - 10               | 2x4 DRY | No.2                                                                                                 |  | LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM                                        |  |
| 20 - 17               | 2x4 DRY | No.2                                                                                                 |  | THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010         |  |
| 17 - 15               | 2x4 DRY | No.2                                                                                                 |  | THIS DESIGN COMPLIES WITH:                                                                         |  |
| 15 - 12               | 2x4 DRY | No.2                                                                                                 |  | - PART 9 OF OBC 2012, BCBC 2012, ABC 2014                                                          |  |
| ALL WEBS 2x3 DRY      |         | No.2                                                                                                 |  | - CSA 086-09                                                                                       |  |
| EXCEPT                |         |                                                                                                      |  | - TPIC 2011                                                                                        |  |
| DRY: SEASONED LUMBER. |         |                                                                                                      |  | (55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD |  |
|                       |         |                                                                                                      |  | ALLOWABLE DEFL.(LL)= L/360 (1.23")                                                                 |  |
|                       |         |                                                                                                      |  | CALCULATED VERT. DEFL.(LL) = L/ 999 (0.16")                                                        |  |
|                       |         |                                                                                                      |  | ALLOWABLE DEFL.(TL)= L/ 360 (1.23")                                                                |  |
|                       |         |                                                                                                      |  | CALCULATED VERT. DEFL.(TL) = L/ 999 (0.29")                                                        |  |
|                       |         |                                                                                                      |  | CSI: TC=0.54 (2-3:1), BC=0.48 (16-17:1), WB=0.55 (4-18:1), SSI=0.19 (8-9:1)                        |  |
|                       |         |                                                                                                      |  | DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10                                                             |  |
|                       |         |                                                                                                      |  | COMP=1.10 SHEAR=1.10 TENS= 1.10                                                                    |  |
|                       |         |                                                                                                      |  | COMPANION LIVE LOAD FACTOR = 0.50                                                                  |  |
|                       |         |                                                                                                      |  | TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . |  |
|                       |         |                                                                                                      |  | NAIL VALUES                                                                                        |  |
|                       |         |                                                                                                      |  | PLATE GRIP(DRY) SHEAR SECTION                                                                      |  |
|                       |         |                                                                                                      |  | (PSI) (PLI) (PLI)                                                                                  |  |
|                       |         |                                                                                                      |  | MAX MIN MAX MIN MAX MIN                                                                            |  |
|                       |         |                                                                                                      |  | MT20 618 354 1667 822 2284 1656                                                                    |  |
|                       |         |                                                                                                      |  | PLATE PLACEMENT TOL. = 0.250 inches                                                                |  |
|                       |         |                                                                                                      |  | PLATE ROTATION TOL. = 5.0 Deg.                                                                     |  |
|                       |         |                                                                                                      |  | JSI GRIP= 0.89 (19) (INPUT = 0.90 )                                                                |  |
|                       |         |                                                                                                      |  | JSI METAL= 0.61 (2) (INPUT = 1.00 )                                                                |  |

|                                    |        |                |     |               |      |             |  |
|------------------------------------|--------|----------------|-----|---------------|------|-------------|--|
| <b>PLATES (table is in inches)</b> |        | <b>LOADING</b> |     | <b>CHORDS</b> |      | <b>WEBS</b> |  |
| JT                                 | TYPE   | PLATES         | W   | LEN           | Y    | X           |  |
| 2                                  | TMVW-t | MT20           | 5.0 | 5.0           | 1.50 | 1.75        |  |
| 3                                  | TTWW+m | MT20           | 5.0 | 8.0           | 2.25 | 1.50        |  |
| 4                                  | TMVW+t | MT20           | 3.0 | 4.0           | 1.75 | 1.50        |  |
| 5                                  | TMVW-t | MT20           | 3.0 | 4.0           |      |             |  |
| 6                                  | TS-t   | MT20           | 3.0 | 6.0           |      |             |  |
| 7                                  | TMVW+w | MT20           | 2.0 | 4.0           |      |             |  |
| 8                                  | TMVW+t | MT20           | 3.0 | 4.0           | 1.75 | 1.50        |  |
| 9                                  | TTWW+m | MT20           | 5.0 | 8.0           | 2.25 | 1.50        |  |
| 10                                 | TMVW-t | MT20           | 5.0 | 5.0           | 1.50 | 1.75        |  |
| 12                                 | BMV1+p | MT20           | 2.0 | 4.0           | 2.25 | 1.00        |  |
| 13                                 | BMVW-t | MT20           | 3.0 | 6.0           | 1.50 | 2.25        |  |
| 14                                 | BMVW-t | MT20           | 4.0 | 4.0           | 1.50 | 1.50        |  |
| 15                                 | BS-t   | MT20           | 3.0 | 6.0           |      |             |  |
| 16                                 | BMVW-t | MT20           | 3.0 | 8.0           |      |             |  |
| 17                                 | BSVW-t | MT20           | 5.0 | 6.0           | 3.00 | 3.00        |  |
| 18                                 | BMVW-t | MT20           | 4.0 | 4.0           | 1.50 | 1.50        |  |
| 19                                 | BMVW-t | MT20           | 3.0 | 6.0           | 1.50 | 2.25        |  |
| 20                                 | BMV1+p | MT20           | 2.0 | 4.0           | 2.25 | 1.00        |  |

A SIZE FOR SIZE SUBSTITUTION OF MITTEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 20, 12


**BRACING**  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.81 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**  
TOTAL LOAD CASES: (4)

|              |  |                |  |                      |  |                |  |                    |  |              |  |              |  |              |  |
|--------------|--|----------------|--|----------------------|--|----------------|--|--------------------|--|--------------|--|--------------|--|--------------|--|
| <b>MEMB.</b> |  | <b>FORCE</b>   |  | <b>VERT. LOAD</b>    |  | <b>LC1 MAX</b> |  | <b>MAX. UNBRAC</b> |  | <b>MEMB.</b> |  | <b>FORCE</b> |  | <b>MAX</b>   |  |
| <b>(LBS)</b> |  | <b>(PLF)</b>   |  | <b>(LC)</b>          |  | <b>(LC)</b>    |  | <b>(LBS)</b>       |  | <b>(LBS)</b> |  | <b>(LBS)</b> |  | <b>(LBS)</b> |  |
| <b>FR-TO</b> |  | <b>FROM TO</b> |  | <b>LENGTH</b>        |  | <b>FR-TO</b>   |  | <b>FR-TO</b>       |  | <b>FR-TO</b> |  | <b>FR-TO</b> |  | <b>FR-TO</b> |  |
| 1-2          |  | 0 / 34         |  | -77.3 -77.3 0.11 (1) |  | 10.00 19-3     |  | -221 / 21          |  | 0.13 (1)     |  |              |  |              |  |
| 2-3          |  | -1820 / 0      |  | -77.3 -77.3 0.54 (1) |  | 4.41 3-18      |  | 0 / 1353           |  | 0.30 (1)     |  |              |  |              |  |
| 3-4          |  | -2296 / 0      |  | -77.3 -77.3 0.41 (1) |  | 4.13 18-4      |  | -922 / 0           |  | 0.55 (1)     |  |              |  |              |  |
| 4-5          |  | -2715 / 0      |  | -77.3 -77.3 0.45 (1) |  | 3.81 4-17      |  | 0 / 636            |  | 0.14 (1)     |  |              |  |              |  |
| 5-6          |  | -2714 / 0      |  | -77.3 -77.3 0.36 (1) |  | 3.92 17-5      |  | -387 / 0           |  | 0.23 (1)     |  |              |  |              |  |
| 6-7          |  | -2714 / 0      |  | -77.3 -77.3 0.36 (1) |  | 3.92 5-16      |  | -2 / 0             |  | 0.00 (1)     |  |              |  |              |  |
| 7-8          |  | -2714 / 0      |  | -77.3 -77.3 0.45 (1) |  | 3.81 16-7      |  | -386 / 0           |  | 0.23 (1)     |  |              |  |              |  |
| 8-9          |  | -2296 / 0      |  | -77.3 -77.3 0.41 (1) |  | 4.13 16-8      |  | 0 / 634            |  | 0.14 (1)     |  |              |  |              |  |
| 9-10         |  | -1820 / 0      |  | -77.3 -77.3 0.54 (1) |  | 4.41 14-8      |  | -921 / 0           |  | 0.55 (1)     |  |              |  |              |  |
| 10-11        |  | 0 / 34         |  | -77.3 -77.3 0.11 (1) |  | 10.00 14-9     |  | 0 / 1354           |  | 0.30 (1)     |  |              |  |              |  |
| 20-2         |  | -1815 / 0      |  | 0.0 0.0 0.19 (1)     |  | 6.21 13-9      |  | -222 / 21          |  | 0.13 (1)     |  |              |  |              |  |
| 12-10        |  | -1815 / 0      |  | 0.0 0.0 0.19 (1)     |  | 6.21 2-19      |  | 0 / 1434           |  | 0.32 (1)     |  |              |  |              |  |
| 20-19        |  | 0 / 0          |  | -17.5 -17.5 0.12 (4) |  | 10.00 13-10    |  | 0 / 1434           |  | 0.32 (1)     |  |              |  |              |  |
| 19-18        |  | 0 / 1392       |  | -17.5 -17.5 0.29 (1) |  | 10.00          |  |                    |  |              |  |              |  |              |  |
| 18-17        |  | 0 / 2296       |  | -17.5 -17.5 0.41 (1) |  | 10.00          |  |                    |  |              |  |              |  |              |  |
| 17-16        |  | 0 / 2715       |  | -17.5 -17.5 0.48 (1) |  | 10.00          |  |                    |  |              |  |              |  |              |  |
| 16-15        |  | 0 / 2296       |  | -17.5 -17.5 0.41 (1) |  | 10.00          |  |                    |  |              |  |              |  |              |  |
| 15-14        |  | 0 / 2296       |  | -17.5 -17.5 0.41 (1) |  | 10.00          |  |                    |  |              |  |              |  |              |  |
| 14-13        |  | 0 / 1392       |  | -17.5 -17.5 0.29 (1) |  | 10.00          |  |                    |  |              |  |              |  |              |  |
| 13-12        |  | 0 / 0          |  | -17.5 -17.5 0.12 (4) |  | 10.00          |  |                    |  |              |  |              |  |              |  |

RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION

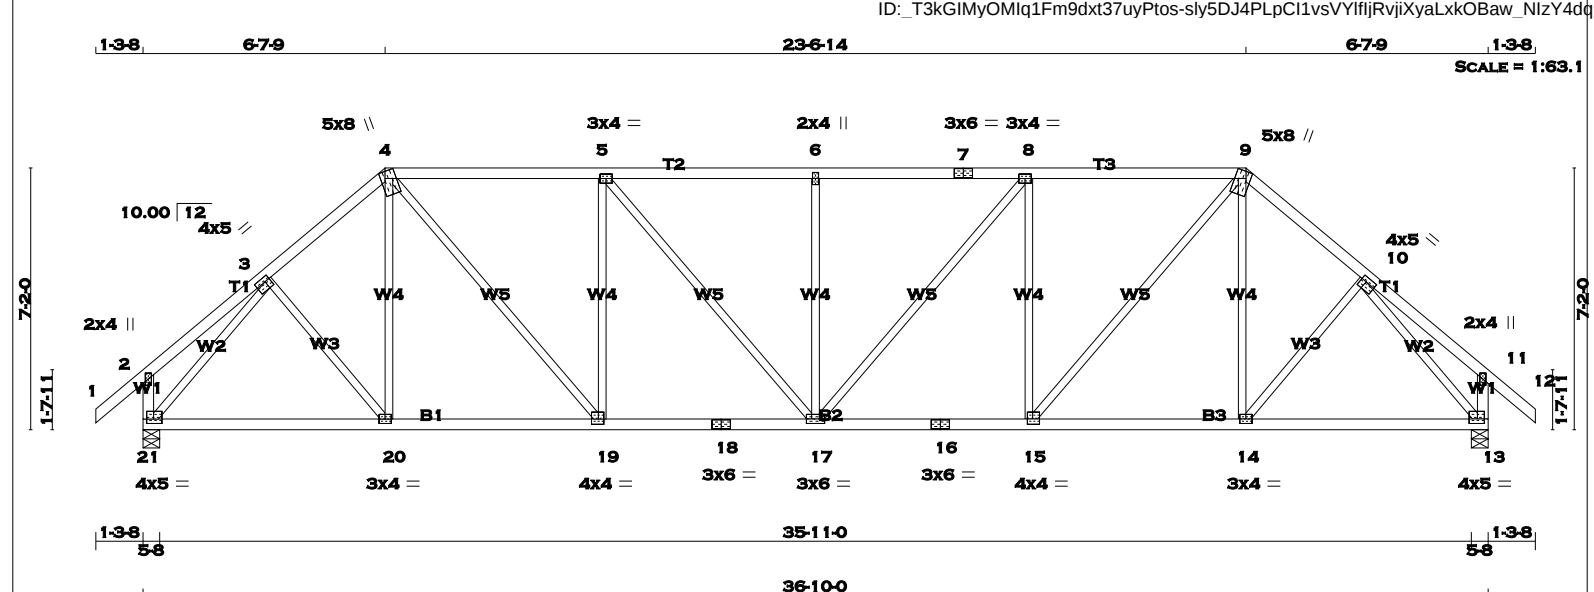


|                                                                                                                                                                                                                                                                                                                                                                                             |  |  |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |  |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
| <b>LUMBER</b><br>N. L. G. A. RULES<br>CHORDS SIZE LUMBER DESCR.<br>1 - 4 2x4 DRY No.2 SPF<br>4 - 7 2x4 DRY No.2 SPF<br>7 - 9 2x4 DRY No.2 SPF<br>9 - 12 2x4 DRY No.2 SPF<br>21 - 2 2x4 DRY No.2 SPF<br>13 - 11 2x4 DRY No.2 SPF<br>21 - 18 2x4 DRY No.2 SPF<br>18 - 16 2x4 DRY No.2 SPF<br>16 - 13 2x4 DRY No.2 SPF<br><br>ALL WEBS 2x3 DRY No.2 SPF<br>EXCEPT<br><br>DRY: SEASONED LUMBER. |  |  |  | <b>DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER</b><br><b>BEARINGS</b><br>FACTORED MAXIMUM FACTORED INPUT REQ'D<br>GROSS REACTION GROSS REACTION BRG BRG<br>JT VERT HORZ DOWN HORZ UPLIFT IN-SX IN-SX<br>21 1854 0 1854 0 0 5-8 5-8<br>13 1854 0 1854 0 0 5-8 5-8<br><br><b>UNFACTORED REACTIONS</b><br>1ST LCASE MAX/MIN. COMPONENT REACTIONS<br>JT COMBINED SNOW LIVE PERM.LIVE WIND DEAD SOIL<br>21 1299 922 / 0 0 / 0 0 / 0 377 / 0 0 / 0<br>13 1299 922 / 0 0 / 0 0 / 0 377 / 0 0 / 0<br><br>BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 21, 13<br><br><b>BRACING</b><br>TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.91 FT.<br>MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.<br><br>ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.<br><br><b>LOADING</b><br>TOTAL LOAD CASES: (4)<br><br>CHORDS WEBS<br>MAX. FACTORED MAX. FACTORED MAX. FACTORED<br>MEMB. FORCE VERT. LOAD LC1 MAX MAX. MEMB. FORCE MAX<br>(LBS) (PLF) CSI (LC) UNBRAC (LBS) CSI (LC)<br>FR-TO FROM TO LENGTH FR-TO<br>1-2 0 / 34 -77.3 -77.3 0.11 (1) 10.00 3-20 0 / 153 0.03 (1)<br>2-3 0 / 16 -77.3 -77.3 0.12 (1) 10.00 20-4 0 / 78 0.03 (4)<br>3-4 -1841 / 0 -77.3 -77.3 0.16 (1) 4.80 4-19 0 / 1149 0.26 (1)<br>4-5 -2150 / 0 -77.3 -77.3 0.53 (1) 4.10 19-5 -772 / 0 0.69 (1)<br>5-6 -2371 / 0 -77.3 -77.3 0.55 (1) 3.91 5-17 0 / 341 0.08 (1)<br>6-7 -2371 / 0 -77.3 -77.3 0.55 (1) 3.91 17-6 -416 / 0 0.37 (1)<br>7-8 -2371 / 0 -77.3 -77.3 0.55 (1) 3.91 17-8 0 / 341 0.08 (1)<br>8-9 -2150 / 0 -77.3 -77.3 0.53 (1) 4.10 15-8 -772 / 0 0.69 (1)<br>9-10 -1841 / 0 -77.3 -77.3 0.16 (1) 4.80 15-9 0 / 1149 0.26 (1)<br>10-11 0 / 16 -77.3 -77.3 0.12 (1) 10.00 14-9 0 / 78 0.03 (4)<br>11-12 0 / 34 -77.3 -77.3 0.11 (1) 10.00 14-10 0 / 153 0.03 (1)<br>21-2 -209 / 0 0.0 0.0 0.02 (1) 7.81 21-3 -2058 / 0 0.90 (1)<br>13-11 -209 / 0 0.0 0.0 0.02 (1) 7.81 10-13 -2058 / 0 0.90 (1)<br><br>21-20 0 / 1298 -17.5 -17.5 0.31 (1) 10.00<br>20-19 0 / 1398 -17.5 -17.5 0.32 (1) 10.00<br>19-18 0 / 2151 -17.5 -17.5 0.40 (1) 10.00<br>18-17 0 / 2151 -17.5 -17.5 0.40 (1) 10.00<br>17-16 0 / 2151 -17.5 -17.5 0.40 (1) 10.00<br>16-15 0 / 2151 -17.5 -17.5 0.40 (1) 10.00<br>15-14 0 / 1398 -17.5 -17.5 0.32 (1) 10.00<br>14-13 0 / 1298 -17.5 -17.5 0.31 (1) 10.00 |  |  |  | <b>DESIGN CRITERIA</b><br><br>SPECIFIED LOADS:<br>TOP CH. LL = 23.3 PSF<br>DL = 3.0 PSF<br>BOT CH. LL = 0.0 PSF<br>DL = 7.0 PSF<br>TOTAL LOAD = 33.3 PSF<br><br><b>SPACING = 24.0 IN. C/C</b><br><br>LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM<br><br>THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010<br><br>THIS DESIGN COMPLIES WITH:<br>- PART 9 OF OBC 2012, BCBC 2012, ABC 2014<br>- CSA 086-09<br>- TPIC 2011<br><br>(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD<br><br>ALLOWABLE DEFL.(LL)= L/360 (1.23")<br>CALCULATED VERT. DEFL.(LL) = L/ 999 (0.13")<br>ALLOWABLE DEFL.(TL)= L/360 (1.23")<br>CALCULATED VERT. DEFL.(TL) = L/ 999 (0.23")<br><br>CSI: TC=0.55 (6-8:1), BC=0.40 (15-17:1), WB=0.90 (3-21:1), SSI=0.22 (8-9:1)<br><br>DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10<br>COMP=1.10 SHEAR=1.10 TENS= 1.10<br><br>COMPANION LIVE LOAD FACTOR = 0.50<br><br>TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .<br><br>NAIL VALUES<br>PLATE GRIP(DRY) SHEAR SECTION<br>(PSI) (PLI) (PLI)<br>MAX MIN MAX MIN MAX MIN<br>MT20 618 354 1667 822 2284 1656<br><br>PLATE PLACEMENT TOL. = 0.250 inches<br><br>PLATE ROTATION TOL. = 5.0 Deg.<br><br>JSI GRIP= 0.89 (10) (INPUT = 0.90 )<br>JSI METAL= 0.61 (18) (INPUT = 1.00 ) |  |  |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION





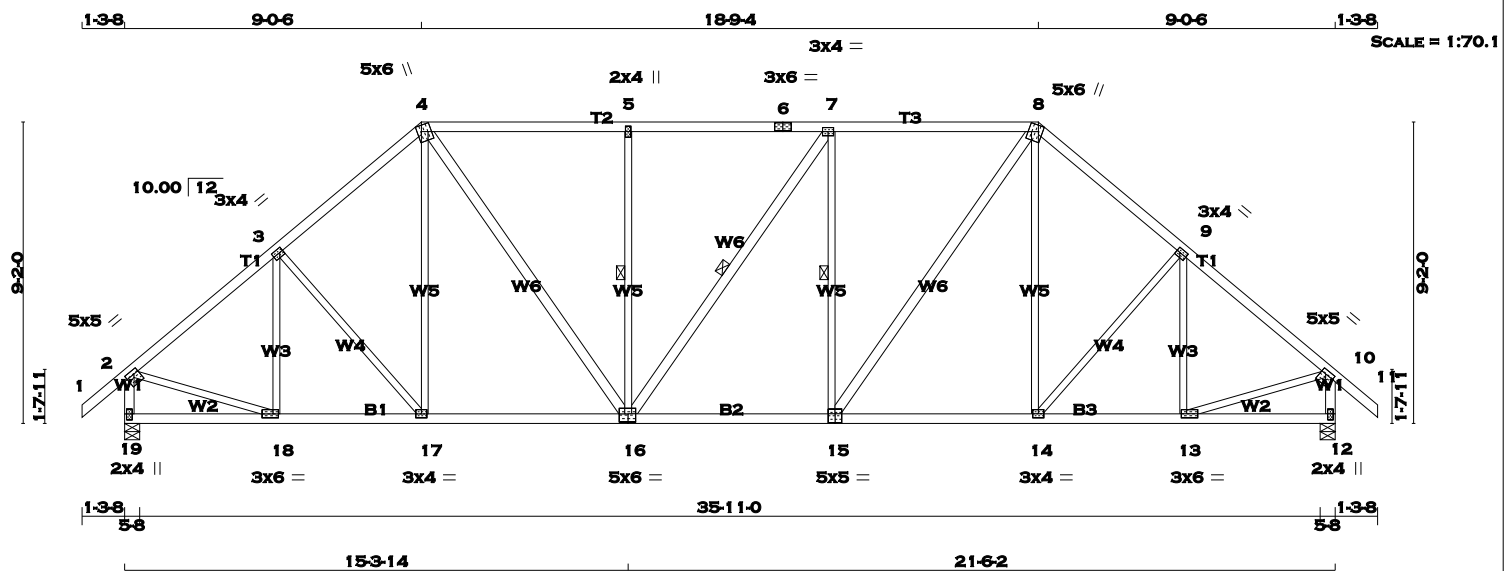

TOTAL WEIGHT = 2 X 187 = 374 lb  
[M]

| LUMBER            |      |        |        |
|-------------------|------|--------|--------|
| N. L. G. A. RULES |      |        |        |
| CHORDS            | SIZE | LUMBER | DESCR. |
| 1 - 4             | 2x4  | DRY    | No.2   |
| 4 - 6             | 2x4  | DRY    | No.2   |
| 6 - 8             | 2x4  | DRY    | No.2   |
| 8 - 11            | 2x4  | DRY    | No.2   |
| 19 - 2            | 2x4  | DRY    | No.2   |
| 12 - 10           | 2x4  | DRY    | No.2   |
| 19 - 16           | 2x4  | DRY    | No.2   |
| 16 - 15           | 2x4  | DRY    | No.2   |
| 15 - 12           | 2x4  | DRY    | No.2   |
| ALL WEBS EXCEPT   | 2x3  | DRY    | No.2   |
| 4 - 16            | 2x4  | DRY    | No.2   |
| 16 - 7            | 2x4  | DRY    | No.2   |
| 15 - 8            | 2x4  | DRY    | No.2   |

DRY: SEASONED LUMBER.

| PLATES (table is in inches) |        |        |     |     |      |      |
|-----------------------------|--------|--------|-----|-----|------|------|
| JT                          | TYPE   | PLATES | W   | LEN | Y    | X    |
| 2                           | TMVW-t | MT20   | 5.0 | 5.0 | 1.50 | 1.75 |
| 3                           | TMWW-t | MT20   | 3.0 | 4.0 | 1.50 | 1.25 |
| 4                           | TTWW+m | MT20   | 5.0 | 6.0 | 2.25 | 1.50 |
| 5                           | TMW+w  | MT20   | 2.0 | 4.0 |      |      |
| 6                           | TS-t   | MT20   | 3.0 | 6.0 |      |      |
| 7                           | TMWW-t | MT20   | 3.0 | 4.0 |      |      |
| 8                           | TTWW+m | MT20   | 5.0 | 6.0 | 2.25 | 1.50 |
| 9                           | TMWW-t | MT20   | 3.0 | 4.0 | 1.50 | 1.25 |
| 10                          | TMVW-t | MT20   | 5.0 | 5.0 | 1.50 | 1.75 |
| 12                          | BMV1+p | MT20   | 2.0 | 4.0 | 2.25 | 1.00 |
| 13                          | BMWW-t | MT20   | 3.0 | 6.0 | 1.50 | 2.00 |
| 14                          | BMWW-t | MT20   | 3.0 | 4.0 |      |      |
| 15                          | BSWW-I | MT20   | 5.0 | 5.0 | 3.25 | 2.50 |
| 16                          | BSWW-I | MT20   | 5.0 | 6.0 | 3.00 | 2.75 |
| 17                          | BMWW-t | MT20   | 3.0 | 4.0 |      |      |
| 18                          | BMWW-t | MT20   | 3.0 | 6.0 | 1.50 | 2.00 |
| 19                          | BMV1+p | MT20   | 2.0 | 4.0 | 2.25 | 1.00 |

A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |      | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQRD BRG |
|----------|------|-------------------------|---------------------------------|-----------|-----------|
| JT       | VERT | HORZ                    | DOWN                            | HORZ      | UPLIFT    |
| 19       | 1854 | 0                       | 1854                            | 0         | 0         |
| 12       | 1854 | 0                       | 1854                            | 0         | 0         |

| UNFACTORED REACTIONS |          | 1ST LCASE | MAX./MIN. | COMPONENT REACTIONS |
|----------------------|----------|-----------|-----------|---------------------|
| JT                   | COMBINED | SNOW      | LIVE      | PERM.LIVE           |
| 19                   | 1299     | 922 / 0   | 0 / 0     | 0 / 0               |
| 12                   | 1299     | 922 / 0   | 0 / 0     | 0 / 0               |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 19, 12

**BRACING**  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.40 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.  
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 - 2x3 SPF No.2 LATERAL BRACE(S) AT 1/2 LENGTH OF 5-16, 7-16, 7-15. DBS = 20-0-0. CBF = 65 LBS.

DBS = DIAGONAL BRACE SPACING (MAX). CBF = CUMULATIVE BRACING FORCE. FASTEN LATERAL BRACE(S) USING (0.122"x3") SPIRAL NAILS : 1 NAIL FOR 2x3 BRACE(S), 2 FOR 1x4, 2x4, 2x5, 3 FOR 2x6, 4 FOR 2x8, 5 FOR 2x10, AND 6 FOR 2x12.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

**LOADING**  
TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                                    | WEBS  |                           |                                    |          |
|--------|---------------------------|---------------------------|------------------------------------|-------|---------------------------|------------------------------------|----------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED UNBRACED LENGTH (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. FACTORED UNBRACED LENGTH (LC) |          |
| FR-TO  |                           | FROM TO                   |                                    | FR-TO |                           |                                    |          |
| 1-2    | 0 / 34                    | -77.3                     | -77.3 0.11 (1)                     | 10.00 | 18-3                      | -319 / 0                           | 0.14 (1) |
| 2-3    | -1809 / 0                 | -77.3                     | -77.3 0.34 (1)                     | 4.64  | 3-17                      | -92 / 0                            | 0.08 (1) |
| 3-4    | -1787 / 0                 | -77.3                     | -77.3 0.34 (1)                     | 4.67  | 17-4                      | 0 / 167                            | 0.04 (4) |
| 4-5    | -1800 / 0                 | -77.3                     | -77.3 0.52 (1)                     | 4.41  | 4-16                      | 0 / 775                            | 0.12 (1) |
| 5-6    | -1800 / 0                 | -77.3                     | -77.3 0.53 (1)                     | 4.40  | 16-5                      | -522 / 0                           | 0.29 (1) |
| 6-7    | -1800 / 0                 | -77.3                     | -77.3 0.53 (1)                     | 4.40  | 16-7                      | -2 / 0                             | 0.00 (1) |
| 7-8    | -1801 / 0                 | -77.3                     | -77.3 0.53 (1)                     | 4.40  | 15-7                      | -523 / 0                           | 0.29 (1) |
| 8-9    | -1787 / 0                 | -77.3                     | -77.3 0.34 (1)                     | 4.67  | 15-8                      | 0 / 778                            | 0.12 (1) |
| 9-10   | -1809 / 0                 | -77.3                     | -77.3 0.34 (1)                     | 4.64  | 14-8                      | 0 / 166                            | 0.04 (4) |
| 10-11  | 0 / 34                    | -77.3                     | -77.3 0.11 (1)                     | 10.00 | 14-9                      | -92 / 0                            | 0.08 (1) |
| 19-2   | -1818 / 0                 | 0.0                       | 0.0 0.19 (1)                       | 6.20  | 13-9                      | -318 / 0                           | 0.14 (1) |
| 12-10  | -1818 / 0                 | 0.0                       | 0.0 0.19 (1)                       | 6.20  | 2-18                      | 0 / 1464                           | 0.33 (1) |
|        |                           |                           |                                    |       | 13-10                     | 0 / 1464                           | 0.33 (1) |
| 19-18  | 0 / 0                     | -17.5                     | -17.5 0.08 (4)                     | 10.00 |                           |                                    |          |
| 18-17  | 0 / 1409                  | -17.5                     | -17.5 0.29 (1)                     | 10.00 |                           |                                    |          |
| 17-16  | 0 / 1351                  | -17.5                     | -17.5 0.29 (1)                     | 10.00 |                           |                                    |          |
| 16-15  | 0 / 1801                  | -17.5                     | -17.5 0.37 (1)                     | 10.00 |                           |                                    |          |
| 15-14  | 0 / 1351                  | -17.5                     | -17.5 0.29 (1)                     | 10.00 |                           |                                    |          |
| 14-13  | 0 / 1409                  | -17.5                     | -17.5 0.29 (1)                     | 10.00 |                           |                                    |          |
| 13-12  | 0 / 0                     | -17.5                     | -17.5 0.08 (4)                     | 10.00 |                           |                                    |          |

#### DESIGN CRITERIA

**SPECIFIED LOADS:**  
TOP CH. LL = 23.3 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.0 PSF  
TOTAL LOAD = 33.3 PSF

**SPACING = 24.0 IN./C**

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010

THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012, BCBC 2012, ABC 2014  
- CSA 086-09  
- TPIC 2011

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.23")  
CALCULATED VERT. DEFL.(LL)= L/999 (0.09")  
ALLOWABLE DEFL.(TL)= L/360 (1.23")  
CALCULATED VERT. DEFL.(TL)= L/999 (0.16")

CSI: TC=0.53 (7-8:1), BC=0.37 (15-16:1), WB=0.33 (10-13:1), SSI=0.23 (7-8:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

**NAIL VALUES**  
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1667 822 2284 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.86 (15) (INPUT = 0.90 )  
JSI METAL= 0.60 (10) (INPUT = 1.00 )



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION



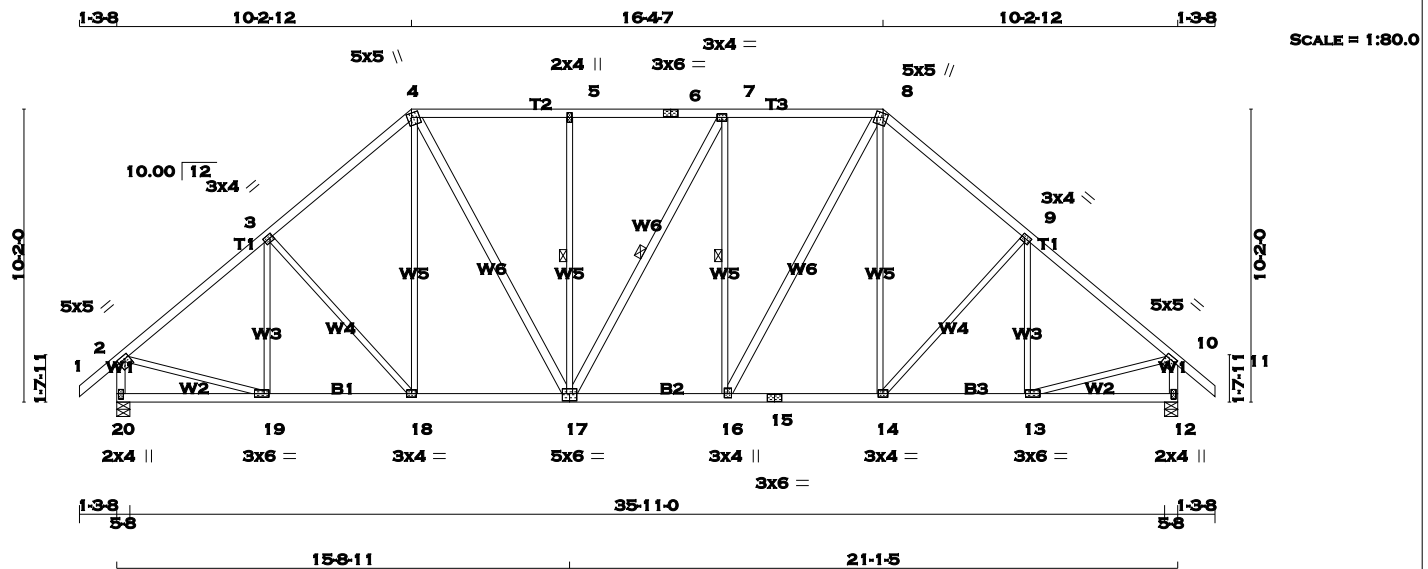


| <b>LUMBER</b><br>N. L. G. A. RULES<br>CHORDS SIZE<br>1 - 4 2x4 DRY No.2<br>4 - 6 2x4 DRY No.2<br>6 - 8 2x4 DRY No.2<br>8 - 11 2x4 DRY No.2<br>20 - 2 2x4 DRY No.2<br>12 - 10 2x4 DRY No.2<br>20 - 17 2x4 DRY No.2<br>17 - 15 2x4 DRY No.2<br>15 - 12 2x4 DRY No.2<br><br>ALL WEBS 2x3 DRY No.2<br>EXCEPT<br>4 - 17 2x4 DRY No.2<br>17 - 7 2x4 DRY No.2<br>16 - 8 2x4 DRY No.2<br><br>DRY: SEASONED LUMBER.                                                                                                                                                                                                                                                                                                                                             |                           |                           |                        | <b>DESIGN CRITERIA</b><br><br>SPECIFIED LOADS:<br>TOP CH. LL = 23.3 PSF<br>DL = 3.0 PSF<br>BOT CH. LL = 0.0 PSF<br>DL = 7.0 PSF<br>TOTAL LOAD = 33.3 PSF<br><br>SPACING = 24.0 IN./C/C<br><br>LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM<br><br>THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010<br><br>THIS DESIGN COMPLIES WITH:<br>- PART 9 OF OBC 2012, BCBC 2012, ABC 2014<br>- CSA 086-09<br>- TPIC 2011<br><br>(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD<br><br>ALLOWABLE DEFL.(LL)= L/360 (1.23")<br>CALCULATED VERT. DEFL.(LL) = L/999 (0.08")<br>ALLOWABLE DEFL.(TL)= L/360 (1.23")<br>CALCULATED VERT. DEFL.(TL) = L/999 (0.14")<br><br>CSI: TC=0.33 (9-10:1), BC=0.32 (16-17:1), WB=0.33 (10-13:1), SSI=0.20 (7-8:1)<br><br>DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10<br><br>COMPANION LIVE LOAD FACTOR = 0.50<br><br>TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .<br><br>NAIL VALUES<br>PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)<br>MAX MIN MAX MIN MAX MIN<br>MT20 618 354 1667 822 2284 1656<br><br>PLATE PLACEMENT TOL. = 0.250 inches<br><br>PLATE ROTATION TOL. = 5.0 Deg.<br><br>JSI GRIP= 0.86 (10) (INPUT = 0.90 )<br>JSI METAL= 0.61 (10) (INPUT = 1.00 )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                           |                        |          |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|---------------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------|----------|--------|--|--|--|------|--|--|--|-------|---------------------------|---------------------------|------------------------|-------|---------------------------|------------------------|--|-------|--|---------|--|-------|--|--|--|-----|--------|-------------|----------|-------|------|----------|----------|-----|-----------|-------------|----------|------|------|----------|----------|-----|-----------|-------------|----------|------|------|---------|----------|-----|-----------|-------------|----------|------|------|---------|----------|-----|-----------|-------------|----------|------|------|----------|----------|-----|-----------|-------------|----------|------|------|--------|----------|-----|-----------|-------------|----------|------|------|----------|----------|-----|-----------|-------------|----------|------|------|---------|----------|------|-----------|-------------|----------|------|------|---------|----------|-------|--------|-------------|----------|-------|------|----------|----------|------|-----------|---------|----------|------|------|----------|----------|-------|-----------|---------|----------|------|------|----------|----------|--|--|--|--|--|-------|----------|----------|-------|-------|-------------|----------|-------|--|--|--|-------|----------|-------------|----------|-------|--|--|--|-------|----------|-------------|----------|-------|--|--|--|-------|----------|-------------|----------|-------|--|--|--|-------|----------|-------------|----------|-------|--|--|--|-------|----------|-------------|----------|-------|--|--|--|-------|----------|-------------|----------|-------|--|--|--|-------|-------|-------------|----------|-------|--|--|--|
| <b>PLATES (table is in inches)</b><br>JT TYPE PLATES W LEN Y X<br>2 TMVW-t MT20 5.0 5.0 1.50 1.75<br>3 TMWW-t MT20 3.0 4.0 1.50 1.25<br>4 TTWW+m MT20 5.0 5.0 1.75 1.75<br>5 TMW+w MT20 2.0 4.0<br>6 TS-t MT20 3.0 6.0<br>7 TMWW-t MT20 3.0 4.0<br>8 TTWW+m MT20 5.0 5.0 1.75 1.75<br>9 TMWW-t MT20 3.0 4.0 1.50 1.25<br>10 TMVW-t MT20 5.0 5.0 1.50 1.75<br>12 BMV1+p MT20 2.0 4.0 2.25 1.00<br>13 BMWW-t MT20 3.0 6.0 1.50 2.00<br>14 BMWW-t MT20 3.0 4.0<br>15 BS-t MT20 3.0 6.0<br>16 BMWW+t MT20 3.0 4.0 1.75 1.50<br>17 BSWWW-I MT20 5.0 6.0 3.00 3.00<br>18 BMWW-t MT20 3.0 4.0<br>19 BMWW-t MT20 3.0 6.0 1.50 2.00<br>20 BMV1+p MT20 2.0 4.0 2.25 1.00<br><br>A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED. |                           |                           |                        | <b>LOADING</b><br>TOTAL LOAD CASES: (4)<br><table><tr><th colspan="4">CHORDS</th><th colspan="4">WEBS</th></tr><tr><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>FACTORED VERT. LOAD (PLF)</th><th>MAX. FACTORED CSI (LC)</th><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>MAX. FACTORED CSI (LC)</th><th></th></tr><tr><td>FR-TO</td><td></td><td>FROM TO</td><td></td><td>FR-TO</td><td></td><td></td><td></td></tr><tr><td>1-2</td><td>0 / 34</td><td>-77.3 -77.3</td><td>0.11 (1)</td><td>10.00</td><td>19-3</td><td>-262 / 7</td><td>0.15 (1)</td></tr><tr><td>2-3</td><td>-1836 / 0</td><td>-77.3 -77.3</td><td>0.33 (1)</td><td>4.65</td><td>3-18</td><td>-180 / 0</td><td>0.21 (1)</td></tr><tr><td>3-4</td><td>-1743 / 0</td><td>-77.3 -77.3</td><td>0.31 (1)</td><td>4.76</td><td>18-4</td><td>0 / 227</td><td>0.05 (1)</td></tr><tr><td>4-5</td><td>-1620 / 0</td><td>-77.3 -77.3</td><td>0.30 (1)</td><td>4.90</td><td>4-17</td><td>0 / 627</td><td>0.10 (1)</td></tr><tr><td>5-6</td><td>-1620 / 0</td><td>-77.3 -77.3</td><td>0.28 (1)</td><td>4.93</td><td>17-5</td><td>-453 / 0</td><td>0.32 (1)</td></tr><tr><td>6-7</td><td>-1620 / 0</td><td>-77.3 -77.3</td><td>0.28 (1)</td><td>4.93</td><td>17-7</td><td>-3 / 0</td><td>0.00 (1)</td></tr><tr><td>7-8</td><td>-1621 / 0</td><td>-77.3 -77.3</td><td>0.30 (1)</td><td>4.90</td><td>16-7</td><td>-454 / 0</td><td>0.32 (1)</td></tr><tr><td>8-9</td><td>-1742 / 0</td><td>-77.3 -77.3</td><td>0.31 (1)</td><td>4.76</td><td>16-8</td><td>0 / 630</td><td>0.10 (1)</td></tr><tr><td>9-10</td><td>-1836 / 0</td><td>-77.3 -77.3</td><td>0.33 (1)</td><td>4.65</td><td>14-8</td><td>0 / 225</td><td>0.05 (1)</td></tr><tr><td>10-11</td><td>0 / 34</td><td>-77.3 -77.3</td><td>0.11 (1)</td><td>10.00</td><td>14-9</td><td>-180 / 0</td><td>0.21 (1)</td></tr><tr><td>20-2</td><td>-1815 / 0</td><td>0.0 0.0</td><td>0.19 (1)</td><td>6.21</td><td>13-9</td><td>-261 / 7</td><td>0.15 (1)</td></tr><tr><td>12-10</td><td>-1815 / 0</td><td>0.0 0.0</td><td>0.19 (1)</td><td>6.21</td><td>2-19</td><td>0 / 1477</td><td>0.33 (1)</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>13-10</td><td>0 / 1477</td><td>0.33 (1)</td></tr><tr><td>20-19</td><td>0 / 0</td><td>-17.5 -17.5</td><td>0.11 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>19-18</td><td>0 / 1433</td><td>-17.5 -17.5</td><td>0.28 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>18-17</td><td>0 / 1315</td><td>-17.5 -17.5</td><td>0.26 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>17-16</td><td>0 / 1621</td><td>-17.5 -17.5</td><td>0.32 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>16-15</td><td>0 / 1314</td><td>-17.5 -17.5</td><td>0.27 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>15-14</td><td>0 / 1314</td><td>-17.5 -17.5</td><td>0.27 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>14-13</td><td>0 / 1433</td><td>-17.5 -17.5</td><td>0.28 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>13-12</td><td>0 / 0</td><td>-17.5 -17.5</td><td>0.11 (4)</td><td>10.00</td><td></td><td></td><td></td></tr></table> |                           |                        |          | CHORDS |  |  |  | WEBS |  |  |  | MEMB. | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED CSI (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. FACTORED CSI (LC) |  | FR-TO |  | FROM TO |  | FR-TO |  |  |  | 1-2 | 0 / 34 | -77.3 -77.3 | 0.11 (1) | 10.00 | 19-3 | -262 / 7 | 0.15 (1) | 2-3 | -1836 / 0 | -77.3 -77.3 | 0.33 (1) | 4.65 | 3-18 | -180 / 0 | 0.21 (1) | 3-4 | -1743 / 0 | -77.3 -77.3 | 0.31 (1) | 4.76 | 18-4 | 0 / 227 | 0.05 (1) | 4-5 | -1620 / 0 | -77.3 -77.3 | 0.30 (1) | 4.90 | 4-17 | 0 / 627 | 0.10 (1) | 5-6 | -1620 / 0 | -77.3 -77.3 | 0.28 (1) | 4.93 | 17-5 | -453 / 0 | 0.32 (1) | 6-7 | -1620 / 0 | -77.3 -77.3 | 0.28 (1) | 4.93 | 17-7 | -3 / 0 | 0.00 (1) | 7-8 | -1621 / 0 | -77.3 -77.3 | 0.30 (1) | 4.90 | 16-7 | -454 / 0 | 0.32 (1) | 8-9 | -1742 / 0 | -77.3 -77.3 | 0.31 (1) | 4.76 | 16-8 | 0 / 630 | 0.10 (1) | 9-10 | -1836 / 0 | -77.3 -77.3 | 0.33 (1) | 4.65 | 14-8 | 0 / 225 | 0.05 (1) | 10-11 | 0 / 34 | -77.3 -77.3 | 0.11 (1) | 10.00 | 14-9 | -180 / 0 | 0.21 (1) | 20-2 | -1815 / 0 | 0.0 0.0 | 0.19 (1) | 6.21 | 13-9 | -261 / 7 | 0.15 (1) | 12-10 | -1815 / 0 | 0.0 0.0 | 0.19 (1) | 6.21 | 2-19 | 0 / 1477 | 0.33 (1) |  |  |  |  |  | 13-10 | 0 / 1477 | 0.33 (1) | 20-19 | 0 / 0 | -17.5 -17.5 | 0.11 (4) | 10.00 |  |  |  | 19-18 | 0 / 1433 | -17.5 -17.5 | 0.28 (1) | 10.00 |  |  |  | 18-17 | 0 / 1315 | -17.5 -17.5 | 0.26 (1) | 10.00 |  |  |  | 17-16 | 0 / 1621 | -17.5 -17.5 | 0.32 (1) | 10.00 |  |  |  | 16-15 | 0 / 1314 | -17.5 -17.5 | 0.27 (1) | 10.00 |  |  |  | 15-14 | 0 / 1314 | -17.5 -17.5 | 0.27 (1) | 10.00 |  |  |  | 14-13 | 0 / 1433 | -17.5 -17.5 | 0.28 (1) | 10.00 |  |  |  | 13-12 | 0 / 0 | -17.5 -17.5 | 0.11 (4) | 10.00 |  |  |  |
| CHORDS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                           |                           |                        | WEBS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                           |                        |          |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| MEMB.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED CSI (LC) | MEMB.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | MAX. FACTORED FORCE (LBS) | MAX. FACTORED CSI (LC) |          |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| FR-TO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                           | FROM TO                   |                        | FR-TO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |                        |          |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 1-2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 0 / 34                    | -77.3 -77.3               | 0.11 (1)               | 10.00                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 19-3                      | -262 / 7               | 0.15 (1) |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 2-3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | -1836 / 0                 | -77.3 -77.3               | 0.33 (1)               | 4.65                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 3-18                      | -180 / 0               | 0.21 (1) |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 3-4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | -1743 / 0                 | -77.3 -77.3               | 0.31 (1)               | 4.76                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 18-4                      | 0 / 227                | 0.05 (1) |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 4-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | -1620 / 0                 | -77.3 -77.3               | 0.30 (1)               | 4.90                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 4-17                      | 0 / 627                | 0.10 (1) |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 5-6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | -1620 / 0                 | -77.3 -77.3               | 0.28 (1)               | 4.93                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 17-5                      | -453 / 0               | 0.32 (1) |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 6-7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | -1620 / 0                 | -77.3 -77.3               | 0.28 (1)               | 4.93                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 17-7                      | -3 / 0                 | 0.00 (1) |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 7-8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | -1621 / 0                 | -77.3 -77.3               | 0.30 (1)               | 4.90                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 16-7                      | -454 / 0               | 0.32 (1) |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 8-9                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | -1742 / 0                 | -77.3 -77.3               | 0.31 (1)               | 4.76                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 16-8                      | 0 / 630                | 0.10 (1) |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 9-10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | -1836 / 0                 | -77.3 -77.3               | 0.33 (1)               | 4.65                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 14-8                      | 0 / 225                | 0.05 (1) |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 10-11                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0 / 34                    | -77.3 -77.3               | 0.11 (1)               | 10.00                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 14-9                      | -180 / 0               | 0.21 (1) |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 20-2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | -1815 / 0                 | 0.0 0.0                   | 0.19 (1)               | 6.21                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 13-9                      | -261 / 7               | 0.15 (1) |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 12-10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | -1815 / 0                 | 0.0 0.0                   | 0.19 (1)               | 6.21                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 2-19                      | 0 / 1477               | 0.33 (1) |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                           |                           |                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 13-10                     | 0 / 1477               | 0.33 (1) |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 20-19                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0 / 0                     | -17.5 -17.5               | 0.11 (4)               | 10.00                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |                        |          |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 19-18                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0 / 1433                  | -17.5 -17.5               | 0.28 (1)               | 10.00                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |                        |          |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 18-17                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0 / 1315                  | -17.5 -17.5               | 0.26 (1)               | 10.00                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |                        |          |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 17-16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0 / 1621                  | -17.5 -17.5               | 0.32 (1)               | 10.00                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |                        |          |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 16-15                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0 / 1314                  | -17.5 -17.5               | 0.27 (1)               | 10.00                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |                        |          |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 15-14                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0 / 1314                  | -17.5 -17.5               | 0.27 (1)               | 10.00                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |                        |          |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 14-13                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0 / 1433                  | -17.5 -17.5               | 0.28 (1)               | 10.00                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |                        |          |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |
| 13-12                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0 / 0                     | -17.5 -17.5               | 0.11 (4)               | 10.00                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |                        |          |        |  |  |  |      |  |  |  |       |                           |                           |                        |       |                           |                        |  |       |  |         |  |       |  |  |  |     |        |             |          |       |      |          |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |         |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |        |          |     |           |             |          |      |      |          |          |     |           |             |          |      |      |         |          |      |           |             |          |      |      |         |          |       |        |             |          |       |      |          |          |      |           |         |          |      |      |          |          |       |           |         |          |      |      |          |          |  |  |  |  |  |       |          |          |       |       |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |          |             |          |       |  |  |  |       |       |             |          |       |  |  |  |



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION



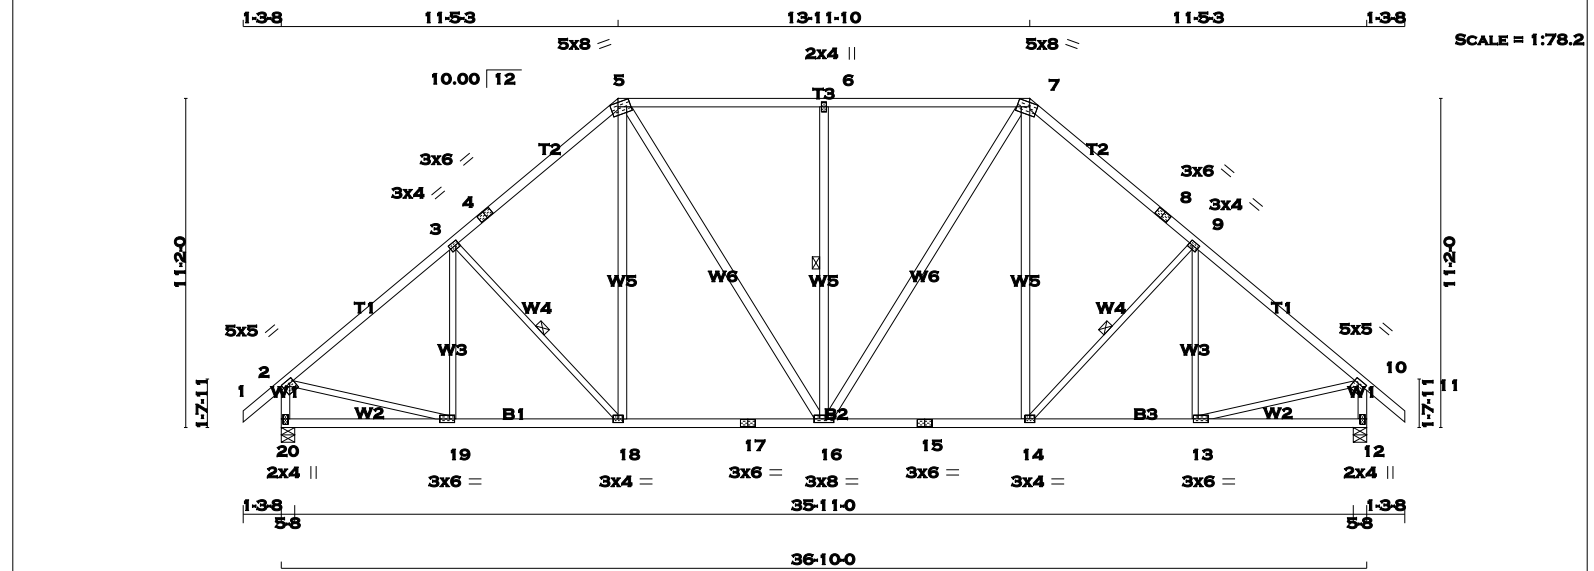

TOTAL WEIGHT = 2 X 195 = 391 lb  
[M][F]

| LUMBER                |      |        | N. L. G. A. RULES |     |  |
|-----------------------|------|--------|-------------------|-----|--|
| CHORDS                | SIZE | LUMBER | DESCR.            |     |  |
| 1 - 4                 | 2x4  | DRY    | No.2              | SPF |  |
| 4 - 5                 | 2x4  | DRY    | No.2              | SPF |  |
| 5 - 7                 | 2x4  | DRY    | No.2              | SPF |  |
| 7 - 8                 | 2x4  | DRY    | No.2              | SPF |  |
| 8 - 11                | 2x4  | DRY    | No.2              | SPF |  |
| 20 - 2                | 2x4  | DRY    | No.2              | SPF |  |
| 12 - 10               | 2x4  | DRY    | No.2              | SPF |  |
| 20 - 17               | 2x4  | DRY    | No.2              | SPF |  |
| 17 - 15               | 2x4  | DRY    | No.2              | SPF |  |
| 15 - 12               | 2x4  | DRY    | No.2              | SPF |  |
| ALL WEBS EXCEPT       | 2x4  | DRY    | No.2              | SPF |  |
| 19 - 3                | 2x3  | DRY    | No.2              | SPF |  |
| 3 - 18                | 2x3  | DRY    | No.2              | SPF |  |
| 14 - 9                | 2x3  | DRY    | No.2              | SPF |  |
| 13 - 9                | 2x3  | DRY    | No.2              | SPF |  |
| 2 - 19                | 2x3  | DRY    | No.2              | SPF |  |
| 13 - 10               | 2x3  | DRY    | No.2              | SPF |  |
| DRY: SEASONED LUMBER. |      |        |                   |     |  |

| PLATES (table is in inches)                                                      |        |        |     |     |           |
|----------------------------------------------------------------------------------|--------|--------|-----|-----|-----------|
| JT                                                                               | TYPE   | PLATES | W   | LEN | Y X       |
| 2                                                                                | TMVW-t | MT20   | 5.0 | 5.0 | 1.50 1.75 |
| 3                                                                                | TMVW-t | MT20   | 3.0 | 4.0 | 1.50 1.25 |
| 4                                                                                | TS-t   | MT20   | 3.0 | 6.0 |           |
| 5                                                                                | TTVW-m | MT20   | 5.0 | 8.0 | Edge 3.00 |
| 6                                                                                | TMW+w  | MT20   | 2.0 | 4.0 |           |
| 7                                                                                | TTVW-m | MT20   | 5.0 | 8.0 | Edge 3.00 |
| 8                                                                                | TS-t   | MT20   | 3.0 | 6.0 |           |
| 9                                                                                | TMVW-t | MT20   | 3.0 | 4.0 | 1.50 1.25 |
| 10                                                                               | TMVW-t | MT20   | 5.0 | 5.0 | 1.50 1.75 |
| 12                                                                               | BMV1+p | MT20   | 2.0 | 4.0 | 2.25 1.00 |
| 13                                                                               | BMVW-t | MT20   | 3.0 | 6.0 | 1.50 2.00 |
| 14                                                                               | BMVW-t | MT20   | 3.0 | 4.0 |           |
| 15                                                                               | BS-t   | MT20   | 3.0 | 6.0 |           |
| 16                                                                               | BMVW-t | MT20   | 3.0 | 8.0 |           |
| 17                                                                               | BS-t   | MT20   | 3.0 | 6.0 |           |
| 18                                                                               | BMVW-t | MT20   | 3.0 | 4.0 |           |
| 19                                                                               | BMVW-t | MT20   | 3.0 | 6.0 | 1.50 2.00 |
| 20                                                                               | BMV1+p | MT20   | 2.0 | 4.0 | 2.25 1.00 |
| Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.                |        |        |     |     |           |
| A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED. |        |        |     |     |           |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

| BEARINGS |      | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQRD BRG |
|----------|------|-------------------------|---------------------------------|-----------|-----------|
| JT       |      | VERT                    | HORZ                            | DOWN      | UPLIFT    |
| 20       | 1854 | 0                       | 1854                            | 0         | 0         |
| 12       | 1854 | 0                       | 1854                            | 0         | 0         |

| UNFACTORED REACTIONS |      | 1ST LCASE | MAX/MIN. COMPONENT REACTIONS |      |           |      |      |      |     |
|----------------------|------|-----------|------------------------------|------|-----------|------|------|------|-----|
| JT                   |      | COMBINED  | SNOW                         | LIVE | PERM.LIVE | WIND | DEAD | SOIL |     |
| 20                   | 1299 | 922       | 0                            | 0/0  | 0/0       | 0/0  | 377  | 0    | 0/0 |
| 12                   | 1299 | 922       | 0                            | 0/0  | 0/0       | 0/0  | 377  | 0    | 0/0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 20, 12

**BRACING**  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.53 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 - 2x3 SPF No.2 LATERAL BRACE(S) AT 1/2 LENGTH OF 3-18, 6-16, 9-14. DBS = 20-0-0 . CBF = 83 LBS.

DBS = DIAGONAL BRACE SPACING (MAX). CBF = CUMULATIVE BRACING FORCE. FASTEN LATERAL BRACE(S) USING (0.122"x3") SPIRAL NAILS : 1 NAIL FOR 2x3 BRACE(S), 2 FOR 1x4, 2x4, 2x5, 3 FOR 2x6, 4 FOR 2x8, 5 FOR 2x10, AND 6 FOR 2x12.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

**LOADING**  
TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                           | WEBS  |                           |                           |          |
|--------|---------------------------|---------------------------|---------------------------|-------|---------------------------|---------------------------|----------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. UNBRACED LENGTH (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. UNBRACED LENGTH (LC) |          |
| FR-TO  |                           | FROM TO                   |                           | FR-TO |                           |                           |          |
| 1-2    | 0/34                      | -77.3                     | -77.3 0.11 (1)            | 10.00 | 19-3                      | -217/29                   | 0.15 (1) |
| 2-3    | -1851/0                   | -77.3                     | -77.3 0.42 (1)            | 4.53  | 3-18                      | -260/0                    | 0.12 (1) |
| 3-4    | -1692/0                   | -77.3                     | -77.3 0.39 (1)            | 4.72  | 18-5                      | 0/300                     | 0.05 (1) |
| 4-5    | -1692/0                   | -77.3                     | -77.3 0.39 (1)            | 4.72  | 5-16                      | 0/468                     | 0.08 (1) |
| 5-6    | -1528/0                   | -77.3                     | -77.3 0.54 (1)            | 4.66  | 16-6                      | -663/0                    | 0.43 (1) |
| 6-7    | -1528/0                   | -77.3                     | -77.3 0.54 (1)            | 4.66  | 16-7                      | 0/468                     | 0.08 (1) |
| 7-8    | -1692/0                   | -77.3                     | -77.3 0.39 (1)            | 4.72  | 14-7                      | 0/300                     | 0.05 (1) |
| 8-9    | -1692/0                   | -77.3                     | -77.3 0.39 (1)            | 4.72  | 14-9                      | -260/0                    | 0.12 (1) |
| 9-10   | -1851/0                   | -77.3                     | -77.3 0.42 (1)            | 4.53  | 13-9                      | -217/29                   | 0.15 (1) |
| 10-11  | 0/34                      | -77.3                     | -77.3 0.11 (1)            | 10.00 | 2-19                      | 0/1484                    | 0.33 (1) |
| 20-2   | -1811/0                   | 0.0                       | 0.0 0.19 (1)              | 6.21  | 13-10                     | 0/1484                    | 0.33 (1) |
| 12-10  | -1811/0                   | 0.0                       | 0.0 0.19 (1)              | 6.21  |                           |                           |          |
| 20-19  | 0/0                       | -17.5                     | -17.5 0.13 (4)            | 10.00 |                           |                           |          |
| 19-18  | 0/1448                    | -17.5                     | -17.5 0.31 (1)            | 10.00 |                           |                           |          |
| 18-17  | 0/1275                    | -17.5                     | -17.5 0.30 (1)            | 10.00 |                           |                           |          |
| 17-16  | 0/1275                    | -17.5                     | -17.5 0.30 (1)            | 10.00 |                           |                           |          |
| 16-15  | 0/1275                    | -17.5                     | -17.5 0.30 (1)            | 10.00 |                           |                           |          |
| 15-14  | 0/1275                    | -17.5                     | -17.5 0.30 (1)            | 10.00 |                           |                           |          |
| 14-13  | 0/1448                    | -17.5                     | -17.5 0.31 (1)            | 10.00 |                           |                           |          |
| 13-12  | 0/0                       | -17.5                     | -17.5 0.13 (4)            | 10.00 |                           |                           |          |

**DESIGN CRITERIA**

SPECIFIED LOADS:  
TOP CH. LL = 23.3 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.0 PSF  
TOTAL LOAD = 33.3 PSF

SPACING = 24.0 IN./C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010

THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012, BCBC 2012, ABC 2014  
- CSA 086-09  
- TPIC 2011

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.23")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.07")  
ALLOWABLE DEFL.(TL)= L/360 (1.23")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.15")

CSI: TC=0.54 (6-7:1) , BC=0.31 (13-14:1) , WB=0.43 (6-16:1) , SSI=0.26 (6-7:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1667 822 2284 1656


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.89 (10) (INPUT = 0.90 )  
JSI METAL= 0.62 (2) (INPUT = 1.00 )



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION

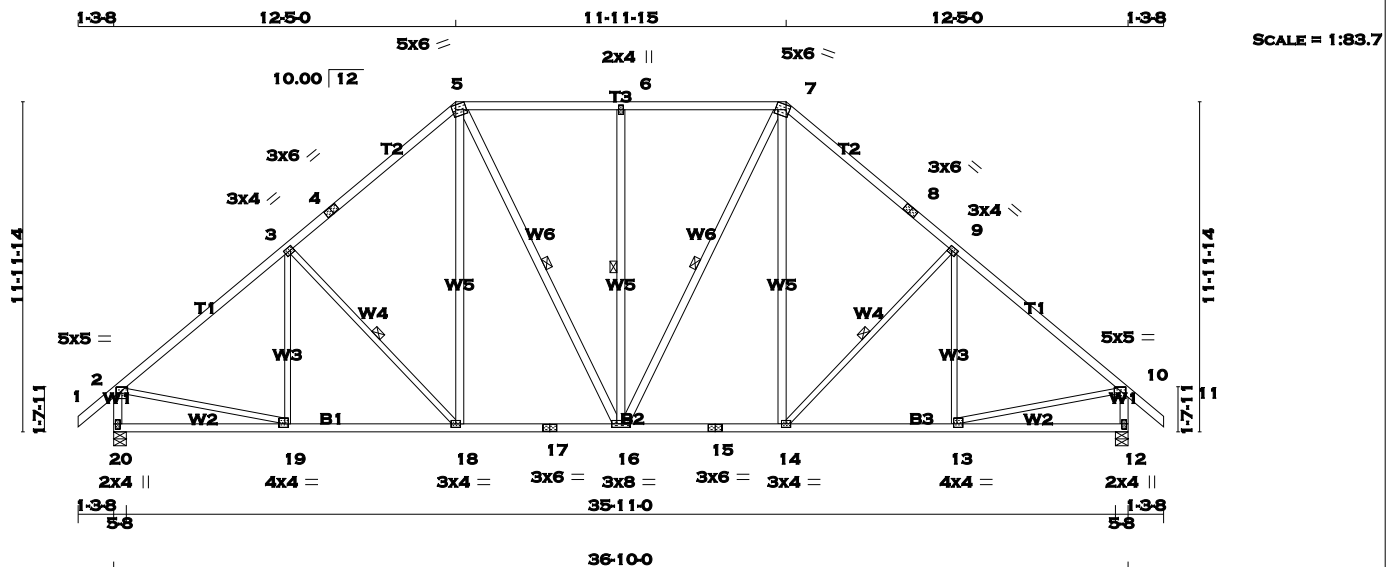

|                       |  |  |  |  |  |  |  |  |  |
|-----------------------|--|--|--|--|--|--|--|--|--|
| TOTAL WEIGHT = 202 lb |  |  |  |  |  |  |  |  |  |
| [M][F]                |  |  |  |  |  |  |  |  |  |
| LUMBER                |  |  |  |  |  |  |  |  |  |
| N. L. G. A. RULES     |  |  |  |  |  |  |  |  |  |
| CHORDS SIZE           |  |  |  |  |  |  |  |  |  |
| LUMBER                |  |  |  |  |  |  |  |  |  |
| DESCR.                |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SPF                   |  |  |  |  |  |  |  |  |  |
| SP                    |  |  |  |  |  |  |  |  |  |

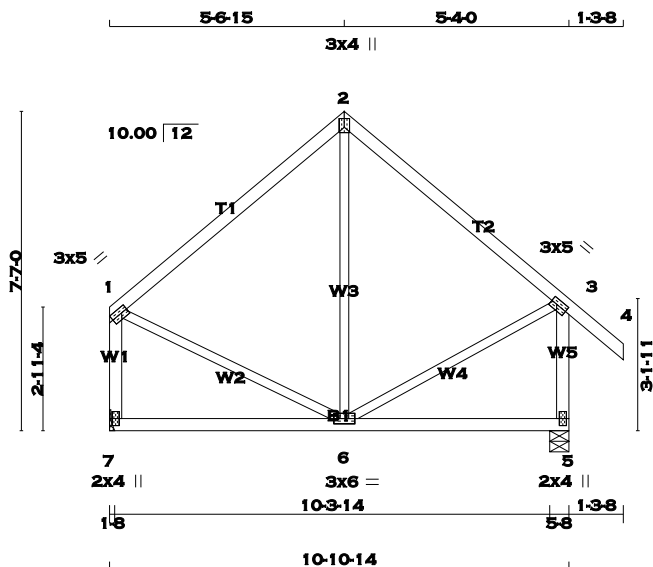

SCALE = 1:54.7

TOTAL WEIGHT = 52 lb

**LUMBER**

| N. L. G. A. RULES | CHORDS | SIZE | LUMBER | DESCR. |
|-------------------|--------|------|--------|--------|
| 1 - 2             | 2x4    | DRY  | No.2   | SPF    |
| 2 - 4             | 2x4    | DRY  | No.2   | SPF    |
| 7 - 1             | 2x4    | DRY  | No.2   | SPF    |
| 5 - 3             | 2x4    | DRY  | No.2   | SPF    |
| 7 - 5             | 2x4    | DRY  | No.2   | SPF    |
| ALL WEBS EXCEPT   | 2x3    | DRY  | No.2   | SPF    |

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| 1  | TMVW-t  | MT20   | 3.0 | 5.0 | 1.50 | 1.75 |
| 2  | TTW+p   | MT20   | 3.0 | 4.0 | 2.50 | 1.50 |
| 3  | TMVW-t  | MT20   | 3.0 | 5.0 | 1.50 | 1.75 |
| 5  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |
| 6  | BMVWW-t | MT20   | 3.0 | 6.0 |      |      |
| 7  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |

A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

**BEARINGS**

| JT | FACTORED GROSS REACTION |      | MAXIMUM FACTORED GROSS REACTION |      | INPUT BRG | REQRD BRG        |
|----|-------------------------|------|---------------------------------|------|-----------|------------------|
|    | VERT                    | HORZ | DOWN                            | HORZ |           |                  |
| 7  | 517                     | 0    | 517                             | 0    | 0         | IN-SX            |
| 5  | 624                     | 0    | 624                             | 0    | 0         | HANGER BY OTHERS |

MIN. SEAT SIZE: 1-8

**UNFACTORED REACTIONS**

| JT | 1ST LCASE |         | MAX./MIN. COMPONENT REACTIONS |           | WIND  | DEAD    | SOIL  |
|----|-----------|---------|-------------------------------|-----------|-------|---------|-------|
|    | COMBINED  | SNOW    | LIVE                          | PERM.LIVE |       |         |       |
| 7  | 363       | 254 / 0 | 0 / 0                         | 0 / 0     | 0 / 0 | 109 / 0 | 0 / 0 |
| 5  | 436       | 318 / 0 | 0 / 0                         | 0 / 0     | 0 / 0 | 117 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 5

**BRACING**  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                |                     | WEBS  |                           |           |  |  |
|--------|---------------------------|---------------------------|----------------|---------------------|-------|---------------------------|-----------|--|--|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | LC1 MAX. (LC)  | MAX. UNBRAC. LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. (LC) |  |  |
| FR-TO  |                           | FROM                      | TO             |                     | FR-TO |                           |           |  |  |
| 1-2    | -264 / 0                  | -77.3                     | -77.3 0.31 (1) | 6.25                | 6-2   | -83 / 66                  | 0.08 (1)  |  |  |
| 2-3    | -264 / 0                  | -77.3                     | -77.3 0.28 (1) | 6.25                | 1-6   | 0 / 224                   | 0.05 (1)  |  |  |
| 3-4    | 0 / 34                    | -77.3                     | -77.3 0.11 (1) | 10.00               | 6-3   | 0 / 229                   | 0.05 (1)  |  |  |
| 7-1    | -480 / 0                  | 0.0                       | 0.0 0.08 (1)   | 7.81                |       |                           |           |  |  |
| 5-3    | -589 / 0                  | 0.0                       | 0.0 0.10 (1)   | 7.81                |       |                           |           |  |  |
| 7-6    | 0 / 0                     | -17.5                     | -17.5 0.15 (4) | 10.00               |       |                           |           |  |  |
| 6-5    | 0 / 0                     | -17.5                     | -17.5 0.15 (4) | 10.00               |       |                           |           |  |  |

**DESIGN CRITERIA**

SPECIFIED LOADS:

| TOP CH.    | LL | PSF  |
|------------|----|------|
| DL         | =  | 3.0  |
| BOT CH.    | LL | PSF  |
| DL         | =  | 0.0  |
| DL         | =  | 7.0  |
| TOTAL LOAD | =  | 33.3 |

**SPACING = 24.0 IN./C**

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010

THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012, BCBC 2012, ABC 2014  
- CSA 086-09  
- TPIC 2011

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.36")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")  
ALLOWABLE DEFL.(TL)= L/360 (0.36")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.02")

CSI: TC=0.31 (1-2:1), BC=0.15 (6-7:4), WB=0.08 (2-6:1), SSI=0.13 (1-2:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

**NAIL VALUES**  
PLATE GRIP(DRY) SHEAR SECTION  
(PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1667 822 2284 1656

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.52 (3) (INPUT = 0.90 )  
JSI METAL= 0.14 (3) (INPUT = 1.00 )



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION



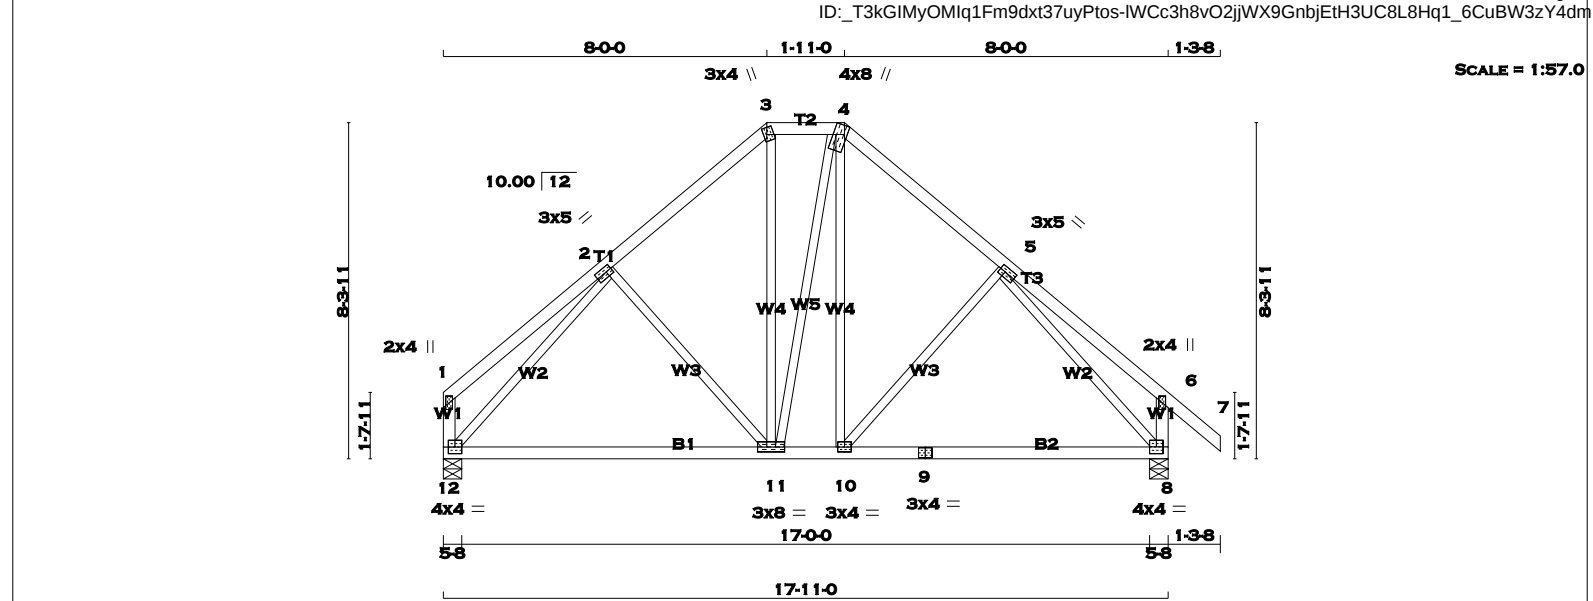

**LUMBER**  
N. L. G. A. RULES  
CHORDS SIZE LUMBER DESCR.  
1 - 3 2x4 DRY No.2 SPF  
3 - 4 2x4 DRY No.2 SPF  
4 - 7 2x4 DRY No.2 SPF  
12 - 1 2x4 DRY No.2 SPF  
8 - 6 2x4 DRY No.2 SPF  
12 - 9 2x4 DRY No.2 SPF  
9 - 8 2x4 DRY No.2 SPF  
  
ALL WEBS 2x3 DRY No.2 SPF  
EXCEPT  
  
DRY: SEASONED LUMBER.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**  
**BEARINGS**  
FACTORED MAXIMUM FACTORED INPUT REQ'D  
GROSS REACTION GROSS REACTION BRG BRG  
JT VERT HORZ DOWN HORZ UPLIFT IN-SX IN-SX  
12 850 0 850 0 0 5-8 5-8  
8 957 0 957 0 0 5-8 5-8  
  
**UNFACTORED REACTIONS**  
1ST LCASE MAX/MIN. COMPONENT REACTIONS  
JT COMBINED SNOW LIVE PERM.LIVE WIND DEAD SOIL  
12 596 417 / 0 0 / 0 0 / 0 0 / 0 179 / 0 0 / 0  
8 669 482 / 0 0 / 0 0 / 0 0 / 0 187 / 0 0 / 0  
  
BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 12, 8  
  
**BRACING**  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.  
  
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.  
  
**LOADING**  
TOTAL LOAD CASES: (4)  
  
CHORDS WEBS  
MAX. FACTORED MAX. FACTORED MAX. FACTORED  
MEMB. FORCE VERT. LOAD LC1 MAX. MEMB. FORCE MAX.  
(LBS) (PLF) CSI (LC) UNBRAC (LBS) CSI (LC)  
FR-TO FROM TO LENGTH FR-TO  
1-2 0 / 23 -77.3 -77.3 0.20 (1) 10.00 2-11 -149 / 6 0.10 (1)  
2-3 -652 / 0 -77.3 -77.3 0.16 (1) 6.25 11-3 0 / 210 0.05 (1)  
3-4 -484 / 0 -77.3 -77.3 0.04 (1) 6.25 11-4 0 / 4 0.00 (1)  
4-5 -651 / 0 -77.3 -77.3 0.16 (1) 6.25 10-4 0 / 206 0.05 (1)  
5-6 0 / 23 -77.3 -77.3 0.20 (1) 10.00 10-5 -149 / 6 0.10 (1)  
6-7 0 / 34 -77.3 -77.3 0.11 (1) 10.00 12-2 -890 / 0 0.56 (1)  
12-1 -117 / 0 0.0 0.0 0.01 (1) 7.81 5-8 -889 / 0 0.56 (1)  
8-6 -224 / 0 0.0 0.0 0.02 (1) 7.81  
  
12-11 0 / 581 -17.5 -17.5 0.30 (4) 10.00  
11-10 0 / 484 -17.5 -17.5 0.30 (4) 10.00  
10-9 0 / 580 -17.5 -17.5 0.29 (4) 10.00  
9-8 0 / 580 -17.5 -17.5 0.29 (4) 10.00

TOTAL WEIGHT = 89 lb [M][F]

**PLATES (table is in inches)**  
JT TYPE PLATES W LEN Y X  
1 TMV+p MT20 2.0 4.0  
2 TMWW-t MT20 3.0 5.0 1.50 1.75  
3 TTW+m MT20 3.0 4.0 2.00 1.00  
4 TTWW+m MT20 4.0 8.0 Edge 0.75  
5 TMWW-t MT20 3.0 5.0 1.50 1.75  
6 TMV+p MT20 2.0 4.0  
8 BMVW1-t MT20 4.0 4.0  
9 BS-t MT20 3.0 4.0  
10 BMWW-t MT20 3.0 4.0  
11 BMWWW-t MT20 3.0 8.0  
12 BMVW1-t MT20 4.0 4.0  
  
Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.  
  
A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.


**DESIGN CRITERIA**  
  
SPECIFIED LOADS:  
TOP CH. LL = 23.3 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.0 PSF  
TOTAL LOAD = 33.3 PSF  
  
**SPACING = 24.0 IN. C/C**  
  
LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM  
  
THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010  
  
THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012, BCBC 2012, ABC 2014  
- CSA 086-09  
- TPIC 2011  
  
(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD  
  
ALLOWABLE DEFL.(LL)= L/360 (0.60")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.02")  
ALLOWABLE DEFL.(TL)= L/360 (0.60")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.12")  
  
CSI: TC=0.20 (5-6:1), BC=0.30 (10-11:4), WB=0.56 (2-12:1), SSI=0.11 (4-5:1)  
  
DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS= 1.10  
  
COMPANION LIVE LOAD FACTOR = 0.50  
  
TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .  
  
NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION  
(PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 618 354 1667 822 2284 1656  
  
PLATE PLACEMENT TOL. = 0.250 inches  
  
PLATE ROTATION TOL. = 5.0 Deg.  
  
JSI GRIP= 0.86 (2) (INPUT = 0.90 )  
JSI METAL= 0.26 (2) (INPUT = 1.00 )

RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION



JSI GRIP= 0.89 (7) (INPUT = 0.90 )  
JSI METAL= 0.26 (3) (INPUT = 1.00 )



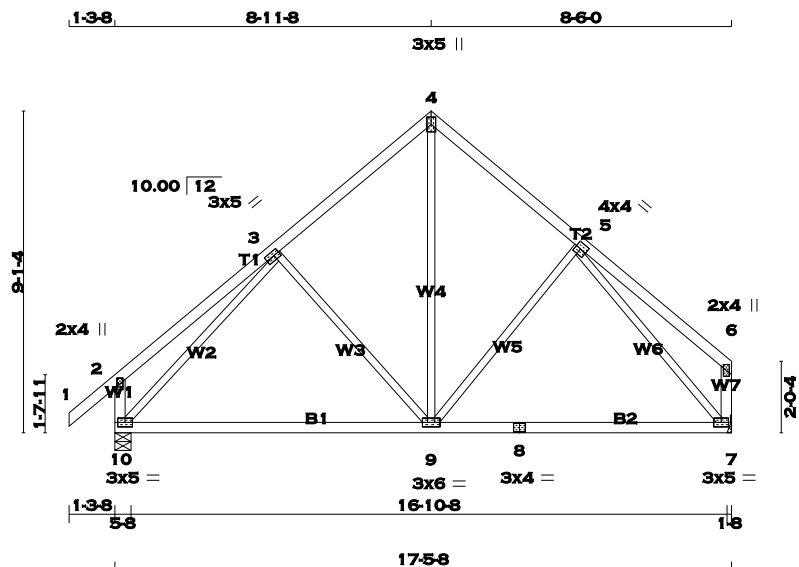

TOTAL WEIGHT = 2 X 79 = 158 lb  
[M][F]

| LUMBER                |  |      |     |        |        |
|-----------------------|--|------|-----|--------|--------|
| N. L. G. A. RULES     |  |      |     |        |        |
| CHORDS                |  | SIZE |     | LUMBER | DESCR. |
| 1 - 4                 |  | 2x4  | DRY | No.2   | SPF    |
| 4 - 6                 |  | 2x4  | DRY | No.2   | SPF    |
| 10 - 2                |  | 2x4  | DRY | No.2   | SPF    |
| 7 - 6                 |  | 2x4  | DRY | No.2   | SPF    |
| 10 - 8                |  | 2x4  | DRY | No.2   | SPF    |
| 8 - 7                 |  | 2x4  | DRY | No.2   | SPF    |
| ALL WEBS              |  | 2x3  | DRY | No.2   | SPF    |
| EXCEPT                |  |      |     |        |        |
| DRY: SEASONED LUMBER. |  |      |     |        |        |

| PLATES (table is in inches) |         |        |     |     |      |      |
|-----------------------------|---------|--------|-----|-----|------|------|
| JT                          | TYPE    | PLATES | W   | LEN | Y    | X    |
| 2                           | TMV+p   | MT20   | 2.0 | 4.0 |      |      |
| 3                           | TMVW-t  | MT20   | 3.0 | 5.0 | 1.50 | 2.00 |
| 4                           | TTW+p   | MT20   | 3.0 | 5.0 |      |      |
| 5                           | TMVW-t  | MT20   | 4.0 | 4.0 | 2.00 | 1.75 |
| 6                           | TMV+p   | MT20   | 2.0 | 4.0 |      |      |
| 7                           | BMVW1-t | MT20   | 3.0 | 5.0 |      |      |
| 8                           | BS-t    | MT20   | 3.0 | 4.0 |      |      |
| 9                           | BMVWV-t | MT20   | 3.0 | 6.0 |      |      |
| 10                          | BMVW1-t | MT20   | 3.0 | 5.0 |      |      |

A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| DESIGNER |  |                |      |                  |      |        |                     |       |  |
|----------|--|----------------|------|------------------|------|--------|---------------------|-------|--|
| BEARINGS |  |                |      |                  |      |        |                     |       |  |
|          |  | FACTORED       |      | MAXIMUM FACTORED |      |        | INPUT               | REQRD |  |
|          |  | GROSS REACTION |      | GROSS REACTION   |      |        | BRG                 | BRG   |  |
| JT       |  | VERT           | HORZ | DOWN             | HORZ | UPLIFT | IN-SX               | IN-SX |  |
| 10       |  | 935            | 0    | 935              | 0    | 0      | 5-8                 | 5-8   |  |
| 7        |  | 828            | 0    | 828              | 0    | 0      | HANGER BY OTHERS    |       |  |
|          |  |                |      |                  |      |        | MIN. SEAT SIZE: 1-8 |       |  |

#### UNFACTORED REACTIONS

| 1ST LCASE |          | MAX./MIN. COMPONENT REACTIONS |       |           |       |         |       |  |  |
|-----------|----------|-------------------------------|-------|-----------|-------|---------|-------|--|--|
| JT        | COMBINED | SNOW                          | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |  |  |
| 10        | 654      | 471 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 183 / 0 | 0 / 0 |  |  |
| 7         | 581      | 406 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 175 / 0 | 0 / 0 |  |  |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 10

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                           | WEBS  |                           |                           |          |
|--------|---------------------------|---------------------------|---------------------------|-------|---------------------------|---------------------------|----------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. UNBRACED LENGTH (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. UNBRACED LENGTH (LC) |          |
| FR-TO  |                           | FROM TO                   |                           | FR-TO |                           |                           |          |
| 1-2    | 0 / 34                    | -77.3 -77.3               | 0.11 (1)                  | 10.00 | 3-9                       | -202 / 0                  | 0.17 (1) |
| 2-3    | 0 / 26                    | -77.3 -77.3               | 0.25 (1)                  | 10.00 | 9-4                       | 0 / 456                   | 0.10 (1) |
| 3-4    | -586 / 0                  | -77.3 -77.3               | 0.20 (1)                  | 6.25  | 9-5                       | -150 / 9                  | 0.13 (1) |
| 4-5    | -584 / 0                  | -77.3 -77.3               | 0.18 (1)                  | 6.25  | 10-3                      | -851 / 0                  | 0.69 (1) |
| 5-6    | 0 / 25                    | -77.3 -77.3               | 0.23 (1)                  | 10.00 | 5-7                       | -835 / 0                  | 0.68 (1) |
| 10-2   | -238 / 0                  | 0.0                       | 0.03 (1)                  | 7.81  |                           |                           |          |
| 7-6    | -124 / 0                  | 0.0                       | 0.01 (1)                  | 7.81  |                           |                           |          |
| 10-9   | 0 / 565                   | -17.5 -17.5               | 0.42 (4)                  | 10.00 |                           |                           |          |
| 9-8    | 0 / 526                   | -17.5 -17.5               | 0.42 (4)                  | 10.00 |                           |                           |          |
| 8-7    | 0 / 526                   | -17.5 -17.5               | 0.42 (4)                  | 10.00 |                           |                           |          |

#### DESIGN CRITERIA

##### SPECIFIED LOADS:

|            |    |      |      |     |
|------------|----|------|------|-----|
| TOP CH.    | LL | =    | 23.3 | PSF |
|            | DL | =    | 3.0  | PSF |
| BOT CH.    | LL | =    | 0.0  | PSF |
|            | DL | =    | 7.0  | PSF |
| TOTAL LOAD | =  | 33.3 | PSF  |     |

##### SPACING = 24.0 IN./C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010

THIS DESIGN COMPLIES WITH:

- PART 9 OF OBC 2012 , BCBC 2012 , ABC 2014
- CSA 086-09
- TPIC 2011

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.58")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.02")  
ALLOWABLE DEFL.(TL)= L/360 (0.58")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.14")

CSI: TC=0.25 (2-3:1) , BC=0.42 (9-10:4) , WB=0.69 (3-10:1) , SSI=0.13 (9-10:4)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

##### NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
| (PSI) | (PLI)     | (PLI) |         |
| MAX   | MIN       | MAX   | MIN     |
| MT20  | 618       | 354   | 1667    |
|       | 822       | 2284  | 1656    |

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (7) (INPUT = 0.90 )  
JSI METAL= 0.31 (5) (INPUT = 1.00 )



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION



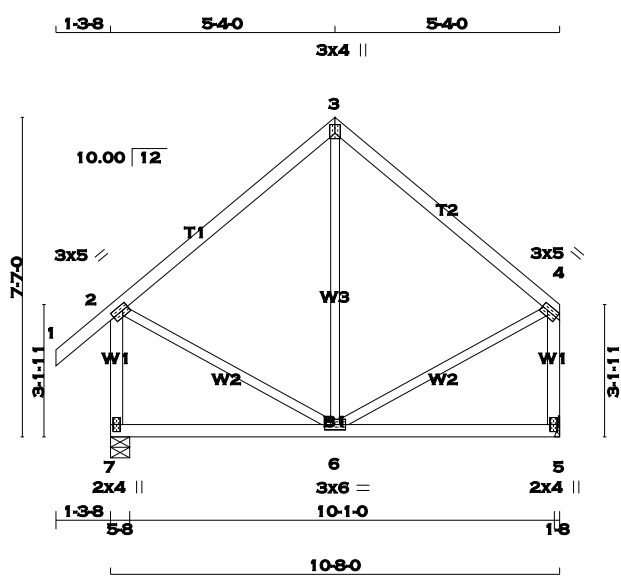

TOTAL WEIGHT = 2 X 51 = 103 lb  
[M][F]

| LUMBER            |        |      |        |  | DESCR. |
|-------------------|--------|------|--------|--|--------|
| N. L. G. A. RULES | CHORDS | SIZE | LUMBER |  |        |
| 1 - 3             | 2x4    | DRY  | No.2   |  | SPF    |
| 3 - 4             | 2x4    | DRY  | No.2   |  | SPF    |
| 7 - 2             | 2x4    | DRY  | No.2   |  | SPF    |
| 5 - 4             | 2x4    | DRY  | No.2   |  | SPF    |
| 7 - 5             | 2x4    | DRY  | No.2   |  | SPF    |
| ALL WEBS          | 2x3    | DRY  | No.2   |  | SPF    |
| EXCEPT            |        |      |        |  |        |

DRY: SEASONED LUMBER.

| PLATES (table is in inches) |         |        |     |     |      |      |  |
|-----------------------------|---------|--------|-----|-----|------|------|--|
| JT                          | TYPE    | PLATES | W   | LEN | Y    | X    |  |
| 2                           | TMVW-t  | MT20   | 3.0 | 5.0 | 1.50 | 1.75 |  |
| 3                           | TTW+p   | MT20   | 3.0 | 4.0 | 2.50 | 1.50 |  |
| 4                           | TMVW-t  | MT20   | 3.0 | 5.0 | 1.50 | 1.75 |  |
| 5                           | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |  |
| 6                           | BMVWW-t | MT20   | 3.0 | 6.0 |      |      |  |
| 7                           | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |  |

A SIZE FOR SIZE SUBSTITUTION OF MITEK MII20 WITH TEE-LOK TL20 PLATES IS ALLOWED.

### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| FACTORED       |      |      | MAXIMUM FACTORED |      |        | INPUT            | REQRD               |
|----------------|------|------|------------------|------|--------|------------------|---------------------|
| GROSS REACTION |      |      | GROSS REACTION   |      |        | BRG              | BRG                 |
| JT             | VERT | HORZ | DOWN             | HORZ | UPLIFT | IN-SX            | IN-SX               |
| 7              | 613  | 0    | 613              | 0    | 0      | 5-8              | 5-8                 |
| 5              | 506  | 0    | 506              | 0    | 0      | HANGER BY OTHERS |                     |
|                |      |      |                  |      |        |                  | MIN. SEAT SIZE: 1-8 |

| UNFACTORED REACTIONS |          |           |                     |           |       |         |       |
|----------------------|----------|-----------|---------------------|-----------|-------|---------|-------|
| JT                   | 1ST CASE | MAX./MIN. | COMPONENT REACTIONS |           |       |         |       |
| 7                    | COMBINED | SNOW      | LIVE                | PERM.LIVE | WIND  | DEAD    | SOIL  |
| 7                    | 428      | 313 / 0   | 0 / 0               | 0 / 0     | 0 / 0 | 115 / 0 | 0 / 0 |
| 5                    | 355      | 248 / 0   | 0 / 0               | 0 / 0     | 0 / 0 | 107 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) 7

**BRACING**  
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

### LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                | WEBS  |                           |               |          |
|--------|---------------------------|---------------------------|----------------|-------|---------------------------|---------------|----------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. LC1 (LC)  | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. LC1 (LC) |          |
| FR-TO  |                           | FROM                      | TO             | FR-TO |                           |               |          |
| 1-2    | 0 / 34                    | -77.3                     | -77.3 0.11 (1) | 10.00 | 6-3                       | -89 / 62      | 0.09 (1) |
| 2-3    | -253 / 0                  | -77.3                     | -77.3 0.28 (1) | 6.25  | 2-6                       | 0 / 219       | 0.05 (1) |
| 3-4    | -253 / 0                  | -77.3                     | -77.3 0.28 (1) | 6.25  | 6-4                       | 0 / 219       | 0.05 (1) |
| 7-2    | -577 / 0                  | 0.0                       | 0.0 0.10 (1)   | 7.81  |                           |               |          |
| 5-4    | -470 / 0                  | 0.0                       | 0.0 0.08 (1)   | 7.81  |                           |               |          |
| 7-6    | 0 / 0                     | -17.5                     | -17.5 0.14 (4) | 10.00 |                           |               |          |
| 6-5    | 0 / 0                     | -17.5                     | -17.5 0.14 (4) | 10.00 |                           |               |          |

### DESIGN CRITERIA

| SPECIFIED LOADS: |      |          |
|------------------|------|----------|
| TOP CH.          | LL = | 23.3 PSF |
|                  | DL = | 3.0 PSF  |
| BOT CH.          | LL = | 0.0 PSF  |
|                  | DL = | 7.0 PSF  |
| TOTAL LOAD       | =    | 33.3 PSF |

### SPACING = 24.0 IN./C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2010

THIS DESIGN COMPLIES WITH:  
- PART 9 OF OBC 2012 , BCBC 2012 , ABC 2014  
- CSA 086-09  
- TPIC 2011

(55 % OF 27.2 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 23.3 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.36")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")  
ALLOWABLE DEFL.(TL)= L/360 (0.36")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.02")

CSI: TC=0.28 (2-3:1) , BC=0.14 (6-7:4) , WB=0.09 (3-6:1) , SSI=0.12 (2-3:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 0.50

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

| NAIL VALUES |           |       |         |     |      |
|-------------|-----------|-------|---------|-----|------|
| PLATE       | GRIP(DRY) | SHEAR | SECTION |     |      |
| (PSI)       | (PLI)     | (PLI) | MAX     | MIN | MAX  |
| MT20        | 618       | 354   | 1667    | 822 | 2284 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.51 (2) (INPUT = 0.90 )  
JSI METAL= 0.14 (2) (INPUT = 1.00 )



RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION





## BEARING ANCHORAGE BY TOE-NAILS FOR LATERAL CAPACITY

B37579H1

| NAIL TYPE        | LENGTH<br>(IN) | DIAMETER<br>(IN) | NAIL LATERAL CAPACITY (LB) |        |
|------------------|----------------|------------------|----------------------------|--------|
|                  |                |                  | S-P-F                      | D. FIR |
| COMMON<br>WIRE   | 3.00           | 0.144            | 132                        | 147    |
|                  | 3.25           | 0.144            | 132                        | 147    |
|                  | 3.50           | 0.160            | 159                        | 177    |
| COMMON<br>SPIRAL | 3.00           | 0.122            | 97                         | 108    |
|                  | 3.25           | 0.122            | 97                         | 108    |
|                  | 3.50           | 0.152            | 145                        | 162    |

## NOTES:

1. Rafter and ceiling members may be anchored to top and bottom chords of girder truss by toe-nailing rafter and ceiling members to girder chords provided the reaction does not exceed the lateral capacities in the table. Hangers (specified by others) are required for reactions higher than the maximum toe-nail capacity. Reactions are based on factored loads.
2. Toe nail capacities shown in the table are for **one** toe-nail. For additional toe-nails multiply values in table by the number of toe-nails used. Toe-nail capacities take into account toe-nailing factor  $J_A$  in CSA O86-09, section 10.9.4.1.
3. For 9- 3/4 gauge 3.25" common wire gun nails (diameter = 0.120") use 3" common spiral nail values.
4. Maximum number of toe-nails allowed depends on the lumber size & species to be toe-nailed to supporting member and nail diameter, as shown in tables below.
5. Nail values in table are based on the following relative lumber densities:  $G = 0.42$  (SPF),  $G = 0.49$  (D. Fir).
6. Toe-nails shall be driven at approximately 1/3 the nail length from the edge of the joist/truss chord and driven at an angle of 30° to the grain of the member (See next page for nailing on bearing plate).
7. For loads due to **wind** the nail lateral capacity in this table may be multiplied by 1.15 ( $K_D$  factor).
8. Lumber must be dry ( < 19% moisture content ) at the time of nail installation.
9. Nail values in this table comply with CSA O86-09, section 10.9.4
10. This design is not valid after April 30, 2017.

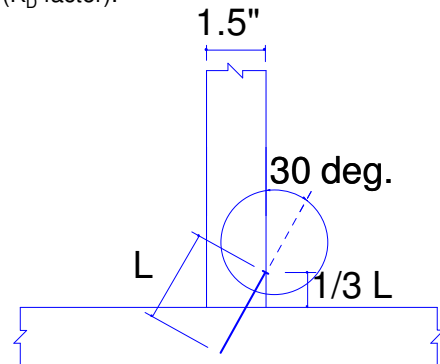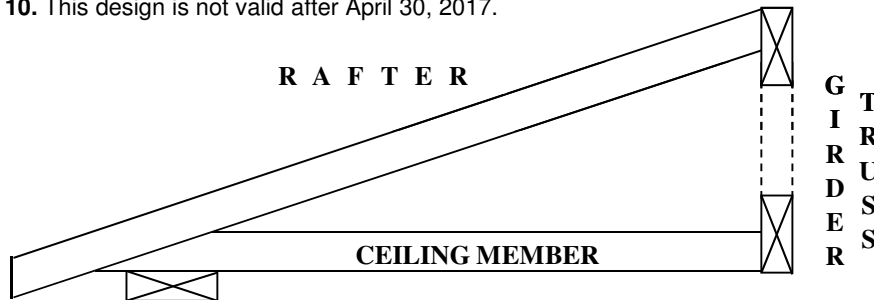

TOE-NAIL INSTALLATION

|                |                             |               |                       |               |
|----------------|-----------------------------|---------------|-----------------------|---------------|
| Nail type      | Common wire                 | Common spiral | Common wire           | Common spiral |
| Nail dia. (in) | 0.160                       | 0.152         | 0.144                 | 0.122         |
|                | ( 3.5" nail )               |               | ( 3" and 3.25" nail ) |               |
| LUMBER SIZE    | MAXIMUM NUMBER OF TOE-NAILS |               |                       |               |
| 2X4 SPF        | 2                           | 2             | 3                     | 3             |
| 2X4 D. Fir     | 2                           | 2             | 2                     | 2             |
|                |                             |               |                       |               |
| 2X6 SPF        | 4                           | 4             | 4                     | 5             |
| 2X6 D. Fir     | 3                           | 3             | 3                     | 4             |



MiTek Canada Inc  
100 Industrial Rd.  
Bradford, Ontario L3Z 3G7

RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION

PEO  
Certificate No. 10889485



April 24, 2015

## BEARING ANCHORAGE BY TOE-NAILS FOR WIND LOADING





B37579H2

| NAIL TYPE        | LENGTH<br>(IN) | DIAMETER<br>(IN) | NAIL WITHDRAWAL CAPACITY (LB) |        |
|------------------|----------------|------------------|-------------------------------|--------|
|                  |                |                  | S-P-F                         | D. FIR |
| COMMON<br>WIRE   | 3.00           | 0.144            | 30                            | 42     |
|                  | 3.25           | 0.144            | 32                            | 45     |
|                  | 3.50           | 0.160            | 38                            | 52     |
| COMMON<br>SPIRAL | 3.00           | 0.122            | 26                            | 36     |
|                  | 3.25           | 0.122            | 28                            | 40     |
|                  | 3.50           | 0.152            | 36                            | 50     |

**Note:** If using truss with D. Fir lumber and S-P-F bearing plate, use values in table for S-P-F.

**NOTES:**

1. Truss chord, rafter, or ceiling members may be anchored to bearing plate by toe-nails, provided that the actual factored uplift force due to **wind** or **earthquake** load does not exceed the withdrawal capacities in the table. Hangers (specified by others) are required for uplift forces that are higher than the maximum toe-nail withdrawal capacity.
2. Toe nail capacities shown in the table are for **one** toe-nail. For additional toe-nails multiply values in table by the number of toe-nails used. Toe-nail capacities take into account toe-nailing factor  $J_A$  in CSA O86-09, section 10.9.5.2.
3. For 9- 3/4 gauge 3.25" common wire gun nails (diameter = 0.120") use 3" common spiral nail values.
4. Maximum number of toe-nails allowed depends on the lumber size & species to be toe-nailed to supporting member and nail diameter, as shown in table above.
5. Nail values in table are based on the following relative lumber densities:  $G = 0.42$ (SPF),  $G = 0.49$ (D. Fir).
6. Toe-nails shall be driven at approximately 1/3 the nail length from the edge of the joist/truss chord and driven at an angle of 30° to the grain of the member (See drawing on detail B37579H1).
7. Lumber must be dry ( < 19% moisture content ) at the time of nail installation.
8. Nail values in this table comply with CSA O86-09, section 10.9.5
9. This design is not valid after April 30, 2017

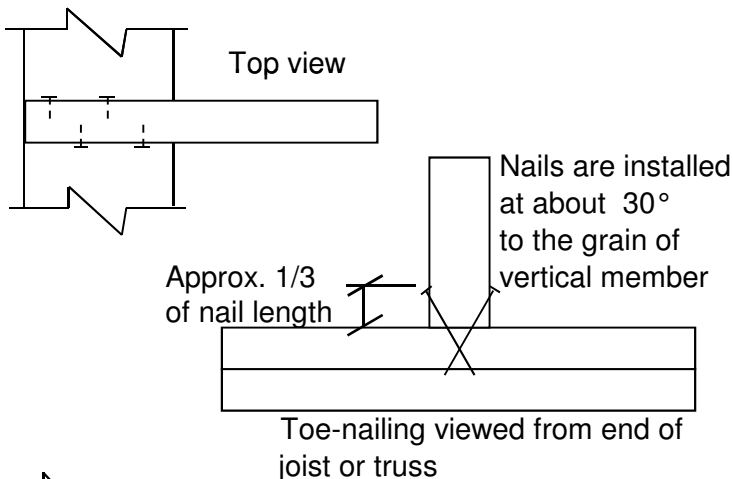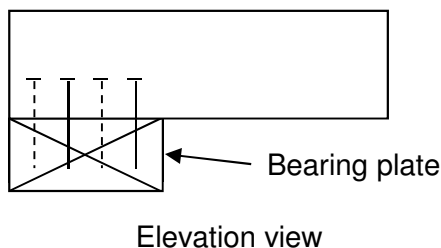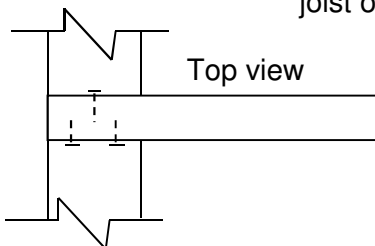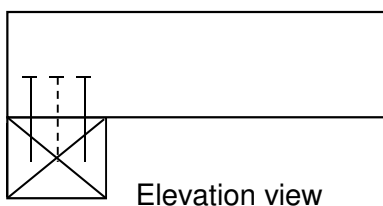**Toe-nailing on 2x6 Bearing Plate****Toe-nailing on 2x4 Bearing Plate**



MiTek Canada Inc  
100 Industrial Rd.  
Bradford, Ontario L3Z 3G7

RECEIVED  
TOWN OF MILTON  
MAR 29, 2017  
17-4690  
BUILDING DIVISION


PEO  
Certificate No. 10889485




April 24, 2015

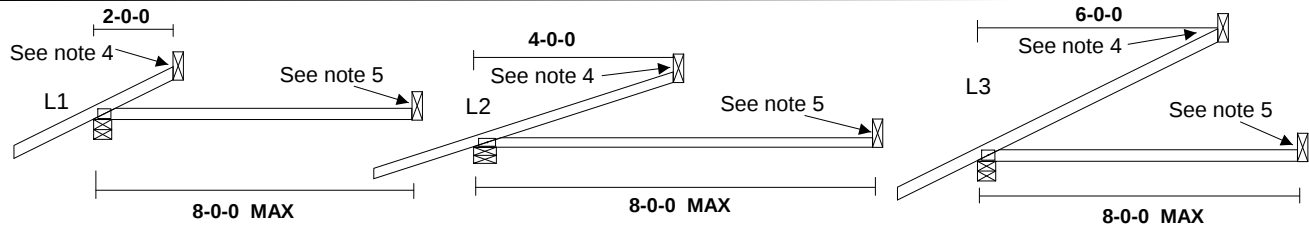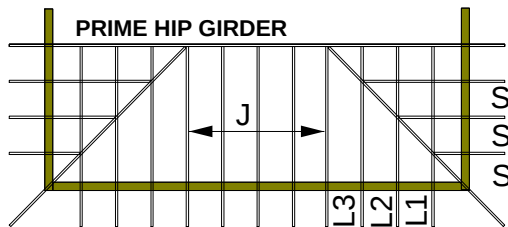

**DETAIL "A"**




**DETAIL "C"**



**CANTILEVER DETAIL "C"**


| SLOPE | MAX CANTILEVER | PLATE "B" | WEDGE SIZE |
|-------|----------------|-----------|------------|
| 3/12  | 17"            | 3 X 5     | 2 X 3      |
| 4/12  | 14"            | 3 X 5     | 2 X 3      |
| 5/12  | 12"            | 3 X 5     | 2 X 4      |
| 6/12  | 10"            | 3 X 5     | 2 X 4      |
| 7/12  | 9"             | 3 X 5     | 2 X 6      |
| 8/12  | 8.5"           | 3 X 5     | 2 X 6      |
| 9/12  | 8"             | 3 X 5     | 2 X 6      |
| 10/12 | 7.5"           | 3 X 5     | 2 X 6      |

**DETAIL "B"**




**NOTES:**

- ALL LUMBER SHALL BE 2x4 SPF OR D. Fir No. 2 DRY OR BETTER.
- THIS TRUSS IS DESIGNED FOR HOUSING AND SMALL BUILDING REQUIREMENTS OF PART 9 NBC 2010, WHERE GROUND SNOW LOAD IS 60.0 PSF OR LESS AND RAIN LOAD DOES NOT EXCEED 12.53 PSF; TOP CHORD DEAD LOAD IS 6 PSF OR LESS; BC LIVE LOAD IS 0 PSF AND BC DEAD LOAD IS 7 PSF.
- HIP RAFTER DESIGN SHALL CONFORM TO SECTION 9.23.14.6 OF NBC 2010.
- FASTEN HIGH END OF RAFTERS USING MITEK CANADA INC. "BEARING ANCHORAGE BY TOE-NAILS FOR LATERAL CAPACITY" STANDARD DETAIL B37579H1.
- FASTEN RIGHT END OF CEILING USING MITEK CANADA INC. "BEARING ANCHORAGE BY TOE-NAILS FOR LATERAL CAPACITY" STANDARD DETAIL B37579H1.
- OVERHANG LENGTH SHALL NOT EXCEED 2 FT.
- WHEN SETBACK IS 6 FT OR LESS, DIAGONAL WEB MAY BE OMITTED AND HIGH END OF TOP CHORD SHALL BE CONNECTED AS PER NOTE 4.
- ALL PLATES SPECIFIED ARE PRESSED INTO BOTH FACES OF THE TRUSS.
- MITEK REFERENCE PAGE MII-7473C FORMS AN INTEGRAL PART OF THIS DETAIL.
- THIS DETAIL IS NOT VALID AFTER APRIL 30, 2017

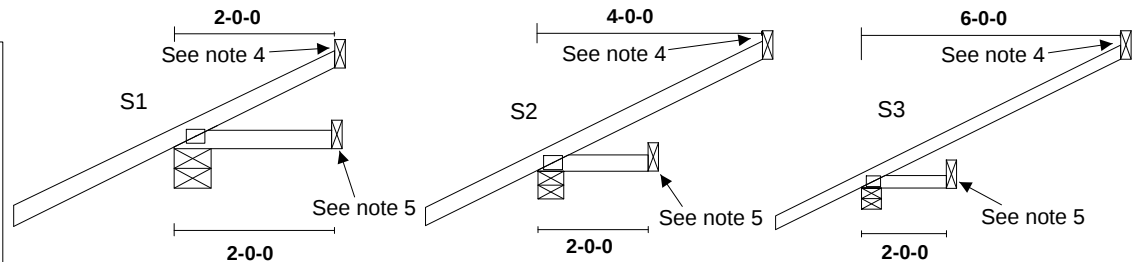

**"J"**

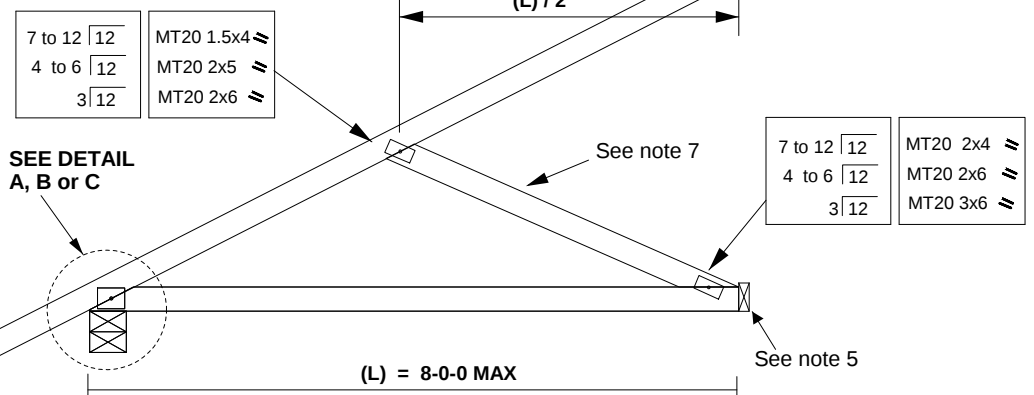

MiTek Canada, Inc.  
100 Industrial Rd.  
Bradford, Ontario, L3Z 3G7



April 24, 2015