Greenpark.

CONSTRUCTION SUMMARY

Mountainview Heights (G) - Russell Gardens Building Ltd.

PURCHASERS: MUHAMMAD E SHEIKH and ANNA SHEIKH

TEL: RES.: 289-775-7843

LOT / PHASE	REG. PLAN #	HOUSE TYPE	1
104 / 2	62M-1238	Rosewood 4 Elev 1	1

1 - KITCHEN - DELETE CABINETS ABOVE STOVE - VENDOR WILL SUPPLY 6 INCH VENT AS PER CONSTRUCTION

CAB	INE	ΓRY

SPECIFICATIONS AND VENT MAY NOT BE IN THE APPROPRIATE LOCATION FOR INSTALLATION OF PURCHASER SUPPLIED VENT - PURCHASER TO SUPPY OWN FAN AFTER CLOSING (TEMP. FAN MA	
19Jul18 Note: Specs Attached	
1 - VANITIES - MONACO CABINETRY STAIN WITH UPGRADE STAIN - PRICE IS FOR ONE OR ALL BATHS - DETACHED	
19Jul18 Note:	
1 - VANITY - POWDER ROOM - UPGRADE 1	_
19Jul18 Note:	
RECEIVED NOV 2 0 2018	
1 - CABINETRY - KITCHEN - UPGRADE 1	
19.Jul 18 Note: Revised Kitchen layout	
1 - KITCHEN DELETE UPPER AND LOWER CABINETS NEXT TO FRIDGE FOR FUTURE ARCHWAY TO DINING ROOM - IN LIEU OF	- 55

See Attached New Sketch Nov.20.1

DELETED CABINETS AND COUNTERTOP EXTEND PANTRY AND MAKE FULL DEPTH NO CHARGE - SEEE SKETCH

CABINETRY ACCESSORIES

Note:

19Jul18

1 - KITCHEN CABINETRY UPPER - ANGLED CORNER CABINET - FITS TALL UPPER CABINETS - PER UNIT - UPGRADE 1	
19Jul18 Note:	
1 - KITCHEN CABINETRY BASE - POT/PAN DRAWERS (CABINET) - UPGRADE 1	
19Jul18 Note:	
1 - KITCHEN CABINETRY - BUILT-IN DOUBLE OVEN - UPGRADE 1	
S. CONT. Sec Contraction Proc. Sect. Material Contraction 1	
19 Juli 8 Note: Specs. Attached	
1 - KITCHEN CABINETRY BASE - COOKTOP CABINET WITH POT DRAWERS (2 DRAWERS) - UPGRADE 1 - 20" Cook top	
19Jul18 Note: Specs. Attached	
1 - KITCHEN CABINETRY UPPER - FULL DEPTH ABOVE FRIDGE - WITH GABLES - 600MM - PRICE IS EACH - UPGRADE I	
19Jul18 Note:	
[productional action of action (COS)]	

CERAMIC TILE

CHARTESIAN REALANG DISCONDERING PROPERTY AND ADMINISTRATION OF THE PROPERTY ADMINISTRATION OF THE PROPERTY AND ADMINISTRA	
1 - TILE - UPGRADE I FLOOR TILE POWDER ROOM	
19Jul18 Note:	
1 - TILE - UPGRADE 1 FLOOR TILE LAUNDRY ROOM	
19Jul18 Note:	
1 - TILE - UPGRADE I FLOOR TILE FOYER	
19Jul18 Note:	
1 - DELETE ALL CERAMIC BATHROOM ACCESSORIES - DELETE TOWEL BAR, PAPER HOLDER & SOAP DISH THROUGHOUT	
19Jul18 Note:	
	1
	1

CONSTRUCTION

1 - SMOOTH CEILINGS ON FIRST FLOOR ONLY				
19Jul18 Note:				
-3				

COUNTER TOP

1 - ADD FI	LUSH BREAKFAST BA	R TO ISLAND - STANDARD COUNTERTOP	
19Jul18	Note:	As a resident distribution of the second	

ELECTRICAL

1 - 200 AMP ELECTRICAL SERVICE	
19Jul18 Note:	

Greenpark.

		NSTRUCTION SUMMARY		
DVID CVI LODDO A COLLA C		w Heights (G) - Russell Gardens Building Ltd.		
PURCHASERS: MUHAMI	MAD E SHEIKH and ANN	A SHEIKH	TEL: RES.: 289-775	5-7843
LOT / PHASE	REG. PLAN #	HOUSE TYPE		
104 / 2	62M-1238	Rosewood 4 Elev 1		
	COOKTOP PROVISION - F	PROVISION ONLY - ELECTRICAL ONLY		
19Jul18 Note:				
HARDWOOD FLOORIN				
1 - HARDWOOD - GROUP	A SERIES 5 INCH UPI	PER HALL		
19Jul18 Note:				
1 - KITCHEN FLOORS TO	RE HARDWOOD IN LIEL	LOF THES - 5" GROUP A		
19Jul18 Note:	DE TRACE WOOD IN EILE	OF FIELS - 5 GROOF A		
1-194 - 56- 5249-Whitso				
	A SERIES 5 INCH - IN LII	EU OF 2 1/4 INCH NATURAL RED OAK - FIRST FLOO	OR COMPLETE	
19Jul18 Note:				
MIRRORS AND GLASS		.5		
1 - DELETE ALL BATHRO	OM MIRRORS EXCEPT IN	N MASTER ENSUITE		
19Jul18 Note:				
PLUMBING				
1 - MASTER ENSUITE TUE	3 - 4 PIECE ROMAN TUB I	FAUCET - MOEN EVA 9796/T944		
19Jul18 Note:				
PROMOTIONAL				
1 - LESS CREDIT FROM PU	JRCHASER EXTRA SHEE	T IN OFFER		
19Jul18 Note:				
STAIRS AND RAILINGS				
1 - STAINED HANDRAIL, T	READS, RISERS AND ST	RINGER EXCLUDING PICKETS (FOR IRON PICKETS	- STANDARD STAIRCASE	
- PRICE IS PER SET 19Jul18 Note:		,	, or and or ance as L	
19Jul 18 Note:				
1 - EUROLINE 1 BLACK IR	ON PICKETS			
19Jul18 Note:				
	EX	TTRAS AS PER OFFER		
The Vendor agrees that not	withstanding any other ter	m or provision in this Agreement included in the Pure	chase Price and in	
addition to those items detailed in Schedule GP to the Agreement of Purchase and Sale, the Purchaser is entitled to a credit of Tan				
Worksheet Note:				
The Purchaser acknowledge	es that the Purchase Price	is inclusive of all credits and promotional packages a	voilable at the control of	
Jui Chase.		and promotional packages a	variable at the time of	
Vorksheet Note:				

This Document is Extremely Time Sensitive - Printed 19 Jul 18 at 11:38

Greenpark.

INTERIOR COLOUR SCHEME

	424		F	
F	Purch	asers:		MUH

HAMMAD E SHEIKH & ANNA SHEIKH

Property: 104

Telephone Res. / Bus: (289) 775-7843 /

Project: Russell Gardens Building Ltd.

Decor Advisor:

Natalie Mancuso

Model and Elevation: Rosewood 4 Elev 1

Lock Date:

19-Jul-18

19-Jul-18

Plan #: 62M-1238

Layout Changes: • Ye	s ○ No Sketch Attached: Yes ○ No Exterior Colour Scheme:	
1. Cabinetry	Style and Colour	Handra
Kitchen / Breakfast	RICHMOND W350XZ4	Hardware 1001
Laundry Room	ELISSE	Standard
Powder Room	RICHMOND W823XZ4	1001
Master Ensuite Bathroom	MONACO W814XZ4	1001
Ensuite Bath - Bedroom 2	MODENA WHITE	1001
Ensuite Bath - Bedroom 3/4	MONACO W814XZ4	1001
Appliances:	Built In Appliances Yes No Slide In Stove	es 🕕 No
Dishwasher Cabinet	Closed ■ Open 41" Upper Cabinets ■ Yes ○ No Please NOTE: Standard	
Stove Opening	NOTE: If not specified, opening will be set to builder's standard opening of approximately 30	' width
Fridge Opening	NOTE: If not specified, opening will be set to builder's standard opening of approximately 37	' width x 74" height
** Refer to Construction	Summary	

2. Counters		
	Counter	Edge
Kitchen / Breakfast	LAMINATE-WHITE CARRARA 4924-38	
Laundry Room	N/A	
Powder Room	LAMINATE-WHITE TIGRIS 4783-60	
Master Ensuite Bathroom	LAMINATE-PEARL SOAPSTONE 4886-38	
Ensuite Bath - Bedroom 2	LAMINATE-ELEMENTAL CONCRETE 8830-58	
Ensuite Bath - Bedroom 3/4	LAMINATE-INUK SHUK GREY P-344 LM	

** Refer to Construction Summary



Greenpark INTERIOR COLOUR SCHEME Purchasers: MUHAMMAD E SHEIKH & ANNA SHEIKH Property: 104 Telephone Res. / Bus: (289) 775-7843 / Project: Russell Gardens Building Ltd. Decor Advisor: Natalie Mancuso Model and Elevation: Rosewood 4 Elev 1 Lock Date: 19-Jul-18 19-Jul-18 Plan #: 62M-1238 3. Ceramic Flooring At a 45 Threshold-If App. **Entrance Vestibule** TILE- BROADWAY GRAY 18X18 METAL STRIP THOUGHOUT Main Hall HARDWOOD Kitchen / Breakfast HARDWOOD Laundry Room TILE- BROADWAY GRAY 18X18 Powder Room TILE- BROADWAY GRAY 18X18 Master Ensuite Bathroom TILE- RAINBOW LIGHT GREY 13X13 Ensuite Bath - Bedroom 2 TILE- GHAIA GRIGIO 12X12 Ensuite Bath - Bedroom 3/4 TILE- RAINBOW DARK GREY 13X13 GROUT COLOUR TO BE STANDARD GREY WITH FIRST FLOOR TILES- BROADWAY GREY. 4. Ceramic Wall Tile Master Ensuite Bathroom Selection Describe **Tub Deck Wall Tub Deck Tub Deck Skirt** Shower Stall TILE- LUC CONCEPT FERRO 8X16 **Bathtub Enclosure Walls** Ensuite Bath - Bedroom 2 TILE- LUC CONCEPT NEVE 8X16 Ensuite Bath - Bedroom 3/4 TILE- LUC 09 AFRICA 8X16 Kitchen Backsplash ** Refer to Construction Summary - STANDARD GROUT THROUGHOUT UNLESS SPECIFIED 5. Plumbing Fixtures Whirlpool All Bathrooms White Yes Dishwasher Rough-In Yes Waterline for Fridge Yes No

** Refer to Construction Summary

6. Trim Carpentry

Interior Doors

CLERMONT

Interior Trim

3" BB CASING WITH 5 1/4" BASEBOARD - COLONIAL

Door Handles

As Per Construction Specifications

Exterior Front Door Handle As Per Construction Specifications

** Refer to Construction Summary

Greenpark. INTERIOR COLOUR SCHEME Purchasers: MUHAMMAD E SHEIKH & ANNA SHEIKH Property: 104 Telephone Res. / Bus: (289) 775-7843 / Project: Russell Gardens Building Ltd. Decor Advisor: Natalie Mancuso Model and Elevation: Rosewood 4 Elev 1 Lock Date: 19-Jul-18 19-Jul-18 Plan #: 62M-1238 7. Uther Flooring HARDWOOD- MIRAGE 5" ENGINEERED RED OAK- CHARCOAL- CASHMERE Main Hall HARDWOOD- MIRAGE 5" ENGINEERED RED OAK- CHARCOAL- CASHMERE Living Room **Dining Room** HARDWOOD- MIRAGE 5" ENGINEERED RED OAK- CHARCOAL- CASHMERE Family Room HARDWOOD- MIRAGE 5" ENGINEERED RED OAK- CHARCOAL- CASHMERE Den / Library / Study HARDWOOD- MIRAGE 5" ENGINEERED RED OAK- CHARCOAL- CASHMERE Basement Landing(If Applies) Lower Landing (If Applies) HARDWOOD- MIRAGE 5" ENGINEERED RED OAK- CHARCOAL- CASHMERE **Upper Landing** HARDWOOD- MIRAGE 5" ENGINEERED RED OAK- CHARCOAL- CASHMERE Upper Hall HARDWOOD- MIRAGE 5" ENGINEERED RED OAK- CHARCOAL- CASHMERE LAMINATE-MANHATTAN - DRIFTWOOD OAK - TL-15020 Master Bedroom Bedroom #2 LAMINATE-MANHATTAN - DRIFTWOOD OAK - TL-15020 Bedroom #3 LAMINATE-MANHATTAN - DRIFTWOOD OAK - TL-15020 Bedroom #4 LAMINATE-MANHATTAN - DRIFTWOOD OAK - TL-15020 Bedroom #5 KITCHEN/BREAKFAST HARDWOOD- MIRAGE 5" ENGINEERED RED OAK- CHARCOAL- CASHMERE Underpad Type Area ** Refer to Construction Summary

8.	Railings	and	Pickets
	J -		

Railing Type Picket Type

AS PER CONSTRUCTION SPECIFICATIONS

Colour

MIRAGE- CHARCOAL

EUROLINE 1

Colour

BLACK

Yes

Stringer / Riser

AS PER CONSTRUCTION SPECIFICATIO

Colour

MIRAGE- CHARCOAL

Treads

AS PER CONSTRUCTION SPECIFICATION

Colour

MIRAGE- CHARCOAL

No

Red Oak Stairs with Semi Gloss Finish

** Refer to Construction Summary

9. Wall Paint Flat Finish

Main & Upper Hall 22 WARM GREY Master Bedroom 22 WARM GREY Living Room 22 WARM GREY Bedroom #2 22 WARM GREY Dining Room 22 WARM GREY Bedroom #3 22 WARM GREY Kitchen / Breakfast 22 WARM GREY Bedroom #4 22 WARM GREY **Family Room** 22 WARM GREY Bedroom #5 **Powder Room** 22 WARM GREY **Master Ensuite** 22 WARM GREY Laundry Room 22 WARM GREY Ensuite Bath - Bedroom 2 22 WARM GREY Den/Library 22 WARM GREY Ensuite Bath - Bedroom 3/4 22 WARM GREY Trim Paint-Semi Gloss BIRCH WHITE

Smooth Ceilings First Floor Yes

O No

** Refer to Construction Summary





Gree	npa	rk.		11	NTERIOR CO	OLOUR SO	CHEME		
Purchasers:		MUHAMMAD E S	HEIKH	& ANNA S	HEIKH	Property:	104		
Telephone R	es. / Bus:			202 DOI 10.7 E		0.00 mil	Russell Garder	se Building I	+4
Decor Advis	or:	Natalie Mancuso			Model and E		Rosewood 4 El	to the second	.tu.
Lock Date:		19-Jul-18		19-Jul-1				I-1238	
10. Plaste	r Mouldir	ngs and Medallio	ns				1411 #. OZIVI	1-1230	
Entrance Ve					Kitchen/Bre	eakfast			
Main Hall					Den/Library				
Living Roor	m				Lower Land				
Dining Roo	m					9			
Family Roo	m								
** Refer to	Construct	ion Summary		Li					
11. Firepla	ice								
	Living Room	m		Family Ro	om		Other Room -	Specify	
	Purchased	As Per Plan N/A		Purchase	d As Per Plan	N/A	Purchased	As Per Plan	N/A
F:		0				0	0		•
Fireplace Type Mantle Type			-	FLAT ON V					
Colour / Stain					12-STANDARD	CDECIFICATIO			
Surround				BIANCO	ONSTRUCTION	SPECIFICATIO	ONE		
Hearth				NO					
Air Conditi Gas Provis Comment ** Refer to Co	oning ions Dryei					ias Provisio ias Provisio	ons Stove ons Barbecue	NO NO	
13. Electric	al								
Plugs and Swi	tches	White	DE	ECOR		Above K	itchen Cabine	t Liaht	Yes ■ No
Hood Fan		STANDARD WHITE				Below Kitchen Cab			
Appliances		Built in Cooktop		Built in	Oven/paide	Gas	Stove	Micro	
		Yes No		Yes	○ No	O Yes	No	Yes	● No
Dishwasher Ro * Refer to Con		Yes Summary							
14. General	Commer	nts							
* Refer to Cons									
2) Any extras must be particular 3) The Purch by the Ven	f all materi in manufa s listed abo aid in full. aser agree dor.	ials are as close as cturing. ove are null and vo	oid unl	ess accon	npanied by a	separate ir	nvoice/amend	ment. Said	invoice
4) The Purch disclaimer Signature:	aser acknown	owledges reading	and ac	Luals	ocument whi O Signature:	ich contain	s other miscel	Date:	Ny 19/2019
	100		J			111		_ Date	11000

INSTALLATION REQUIREMENTS

Tools and Parts

Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

Tools Needed

- Leve
- Drill with 1¹/₄" (3.2 cm), 1/8" (3.2 mm), and 5/16" (7.9 mm) drill bits
- Penci
- Wire stripper or utility knife
- Tape measure or ruler
- Pliers
- Caulking gun and weatherproof caulking compound
- Vent clamps
- Jigsaw or keyhole saw
- Flat-blade screwdriver
- Metal snips
- Phillips screwdriver

Parts Needed

- Home power supply cable
- 1/2" (12.7 mm) UL Listed or CSA approved strain relief
- Three UL Listed wire connectors

For Vented Installations, You Will Also Need:

- One wall or roof cap
- Metal vent system

For Non-Vented (Recirculating) Installations, You Will Also Need:

- Recirculation Kit for non-vented (recirculating) installations only. See "Assistance or Service" section to order.
- 6" (15.2 cm) diameter round metal vent duct length required is determined by ceiling height.

Parts Supplied

Remove parts from packages. Check that all parts are included.

- Hood canopy assembly with blower, LED lights and canopy glass already installed
- Vent transition with back draft dampers installed
- Vent cover support bracket
- Metal grease filter
- Mounting template
- Two piece vent cover
- Two 3.5 x 9.5 mm mounting screws (Phillips)
- Four 4.2 x 8 mm screws (T20^{®†} drive)
- Six 5 x 45 mm mounting screws (#2 Phillips)
- Four 5.4 x 75 mm screws (Phillips) (for 10 x 60 mm wall anchors)
- Two 8 x 40 mm wall anchors
- Four 10 x 60 mm wall anchors
- T20® Torx®† adapter

†*TORX and T20 are registered trademarks of Acument Intellectual Properties, LLC.

Location Requirements

IMPORTANT: Observe all governing codes and ordinances.

Have a qualified technician install the range hood. It is the installer's responsibility to comply with installation clearances specified on the model/serial/rating plate. The model/serial/rating plate is located behind the left filter on the rear wall of the vent hood.

Canopy hood location should be away from strong draft areas, such as windows, doors, and strong heating vents.

Cabinet opening dimensions that are shown must be used. Given dimensions provide minimum clearance.

This range hood is recommended for use with cooktops with a maximum total rating of 65,000 BTUs or less.

Grounded electrical outlet is required. See the "Electrical Requirements" section.


The canopy hood is factory set for venting through the roof or wall. For non-vented (recirculating) installation, see "For non-vented (recirculating) installation only" in the "Connect Vent System" section. Recirculation Kit is available from your dealer or an authorized parts distributor. See the "Assistance or Service" section to order.

All openings in ceiling and wall where canopy hood will be installed must be sealed.

For Mobile Home Installations

The installation of this range hood must conform to the Manufactured Home Construction Safety Standards, Title 24 CFR, Part 328 (formerly the Federal Standard for Mobile Home Construction and Safety, Title 24, HUD, Part 280) or, when such standard is not applicable, the standard for Manufactured Home Installation 1982 (Manufactured Home Sites, Communities and Setups) ANSI A225.1/NFPA 501A, or latest edition, or with local codes.

Product Dimensions



201

INDUCTION COOKTOP INSTALLATION INSTRUCTIONS

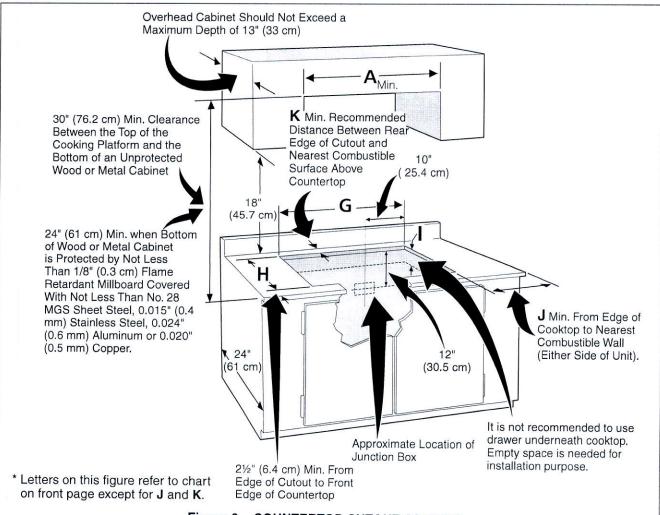


Figure 2 - COUNTERTOP CUTOUT OPENING


ACAUTION To eliminate the risk of burns or fire by reaching over heated surfaces, cabinet storage space located above the cooktop should be avoided. If cabinet storage is provided, risk can be reduced by installing a range hood that projects horizontally a minimum of 5" (12.7 cm) beyond the bottom of the cabinets.

MODEL	J	K
30"	2" (5.1cm)	1 1/2" (3.8cm)
-36"	2" (5.1cm)	2" (5.1cm)

Model and Serial Number Location

The serial plate is located under the cooktop.

When ordering parts for or making inquires about your cooktop, always be sure to include the model and serial numbers and a lot number or letter from the serial plate on your cooktop.

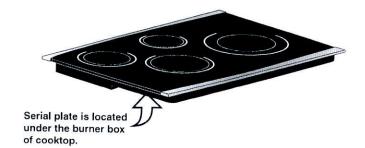



INDUCTION COOKTOP INSTALLATION INSTRUCTIONS

Important Notes to the Installer

- Read all instructions contained in these installation instructions before installing the cooktop.
- Remove all packing material before connecting the electrical supply to the cooktop.
- 3. Observe all governing codes and ordinances.
- Be sure to leave these instructions with the consumer.
- Only certain cooktop models may be installed over certain built-in electric oven models. Approved cooktops and built-in ovens are listed by the MFG ID number and product code.

Important Note to the Consumer

Keep these instructions with your Use and Care Guide for future reference.

IMPORTANT SAFETY INSTRUCTIONS

- Be sure your cooktop is installed and grounded properly by a qualified installer or service technician.
- This cooktop must be electrically grounded in accordance with local codes or, in their absence, with the National Electrical Code ANSI/NFPA No. 70—latest edition in the United States, or with CSA Standard C22.1, Canadian Electric Code, Part 1, in Canada.

AWARNING The electrical power to the cooktop must be shut off while line connections are being made. Failure to do so could result in serious injury or death.

Provide Electrical Connection

Install the junction box under the cabinet and run 120/240 or 120/208 Volt, AC wire from the main circuit panel. NOTE: DO NOT connect the wire to the circuit panel at this time.

Electrical Requirements

Observe all governing codes and local ordinances.

- A 3-wire or 4-wire single phase 120/240 or 120/208 Volt, 60 Hz AC only electrical supply is required on a separate circuit fused on both sides of the line (time-delay fuse or circuit breaker is recommended). DO NOT fuse neutral.
- A circuit breaker or fuse rated at 50 Amp is recommended (40 Amp minimum).

NOTE: Wire sizes and connections must conform with the fuse size and rating of the appliance in accordance with the National Electrical Code ANSI/NFPA No. 70–latest edition and local codes and ordinances.

!WARNING An extension cord must not be used with this appliance. Such use may result in a fire, electrical shock, or other personal injury.

- 3. The appliance should be connected to the fused disconnect (or circuit breaker) box through flexible armored or nonmetallic sheathed cable. The flexible armored cable extending from this appliance should be connected directly to the grounded junction box. The junction box should be located as shown in Figure 2 with as much slack as possible remaining in the cable between the box and the appliance, so it can be moved if servicing is ever necessary.
- A suitable strain relief must be provided to attach the flexible armored cable to the junction box.

Unpacking Instructions

- Unpack and visually inspect the cooktop.
- Be sure the bottle of cleaner conditioner packed in the literature bag is left where the user can find it easily. It is important that the ceramic-glass cooktop be pretreated before use. See Cooktop Cleaning and Maintenance section in the Use and Care Guide.

Electrical Connection

Connect the flexible armored cable that extends from the surface unit to the junction box using a suitable strain relief at the point the armored cable enters the junction box. Then make the electrical connection as follows.

Electrical ground is required on this appliance.

AWARNING This appliance is equipped with a copper conductor flexible cable. If connection is made to aluminum house wiring, use only special connectors which are approved for joining copper and aluminum wires in accordance with the National Electrical Code and local codes and ordinances. Improper connection of aluminum house wiring to copper leads can result in a short circuit or fire. Follow the connector manufacturer recommended procedure closely.

This appliance is manufactured with a supply wire and a frame connected green or bare copper grounding wire.

NARNING DO NOT ground to a gas supply pipe. DO NOT connect to electrical power supply until appliance is permanently grounded. Connect the ground wire before turning on the power.

INDUCTION COOKTOP INSTALLATION INSTRUCTIONS

If the cable from appliance is equipped with 3 wires:

Where local codes permit connecting the appliance-grounding conductor to the neutral (white) wire (see figure 3):

- 1. Disconnect the power supply.
- 2. In the circuit breaker, fuse box or junction box, connect appliance and power supply cable wires as shown in figure 3.

MARNING You may not ground the cooktop through the neutral (white) wire if cooktop is used in a new branch circuit installation (1996 NEC), mobile home, recreational vehicle, or where local codes do not permit grounding to the neutral (white) wire.





Figure 3 - 3-WIRE GROUNDED JUNCTION BOX

When grounding to the neutral (white) wire is prohibited, you must use a 4-wire power supply cable. See Figure 4. Failure to heed this warning may result in electrocution or other serious personal injury.

If cooktop is used in a new branch circuit installation (1996 NEC), mobile home, recreational vehicle, or where local codes DO NOT permit grounding to the neutral (white) wire (see figure 4):

- 1. Disconnect the power supply.
- 2. In the circuit breaker, fuse box or junction box, connect appliance and power supply cable wires as shown in figure 4.




AWARNING If connecting to a 4-wire power supply cable electrical system, the appliance frame connected ground wire MUST NOT be connected to the neutral wire of the 4-wire electrical system.

NOTE TO ELECTRICIAN: The armored cable leads supplied with the appliance are UL-listed for connection to larger gauge household wiring. The insulation of the leads is rated at temperatures much higher than temperature rating of household wiring. The current carrying capacity of the conductor wire is governed by the temperature rating of the insulation around the wire, rather than the wire gauge alone.

ELECTRIC WALL OVEN INSTALLATION INSTRUCTIONS

(and Optional Electric or Gas Cooktop Combination)

AWARNING Do not remove spacers (if equipped) on the side walls of the built-in oven. These spacers center the oven in the space provided. The oven must be centered to prevent excess heat buildup that may result in heat damage or fire.

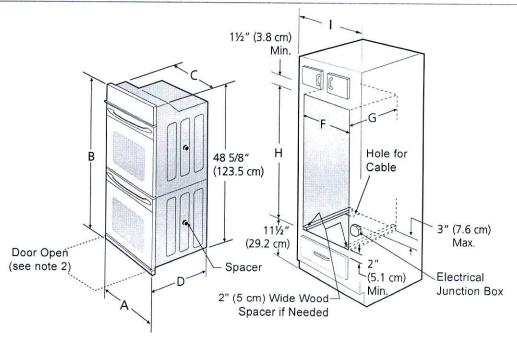

NOTES

- Base must be capable of supporting 300 pounds (136 kg) for 27" models and 375 pounds (170 kg) for 30" models.
- 2. Allow at least 21" (53.3 cm) clearance in front of oven for door depth when it is open.
- 3. Dimension G (cutout depth) is critical to the proper installation of the built-in oven. If the oven decorative trim does not butt against the cabinet, or if noise is heard on convection models, verify dimension G to assure it is according to the required dimension.
- 4. For a cutout height greater than 49⁵/₈" (126 cm) add a 2" (5 cm) wide wood shim of appropriate height to each side of the opening under the appliance side rails.
- For a cutout height (H) greater than 49⁵/₈" (126 cm) you can order a larger bottom trim through a Service Center.

Figure 2
27" AND 30" DOUBLE OVENS (Single Ovens see Figure 1)

I SERVICE CONTRACT		PRO	DDUCT DIMENS	IONS	A. Ins. J. and C.		
MODEL	A A A		В	С		D	
27" (68.6 cm) Wall Oven	all Oven 27 (68.6)		50 ⁷ / ₁₀ (128.1)	245/8 (62.5)		243/4 (62.9)	
30" (76.2 cm) Wall Oven	30 (76.2)		507/16 (128.1)	281/4 (71.8)		243/4 (62.9)	
	CL	TOUT DIME	NSIONS AND C	ABINET WIDTH			
	F		G (Min.)	H. Standard Height (**Others, see notes 4 & 5)		I.	
MODEL	Min.	Max.		Min.	Max.		
27" (68.6 cm) Wall Oven	24 ⁷ / ₈ (63.2)	251/4 (64.1)	24 (61.0)	48 ⁷ / ₈ (124.1)	49 ⁵ / ₈ (128)	27 ¹ / ₈ (68.9) Min	
30" (76.2 cm) Wall Oven	281/2 (72.4)	29 (73.7)	24 (61.0)	487/8 (124.1)	495/8 (126)	30 ¹ / ₈ (76.5) Min	

ELECTRIC WALL OVEN INSTALLATION INSTRUCTIONS

(and Optional Electric or Gas Cooktop Combination)

Important Notes to the Installer

- Read all instructions contained in these installation instructions before installing the wall oven.
- Remove all packing material from the oven compartments before connecting the electrical supply to the wall oven.
- 3. Observe all governing codes and ordinances.
- Be sure to leave these instructions with the consumer.
- 5. Oven door may be removed to facilitate installation.
- THESE OVENS ARE NOT APPROVED FOR STACKABLE OR SIDE-BY-SIDE INSTALLATION.

Important Note to the Consumer Keep these instructions with your Owner's Guide for the local electrical inspector's use and future reference.

IMPORTANT SAFETY INSTRUCTIONS

- Be sure your wall oven is installed and grounded properly by a qualified installer or service technician.
- This wall oven must be electrically grounded in accordance with local codes or, in their absence, with the National Electrical Code ANSI/NFPA No.70latest edition in United Sates, or with CSA Standard C22.1, Canadian Electrical Code, Part 1, in Canada.

•• WARNING Stepping, leaning or sitting on the door of this wall oven can result in serious injuries and can also cause damage to the wall oven.

 Never use your wall oven for warming or heating the room. Prolonged use of the wall oven without adequate ventilation can be dangerous.

AWARNING The electrical power to the oven must be shut off while line connections are being made. Failure to do so could result in serious injury or death.

1. Carpentry

Refer to figure 1 or 2 for the dimensions applicable to your appliance, and the space necessary to receive the oven. The oven support surface may be solid plywood or similar material, however the surface must be level from side to side and from front to rear.

2. Adjusting Oven Height

Oven height can be adjusted with 2" (5cm) wide wood shims when needed to fit into an existing cabinet cutout opening, when cutout height exceeds 28¹/₄" (71.8 cm) for the single wall oven or 49⁵/₈" (126cm) for the double wall oven (see Figure 1 or 2). Place shims of appropriate height beneath the oven side rails.

3. Electrical Requirements

This appliance must be supplied with the proper voltage and frequency, and connected to an individual, properly grounded branch circuit, protected by a circuit breaker or fuse. To know the circuit breaker or fuse required by your model, see the serial plate to find the wattage consumption and refer to table A to get the circuit breaker or fuse amperage.

Appliance Rating Watts 240V	Protection Circuit Recommended	Appliance Rating Watts 208V	Protection Circuit Recommended
Less than 4800W	20A	Less than 4100W	20A
4801W - 7200W	30A	4101W - 6200W	30A
7201W - 9600W	40A or 50A	6201W - 8300W	40A or 50A
9601W and +	50A	8301W and +	50A

Table A


Observe all governing codes and local ordinances 1.A 3-wire or 4-wire single phase 120/240 or 120/208 Volt, 60 Hz AC only electrical supply is required on a separate circuit fused on both sides of the line (red and black wires). A time-delay fuse or circuit breaker is recommended. DO NOT fuse neutral (white wire). Only certain cooktop models may be installed over certain built-in electric oven models. Approved cooktops and built-in ovens are listed by the MFG ID number (see the insert sheet included in the literature package).

NOTE: Wire sizes and connections must conform with the fuse size and rating of the appliance in accordance with the American National Electrical Code ANSI/NFPA No. 70-latest edition, or with Canadian CSA Standard C22.1, Canadian Electrical Code, Part 1, and local codes and ordinances.

WARNING An extension cord should not be used with this appliance. Such use may result in a fire, electrical shock, or other personal injury. If you need a longer power cord you can purchase a 10' (3 m) power cord kit #903056-9010 by calling the Service Center.

- 2. These appliances should be connected to the fused disconnect (or circuit breaker) box through flexible armored or nonmetallic sheathed cable. The flexible armored cable extending from the appliance should be connected directly to the junction box. The junction box should be located as shown in Figure 1 or Figure 2 and with as much slack as possible remaining in the cable between the box and the appliance, so it can be moved if servicing is ever necessary.
- A suitable strain relief must be provided to attach the flexible armored cable to the junction box.



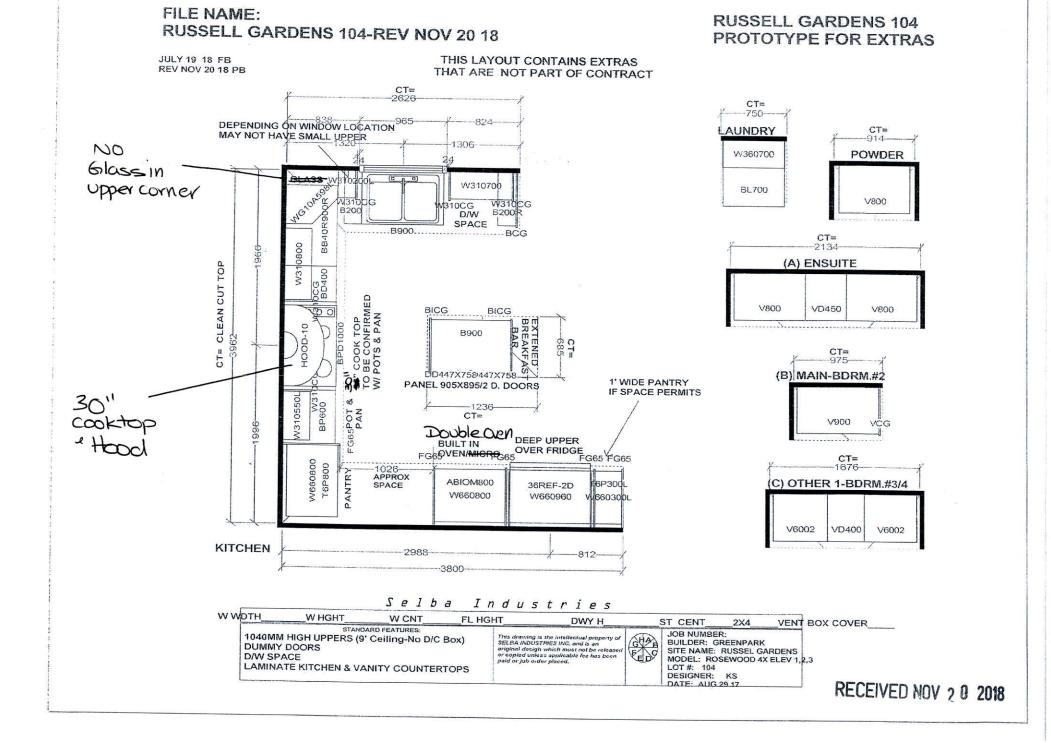

NEW

Russer GARDENS 184 Par. No 20/18 1 WIDE PK (IF SPACE PEREMITS)

FENDING STEE

MEASURE RECEIVED NOV 2 0 2018





104

ROSEWOOD 4
2,918 sq.ft. includes 20 sq.ft. of open area

