

CONSTRUCTION SUMMARY

Mayfield Village 2 (G) - Minnisale Homes Corp.

PURCHASERS: Karminder Singh DAURKA and Parmjit KAUR

TEL: RES.: 647-929-2160

LOT / PHASE	REG. PLAN #	HOUSE TYPE		
15 / 2	43M-2060	Millwood 5 Elev 2		

CABINETRY

1 - CABINETRY - KITCHEN - UPGRADE 1 22Jan19 Note:	
1 - CABINETRY - KITCHEN - LIGHT VALENCE 22Jan19 Note: NO ELECTRICAL	

CABINETRY ACCESSORIES

[REDACTED]	
1 - CABINETRY FEE FOR FLUSH CUTOUT ON WALL OVEN/MICROWAVE COMBO CABINET ONLY 29Jan19 Note:	
[REDACTED]	
1 - PANTRY UNIT - 600MM DEEP - PRICE IS PER FOOT - UPGRADE 1 22Jan19 Note:	
1 - KITCHEN CABINETRY UPPER - FULL DEPTH ABOVE FRIDGE - WITH GABLES - 600MM - PRICE IS EACH - UPGRADE 1 22Jan19 Note:	
1 - KITCHEN CABINETRY - BUILT-IN MICROWAVE/OVEN COMBO - UPGRADE 1 22Jan19 Note: Specs. Attached	
1 - KITCHEN CABINETRY BASE - COOKTOP CABINET WITH FULL HEIGHT DOORS - UPGRADE 1 - 36" 22Jan19 Note: Specs. Attached	
1 - KITCHEN CABINETRY - BUILT-IN FRIDGE CABINET - PRICE IS EACH 22Jan19 Note: Specs. Attached	

CERAMIC TILE

1 - PRICE IS FOR LABOUR ONLY - INSTALL TILE AT A 45 DEGREE ANGLE [REDACTED] - - POWDER ROOM 22Jan19 Note:	
1 - PRICE IS FOR LABOUR ONLY - INSTALL TILE AT A 45 DEGREE ANGLE [REDACTED] - - LAUNDRY ROOM 22Jan19 Note:	
1 - PRICE IS FOR LABOUR ONLY - INSTALL TILE AT A 45 DEGREE ANGLE [REDACTED] - - KITCHEN 22Jan19 Note:	
1 - PRICE IS FOR LABOUR ONLY - INSTALL TILE AT A 45 DEGREE ANGLE [REDACTED] - - FOYER 22Jan19 Note:	
1 - TILE - UPGRADE 1 FLOOR TILE - - LAUNDRY ROOM 22Jan19 Note:	
1 - TILE - UPGRADE 1 FLOOR TILE - - POWDER ROOM 22Jan19 Note:	
1 - TILE - UPGRADE 1 FLOOR TILE - - FOYER 22Jan19 Note:	
1 - TILE - UPGRADE 1 FLOOR TILE - - KITCHEN 22Jan19 Note:	

CONSTRUCTION

RECEIVED FEB 06 2019

CONSTRUCTION SUMMARY

Mayfield Village 2 (G) - Minnisale Homes Corp.

PURCHASERS: Karminder Singh DAURKA and Parmjit KAUR

TEL: RES.: 647-929-2160

LOT / PHASE	REG. PLAN #	HOUSE TYPE		
15 / 2	43M-2060	Millwood 5 Elev 2		
1 - <del>**DELETE**</del> RELOCATE BASEMENT WINDOW AS PER SKETCH --- AS PER PURCHASER'S REQUEST 31Jul18    Note:				
1 - PLEASE NOTE THAT NO FURTHER STRUCTURAL CHANGES WILL BE PERMITTED. 17Jul18    Note:				
2 - <del>***DELETE -</del> ADD NEW ENLARGE BASEMENT WINDOW (MAY REQUIRE WINDOW WELL) - WINDOW IS 30 INCHES X 24 INCHES *** 17Jul18    Note:				
1 - SMOOTH CEILINGS ON FIRST FLOOR ONLY 16Jul18    Note:				
1 - BASEMENT 8 FOOT 6 INCH CONCRETE POUR - MEASURED FROM TOP OF FOOTING TO TOP OF FOUNDATION WALL 16Jul18    Note:				
<del>1 - RELOCATE BASEMENT WINDOW AS PER SKETCH - IF CONSTRUCTION PERMITS</del> 16Jul18    Note: CANCELLED				
<del>2 - ADD NEW ENLARGE BASEMENT WINDOW (MAY REQUIRE WINDOW WELL) - WINDOW IS 30 INCHES X 24 INCHES</del> 16Jul18    Note: IF CONSTRUCTION PERMITS CANCELLED				
4 - ENLARGE BASEMENT WINDOWS (MAY REQUIRE WINDOW WELLS) - WINDOW IS 30 INCHES X 24 INCHES 16Jul18    Note:				

ELECTRICAL

1 - BUILT IN OVEN AND COOKTOP PROVISION - PROVISION ONLY - ELECTRICAL ONLY 22Jan19    Note:				
1 - PLUG - ELECTRICAL PLUG WITH GFI AND SWITCH - FOR FESTIVE LIGHTING 16Jul18    Note:				
1 - 200 AMP ELECTRICAL SERVICE 16Jul18    Note:				
1 - PLUG - ELECTRICAL PLUG - TO BE INSTALLED OVER FIREPLACE 16Jul18    Note:				
1 - ABOVE KITCHEN ISLAND - ADD LIGHT AND SWITCH - NO FIXTURE INCLUDED 16Jul18    Note:				
1 - LIGHT AND SWITCH - NO FIXTURE INCLUDED - LIVING ROOM 16Jul18    Note:				

FIREPLACE AND ACCESSORIES

1 - GAS LINE ROUGH-IN FOR STOVE (INCLUDES ELECTRICAL OUTLET) - FIRST FLOOR 22Jan19    Note:				
--	--	--	--	--

HARDWOOD FLOORING

1 - LAMINATE -UPGRADE TO CLASSIC PLUS SERIES IN LIEU OF STANDARD LAMINATE 22Jan19    Note:				
1 - HARDWOOD – GROUP A SERIES 5 INCH - IN LIEU OF 2 1/4 INCH NATURAL RED OAK - - FIRST FLOOR COMPLETE 22Jan19    Note:				

PLUMBING

1 - TOE TESTER - ADD TOE TESTER TO SHOWER 16Jul18    Note: MASTER ENSUITE BATHROOM				
1 - WATER LINE FOR FRIDGE - ROUGH-IN ONLY 16Jul18    Note:				

CONSTRUCTION SUMMARY

Mayfield Village 2 (G) - Minnisale Homes Corp.

PURCHASERS: Karminder Singh DAURKA and Parmjit KAUR

TEL: RES.: 647-929-2160

LOT / PHASE 15 / 2	REG. PLAN # 43M-2060	HOUSE TYPE Millwood 5 Elev 2		
-----------------------	-------------------------	---------------------------------	--	--

PROMOTIONAL

1 - LESS CREDIT FROM PURCHASER EXTRA SHEET IN OFFER 16Jul18 Note:	
--	--

STAIRS AND RAILINGS

1 - STAINED HANDRAIL, TREADS, RISERS AND STRINGER EXCLUDING PICKETS (FOR IRON PICKETS) - STANDARD STAIRCASE - PRICE IS PER SET 22Jan19 Note:	
1 - STAIRCASE - V GROOVE HANDRAIL 22Jan19 Note:	
1 - STAIRCASE - EUROLINE 1 IRON PICKETS - BLACK 22Jan19 Note:	

EXTRAS AS PER OFFER

(20) The Vendor agrees that notwithstanding any other term or provision in this Agreement included in the Purchase Price and in addition to those items detailed in Schedule GP to the Agreement of Purchase and Sale, the Purchaser is entitled to a credit o Worksheet Note:	
The Purchaser acknowledges that the Purchase Price is inclusive of all credits and promotional packages available at the time of purchase. Worksheet Note:	

This Document is Extremely Time Sensitive - Printed 5 Feb 19 at 14:39

Purchasers:Karminder Singh DAURKA & Parmjit KAUR

Property: 15

Telephone Res. / Bus: (647) 929-2160 /

Project: Minnisale Homes Corp.

Decor Advisor: Candace Forza

Model and Elevation: Millwood 5 Elev 2

Lock Date: 22-Jan-19

22-Jan-19

Plan #: 43M-2060

Layout Changes: ☐ Yes ☒ No

Sketch Attached: ☒ Yes ☐ No

Exterior Colour Scheme:

1. Cabinetry

	Style and Colour	Hardware
Kitchen / Breakfast	RICHMOND W823XZ4	2004
Laundry Room	ELISSE	Standard
Powder Room	MONACO W823XZ4	2004
Master Ensuite Bathroom	MONACO W823XZ4	1001
Ensuite Bath - Bedroom 2	MONACO W821XZ4	1001
Ensuite Bath - Bedroom 3	MONACO W821XZ4	1001
Ensuite Bath - Bedroom 4	MONACO W821XZ4	1001
	N/A	N/A
	N/A	N/A

Appliances:

Built In Appliances ☒ Yes ☐ No

Slide In Stove ☐ Yes ☒ No

Dishwasher Cabinet

☐ Closed ☒ Open

41" Upper Cabinets ☒ Yes ☐ No

Please NOTE: Standard Cabinet Height is 30"

Stove Opening

36"

NOTE: If not specified, opening will be set to builder's standard opening of approximately 30" width

Fridge Opening

See Specs.

NOTE: If not specified, opening will be set to builder's standard opening of approximately 37" width x 74" height

\*\* Refer to Construction Summary

2. Counters

	Counter	Edge
Kitchen / Breakfast	LAMINATE-CARRARA BIANCO 6696-46	
Laundry Room	N/A	
Powder Room	LAMINATE-WHITE CARRARA 4924-38	
Master Ensuite Bathroom	LAMINATE-ARGENTO ROMANO 6697-46	
Ensuite Bath - Bedroom 2	LAMINATE-ELEMENTAL CONCRETE 8830-58	
Ensuite Bath - Bedroom 3	LAMINATE-ELEMENTAL CONCRETE 8830-58	
Ensuite Bath - Bedroom 4	LAMINATE-ELEMENTAL CONCRETE 8830-58	
	N/A	
	N/A	

\*\* Refer to Construction Summary

<b>Purchasers:</b>	Karminder Singh DAURKA & Parmjit KAUR	<b>Property:</b>	15
<b>Telephone Res. / Bus:</b>	(647) 929-2160 /	<b>Project:</b>	Minnisale Homes Corp.
<b>Decor Advisor:</b>	Candace Forza	<b>Model and Elevation:</b>	Millwood 5 Elev 2
<b>Lock Date:</b>	22-Jan-19		<b>Plan #:</b> 43M-2060

### –3. Ceramic Flooring

		At a 45	Threshold-If App.
Entrance Vestibule	TILE-FM45GL001S GLOSSY WHITE-18X18 @ 45°	<input checked="" type="checkbox"/>	metal strip where applicable
Main Hall	STRIP	<input type="checkbox"/>	
Kitchen / Breakfast	TILE-FM45GL001S GLOSSY WHITE-18X18 @ 45°	<input checked="" type="checkbox"/>	
Laundry Room	TILE-FM45GL001S GLOSSY WHITE-18X18 @ 45°	<input checked="" type="checkbox"/>	
Powder Room	TILE-FM45GL001S GLOSSY WHITE-18X18 @ 45°	<input checked="" type="checkbox"/>	
Master Ensuite Bathroom	TILE-BEACH BLACK-13X13	<input type="checkbox"/>	
Ensuite Bath - Bedroom 2	TILE-RAINBOW LIGHT GREY-13X13	<input type="checkbox"/>	
Ensuite Bath - Bedroom 3	TILE-RAINBOW LIGHT GREY-13X13	<input type="checkbox"/>	
Ensuite Bath - Bedroom 4	TILE-RAINBOW LIGHT GREY-13X13	<input type="checkbox"/>	
	N/A	<input type="checkbox"/>	
	N/A	<input type="checkbox"/>	

\*\* Refer to Construction Summary

#### 4. Ceramic Wall Tile

Master Ensuite Bathroom	Selection	Describe
Tub Deck Wall	N/A	
Tub Deck	N/A	
Tub Deck Skirt	N/A	
Shower Stall	TILE-LUC CONCEPT NEVE-8X16	
Bathtub Enclosure Walls	N/A	
Ensuite Bath - Bedroom 2	TILE-LUC CONCEPT FERRO-8X16	
Ensuite Bath - Bedroom 3	TILE-LUC CONCEPT FERRO-8X16	
Ensuite Bath - Bedroom 4	TILE-LUC CONCEPT FERRO-8X16	
	N/A	
	N/A	
Kitchen Backsplash	N/A	

**\*\* Refer to Construction Summary - STANDARD GROUT THROUGHOUT UNLESS SPECIFIED**

## 5. Plumbing Fixtures

All Bathrooms	White	Whirlpool	Dishwasher Rough-In	Waterline for Fridge
N/A	N/A	N/A <input type="radio"/> Yes <input checked="" type="radio"/> No	<input checked="" type="radio"/> Yes <input type="radio"/> No	<input checked="" type="radio"/> Yes <input type="radio"/> No
N/A	N/A			
N/A	N/A			
N/A	N/A			
N/A	N/A			

**\*\* Refer to Construction Summary**

## 6. Trim Carpentry

<b>Interior Doors</b>	CARRARA-SMOOTH
<b>Interior Trim</b>	As Per Construction Specifications
<b>Door Handles</b>	As Per Construction Specifications
<b>Exterior Front Door Handle</b>	As Per Construction Specifications

**\*\* Refer to Construction Summary**

Initials:

KD

P.K.

Purchasers:Karminder Singh DAURKA & Parmjit KAUR

Telephone Res. / Bus: (647) 929-2160 /

Decor Advisor: Candace Forza

Lock Date: 22-Jan-19

Property: 15

Project: Minnisale Homes Corp.

Model and Elevation: Millwood 5 Elev 2

Plan #: 43M-2060

7. Other Flooring

Main Hall	STRIP-MIRAGE-ADMIRATION-MAPLE-CASHMERE-PLATINUM-5"
Living Room	STRIP-MIRAGE-ADMIRATION-MAPLE-CASHMERE-PLATINUM-5"
Dining Room	STRIP-MIRAGE-ADMIRATION-MAPLE-CASHMERE-PLATINUM-5"
Family Room	STRIP-MIRAGE-ADMIRATION-MAPLE-CASHMERE-PLATINUM-5"
Den / Library / Study	STRIP-MIRAGE-ADMIRATION-MAPLE-CASHMERE-PLATINUM-5"
Basement Landing(If Applies)	N/A
Lower Landing (If Applies)	STRIP-MIRAGE-ADMIRATION-RED OAK-SEMI-GLOSS-PLATINUM-5"
Upper Landing	STRIP-MIRAGE-ADMIRATION-RED OAK-SEMI-GLOSS-PLATINUM-5"
Upper Hall	LAMINATE-CLASSIC PLUS - HAVANA OAK DRK SAW CUT QS-UM1657
Master Bedroom	LAMINATE-CLASSIC PLUS - HAVANA OAK DRK SAW CUT QS-UM1657
Bedroom #2	LAMINATE-CLASSIC PLUS - HAVANA OAK DRK SAW CUT QS-UM1657
Bedroom #3	LAMINATE-CLASSIC PLUS - HAVANA OAK DRK SAW CUT QS-UM1657
Bedroom #4	LAMINATE-CLASSIC PLUS - HAVANA OAK DRK SAW CUT QS-UM1657
Bedroom #5	N/A
	N/A
	N/A
	N/A
Underpad	TypeArea
	N/AN/A

\*\* Refer to Construction Summary

8. Railings and Pickets

Railing Type	V-GROOVE	Colour	MIRAGE PLATINUM
Picket Type	EUROLINE 1	Colour	BLACK
Stringer / Riser	AS PER CONSTRUCTION SPECIFICATIO	Colour	MIRAGE PLATINUM
Treads	AS PER CONSTRUCTION SPECIFICATIO	Colour	MIRAGE PLATINUM
Red Oak Stairs with Semi Gloss Finish		<input checked="" type="radio"/> Yes <input type="radio"/> No	

\*\* Refer to Construction Summary

9. Wall Paint Flat Finish

Main & Upper Hall	22 WARM GREY	Master Bedroom	22 WARM GREY
Living Room	22 WARM GREY	Bedroom #2	22 WARM GREY
Dining Room	22 WARM GREY	Bedroom #3	22 WARM GREY
Kitchen / Breakfast	22 WARM GREY	Bedroom #4	22 WARM GREY
Family Room	22 WARM GREY	Bedroom #5	N/A
Powder Room	22 WARM GREY	Master Ensuite	22 WARM GREY
Laundry Room	22 WARM GREY	Ensuite Bath - Bedroom 2	22 WARM GREY
Den/Library	22 WARM GREY	Ensuite Bath - Bedroom 3	22 WARM GREY
Trim Paint-Semi Gloss	BIRCH WHITE	Ensuite Bath - Bedroom 4	22 WARM GREY
	N/A		N/A
	N/A		N/A
Smooth Ceilings First Floor	<input checked="" type="radio"/> Yes <input type="radio"/> No		

\*\* Refer to Construction Summary

KD

PK

Initials:\_\_\_\_\_

Purchasers: Karminder Singh DAURKA &amp; Parmjit KAUR

Property: 15

Telephone Res. / Bus: (647) 929-2160 /

Project: Minnisale Homes Corp.

Decor Advisor: Candace Forza

Model and Elevation: Millwood 5 Elev 2

Lock Date: 22-Jan-19

22-Jan-19

Plan #: 43M-2060

## 10. Plaster Mouldings and Medallions

Entrance Vestibule	N/A	N/A	Kitchen/Breakfast	N/A	N/A
Main Hall	N/A	N/A	Den/Library	N/A	N/A
Living Room	N/A	N/A	Lower Landing	N/A	N/A
Dining Room	N/A	N/A		N/A	N/A
Family Room	N/A	N/A		N/A	N/A

\*\* Refer to Construction Summary

## 11. Fireplace

	Living Room			Family Room			Other Room - Specify		
	Purchased	As Per Plan	N/A	Purchased	As Per Plan	N/A	Purchased	As Per Plan	N/A
Fireplace Type	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
Mantle Type	N/A			FLAT ON WALL			N/A		
Colour / Stain	N/A			MANTLE M2-STANDARD			N/A		
Surround	N/A			AS PER CONSTRUCTION SPECIFICATIONS			N/A		
Hearth	N/A			GRIGIO CARNICO			N/A		
	N/A			NO			N/A		

\*\* Refer to Construction Summary

## 12. Heating and Air Conditioning

Air Conditioning	NO	Gas Provisions Stove	YES
Gas Provisions Dryer	NO	Gas Provisions Barbecue	NO
Comment			

\*\* Refer to Construction Summary

## 13. Electrical

Plugs and Switches	<input checked="" type="radio"/> White	DECOR	Above Kitchen Cabinet Light	<input type="radio"/> Yes	<input checked="" type="radio"/> No
Hood Fan	STANDARD WHITE		Below Kitchen Cabinet Light	<input type="radio"/> Yes	<input checked="" type="radio"/> No
Appliances	Built in Cooktop	Built in Oven	Gas Stove	Microwave	
	<input checked="" type="radio"/> Yes <input type="radio"/> No	<input checked="" type="radio"/> Yes <input type="radio"/> No	<input checked="" type="radio"/> Yes <input type="radio"/> No	<input checked="" type="radio"/> Yes <input type="radio"/> No	
Dishwasher Rough-in	Yes				

\*\* Refer to Construction Summary


## 14. General Comments

\*\* Refer to Construction Summary

## Disclaimers and Notes

- Colours of all materials are as close as possible to builder's selection, but not necessarily identical due to variances in manufacturing.
- Any extras listed above are null and void unless accompanied by a separate invoice/amendment. Said invoice must be paid in full.
- The Purchaser agrees that this colour selection is final and that no changes will be permitted, unless required by the Vendor.
- The Purchaser acknowledges reading and accepting document which contains other miscellaneous disclaimers.


Signature:



Date:

Jan. 22<sup>nd</sup>/19

Signature:




Date:

Jan. 22<sup>nd</sup>/2019

dacor

## 36-INCH GAS RANGETOP

H RTP366S | HERITAGE COLLECTION

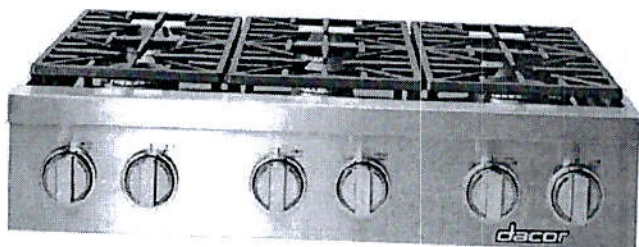

### AVAILABLE MODELS

H RTP366S/NG	36" Heritage Rangetop, Natural Gas
H RTP366S/NG/H	36" Heritage Rangetop, Natural Gas, High Altitude
H RTP366S/LP	36" Heritage Rangetop, Liquid Propane
H RTP366S/LP/H	36" Heritage Rangetop, Liquid Propane, High Altitude

### GENERAL PROPERTIES

FINISH	STAINLESS STEEL
--------	-----------------

### INCLUDED ACCESSORIES

WOK RING	AWR4
11 1/3" GRIDDLE	AG36

### OPTIONAL ACCESSORIES

11 1/3" SEARING GRILL	AEGR36
BACKGUARD 9" HIGH	AEB3609

### OPTIONAL ACCESSORIES - VENTILATION

HERITAGE WALL HOODS	HWHP3618 / HWHP3612
DISCOVERY CHIMNEY & ISLAND HOODS	DHW361 / DH1361 • DH1CH
MODERNIST DOWNDRAFT	MRV36155

### TECHNICAL INFORMATION

ELECTRICAL REQUIREMENTS	120VAC/60HZ/15AMP
-------------------------	-------------------

### PRODUCT DIMENSIONS

APPLIANCE DIMENSIONS (H X W) (IN.)	9" X 35 7/8"
DEPTH TO FRONT OF CONTROL PANEL	26 5/16"
SIDE VIEW FRONT OF KNOB TO REAR OF UNIT	27 5/16"

### FEATURES & BENEFITS

- SimmerSear™ Burners provide up to 18,000 BTUs for searing to perfection and achieve ultra-low temperatures for simmering and melting without scorching.
- High Performance Dual-Stacked Burners provide more control at low temperatures to melt without scorching and achieve a true simmer on every burner.
- Burner Configuration (96,000 total BTUs):
  - 2 SimmerSear™ Burners with Melting Feature (800-18,000 BTU)
  - 4 High Performance Sealed Gas Burners with True Simmer (800-15,000 BTU)
- Brass Burners and Valves for superior efficiency, reliability, and longevity.
- Sealed burners and porcelain enameled spill basin for easy clean up.
- Exclusive Extra Wide Continuous Platform Grates provide one of the largest usable cooking surfaces and allow extra large pots and pans to be moved effortlessly from burner to burner: 3 11-1/3" Wide Continuous Platform Grate.
- Perma-Flame™ Technology automatically re-ignites a flame for continuous heating and uninterrupted cooking should a burner unexpectedly go out.
- Exclusive SmartFlame™ Technology reduces flame contact with grate to prevent grate discoloration and increase longevity.
- New Professional Design enhances the contemporary kitchen with a near cabinet-depth fit.
- Illumina™ Burner Controls, with new ProGrip™ design and stainless finish, glow bright white to always let you know when a burner is on.
- Interchangeable Accessories included - Wok Ring and Griddle:
  - Ships with both brass and black burner caps
  - Downdraft compatible
  - Island trim included
  - Designed and Manufactured in California, USA

# Installation Requirements

## ⚠ WARNING

- The installation of this appliance must conform with local codes or, in the absence of local codes, with the National Fuel Gas Code, ANSI Z223.1/NFPA 54.
- To prevent an electric shock hazard, the power supply must meet the specifications stated below.

The electrical and gas supply data on this page is for reference only. If the requirements below do not agree with the product data label, use the data on the product data label.

## Electrical Requirements

- The appliance installation must be electrically grounded in accordance with local codes or, in the absence of local codes, with the National Electrical Code, ANSI/NFPA 70.
- The correct voltage, frequency and amperage must be supplied to the electrical outlet according to the product data label located on the bottom of the chassis.
- The electrical outlet must be installed by a licensed electrician in an accessible location so that the power cord may easily be disconnected during cleaning and service.

### ELECTRIC CIRCUIT REQUIREMENTS

Circuit Required	Total Connected Load
120 Vac 60 Hz, 15 Amp. (3 wire)	0.25 Amp @ 120 Vac, 60 Hz

## Gas Supply Requirements


- Check your local building codes for the proper method of installation. In the absence of local codes, this appliance should be installed in accordance with the National Fuel Gas Code ANSI Z223.1/NFPA 54. The gas service must be installed by a qualified professional.
- Be certain that the rangetop being installed is correct for the gas service being provided (natural gas or LP gas). Also, if operating the rangetop at an altitude above 4000 ft. (1219 m) make sure it is equipped for high altitude operation. See the inside cover for more information.
- An external manual shut-off valve must be installed between the gas inlet and the rangetop for the purpose of turning on or shutting off gas to the appliance.
- The factory provided regulator shipped with the appliance must be installed in the gas line that runs from the gas shut off valve to the rangetop gas inlet. Use only the regulator provided. The regulator inlet accommodates a 3/4" gas supply line and is also compatible with a 1/2" house gas supply. The inlet to the rangetop itself is equipped with a 3/4" male NPT fitting.

### GAS SUPPLY PRESSURE REQUIREMENTS\*

Gas Type	Manifold Pressure	Minimum Gas Supply Pressure
Natural Gas	5" Water Column	6" Water Column
Propane (LP)	10" Water Column	11" Water Column


\* Maximum gas supply pressure for all models is 1/2 psi

## Product Dimensions

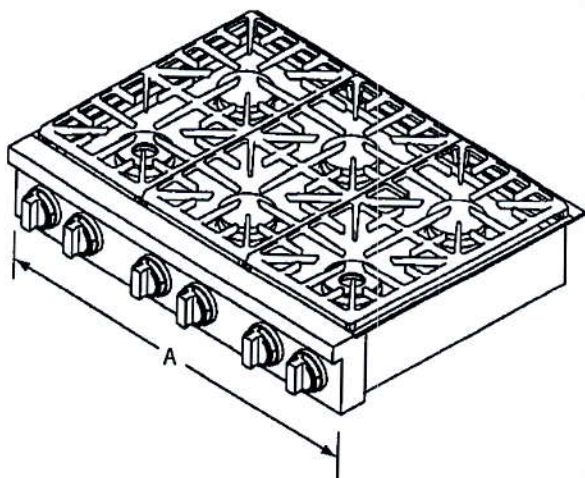

### WIDTH (A)

H RTP366	35 7/8" (91.1 cm)
----------	-------------------

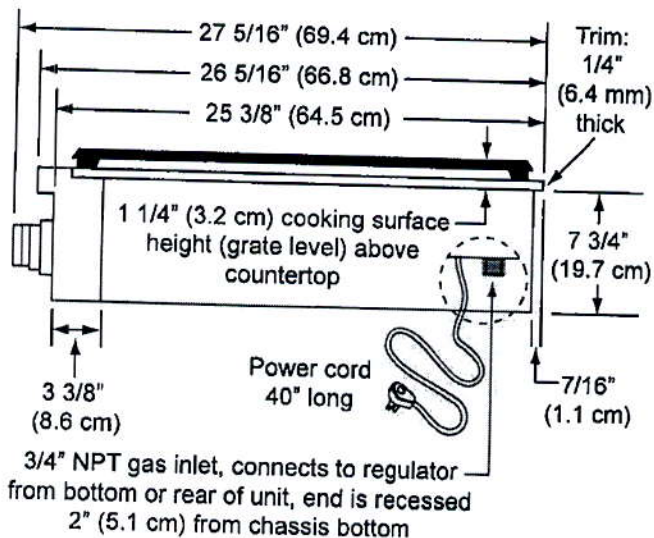

### SIDE VIEW

Product tolerances:  $\pm 1/16$ " ( $\pm 1.6$  mm) unless otherwise noted.

# Installation Requirements

## Cabinet and Countertop Layout

### WARNING

To avoid the risk of fire or personal injury, all minimum and maximum specified clearances on this and the following pages must be maintained or exceeded.

### General Considerations

- The minimum distance from the back of the rangetop to a combustible rear wall is 2 1/2" (6.4 cm) minimum (Figure 1).
- Installation of a non-combustible material (up to the hood) or a backsplash is always recommended, and mandatory if the distance to the back wall from the rangetop is less than 2 1/2" (Figure 2). When installing a backguard, use only Dacor model numbers AEB3609 (DYRTP366) or AEB4809 (DYRTP486). Consult local codes and ordinances for acceptable non-combustible materials.

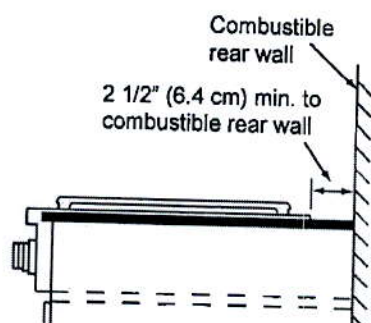


FIGURE 1

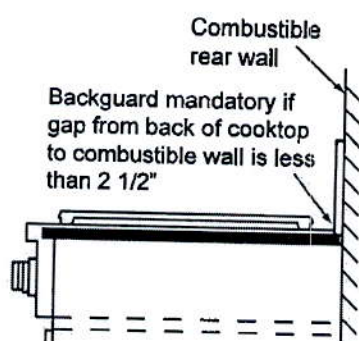


FIGURE 2

- Carefully check the location where the rangetop is to be installed. For best performance, the rangetop should be installed away from drafts caused by doors, windows and heating and air conditioning outlets. To reduce the risk of personal injury from reaching over a hot appliance, avoid cabinet installations directly above.
- All contact surfaces between the rangetop and the counter must be solid and level.

- To reduce the risk of personal injury and to reduce accumulated smoke in the room, Dacor strongly recommends installing a range hood or downdraft vent. A hood should project horizontally a minimum of five (5) inches beyond the face of the cabinets.
- The installation must allow access to the underside of the rangetop for service and inspection purposes, including the ability to turn off the rangetop gas supply valve and electrical outlet.
- The countertop overhang on the sides of the cutout shown on the following pages covers the recessed portions of the rangetop behind the control panel and creates a seamless look for the installation.
- IMPORTANT:** When installing the rangetop into a laminated or synthetic countertop, radius the corners of the cutout to help avoid cracking. Consult the countertop manufacturer's instructions for minimum corner radius, reinforcement and heat protection requirements.
- For installations with a downdraft vent, install this appliance only with the approved Dacor downdraft vent models listed on page 6.

### Gas and Electric Service Location

- A manual gas shut-off valve must be installed in an accessible location in the gas line external to the appliance for the purpose of turning on or shutting off gas to the appliance.
- The gas supply piping, gas shut-off valve and the electrical outlet must be located so they do not interfere with the rangetop when it is installed. If installing another appliance in the cabinet below, allow for the routing of gas and electrical service out the back of the unit.
- The shaded area on the facing page shows the recommended location of the gas inlet and the electrical outlet. For replacement purposes, the location of the existing utilities may be utilized provided they do not interfere with the sides or rear of the rangetop. Check local building codes for permissible utility locations.
- For best performance and to minimize gas pressure loss, attach the gas supply regulator as close as possible to the rangetop gas inlet.


#### The installation must:

- Allow for access to the gas shut-off valve and regulator when the unit is installed.
- Allow for access to the electrical outlet, when the rangetop is in place so that the power cord may be easily disconnected if the unit needs service.
- Allow for connection of the (40") power cord to the electrical outlet.
- If a downdraft vent is to be installed, allow for access to the gas supply valve and electrical outlet when the downdraft vent is in place.


# Installation Requirements

## Cabinet/Cutout Dimensions

Cabinet tolerances +1/16" (+1.6 mm) -0 unless otherwise noted.

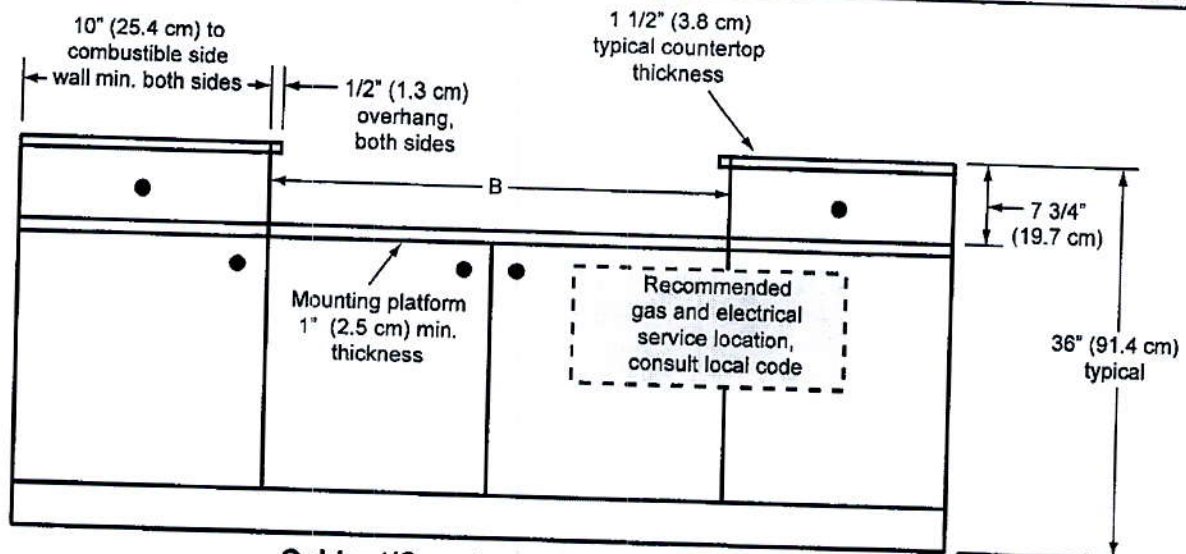

Cabinet/Countertop Dimensions - Front View

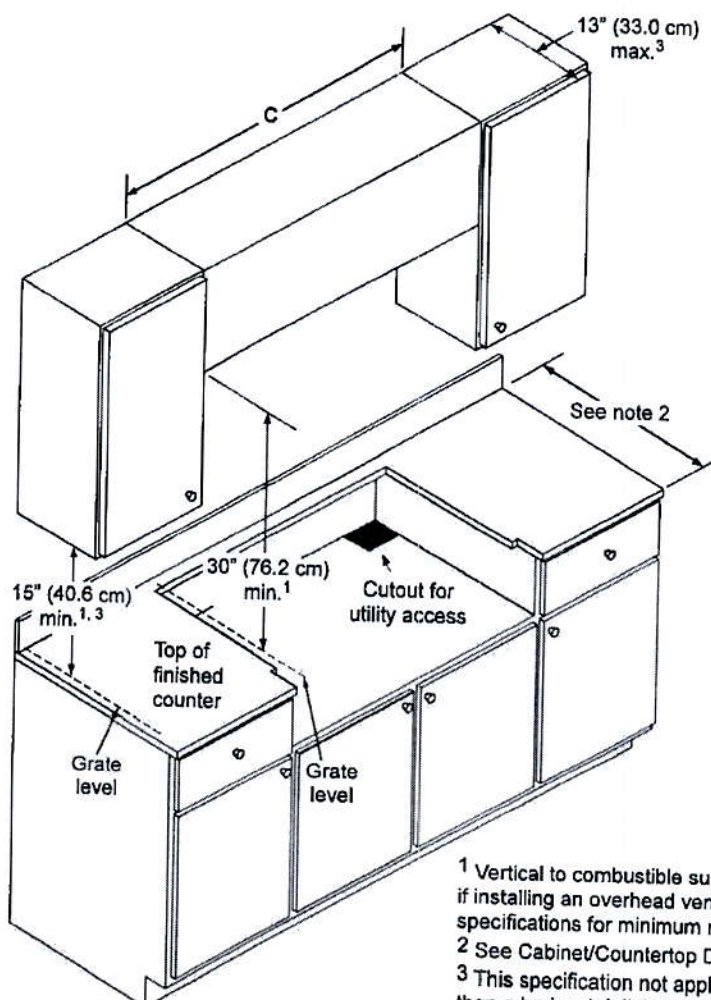


Rangetop Model	B	C
DYRTP366	36" (91.4 cm)	36" (91.4 cm)* 42" (106.7 cm)**
DYRTP486	48" (121.9 cm)	48" (121.9 cm)* 54" (137.2 cm)**
* Minimum ** Recommended		

Cabinet/Countertop Dimensions - ISO View

- 1 Vertical to combustible surface from rangetop grate level; if installing an overhead vent hood, also check the hood specifications for minimum required clearances.  
 2 See Cabinet/Countertop Dimensions - Top View  
 3 This specification not applicable for cabinets more than a horizontal distance of 10" (25.4 cm) from the edge of the rangetop.

continued on following pages...

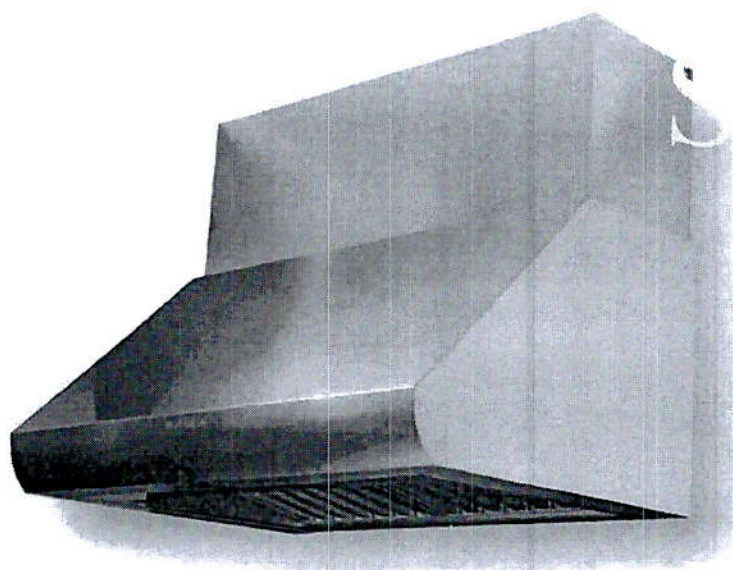

## SUTC-35

### SUTC 35

- SUTC35 36"-48" Dual Motor: EBM 1100 cfm (Duct size 8")
- SUTC35 30" One Motor: EBM 600cfm (Duct size 6")
- Pressure: 800 Pa
- Noise level: 66 dBA - 5.1 sones




- Lighting: 2x20W halogen lamps 30" version  
3x20W halogen lamps 36" version  
4x20W halogen lamps 48" version



- Red Control panel: 4 speed push-button + timer + light switch

- grease filter: commercial style baffle filters
- Stainless steel: AISI 430

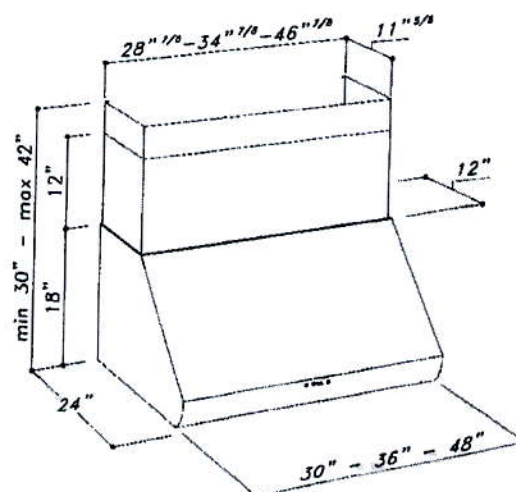


**Sirius**

SU TC 35

Page 6


1 Motor back vented version

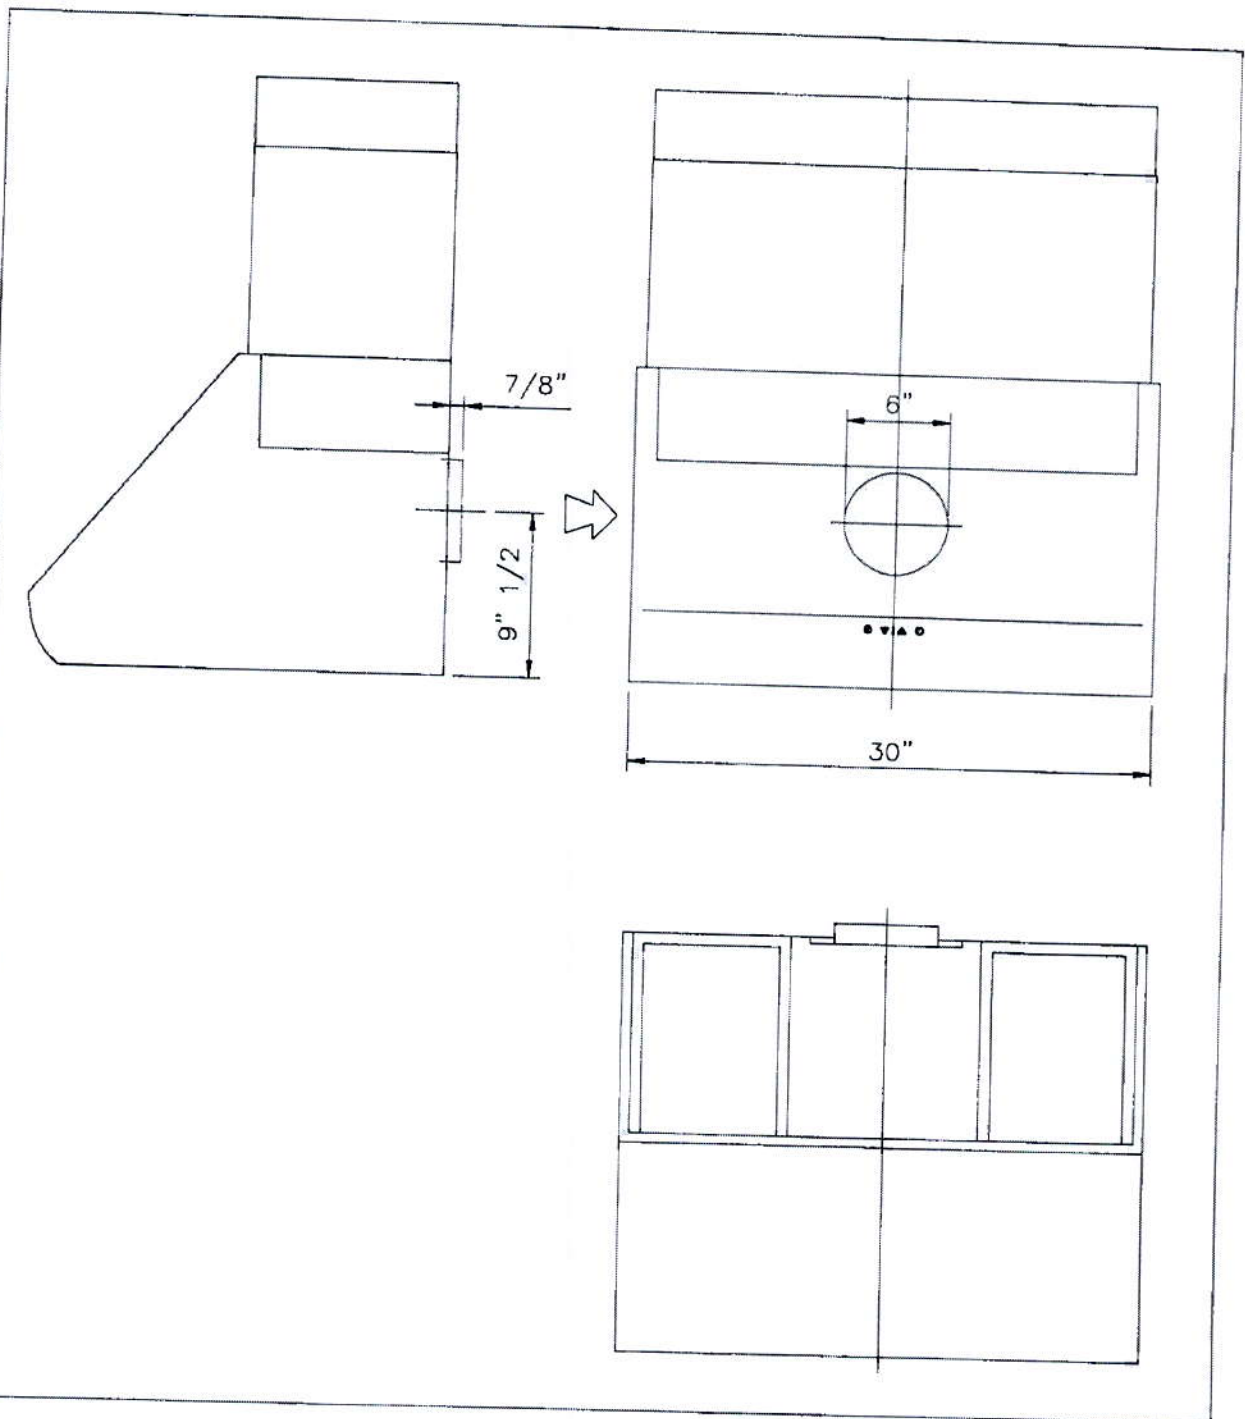

SU TC 35

Page 8

2 Motors back vented version

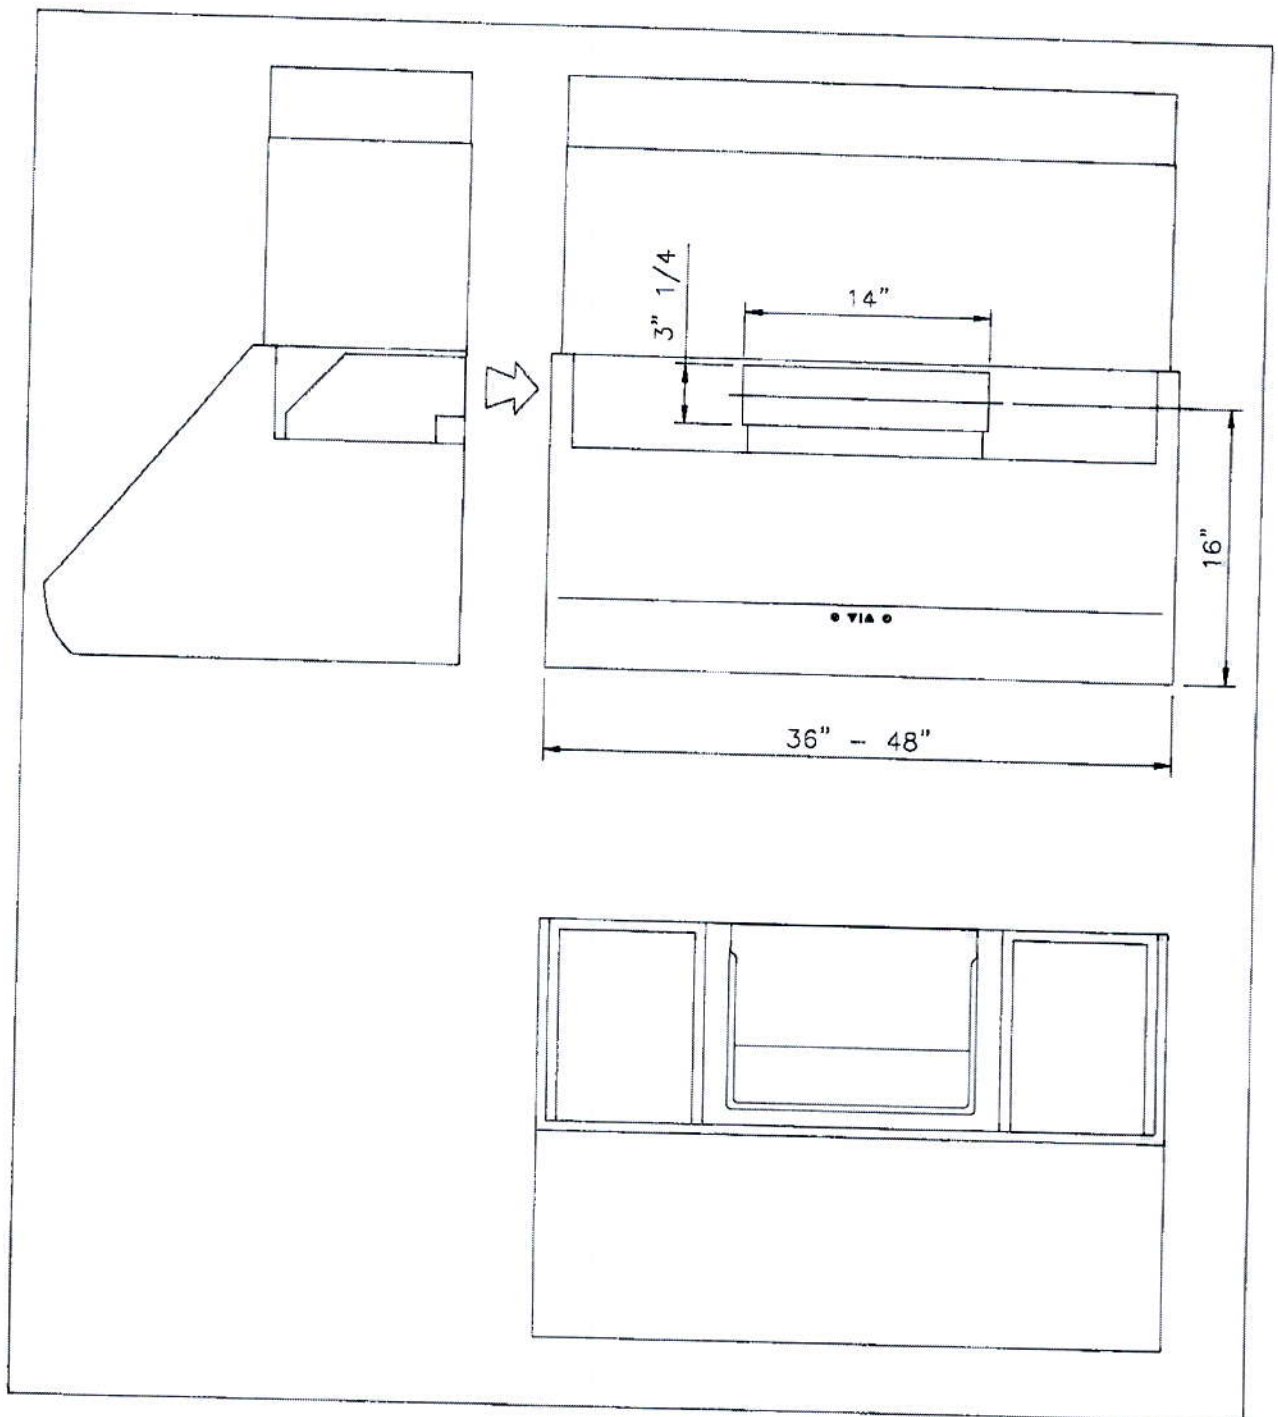

# ★ Flush Installation ★

## dacor

### 30-INCH COMBI WALL OVEN

DOC30M977D | MODERNIST COLLECTION



#### AVAILABLE MODELS

DOC30M977DM Graphite Stainless Steel  
DOC30M977DS Stainless Steel

#### FEATURES & BENEFITS

- Available in graphite stainless steel and silver stainless steel.
- Exclusive Four Part Dual Pure Convection Oven - heat, air, baffle and filter to precisely distribute heat for superior cooking results.
- Steam and Convection Oven - the power of steam assist and convection cooking in one.
- The convenience of Microwave Convection.
- Large oven capacity: Microwave 1.9 cu. ft. / Oven 4.8 cu. ft.
- BrightVue™ oven lighting (LED + Halogen Lights).
- RadiantVue™ microwave lighting (LED + Metal Mesh).
- 7" LCD control panel.
- Dacor iQ Kitchen app with integrated Wi-Fi to control and monitor remotely.
- Flush installation.

#### ACCESSORIES (INCLUDED)

GLIDE RACKS	2
STANDARD RACKS	1
TEMPERATURE PROBE	1
AUTOMATIC WATER RESERVOIR	1
TURN TABLE (OPTITRAY™)	1
MICROWAVE WIRE RACK	1
EVENPLATE™	1

DOC30M977D | 30-INCH COMBI WALL OVEN

#### ACCESSORIES (OPTIONAL)

COOKIE SHEETS (SET OF 3)	SKU - ACSM303
--------------------------	---------------

#### GENERAL PROPERTIES - OVEN

COOKING MODES LOWER CAVITY	BAKE - BROIL - CONVECTION BAKE - CONVECTION ROAST - CONVECTION BROIL - FOUR PART PURE CONVECTION - PURE CONVECTION SEAR - STEAM BAKE - STEAM ROAST
-------------------------------	--

#### GENERAL PROPERTIES - MICROWAVE

COOKING MODES UPPER CAVITY	BROIL - CONVECTION SEAR (POWER CONVECTION) - SPEED CONVECTION SEAR - SPEED BROIL
-------------------------------	---

#### FEATURES

TYPE	COMBINATION MICROWAVE/ OVEN
SOFT CLOSE DOOR (OVEN)	SOFTSHUT™
LIGHTING	BRIGHTVUE™ AND RADIANTVUE™

#### ADDITIONAL FEATURES - OVEN

CLEANING TYPE	SELF CLEAN GREENCLEAN™
OVEN TYPE	COMBINATION
INSTALLATION	FLUSH
CONTROLS	7" LCD
WIFI	YES (REMOTE ENABLED)
CONVECTION TYPE	FOUR PART DUAL PURE CONVECTION WITH MESH FILTER
OVEN COLORS	SILVER STAINLESS STEEL GRAPHITE STAINLESS STEEL

#### OVEN PERFORMANCE

BAKE ELEMENT	3,000W - 8 PASS
BROIL ELEMENT	4,400W - 10 PASS
CONVECTION ELEMENT	1,300W (EACH - 2,600W TOTAL)
STEAM HEATER	500W

#### CONTROL FEATURES - OVEN

WIFI ON/OFF	YES
LANGUAGE OPTIONS	YES
CLOCK	YES (12 HR/24 HR)
DELAY START	YES
KITCHEN TIMER	YES
SABBATH MODE	YES
LAMP ON/OFF	YES
CHILD LOCK	YES
OPTIONS	YES
ENERGY SAVING	YES
DEMO MODE	YES

#### CONTROL FEATURES - MICROWAVE

CLOCK YES	(12 HR/24 HR)
KITCHEN TIMER	YES
LAMP ON/OFF	YES
CHILD LOCK	YES
SOUND	YES
WIFI	YES (MONITOR ONLY)

# dacor

## 30-INCH COMBI WALL OVEN

OVEN	
ADDITIONAL MODES	
KEEP WARM	YES
PROOF (LOWER TEMP)	YES
PROOF	YES
PIZZA STONE MODE	YES
DEHYDRATE	YES
GOURMET COOK	YES
INSTANTHEAT™	YES
TEMPERATURE PROBE	YES
TECHNICAL DETAILS	
CIRCUIT BREAKER (A)	40
VOLTS (V)	240 / 208
FREQUENCY (HZ)	60
ENERGY SOURCE	ELECTRIC


MICROWAVE	
ADDITIONAL MODES	
ADD 30 SECONDS	YES
DEFROST	YES
AUTO COOK (NO SENSOR)	YES
SENSE COOK™ (SENSOR COOK)	YES
CONVECTION SEAR AUTO COOK	YES
HEALTHY FRY (SLIM FRY)	YES
HEALTHY CHOICE (FIT CHOICE)	YES
TECHNICAL DETAILS	
POWER LEVEL	950W

MICROWAVE AND OVEN	
DIMENSIONS & WEIGHT	
APPLIANCE DIMENSIONS (H X W X D) (IN.)	43 3/8" X 29 3/4" X 23 1/8"
REQUIRED CUTOUT SIZE (H X W X D) (IN.)	43 11/16" X 30 1/4" X 24 7/8"
OVEN CAPACITY (CUBIC FEET)	4.8
MICROWAVE CAPACITY (CUBIC FEET)	1.9
WARRANTY	
LIMITED, PARTS AND LABOR	1 YEAR

# dacor

## 30-INCH COMBI WALL OVEN


### APPLIANCE DIMENSIONS



30"

A	43 3/8" (110.2CM)	OVERALL HEIGHT
B	28 1/2" (72.4CM)	RECESSED WIDTH
C	42" (106.7CM)	RECESSED HEIGHT
D	23 1/8" (58.7CM)	RECESSED DEPTH
E	29 3/4" (75.6CM)	DOOR WIDTH
F	67" (170CM)	CONDUIT LENGTH
G	30" (76.2CM)	OVERALL WIDTH (HANDLE WIDTH)
H	2 1/4" (5.6CM)	HANDLE DEPTH

### INSTALLATION CUTOUT DIMENSIONS

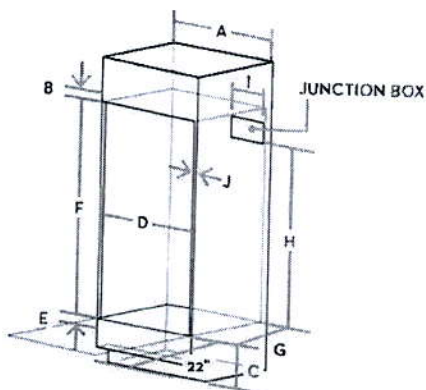


Allow a minimum of 22" for clearance to adjacent corners, drawers, walls, etc. when door is open.

### STANDARD CABINET DIMENSIONS

A	30" (76.2CM)
B	MIN. 13/16" (3.0CM)
C	12" (30.5CM)
D	MIN. 28 5/8" / MAX. 28 3/4" (MIN. 72.7CM / MAX. 73.0CM)
E	MIN. 1" / MAX. 1 1/4" (MIN. 2.5CM / MAX. 3.2CM)
F	42 1/4" (107.3CM)
G	MIN. 23 1/2" (MIN. 59.7CM)
H	MIN. 30 1/2" (MIN. 77.5CM)
I	MAX. 9 1/2" (MAX. 24.1CM) JUNCTION BOX
J	MIN. 11/16" (1.75CM) - WOODEN CABINET THICKNESS

### INSTALLATION CUTOUT DIMENSIONS

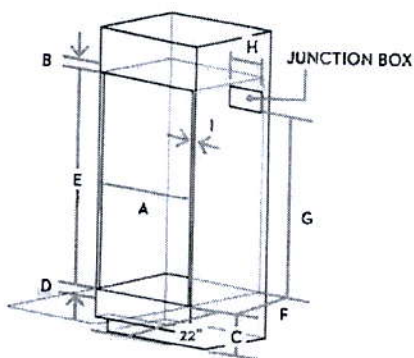

### FLUSH CABINET DIMENSIONS





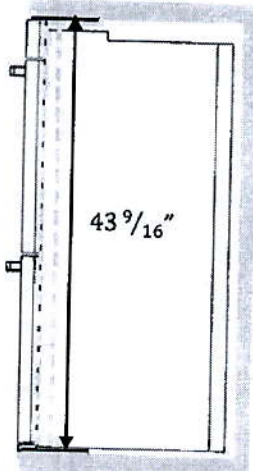
A	MIN. 30 3/16" / MAX. 30 5/16" (MIN. 76.7CM / MAX. 77.0CM)
B	MIN. 13/16" (3.0CM)
C	12" (30.5CM)
D	MIN. 1" / MAX. 1 1/4" (MIN. 2.5CM / MAX. 3.2CM)
E	43 11/16" (110.9CM)
F	MIN. 24 13/16" (MIN. 63.0CM)
G	MIN. 30 1/2" (MIN. 77.5CM)
H	MAX. 9 1/2" (MAX. 24.1CM) JUNCTION BOX
I	MIN. 11/16" (1.75CM) - WOODEN CABINET THICKNESS

② Plan the cutout Width and Depth  
· depending on install method  
(Standard or Flush install)


③ Plan the cutout Height  
· depending on install method and  
configuration

It is important to observe the specified dimensions of the installation cutout for a trouble-free installation of the appliance.

- The appliance can be installed two ways, STANDARD INSTALL or FLUSH INSTALL, Note: cabinet cut out dimensions are different for each method.
- Standard install needs recessed dimensions and Flush install needs overall dimensions.
- Detailed install dimensions can be confirmed by reviewing the Installation Instructions.
- Install the COMBI OVEN at least 12"(30cm) away from other appliances.

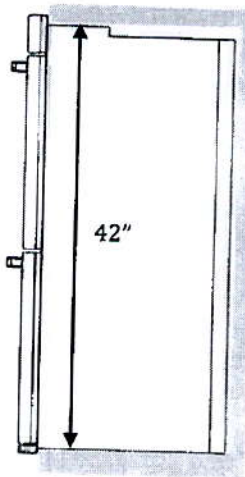
	TOP VIEW	SIDE VIEW
<b>STANDARD INSTALL</b> (Refer to the recessed dimensions)	 <p>28 1/2"</p>	 <p>42"</p>
 <b>FLUSH INSTALL</b> (Refer to the overall dimensions)	 <p>29 3/4"</p>	 <p>43 9/16"</p>

■ Combi Speed Oven\_Flush ★

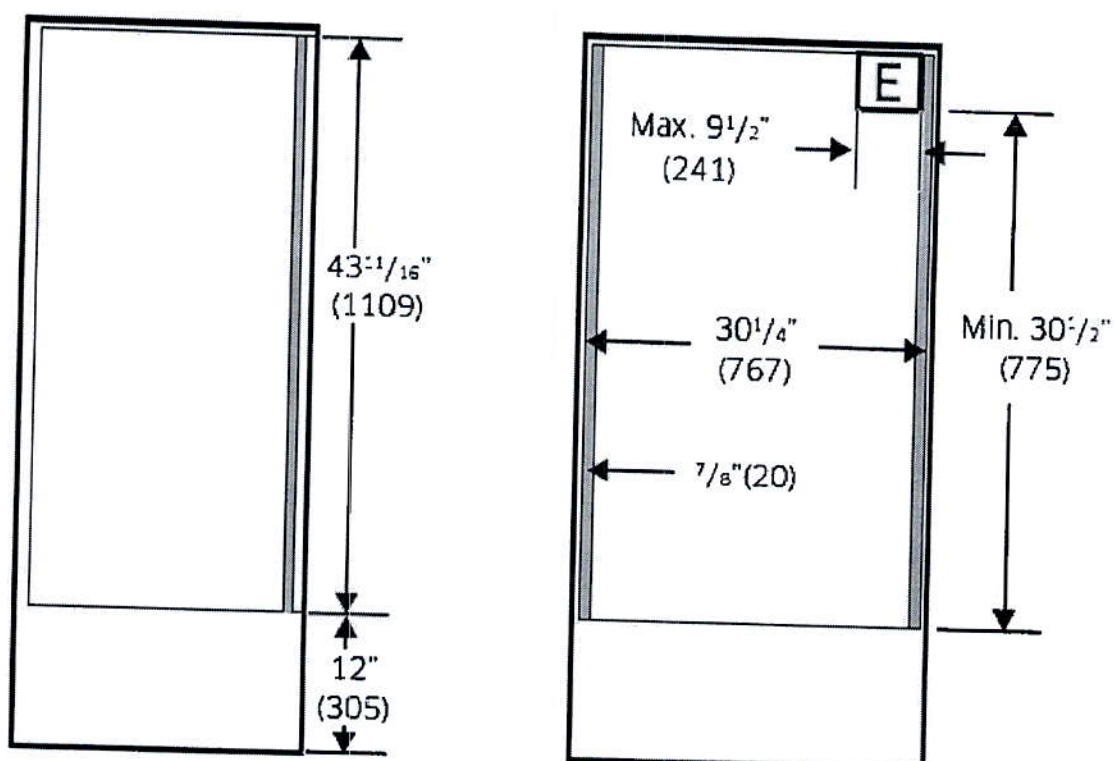

Side view

Front view

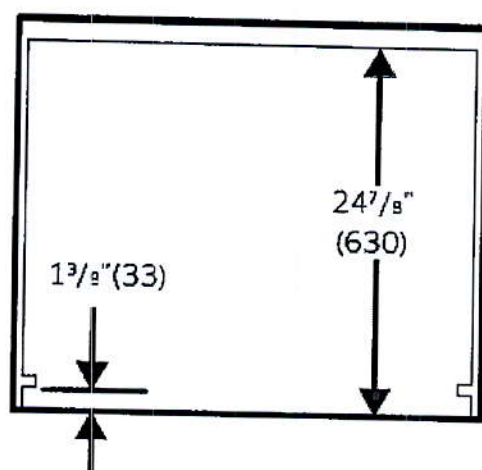


Top view

## ELECTRICAL SPECIFICATIONS

### 3-Wire Cable from Home Power Supply - U.S. Only

**IMPORTANT:** Use the 3-wire cable from home power supply where local codes permit a 3-wire connection.

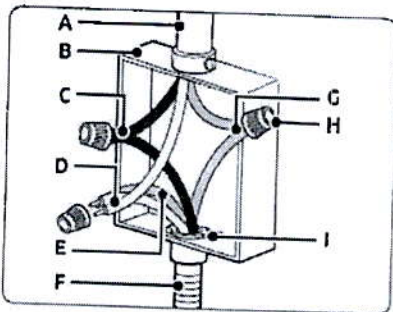


1. Connect the 2 black wires (C) together using a UL listed wire connector.
2. Connect the 2 white wires (D) and the green (or bare) ground wire (of the oven cable) using a UL listed wire connector.
3. Connect the 2 red wires (G) together using a UL listed wire connector.
4. Install junction box cover.

- A. Cable from home power supply
- B. Junction box
- C. Black wires (normally L1)
- D. White wires (normally N-neutral)
- E. green wires (normally G-ground)
- F. 4-wire flexible conduit from oven
- G. Red wires (normally L2)
- H. UL listed wire connectors
- I. UL listed or CSA approved conduit connector

### 4-Wire Cable from Home Power Supply


**IMPORTANT:** Use the 4-wire cable from home power supply in the U.S. where local codes do not allow grounding through neutral, New Branch circuit installations (1996 NEC), mobile homes and recreational vehicles, new construction and in Canada.

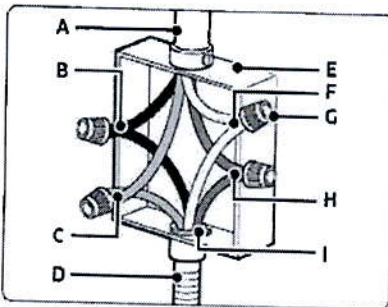

1. Connect the 2 black wires (B) together using a UL listed wire connector.
2. Connect the 2 red wires (C) together using a UL listed wire connector.
3. Untwist white wire from green (or bare) ground wire coming from the oven.
4. Connect the 2 white wires (F) together using a UL listed wire connector.
5. Connect the green (or bare) ground wire (H) from the oven cable to the green (or bare) ground wire (in the junction box) using a UL listed wire connector.
6. Install junction box cover.

- A. Cable from home power supply
- B. Black wires (normally L1)
- C. Red wires (normally L2)
- D. 4-wire flexible conduit from oven
- E. Junction box
- F. White wires (normally N-neutral)
- G. UL listed wire connectors
- H. green wires (normally G-ground)
- I. UL listed or CSA approved conduit connector

# 30-Inch MW Combi Speed Double Oven

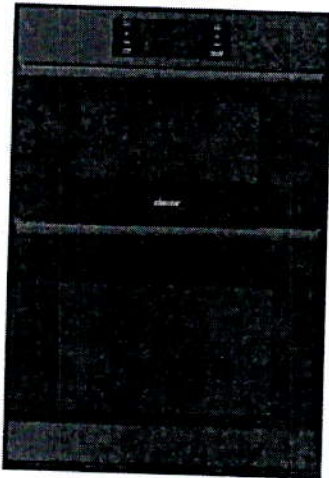

## DOC30M977DS / DOC30M977DM

General (Upper : MWO)	Oven Color		Silver STSS / Graphite STSS
	Installation Type		Flush
	Handle		Fixed Bar Type
	Cooking Mode (12ea)	Manual (5)	Microwave, Broil, Speed Broil Convection Sear, Speed Conv. Sear
		Auto (7)	Sensor Cook, Con.Sear Autocook Healty Fry, Defrost, Healty Choice Auto Cook(69 Programs), Soften/Melt (8 Programs)
	Oven Rack		2 Rack (Low, High)
	Rack Position		-
	Interior Lights		2 LED
	Hidden Hinge Door		●
	Cleaning Method		-
Control	Display		7" Touch LCD
	Electronic Clock		●
	Child Lock		●
Oven Performance (Upper : MWO)	MWO Output		950W (@ 120V)
	Bake element		-
	Broil element		1,650W
	Convection Heater		3,250W
Smart	Wi-Fi (LTE) Module		●
	Bluetooth		-

※ Lower Oven Spec .is same with Single Wall Oven


Total Capacity (cu. ft.)	1.9 + 4.8
Product Width	29 3/4"
Product Height	43 9/16"
Product Depth	23 1/8"
Cutout Width	30 1/4"
Cutout Height	43 11/16"
Cutout Depth	24 7/8"
Watts(W)	8.9 KW
Electrical Supply	240VAC/50A/60Hz
Power Cord	Fixed Connection (No Plug Type)
Net Weight (lbs.)	302.9 lbs. (137.4Kg)

※ Cutout Dimensions are for Flush Cabinet

# DRF427500AP

42-INCH Four-Door FreshZone Plus French Door  
PANEL-READY

**dacor**

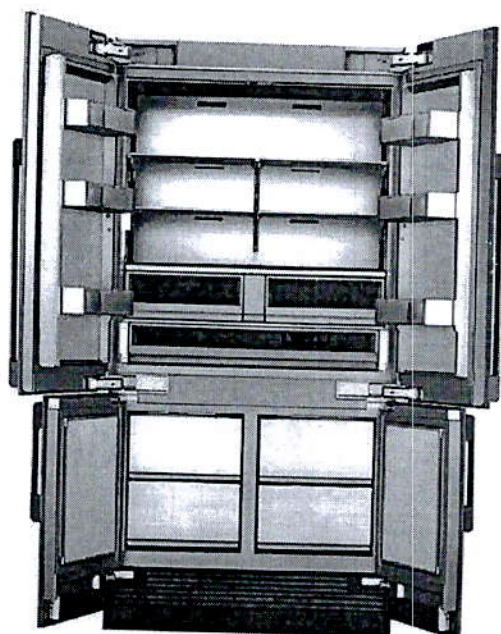

## FEATURES & BENEFITS

- True flush Four-Door with cabinet height freezer doors for seamless cabinet integration
- Triple Cooling - Three Cooling Systems, powered by dual digital inverter compressors keep food fresher longer
- FreshZone™ Plus Compartment - Convert from freezer to refrigerator for flexibility that fits your needs
- SteelCool™ Interior illuminated by 3DLighting™
- Dual Icemaker with Standard and Cocktail Ice™
- FreshZone™ Drawer with three customizable temperatures for Meat/Fish, chilled drinks and dairy
- Works with 41 1/2" classic and 42" full cutout widths

## TEMPERATURE RANGES

Refrigerator	34°F (1°C) to 44°F (7°C)
Refrigerator - Power Cool	34°F (1°C)
FreshZone™ Drawer	37°F (3°C) / 33°F (-1°C)
FreshZone™ Plus Compartment	-8°F (-23°C) to 33°F (1°C)
Freezer	-8°F (-23°C) to -5°F (-15°C)
Freezer - Power Freeze	-8°F (-23°C)

## DIMENSIONS & WEIGHT

Appliance dimensions (H x W x D) (in.)	83 3/8" x 41 1/4" x 23 13/16"
Required Cutout Size (HxWxD) (in.)	Flush installation: 84" x 42" x min. 25" (3/4" panel)  Classic installation: 84" x 41 1/2" x 24" (panel thickness protruding)
Net Weight (lbs)	655

## GENERAL PROPERTIES

Panel Ready	Yes
Push-To-Open™ Door Assist	No
Internal Water Dispenser	Yes
Icemaker	Dual Icemaker for Standard and Cocktail Ice™
iQ RemoteView™ Camera	Yes
Deodorizing Filter	Yes
Lighting	3DLighting™
Interior Material	SteelCool™ Interior
Full Width Shelves - Refrigerator	1 ea
Adjustable Shelves - Refrigerator	4 ea
Shelf Material - Refrigerator	Tempered Glass Shelves w/Metal Trim
Full Extension Drawers at 90° Door Opening Angle	Yes
FreshZone™ Drawer	Yes - Cheese (37°F) / Cold Drinks (33°F) / Meat (29°F)
Crisper Drawers	2 ea
FreshZone™ Plus Compartment	Yes - Converts from freezer -8°F to refrigerator 33°F
Door Bins - Refrigerator	6 ea
Freezer Drawers	4 ea
Door Open Alarm	Yes
iQ Remote Diagnostics™ (Wi-Fi)	Yes
Special Modes	Sabbath Mode

## CAPACITY

Total Unit Gross Capacity (cu.ft.) - AHAM	23.5 cu. ft.
Refrigerator Gross Capacity (cu.ft.)	16.8 cu. ft.
Freezer Gross Capacity (cu.ft.)	6.7 cu.ft.

## PERFORMANCE

Triple Cooling (3 evaporators, 2 compressors)	Yes
Power Cool - Refrigerator	Yes
Power Freeze - Freezer	Yes
Defrost Process - Freezer	Frost-Free

## EFFICIENCY

ENERGY STAR® Qualified	Yes
Annual Energy Consumption	629 kWY/year

## TECHNICAL DETAILS

Current (A)	6
Volts (V)	115
Frequency (Hz)	60
Power Cord Length (in.)	78 3/4"
Plug Type	120 V, 3 Prong


# DRF427500AP

42-INCH Four-Door FreshZone Plus French Door  
PANEL-READY

**dacor**


## APPLIANCE DIMENSIONS

A (Total Width incl. panels)	41 3/4" (1060 mm)
B (Total Depth with 3/4" Panel)	24 11/16" (627 mm)
B1 Depth without panel	23 13/16" (605mm)
C (Height)	83 3/8" (2118mm)
D	41 1/4" (1048 mm)
E	48 1/2" (1232 mm)
F	22 7/16" (570 mm)
G	47 5/8" (1210 mm)

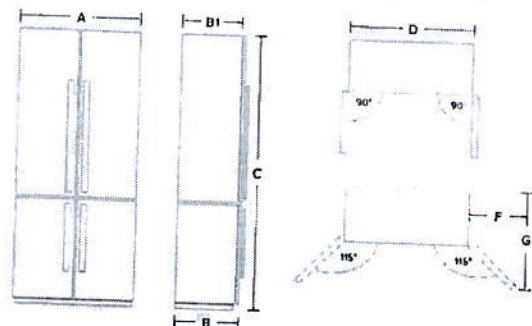

## CUSTOM PANEL SPECIFICATIONS

W1	20 25/32" (528 mm)
H1	49 3/16" (1249 mm)
H2	30 9/16" (776 mm)
G1	5/32" (4 mm)
G2	5/32" (4 mm)
Standard Panel Thickness	3/4" (19 mm)




Custom Panel Maximum Weight      Fridge : 55 lb (25 kg),  
Freezer : 22 lb (10 kg)


Do not exceed the maximum weight of the custom panel. Before installing the panel, check the strength of the panel's material and the load of attachments to the panel.

## INSTALLATION CUTOUT DIMENSIONS


	Classic Cutout (41 1/2") with Overlay Style	Full Cutout (42") for Flush installation
A (Width)	41.5" (1054 mm)	42" (1067 mm)
B (Depth)	24" (610 mm)	min. 25" (635 mm)
C (Height)	84" (2134 mm)	84" (2134 mm)
D	22" (559 mm)	22" (559 mm)
E	80" (2032 mm)	80" (2032 mm)

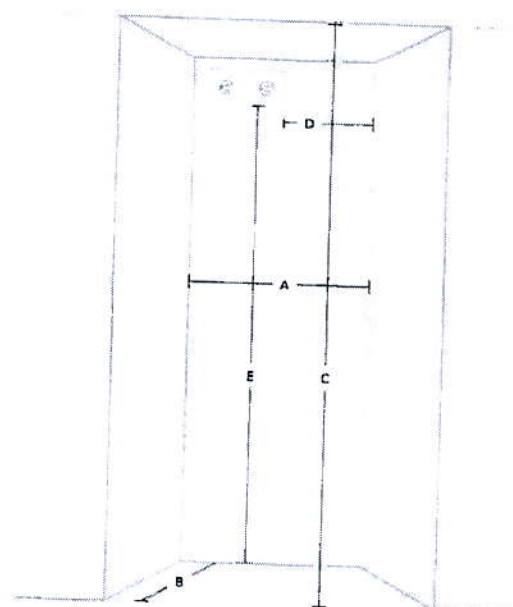

Overlay (Panel Protrudes)



Frameless (Panel is Flush)



\* min 23" depth for paneling on inside the cabinet  
† Refer to the installation manual

## ACCESSORIES

42" Four-Door Pro Silver Stainless Steel Kit
42" Four-Door Modernist Silver Stainless Steel Kit
42" Four-Door Modernist Graphite Stainless Steel Kit
Water Filter
Deodorizing Filter

RAT42AHAASR
RAT42AMAASR
RAT42AMAAMS
RAC00WFAAAA
RAC00DFAAAA

## WARRANTY

Limited, Entire Appliance,  
Parts and Labor on Any Part of the Refrigerator

2 Year

Limited Warranty for Sealed Refrigeration System;  
Parts and Labor


3<sup>rd</sup> to 6<sup>th</sup> Year

Limited Warranty for Sealed Refrigeration System; Parts Only

7<sup>th</sup> to 12<sup>th</sup> Year

**DDW24M999U**  
**24-INCH DISHWASHER**  
 MODERNIST COLLECTION

**dacor**

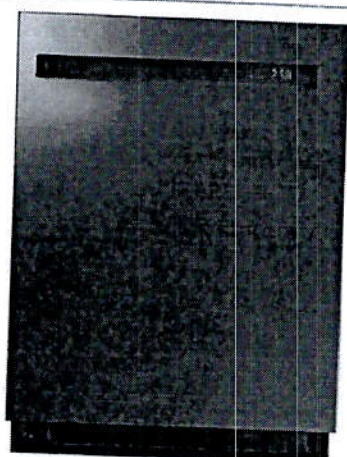

**AVAILABLE MODELS**

- DDW24M999US - 24" Dishwasher, Stainless Steel
- DDW24M999UM - 24" Dishwasher, Graphite Stainless Steel

**FEATURES & BENEFITS**

- WaterWall™ technology provides corner to corner cleaning power.
- Zone Booster™ enables heavy duty cleaning in specified areas for heavily soiled pots and pans.
- AutoRelease™ improves drying performance up to 35% by releasing steam.
- Large capacity - holds up to 14 place settings.
- 7 individual programs plus options enables optimal cleaning methods.
- Cutlery rack maximizes space for dishes.

**TECHNICAL DETAILS**

Capacity (Place Settings)	14
Energy Star Certified	Yes
Annual Consumption (kWh/yr)	239
Water Consumption (gallons/cycle)	3.2
Noise Level (dBA)	42
Cycle Time (min) - Normal Cycle	114-150
Heater Watts	1100
Circuit Breaker (A)	15
Volts (V)	120
Frequency (Hz)	60
Energy Source	Electric
<b>DIMENSIONS</b>	
Appliance Dimensions (H x W x D) (in.)	32 1/4" - 35 1/2" x 23 1/2" x 22 3/4"
Cutout Dimensions (H x W x D) (in.)	32 1/3" - 34 3/4" x 23 3/4" x 23 3/4"
<b>WARRANTY</b>	
Limited, Parts and Labor	1 Year

**DESIGN**

Wide Pocket Handle	Yes
Display Light Color	White

**FEATURES**

WaterWall™	Yes
Capacity - 14 Place Settings	Yes
Auto Door Open - AutoRelease	Yes
Time Remaining Indicator	Yes

**CONTROLS**

Hidden Touch	Yes
--------------	-----

**PROGRAMS**

Total Programs	7
Auto	Yes
Normal	Yes
Heavy	Yes
Delicate	Yes
Express 60	Yes
Rinse Only	Yes
Self Clean	Yes

**OPTIONS**

Total Options	8
Half Load	Yes
Zone Booster	Yes
Speed Booster	Yes
Hi-Temp Wash	Yes
Sanitize	Yes
Delay Start	Yes (1-24 Hrs)
Control Lock	Yes
Smart Control (Wi-Fi)	Yes

**UPPER RACK**

Basket Handle	Yes
Foldable Cup Shelves	Yes
Adjustable Height	Yes
Adjustable Tines	Yes

**LOWER RACK**

Basket Handle	Yes
Fold Down Tines	Yes
Maximum Dish Size	12"

**CUTLERY BASKET**

Cutlery Basket	Yes
Cutlery Tray	Yes


**GENERAL FEATURES**

Tub Material	Stainless Steel
Heater Position	Hidden
Leakage Sensor	Yes
Cancel and Drain Button	Yes


DDW24M999U  
24-INCH DISHWASHER  
MODERNIST COLLECTION

dacor

APPLIANCE DIMENSIONS




Front view

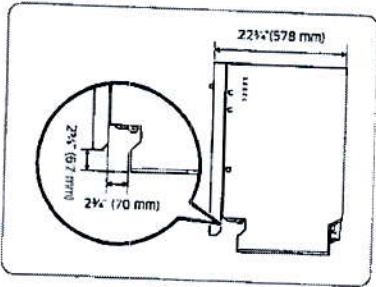


Side view

CUTOUT DIMENSIONS

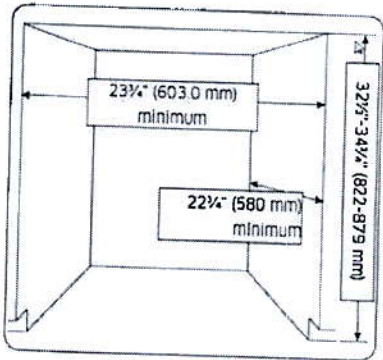



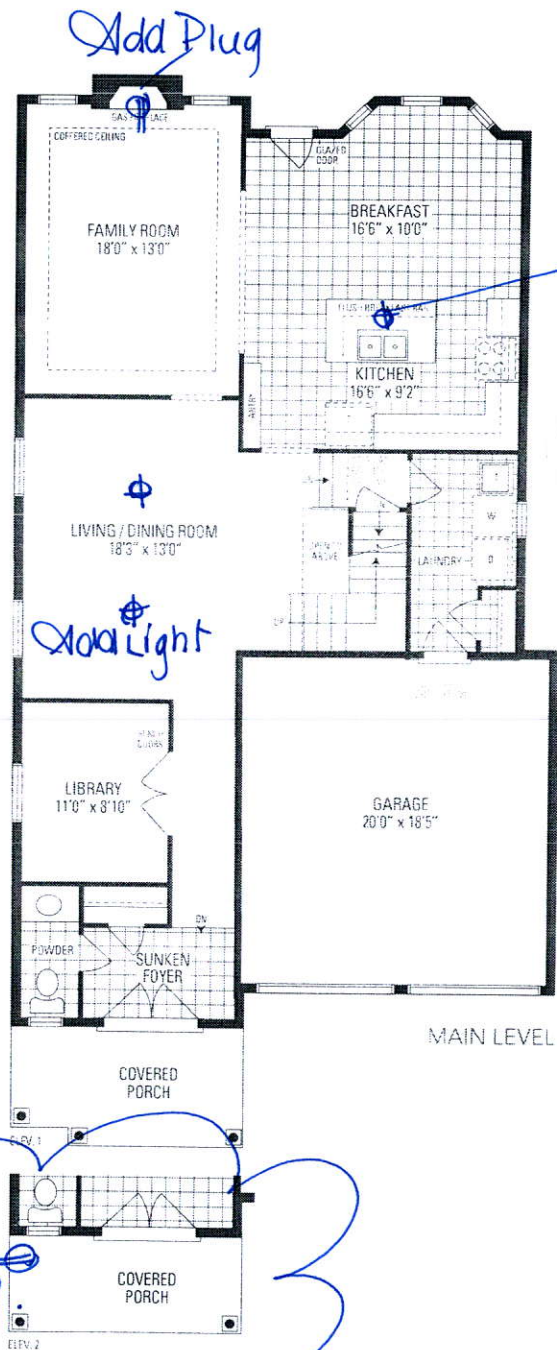


Add Light

Add Light

Festive Plug


KS

P.K.

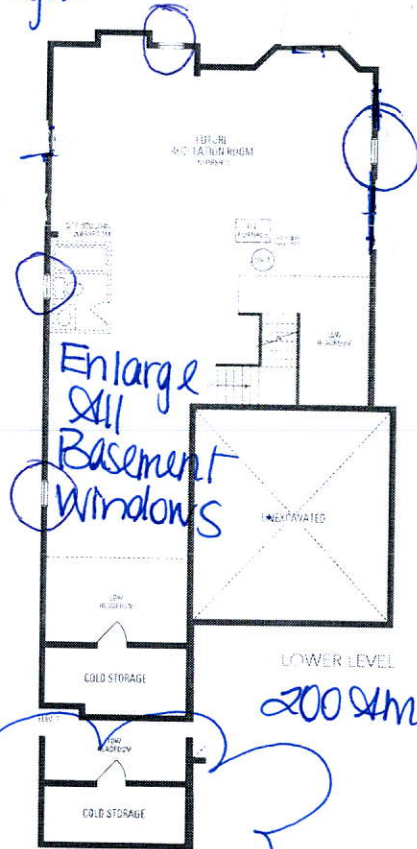

Enlarge All Basement Windows

200 sqm P.

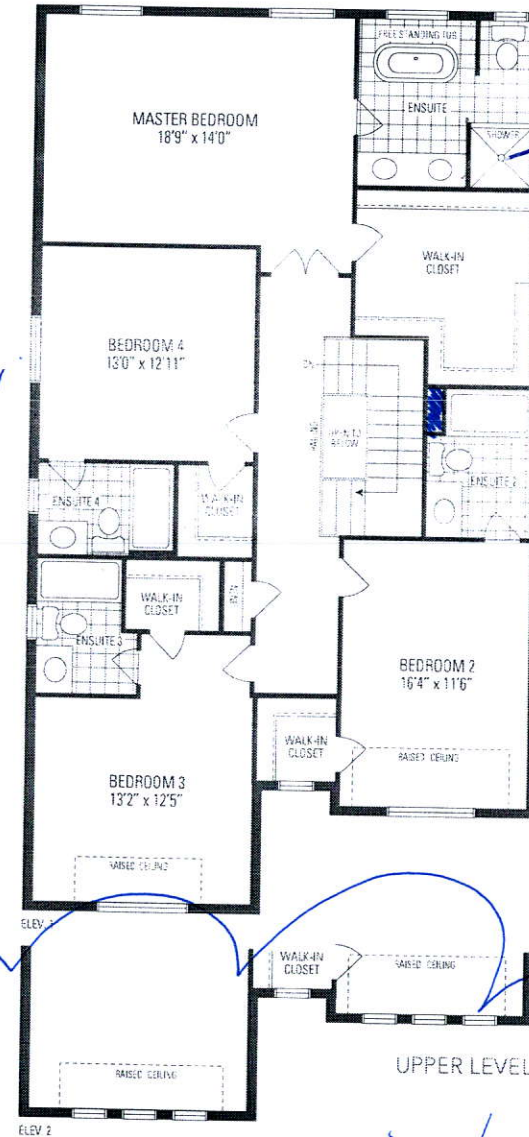

Toe Tester

# MILLWOOD 5

38' LOT • 3,126 SQ.FT. • 12 SQ.FT. OF OPEN AREA

Orientation of home may be reversed and purchaser agrees to accept the same. Steps and porches may vary at any exterior entrance ways due to grading variance. Actual usable floor space may vary from the stated floor areas. All renderings are artist's concept. Dimensions, specifications and architectural detailing subject to modifications. Roofline and adjoining model types may vary due to siting. E. & O. E. June 2018