




PL: 111206(TYP.), 114170E

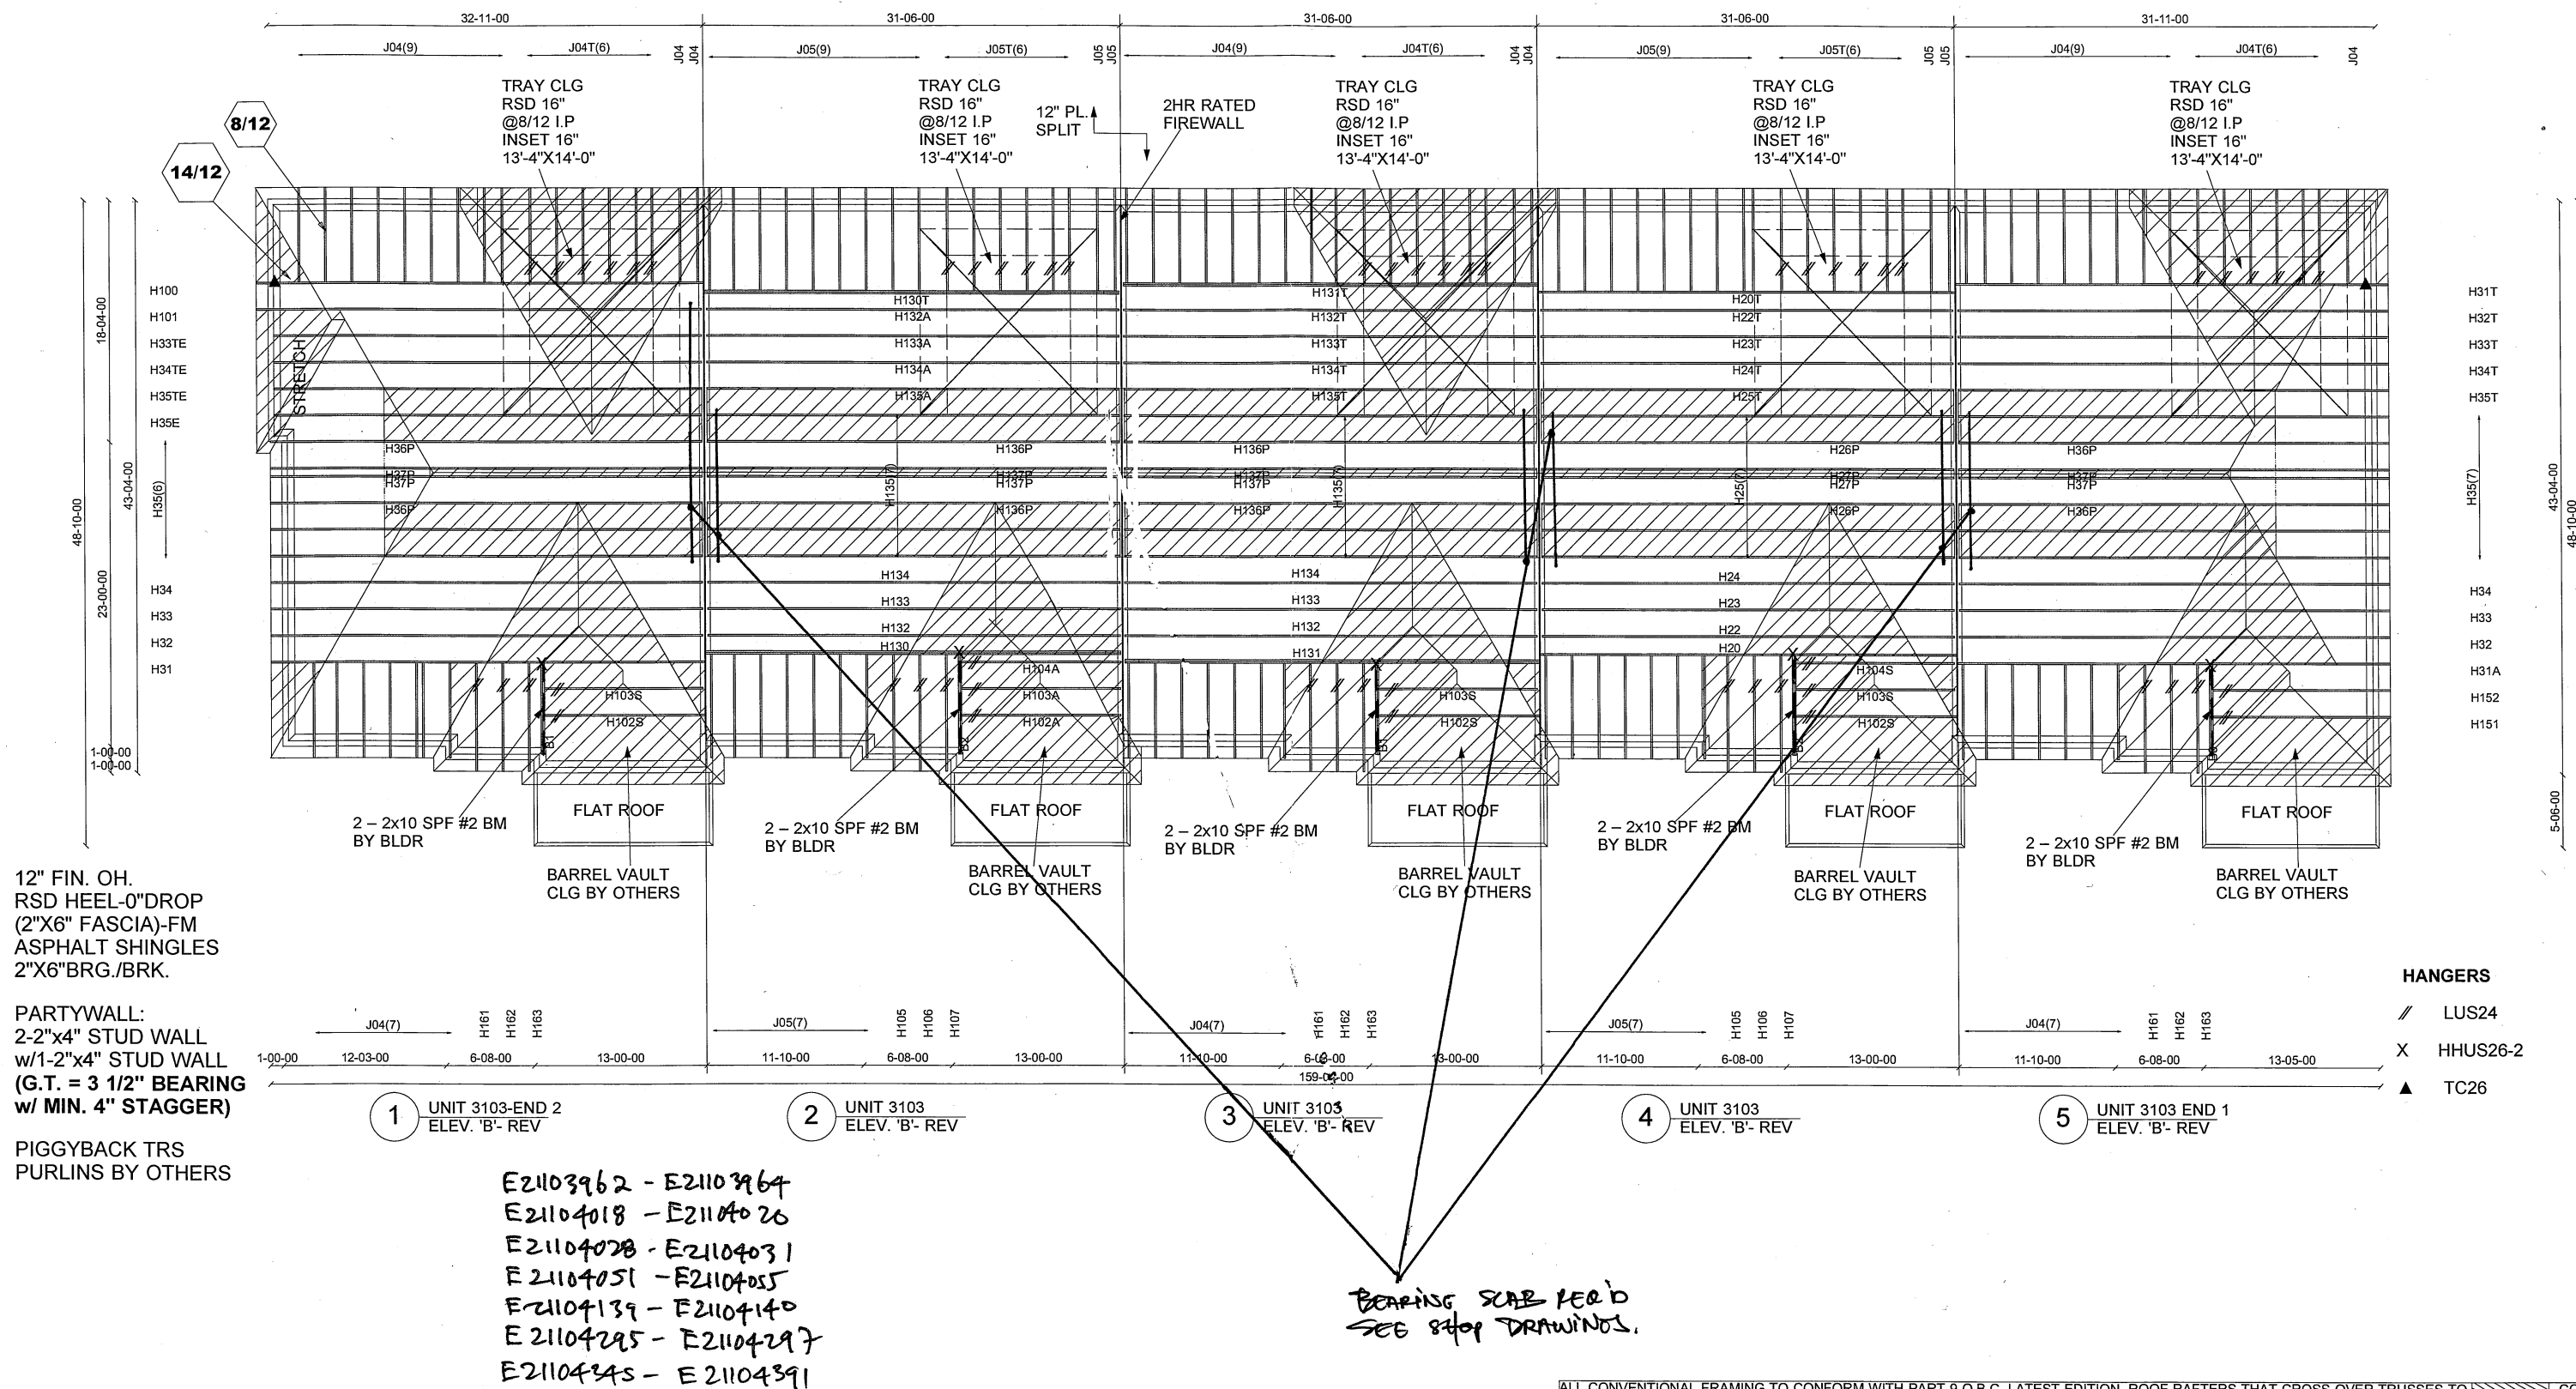

Job Track: **45147**
Layout ID: **336323**
Plan Log: **113123**

Builder / Location:
GOLD PARK HOMES / VAUGHAN

Project: **PINE VALLEY**

Date: **9/28/2021**

Designer: **JBURROWS/C**

Model / Elevation:

BLOCK 3 / UNIT 1-5

THESE DRAWINGS CONSTITUTE THE PROPERTY OF ALPA ROOF TRUSSES INC., SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY ALPA ROOF TRUSSES INC AND WILL BE RETRACTED BY ALPA ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE.

Mitek V. 8.2.0

CONVE
FRAMIN
OTHERS

EWP DESIGN INC.

(905) 832-2250

FAX (905) 832-0286

RESPONSIBILITIES AND SPECIFICATIONS

RESPONSIBILITIES


1. EWP DESIGN INC. is responsible for the design of trusses as individual components.
2. It is the responsibility of others to ascertain that the design loads utilized on each drawing meet or exceed the actual dead load imposed by the structure, the live load imposed by the intended use and the snow load imposed by local building code or authorities with jurisdictions.
3. All dimensions are to be verified by the owner, contractor, architect or other authorities with jurisdictions before truss fabrication.
4. EWP DESIGN INC. bears no responsibility for the erection of trusses. Persons erecting trusses are cautioned to seek professional advice regarding the temporary and permanent bracing for the system. Bracing shown on EWP DESIGN INC. drawing is specified for the truss as a component only and forms an integral part of the truss design.
5. It is the truss manufacturer's responsibility to ensure that trusses are manufactured in conformance with specifications of EWP DESIGN INC. as outlined below.

SPECIFICATIONS

1. Trusses designed by EWP DESIGN INC. conform to the relevant section of the Ontario Building Code of Canada (Part 9 or Part 4) or to the Canadian code for farm buildings, whichever applies to the building type, as indicated on the EWP DESIGN INC. drawings, and conform to the design procedures established by the Truss Plate Institute of Canada. Unit stresses used for truss designs are as per the edition of CSA-O86 shown on EWP DESIGN INC. drawings.
2. Lumber is to be the size, species and grade as specified on EWP DESIGN INC. drawings.
3. Moisture content of lumber shall not exceed 19% in service unless specified otherwise.
4. Metal connector plates shall be applied to both faces of truss at each joint and shall be positioned as specified.
5. Top chords of trusses are assumed to be continuously braced laterally by roof sheathing or by purlins at intervals not exceeding 12.5 times the thickness of top chord member.
6. Bottom chords shall be laterally braced at intervals not exceeding 3M (10') o.c., where rigid ceiling is not applied directly to the underside of chords.

THESE DRAWINGS CONSTITUTE THE PROPERTY OF EWP DESIGN INC., SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY THE ALPA LUMBER GROUP, AND WILL BE RETRACTED BY EWP DESIGN INC. IF UTILIZED FOR ANY OTHER PURPOSE.

JSI GRIP= 0.88 (G) (INPUT = 0.90)
JSI METAL= 0.36 (G) (INPUT = 1.00)

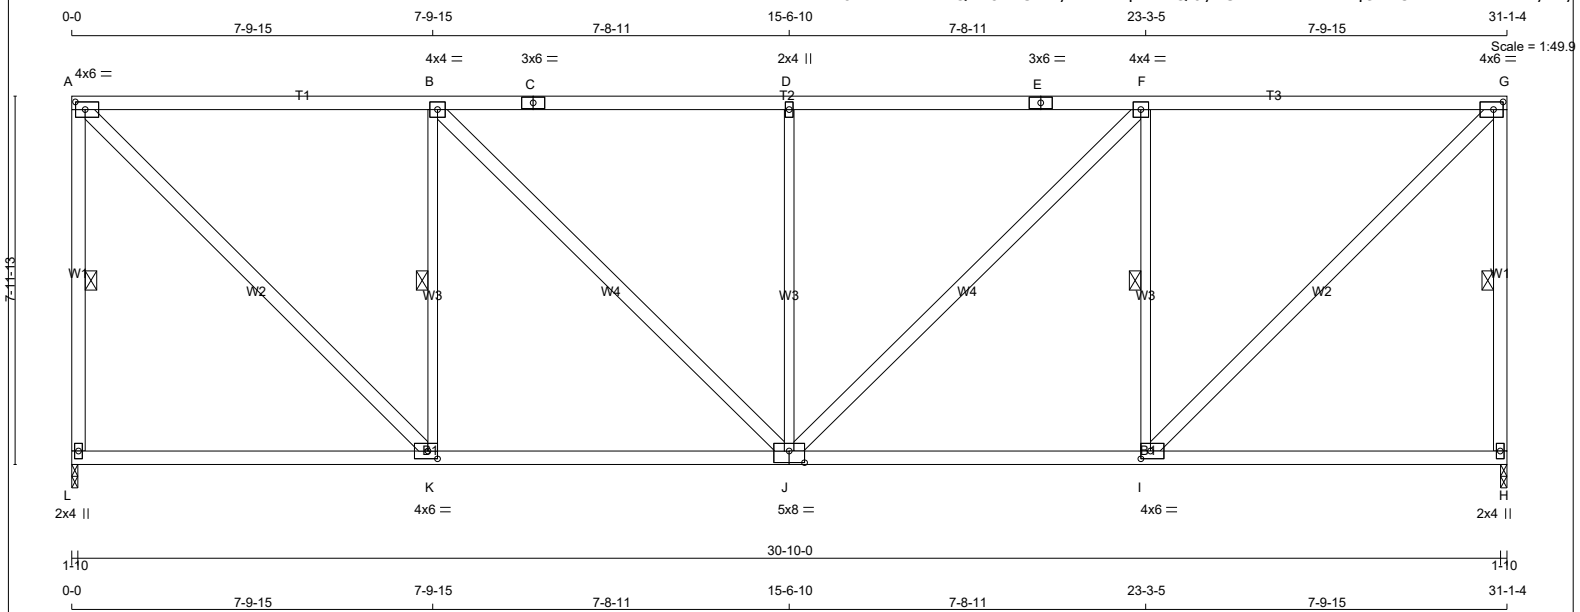

TOTAL WEIGHT = 154 lb

LUMBER

N. L. G. A. RULES

CHORDS		SIZE	LUMBER		DESCR
L - A	2x4	DRY	No.2		SPF
A - C	2x4	DRY	No.2		SPF
C - E	2x4	DRY	No.2		SPF
E - G	2x4	DRY	No.2		SPF
H - G	2x4	DRY	No.2		SPF
L - J	2x4	DRY	No.2		SPF
J - H	2x4	DRY	No.2		SPF
ALL WEBS EXCEPT	2x4	DRY	No.2		SPF
K - B	2x3	DRY	No.2		SPF
J - D	2x3	DRY	No.2		SPF
I - F	2x3	DRY	No.2		SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMWV-t	MT20	4.0	6.0	2.00	2.50
B	TMWV-t	MT20	4.0	4.0		
C	TS-t	MT20	3.0	6.0		
D	TMW+w	MT20	2.0	4.0		
E	TS-t	MT20	3.0	6.0		
F	TMWV-t	MT20	4.0	4.0		
G	TMWV-t	MT20	4.0	6.0	2.00	2.50
H	BMV1+p	MT20	2.0	4.0		
I	BMWV-t	MT20	4.0	6.0	2.00	2.50
J	BSWVVVW-t	MT20	5.0	8.0	3.00	4.00
K	BMWV-t	MT20	4.0	6.0	2.00	2.50
L	BMV1+p	MT20	2.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED		MAXIMUM FACTORED			INPUT	REQRD
	GROSS REACTION		GROSS REACTION			BRG	BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
L	1500	0	1500	0	0	1-10	1-10
H	1500	0	1500	0	0	1-10	1-10

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
L	1070	653 / 0	0 / 0	0 / 0	0 / 0	417 / 0	0 / 0
H	1070	653 / 0	0 / 0	0 / 0	0 / 0	417 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) L, H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.99 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

1 LATERAL BRACE(S) AT 1/ 2 LENGTH OF A-L, G-H, B-K, F-I.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

C H O R D S					W E B S				
MAX. FACTORED		FACTORED			MAX. FACTORED				
MEMB.	FORCE	VERT. LOAD	LC1	MAX	MAX.	MEMB.	FORCE	MAX	
	(LBS)	(PLF)	CSI (LC)	UNBRAC			(LBS)	CSI (LC)	
FR-TO		FROM	TO	LENGTH	FR-TO				
L-A	-1445 / 0	0.0	0.0	0.41 (1)	5.44	A-K	0 / 1718	0.28 (1)	
A-B	-1225 / 0	-78.0	-78.0	0.84 (1)	4.46	K-B	-1026 / 0	0.41 (1)	
B-C	-1558 / 0	-78.0	-78.0	0.90 (1)	3.99	B-J	0 / 470	0.08 (1)	
C-D	-1558 / 0	-78.0	-78.0	0.90 (1)	3.99	J-D	-556 / 0	0.67 (1)	
D-E	-1558 / 0	-78.0	-78.0	0.90 (1)	3.99	J-F	0 / 470	0.08 (1)	
E-F	-1558 / 0	-78.0	-78.0	0.90 (1)	3.99	I-F	-1026 / 0	0.41 (1)	
F-G	-1225 / 0	-78.0	-78.0	0.84 (1)	4.46	I-G	0 / 1718	0.28 (1)	
H-G	-1445 / 0	0.0	0.0	0.41 (1)	5.44				
L-K	0 / 0	-18.5	-18.5	0.32 (4)	10.00				
K-J	0 / 1225	-18.5	-18.5	0.44 (4)	10.00				
J-I	0 / 1225	-18.5	-18.5	0.44 (4)	10.00				
I-H	0 / 0	-18.5	-18.5	0.32 (4)	10.00				

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL =	21.0	PSF
		DL =	6.0	PSF
BOT	CH.	LL =	0.0	PSF
		DL =	7.4	PSF

TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE
OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.04")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.07")
ALLOWABLE DEFL.(TL)= L/360 (1.04")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.20")

CSI: TC=0.90/1.00 (B-D:1), BC=0.44/1.00 (J-K:4), WB=0.67/1.00 (D-J:1), SSI=0.29/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES					
PLATE	GRIP(DRY)		SHEAR		SECTION
	(PSI)		(PLI)		(PLI)
	MAX	MIN	MAX	MIN	MAX MIN
MT20	650	371	1747	788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.87 (I) (INPUT = 0.90)
JSI METAL= 0.34 (A) (INPUT = 1.00)

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Wed Oct 13 10:30:09 2021 Page 1



TOTAL WEIGHT = 165 lb

DRY: SEASONED LUMBER.

J	T	TYPE	PLATES	W	LEN	Y	X
A		TMVW-t	MT20	4.0	6.0	2.00	2.50
B		TMVW-t	MT20	4.0	4.0		
C		TS-t	MT20	3.0	6.0		
D		TMVW+w	MT20	2.0	4.0		
E		TS-t	MT20	3.0	6.0		
F		TMVW-t	MT20	4.0	4.0		
G		TMVW-t	MT20	4.0	6.0	2.00	2.50
H		BMV1+p	MT20	2.0	4.0		
I		BMVW-t	MT20	4.0	4.0	1.50	1.50
J		BSVWVW-t	MT20	5.0	8.0	3.00	4.00
K		BMVW-t	MT20	4.0	4.0	1.50	1.50
L		BMV1+p	MT20	2.0	4.0		

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) L, H

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.30 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF A-L, G-H, B-K, D-J, F-I.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1 CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)
FR-TO		FROM TO			FR-TO		
L-A	-1445 / 0	0.0	0.0 0.59 (1)	5.44	A-K	0 / 1594	0.26 (1)
A-B	-1044 / 0	-78.0	-78.0 0.81 (1)	4.76	K-B	-1026 / 0	0.59 (1)
B-C	-1328 / 0	-78.0	-78.0 0.86 (1)	4.30	B-J	0 / 437	0.07 (1)
C-D	-1328 / 0	-78.0	-78.0 0.86 (1)	4.30	J-D	-555 / 0	0.32 (1)
D-E	-1328 / 0	-78.0	-78.0 0.86 (1)	4.30	J-F	0 / 437	0.07 (1)
E-F	-1328 / 0	-78.0	-78.0 0.86 (1)	4.30	I-F	-1026 / 0	0.59 (1)
F-G	-1044 / 0	-78.0	-78.0 0.81 (1)	4.76	I-G	0 / 1594	0.26 (1)
H-G	-1445 / 0	0.0	0.0 0.59 (1)	5.44			
L-K	0 / 0	-18.5	-18.5 0.32 (4)	10.00			
K-J	0 / 1044	-18.5	-18.5 0.42 (4)	10.00			
J-I	0 / 1044	-18.5	-18.5 0.42 (4)	10.00			
I-H	0 / 0	-18.5	-18.5 0.32 (4)	10.00			

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



SPECIFIED LOADS:

TOP	CH.	LL	=	21.0	PSF
		DL	=	6.0	PSF
BOT	CH.	LL	=	0.0	PSF
		DL	=	7.4	PSF
TOTAL LOAD				=	34.4 PSF

LOADING IN FLAT SECTION BASED ON A SLOPE
OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.04")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.07")
ALLOWABLE DEFL.(TL)= L/360 (1.04")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.18")

CSI: TC=0.86/1.00 (B-D:1), BC=0.42/1.00 (J-K:4),
WB=0.59/1.00 (F-I:1), SSI=0.29/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .


NAIL VALUES						
PLATE	GRIP(DRY)		SHEAR		SECTION	
	(PSI)		(PLI)		(PLI)	
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.88 (G) (INPUT = 0.90)
JSI METAL= 0.36 (K) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336321	H132		1	TRUSS DESC. JT 45147	E21104018

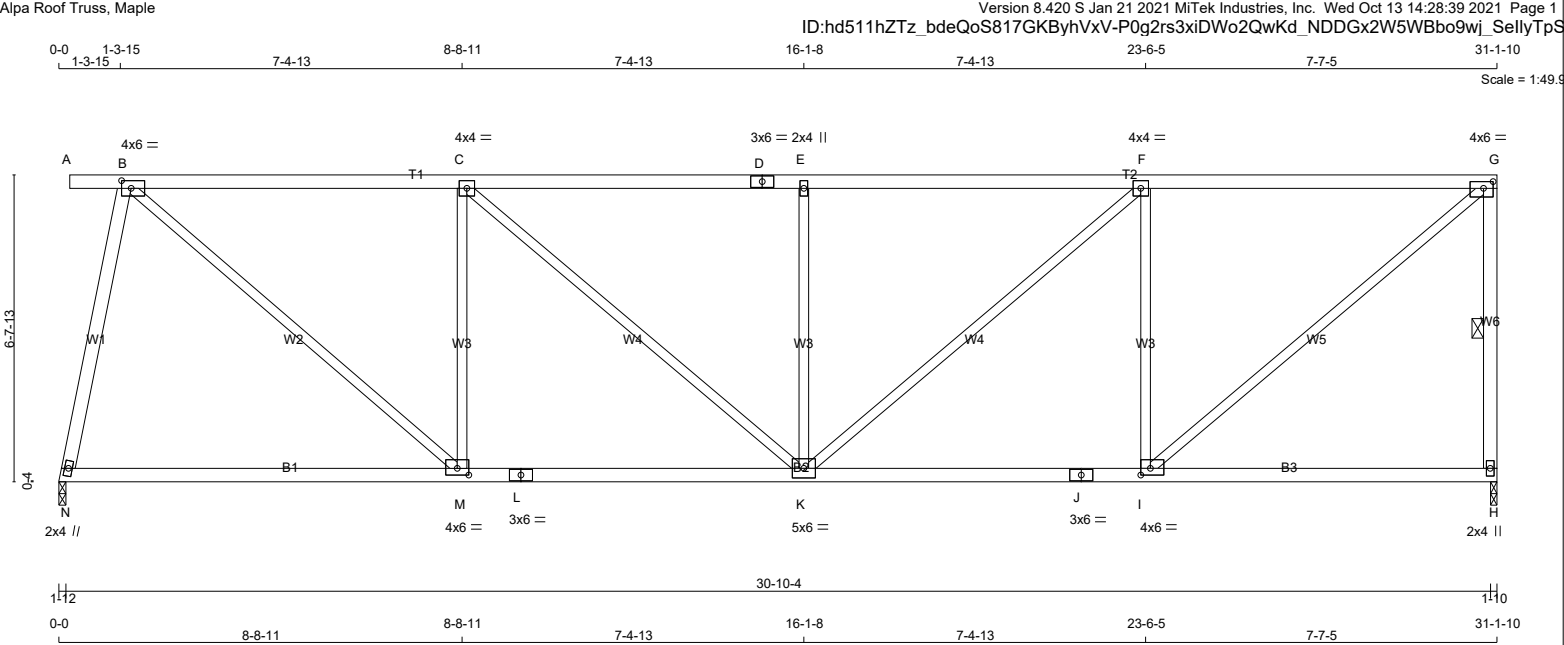

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. A - D 2x4 DRY No.2 SPF D - G 2x4 DRY No.2 SPF H - G 2x4 DRY No.2 SPF N - L 2x4 DRY No.2 SPF L - J 2x4 DRY No.2 SPF J - H 2x4 DRY No.2 SPF ALL WEBS 2x4 DRY No.2 SPF EXCEPT B - M 2x3 DRY No.2 SPF M - C 2x3 DRY No.2 SPF C - K 2x3 DRY No.2 SPF K - E 2x3 DRY No.2 SPF K - F 2x3 DRY No.2 SPF I - F 2x3 DRY No.2 SPF I - G 2x3 DRY No.2 SPF DRY: SEASONED LUMBER.				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS FACTORED GROSS REACTION JT VERT HORZ N 1488 0 H 1494 0 MAXIMUM FACTORED GROSS REACTION DOWN HORZ UPLIFT N 1488 0 0 H 1494 0 0 INPUT BRG IN-SX N 1-12 1-10 H 1-10 1-10 REQRD BRG IN-SX N 1-12 1-10 H 1-10 1-10 UNFACTORED REACTIONS 1ST LCASE MAX./MIN. COMPONENT REACTIONS JT COMBINED SNOW LIVE PERM.LIVE WIND DEAD SOIL N 1061 647 / 0 0 / 0 0 / 0 0 / 0 414 / 0 0 / 0 H 1065 650 / 0 0 / 0 0 / 0 0 / 0 415 / 0 0 / 0 BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N, H BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.80 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. 1 LATERAL BRACE(S) AT 1 / 2 LENGTH OF G-H. END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW LOADING TOTAL LOAD CASES: (4) CHORDS MEMB. MAX. FACTORED FORCE (LBS) FACTORED VERT. LOAD (PLF) LC1 MAX. CSI (LC) MAX. UNBRACED LENGTH FR-TO FROM TO A-B 0 / 0 -78.0 -78.0 0.08 (1) 10.00 B-C -1544 / 0 -78.0 -78.0 0.77 (1) 4.26 C-D -1872 / 0 -78.0 -78.0 0.84 (1) 3.89 D-E -1872 / 0 -78.0 -78.0 0.84 (1) 3.89 E-F -1872 / 0 -78.0 -78.0 0.88 (1) 3.80 F-G -1438 / 0 -78.0 -78.0 0.81 (1) 4.30 H-G -1438 / 0 0.0 0.0 0.29 (1) 5.45 WEBS MEMB. MAX. FACTORED FORCE (LBS) MAX. CSI (LC) FR-TO N-B -1451 / 0 0.81 (1) B-M 0 / 1681 0.38 (1) M-C -934 / 0 0.68 (1) C-K 0 / 432 0.10 (1) K-E -534 / 0 0.39 (1) K-F 0 / 572 0.13 (1) I-F -1042 / 0 0.76 (1) I-G 0 / 1874 0.42 (1) N-M 0 / 278 -18.5 -18.5 0.33 (4) 10.00 M-L 0 / 1544 -18.5 -18.5 0.46 (4) 10.00 L-K 0 / 1544 -18.5 -18.5 0.46 (4) 10.00 K-J 0 / 1438 -18.5 -18.5 0.40 (4) 10.00 J-I 0 / 1438 -18.5 -18.5 0.40 (4) 10.00 I-H 0 / 0 -18.5 -18.5 0.26 (4) 10.00				DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF CBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD ALLOWABLE DEFL.(LL)= L/360 (1.03") CALCULATED VERT. DEFL.(LL) = L/ 999 (0.09") ALLOWABLE DEFL.(TL)= L/360 (1.03") CALCULATED VERT. DEFL.(TL) = L/ 999 (0.20") CSI: TC=0.88/1.00 (E-F:1) , BC=0.46/1.00 (K-M:4) , WB=0.81/1.00 (B-N:1) , SSI=0.28/1.00 (F-G:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.90 (B) (INPUT = 0.90) JSI METAL= 0.55 (L) (INPUT = 1.00)			
---	--	--	--	--	--	--	--	---	--	--	--

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




The diagram illustrates a roof truss system with the following components and specifications:

- Top Chords:**
 - Span 1: 4x6 = (1-7-2)
 - Span 2: 4x4 = (8-11-2)
 - Span 3: 3x6 = 2x4 || (16-3-2)
 - Span 4: 4x4 = (23-7-2)
 - Span 5: 4x6 = (31-1-10)
- Bottom Chords:**
 - Span 1: 2x4 || (0-0)
 - Span 2: 4x4 = (8-11-2)
 - Span 3: 5x6 = (16-3-2)
 - Span 4: 4x4 = (23-7-2)
 - Span 5: 2x4 || (31-1-10)
- Vertical Members:**
 - W1, W2, W3, W4, W5, W6: Vertical posts.
 - W7: Vertical post at the far right.
- Diagonal Members:**
 - V1, V2, V3, V4, V5: Diagonal bracing members.
- Horizontal Members:**
 - B1, B2, B3: Horizontal bracing members at the bottom.
 - T1, T2: Horizontal bracing members at the top.
- Connections:**
 - Nodes are labeled with letters A through S.
 - Connections are marked with symbols like 'x' (cross), '||' (parallel), and '|||' (triple parallel).

TOTAL WEIGHT = 153 lb

JSI GRIP= 0.89 (I) (INPUT = 0.90)
JSI METAL= 0.52 (L) (INPUT = 1.00)

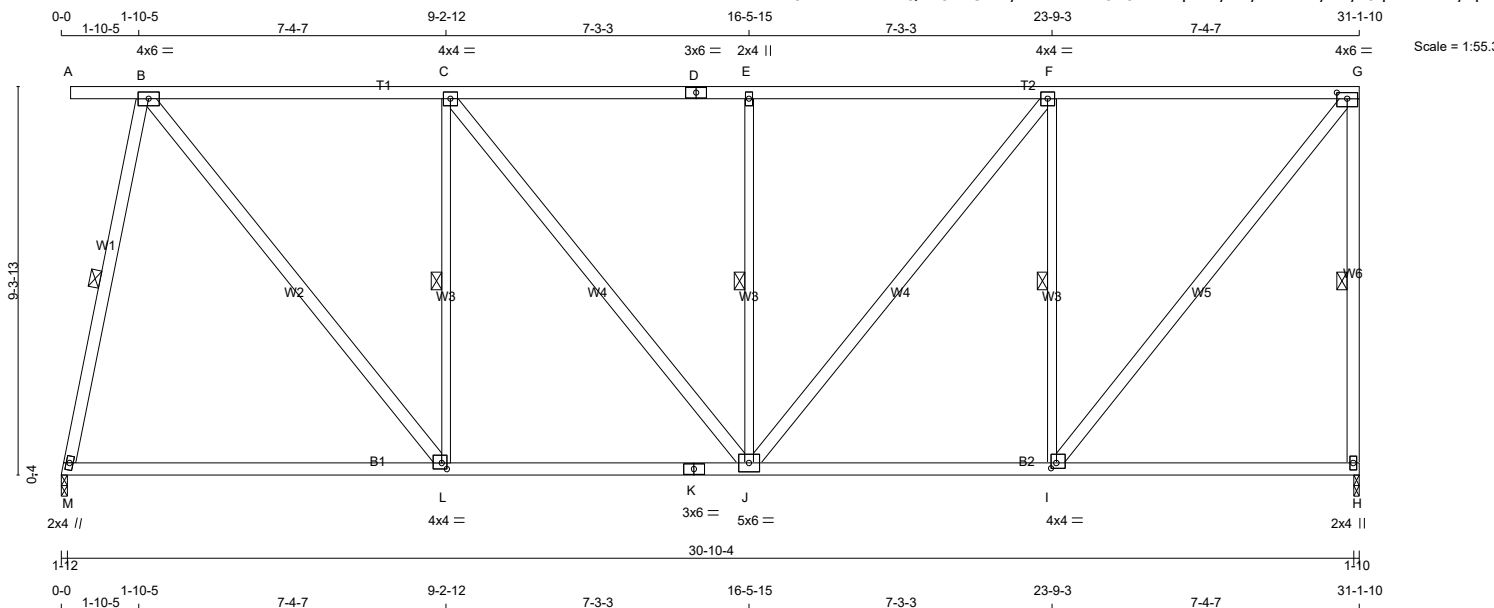

TOTAL WEIGHT = 163 lb

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE		LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF
D - G	2x4	DRY	No.2	SPF
H - G	2x4	DRY	No.2	SPF
M - K	2x4	DRY	No.2	SPF
K - H	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x4	DRY	No.2	SPF
L - C	2x3	DRY	No.2	SPF
J - E	2x3	DRY	No.2	SPF
I - F	2x3	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
B	TMWV-t	MT20	4.0	6.0		
C	TMWV-t	MT20	4.0	4.0		
D	TS-t	MT20	3.0	6.0		
E	TMW+w	MT20	2.0	4.0		
F	TMWV-t	MT20	4.0	4.0		
G	TMWV-t	MT20	4.0	6.0	1.75	3.00
H	BMV1+p	MT20	2.0	4.0		
I	BMWV-t	MT20	4.0	4.0	1.50	1.50
J	BMWVW-t	MT20	5.0	6.0		
K	BS-t	MT20	3.0	6.0		
L	BMWV-t	MT20	4.0	4.0	1.75	1.50
M	BMV1+w	MT20	2.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

	FACTORED		MAXIMUM FACTORED			INPUT	REQRD
	GROSS REACTION		GROSS REACTION			BRG	BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
M	1486	0	1486	0	0	1-12	1-10
H	1496	0	1496	0	0	1-10	1-10

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
M	1060	646 / 0	0 / 0	0 / 0	0 / 0	414 / 0	0 / 0
H	1066	651 / 0	0 / 0	0 / 0	0 / 0	415 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) M, H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.55 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF B-M, G-H, C-L, E-J, F-I.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

C H O R D S				W E B S			
MAX. FACTORED		FACTORED		MAX. FACTORED			
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX. CSI (LC)	MAX. UNBRAC	MEMB.	FORCE (LBS)	MAX. CSI (LC)
FR-TO		FROM TO		LENGTH	FR-TO		
A-B	0 / 0	-78.0	-78.0 0.16 (1)	10.00	M-B	-1446 / 0	0.63 (1)
B-C	-1130 / 0	-78.0	-78.0 0.70 (1)	4.90	B-L	0 / 1359	0.22 (1)
C-D	-1318 / 0	-78.0	-78.0 0.73 (1)	4.59	L-C	-880 / 0	0.50 (1)
D-E	-1318 / 0	-78.0	-78.0 0.73 (1)	4.59	C-J	0 / 300	0.05 (1)
E-F	-1318 / 0	-78.0	-78.0 0.74 (1)	4.55	J-E	-524 / 0	0.30 (1)
F-G	-992 / 0	-78.0	-78.0 0.71 (1)	5.13	F-E	0 / 520	0.08 (1)
H-G	-1442 / 0	0.0	0.0 0.59 (1)	5.44	I-F	-1057 / 0	0.60 (1)
					I-G	0 / 1569	0.25 (1)
M-L	0 / 279	-18.5	-18.5 0.36 (4)	10.00			
L-K	0 / 1130	-18.5	-18.5 0.45 (4)	10.00			
K-J	0 / 1130	-18.5	-18.5 0.45 (4)	10.00			
J-I	0 / 992	-18.5	-18.5 0.35 (4)	10.00			
I-H	0 / 0	-18.5	-18.5 0.25 (4)	10.00			

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL =	21.0	PSF
		DL =	6.0	PSF
BOT	CH.	LL =	0.0	PSF
		DL =	7.4	PSF

TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE
OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= $L/360$ (1.03")
 CALCULATED VERT. DEFL.(LL) = $L/999$ (0.06")
 ALLOWABLE DEFL.(TL)= $L/360$ (1.03")
 CALCULATED VERT. DEFL.(TL) = $L/999$ (0.21")

CSI: TC=0.74/1.00 (E-F:1) , BC=0.45/1.00 (J-L:4) ,
WB=0.63/1.00 (B-M:1) , SSI=0.27/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .


NAIL VALUES						
PLATE	GRIP(DRY)		SHEAR		SECTION	
	(PSI)		(PLI)		(PLI)	
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.84 (I) (INPUT = 0.90)
JSI METAL= 0.35 (I) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336321	J04		1	TRUSS DESC. JT 45147	E21104028

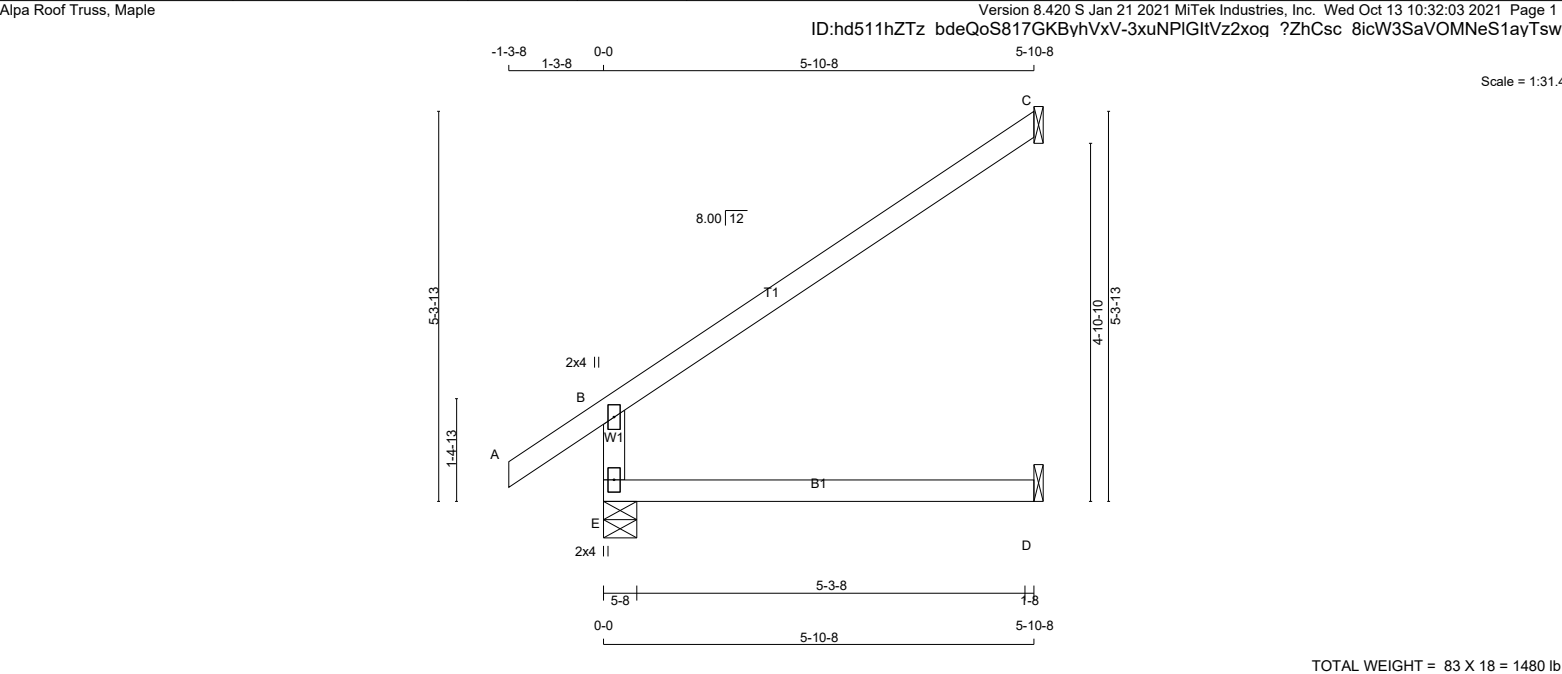

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. E - B 2x4 DRY No.2 SPF A - C 2x4 DRY No.2 SPF E - D 2x4 DRY No.2 SPF DRY: SEASONED LUMBER.							DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS <table><tr><th></th><th colspan="2">FACTORED GROSS REACTION</th><th colspan="2">MAXIMUM FACTORED GROSS REACTION</th><th>INPUT BRG</th><th>REQRD BRG</th></tr><tr><th>JT</th><th>VERT</th><th>HORZ</th><th>DOWN</th><th>HORZ</th><th>UPLIFT</th><th>IN-SX</th></tr><tr><td>E</td><td>456</td><td>0</td><td>456</td><td>0</td><td>0</td><td>5-8</td></tr><tr><td>C</td><td>172</td><td>0</td><td>172</td><td>0</td><td>0</td><td>1-8</td></tr><tr><td>D</td><td>46</td><td>0</td><td>51</td><td>0</td><td>0</td><td>1-8</td></tr></table> SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C , D UNFACTORED REACTIONS <table><tr><th>JT</th><th>1ST LCASE</th><th colspan="6">MAX./MIN. COMPONENT REACTIONS</th></tr><tr><th>JT</th><th>COMBINED</th><th>SNOW</th><th>LIVE</th><th>PERM.LIVE</th><th>WIND</th><th>DEAD</th><th>SOIL</th></tr><tr><td>E</td><td>323</td><td>212 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>111 / 0</td><td>0 / 0</td></tr><tr><td>C</td><td>119</td><td>93 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>26 / 0</td><td>0 / 0</td></tr><tr><td>D</td><td>36</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>36 / 0</td><td>0 / 0</td></tr></table> BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. LOADING TOTAL LOAD CASES: (4) <table><tr><th colspan="4">CHORDS</th><th colspan="4">WEBS</th></tr><tr><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>FACTORED VERT. LOAD (PLF)</th><th>LC1 MAX CSI (LC)</th><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>MAX. UNBRACED LENGTH</th><th>FR-TO</th></tr><tr><td>FR-TO</td><td></td><td>FROM</td><td>TO</td><td>FR-TO</td><td></td><td></td><td></td></tr><tr><td>E - B</td><td>-393 / 0</td><td>0.0</td><td>0.0 0.12 (4)</td><td>7.81</td><td></td><td></td><td></td></tr><tr><td>A - B</td><td>0 / 30</td><td>-78.0</td><td>-78.0 0.10 (1)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>B - C</td><td>-32 / 0</td><td>-78.0</td><td>-78.0 0.46 (1)</td><td>6.25</td><td></td><td></td><td></td></tr><tr><td>E - D</td><td>0 / 0</td><td>-18.5</td><td>-18.5 0.13 (4)</td><td>10.00</td><td></td><td></td><td></td></tr></table>								FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG	JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	E	456	0	456	0	0	5-8	C	172	0	172	0	0	1-8	D	46	0	51	0	0	1-8	JT	1ST LCASE	MAX./MIN. COMPONENT REACTIONS						JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL	E	323	212 / 0	0 / 0	0 / 0	0 / 0	111 / 0	0 / 0	C	119	93 / 0	0 / 0	0 / 0	0 / 0	26 / 0	0 / 0	D	36	0 / 0	0 / 0	0 / 0	0 / 0	36 / 0	0 / 0	CHORDS				WEBS				MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH	FR-TO	FR-TO		FROM	TO	FR-TO				E - B	-393 / 0	0.0	0.0 0.12 (4)	7.81				A - B	0 / 30	-78.0	-78.0 0.10 (1)	10.00				B - C	-32 / 0	-78.0	-78.0 0.46 (1)	6.25				E - D	0 / 0	-18.5	-18.5 0.13 (4)	10.00				DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN./C THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF BCBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 DESIGN ASSUMPTIONS -OVERHANG NOT TO BE ALTERED OR CUT OFF. (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD ALLOWABLE DEFL.(LL)= L/360 (0.20") CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00") ALLOWABLE DEFL.(TL)= L/360 (0.20") CALCULATED VERT. DEFL.(TL) = L/ 999 (0.03") CSI: TC=0.46/1.00 (B-C:1) , BC=0.13/1.00 (D-E:4) , WB=0.00/1.00 (n/a:0) , SSI=0.19/1.00 (B-C:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 AUTOSOLVE RIGHT HEEL ONLY TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.24 (B) (INPUT = 0.90) JSI METAL= 0.20 (B) (INPUT = 1.00)						
	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG																																																																																																																																																	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX																																																																																																																																																	
E	456	0	456	0	0	5-8																																																																																																																																																	
C	172	0	172	0	0	1-8																																																																																																																																																	
D	46	0	51	0	0	1-8																																																																																																																																																	
JT	1ST LCASE	MAX./MIN. COMPONENT REACTIONS																																																																																																																																																					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL																																																																																																																																																
E	323	212 / 0	0 / 0	0 / 0	0 / 0	111 / 0	0 / 0																																																																																																																																																
C	119	93 / 0	0 / 0	0 / 0	0 / 0	26 / 0	0 / 0																																																																																																																																																
D	36	0 / 0	0 / 0	0 / 0	0 / 0	36 / 0	0 / 0																																																																																																																																																
CHORDS				WEBS																																																																																																																																																			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH	FR-TO																																																																																																																																																
FR-TO		FROM	TO	FR-TO																																																																																																																																																			
E - B	-393 / 0	0.0	0.0 0.12 (4)	7.81																																																																																																																																																			
A - B	0 / 30	-78.0	-78.0 0.10 (1)	10.00																																																																																																																																																			
B - C	-32 / 0	-78.0	-78.0 0.46 (1)	6.25																																																																																																																																																			
E - D	0 / 0	-18.5	-18.5 0.13 (4)	10.00																																																																																																																																																			
PLATES (table is in inches) <table><tr><th>JT</th><th>TYPE</th><th>PLATES</th><th>W</th><th>LEN</th><th>Y</th><th>X</th></tr><tr><td>B</td><td>TMV+p</td><td>MT20</td><td>2.0</td><td>4.0</td><td></td><td></td></tr><tr><td>E</td><td>BMV1+p</td><td>MT20</td><td>2.0</td><td>4.0</td><td></td><td></td></tr></table>							JT	TYPE	PLATES	W	LEN	Y	X	B	TMV+p	MT20	2.0	4.0			E	BMV1+p	MT20	2.0	4.0			LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2 																																																																																																																											
JT	TYPE	PLATES	W	LEN	Y	X																																																																																																																																																	
B	TMV+p	MT20	2.0	4.0																																																																																																																																																			
E	BMV1+p	MT20	2.0	4.0																																																																																																																																																			

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336321	J04T		1	TRUSS DESC. JT 45147	E21104029

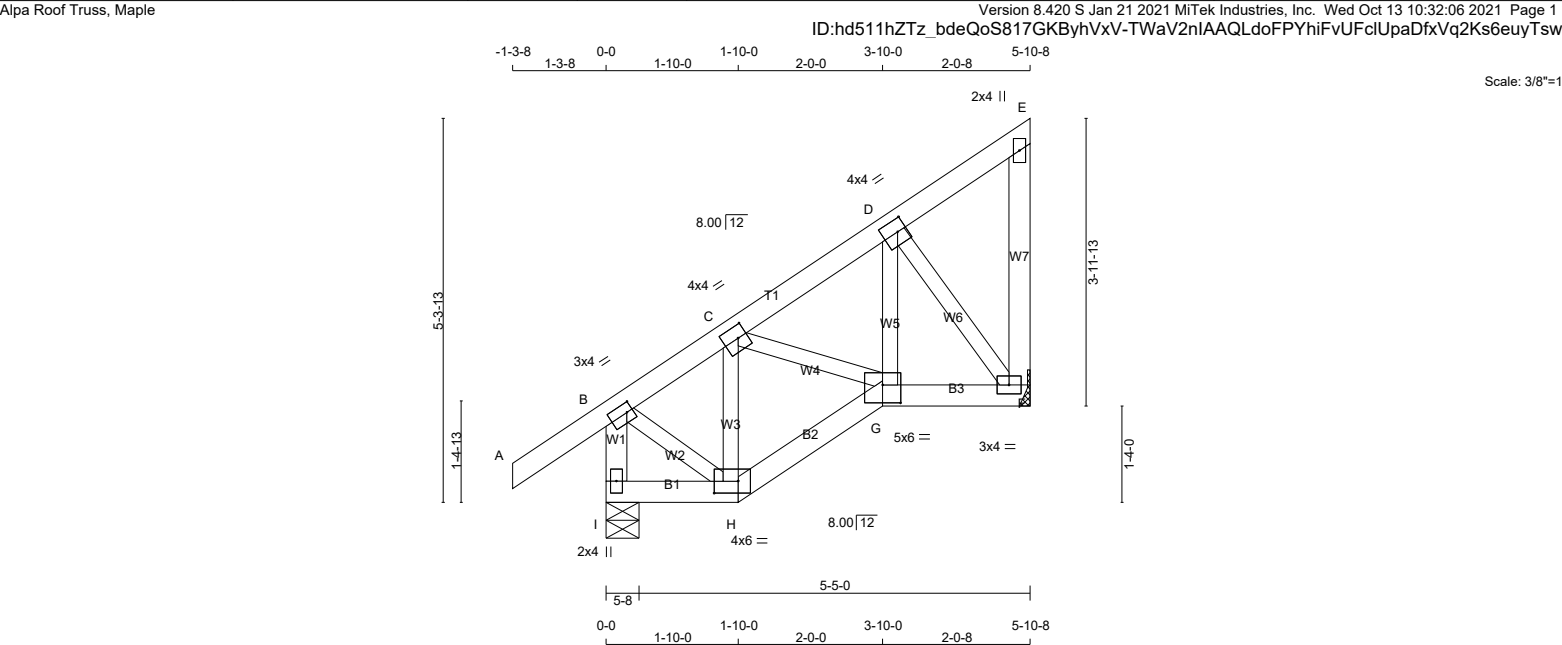

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
I - B	2x4	DRY No.2	SPF	
A - E	2x4	DRY No.2	SPF	
F - E	2x4	DRY No.2	SPF	
I - H	2x4	DRY No.2	SPF	
H - G	2x4	DRY No.2	SPF	
G - F	2x4	DRY No.2	SPF	
ALL WEBS 2x3 DRY No.2				
SPF DRY: SEASONED LUMBER.				

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
B	TMVW-t	MT20	3.0	4.0 1.50 1.00
C	TMWW-t	MT20	4.0	4.0 2.00 1.50
D	TMWW-t	MT20	4.0	4.0 2.00 1.50
E	TMV+p	MT20	2.0	4.0
F	BMVW1-t	MT20	3.0	4.0
G	BBWW-I	MT20	5.0	6.0 3.00 3.00
H	BBWW-I	MT20	4.0	6.0 2.00 4.00
I	BMV1+p	MT20	2.0	4.0

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG IN-SX	REQD BRG IN-SX
	VERT	HORZ	DOWN	HORZ		
JT	403	0	403	0	5-8	1-8
F	271	0	271	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
I	285	188 / 0	0 / 0	0 / 0	0 / 0	97 / 0	0 / 0
F	193	117 / 0	0 / 0	0 / 0	0 / 0	77 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)
FR-TO		FROM TO			FR-TO		
I-B	-386 / 0	0.0 0.0 0.04 (1)	7.81		B-H	0 / 161	0.04 (1)
A-B	0 / 30	-78.0 -78.0 0.10 (1)	10.00		H-C	-134 / 0	0.02 (1)
B-C	-188 / 0	-78.0 -78.0 0.10 (1)	6.25		C-G	0 / 35	0.01 (1)
C-D	-192 / 0	-78.0 -78.0 0.05 (1)	6.25		G-D	0 / 114	0.03 (4)
D-E	-10 / 0	-78.0 -78.0 0.05 (1)	6.25		D-F	-254 / 0	0.05 (1)
F-E	-57 / 0	0.0 0.0 0.01 (1)	7.81				
I-H	0 / 0	-18.5 -18.5 0.02 (4)	10.00				
H-G	0 / 160	-18.5 -18.5 0.04 (1)	10.00				
G-F	0 / 160	-18.5 -18.5 0.04 (1)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 21.0 PSF
	DL = 6.0 PSF
BOT CH.	LL = 0.0 PSF
	DL = 7.4 PSF
TOTAL LOAD	= 34.4 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.20")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.20")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.00")

CSI: TC=0.10/1.00 (A-B:1) , BC=0.04/1.00 (F-G:1) ,
WB=0.05/1.00 (D-F:1) , SSI=0.07/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE GRIP(DRY) SHEAR (PSI)	SECTION (PLI)	
		MAX MIN MAX MIN MAX MIN
MT20		650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.50 (B) (INPUT = 0.90)
JSI METAL= 0.10 (B) (INPUT = 1.00)


LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Wed Oct 13 10:32:07 2021 Page 1
ID:hd511hZTz bdeQoS817GKByhVxV-xi8tF7JoxkTUPPzIEPm81S9r3DuZOOU H cfBLyTsw

Scale = 1:33.5

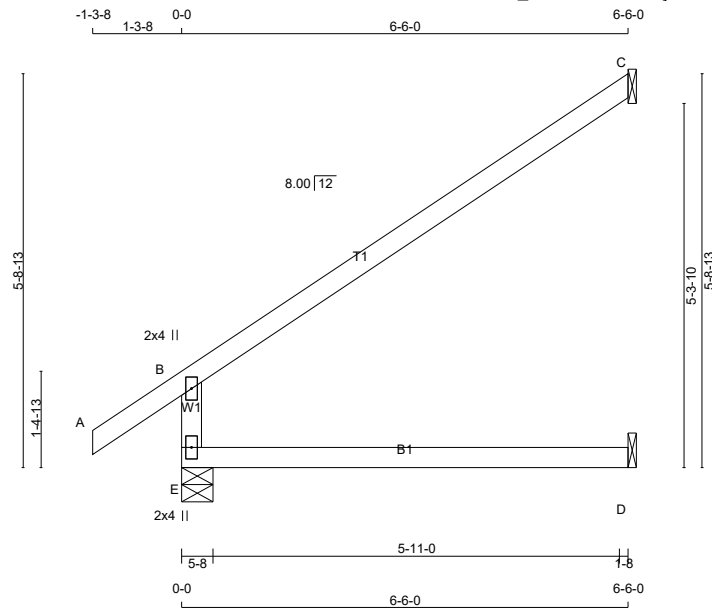

TOTAL WEIGHT = $17 \times 19 = 330 \text{ lb}$

N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
E - B	2x4	DRY No.2	SPF
A - C	2x4	DRY No.2	SPF
E - D	2x4	DRY No.2	SPF

DRY: SEASONED LUMBER.

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	2.0	4.0		
E	BMV1+p	MT20	2.0	4.0		

	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION			INPUT BRG	REQD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
E	494	0	494	0	0	5-8	1-8
C	190	0	190	0	0	1-8	1-8
D	50	0	56	0	0	1-8	1-8

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C , D

JT	1ST LCASE	MAX. MIN. COMPONENT REACTIONS					
	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
E	349	228 / 0	0 / 0	0 / 0	0 / 0	121 / 0	0 / 0
C	132	102 / 0	0 / 0	0 / 0	0 / 0	29 / 0	0 / 0
D	40	0 / 0	0 / 0	0 / 0	0 / 0	40 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LOAD CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX LOAD CSI (LC)
FR-TO		FROM TO			FR-TO		
E-B	-424 / 0	0.0 0.0	0.13 (4)	7.81			
A-B	0 / 30	-78.0 -78.0	0.10 (1)	10.00			
B-C	-35 / 0	-78.0 -78.0	0.44 (1)	6.25			
E-D	0 / 0	-18.5 -18.5	0.16 (4)	10.00			

SPECIFIED LOADS:

TOP	CH.	LL	=	21.0	PSF
		DL	=	6.0	PSF
BOT	CH.	LL	=	0.0	PSF
		DL	=	7.4	PSF
TOTAL LOAD				=	34.4 PSF

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.22")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.22")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.05")

CSI: TC=0.44/1.00 (B-C:1) , BC=0.16/1.00 (D-E:4) ,
WB=0.00/1.00 (n/a:0) , SSI=0.21/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES					
PLATE	GRIP(DRY)		SHEAR		SECTION
	(PSI)		(PLI)		(PLI)
	MAX	MIN	MAX	MIN	MAX MIN
MT20	650	371	1747	788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.26 (B) (INPUT = 0.90)
JSI METAL= 0.22 (B) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336321	J05T		1	TRUSS DESC. JT 45147	E21104031


Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Wed Oct 13 10:32:09 2021 Page 1

ID:hd511hZTz_bdeQoS817GKByhVxV-u5FegoL2TLkBfj77Mqoc6tEGj1bcsI0Gkl5mFDyTswK

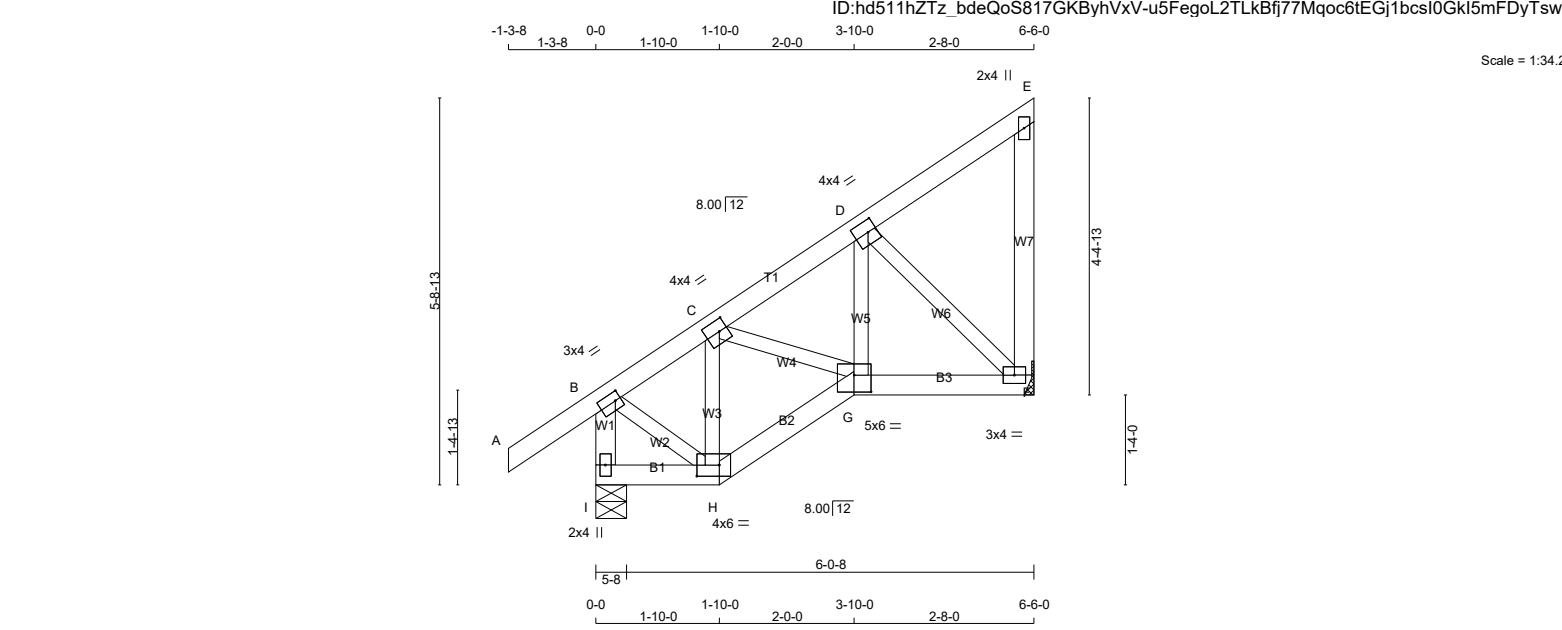

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. I - B 2x4 DRY No.2 SPF A - E 2x4 DRY No.2 SPF F - E 2x4 DRY No.2 SPF I - H 2x4 DRY No.2 SPF H - G 2x4 DRY No.2 SPF G - F 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF DRY: SEASONED LUMBER.							DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS <table><tr><th></th><th>FACTORED GROSS REACTION</th><th>MAXIMUM FACTORED GROSS REACTION</th><th>INPUT BRG</th><th>REQRD BRG</th></tr><tr><th>JT</th><th>VERT</th><th>HORZ</th><th>DOWN</th><th>HORZ</th></tr><tr><td>I</td><td>432</td><td>0</td><td>432</td><td>0</td></tr><tr><td>F</td><td>302</td><td>0</td><td>302</td><td>0</td></tr></table> A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8. UNFACTORED REACTIONS <table><tr><th></th><th>1ST LCASE COMBINED</th><th>MAX./MIN. SNOW</th><th>MIN. LIVE</th><th>PERM. LIVE</th><th>WIND</th><th>DEAD</th><th>SOIL</th></tr><tr><td>JT</td><td>305</td><td>200 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>105 / 0</td><td>0 / 0</td></tr><tr><td>F</td><td>216</td><td>130 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>85 / 0</td><td>0 / 0</td></tr></table> BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. LOADING TOTAL LOAD CASES: (4) <table><tr><th colspan="4">CHORDS</th><th colspan="4">WEBS</th></tr><tr><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>FACTORED VERT. LOAD (PLF)</th><th>MAX. LC1 (LC)</th><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>MAX. UNBRACED LENGTH</th><th>FR-TO</th></tr><tr><td>I-B</td><td>-415 / 0</td><td>0.0</td><td>0.0 0.04 (1)</td><td>B-H</td><td>0 / 185</td><td>0.04 (1)</td><td>0.03 (1)</td></tr><tr><td>A-B</td><td>0 / 30</td><td>-78.0</td><td>-78.0 0.10 (1)</td><td>H-C</td><td>-160 / 0</td><td>0.02 (1)</td><td>0.03 (4)</td></tr><tr><td>B-C</td><td>-215 / 0</td><td>-78.0</td><td>-78.0 0.08 (1)</td><td>C-G</td><td>0 / 73</td><td>0.06 (1)</td><td>0.06 (1)</td></tr><tr><td>C-D</td><td>-253 / 0</td><td>-78.0</td><td>-78.0 0.05 (1)</td><td>G-D</td><td>0 / 118</td><td>0.06 (1)</td><td>0.06 (1)</td></tr><tr><td>D-E</td><td>-11 / 0</td><td>-78.0</td><td>-78.0 0.05 (1)</td><td>D-F</td><td>-293 / 0</td><td>0.06 (1)</td><td>0.06 (1)</td></tr><tr><td>F-E</td><td>-80 / 0</td><td>0.0</td><td>0.0 0.02 (1)</td><td></td><td></td><td></td><td></td></tr><tr><td>I-H</td><td>0 / 0</td><td>-18.5</td><td>-18.5 0.02 (4)</td><td></td><td></td><td></td><td></td></tr><tr><td>H-G</td><td>0 / 184</td><td>-18.5</td><td>-18.5 0.04 (1)</td><td></td><td></td><td></td><td></td></tr><tr><td>G-F</td><td>0 / 215</td><td>-18.5</td><td>-18.5 0.06 (4)</td><td></td><td></td><td></td><td></td></tr></table>								FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG	JT	VERT	HORZ	DOWN	HORZ	I	432	0	432	0	F	302	0	302	0		1ST LCASE COMBINED	MAX./MIN. SNOW	MIN. LIVE	PERM. LIVE	WIND	DEAD	SOIL	JT	305	200 / 0	0 / 0	0 / 0	0 / 0	105 / 0	0 / 0	F	216	130 / 0	0 / 0	0 / 0	0 / 0	85 / 0	0 / 0	CHORDS				WEBS				MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH	FR-TO	I-B	-415 / 0	0.0	0.0 0.04 (1)	B-H	0 / 185	0.04 (1)	0.03 (1)	A-B	0 / 30	-78.0	-78.0 0.10 (1)	H-C	-160 / 0	0.02 (1)	0.03 (4)	B-C	-215 / 0	-78.0	-78.0 0.08 (1)	C-G	0 / 73	0.06 (1)	0.06 (1)	C-D	-253 / 0	-78.0	-78.0 0.05 (1)	G-D	0 / 118	0.06 (1)	0.06 (1)	D-E	-11 / 0	-78.0	-78.0 0.05 (1)	D-F	-293 / 0	0.06 (1)	0.06 (1)	F-E	-80 / 0	0.0	0.0 0.02 (1)					I-H	0 / 0	-18.5	-18.5 0.02 (4)					H-G	0 / 184	-18.5	-18.5 0.04 (1)					G-F	0 / 215	-18.5	-18.5 0.06 (4)					DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF CBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 DESIGN ASSUMPTIONS -OVERHANG NOT TO BE ALTERED OR CUT OFF. (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD ALLOWABLE DEFL.(LL)= L/360 (0.22") CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00") ALLOWABLE DEFL.(TL)= L/360 (0.22") CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01") CSI: TC=0.10/1.00 (A-B:1) , BC=0.06/1.00 (F-G:4) , WB=0.06/1.00 (D-F:1) , SSI=0.08/1.00 (D-E:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.57 (B) (INPUT = 0.90) JSI METAL= 0.11 (B) (INPUT = 1.00)						
	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG																																																																																																																																																				
JT	VERT	HORZ	DOWN	HORZ																																																																																																																																																				
I	432	0	432	0																																																																																																																																																				
F	302	0	302	0																																																																																																																																																				
	1ST LCASE COMBINED	MAX./MIN. SNOW	MIN. LIVE	PERM. LIVE	WIND	DEAD	SOIL																																																																																																																																																	
JT	305	200 / 0	0 / 0	0 / 0	0 / 0	105 / 0	0 / 0																																																																																																																																																	
F	216	130 / 0	0 / 0	0 / 0	0 / 0	85 / 0	0 / 0																																																																																																																																																	
CHORDS				WEBS																																																																																																																																																				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH	FR-TO																																																																																																																																																	
I-B	-415 / 0	0.0	0.0 0.04 (1)	B-H	0 / 185	0.04 (1)	0.03 (1)																																																																																																																																																	
A-B	0 / 30	-78.0	-78.0 0.10 (1)	H-C	-160 / 0	0.02 (1)	0.03 (4)																																																																																																																																																	
B-C	-215 / 0	-78.0	-78.0 0.08 (1)	C-G	0 / 73	0.06 (1)	0.06 (1)																																																																																																																																																	
C-D	-253 / 0	-78.0	-78.0 0.05 (1)	G-D	0 / 118	0.06 (1)	0.06 (1)																																																																																																																																																	
D-E	-11 / 0	-78.0	-78.0 0.05 (1)	D-F	-293 / 0	0.06 (1)	0.06 (1)																																																																																																																																																	
F-E	-80 / 0	0.0	0.0 0.02 (1)																																																																																																																																																					
I-H	0 / 0	-18.5	-18.5 0.02 (4)																																																																																																																																																					
H-G	0 / 184	-18.5	-18.5 0.04 (1)																																																																																																																																																					
G-F	0 / 215	-18.5	-18.5 0.06 (4)																																																																																																																																																					
PLATES (table is in inches) <table><tr><th>JT</th><th>TYPE</th><th>PLATES</th><th>W</th><th>LEN</th><th>Y</th><th>X</th></tr><tr><td>B</td><td>TMVW-t</td><td>MT20</td><td>3.0</td><td>4.0</td><td>1.50</td><td>1.00</td></tr><tr><td>C</td><td>TMWW-t</td><td>MT20</td><td>4.0</td><td>4.0</td><td>2.00</td><td>1.50</td></tr><tr><td>D</td><td>TMWW-t</td><td>MT20</td><td>4.0</td><td>4.0</td><td>2.00</td><td>1.50</td></tr><tr><td>E</td><td>TMV+p</td><td>MT20</td><td>2.0</td><td>4.0</td><td></td><td></td></tr><tr><td>F</td><td>BMVW1-t</td><td>MT20</td><td>3.0</td><td>4.0</td><td></td><td></td></tr><tr><td>G</td><td>BBWW-I</td><td>MT20</td><td>5.0</td><td>6.0</td><td>3.00</td><td>3.00</td></tr><tr><td>H</td><td>BBWW-I</td><td>MT20</td><td>4.0</td><td>6.0</td><td>2.00</td><td>4.00</td></tr><tr><td>I</td><td>BMV1+p</td><td>MT20</td><td>2.0</td><td>4.0</td><td></td><td></td></tr></table>							JT	TYPE	PLATES	W	LEN	Y	X	B	TMVW-t	MT20	3.0	4.0	1.50	1.00	C	TMWW-t	MT20	4.0	4.0	2.00	1.50	D	TMWW-t	MT20	4.0	4.0	2.00	1.50	E	TMV+p	MT20	2.0	4.0			F	BMVW1-t	MT20	3.0	4.0			G	BBWW-I	MT20	5.0	6.0	3.00	3.00	H	BBWW-I	MT20	4.0	6.0	2.00	4.00	I	BMV1+p	MT20	2.0	4.0			TOTAL WEIGHT = 7 X 33 = 232 lb [M][F]																																																																																		
JT	TYPE	PLATES	W	LEN	Y	X																																																																																																																																																		
B	TMVW-t	MT20	3.0	4.0	1.50	1.00																																																																																																																																																		
C	TMWW-t	MT20	4.0	4.0	2.00	1.50																																																																																																																																																		
D	TMWW-t	MT20	4.0	4.0	2.00	1.50																																																																																																																																																		
E	TMV+p	MT20	2.0	4.0																																																																																																																																																				
F	BMVW1-t	MT20	3.0	4.0																																																																																																																																																				
G	BBWW-I	MT20	5.0	6.0	3.00	3.00																																																																																																																																																		
H	BBWW-I	MT20	4.0	6.0	2.00	4.00																																																																																																																																																		
I	BMV1+p	MT20	2.0	4.0																																																																																																																																																				
LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2																																																																																																																																																								

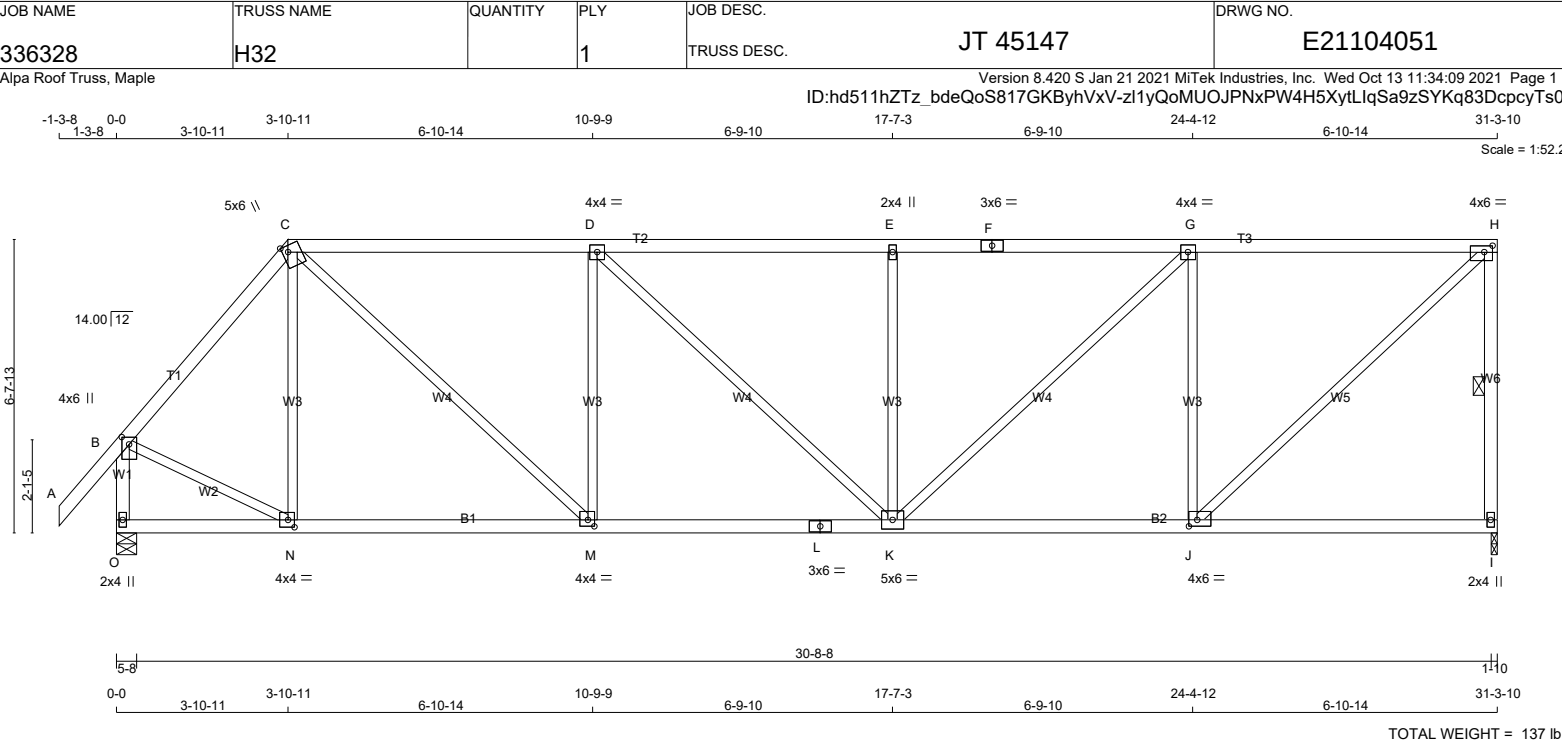

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2
C - F	2x4	DRY	No.2
F - H	2x4	DRY	No.2
I - H	2x4	DRY	No.2
O - B	2x4	DRY	No.2
O - L	2x4	DRY	No.2
L - I	2x4	DRY	No.2
ALL WEBS EXCEPT	2x3	DRY	No.2
DRY: SEASONED LUMBER.			

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	6.0	2.00 2.00
C	TTWW+m	MT20	5.0	6.0	1.75 1.50
D	TMWW-t	MT20	4.0	4.0	
E	TMW+w	MT20	2.0	4.0	
F	TS-t	MT20	3.0	6.0	
G	TMWW-t	MT20	4.0	4.0	
H	TMVW-t	MT20	4.0	6.0	1.75 2.25
I	BMV1+p	MT20	2.0	4.0	
J	BMWW-t	MT20	4.0	6.0	1.75 2.25
K	BMWWW-t	MT20	5.0	6.0	
L	BS-t	MT20	3.0	6.0	
M	BMWW-t	MT20	4.0	4.0	1.75 1.75
N	BMWW-t	MT20	4.0	4.0	2.00 1.75
O	BMV1+p	MT20	2.0	4.0	

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG IN-SX		REQRD BRG IN-SX	
JT	VERT	HORZ		DOWN	HORZ	UPLIFT			
I	1510	0		1510	0	0	1-10	1-10	
O	1619	0		1619	0	0	5-8	1-12	

UNFACTORED REACTIONS		1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL		
I	1076	657 / 0	0 / 0	0 / 0	0 / 0	419 / 0	0 / 0		
O	1152	716 / 0	0 / 0	0 / 0	0 / 0	436 / 0	0 / 0		

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I, O

BRACING
 TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.07 FT.
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF H-I.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING		TOTAL LOAD CASES: (4)							
CHORDS		MAX. FACTORED		FACTORED		WEBS		MAX. FACTORED	
MEMB.	FORCE (LBS)	VERT.	LOAD (PLF)	LC1	MAX	MEMB.	FORCE (LBS)	MAX	CSI (LC)
FR-TO		FROM	TO			FR-TO			
A-B	0 / 42	-78.0	-78.0	0.11 (1)	10.00	N-C	-247 / 0	0.18 (1)	
B-C	-1280 / 0	-78.0	-78.0	0.25 (1)	5.43	C-M	0 / 1255	0.28 (1)	
C-D	-1750 / 0	-78.0	-78.0	0.70 (1)	4.21	M-D	-718 / 0	0.53 (1)	
D-E	-1876 / 0	-78.0	-78.0	0.71 (1)	4.08	D-K	0 / 172	0.04 (1)	
E-F	-1876 / 0	-78.0	-78.0	0.71 (1)	4.07	K-E	-489 / 0	0.36 (1)	
F-G	-1876 / 0	-78.0	-78.0	0.71 (1)	4.07	K-G	0 / 718	0.16 (1)	
G-H	-1352 / 0	-78.0	-78.0	0.64 (1)	4.71	J-G	-1101 / 0	0.81 (1)	
I-H	-1458 / 0	0.0	0.0	0.30 (1)	5.42	J-H	0 / 1838	0.41 (1)	
O-B	-1597 / 0	0.0	0.0	0.19 (1)	6.54	B-N	0 / 904	0.20 (1)	
O-N	0 / 0	-18.5	-18.5	0.13 (4)	10.00				
N-M	0 / 825	-18.5	-18.5	0.25 (4)	10.00				
M-L	0 / 1751	-18.5	-18.5	0.38 (1)	10.00				
L-K	0 / 1751	-18.5	-18.5	0.38 (1)	10.00				
K-J	0 / 1352	-18.5	-18.5	0.34 (4)	10.00				
J-I	0 / 0	-18.5	-18.5	0.21 (4)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:			
TOP CH.	LL	=	21.0 PSF
	DL	=	6.0 PSF
BOT CH.	LL	=	0.0 PSF
	DL	=	7.4 PSF
TOTAL LOAD = 34.4 PSF			

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
 - PART 9 OF BCBC 2018 , ABC 2019
 - PART 9 OF OBC 2012 (2019 AMENDMENT)
 - CSA 086-14
 - TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.04")
 CALCULATED VERT. DEFL.(LL) = L/ 999 (0.09")
 ALLOWABLE DEFL.(TL)= L/360 (1.04")
 CALCULATED VERT. DEFL.(TL) = L/ 999 (0.19")

CSI: TC=0.71/1.00 (E-G:1) , BC=0.38/1.00 (K-M:1) , WB=0.81/1.00 (G-J:1) , SSI=0.25/1.00 (G-H:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES			
PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (H) (INPUT = 0.90)
 JSI METAL= 0.54 (L) (INPUT = 1.00)

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Wed Oct 13 11:34:10 2021 Page 1



DRY: SEASONED LUMBER.


JSI GRIP= 0.90 (B) (INPUT = 0.90)
JSI METAL= 0.51 (L) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336328	H34		1	TRUSS DESC. JT 45147	E21104053

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Wed Oct 13 11:34:12 2021 Page 1

ID:hd511hZTz bdeQoS817GKByhVxV-NKj42qOMhEnxosFfyD5fV wHlo9xfzfGr1SGQxyTs09

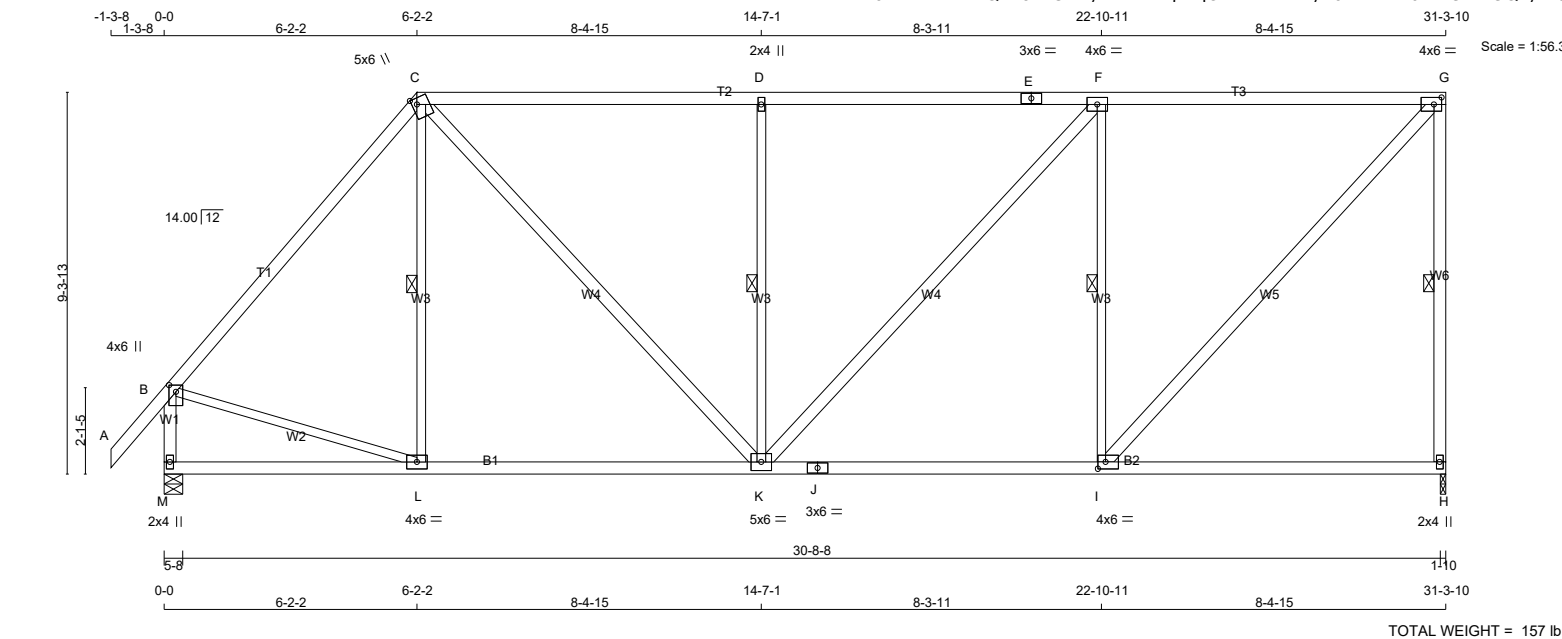

LUMBER

N. L. G. A. RULES

CHORDS SIZE LUMBER DESCR.

A - C 2x4 DRY 2100F 1.8E SPF

C - E 2x4 DRY No.2 SPF

E - G 2x4 DRY No.2 SPF

H - G 2x4 DRY No.2 SPF

M - B 2x4 DRY No.2 SPF

M - J 2x4 DRY No.2 SPF

J - H 2x4 DRY No.2 SPF

ALL WEBS 2x3 DRY No.2 SPF

EXCEPT

C - K 2x4 DRY No.2 SPF

K - F 2x4 DRY No.2 SPF

I - G 2x4 DRY No.2 SPF

DRY: SEASONED LUMBER.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER									
BEARINGS									
		FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	IN-SX	IN-SX
H	1510	0	1510	0	0	1-10	1-10	1-10	1-10
M	1619	0	1619	0	0	5-8	1-12	1-12	1-12

UNFACTORED REACTIONS									
JT	1ST LCASE	MAX./MIN.	COMPONENT	REACTIONS					
H	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL		
H	1076	657 / 0	0 / 0	0 / 0	0 / 0	419 / 0	0 / 0		
M	1152	716 / 0	0 / 0	0 / 0	0 / 0	436 / 0	0 / 0		

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H, M

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.03 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1 / 2 LENGTH OF G-H, C-L, D-K, F-I.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS					WEBS				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX	CS1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CS1 (LC)		
FR-TO		FROM TO			FR-TO				
A-B	0 / 42	-78.0	-78.0	0.07 (1)	10.00	L-C	-82 / 76	0.05 (1)	
B-C	-1304 / 0	-78.0	-78.0	0.42 (1)	6.17	C-K	0 / 772	0.12 (1)	
C-D	-1373 / 0	-78.0	-78.0	0.96 (1)	4.05	K-D	-709 / 0	0.40 (1)	
D-E	-1373 / 0	-78.0	-78.0	0.96 (1)	4.03	K-F	0 / 398	0.06 (1)	
E-F	-1373 / 0	-78.0	-78.0	0.96 (1)	4.03	I-F	-1009 / 0	0.58 (1)	
F-G	-1103 / 0	-78.0	-78.0	0.91 (1)	4.46	I-G	0 / 1619	0.26 (1)	
H-G	-1448 / 0	0.0	0.0	0.59 (1)	5.43	B-L	0 / 878	0.20 (1)	
M-B	-1577 / 0	0.0	0.0	0.19 (1)	6.57				
M-L	0 / 0	-18.5	-18.5	0.24 (4)	10.00				
L-K	0 / 845	-18.5	-18.5	0.32 (4)	10.00				
K-J	0 / 1103	-18.5	-18.5	0.42 (4)	10.00				
J-I	0 / 1103	-18.5	-18.5	0.42 (4)	10.00				
I-H	0 / 0	-18.5	-18.5	0.32 (4)	10.00				

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 21.0 PSF

DL = 6.0 PSF

BOT CH. LL = 0.0 PSF

DL = 7.4 PSF

TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.04")

CALCULATED VERT. DEFL.(LL)= L/ 999 (0.06")

ALLOWABLE DEFL.(TL)= L/360 (1.04")

CALCULATED VERT. DEFL.(TL)= L/ 999 (0.16")

CSI: TC=0.96/1.00 (C-D:1) , BC=0.42/1.00 (I-K:4) , WB=0.58/1.00 (F-I:1) , SSI=0.31/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10

COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)

MAX MIN MAX MIN MAX MIN


MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.84 (G) (INPUT = 0.90)

JSI METAL= 0.52 (B) (INPUT = 1.00)

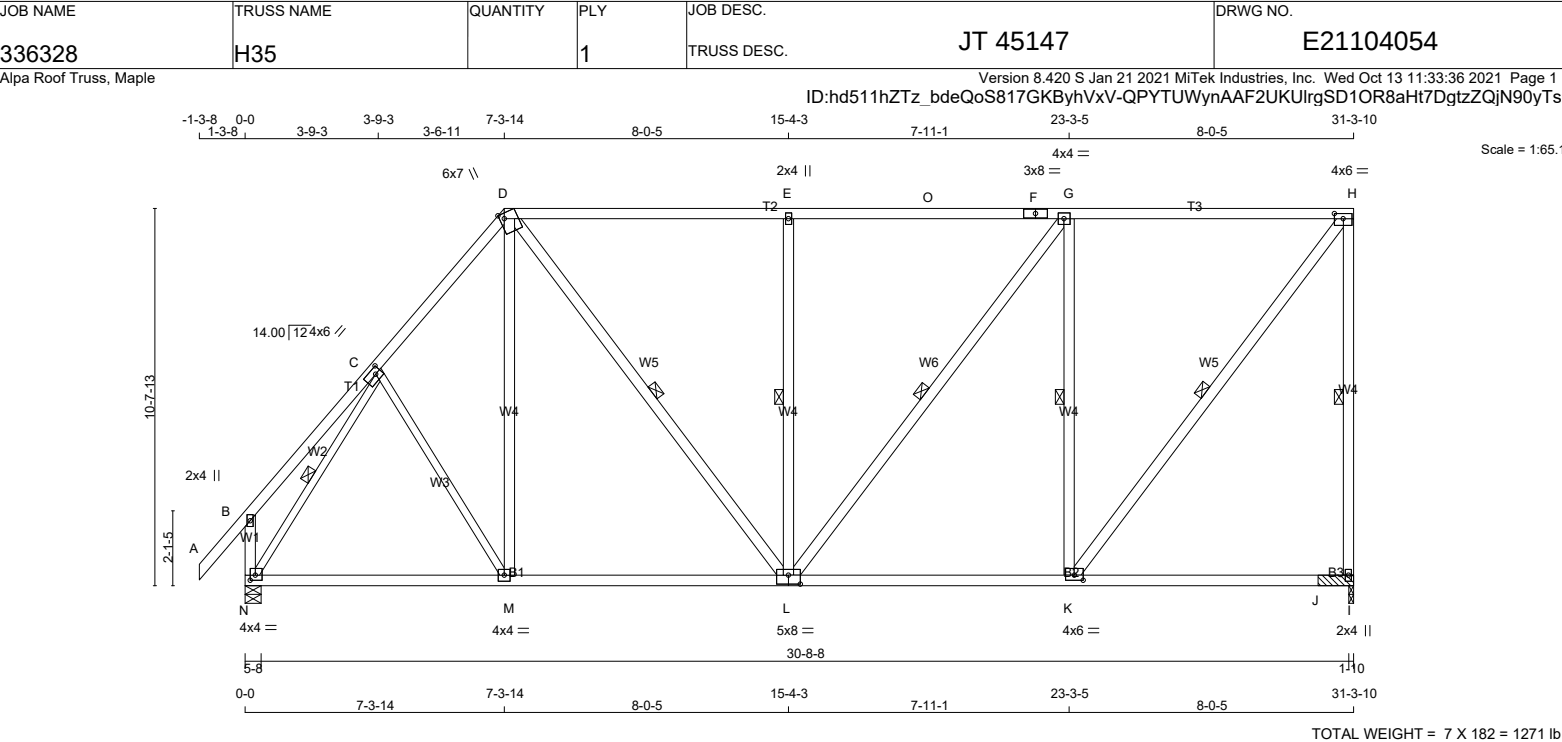

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
A - D	2x4	DRY	No.2	SPF
D - F	2x4	DRY	No.2	SPF
F - H	2x4	DRY	No.2	SPF
I - H	2x4	DRY	No.2	SPF
N - B	2x4	DRY	No.2	SPF
N - L	2x4	DRY	No.2	SPF
L - I	2x4	DRY	No.2	SPF
ALL WEBS	2x4	DRY	No.2	SPF
EXCEPT				
C - M	2x3	DRY	No.2	SPF
N - C	2x3	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	2.0	4.0		
C	TMWW-t	MT20	4.0	6.0	2.00	2.00
D	TTWW+m	MT20	6.0	7.0	Edge	1.50
E	TMW+w	MT20	2.0	4.0		
F	TS-t	MT20	3.0	8.0		
G	TMWW-t	MT20	4.0	4.0		
H	TMVW-t	MT20	4.0	6.0	1.75	3.00
I	BMV1+p	MT20	2.0	4.0		
K	BMWW-t	MT20	4.0	6.0	1.75	3.00
L	BSWWW-l	MT20	5.0	8.0	3.00	4.00
M	BMWW-t	MT20	4.0	4.0		
N	BMVW1-t	MT20	4.0	4.0	1.75	1.75

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD IN-SX
	VERT	HORZ	DOWN	HORZ		
I	1621	0	1621	0	1-10	1-10 & BLOCK
N	1688	0	1688	0	5-8	1-13

UNFACTORED REACTIONS

JT	1ST LCASE COMBINED		MAX./MIN. SNOW		LIVE		PERM.LIVE		WIND	DEAD	SOIL
	COMBINED										
I	1165		657 / 0		0 / 0		0 / 0		0 / 0	508 / 0	0 / 0
N	1207		716 / 0		0 / 0		0 / 0		0 / 0	491 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I, N

2x4 DRY SPF No.2 BEARING BLOCK 12" LONG AT JT. I ATTACHED TO FRONT SIDE WITH 2 ROWS OF (0.122"x3") SPIRAL NAILS SPACED 3" C.C. 8 NAILS TOTAL.

BRACING

FOR SECTION D-H, MAX. PURLIN SPACING = 2.00 FT.
FOR OTHER SECTIONS, TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.32 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF H-I, D-L, E-L, G-L, G-K, H-K, C-N.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

C H O R D S					W E B S				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)		MAX. UNBRACED LENGTH (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)		MAX. UNBRACED LENGTH (LC)
		FROM	TO				FROM	TO	
A-B	0 / 42	-78.0	-78.0	0.11 (1)	10.00	C-M	0 / 63	0.02 (4)	
B-C	0 / 24	-78.0	-78.0	0.16 (1)	10.00	M-D	0 / 145	0.04 (4)	
C-D	-1385 / 0	-78.0	-78.0	0.20 (1)	5.32	D-L	0 / 631	0.10 (1)	
D-E	-1270 / 0	-85.5	-85.5	0.92 (1)	2.00	L-E	-742 / 0	0.42 (1)	
E-O	-1271 / 0	-85.5	-85.5	0.92 (1)	2.00	L-G	0 / 448	0.07 (1)	
O-F	-1271 / 0	-85.5	-85.5	0.92 (1)	2.00	K-G	-1105 / 0	0.63 (1)	
F-G	-1271 / 0	-85.5	-85.5	0.92 (1)	2.00	K-H	0 / 1630	0.26 (1)	
G-H	-998 / 0	-85.5	-85.5	0.87 (1)	2.00	N-C	-1659 / 0	0.54 (1)	
I-H	-1564 / 0	0.0	0.0	0.89 (1)	5.27				
N-B	-218 / 0	0.0	0.0	0.03 (1)	7.81				
N-M	0 / 860	-18.5	-18.5	0.40 (4)	10.00				
M-L	0 / 883	-18.5	-18.5	0.41 (4)	10.00				
L-K	0 / 998	-18.5	-18.5	0.45 (4)	10.00				
K-J	0 / 0	-18.5	-18.5	0.34 (4)	10.00				
J-I	0 / 0	-18.5	-18.5	0.34 (4)	10.00				

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 21.0	PSF
	DL = 6.0	PSF
BOT CH.	LL = 0.0	PSF
	DL = 7.4	PSF
TOTAL LOAD	= 34.4	PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON PIGGYBACK TRUSS WITH SLOPES OF 6.00/12 AND -6.00/12 AND RESPECTIVE HEEL HEIGHTS OF 0-0 AND 0-0 AND AN ADDITIONAL DEAD LOAD OF 3.0 P.S.F.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.04")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.05")
ALLOWABLE DEFL.(TL)= L/360 (1.04")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.17")

CSI: TC=0.92/1.00 (D-E:1) , BC=0.45/1.00 (K-L:4) , WB=0.63/1.00 (G-K:1) , SSI=0.32/1.00 (G-H:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX	MIN	MAX
MT20	650	371	1747
	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (N) (INPUT = 0.90)
JSI METAL= 0.37 (C) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336328	H36P		1	TRUSS DESC. JT 45147	E21104055

Alpa Roof Truss, Maple Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Wed Oct 13 11:34:13 2021 Page 1

ID:hd511hZTz bdeQoS817GKByhVxV-rXHTFAP SYvoQ0psWxcu1BTZuBY2OXMP3hBqyNyTs08

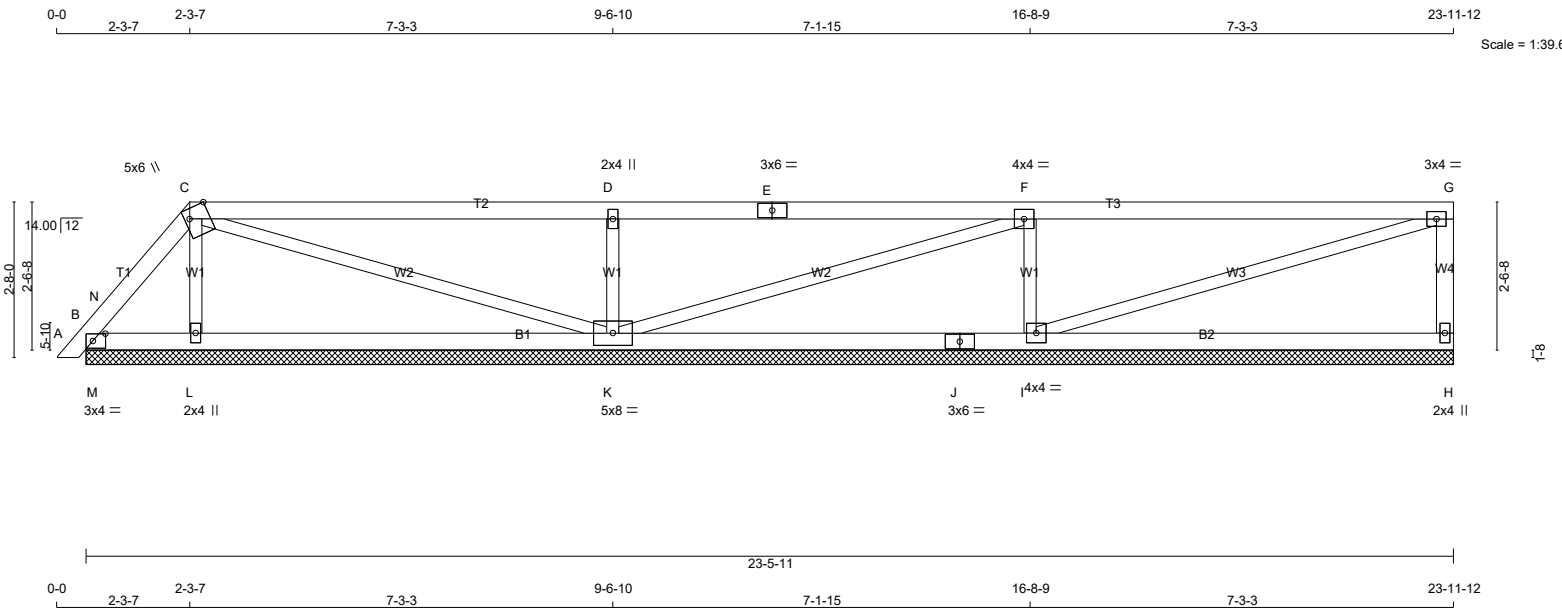

TOTAL WEIGHT = 2 X 80 = 160 lb [M]

LUMBER				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER										DESIGN CRITERIA	
N. L. G. A. RULES				BEARINGS										SPECIFIED LOADS:	
CHORDS	SIZE	LUMBER	DESCR.	FACTORED GROSS REACTION										TOP CH. LL = 21.0 PSF	
A - C	2x4	DRY	No.2	MAXIMUM FACTORED GROSS REACTION										DL = 6.0 PSF	
C - E	2x4	DRY	No.2	INPUT BRG										BOT CH. LL = 0.0 PSF	
E - G	2x4	DRY	No.2	REQRD BRG										DL = 7.4 PSF	
H - G	2x4	DRY	No.2	IN-SX										TOTAL LOAD = 34.4 PSF	
B - J	2x4	DRY	No.2	IN-SX										SPACING = 24.0 IN. C/C	
J - H	2x4	DRY	No.2											LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM	
ALL WEBS	2x3	DRY	No.2											THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015	
DRY: SEASONED LUMBER.				VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH										THIS DESIGN COMPLIES WITH:	

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMB1-I	MT20	3.0	4.0	1.50 2.50
C	TTWW+m	MT20	5.0	6.0	Edge 4.00
D	TMW+w	MT20	2.0	4.0	
E	TS-t	MT20	3.0	6.0	
F	TMWW-t	MT20	4.0	4.0	
G	TMVW-t	MT20	3.0	4.0	
H	BMV1+p	MT20	2.0	4.0	
I	BMWW1-t	MT20	4.0	4.0	
J	BS-t	MT20	3.0	6.0	
K	BMWWW1-t	MT20	5.0	8.0	
L	BMW1+w	MT20	2.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



UNFACTORED REACTIONS									
1ST LCASE		MAX./MIN. COMPONENT REACTIONS							
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL		
H	202	124 / 0	0 / 0	0 / 0	0 / 0	78 / 0	0 / 0		
B	89	83 / 0	0 / 0	0 / 0	0 / 0	5 / 0	0 / 0		
L	258	124 / 0	0 / 0	0 / 0	0 / 0	134 / 0	0 / 0		
K	544	342 / 0	0 / 0	0 / 0	0 / 0	202 / 0	0 / 0		
I	543	329 / 0	0 / 0	0 / 0	0 / 0	214 / 0	0 / 0		

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H, B, L, K, I


BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 10	-78.0 -78.0	0.01 (1)	L-C	-217 / 0	0.03 (1)	
B-N	0 / 57	-78.0 -78.0	0.04 (4)	C-K	-41 / 0	0.05 (1)	
N-C	-73 / 0	-78.0 -78.0	0.03 (1)	K-D	-618 / 0	0.10 (1)	
C-D	0 / 9	-78.0 -78.0	0.55 (1)	K-F	-19 / 0	0.02 (1)	
D-E	0 / 9	-78.0 -78.0	0.55 (1)	I-F	-613 / 0	0.10 (1)	
E-F	0 / 9	-78.0 -78.0	0.55 (1)	I-G	0 / 9	0.00 (1)	
F-G	-9 / 0	-78.0 -78.0	0.55 (1)	M-N	-183 / 0	0.00 (1)	
H-G	-230 / 0	0.0 0.0	0.03 (1)				
B-M	0 / 40	-18.5 -18.5	0.04 (1)				
M-L	0 / 40	-18.5 -18.5	0.16 (4)				
L-K	0 / 30	-18.5 -18.5	0.18 (4)				
K-J	0 / 9	-18.5 -18.5	0.24 (4)				
J-I	0 / 9	-18.5 -18.5	0.24 (4)				
I-H	0 / 0	-18.5 -18.5	0.24 (4)				

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336336	H25		1	TRUSS DESC. JT 45147	E21104139

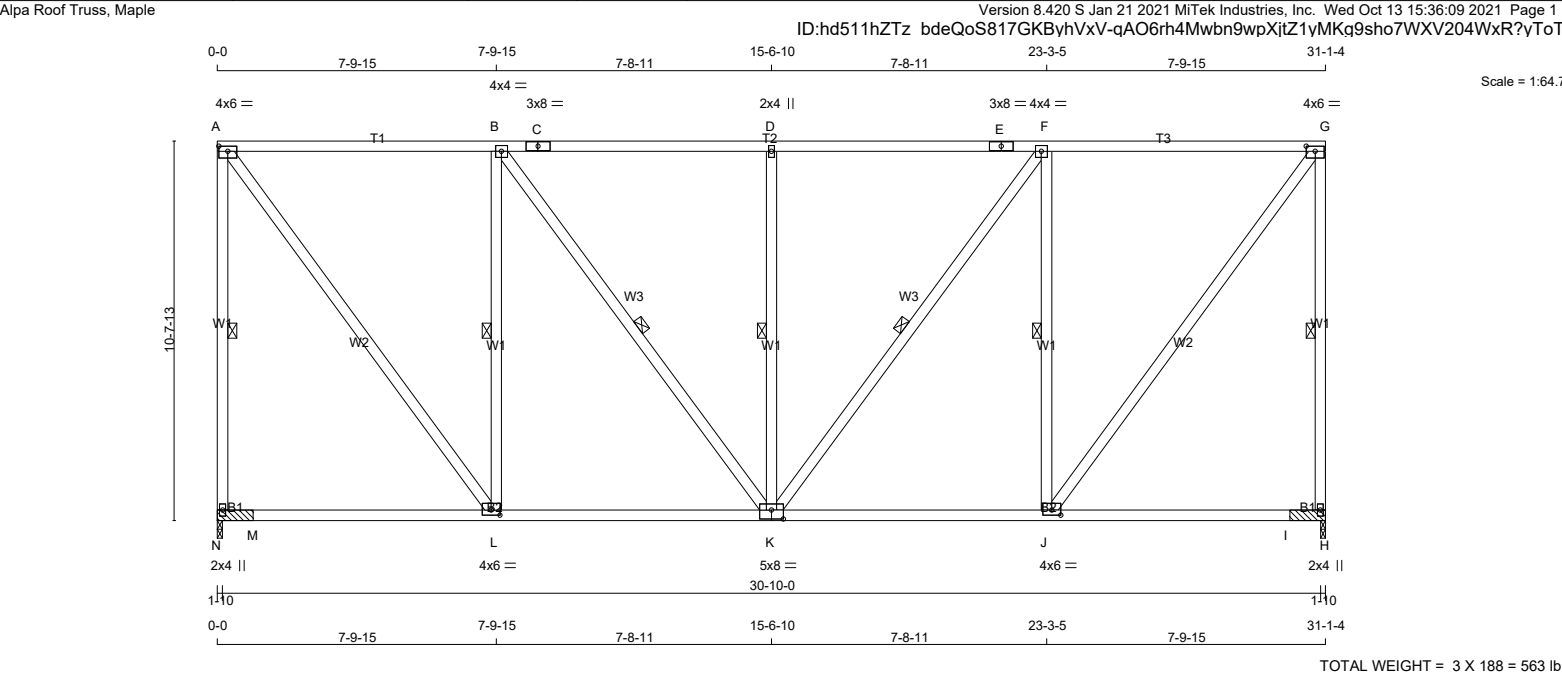

LUMBER N. L. G. A. RULES CHORDS SIZE N - A 2x4 DRY No.2 SPF A - C 2x4 DRY No.2 SPF C - E 2x4 DRY No.2 SPF E - G 2x4 DRY No.2 SPF H - G 2x4 DRY No.2 SPF N - K 2x4 DRY No.2 SPF K - H 2x4 DRY No.2 SPF ALL WEBS 2x4 DRY No.2 SPF DRY: SEASONED LUMBER.				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS FACTORED GROSS REACTION JT VERT HORZ N 1617 0 H 1617 0 MAXIMUM FACTORED GROSS REACTION DOWN HORZ UPLIFT N 1617 0 0 H 1617 0 0 INPUT BRG IN-SX N 1-10 H 1-10 REQRD IN-SX N 1-10 & BLOCK H 1-10 & BLOCK UNFACTORED REACTIONS 1ST LCASE MAX./MIN. COMPONENT REACTIONS JT COMBINED SNOW LIVE PERM.LIVE WIND DEAD SOIL N 1163 653 / 0 0 / 0 0 / 0 0 / 0 510 / 0 0 / 0 H 1163 653 / 0 0 / 0 0 / 0 0 / 0 510 / 0 0 / 0 BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N, H 2x4 DRY SPF No.2 BEARING BLOCK 12" LONG AT JT. N ATTACHED TO FRONT SIDE WITH 2 ROWS OF (0.122"x3") SPIRAL NAILS SPACED 3" C.C. 8 NAILS TOTAL. 2x4 DRY SPF No.2 BEARING BLOCK 12" LONG AT JT. H ATTACHED TO FRONT SIDE WITH 2 ROWS OF (0.122"x3") SPIRAL NAILS SPACED 3" C.C. 8 NAILS TOTAL. BRACING FOR SECTION A-G, MAX. PURLIN SPACING = 2.00 FT. FOR OTHER SECTIONS, TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 0.00 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED. 1 LATERAL BRACE(S) AT 1/ 2 LENGTH OF A-N, G-H, B-L, B-K, D-K, F-K, F-J. END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW LOADING TOTAL LOAD CASES: (4) <table><tr><th colspan="4">CHORDS</th><th colspan="4">WEBS</th></tr><tr><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>FACTORED VERT. LOAD (PLF)</th><th>MAX LC1 CSI (LC)</th><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>MAX LC1 CSI (LC)</th><th>UNBRACED LENGTH</th></tr><tr><td>FR-TO</td><td></td><td>FROM TO</td><td></td><td>FR-TO</td><td></td><td></td><td></td></tr><tr><td>N-A</td><td>-1562 / 0</td><td>0.0 0.0</td><td>0.89 (1)</td><td>5.27</td><td>A-L</td><td>0 / 1626</td><td>0.26 (1)</td></tr><tr><td>A-B</td><td>-981 / 0</td><td>-85.5 -85.5</td><td>0.88 (1)</td><td>2.00</td><td>L-B</td><td>-1119 / 0</td><td>0.64 (1)</td></tr><tr><td>B-C</td><td>-1248 / 0</td><td>-85.5 -85.5</td><td>0.92 (1)</td><td>2.00</td><td>B-K</td><td>0 / 447</td><td>0.07 (1)</td></tr><tr><td>C-D</td><td>-1248 / 0</td><td>-85.5 -85.5</td><td>0.92 (1)</td><td>2.00</td><td>K-D</td><td>-609 / 0</td><td>0.35 (1)</td></tr><tr><td>D-E</td><td>-1248 / 0</td><td>-85.5 -85.5</td><td>0.92 (1)</td><td>2.00</td><td>K-F</td><td>0 / 447</td><td>0.07 (1)</td></tr><tr><td>E-F</td><td>-1248 / 0</td><td>-85.5 -85.5</td><td>0.92 (1)</td><td>2.00</td><td>J-F</td><td>-1119 / 0</td><td>0.64 (1)</td></tr><tr><td>F-G</td><td>-981 / 0</td><td>-85.5 -85.5</td><td>0.88 (1)</td><td>2.00</td><td>J-G</td><td>0 / 1626</td><td>0.26 (1)</td></tr><tr><td>H-G</td><td>-1562 / 0</td><td>0.0 0.0</td><td>0.89 (1)</td><td>5.27</td><td></td><td></td><td></td></tr><tr><td>N-M</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.32 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>M-L</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.32 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>L-K</td><td>0 / 981</td><td>-18.5 -18.5</td><td>0.43 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>K-J</td><td>0 / 981</td><td>-18.5 -18.5</td><td>0.43 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>J-I</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.32 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>I-H</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.32 (4)</td><td>10.00</td><td></td><td></td><td></td></tr></table>				CHORDS				WEBS				MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1 CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX LC1 CSI (LC)	UNBRACED LENGTH	FR-TO		FROM TO		FR-TO				N-A	-1562 / 0	0.0 0.0	0.89 (1)	5.27	A-L	0 / 1626	0.26 (1)	A-B	-981 / 0	-85.5 -85.5	0.88 (1)	2.00	L-B	-1119 / 0	0.64 (1)	B-C	-1248 / 0	-85.5 -85.5	0.92 (1)	2.00	B-K	0 / 447	0.07 (1)	C-D	-1248 / 0	-85.5 -85.5	0.92 (1)	2.00	K-D	-609 / 0	0.35 (1)	D-E	-1248 / 0	-85.5 -85.5	0.92 (1)	2.00	K-F	0 / 447	0.07 (1)	E-F	-1248 / 0	-85.5 -85.5	0.92 (1)	2.00	J-F	-1119 / 0	0.64 (1)	F-G	-981 / 0	-85.5 -85.5	0.88 (1)	2.00	J-G	0 / 1626	0.26 (1)	H-G	-1562 / 0	0.0 0.0	0.89 (1)	5.27				N-M	0 / 0	-18.5 -18.5	0.32 (4)	10.00				M-L	0 / 0	-18.5 -18.5	0.32 (4)	10.00				L-K	0 / 981	-18.5 -18.5	0.43 (4)	10.00				K-J	0 / 981	-18.5 -18.5	0.43 (4)	10.00				J-I	0 / 0	-18.5 -18.5	0.32 (4)	10.00				I-H	0 / 0	-18.5 -18.5	0.32 (4)	10.00				DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C LOADING IN FLAT SECTION BASED ON PIGGYBACK TRUSS WITH SLOPES OF 6.00/12 AND -6.00/12 AND RESPECTIVE HEEL HEIGHTS OF 0-0 AND 0-0 AND AN ADDITIONAL DEAD LOAD OF 3.0 P.S.F. THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF BCBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD ALLOWABLE DEFL.(LL)= L/360 (1.04") CALCULATED VERT. DEFL.(LL) = L/ 999 (0.06") ALLOWABLE DEFL.(TL)= L/360 (1.04") CALCULATED VERT. DEFL.(TL) = L/ 999 (0.18") CSI= TC=0.92/1.00 (B-D:1) , BC=0.43/1.00 (J-K:4) , WB=0.64/1.00 (B-L:1) , SSI=0.32/1.00 (A-B:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.86 (L) (INPUT = 0.90) JSI METAL= 0.34 (A) (INPUT = 1.00)			
CHORDS				WEBS																																																																																																																																															
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1 CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX LC1 CSI (LC)	UNBRACED LENGTH																																																																																																																																												
FR-TO		FROM TO		FR-TO																																																																																																																																															
N-A	-1562 / 0	0.0 0.0	0.89 (1)	5.27	A-L	0 / 1626	0.26 (1)																																																																																																																																												
A-B	-981 / 0	-85.5 -85.5	0.88 (1)	2.00	L-B	-1119 / 0	0.64 (1)																																																																																																																																												
B-C	-1248 / 0	-85.5 -85.5	0.92 (1)	2.00	B-K	0 / 447	0.07 (1)																																																																																																																																												
C-D	-1248 / 0	-85.5 -85.5	0.92 (1)	2.00	K-D	-609 / 0	0.35 (1)																																																																																																																																												
D-E	-1248 / 0	-85.5 -85.5	0.92 (1)	2.00	K-F	0 / 447	0.07 (1)																																																																																																																																												
E-F	-1248 / 0	-85.5 -85.5	0.92 (1)	2.00	J-F	-1119 / 0	0.64 (1)																																																																																																																																												
F-G	-981 / 0	-85.5 -85.5	0.88 (1)	2.00	J-G	0 / 1626	0.26 (1)																																																																																																																																												
H-G	-1562 / 0	0.0 0.0	0.89 (1)	5.27																																																																																																																																															
N-M	0 / 0	-18.5 -18.5	0.32 (4)	10.00																																																																																																																																															
M-L	0 / 0	-18.5 -18.5	0.32 (4)	10.00																																																																																																																																															
L-K	0 / 981	-18.5 -18.5	0.43 (4)	10.00																																																																																																																																															
K-J	0 / 981	-18.5 -18.5	0.43 (4)	10.00																																																																																																																																															
J-I	0 / 0	-18.5 -18.5	0.32 (4)	10.00																																																																																																																																															
I-H	0 / 0	-18.5 -18.5	0.32 (4)	10.00																																																																																																																																															

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336336	H26P		1	TRUSS DESC. JT 45147	E21104140

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Wed Oct 13 15:36:10 2021 Page 1

ID:hd511hZTz bdeQoS817GKByhVxV-IMyU315?huv0Yz6vRGYBvXDO749yF61BFkFV SyToTJ

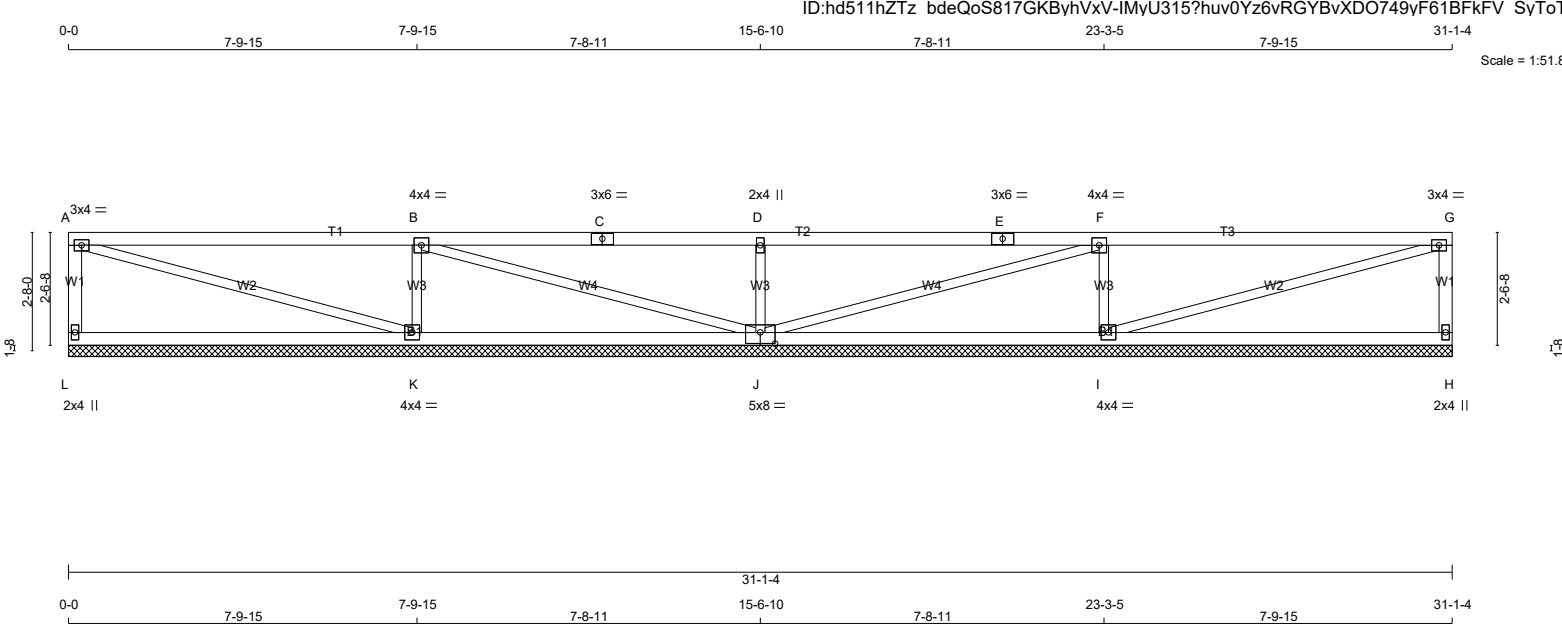

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. L - A 2x4 DRY No.2 SPF A - C 2x4 DRY No.2 SPF C - E 2x4 DRY No.2 SPF E - G 2x4 DRY No.2 SPF H - G 2x4 DRY No.2 SPF L - J 2x4 DRY No.2 SPF J - H 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF DRY: SEASONED LUMBER.					DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS <table><tr><th></th><th colspan="2">FACTORED GROSS REACTION</th><th colspan="2">MAXIMUM FACTORED GROSS REACTION</th><th colspan="2">INPUT BRG</th><th colspan="2">REQRD BRG</th></tr><tr><th>JT</th><th>VERT</th><th>HORZ</th><th>DOWN</th><th>HORZ</th><th>UPLIFT</th><th>IN-SX</th><th>IN-SX</th></tr><tr><td>L</td><td>296</td><td>0</td><td>296</td><td>0</td><td>0</td><td>31-1-4</td><td>(15-6-109)</td></tr><tr><td>H</td><td>296</td><td>0</td><td>296</td><td>0</td><td>0</td><td>31-1-4</td><td>(15-6-109)</td></tr><tr><td>K</td><td>864</td><td>0</td><td>864</td><td>0</td><td>0</td><td>31-1-4</td><td>(15-6-109)</td></tr><tr><td>J</td><td>681</td><td>0</td><td>681</td><td>0</td><td>0</td><td>31-1-4</td><td>(15-6-109)</td></tr><tr><td>I</td><td>864</td><td>0</td><td>864</td><td>0</td><td>0</td><td>31-1-4</td><td>(15-6-109)</td></tr></table> <u>VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH</u>											FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG		JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	L	296	0	296	0	0	31-1-4	(15-6-109)	H	296	0	296	0	0	31-1-4	(15-6-109)	K	864	0	864	0	0	31-1-4	(15-6-109)	J	681	0	681	0	0	31-1-4	(15-6-109)	I	864	0	864	0	0	31-1-4	(15-6-109)	DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C				
	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG																																																																					
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX																																																																					
L	296	0	296	0	0	31-1-4	(15-6-109)																																																																					
H	296	0	296	0	0	31-1-4	(15-6-109)																																																																					
K	864	0	864	0	0	31-1-4	(15-6-109)																																																																					
J	681	0	681	0	0	31-1-4	(15-6-109)																																																																					
I	864	0	864	0	0	31-1-4	(15-6-109)																																																																					

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW-t	MT20	3.0	4.0		
B	TMWW-t	MT20	4.0	4.0		
C	TS-t	MT20	3.0	6.0		
D	TMW+w	MT20	2.0	4.0		
E	TS-t	MT20	3.0	6.0		
F	TMWW-t	MT20	4.0	4.0		
G	TMVW-t	MT20	3.0	4.0		
H	BMV1+p	MT20	2.0	4.0		
I	BMWW1-t	MT20	4.0	4.0		
J	BSWWW1-I	MT20	5.0	8.0	3.00	4.00
K	BMWW1-t	MT20	4.0	4.0		
L	BMV1+p	MT20	2.0	4.0		

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336322	H161		1	TRUSS DESC. JT 45147	E21104295

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 10:16:11 2021 Page 1

ID:hd511hZTz_bdeQoS817GKByhVxV-Ak?E4OMqIPWzDK_PfAh40t_ehDpV31Wa5ON_7tyTY8l

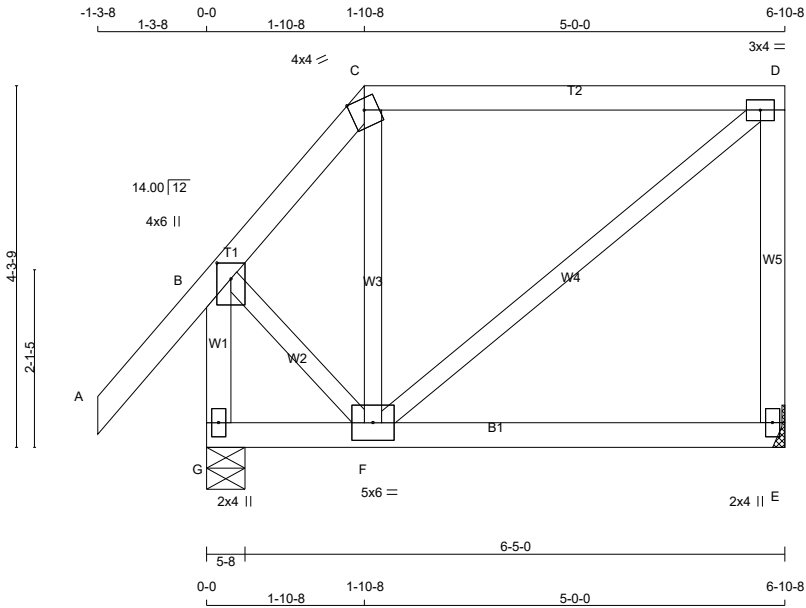

TOTAL WEIGHT = 35 lb [M]

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
A - C	2x4	DRY No.2	SPF	
A - D	2x4	DRY No.2	SPF	
E - D	2x4	DRY No.2	SPF	
G - B	2x4	DRY No.2	SPF	
G - E	2x4	DRY No.2	SPF	
ALL WEBS	2x3	DRY No.2	SPF	
EXCEPT				
DRY: SEASONED LUMBER.				

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	6.0	2.25 2.00
C	TTW-m	MT20	4.0	4.0	Edge
D	TMVW-t	MT20	3.0	4.0	
E	BMV1+p	MT20	2.0	4.0	
F	BMWWW-t	MT20	5.0	6.0	
G	BMV1+p	MT20	2.0	4.0	
Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.					

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER							
<u>BEARINGS</u>							
	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
E	320	0	320	0	0	MECHANICAL	
G	452	0	452	0	0	5-8	1-8
A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.							

UNFACTORED REACTIONS							
	1ST LCASE	MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
E	229	138 / 0	0 / 0	0 / 0	0 / 0	90 / 0	0 / 0
G	320	209 / 0	0 / 0	0 / 0	0 / 0	111 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) G

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.									
LOADING									
TOTAL LOAD CASES: (4)									
CHORDS					WEBS				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1	MAX CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)		
FR-TO		FROM	TO		FR-TO				
A- B	0 / 42	-78.0	-78.0	0.11 (1)	10.00	F- C	-96 / 13	0.03 (1)	
B- C	-204 / 0	-78.0	-78.0	0.11 (1)	6.25	F- D	0 / 140	0.03 (1)	
C- D	-109 / 0	-78.0	-78.0	0.33 (1)	6.25	B- F	0 / 148	0.03 (1)	
E- D	-283 / 0	0.0	0.0	0.08 (1)	7.81				
G- B	-453 / 0	0.0	0.0	0.05 (1)	7.81				
G- F	0 / 0	-18.5	-18.5	0.09 (4)	10.00				
F- E	0 / 0	-18.5	-18.5	0.09 (4)	10.00				

DESIGN CRITERIA			
SPECIFIED LOADS:			
TOP CH.	LL	=	21.0 PSF
	DL	=	6.0 PSF
BOT CH.	LL	=	0.0 PSF
	DL	=	7.4 PSF
TOTAL LOAD = 34.4 PSF			

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.23")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.23")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.02")

CSI: TC=0.33/1.00 (C-D:1) , BC=0.09/1.00 (F-G:4) , WB=0.03/1.00 (B-F:1) , SSI=0.15/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.27 (D) (INPUT = 0.90)
JSI METAL= 0.11 (B) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336322	H162		1	TRUSS DESC. JT 45147	E21104296

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 10:16:12 2021 Page 1

ID:hd511hZTz_bdeQoS817GKByhVxV-ewZcHkNSWJeqqTZbDuCJZ4Wq9dADoTTkK27XfJyTY3H

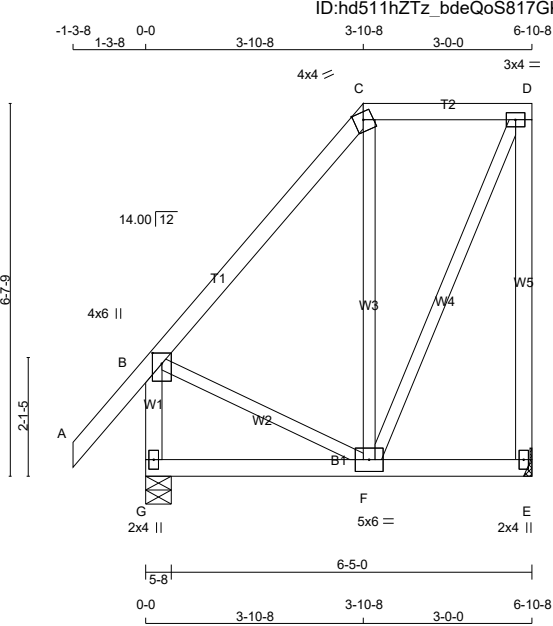

TOTAL WEIGHT = 43 lb

[M][F]

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER		DESCR.
A - C	2x4	DRY	No.2	SPF
C - D	2x4	DRY	No.2	SPF
E - D	2x4	DRY	No.2	SPF
G - B	2x4	DRY	No.2	SPF
G - E	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
EXCEPT				
DRY: SEASONED LUMBER.				

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	6.0	2.25	2.00
C	TTW-m	MT20	4.0	4.0	Edge	
D	TMVW-t	MT20	3.0	4.0		
E	BMV1+p	MT20	2.0	4.0		
F	BMVWW-t	MT20	5.0	6.0		
G	BMV1+p	MT20	2.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG	
	VERT	HORZ	DOWN	HORZ		IN-SX	IN-SX
JT	332	0	332	0	UPLIFT	MECHANICAL	
E	332	0	332	0	0	5-8	1-8
G	441	0	441	0	0		

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

UNFACTORED REACTIONS

	1ST LCASE COMBINED	MAX./MIN. COMPONENT REACTIONS					
		SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
JT	236	144 / 0	0 / 0	0 / 0	0 / 0	92 / 0	0 / 0
E	236	144 / 0	0 / 0	0 / 0	0 / 0	92 / 0	0 / 0
G	312	203 / 0	0 / 0	0 / 0	0 / 0	109 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) G

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS					WEBS				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1	MAX CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)	
FR-TO		FROM	TO			FR-TO			
A-B	0 / 42	-78.0	-78.0	0.11 (1)	10.00	F-C	-160 / 0	0.12 (1)	
B-C	-143 / 0	-78.0	-78.0	0.15 (1)	6.25	F-D	0 / 217	0.05 (1)	
C-D	-90 / 0	-78.0	-78.0	0.09 (1)	6.25	B-F	0 / 101	0.02 (1)	
E-D	-313 / 0	0.0	0.0	0.29 (1)	7.81				
G-B	-410 / 0	0.0	0.0	0.05 (1)	7.81				
G-F	0 / 0	-18.5	-18.5	0.06 (4)	10.00				
F-E	0 / 0	-18.5	-18.5	0.06 (4)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 21.0 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCS 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.23")
CALCULATED VERT. DEFL.(LL)= L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.23")
CALCULATED VERT. DEFL.(TL)= L/ 999 (0.01")

CSI: TC=0.29/1.00 (D-E:1) , BC=0.06/1.00 (F-G:4) , WB=0.12/1.00 (C-F:1) , SSI=0.09/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.47 (D) (INPUT = 0.90)
JSI METAL= 0.11 (B) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336322	H163		1	TRUSS DESC. JT 45147	E21104297

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 10:16:13 2021 Page 1

ID:hd511hZTz_bdeQoS817GKByhVxV-666?U4N4H0mhSd8nmbjY5I3z00SRXwbYis5BmyTY3G

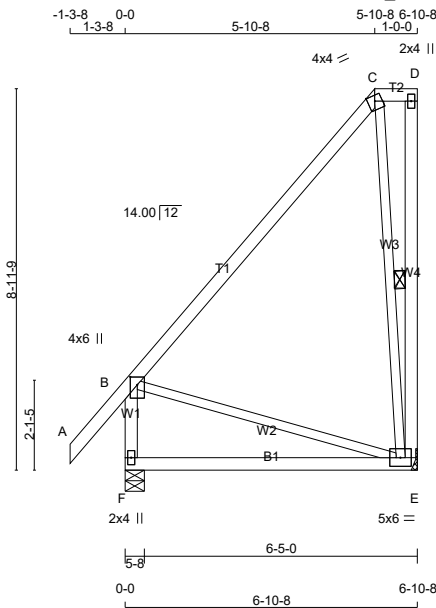

Scale = 1:54.2

TOTAL WEIGHT = 45 lb
[M][F]

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE		LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF
C - D	2x4	DRY	No.2	SPF
E - D	2x4	DRY	No.2	SPF
F - B	2x4	DRY	No.2	SPF
F - E	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
EXCEPT				
DRY: SEASONED LUMBER.				

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	6.0	2.25	2.00
C	TTW-m	MT20	4.0	4.0	Edge	
D	TMV+p	MT20	2.0	4.0		
E	BMVWW1-t	MT20	5.0	6.0		
F	BMV1+p	MT20	2.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG
	VERT	HORZ	DOWN	HORZ		
JT	332	0	332	0	0/0	0/0
E	332	0	332	0	0/0	0/0
F	441	0	441	0	5-8	1-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

UNFACTORED REACTIONS

	1ST LCASE COMBINED	MAX./MIN. COMPONENT REACTIONS					
		SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
JT	236	144 / 0	0 / 0	0 / 0	0 / 0	92 / 0	0 / 0
E	236	144 / 0	0 / 0	0 / 0	0 / 0	92 / 0	0 / 0
F	312	203 / 0	0 / 0	0 / 0	0 / 0	109 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF D-E, C-E.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRAC LENGTH FR-TO	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)
FR-TO		FROM TO					
A-B	0 / 42	-78.0 -78.0	0.11 (1)	10.00	C-E	-238 / 0	0.12 (1)
B-C	-42 / 0	-78.0 -78.0	0.34 (1)	6.25	B-E	0 / 28	0.01 (1)
C-D	0 / 0	-78.0 -78.0	0.01 (1)	10.00			
E-D	-39 / 0	0.0 0.0	0.01 (1)	6.25			
F-B	-377 / 0	0.0 0.0	0.04 (1)	7.81			
F-E	0 / 0	-18.5 -18.5	0.26 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 21.0 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(TL)= L/360 (0.23")
CALCULATED VERT. DEFL.(TL)= L/ 819 (0.10")

CSI: TC=0.34/1.00 (B-C:1) , BC=0.26/1.00 (E-F:4) ,
WB=0.12/1.00 (C-E:1) , SSI=0.12/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.21 (B) (INPUT = 0.90)
JSI METAL= 0.13 (C) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:36:49 2021 Page 1



DRY: SEASONED LUMBER.


Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

1) **C1:** A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

COMPANION LIVE LOAD FACTOR = 1.00

Scale = 1:50.5

CONTINUED ON PAGE 2

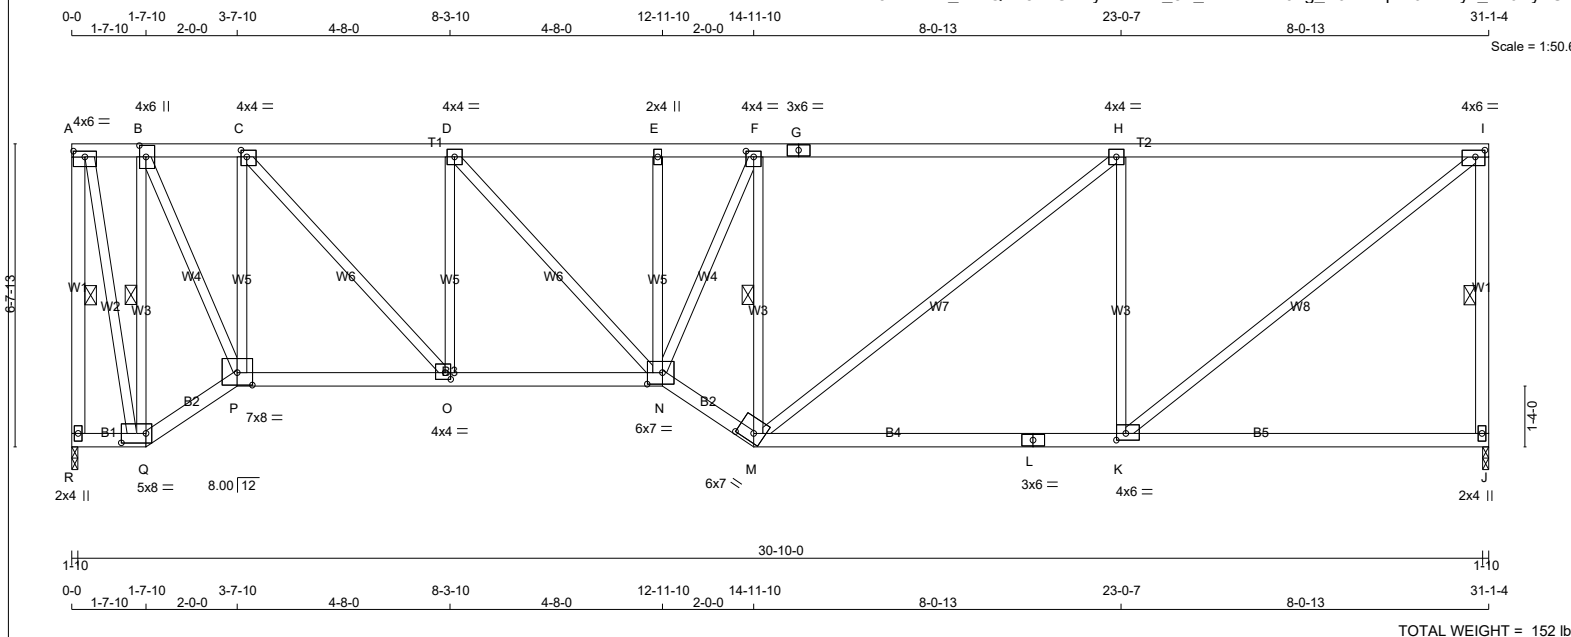

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE		LUMBER	DESCR.
R - A	2x4	DRY	No.2	SPF
A - G	2x4	DRY	1650F 1.5E	SPF
G - I	2x4	DRY	1650F 1.5E	SPF
J - I	2x4	DRY	No.2	SPF
R - Q	2x4	DRY	No.2	SPF
Q - P	2x4	DRY	No.2	SPF
P - N	2x4	DRY	No.2	SPF
N - M	2x4	DRY	No.2	SPF
M - L	2x4	DRY	No.2	SPF
L - J	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW-t	MT20	4.0	6.0	1.50	3.75
B	TMVW+t	MT20	4.0	6.0	3.00	1.00
C	TMVW-t	MT20	4.0	4.0	1.75	1.50
D	TMVW-t	MT20	4.0	4.0		
E	TMVW+w	MT20	2.0	4.0		
F	TMVW-t	MT20	4.0	4.0	1.50	2.00
G	TS-t	MT20	3.0	6.0		
H	TMVW-t	MT20	4.0	4.0		
I	TMVW-t	MT20	4.0	6.0	1.75	2.50
J	BMV1+p	MT20	2.0	4.0		
K	BMVW-t	MT20	4.0	6.0	1.75	2.50
L	BS-t	MT20	3.0	6.0		
M	BBVW-h	MT20	6.0	7.0	2.25	4.25
N	BBVW-w-p	MT20	6.0	7.0	3.00	4.00
O	BMVW-t	MT20	4.0	4.0	1.75	1.50
P	BBVW-t	MT20	7.0	8.0	3.25	4.00
Q	BBVW-t	MT20	5.0	8.0	2.50	6.50
R	BMV1+p	MT20	2.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

	FACTORED		MAXIMUM FACTORED			INPUT	REQRD
	GROSS REACTION		GROSS REACTION			BRG	BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
R	1500	0	1500	0	0	1-10	1-10
J	1500	0	1500	0	0	1-10	1-10

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
R	1070	653 / 0	0 / 0	0 / 0	0 / 0	417 / 0	0 / 0
J	1070	653 / 0	0 / 0	0 / 0	0 / 0	417 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.38 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF A-R, I-J, B-Q, F-M.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS					WEBS				
MAX. FACTORED		FACTORED			MAX. FACTORED				
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRAC	MEMB.	FORCE (LBS)	MAX CSI (LC)		
FR-TO		FROM TO		LENGTH	FR-TO				
R-A	-1485 / 0	0.0	0.0	0.30 (1)	5.38	A-Q	0 / 1435	0.32 (1)	
A-B	-358 / 0	-78.0	-78.0	0.07 (1)	6.25	B-Q	-1577 / 0	0.45 (1)	
B-C	-975 / 0	-78.0	-78.0	0.10 (1)	6.25	B-P	0 / 1661	0.37 (1)	
C-D	-1856 / 0	-78.0	-78.0	0.22 (1)	5.28	P-C	-1253 / 0	0.53 (1)	
D-E	-2272 / 0	-78.0	-78.0	0.23 (1)	4.88	C-O	0 / 1272	0.29 (1)	
E-F	-2269 / 0	-78.0	-78.0	0.34 (1)	4.70	O-D	-848 / 0	0.36 (1)	
F-G	-1883 / 0	-78.0	-78.0	0.81 (1)	4.38	D-N	0 / 610	0.14 (1)	
G-H	-1883 / 0	-78.0	-78.0	0.81 (1)	4.38	N-E	-124 / 0	0.05 (1)	
H-I	-1518 / 0	-78.0	-78.0	0.77 (1)	4.80	N-F	0 / 1059	0.24 (1)	
J-I	-1443 / 0	0.0	0.0	0.29 (1)	5.44	M-F	-1448 / 0	0.41 (1)	
						M-H	0 / 465	0.10 (1)	
R-Q	0 / 0	-18.5	-18.5	0.01 (4)	10.00	K-H	-1016 / 0	0.74 (1)	
Q-P	0 / 399	-18.5	-18.5	0.08 (1)	10.00	K-I	0 / 1932	0.43 (1)	
P-O	0 / 1001	-18.5	-18.5	0.21 (1)	10.00				
O-N	0 / 1856	-18.5	-18.5	0.35 (1)	10.00				
N-M	0 / 2234	-18.5	-18.5	0.37 (1)	10.00				
M-L	0 / 1518	-18.5	-18.5	0.49 (4)	10.00				
L-K	0 / 1518	-18.5	-18.5	0.49 (4)	10.00				
K-J	0 / 0	-18.5	-18.5	0.34 (4)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL	=	21.0	PSF
		DL	=	6.0	PSF
BOT	CH.	LL	=	0.0	PSF
		DL	=	7.4	PSF
TOTAL LOAD				=	34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE
OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.04")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.13")
ALLOWABLE DEFL.(TL)= L/360 (1.04")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.29")

CSI: TC=0.81/1.00 (F-H:1), BC=0.49/1.00 (K-M:4), WB=0.74/1.00 (H-K:1), SSI=0.30/1.00 (H-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES					
PLATE	GRIP(DRY)		SHEAR		SECTION
	(PSI)		(PLI)		(PLI)
	MAX	MIN	MAX	MIN	MAX MIN
MT20	650	371	1747	788	1987 1873


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (C) (INPUT = 0.90)
JSI METAL= 0.43 (M) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



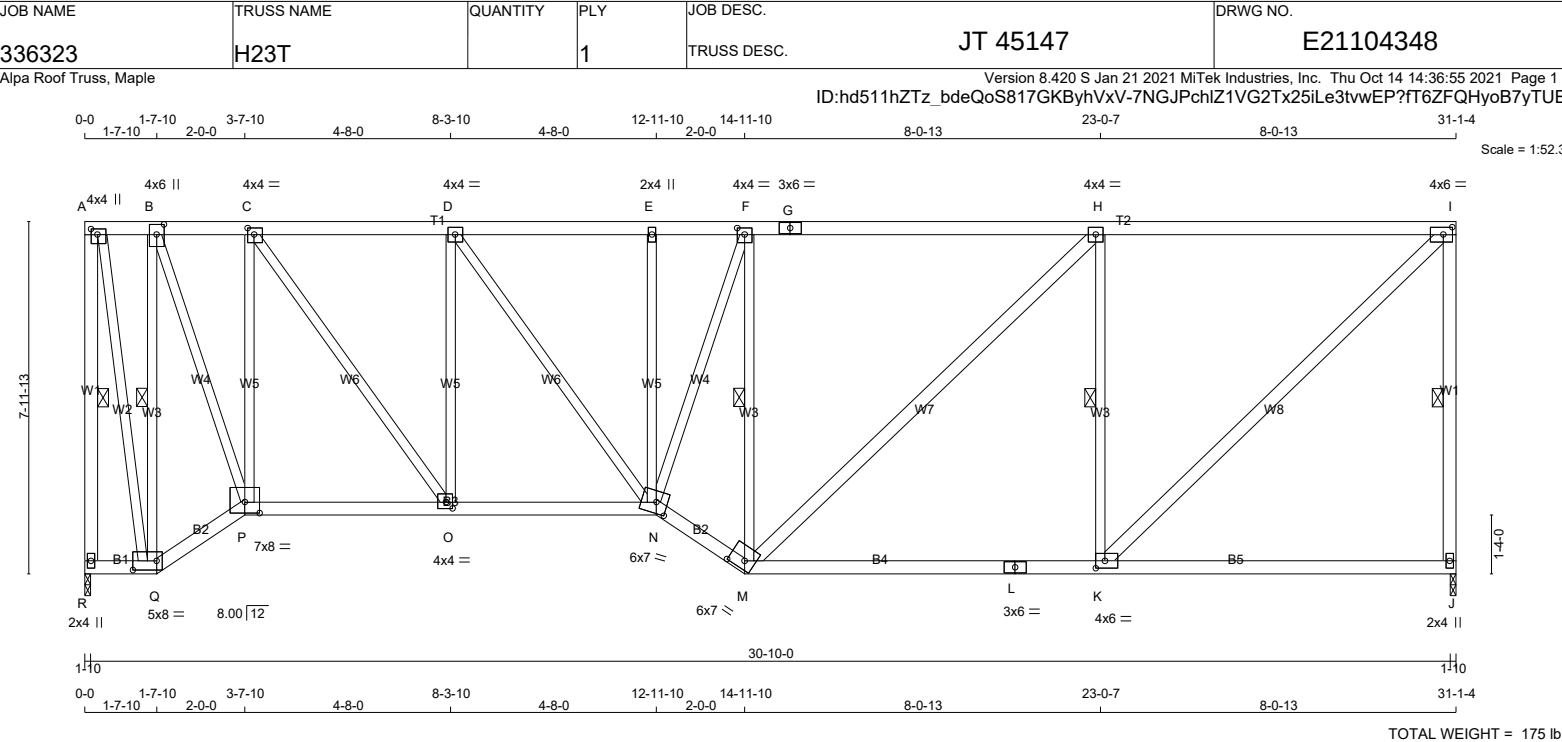

LUMBER				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER				DESIGN CRITERIA			
N. L. G. A. RULES				BEARINGS				SPECIFIED LOADS:			
CHORDS	SIZE		LUMBER	DESCR.	FACTORED	MAXIMUM FACTORED	INPUT	REQRD	TOP CH.	LL	PSF
R - A	2x4	DRY	No.2	SPF	GROSS REACTION	GROSS REACTION	BRG	BRG	DL	6.0	PSF
A - G	2x4	DRY	No.2	SPF	VERT	HORZ	DOWN	HORZ	BOT CH.	LL	0.0
G - I	2x4	DRY	No.2	SPF	R	1500	0	1500	0	0	1-10
J - I	2x4	DRY	No.2	SPF	J	1500	0	1500	0	0	1-10
R - Q	2x4	DRY	No.2	SPF					DL	7.4	PSF
Q - P	2x4	DRY	No.2	SPF					TOTAL LOAD	=	34.4
P - N	2x4	DRY	No.2	SPF							
N - M	2x4	DRY	No.2	SPF							
M - L	2x4	DRY	No.2	SPF							
L - J	2x4	DRY	No.2	SPF							
ALL WEBS	2x3	DRY	No.2	SPF							
EXCEPT				SPF							
M - H	2x4	DRY	No.2	SPF							
K - I	2x4	DRY	No.2	SPF							

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMVW+p	MT20	4.0	4.0	1.50 1.75
B	TMWW+t	MT20	4.0	6.0	2.75 2.00
C	TMWW-t	MT20	4.0	4.0	1.75 1.75
D	TMWW-t	MT20	4.0	4.0	
E	TMW+w	MT20	2.0	4.0	
F	TMWW-t	MT20	4.0	4.0	1.75 2.00
G	TS-t	MT20	3.0	6.0	
H	TMWW-t	MT20	4.0	4.0	
I	TMVW-t	MT20	4.0	6.0	2.00 2.50
J	BMV1+p	MT20	2.0	4.0	
K	BMWW-t	MT20	4.0	6.0	2.00 2.50
L	BS-t	MT20	3.0	6.0	
M	BBWW-h	MT20	6.0	7.0	2.25 4.25
N	BBWWW-m	MT20	6.0	7.0	3.00 3.00
O	BMWW-t	MT20	4.0	4.0	1.75 1.75
P	BBWW-t	MT20	7.0	8.0	3.00 4.00
Q	BBWW-t	MT20	5.0	8.0	2.50 6.50
R	BMV1+p	MT20	2.0	4.0	

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



UNFACTORED REACTIONS									
1ST LCASE	MAX./MIN.	COMPONENT	REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL		
R	1070	653 / 0	0 / 0	0 / 0	0 / 0	417 / 0	0 / 0		
J	1070	653 / 0	0 / 0	0 / 0	0 / 0	417 / 0	0 / 0		

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J
 BRACING
 TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.72 FT.
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.


ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1 / 2 LENGTH OF A-R, I-J, B-Q, F-M, H-K.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING				TOTAL LOAD CASES: (4)			
CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH	FR-TO
FR-TO		FROM	TO	FR-TO			
R-A	-1485 / 0	0.0	0.0 0.43 (1)	A-Q	0 / 1420	0.32 (1)	
A-B	-296 / 0	-78.0	-78.0 0.08 (1)	Q-B	-1539 / 0	0.62 (1)	
B-C	-770 / 0	-78.0	-78.0 0.12 (1)	B-P	0 / 1572	0.35 (1)	
C-D	-1468 / 0	-78.0	-78.0 0.27 (1)	P-C	-1253 / 0	0.92 (1)	
D-E	-1795 / 0	-78.0	-78.0 0.29 (1)	C-O	0 / 1162	0.26 (1)	
E-F	-1793 / 0	-78.0	-78.0 0.41 (1)	O-D	-848 / 0	0.62 (1)	
F-G	-1556 / 0	-78.0	-78.0 1.00 (1)	D-N	0 / 552	0.12 (1)	
G-H	-1556 / 0	-78.0	-78.0 1.00 (1)	N-E	-125 / 0	0.09 (1)	
H-I	-1256 / 0	-78.0	-78.0 0.94 (1)	N-F	0 / 805	0.18 (1)	
I-J	-1443 / 0	0.0	0.0 0.41 (1)	M-F	-1235 / 0	0.50 (1)	
				M-H	0 / 415	0.07 (1)	
R-Q	0 / 0	-18.5	-18.5 0.01 (4)	K-H	-1015 / 0	0.41 (1)	
Q-P	0 / 330	-18.5	-18.5 0.07 (1)	K-I	0 / 1735	0.28 (1)	
P-O	0 / 790	-18.5	-18.5 0.18 (4)				
O-N	0 / 1468	-18.5	-18.5 0.29 (1)				
N-M	0 / 1850	-18.5	-18.5 0.31 (1)				
M-L	0 / 1256	-18.5	-18.5 0.47 (4)				
L-K	0 / 1256	-18.5	-18.5 0.47 (4)				
K-J	0 / 0	-18.5	-18.5 0.35 (4)				

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H24T		1	TRUSS DESC. JT 45147	E21104349

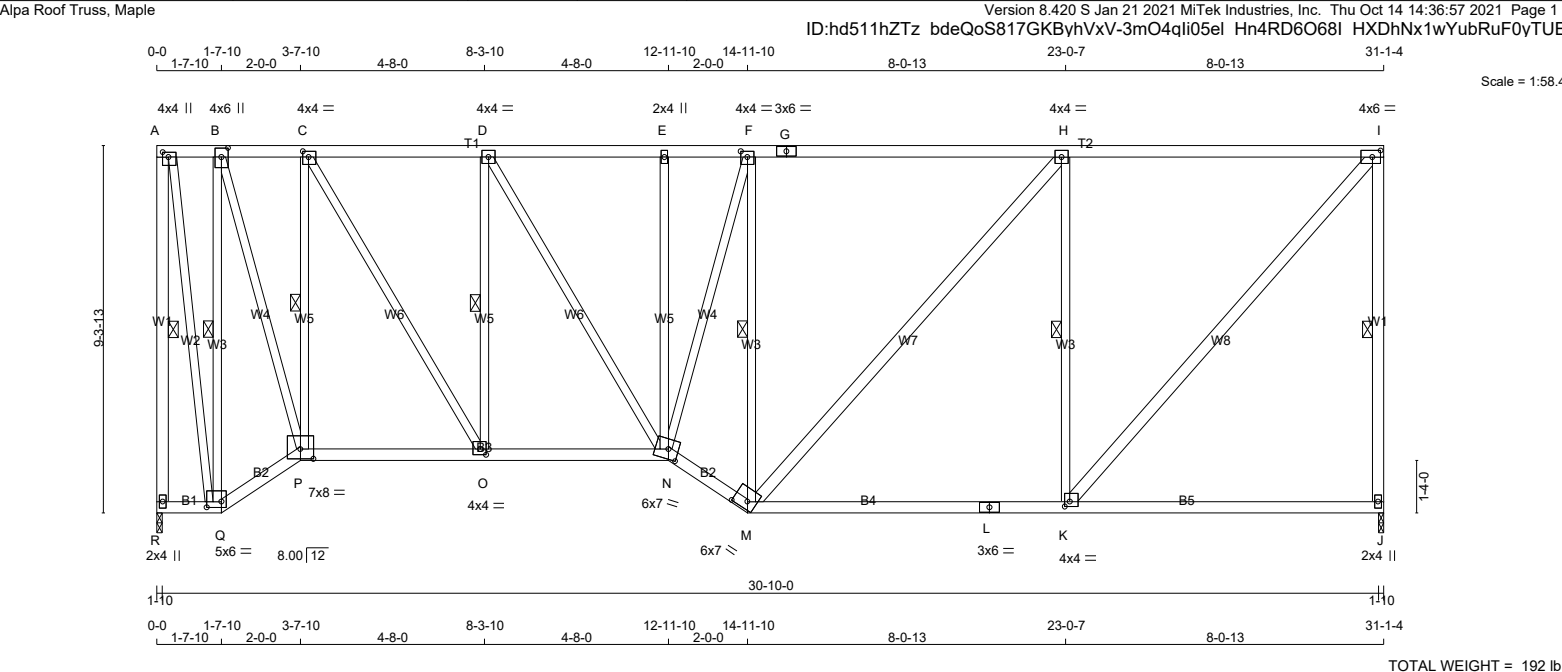

LUMBER				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER				DESIGN CRITERIA			
N. L. G. A. RULES				BEARINGS				SPECIFIED LOADS:			
CHORDS	SIZE	LUMBER	DESCR.	FACTORED	MAXIMUM FACTORED	INPUT	REQRD	TOP CH.	LL	=	21.0 PSF
R - A	2x4	DRY	No.2	GROSS REACTION	GROSS REACTION	BRG	BRG	DL	=	6.0 PSF	
A - G	2x4	DRY	No.2	VERT	HORZ	DOWN	HORZ	BOT CH.	LL	=	0.0 PSF
G - I	2x4	DRY	No.2	JT		1500	0	DL	=	7.4 PSF	
J - I	2x4	DRY	No.2	R		1500	0	TOTAL LOAD	=	34.4 PSF	
R - Q	2x4	DRY	No.2	J		1500	0				
Q - P	2x4	DRY	No.2								
P - N	2x4	DRY	No.2								
N - M	2x4	DRY	No.2								
M - L	2x4	DRY	No.2								
L - J	2x4	DRY	No.2								
ALL WEBS	2x3	DRY	No.2								
EXCEPT											
M - H	2x4	DRY	No.2								
K - I	2x4	DRY	No.2								

DRY: SEASONED LUMBER.

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.03 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF A-R, I-J, B-Q, C-P, D-O, F-M, H-K.

PLATES (table is in inches)				LOADING				ALLOWABLE DEFL.			
JT	TYPE	PLATES	W	LEN	Y	X	TOTAL LOAD CASES: (4)	ALLOWABLE DEFL.(LL)=	L/360 (1.04")		
A	TMVW+p	MT20	4.0	4.0	1.50	1.75		CALCULATED VERT. DEFL.(LL)=	L/ 999 (0.11")		
B	TMWW+t	MT20	4.0	6.0	2.75	2.00		ALLOWABLE DEFL.(TL)=	L/360 (1.04")		
C	TMWW-t	MT20	4.0	4.0	1.75	1.75		CALCULATED VERT. DEFL.(TL)=	L/ 999 (0.24")		
D	TMWW-t	MT20	4.0	4.0							
E	TMW+w	MT20	2.0	4.0							
F	TMWW-t	MT20	4.0	4.0	1.75	2.00					
G	TS-t	MT20	3.0	6.0							
H	TMWW-t	MT20	4.0	4.0							
I	TMVW-t	MT20	4.0	6.0	2.00	2.50					
J	BMV1+p	MT20	2.0	4.0							
K	BMWW-t	MT20	4.0	4.0	1.50	1.50					
L	BS-t	MT20	3.0	6.0							
M	BBWW-h	MT20	6.0	7.0	2.25	4.25					
N	BBWW-m	MT20	6.0	7.0	3.00	3.00					
O	BMWW-t	MT20	4.0	4.0	1.75	1.75					
P	BBWW-t	MT20	7.0	8.0	3.00	4.00					
Q	BBWW-t	MT20	5.0	6.0	1.75	4.50					
R	BMV1+p	MT20	2.0	4.0							

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2

CS: TC=0.95/1.00 (F-H:1), BC=0.45/1.00 (K-M:4), WB=0.86/1.00 (B-Q:1), SSI=0.30/1.00 (H-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)

MAX MIN MAX MIN MAX MIN

MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (Q) (INPUT = 0.90)

JSI METAL= 0.36 (K) (INPUT = 1.00)




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H25T		1	TRUSS DESC. JT 45147	E21104350

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:36:59 2021 Page 1

ID:hd511hZTz_bdeQoS817GKByhVxV-?8WqF_kGdF?iW4EqkXQaDj4de0N2PxNqLvw?KuyTUe0

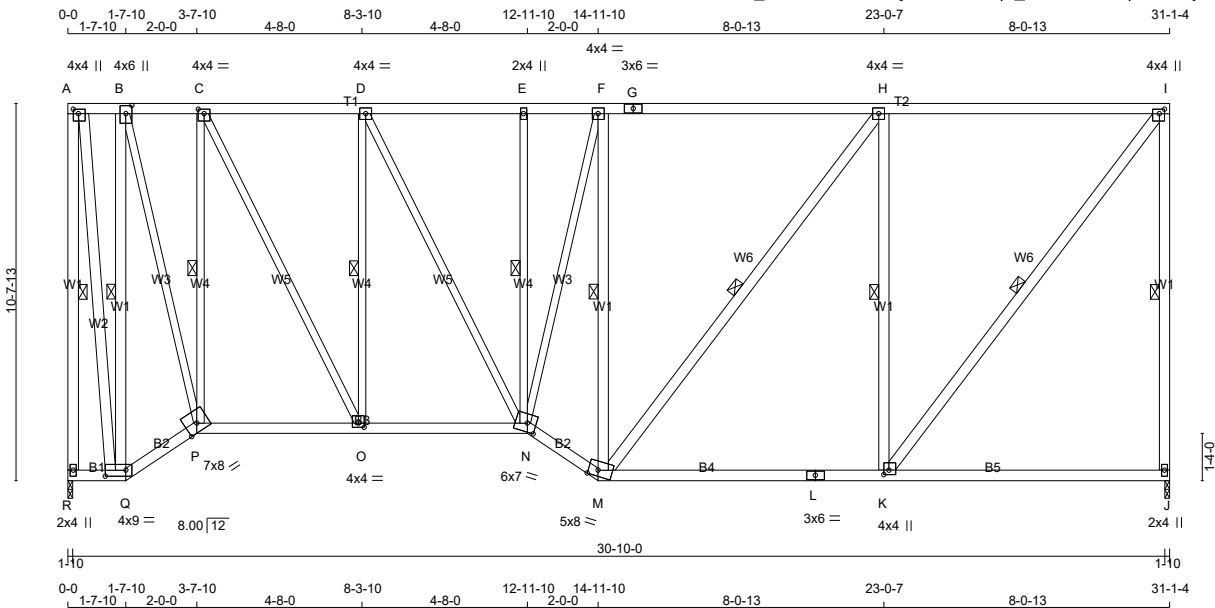

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
R - A	2x4	DRY No.2	SPF
A - G	2x4	DRY No.2	SPF
G - I	2x4	DRY No.2	SPF
J - I	2x4	DRY No.2	SPF
R - Q	2x4	DRY No.2	SPF
Q - P	2x4	DRY No.2	SPF
P - N	2x4	DRY No.2	SPF
N - M	2x4	DRY No.2	SPF
M - L	2x4	DRY No.2	SPF
L - J	2x4	DRY No.2	SPF
ALL WEBS EXCEPT	2x3	DRY No.2	SPF
A - Q	2x4	DRY No.2	SPF
Q - B	2x4	DRY No.2	SPF
M - F	2x4	DRY No.2	SPF
M - H	2x4	DRY No.2	SPF
K - H	2x4	DRY No.2	SPF
K - I	2x4	DRY No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)				
JT TYPE	PLATES	W	LEN	Y X
A TMVW+p	MT20	4.0	4.0	1.50 1.75
B TMWW+t	MT20	4.0	6.0	2.75 2.00
C TMWW-t	MT20	4.0	4.0	1.50 2.00
D, F, H				
D TMWW-t	MT20	4.0	4.0	
E TMW+w	MT20	2.0	4.0	
G TS-t	MT20	3.0	6.0	
I TMVW+p	MT20	4.0	4.0	1.50 1.75
J BMV1+p	MT20	2.0	4.0	
K BMWW+t	MT20	4.0	4.0	1.50 1.75
L BS-t	MT20	3.0	6.0	
M BBWW-m	MT20	5.0	8.0	2.00 3.25
N BBWWW-m	MT20	6.0	7.0	3.00 3.00
O BMWW-t	MT20	4.0	4.0	1.50 2.00
P BBWW-h	MT20	7.0	8.0	Edge
Q BBWW-l	MT20	4.0	9.0	2.00 7.00
R BMV1+p	MT20	2.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG UPLIFT		REQRD BRG IN-SX	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	IN-SX	IN-SX
R	1500	0	1500	0	0	1-10	1-10	1-10	1-10
J	1500	0	1500	0	0	1-10	1-10	1-10	1-10

UNFACTORED REACTIONS		1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL	DEAD	SOIL
R	1070	653 / 0	0 / 0	0 / 0	0 / 0	417 / 0	0 / 0	417 / 0	0 / 0
J	1070	653 / 0	0 / 0	0 / 0	0 / 0	417 / 0	0 / 0	417 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.30 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1 / 2 LENGTH OF A-R, I-J, B-Q, C-P, D-O, E-N, F-M, H-M, H-K, I-K.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING		TOTAL LOAD CASES: (4)							
CHORDS		MAX. FACTORED		FACTORED		WEBS		MAX. FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX (LC)	MAX. UNBRAC LENGTH	FR-TO	MEMB.	FORCE (LBS)	MAX. UNBRAC LENGTH	FR-TO
R-A	-1485 / 0	0.0	0.0 0.85 (1)	5.38	A-Q	0 / 1428	0.23 (1)		
A-B	-223 / 0	-78.0	-78.0 0.05 (1)	6.25	Q-B	-1511 / 0	0.86 (1)		
B-C	-541 / 0	-78.0	-78.0 0.10 (1)	6.25	B-P	0 / 1464	0.33 (1)		
C-D	-1035 / 0	-78.0	-78.0 0.25 (1)	5.85	P-C	-1235 / 0	0.70 (1)		
D-E	-1264 / 0	-78.0	-78.0 0.26 (1)	5.41	C-O	0 / 1063	0.24 (1)		
E-F	-1263 / 0	-78.0	-78.0 0.39 (1)	5.19	O-D	-850 / 0	0.48 (1)		
F-G	-1156 / 0	-78.0	-78.0 0.91 (1)	4.30	D-N	0 / 499	0.11 (1)		
G-H	-1156 / 0	-78.0	-78.0 0.91 (1)	4.30	N-E	-131 / 0	0.07 (1)		
H-I	-932 / 0	-78.0	-78.0 0.88 (1)	4.72	E-F	0 / 519	0.12 (1)		
I-J	-1443 / 0	0.0	0.0 0.82 (1)	5.44	F-G	-971 / 0	0.55 (1)		
R-Q	0 / 0	-18.5	-18.5 0.01 (4)	10.00	G-H	0 / 364	0.06 (1)		
Q-P	0 / 242	-18.5	-18.5 0.05 (1)	10.00	H-I	-1014 / 0	0.58 (1)		
P-O	0 / 555	-18.5	-18.5 0.16 (4)	10.00	I-J	0 / 1518	0.24 (1)		
O-N	0 / 1035	-18.5	-18.5 0.22 (1)	10.00					
N-M	0 / 1373	-18.5	-18.5 0.23 (1)	10.00					
M-L	0 / 933	-18.5	-18.5 0.44 (4)	10.00					
L-K	0 / 933	-18.5	-18.5 0.44 (4)	10.00					
K-J	0 / 0	-18.5	-18.5 0.35 (4)	10.00					

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	21.0	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD	=	34.4	PSF	

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.04")
CALCULATED VERT. DEFL.(LL)= L/ 999 (0.10")
ALLOWABLE DEFL.(TL)= L/360 (1.04")
CALCULATED VERT. DEFL.(TL)= L/ 999 (0.23")

CSI: TC=0.91/1.00 (F-H:1) , BC=0.44/1.00 (K-M:4) , WB=0.86/1.00 (B-Q:1) , SSI=0.30/1.00 (H-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (K) (INPUT = 0.90)
JSI METAL= 0.41 (I) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H27P		1	TRUSS DESC. JT 45147	E21104351

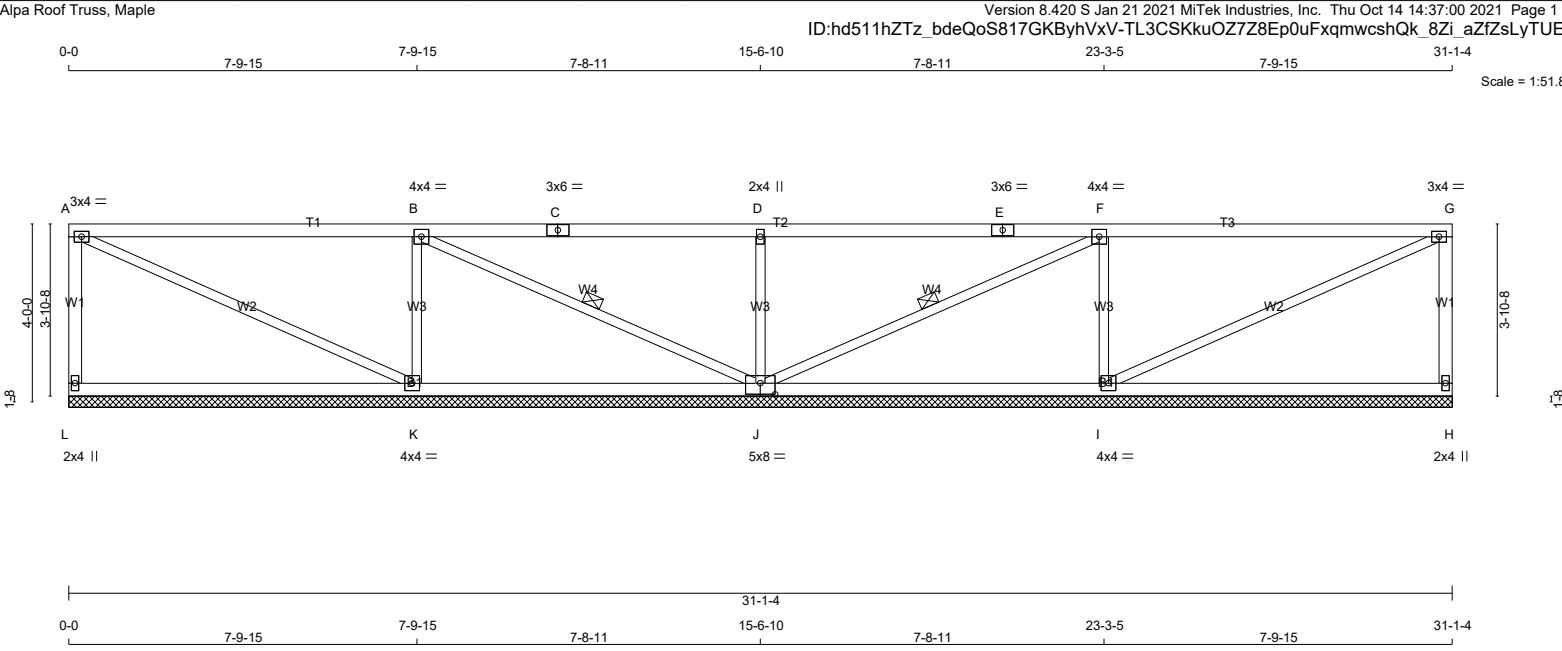


LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR.				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS						DESIGN CRITERIA				[M]	
L - A	2x4	DRY	No.2	SPF	FACTORED	MAXIMUM FACTORED	INPUT	REQRD	SPECIFIED LOADS:						
A - C	2x4	DRY	No.2	SPF	GROSS REACTION	GROSS REACTION	BRG	BRG	TOP CH. LL = 21.0 PSF						
C - E	2x4	DRY	No.2	SPF	JT VERT HORZ	DOWN HORZ UPLIFT	IN-SX	IN-SX	DL = 6.0 PSF						
E - G	2x4	DRY	No.2	SPF	L 297 0	297 0 0	31-1.4 (15-6-10.9)		BOT CH. LL = 0.0 PSF						
H - G	2x4	DRY	No.2	SPF	H 297 0	297 0 0	31-1.4 (15-6-10.9)		DL = 7.4 PSF						
L - J	2x4	DRY	No.2	SPF	K 840 0	840 0 0	31-1.4 (15-6-10.9)		TOTAL LOAD = 34.4 PSF						
J - H	2x4	DRY	No.2	SPF	J 728 0	728 0 0	31-1.4 (15-6-10.9)		SPACING = 24.0 IN. C/C						
I	840	0	840	0 0	31-1.4 (15-6-10.9)										
ALL WEBS 2x3 DRY: SEASONED LUMBER.				SPF	VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH										

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMVW-t	MT20	3.0	4.0	
B	TMWW-t	MT20	4.0	4.0	
C	TS-t	MT20	3.0	6.0	
D	TMW+w	MT20	2.0	4.0	
E	TS-t	MT20	3.0	6.0	
F	TMWW-t	MT20	4.0	4.0	
G	TMVW-t	MT20	3.0	4.0	
H	BMV1+p	MT20	2.0	4.0	
I	BMWW1-t	MT20	4.0	4.0	
J	BSWWW1-t	MT20	5.0	8.0	3.00 4.00
K	BMWW1-t	MT20	4.0	4.0	
L	BMV1+p	MT20	2.0	4.0	

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



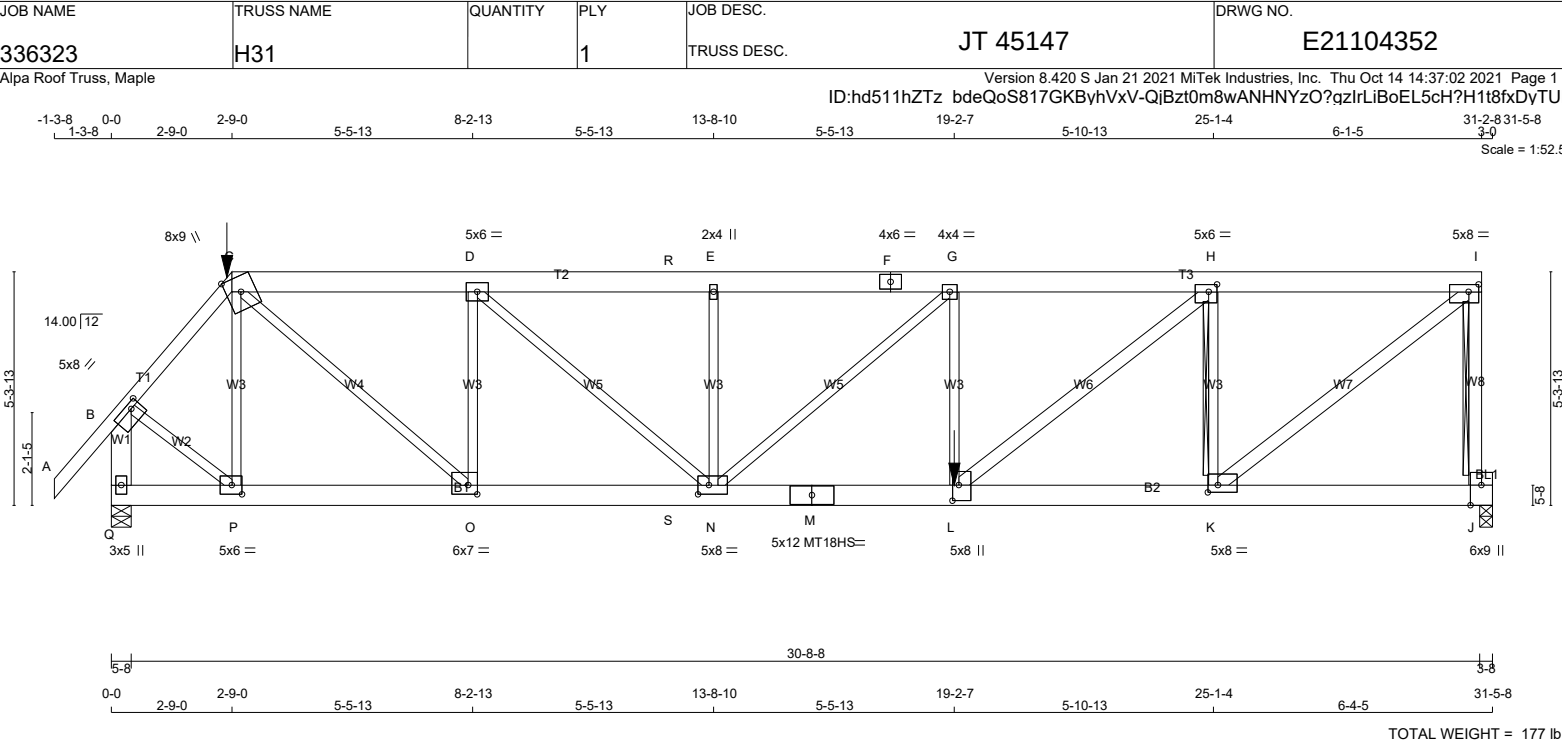

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY No.2	SPF
C - F	2x6	DRY No.2	SPF
F - I	2x6	DRY No.2	SPF
J - I	2x4	DRY No.2	SPF
Q - B	2x6	DRY No.2	SPF
Q - M	2x6	DRY 1650F 1.5E	SPF
M - J	2x6	DRY 1650F 1.5E	SPF

BEARING BLOCKS	SIZE	LUMBER	DESCR.
BL1	2x4	DRY No.2	SPF

ALL WEBS EXCEPT	SIZE	LUMBER	DESCR.
L - H	2x4	DRY No.2	SPF
K - I	2x4	DRY No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-t	MT20	5.0	8.0	1.50	2.50
C	TTWW+m	MT20	8.0	9.0	Edge	
D	TMWW-t	MT20	5.0	6.0		
E	TMW+w	MT20	2.0	4.0		
F	TS-t	MT20	4.0	6.0		
G	TMWW-t	MT20	4.0	4.0		
H	TMWW-t	MT20	5.0	6.0	2.00	2.25
I	TMVW-t	MT20	5.0	8.0	2.00	2.75
J	BMVK1+t	MT20	6.0	9.0	Edge	3.00
K	BMWW-t	MT20	5.0	8.0	2.00	2.75
L	BMWW+t	MT20	5.0	8.0	4.25	1.75
M	BS-t	MT18HS	5.0	12.0		
N	BMWWW-t	MT20	5.0	8.0	2.50	3.00
O	BMWW-t	MT20	6.0	7.0	2.50	2.50
P	BMWW-t	MT20	5.0	6.0	2.50	2.75
Q	BMV1+p	MT20	3.0	5.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ
J	2995	0	2995	0
Q	3389	0	3389	0

UNFACTORED REACTIONS

	1ST LCASE	MAX./MIN.	COMPONENT REACTIONS
JT	COMBINED	SNOW	LIVE
J	2135	1305 / 0	0 / 0
Q	2415	1480 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) J, Q
BEARING SIZE FACTOR = 1.15 AT JNT(S) J (BASED ON SUPPORT DEPTH = 1-8)

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.12 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

2x3 DRY SPF No.2 T-BRACE AT I-J, H-K

FASTEN T AND I-BRACES TO NARROW EDGE OF WEB WITH ONE ROW PER PLY OF 3" COMMON WIRE NAILS @ 6" O.C. WITH 3" MINIMUM END DISTANCE. BRACE MUST COVER 90% OF WEB LENGTH.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	FORCE (LBS)	MAX. FACTORED CSI (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 42	-78.0 -78.0	0.12 (1)	10.00	P-C	-822 / 0	0.31 (1)
B-C	-2791 / 0	-78.0 -78.0	0.24 (1)	3.94	C-O	0 / 3521	0.87 (1)
C-D	-4434 / 0	-153.5 -153.5	0.48 (1)	3.67	O-D	-2197 / 0	0.83 (1)
D-R	-5830 / 0	-153.5 -153.5	0.59 (1)	3.12	D-N	0 / 1865	0.46 (1)
R-E	-5830 / 0	-78.0 -78.0	0.59 (1)	3.12	N-E	-538 / 0	0.20 (1)
E-F	-5830 / 0	-78.0 -78.0	0.39 (1)	3.37	N-G	-125 / 0	0.13 (1)
F-G	-5830 / 0	-78.0 -78.0	0.39 (1)	3.37	L-G	-317 / 0	0.12 (1)
G-H	-5924 / 0	-78.0 -78.0	0.47 (1)	3.27	L-H	0 / 3321	0.59 (1)
H-I	-3361 / 0	-78.0 -78.0	0.29 (1)	4.38	K-H	-2650 / 0	0.86 (1)
J-I	-2941 / 0	0.0 0.0	0.73 (1)	6.55	K-I	0 / 4408	0.78 (1)
Q-B	-3389 / 0	0.0 0.0	0.28 (1)	5.72	B-P	0 / 2101	0.52 (1)

	Q-P	P-O	O-S	S-N	N-M	M-L	L-K	K-J
	0 / 0	-36.4	-36.4	-36.4	-36.4	-36.4	-18.5	-18.5
	0 / 1800	-36.4	-36.4	-36.4	-36.4	-36.4	-18.5	-18.5
	0 / 4434	-36.4	-36.4	-36.4	-36.4	-36.4	-18.5	-18.5
	0 / 4434	-136.1	-136.1	-136.1	-136.1	-136.1	-18.5	-18.5
	0 / 5924	-136.1	-136.1	-136.1	-136.1	-136.1	-18.5	-18.5
	0 / 5924	-136.1	-136.1	-136.1	-136.1	-136.1	-18.5	-18.5
	0 / 3361	-18.5	-18.5	-18.5	-18.5	-18.5	-18.5	-18.5
	-88 / 0	-18.5	-18.5	-18.5	-18.5	-18.5	-18.5	-18.5

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	2-9-0	-156	-156	---	FRONT	VERT	TOTAL	---	C1
L	19-2-7	-1368	-1368	---	FRONT	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:

TOP CH.	LL	=	21.0	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD	=	34.4	PSF	

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

GIRDER TYPE: CPrimeHip
LEFT SETBACK = 2-9-0
RIGHT SETBACK = 0-0
END SETBACK = 5-10-8
END WALL WIDTH = 0-0
CORNER FRAMING TYPE: CONVENTIONAL
END JACK TYPE: CONVENTIONAL
APPLIED TO FRONT SIDE
- ADDT'L LOADS BASED ON 55 % OF GSL.
LOADS APPLIED TO FIRST 12-9-0 OF SPAN MEASURED FROM THE LEFT.

GIRDER TYPE: CStdGirder
START DISTANCE = 12-9-0
START SPAN CARRIED = 6-10-8
END DISTANCE = 19-2-7
END SPAN CARRIED = 6-10-8
END WALL WIDTH = 0-0
APPLIED TO FRONT SIDE OF BOTTOM CHORD.
- ADDT'L LOADS BASED ON 55 % OF GSL.

*** NON STANDARD GIRDER ***
ADDT'L USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.04")
CALCULATED VERT. DEFL.(LL) = L/999 (0.22")
ALLOWABLE DEFL.(TL)= L/360 (1.04")
CALCULATED VERT. DEFL.(TL) = L/849 (0.44")
CSI: TC=0.73/1.00 (I-J:1), BC=0.67/1.00 (L-N:1), WB=0.87/1.00 (C-O:1), SSI=0.33/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00 COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

Scale = 1:52.5




DRY: SEASONED LUMBER.

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

Y. WIDYA
100225448
10/14/2021

1) **C1:** A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

CONTINUED ON PAGE 2

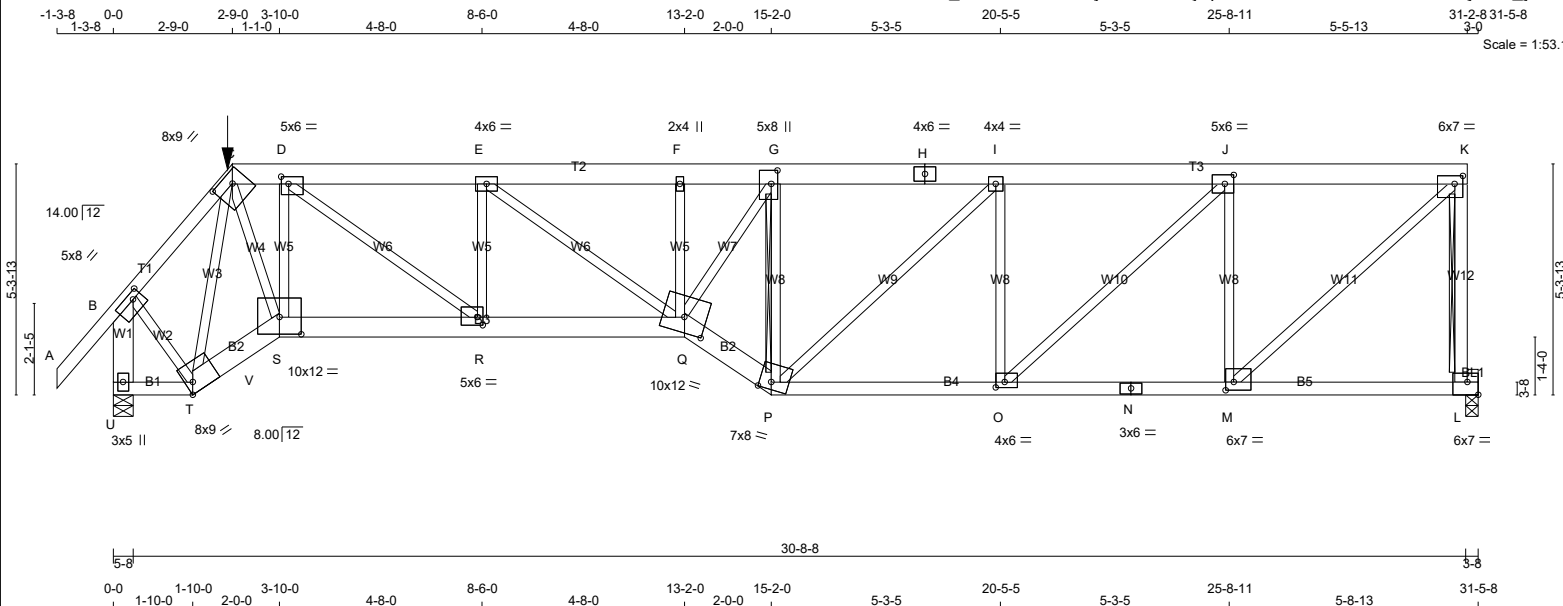

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE		LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF
C - H	2x6	DRY	No.2	SPF
H - K	2x6	DRY	No.2	SPF
L - K	2x4	DRY	No.2	SPF
U - B	2x6	DRY	No.2	SPF
U - T	2x4	DRY	No.2	SPF
T - S	2x6	DRY	No.2	SPF
S - Q	2x6	DRY	No.2	SPF
Q - P	2x6	DRY	No.2	SPF
P - N	2x4	DRY	No.2	SPF
N - L	2x4	DRY	No.2	SPF
BEARING BLOCKS				
BL1	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMWV-t	MT20	5.0	8.0	1.75 2.50
C	TTWV-h	MT20	8.0	9.0	2.75 5.25
D	TMWV-t	MT20	5.0	6.0	2.00 2.00
E	TMWV-t	MT20	4.0	6.0	
F	TMV+w	MT20	2.0	4.0	
G	TMWV+t	MT20	5.0	8.0	3.75 1.75
H	TS-t	MT20	4.0	6.0	
I	TMWV-t	MT20	4.0	4.0	
J	TMWV-t	MT20	5.0	6.0	2.50 2.50
K	TMV-t	MT20	6.0	7.0	2.25 2.25
L	BMVK-1	MT20	6.0	7.0	3.50 Edge
M	BMWV-t	MT20	6.0	7.0	2.25 2.25
N	BS-t	MT20	3.0	6.0	
O	BMWV-t	MT20	4.0	6.0	1.50 2.50
P	BBWV-m	MT20	7.0	8.0	2.00 3.25
Q	BBWVW-m	MT20	10.0	12.0	4.25 6.00
R	BMWV-t	MT20	5.0	6.0	2.25 1.50
S	BBWV-l	MT20	10.0	12.0	4.75 6.00
T	BBWV-h	MT20	8.0	9.0	3.00 Edge
U	BMV1+p	MT20	3.0	5.0	

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION			INPUT BRG	REQ'D BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
L	2979	0	2979	0	0	3-8	3-8
U	3078	0	3078	0	0	5-8	4-8

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
L	2124	1299 / 0	0 / 0	0 / 0	0 / 0	825 / 0	0 / 0
U	2194	1345 / 0	0 / 0	0 / 0	0 / 0	849 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) L, U
BEARING SIZE FACTOR = 1.15 AT JNT(S) L (BASED ON SUPPORT DEPTH = 1-8)

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.11 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

2x3 DRY SPF No.2 T-BRACE AT K-L
2x4 DRY SPF No.2 T-BRACE AT G-P

FASTEN T AND I-BRACES TO NARROW EDGE OF WEB WITH ONE ROW PER PLY OF 3" COMMON WIRE NAILS @ 6" O.C. WITH 3" MINIMUM END DISTANCE. BRACE MUST COVER 90% OF WEB LENGTH.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

C H O R D S					W E B S				
MAX. FACTORED		FACTORED			MAX. FACTORED				
MEMB.	FORCE	VERT. LOAD	LC1	MAX.	MAX.	MEMB.	FORCE	MAX.	
	(LBS)	(PLF)	CSI (LC)	UNBRAC			(LBS)	CSI (LC)	
FR-TO		FROM	TO	LENGTH	FR-TO				
A-B	0 / 42	-78.0	-78.0	0.12 (1)	10.00	T-C	-2360 / 0	0.90 (1)	
B-C	-2089 / 0	-78.0	-78.0	0.18 (1)	4.51	C-S	0 / 3643	0.90 (1)	
C-D	-2871 / 0	-78.0	-78.0	0.16 (1)	4.80	S-D	-1894 / 0	0.44 (1)	
D-E	-5319 / 0	-78.0	-78.0	0.37 (1)	3.51	D-R	0 / 3022	0.75 (1)	
E-F	-6376 / 0	-78.0	-78.0	0.49 (1)	3.11	R-E	-1290 / 0	0.30 (1)	
F-G	-6375 / 0	-78.0	-78.0	0.42 (1)	3.17	E-Q	0 / 1321	0.33 (1)	
G-H	-4766 / 0	-153.5	-153.5	0.40 (1)	3.65	Q-F	-8 / 24	0.01 (4)	
H-I	-4766 / 0	-153.5	-153.5	0.40 (1)	3.65	Q-G	0 / 3269	0.81 (1)	
I-J	-4264 / 0	-153.5	-153.5	0.44 (1)	3.78	P-G	-3445 / 0	0.78 (1)	
J-K	-2745 / 0	-153.5	-153.5	0.36 (1)	4.64	P-I	0 / 683	0.17 (1)	
L-K	-2900 / 0	0.0	0.0	0.76 (1)	6.59	O-I	-1270 / 0	0.52 (1)	
U-B	-3045 / 0	0.0	0.0	0.26 (1)	6.00	O-J	0 / 2081	0.52 (1)	
						M-J	-2338 / 0	0.95 (1)	
U-T	0 / 0	-36.4	-36.4	0.04 (4)	10.00	M-K	0 / 3810	0.94 (1)	
T-V	0 / 2177	-129.9	-129.9	0.33 (1)	10.00	B-T	0 / 1842	0.46 (1)	
V-S	0 / 2177	-112.0	-112.0	0.33 (1)	10.00				
S-R	0 / 2928	-112.0	-112.0	0.54 (1)	10.00				
R-Q	0 / 5319	-112.0	-112.0	0.85 (1)	10.00				
Q-P	0 / 5694	-112.0	-112.0	0.78 (1)	10.00				
P-O	0 / 4264	-36.4	-36.4	0.89 (1)	10.00				
O-N	0 / 2745	-36.4	-36.4	0.62 (1)	10.00				
N-M	0 / 2745	-36.4	-36.4	0.62 (1)	10.00				
M-L	-86 / 0	-36.4	-36.4	0.25 (4)	6.25				

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	2-9-0	-156	-156	---	FRONT	VERT	TOTAL	---	C1

DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL =	21.0	PSF
		DL =	6.0	PSF
BOT	CH.	LL =	0.0	PSF
		DL =	7.4	PSF
TOTAL LOAD		=	34.4	PSF

TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE
OF 2.00/12 MINIMUM

GIRDER TYPE: CPrimeHip

LEFT SETBACK = 2-9-0
RIGHT SETBACK = 0-0
END SETBACK = 5-10-8
END WALL WIDTH = 0-0
CORNER FRAMING TYPE: CONVENTIONAL
END JACK TYPE: CONVENTIONAL
APPLIED TO FRONT SIDE
- ADD'T'L LOADS BASED ON 55 % OF GSL.
LOADS APPLIED TO FIRST 2-9-0 OF SPAN
MEASURED FROM THE LEFT.

GIRDER TYPE: CStdGirder
START DISTANCE = 1-10-0
START SPAN CARRIED = 5-10-8
END DISTANCE = 15-2-0
END SPAN CARRIED = 5-10-8
END WALL WIDTH = 0-0
APPLIED TO FRONT SIDE OF BOTTOM CHORD.
- ADD'L LOADS BASED ON 55 % OF GSL.

GIRDER TYPE: CPrimeHip
LEFT SETBACK = 2-9-0
RIGHT SETBACK = 0-0
END SETBACK = 5-10-8
END WALL WIDTH = 0-0
CORNER FRAMING TYPE: CONVENTIONAL
END JACK TYPE: CONVENTIONAL
APPLIED TO FRONT SIDE
- ADD'T'L LOADS BASED ON 55 % OF GSL.
LOADS APPLIED TO FIRST 16-3-8 OF SPAN
MEASURED FROM THE RIGHT.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014


(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.04")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.28")
ALLOWABLE DEFL.(TL)= L/360 (1.04")
CALCULATED VERT. DEFL.(TL) = L/ 675 (0.55")

CSI: TC=0.76/1.00 (K-L:1), BC=0.89/1.00 (O-P:1),
WB=0.95/1.00 (J-M:1), SSI=0.33/1.00 (J-K:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 1.00

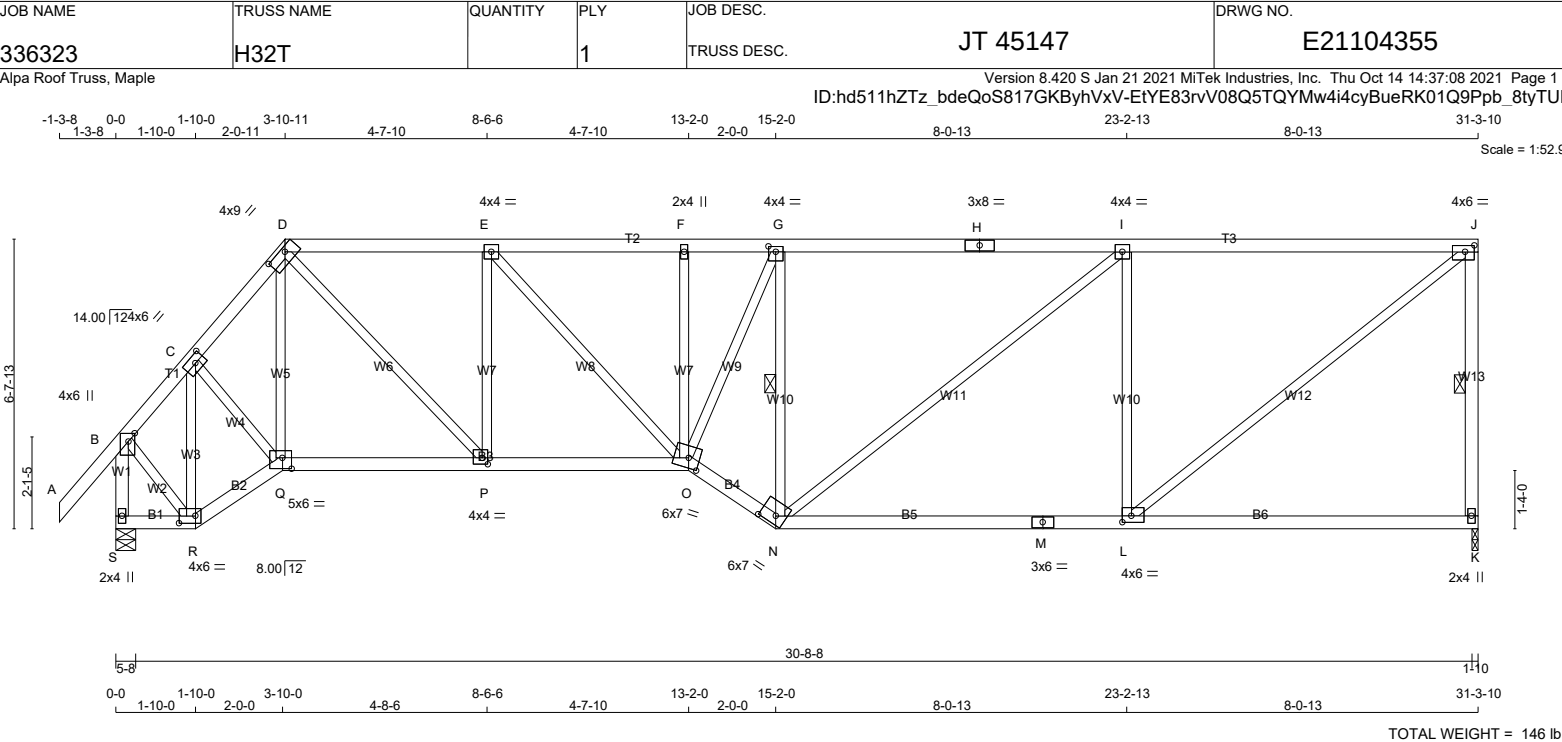

LUMBER
N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY No.2	SPF
D - H	2x4	DRY 1650F 1.5E	SPF
H - J	2x4	DRY 1650F 1.5E	SPF
K - J	2x4	DRY No.2	SPF
S - B	2x4	DRY No.2	SPF
S - R	2x4	DRY No.2	SPF
R - Q	2x4	DRY No.2	SPF
Q - O	2x4	DRY No.2	SPF
O - N	2x4	DRY No.2	SPF
N - M	2x4	DRY No.2	SPF
M - K	2x4	DRY No.2	SPF
ALL WEBS EXCEPT	2x3	DRY No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	6.0	2.25	1.75
C	TMWW-t	MT20	4.0	6.0	2.00	2.75
D	TTWW-h	MT20	4.0	9.0	1.25	5.50
E	TMWW-t	MT20	4.0	4.0		
F	TMW+w	MT20	2.0	4.0		
G	TMWW-t	MT20	4.0	4.0	1.50	2.00
H	TS-t	MT20	3.0	8.0		
I	TMWW-t	MT20	4.0	4.0		
J	TMVW-t	MT20	4.0	6.0	1.75	2.50
K	BMV1+p	MT20	2.0	4.0		
L	BMWW-t	MT20	4.0	6.0	1.75	2.50
M	BS-t	MT20	3.0	6.0		
N	BBWW-h	MT20	6.0	7.0	2.25	4.25
O	BBWWW-m	MT20	6.0	7.0	2.75	3.00
P	BMWW-t	MT20	4.0	4.0	1.75	1.50
Q	BBWW-l	MT20	5.0	6.0	3.00	2.50
R	BBWW-l	MT20	4.0	6.0	2.00	4.50
S	BMV1+p	MT20	2.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ
K	1507	0	1507	0
S	1622	0	1622	0

UNFACTORED REACTIONS

JT	1ST LCASE	MAX./MIN. SNOW	MIN. LIVE	MAX. PERM. LIVE	WIND	DEAD	SOIL
K	1075	656 / 0	0 / 0	0 / 0	0 / 0	419 / 0	0 / 0
S	1154	717 / 0	0 / 0	0 / 0	0 / 0	437 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) K, S

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.37 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1 / 2 LENGTH OF J-K, G-N.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. LC1 (LC)
FR-TO		FROM TO			FR-TO		
A-B	0 / 42	-78.0 -78.0	0.11 (1)	10.00	R-C	-1003 / 0	0.25 (1)
B-C	-1042 / 0	-78.0 -78.0	0.12 (1)	6.02	C-Q	0 / 596	0.13 (1)
C-D	-1585 / 0	-78.0 -78.0	0.09 (1)	5.17	Q-D	0 / 50	0.02 (4)
D-E	-1898 / 0	-78.0 -78.0	0.25 (1)	5.19	D-P	0 / 1288	0.29 (1)
E-F	-2295 / 0	-78.0 -78.0	0.26 (1)	4.82	P-E	-848 / 0	0.36 (1)
F-G	-2293 / 0	-78.0 -78.0	0.34 (1)	4.68	E-O	0 / 584	0.13 (1)
G-H	-1901 / 0	-78.0 -78.0	0.82 (1)	4.37	O-F	-109 / 0	0.05 (1)
H-I	-1901 / 0	-78.0 -78.0	0.82 (1)	4.37	O-G	0 / 1074	0.24 (1)
I-J	-1527 / 0	-78.0 -78.0	0.77 (1)	4.79	N-G	-1467 / 0	0.42 (1)
K-J	-1450 / 0	0.0 0.0	0.29 (1)	5.43	N-I	0 / 476	0.11 (1)
S-B	-1605 / 0	0.0 0.0	0.19 (1)	6.52	L-I	-1023 / 0	0.75 (1)
					L-J	0 / 1944	0.44 (1)
S-R	0 / 0	-18.5 -18.5	0.02 (4)	10.00	B-R	0 / 903	0.20 (1)
R-Q	0 / 757	-18.5 -18.5	0.13 (1)	10.00			
Q-P	0 / 1021	-18.5 -18.5	0.22 (1)	10.00			
P-O	0 / 1898	-18.5 -18.5	0.36 (1)	10.00			
O-N	0 / 2256	-18.5 -18.5	0.38 (1)	10.00			
N-M	0 / 1527	-18.5 -18.5	0.49 (4)	10.00			
M-L	0 / 1527	-18.5 -18.5	0.49 (4)	10.00			
L-K	0 / 0	-18.5 -18.5	0.34 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	21.0	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD	=	34.4	PSF	

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.04")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.12")
ALLOWABLE DEFL.(TL)= L/360 (1.04")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.27")

CSI: TC=0.82/1.00 (G-I:1) , BC=0.49/1.00 (L-N:4) , WB=0.75/1.00 (I-L:1) , SSI=0.30/1.00 (I-J:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (R) (INPUT = 0.90)
JSI METAL= 0.44 (N) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H33T		1	TRUSS DESC. JT 45147	E21104356

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:10 2021 Page 1

ID:hd511hZTz bdeQoS817GKBvhVxV-BGq Yls91eO8LnaxTL7A911XpS78U?oSt744DlyTUEd

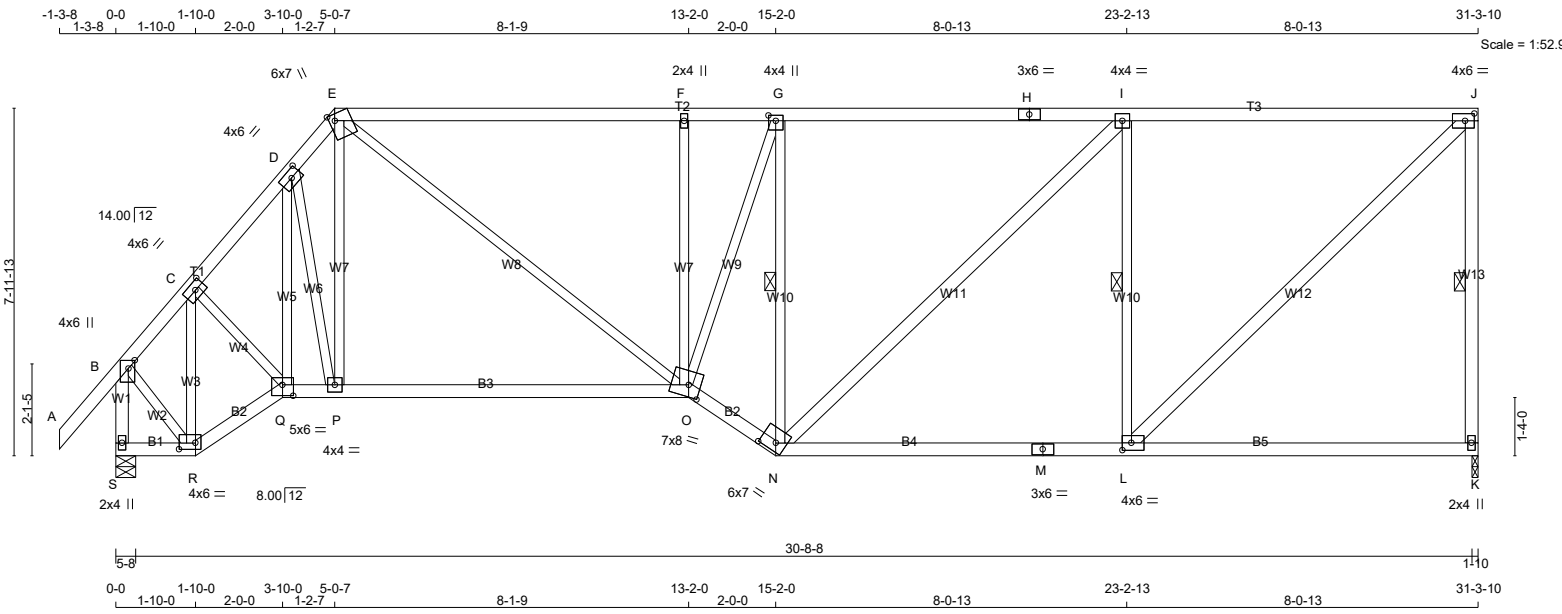

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR.				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER								DESIGN CRITERIA			
				BEARINGS								SPECIFIED LOADS:			
A - E	2x4	DRY	No.2	SPF	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG		TOP CH. LL = 21.0 PSF		
E - H	2x4	DRY	1650F 1.5E	SPF	JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	DL = 6.0 PSF		
H - J	2x4	DRY	1650F 1.5E	SPF	K	1507	0	1507	0	0	1-10	1-10	BOT CH. LL = 0.0 PSF		
K - J	2x4	DRY	No.2	SPF	S	1622	0	1622	0	0	5-8	1-12	DL = 7.4 PSF		
S - B	2x4	DRY	No.2	SPF									TOTAL LOAD = 34.4 PSF		
S - R	2x4	DRY	No.2	SPF									SPACING = 24.0 IN. C/C		
R - Q	2x4	DRY	No.2	SPF									LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM		
Q - O	2x4	DRY	No.2	SPF									THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC2015		
O - N	2x4	DRY	No.2	SPF											
N - M	2x4	DRY	No.2	SPF											
M - K	2x4	DRY	No.2	SPF											
ALL WEBS EXCEPT				2x3	DRY	No.2	SPF								
N - I	2x4	DRY	No.2	SPF											
L - J	2x4	DRY	No.2	SPF											
				UNFACTORED REACTIONS											
				1ST LCASE MAX./MIN. COMPONENT REACTIONS											
				JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL				
				K	1075	656 / 0	0 / 0	0 / 0	0 / 0	419 / 0	0 / 0				
				S	1154	717 / 0	0 / 0	0 / 0	0 / 0	437 / 0	0 / 0				
				BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) K, S											
				BRACING											
				SUPPORTS TO BE SHEATHED OR MAX. PURLIN SPACING = 4.68 FT.											

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	6.0	2.25 1.75
C	TMWW-t	MT20	4.0	6.0	2.00 2.75
D	TMWW-t	MT20	4.0	6.0	2.00 2.75
E	TTWW+m	MT20	6.0	7.0	Edge 1.50
F	TMW+w	MT20	2.0	4.0	
G	TMWW+t	MT20	4.0	4.0	1.50 2.00
H	TS-t	MT20	3.0	6.0	
I	TMWW-t	MT20	4.0	4.0	
J	TMVW-t	MT20	4.0	6.0	2.00 2.50
K	BMV1+p	MT20	2.0	4.0	
L	BMWW-t	MT20	4.0	6.0	2.00 2.50
M	BS-t	MT20	3.0	6.0	
N	BBWW-h	MT20	6.0	7.0	2.25 4.25
O	BBWWW-m	MT20	7.0	8.0	3.25 3.25
P	BMWW-t	MT20	4.0	4.0	
Q	BBWW-l	MT20	5.0	6.0	3.00 3.00
R	BBWW-l	MT20	4.0	6.0	1.75 4.50
S	BMV1+p	MT20	2.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



LOADING TOTAL LOAD CASES: (4)									
CHORDS			WEBS						
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)		
FR-TO		FROM TO			FR-TO				
A-B	0 / 42	-78.0	-78.0	0.11 (1)	10.00	R-C	-1005 / 0	0.26 (1)	
B-C	-1042 / 0	-78.0	-78.0	0.12 (1)	6.02	C-Q	0 / 605	0.14 (1)	
C-D	-1579 / 0	-78.0	-78.0	0.09 (1)	5.18	Q-D	-92 / 0	0.04 (4)	
D-E	-1606 / 0	-78.0	-78.0	0.04 (1)	5.19	D-P	-84 / 29	0.04 (1)	
E-F	-1885 / 0	-78.0	-78.0	0.68 (1)	4.68	P-E	0 / 271	0.07 (4)	
F-G	-1876 / 0	-78.0	-78.0	0.54 (1)	4.68	E-O	0 / 1093	0.25 (1)	
G-H	-1565 / 0	-78.0	-78.0	0.79 (1)	4.69	O-F	-547 / 0	0.40 (1)	
H-I	-1565 / 0	-78.0	-78.0	0.79 (1)	4.69	O-G	0 / 1041	0.23 (1)	
I-J	-1264 / 0	-78.0	-78.0	0.76 (1)	5.10	N-G	-1241 / 0	0.50 (1)	
K-J	-1450 / 0	0.0	0.0	0.42 (1)	5.43	N-I	0 / 415	0.07 (1)	
S-B	-1605 / 0	0.0	0.0	0.19 (1)	6.52	L-I	-1024 / 0	0.41 (1)	
						L-J	0 / 1747	0.28 (1)	
S-R	0 / 0	-18.5	-18.5	0.02 (4)	10.00	B-R	0 / 904	0.20 (1)	
R-Q	0 / 758	-18.5	-18.5	0.13 (1)	10.00				
Q-P	0 / 1032	-18.5	-18.5	0.40 (4)	10.00				
P-O	0 / 1021	-18.5	-18.5	0.40 (4)	10.00				
O-N	0 / 1861	-18.5	-18.5	0.31 (1)	10.00				
N-M	0 / 1264	-18.5	-18.5	0.47 (4)	10.00				
M-L	0 / 1264	-18.5	-18.5	0.47 (4)	10.00				
L-K	0 / 0	-18.5	-18.5	0.35 (4)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 21.0 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.04")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.09")
ALLOWABLE DEFL.(TL)= L/360 (1.04")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.23")

CSI: TC=0.79/1.00 (G-I:1) , BC=0.47/1.00 (L-N:4) ,
WB=0.50/1.00 (G-N:1) , SSI=0.30/1.00 (I-J:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.90 (E) (INPUT = 0.90)
JSI METAL= 0.40 (R) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H34T		1	TRUSS DESC. JT 45147	E21104357

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:12 2021 Page 1

ID:hd511hZTz bdeQoS817GKBVhVxV-7eolzQuQZFesa4kJbm9eFS6qZGotytlIKRZBHeyTUEb

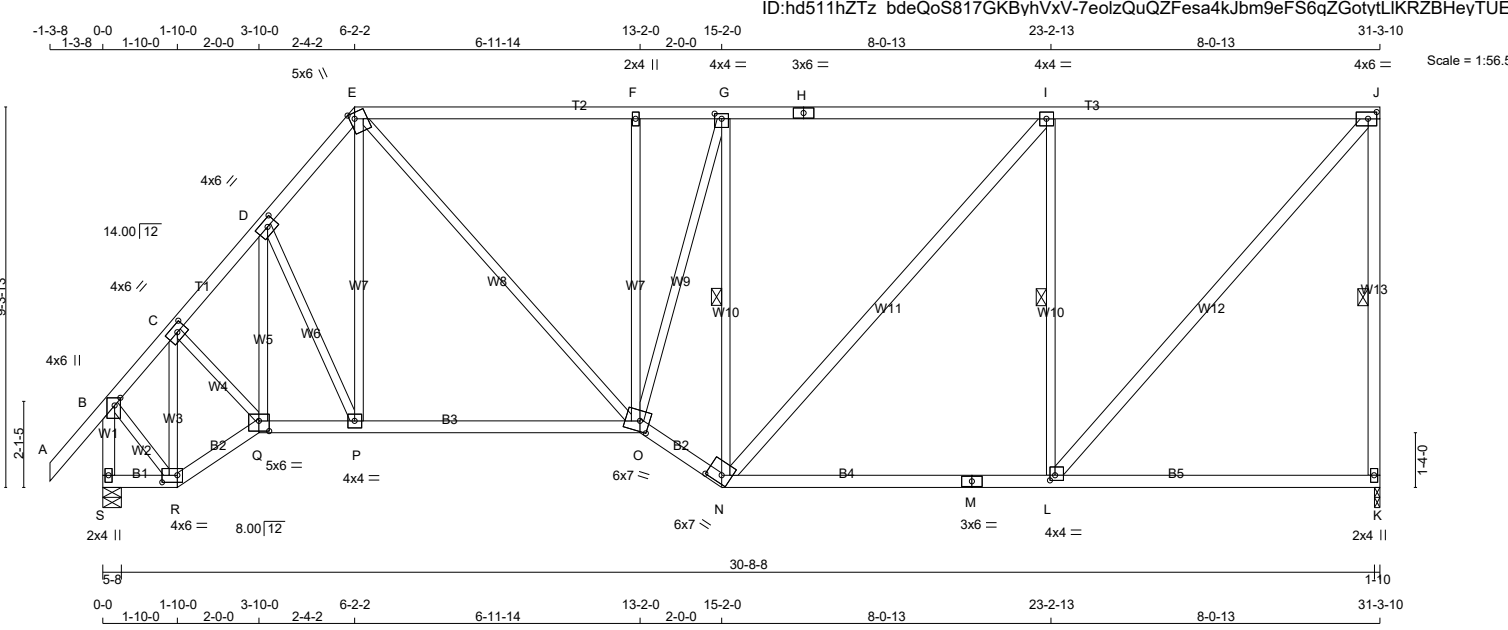

TOTAL WEIGHT = 173 lb

[M]

LUMBER				DESCR.	
N. L. G. A. RULES					
CHORDS	SIZE	LUMBER		SPF	
A - E	2x4	DRY	No.2	SPF	
A - H	2x4	DRY	No.2	SPF	
H - J	2x4	DRY	No.2	SPF	
K - J	2x4	DRY	No.2	SPF	
S - B	2x4	DRY	No.2	SPF	
S - R	2x4	DRY	No.2	SPF	
R - Q	2x4	DRY	No.2	SPF	
Q - O	2x4	DRY	No.2	SPF	
O - N	2x4	DRY	No.2	SPF	
N - M	2x4	DRY	No.2	SPF	
M - K	2x4	DRY	No.2	SPF	
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF	
N - I	2x4	DRY	No.2	SPF	
L - J	2x4	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	6.0	2.25 1.75
C	TMWW-t	MT20	4.0	6.0	2.00 2.75
D	TMWW-t	MT20	4.0	6.0	2.00 2.75
E	TTWW+m	MT20	5.0	6.0	1.75 1.50
F	TMW+w	MT20	2.0	4.0	
G	TMWW-t	MT20	4.0	4.0	1.50 2.00
H	TS-t	MT20	3.0	6.0	
I	TMWW-t	MT20	4.0	4.0	
J	TMVW-t	MT20	4.0	6.0	2.00 2.50
K	BMV1+p	MT20	2.0	4.0	
L	BMWW-t	MT20	4.0	4.0	1.50 1.50
M	BS-t	MT20	3.0	6.0	
N	BBWW-h	MT20	6.0	7.0	2.25 4.25
O	BBWWW-m	MT20	6.0	7.0	3.00 2.75
P	BMWW-t	MT20	4.0	4.0	
Q	BBWW-I	MT20	5.0	6.0	3.00 3.00
R	BBWW-I	MT20	4.0	6.0	2.00 4.50
S	BMV1+p	MT20	2.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT		REQRD	
	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	BRG	IN-SX
K	1507	0	1507	0	0	1-10	1-10	
S	1622	0	1622	0	0	5-8	1-12	

UNFACTORED REACTIONS		MAX./MIN. COMPONENT REACTIONS					
JT	1ST LCASE	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD
K	1075	656 / 0	0 / 0	0 / 0	0 / 0	0 / 0	419 / 0
S	1154	717 / 0	0 / 0	0 / 0	0 / 0	0 / 0	437 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) K, S

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.97 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF J-K, G-N, I-L.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH	FACTORED CSI (LC)
FR-TO		FROM TO		FR-TO			
A-B	0 / 42	-78.0	-78.0 0.11 (1)	R-C	-1000 / 0	10.00	0.25 (1)
B-C	-1043 / 0	-78.0	-78.0 0.12 (1)	C-Q	0 / 620	6.02	0.14 (1)
C-D	-1578 / 0	-78.0	-78.0 0.08 (1)	Q-D	-35 / 0	5.19	0.01 (1)
D-E	-1529 / 0	-78.0	-78.0 0.08 (1)	D-P	-135 / 0	5.26	0.07 (1)
E-F	-1538 / 0	-78.0	-78.0 0.56 (1)	P-E	0 / 247	4.64	0.06 (4)
F-G	-1533 / 0	-78.0	-78.0 0.45 (1)	E-O	0 / 824	4.69	0.19 (1)
G-H	-1336 / 0	-78.0	-78.0 0.96 (1)	O-F	-419 / 0	3.97	0.51 (1)
H-I	-1336 / 0	-78.0	-78.0 0.96 (1)	O-G	0 / 793	3.97	0.18 (1)
I-J	-1077 / 0	-78.0	-78.0 0.92 (1)	N-G	-1093 / 0	4.38	0.62 (1)
K-J	-1450 / 0	0.0	0.0 0.59 (1)	N-I	0 / 387	5.43	0.06 (1)
S-B	-1605 / 0	0.0	0.0 0.19 (1)	L-I	-1023 / 0	6.52	0.58 (1)
S-R	0 / 0	-18.5	-18.5 0.02 (4)	L-J	0 / 1617	10.00	0.26 (1)
R-Q	0 / 754	-18.5	-18.5 0.13 (1)	B-R	0 / 900	10.00	0.20 (1)
Q-P	0 / 1036	-18.5	-18.5 0.30 (4)				
P-O	0 / 982	-18.5	-18.5 0.29 (4)				
O-N	0 / 1590	-18.5	-18.5 0.27 (1)				
N-M	0 / 1078	-18.5	-18.5 0.45 (4)				
M-L	0 / 1078	-18.5	-18.5 0.45 (4)				
L-K	0 / 0	-18.5	-18.5 0.35 (4)				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 21.0 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.04")
CALCULATED VERT. DEFL.(LL)= L/ 999 (0.08")
ALLOWABLE DEFL.(TL)= L/360 (1.04")
CALCULATED VERT. DEFL.(TL)= L/ 999 (0.09")

CSI: TC=0.96/1.00 (G-I:1) , BC=0.45/1.00 (L-N:4) , WB=0.62/1.00 (G-N:1) , SSI=0.30/1.00 (I-J:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (O) (INPUT = 0.90)
JSI METAL= 0.40 (R) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



TOTAL WEIGHT = 194 lb

DRY: SEASONED LUMBER.


JSI GRIP= 0.89 (R) (INPUT = 0.90)
JSI METAL= 0.40 (R) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H35E		1	TRUSS DESC. JT 45147	E21104359

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:36:41 2021 Page 1

ID:hd511hZTz_bdeQoS817GKByhVxV-XhQ0TqWzsjkFMJsMHI5MUwK24mFIBsmBC6Z2ixyTUF4

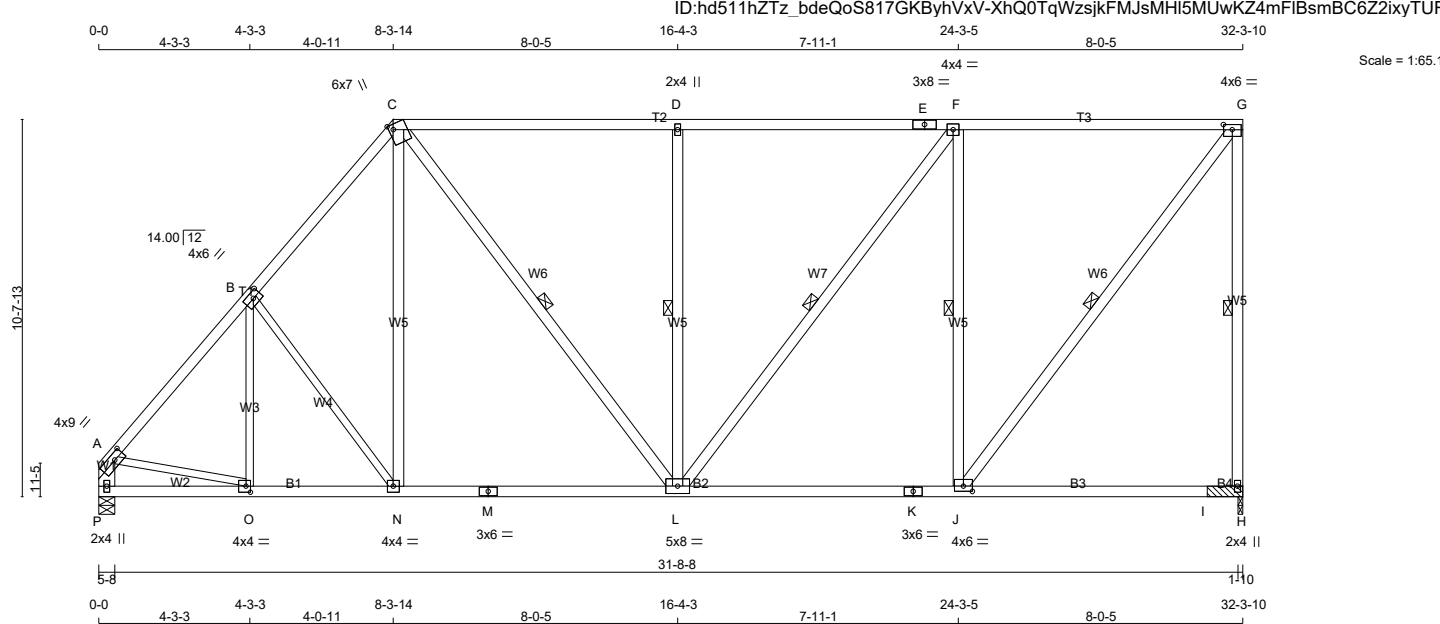

TOTAL WEIGHT = 183 lb

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY No.2	SPF
A - E	2x4	DRY No.2	SPF
E - G	2x4	DRY No.2	SPF
H - G	2x4	DRY No.2	SPF
P - A	2x6	DRY No.2	SPF
P - M	2x4	DRY No.2	SPF
M - K	2x4	DRY No.2	SPF
K - H	2x4	DRY No.2	SPF
ALL WEBS	2x4	DRY No.2	SPF
EXCEPT			
O - B	2x3	DRY No.2	SPF
B - N	2x3	DRY No.2	SPF
A - O	2x3	DRY No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMVW-t	MT20	4.0	9.0	2.00 3.50
B	TMWW-t	MT20	4.0	6.0	2.00 2.75
C	TTWW+m	MT20	6.0	7.0	Edge 1.50
D	TMW+w	MT20	2.0	4.0	
E	TS-t	MT20	3.0	8.0	
F	TMWW-t	MT20	4.0	4.0	
G	TMVW-t	MT20	4.0	6.0	1.75 3.00
H	BMV1+p	MT20	2.0	4.0	
J	BMWW-t	MT20	4.0	6.0	1.75 3.00
K	BS-t	MT20	3.0	6.0	
L	BMWWW-t	MT20	5.0	8.0	
M	BS-t	MT20	3.0	6.0	
N	BMWW-t	MT20	4.0	4.0	
O	BMWW-t	MT20	4.0	4.0	2.00 1.50
P	BMV1+p	MT20	2.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

		FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT		REQRD	
JT		VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	BRG	IN-SX
H	1558	0	1558	0	0	1-10	1-10	& BLOCK	
P	1558	0	1558	0	0	5-8	1-11		

		1ST LCASE		MAX./MIN. COMPONENT REACTIONS			
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
H	1111	678 / 0	0 / 0	0 / 0	0 / 0	433 / 0	0 / 0
P	1111	678 / 0	0 / 0	0 / 0	0 / 0	433 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H, P

2x4 DRY SPF No.2 BEARING BLOCK 12" LONG AT JT. H ATTACHED TO FRONT SIDE WITH 2 ROWS OF (0.122"x3") SPIRAL NAILS SPACED 3" C.C. 8 NAILS TOTAL.

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.42 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF G-H, C-L, D-L, F-L, F-J, G-J.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

C H O R D S				W E B S			
MAX. FACTORED		FACTORED		MAX. FACTORED			
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	FORCE (LBS)	MAX CSI (LC)
FR-TO		FROM	TO		FR-TO		
A-B	-1616 / 0	-78.0	-78.0 0.30 (1)	4.93	O-B	-79 / 22	0.04 (1)
B-C	-1476 / 0	-78.0	-78.0 0.28 (1)	5.11	B-N	-221 / 0	0.20 (1)
C-D	-1270 / 0	-78.0	-78.0 0.84 (1)	4.44	N-C	0 / 301	0.05 (4)
D-E	-1270 / 0	-78.0	-78.0 0.84 (1)	4.42	C-L	0 / 536	0.09 (1)
E-F	-1270 / 0	-78.0	-78.0 0.84 (1)	4.42	L-D	-676 / 0	0.39 (1)
F-G	-966 / 0	-78.0	-78.0 0.79 (1)	4.97	L-F	0 / 500	0.08 (1)
H-G	-1499 / 0	0.0	0.0 0.86 (1)	5.36	J-F	-1081 / 0	0.62 (1)
P-A	-1521 / 0	0.0	0.0 0.10 (1)	7.81	J-G	0 / 1578	0.25 (1)
					A-O	0 / 1079	0.24 (1)
P-O	0 / 0	-18.5	-18.5 0.08 (4)	10.00			
O-N	0 / 1070	-18.5	-18.5 0.27 (4)	10.00			
N-M	0 / 941	-18.5	-18.5 0.31 (4)	10.00			
M-L	0 / 941	-18.5	-18.5 0.31 (4)	10.00			
L-K	0 / 966	-18.5	-18.5 0.38 (4)	10.00			
K-J	0 / 966	-18.5	-18.5 0.38 (4)	10.00			
J-I	0 / 0	-18.5	-18.5 0.29 (4)	10.00			
I-H	0 / 0	-18.5	-18.5 0.29 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 21.0 PSF

DL = 6.0 PSF

BOT CH. LL = 0.0 PSF

DL = 7.4 PSF

TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.08")

CALCULATED VERT. DEFL.(LL)= L/ 999 (0.06")

ALLOWABLE DEFL.(TL)= L/360 (1.08")

CALCULATED VERT. DEFL.(TL)= L/ 999 (0.15")

CSI: TC=0.86/1.00 (G-H:1), BC=0.38/1.00 (J-L:4), WB=0.62/1.00 (F-J:1), SSI=0.29/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10

COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MAX	MIN	MAX	MIN
MT20	650	371	1747
	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.85 (O) (INPUT = 0.90)

JSI METAL= 0.39 (M) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:36:37 2021 Page 1



JSI GRIP= 0.87 (M) (INPUT = 0.90)
JSI METAL= 0.49 (R) (INPUT = 1.00)

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:36:39 2021 Page 1




TOTAL WEIGHT = 200 lb

DRY: SEASONED LUMBER.

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

V-V	0 / 0	-18.5	-18.5	0.05 (4)	10.00	O-J	0 / 1588	0.36 (1)
V-U	0 / 1069	-18.5	-18.5	0.21 (1)	10.00	N-J	-1570 / 0	0.90 (1)
U-T	0 / 972	-18.5	-18.5	0.22 (1)	10.00	N-K	0 / 1465	0.33 (1)
T-S	0 / 972	-18.5	-18.5	0.22 (1)	10.00	A-V	0 / 1082	0.24 (1)
S-R	0 / 1342	-18.5	-18.5	0.28 (1)	10.00			
R-Q	0 / 1671	-18.5	-18.5	0.28 (1)	10.00			
Q-P	0 / 1275	-18.5	-18.5	0.26 (1)	10.00			
P-O	0 / 681	-18.5	-18.5	0.17 (4)	10.00			
O-N	0 / 293	-18.5	-18.5	0.06 (1)	10.00			
N-M	0 / 0	-18.5	-18.5	0.01 (4)	10.00			
M-L	0 / 0	-18.5	-18.5	0.01 (4)	10.00			

JSI GRIP= 0.90 (P) (INPUT = 0.90)
JSI METAL= 0.36 (V) (INPUT = 1.00)

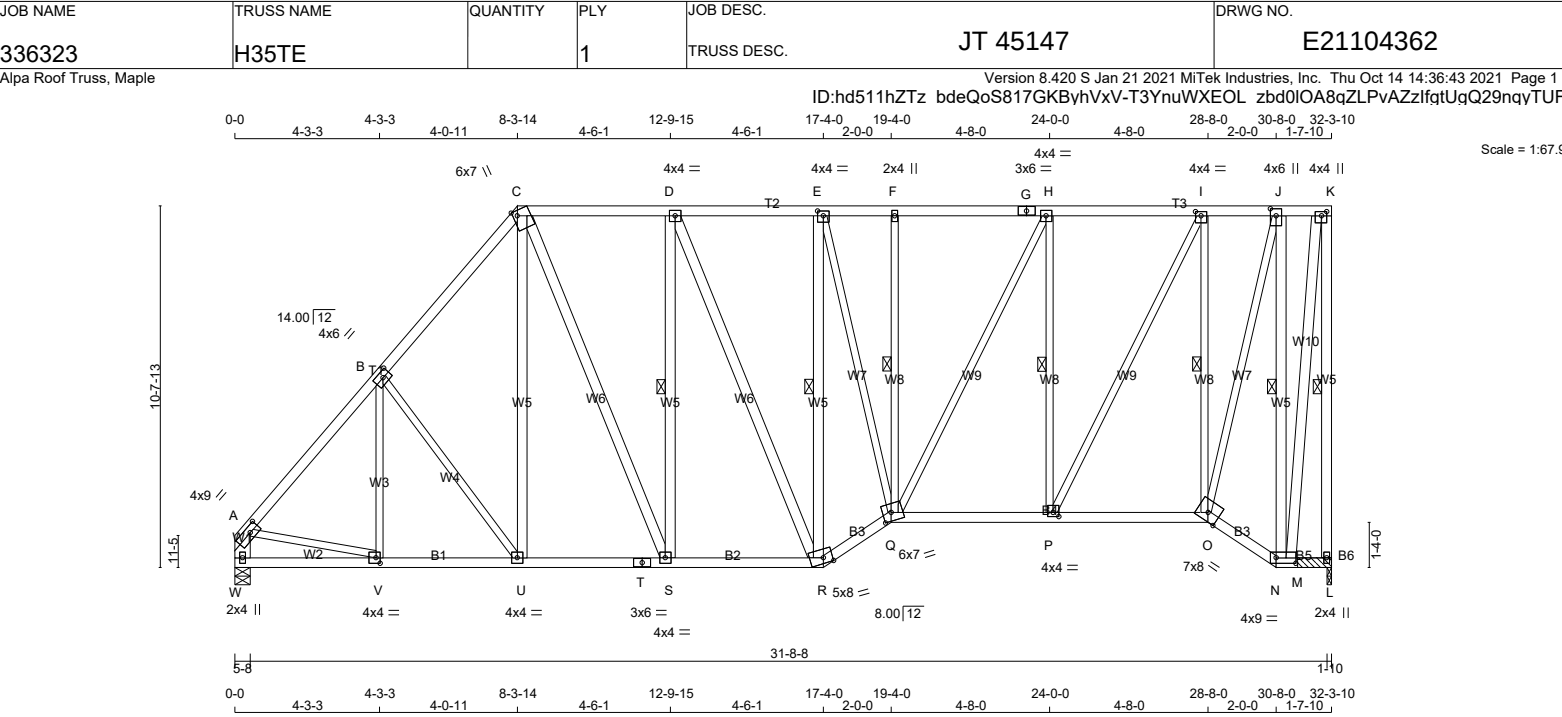

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY No.2	SPF
C - G	2x4	DRY No.2	SPF
G - K	2x4	DRY No.2	SPF
L - K	2x4	DRY No.2	SPF
W - A	2x6	DRY No.2	SPF
W - T	2x4	DRY No.2	SPF
T - R	2x4	DRY No.2	SPF
R - Q	2x4	DRY No.2	SPF
Q - O	2x4	DRY No.2	SPF
O - N	2x4	DRY No.2	SPF
N - L	2x4	DRY No.2	SPF

ALL WEBS 2x3 DRY No.2 SPF

EXCEPT

U - C	2x4	DRY No.2	SPF
C - S	2x4	DRY No.2	SPF
S - D	2x4	DRY No.2	SPF
D - R	2x4	DRY No.2	SPF
R - E	2x4	DRY No.2	SPF
N - J	2x4	DRY No.2	SPF
N - K	2x4	DRY No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW-t	MT20	4.0	9.0	2.00	3.50
B	TMWW-t	MT20	4.0	6.0	2.00	2.75
C	TTWW+m	MT20	6.0	7.0	Edge	1.50
D	TMWW-t	MT20	4.0	4.0		
E	TMWW-t	MT20	4.0	4.0	1.75	2.00
F	TMW+w	MT20	2.0	4.0		
G	TS-t	MT20	3.0	6.0		
H	TMWW-t	MT20	4.0	4.0		
I	TMWW-t	MT20	4.0	4.0	1.50	2.00
J	TMWW+t	MT20	4.0	6.0	2.50	2.00
K	TMVW+p	MT20	4.0	4.0	1.50	1.75
L	BMV1+p	MT20	2.0	4.0		
N	BBWW-l	MT20	4.0	9.0	2.00	7.00
O	BBWW-h	MT20	7.0	8.0	Edge	
P	BMWW-t	MT20	4.0	4.0	1.50	2.00
Q	BBWWW-m	MT20	6.0	7.0	3.00	3.00
R	BBWW-m	MT20	5.0	8.0	2.00	3.25
S	BMWW-t	MT20	4.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ
L	1558	0	1558	0
W	1558	0	1558	0

UNFACTORED REACTIONS

JT	1ST LCASE	MAX./MIN.	COMPONENT	REACTIONS
L	1111	678 / 0	0 / 0	0 / 0
W	1111	678 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) L, W

2x4 DRY SPF No.2 BEARING BLOCK 12" LONG AT JT. L ATTACHED TO FRONT SIDE WITH 2 ROWS OF (0.122"x3") SPIRAL NAILS SPACED 3" C.C. 8 NAILS TOTAL.

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.92 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF K-L, D-S, E-R, F-Q, H-P, I-O, J-N.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO		FROM	TO	FR-TO			
A-B	-1619 / 0	-78.0	-78.0 0.30 (1)	4.92	V-B	-62 / 41	0.03 (1)
B-C	-1469 / 0	-78.0	-78.0 0.28 (1)	5.11	B-U	-232 / 0	0.21 (1)
C-D	-1183 / 0	-78.0	-78.0 0.26 (1)	5.55	U-C	0 / 263	0.04 (1)
D-E	-1219 / 0	-78.0	-78.0 0.26 (1)	5.49	C-S	0 / 618	0.10 (1)
E-F	-1348 / 0	-78.0	-78.0 0.13 (1)	5.46	S-D	-478 / 0	0.27 (1)
F-G	-1351 / 0	-78.0	-78.0 0.25 (1)	5.29	D-R	0 / 90	0.01 (1)
G-H	-1351 / 0	-78.0	-78.0 0.25 (1)	5.29	R-E	-832 / 0	0.48 (1)
H-I	-1087 / 0	-78.0	-78.0 0.24 (1)	5.76	E-Q	0 / 606	0.14 (1)
I-J	-564 / 0	-78.0	-78.0 0.10 (1)	6.25	Q-F	-237 / 0	0.14 (1)
J-K	-232 / 0	-78.0	-78.0 0.05 (1)	6.25	Q-H	0 / 573	0.13 (1)
L-K	-1543 / 0	0.0	0.0 0.88 (1)	5.30	P-H	-906 / 0	0.52 (1)
W-A	-1524 / 0	0.0	0.0 0.10 (1)	7.81	P-I	0 / 1125	0.25 (1)
				O-I	-1294 / 0	0.74 (1)	
W-V	0 / 0	-18.5	-18.5 0.07 (4)	10.00	O-J	0 / 1530	0.34 (1)
V-U	0 / 1072	-18.5	-18.5 0.21 (1)	10.00	N-J	-1573 / 0	0.90 (1)
U-T	0 / 936	-18.5	-18.5 0.20 (1)	10.00	N-K	0 / 1485	0.24 (1)
T-S	0 / 936	-18.5	-18.5 0.20 (1)	10.00	A-V	0 / 1082	0.24 (1)
S-R	0 / 1183	-18.5	-18.5 0.24 (1)	10.00			
R-Q	0 / 1451	-18.5	-18.5 0.25 (1)	10.00			
Q-P	0 / 1087	-18.5	-18.5 0.23 (1)	10.00			
P-O	0 / 579	-18.5	-18.5 0.17 (4)	10.00			
O-N	0 / 252	-18.5	-18.5 0.05 (1)	10.00			
N-M	0 / 0	-18.5	-18.5 0.01 (4)	10.00			
M-L	0 / 0	-18.5	-18.5 0.01 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 21.0 PSF

DL = 6.0 PSF

BOT CH. LL = 0.0 PSF

DL = 7.4 PSF

TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.08")

CALCULATED VERT. DEFL.(LL) = L/ 999 (0.10")

ALLOWABLE DEFL.(TL)= L/360 (1.08")

CALCULATED VERT. DEFL.(TL) = L/ 999 (0.20")

CSI: TC=0.88/1.00 (K-L:1) , BC=0.25/1.00 (Q-R:1) , WB=0.90/1.00 (J-N:1) , SSI=0.17/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10

COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX	MIN	MAX
MT20	650	371	1747
	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (K) (INPUT = 0.90)

JSI METAL= 0.37 (V) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H35TE		1	JT 45147	E21104362(2)

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:36:43 2021 Page 2

ID:hd511hZTz_bdeQoS817GKByhVxV-T3YnuWXEOL_zbd0IOA8qZLPvAZzIfgtUgQ29ngyTUF2


PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
T	BS-t	MT20	3.0	6.0		
U	BMWW-t	MT20	4.0	4.0		
V	BMWW-t	MT20	4.0	4.0	2.00	1.50
W	BMV1+p	MT20	2.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



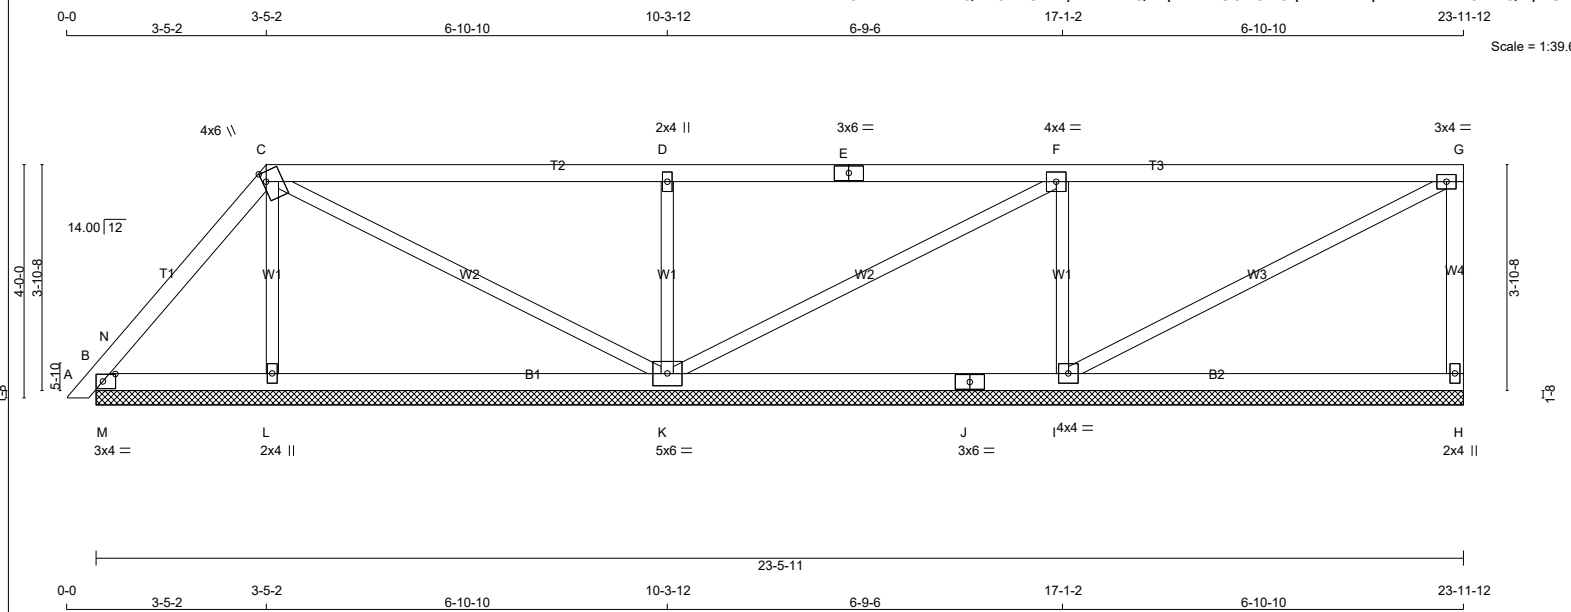

TOTAL WEIGHT = 4 X 86 = 344 lb

LUMBER					
N. L. G. A. RULES					
CHORDS		SIZE	LUMBER	DESCR.	
A - C	2x4	DRY	No.2	SPF	
C - E	2x4	DRY	No.2	SPF	
E - G	2x4	DRY	No.2	SPF	
H - G	2x4	DRY	No.2	SPF	
B - J	2x4	DRY	No.2	SPF	
J - H	2x4	DRY	No.2	SPF	
ALL WEBS		2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.					

PLATES (table is in inches)						
PLT	TYPE	PLATES	W	LEN	Y	X
B	TMB1-l	MT20	3.0	4.0	1.50	2.50
C	TTWW+m	MT20	4.0	6.0	2.00	0.75
D	TMW+ww	MT20	2.0	4.0		
E	TS-t	MT20	3.0	6.0		
F	TMWV-t	MT20	4.0	4.0		
G	TMV-t	MT20	3.0	4.0		
H	BMV1+p	MT20	2.0	4.0		
I	BMWV1-t	MT20	4.0	4.0		
J	BS-t	MT20	3.0	6.0		
K	BMWVWV1-t	MT20	5.0	6.0		
L	BMWV1+w	MT20	2.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

	FACTORED		MAXIMUM FACTORED		INPUT	REQD
	GROSS REACTION		GROSS REACTION		BRG	BRG
	VERT	HORIZ	DOWN	HORIZ	IN-SX	IN-SX
JT	275	0	275	0	0	23-5-11 (8-5-11)
B	222	0	222	0	0	23-5-11 (8-5-11)
L	330	0	330	0	0	23-5-11 (8-5-11)
K	770	0	770	0	0	23-5-11 (8-5-11)
I	697	0	697	0	0	23-5-11 (8-5-11)

VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH

UNFACTORED REACTIONS

JT	1ST LCASE	MAX./MIN. COMPONENT REACTIONS					
	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
H	196	121 / 0	0 / 0	0 / 0	0 / 0	75 / 0	0 / 0
B	155	116 / 0	0 / 0	0 / 0	0 / 0	39 / 0	0 / 0
L	240	119 / 0	0 / 0	0 / 0	0 / 0	122 / 0	0 / 0
K	547	348 / 0	0 / 0	0 / 0	0 / 0	199 / 0	0 / 0
I	498	299 / 0	0 / 0	0 / 0	0 / 0	199 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H, B, L, K, I

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

C H O R D S			W E B S					
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LOAD LC1	MAX. CSI (LC)	MAX. UNBRAC	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)
FR-TO		FROM	TO		LENGTH	FR-TO		
A-B	0 / 10	-78.0	-78.0	0.01 (1)	10.00	L-C	-199 / 0	0.05 (1)
B-N	0 / 77	-78.0	-78.0	0.07 (1)	10.00	K-D	-87 / 0	0.10 (1)
N-C	-102 / 0	-78.0	-78.0	0.08 (1)	6.25	K-D	-586 / 0	0.14 (1)
C-D	0 / 25	-78.0	-78.0	0.50 (1)	10.00	K-F	-48 / 0	0.06 (1)
D-E	0 / 24	-78.0	-78.0	0.50 (1)	10.00	I-F	-563 / 0	0.13 (1)
E-F	0 / 24	-78.0	-78.0	0.50 (1)	10.00	I-G	0 / 20	0.00 (1)
F-G	-18 / 0	-78.0	-78.0	0.50 (1)	6.25	M-N	-320 / 0	0.00 (1)
H-G	-225 / 0	0.0	0.0	0.05 (1)	7.81			
B-M	0 / 59	-18.5	-18.5	0.08 (1)	10.00			
M-L	0 / 59	-18.5	-18.5	0.14 (4)	10.00			
L-K	0 / 53	-18.5	-18.5	0.16 (4)	10.00			
K-J	0 / 18	-18.5	-18.5	0.21 (4)	10.00			
J-I	0 / 18	-18.5	-18.5	0.21 (4)	10.00			
I-H	0 / 0	-18.5	-18.5	0.21 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL =	21.0	PSF
		DL =	6.0	PSF
BOT	CH.	LL =	0.0	PSF
		DL =	7.4	PSF
TOTAL LOAD			=	34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE
OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.50/1.00 (D-F:1) , BC=0.21/1.00 (I-K:4) ,
WB=0.14/1.00 (D-K:1) , SSI=0.25/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES						
PLATE	GRIP(DRY)		SHEAR		SECTION	
	(PSI)		(PLI)		(PLI)	
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (C) (INPUT = 0.90)
JSI METAL= 0.22 (E) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



scale = 1:55.0



Y-U	0/0	-18.5	-18.5	0.12 (4)	10.00	N-K B-U	0/1496	0.34 (1)
U-T	0/853	-18.5	-18.5	0.29 (4)	10.00		0/935	0.21 (1)
T-S	0/853	-18.5	-18.5	0.29 (4)	10.00			
S-R	0/1818	-18.5	-18.5	0.40 (1)	10.00			
R-Q	0/2381	-18.5	-18.5	0.40 (1)	10.00			
Q-P	0/1951	-18.5	-18.5	0.36 (1)	10.00			
P-O	0/1045	-18.5	-18.5	0.22 (1)	10.00			
O-N	0/416	-18.5	-18.5	0.08 (1)	10.00			
N-M	0/0	-18.5	-18.5	0.01 (4)	10.00			
M-L	0/0	-18.5	-18.5	0.01 (4)	10.00			


JSI GRIP= 0.90 (J) (INPUT = 0.90)
JSI METAL= 0.51 (B) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H102S		1	TRUSS DESC. JT 45147	E21104367

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:21 2021 Page 1

ID:hd511hZTz_bdeQoS817GKByhVxV-MNr8sV?3R0ma9Tw2d9pl6M_U5uzIz3U4PKFA6dyTUES

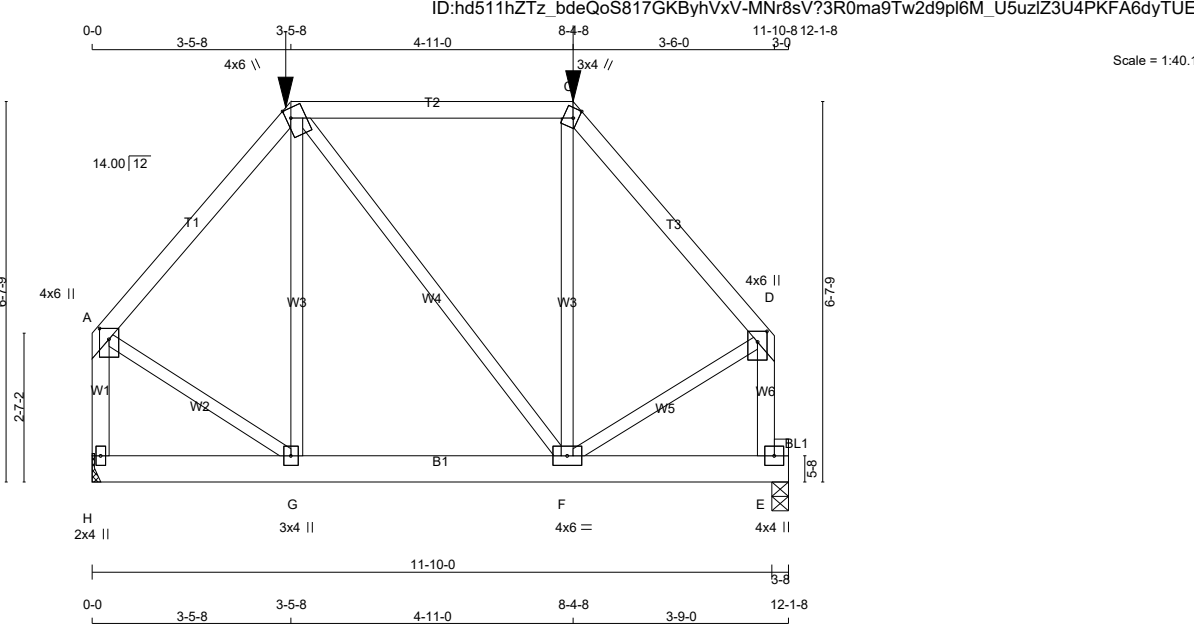

TOTAL WEIGHT = 3 X 67 = 201 lb [M]

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
A - B	2x4	DRY	No.2	SPF
B - C	2x4	DRY	No.2	SPF
C - D	2x4	DRY	No.2	SPF
H - A	2x4	DRY	No.2	SPF
E - D	2x4	DRY	No.2	SPF
H - E	2x6	DRY	No.2	SPF
BEARING BLOCKS				
BL1	2x4	DRY	No.2	SPF
ALL WEBS 2x3 DRY No.2 SPF EXCEPT				
DRY: SEASONED LUMBER.				

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMVW+p	MT20	4.0	6.0	2.25 2.00
B	TTWW+m	MT20	4.0	6.0	2.00 1.00
C	TTW+m	MT20	3.0	4.0	2.00 1.00
D	TMVW+p	MT20	4.0	6.0	2.25 2.00
E	BMVK1+p	MT20	4.0	4.0	
F	BMWWW-t	MT20	4.0	6.0	
G	BMWWW-t	MT20	3.0	4.0	
H	BMV1+p	MT20	2.0	4.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQRD	
		GROSS REACTION		GROSS REACTION		BRG		BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	IN-SX	IN-SX
H	814	0	814	0	0	MECHANICAL			
E	833	0	833	0	0	3-8	2-8		

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H. MINIMUM BEARING LENGTH AT JOINT H = 1-8.

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL	
H	581	352 / 0	0 / 0	0 / 0	0 / 0	228 / 0	0 / 0	
E	594	363 / 0	0 / 0	0 / 0	0 / 0	231 / 0	0 / 0	

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.		MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD LC1 MAX CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED VERT. LOAD LC1 MAX CSI (LC)
FR-TO			FROM TO	LENGTH	FR-TO		
A - B	-557 / 0	-78.0	-78.0	0.19 (1)	6.25	G - B	-92 / 55
B - C	-354 / 0	-114.5	-114.5	0.53 (1)	6.25	B - F	-8 / 0
C - D	-550 / 0	-78.0	-78.0	0.19 (1)	6.25	F - C	-115 / 48
H - A	-776 / 0	0.0	0.0	0.11 (1)	7.81	A - G	0 / 421
E - D	-796 / 0	0.0	0.0	0.11 (1)	7.81	F - D	0 / 475
H - G	0 / 0	-27.2	-27.2	0.05 (4)	10.00		
G - F	0 / 359	-27.2	-27.2	0.08 (4)	10.00		
F - E	-55 / 0	-27.2	-27.2	0.05 (4)	6.25		

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
B	3-5-8	-107	-107	---	FRONT	VERT	TOTAL	---	C1
C	8-4-8	-116	-116	---	FRONT	VERT	TOTAL	---	C1

DESIGN CRITERIA

SPECIFIED LOADS:
LEFT CH. LL = 21.0 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

GIRDER TYPE: CPrimeHip
LEFT SETBACK = 3-5-8
RIGHT SETBACK = 3-9-0
END SETBACK = 3-10-8
END WALL WIDTH = 0-0
CORNER FRAMING TYPE: CONVENTIONAL
END JACK TYPE: CONVENTIONAL
APPLIED TO FRONT SIDE
- ADDT'L LOADS BASED ON 55 % OF GSL.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.39")
CALCULATED VERT. DEFL.(LL)= L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/360 (0.39")
CALCULATED VERT. DEFL.(TL)= L/ 999 (0.01")

CSI: TC=0.53/1.00 (B-C:1) , BC=0.08/1.00 (F-G:4) , WB=0.12/1.00 (D-F:1) , SSI=0.24/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES			
PLATE GRIP(DRY) SHEAR	SECTION	(PSI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.68 (G) (INPUT = 0.90)
JSI METAL= 0.22 (A) (INPUT = 1.00)


LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H103A		1	TRUSS DESC. JT 45147	E21104368

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:22 2021 Page 1

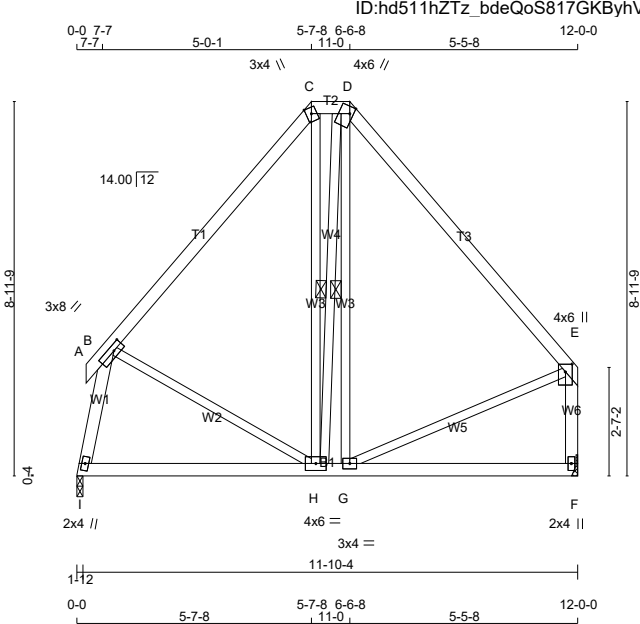

Scale = 1:55.2

TOTAL WEIGHT = 70 lb

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
A - C	2x4	DRY	No.2	SPF
C - D	2x4	DRY	No.2	SPF
D - E	2x4	DRY	No.2	SPF
F - E	2x4	DRY	No.2	SPF
I - F	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT				
B - H	2x3	DRY	No.2	SPF
H - C	2x3	DRY	No.2	SPF
H - D	2x3	DRY	No.2	SPF
G - D	2x3	DRY	No.2	SPF
G - E	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
B	TMWW-t	MT20	3.0	8.0 1.50 3.00
C	TTW+m	MT20	3.0	4.0 Edge
D	TTWW+m	MT20	4.0	6.0 2.00 1.00
E	TMVV+p	MT20	4.0	6.0 2.25 2.00
F	BMV1+p	MT20	2.0	4.0
G	BMWW-t	MT20	3.0	4.0
H	BMWWW-t	MT20	4.0	6.0
I	BMW1+w	MT20	2.0	4.0

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT		REQRD	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	BRG	IN-SX	BRG
I	574	0	574	0	0	1-12	1-8		
F	570	0	570	0	0	MECHANICAL			

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS							
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL		
I	409	250 / 0	0 / 0	0 / 0	0 / 0	159 / 0	0 / 0		
F	407	248 / 0	0 / 0	0 / 0	0 / 0	158 / 0	0 / 0		

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF D-H, D-G.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MAX. FACTORED		FACTORED		MAX. FACTORED		FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	CSI (LC)	MEMB.	FORCE (LBS)	MAX	CSI (LC)
FR-TO		FROM TO		LENGTH FR-TO			
A-B	0 / 19	-78.0 -78.0	0.02 (1)	10.00	I-B	-543 / 0	0.08 (1)
B-C	-309 / 0	-78.0 -78.0	0.24 (1)	6.25	B-H	0 / 115	0.03 (1)
C-D	-201 / 0	-78.0 -78.0	0.01 (1)	6.25	H-C	0 / 48	0.02 (4)
D-E	-310 / 0	-78.0 -78.0	0.30 (1)	6.25	H-D	-3 / 4	0.00 (4)
F-E	-529 / 0	0.0 0.0	0.07 (1)	7.81	G-D	-10 / 39	0.01 (4)
					G-E	0 / 217	0.05 (1)
I-H	0 / 101	-18.5 -18.5	0.15 (4)	10.00			
H-G	0 / 201	-18.5 -18.5	0.16 (4)	10.00			
G-F	0 / 0	-18.5 -18.5	0.13 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:		
TOP CH.	LL = 21.0	PSF
	DL = 6.0	PSF
BOT CH.	LL = 0.0	PSF
	DL = 7.4	PSF
TOTAL LOAD	= 34.4	

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.39")
CALCULATED VERT. DEFL.(LL)= L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.39")
CALCULATED VERT. DEFL.(TL)= L/ 999 (0.03")

CSI: TC=0.30/1.00 (D-E:1) , BC=0.16/1.00 (G-H:4) , WB=0.08/1.00 (B-I:1) , SSI=0.11/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES					
PLATE	GRIP(DRY)	SHEAR	SECTION		
	(PSI)	(PLI)	(PLI)		
	MAX	MIN	MAX	MIN	MAX
MT20	650	371	1747	788	1987

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.37 (C) (INPUT = 0.90)
JSI METAL= 0.16 (E) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H103S		1	TRUSS DESC. JT 45147	E21104369

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:24 2021 Page 1

ID:hd511hZTz bdeQoS817GKByhVxV-myWHUX1xkx990wedIHNSk c2f5z9mRHW5ITqixyTUEP

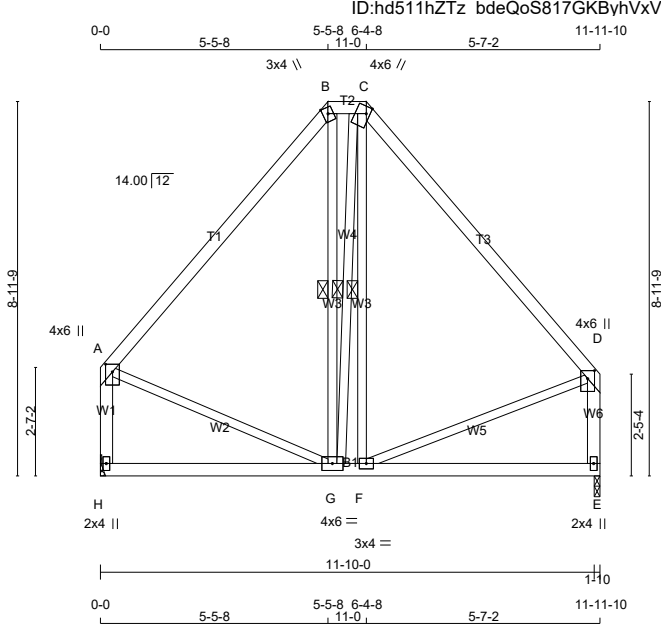

TOTAL WEIGHT = 3 X 69 = 208 lb

[M][F]

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
A - B	2x4	DRY	No.2	SPF
B - C	2x4	DRY	No.2	SPF
C - D	2x4	DRY	No.2	SPF
H - A	2x4	DRY	No.2	SPF
E - D	2x4	DRY	No.2	SPF
H - E	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
EXCEPT				

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMVW+p	MT20	4.0	6.0	2.25 2.00
B	TTW+m	MT20	3.0	4.0	Edge
C	TTWW+m	MT20	4.0	6.0	2.00 1.00
D	TMVW+p	MT20	4.0	6.0	2.25 2.00
E	BMV1+p	MT20	2.0	4.0	
F	BMWW-t	MT20	3.0	4.0	
G	BMWWW-t	MT20	4.0	6.0	
H	BMV1+p	MT20	2.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

		FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT		REQRD	
JT	VERT	HORZ		DOWN	HORZ	UPLIFT	IN-SX	IN-SX	
H	577	0		577	0	0	MECHANICAL		
E	577	0		577	0	0	1-10	1-8	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H. MINIMUM BEARING LENGTH AT JOINT H = 1-8.

UNFACTORED REACTIONS

		MAX./MIN. COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL	
H	412	251 / 0	0 / 0	0 / 0	0 / 0	160 / 0	0 / 0	
E	412	251 / 0	0 / 0	0 / 0	0 / 0	160 / 0	0 / 0	

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF B-G, C-G, C-F.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

		CHORDS				WEBS			
		MAX. FACTORED		FACTORED		MAX. FACTORED		FACTORED	
MEMB.	FORCE (LBS)	VERT.	LOAD	LC1	MAX	MEMB.	FORCE (LBS)	MAX	
				CSI (LC)	UNBRAC			CSI (LC)	
FR-TO		FROM	TO		LENGTH	FR-TO			
A-B	-317 / 0	-78.0	-78.0	0.30 (1)	6.25	G-B	-7 / 46	0.02 (4)	
B-C	-205 / 0	-78.0	-78.0	0.01 (1)	6.25	G-C	-10 / 0	0.01 (1)	
C-D	-318 / 0	-78.0	-78.0	0.32 (1)	6.25	F-C	-1 / 45	0.02 (4)	
H-A	-536 / 0	0.0	0.0	0.07 (1)	7.81	A-G	0 / 221	0.05 (1)	
E-D	-535 / 0	0.0	0.0	0.07 (1)	7.81	F-D	0 / 220	0.05 (1)	
H-G	0 / 0	-18.5	-18.5	0.14 (4)	10.00				
G-F	0 / 206	-18.5	-18.5	0.16 (4)	10.00				
F-E	0 / 0	-18.5	-18.5	0.14 (4)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	21.0	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD	=	34.4	PSF	

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.40")
CALCULATED VERT. DEFL.(LL)= L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.40")
CALCULATED VERT. DEFL.(TL)= L/ 999 (0.03")

CSI: TC=0.32/1.00 (C-D:1) , BC=0.16/1.00 (F-G:4) , WB=0.05/1.00 (A-G:1) , SSI=0.11/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES				
PLATE	GRIP(DRY)	SHEAR	SECTION	
(PSI)	(PLI)	(PLI)	(PLI)	
MAX	MIN	MAX	MIN	MAX
MT20	650	371	1747	788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.36 (B) (INPUT = 0.90)
JSI METAL= 0.16 (D) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H104A		1	TRUSS DESC. JT 45147	E21104370

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:25 2021 Page 1

ID:hd511hZTz_bdeQoS817GKByhVxV-E84fit2aVEH0e4Dps?uhGC9CxVlrVsnfKyDNFOyTUEO

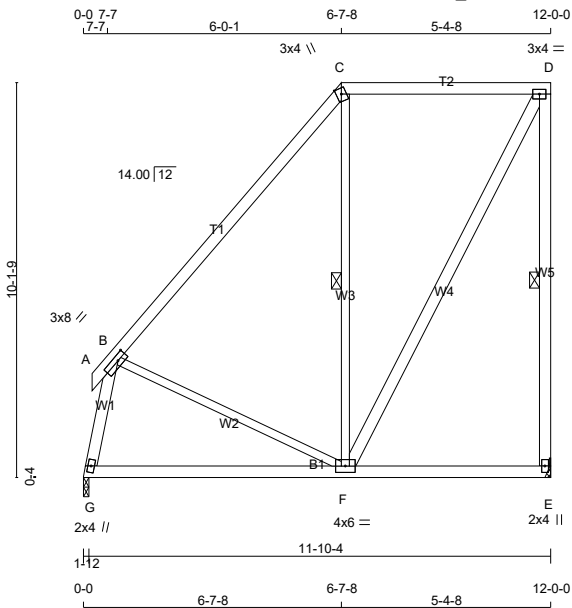

Scale = 1:59.2

TOTAL WEIGHT = 71 lb

[M][F]

LUMBER				DESCR.	
N. L. G. A. RULES					
CHORDS	SIZE		LUMBER		
A - C	2x4	DRY	No.2	SPF	
C - D	2x4	DRY	No.2	SPF	
E - D	2x4	DRY	No.2	SPF	
G - E	2x4	DRY	No.2	SPF	
ALL WEBS	2x4	DRY	No.2	SPF	
EXCEPT					
B - F	2x3	DRY	No.2	SPF	
F - C	2x3	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
B	TMWW-t	MT20	3.0	8.0	1.50	3.00
C	TTW+m	MT20	3.0	4.0	Edge	
D	TMVW-t	MT20	3.0	4.0		
E	BMV1+p	MT20	2.0	4.0		
F	BMVWW-t	MT20	4.0	6.0		
G	BMW1+w	MT20	2.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG
	VERT	HORZ	DOWN	HORZ		
G	574	0	574	0	1-12	1-8
E	570	0	570	0	0	MECHANICAL

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

UNFACTORED REACTIONS

JT	1ST LCASE COMBINED	MAX./MIN. COMPONENT REACTIONS					
		SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
G	409	250 / 0	0 / 0	0 / 0	0 / 0	159 / 0	0 / 0
E	407	248 / 0	0 / 0	0 / 0	0 / 0	158 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) G

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF D-E, C-F.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)		MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)
		FROM	TO				
A-B	0 / 19	-78.0	-78.0 0.02 (1)	10.00	G-B	-535 / 0	0.08 (1)
B-C	-275 / 0	-78.0	-78.0 0.35 (1)	6.25	B-F	0 / 87	0.02 (1)
C-D	-176 / 0	-78.0	-78.0 0.29 (1)	6.25	F-C	-230 / 0	0.16 (1)
E-D	-537 / 0	0.0	0.0 0.27 (1)	6.25	F-D	0 / 372	0.06 (1)
G-F	0 / 100	-18.5	-18.5 0.20 (4)	10.00			
F-E	0 / 0	-18.5	-18.5 0.19 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	21.0	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD	=	34.4	PSF	

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCS 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.39")
CALCULATED VERT. DEFL.(LL)= L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.39")
CALCULATED VERT. DEFL.(TL)= L/ 999 (0.05")

CSI: TC=0.35/1.00 (B-C:1) , BC=0.20/1.00 (F-G:4) , WB=0.16/1.00 (C-F:1) , SSI=0.16/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES		PLATE GRIP(DRY) SHEAR		SECTION	
(PSI)	(PLI)	(PSI)	(PLI)	(PSI)	(PLI)
MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.61 (D) (INPUT = 0.90)
JSI METAL= 0.12 (D) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H104S		1	TRUSS DESC. JT 45147	E21104371

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:27 2021 Page 1

ID:hd511hZTz_bdeQoS817GKByhVxV-BXCP7Z3q1sXktONCzQw9MdEZLJ_Kzm1ynGiUJGyTUEM

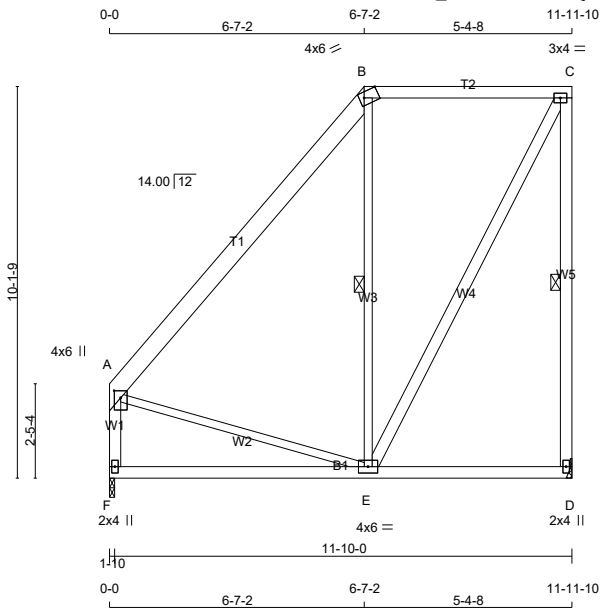

TOTAL WEIGHT = 77 lb

[M][F]

LUMBER					
N. L. G. A. RULES					
CHORDS	SIZE		LUMBER		DESCR.
A - B	2x6	DRY	No.2		SPF
B - C	2x4	DRY	No.2		SPF
D - C	2x4	DRY	No.2		SPF
F - A	2x4	DRY	No.2		SPF
F - D	2x4	DRY	No.2		SPF
ALL WEBS	2x3	DRY	No.2		SPF
EXCEPT					
E - C	2x4	DRY	No.2		SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW+p	MT20	4.0	6.0	2.25	2.00
B	TTW-m	MT20	4.0	6.0	Edge 4.50	
C	TMVW-t	MT20	3.0	4.0		
D	BMV1+p	MT20	2.0	4.0		
E	BMVWW-t	MT20	4.0	6.0		
F	BMV1+p	MT20	2.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG	
	VERT	HORZ	DOWN	HORZ		IN-SX	IN-SX
JT	577	0	577	0	0	1-10	1-8
D	577	0	577	0	0	MECHANICAL	
F	577	0	577	0	0	1-10	1-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT D. MINIMUM BEARING LENGTH AT JOINT D = 1-8.

UNFACTORED REACTIONS

	1ST LCASE COMBINED	MAX./MIN. COMPONENT REACTIONS					
		SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
JT	412	251 / 0	0 / 0	0 / 0	0 / 0	160 / 0	0 / 0
D	412	251 / 0	0 / 0	0 / 0	0 / 0	160 / 0	0 / 0
F	412	251 / 0	0 / 0	0 / 0	0 / 0	160 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-D, B-E.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

MEMB.	CHORDS MAX. FACTORED FORCE (LBS)		FACTORED VERT. LOAD (PLF)				WEBS MAX. FACTORED FORCE (LBS)	
	FR-TO	MEMB.	FROM	TO	LC1	MAX	MEMB.	FR-TO
A-B	-285 / 0		-78.0	-78.0	0.21 (1)	6.25	E-B	-253 / 0
B-C	-181 / 0		-78.0	-78.0	0.29 (1)	6.25	E-C	0 / 384
D-C	-544 / 0		0.0	0.0	0.27 (1)	6.25	A-E	0 / 191
F-A	-528 / 0		0.0	0.0	0.06 (1)	7.81		
F-E	0 / 0		-18.5	-18.5	0.20 (4)	10.00		
E-D	0 / 0		-18.5	-18.5	0.20 (4)	10.00		

DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL	=	21.0	PSF
		DL	=	6.0	PSF
BOT	CH.	LL	=	0.0	PSF
		DL	=	7.4	PSF
TOTAL LOAD					= 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.40")
CALCULATED VERT. DEFL.(LL)= L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.40")
CALCULATED VERT. DEFL.(TL)= L/ 999 (0.05")

CSI: TC=0.29/1.00 (B-C:1) , BC=0.20/1.00 (E-F:4) , WB=0.18/1.00 (B-E:1) , SSI=0.16/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES					
PLATE	GRIP(DRY)	SHEAR	SECTION		
	(PSI)	(PLI)	(PLI)		
MT20	650	371	1747	788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.63 (C) (INPUT = 0.90)
JSI METAL= 0.16 (A) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H105		1	TRUSS DESC. JT 45147	E21104372

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:28 2021 Page 1

ID:hd511hZTz_bdeQoS817GKByhVxv-fjmoKu4So9fbVYyOX7ROuqni_iMliFS60wR1sjyTUEL

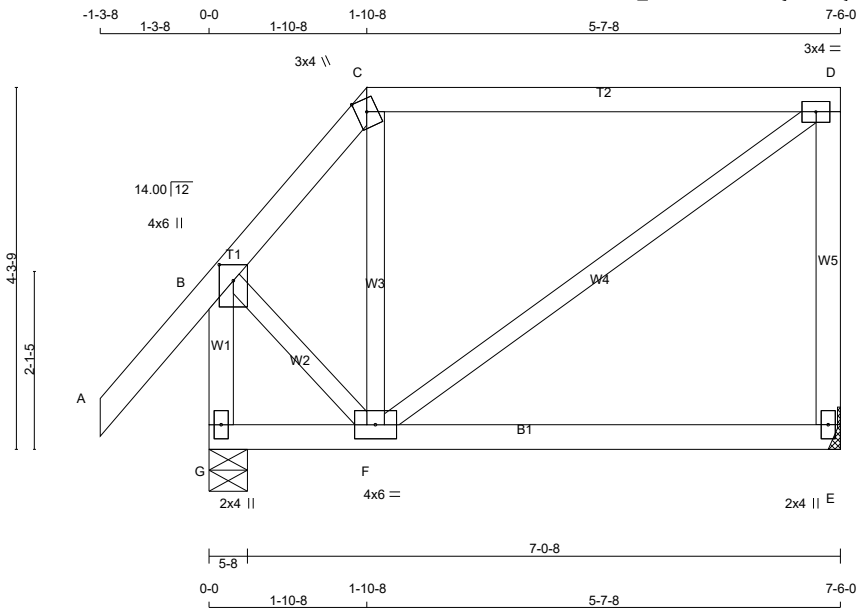

TOTAL WEIGHT = 2 X 37 = 74 lb

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
A - C	2x4	DRY No.2	SPF	
A - D	2x4	DRY No.2	SPF	
E - D	2x4	DRY No.2	SPF	
G - B	2x4	DRY No.2	SPF	
G - E	2x4	DRY No.2	SPF	
ALL WEBS	2x3	DRY No.2	SPF	
EXCEPT				
DRY: SEASONED LUMBER.				

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	6.0	2.25 2.00
C	TTW+m	MT20	3.0	4.0	Edge
D	TMVW-t	MT20	3.0	4.0	
E	BMV1+p	MT20	2.0	4.0	
F	BMWWW-t	MT20	4.0	6.0	
G	BMV1+p	MT20	2.0	4.0	
Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.					

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER							
BEARINGS							
	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG			
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
E	352	0	352	0	0	MECHANICAL	
G	481	0	481	0	0	5-8	1-8
A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.							

UNFACTORED REACTIONS							
	1ST LCASE COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
JT	251	152 / 0	0 / 0	0 / 0	0 / 0	99 / 0	0 / 0
E	341	222 / 0	0 / 0	0 / 0	0 / 0	119 / 0	0 / 0
G							

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) G

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

LOADING							
TOTAL LOAD CASES: (4)							
CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)
FR-TO		FROM	TO		FR-TO		
A-B	0 / 41	-78.0	-78.0 0.11 (1)	10.00	F-C	-100 / 19	0.03 (1)
B-C	-230 / 0	-78.0	-78.0 0.11 (1)	6.25	F-D	0 / 155	0.03 (1)
C-D	-126 / 0	-78.0	-78.0 0.42 (1)	6.25	B-F	0 / 171	0.04 (1)
E-D	-309 / 0	0.0	0.0 0.09 (1)	7.81			
G-B	-488 / 0	0.0	0.0 0.06 (1)	7.81			
G-F	0 / 0	-18.5	-18.5 0.12 (4)	10.00			
F-E	0 / 0	-18.5	-18.5 0.12 (4)	10.00			

DESIGN CRITERIA			
SPECIFIED LOADS:			
TOP CH.	LL	=	21.0 PSF
	DL	=	6.0 PSF
BOT CH.	LL	=	0.0 PSF
	DL	=	7.4 PSF
TOTAL LOAD	=	34.0 PSF	

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.25")

CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")

ALLOWABLE DEFL.(TL)= L/360 (0.25")

CALCULATED VERT. DEFL.(TL) = L/ 999 (0.03")

CSI: TC=0.42/1.00 (C-D:1) , BC=0.12/1.00 (F-G:4) , WB=0.04/1.00 (B-F:1) , SSI=0.17/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX	MIN	MAX MIN
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.58 (C) (INPUT = 0.90)

JSI METAL= 0.12 (B) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:29 2021 Page 1

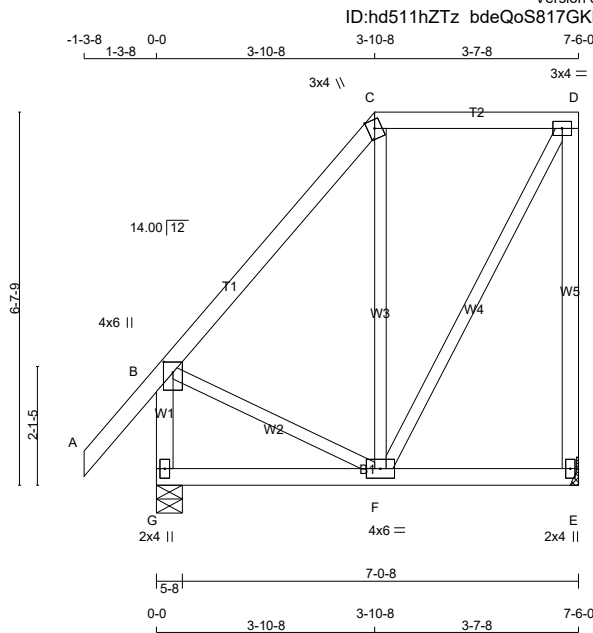

Scale = 1:41.0

TOTAL WEIGHT = 2 X 45 = 89 lb

N. L. G. A. RULES				
CHORDS	SIZE		LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF
C - D	2x4	DRY	No.2	SPF
E - D	2x4	DRY	No.2	SPF
G - B	2x4	DRY	No.2	SPF
G - E	2x4	DRY	No.2	SPF

ALL WEBS EXCEPT	2x3	DRY	No.2	SPF
--------------------	-----	-----	------	-----

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	6.0	2.25	2.00
C	TTW+m	MT20	3.0	4.0	Edge	
D	TMVW-t	MT20	3.0	4.0		
E	BMV1+p	MT20	2.0	4.0		
F	BMWWW-t	MT20	4.0	6.0		
G	BMV1+p	MT20	2.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION			INPUT BRG	REQD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
E	362	0	362	0	0	MECHANICAL	
G	471	0	471	0	0	5-8	1-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
E	258	157 / 0	0 / 0	0 / 0	0 / 0	101 / 0	0 / 0
G	334	216 / 0	0 / 0	0 / 0	0 / 0	117 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) G

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS					WEBS			
MAX. FACTORED		FACTORED			MAX. FACTORED			
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	FORCE (LBS)	MAX CSI (LC)	
FR-TO		FROM TO			FR-TO			
A- B	0 / 41	-78.0	-78.0	0.11 (1)	10.00	F- C	-162 / 0	0.12 (1)
B- C	-173 / 0	-78.0	-78.0	0.15 (1)	6.25	F- D	0 / 225	0.05 (1)
C- D	-109 / 0	-78.0	-78.0	0.13 (1)	6.25	B- F	0 / 122	0.03 (1)
E- D	-337 / 0	0.0	0.0	0.31 (1)	7.81			
G- B	-441 / 0	0.0	0.0	0.05 (1)	7.81			
G- F	0 / 0	-18.5	-18.5	0.07 (4)	10.00			
F- E	0 / 0	-18.5	-18.5	0.07 (4)	10.00			

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL	=	21.0	PSF
		DL	=	6.0	PSF
BOT	CH.	LL	=	0.0	PSF
		DL	=	7.4	PSF

TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE
OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.25")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.25")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01")

CSI: TC=0.31/1.00 (D-E:1) , BC=0.07/1.00 (E-F:4) ,
WB=0.12/1.00 (C-F:1) , SSI=0.11/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY) (PSI)		SHEAR (PLI)		SECTION (PLI)	
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.43 (D) (INPUT = 0.90)
JSI METAL= 0.12 (B) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H107		1	TRUSS DESC. JT 45147	E21104374

Alpa Roof Truss, Maple

ID:hd511hZTz bdeQoS817GKByhVxV-3lRwyw6K5419M?hzCF?5WTPESwM8vzbzYiugiS2yTUEl

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:31 2021 Page 1

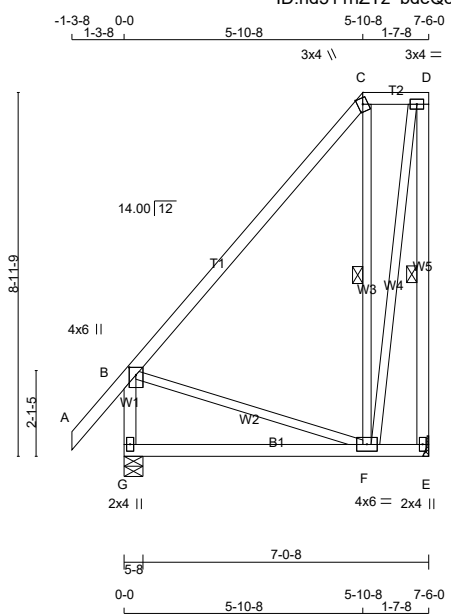

Scale = 1:56.8

TOTAL WEIGHT = 2 X 53 = 107 lb

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE		LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF
C - D	2x4	DRY	No.2	SPF
E - D	2x4	DRY	No.2	SPF
G - B	2x4	DRY	No.2	SPF
G - E	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
EXCEPT				
DRY: SEASONED LUMBER.				

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	6.0	2.25	2.00
C	TTW+m	MT20	3.0	4.0	Edge	
D	TMVW-t	MT20	3.0	4.0		
E	BMV1+p	MT20	2.0	4.0		
F	BMVW-t	MT20	4.0	6.0		
G	BMV1+p	MT20	2.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQD BRG
	VERT	HORZ	DOWN	HORZ	IN-SX	IN-SX
JT	362	0	362	0	0	0
E	362	0	362	0	0	0
G	471	0	471	0	5-8	1-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

UNFACTORED REACTIONS

JT	1ST LCASE COMBINED	MAX./MIN. COMPONENT REACTIONS					
		SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
E	258	157 / 0	0 / 0	0 / 0	0 / 0	101 / 0	0 / 0
G	334	216 / 0	0 / 0	0 / 0	0 / 0	117 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) G

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF D-E, C-F.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD		MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED MAX	
		FROM	TO			CS1 (LC)	CS1 (LC)
FR-TO				LENGTH FR-TO			
A-B	0 / 42	-78.0	-78.0	0.11 (1)	10.00	F-C	-225 / 0 0.12 (1)
B-C	-91 / 0	-78.0	-78.0	0.34 (1)	6.25	F-D	0 / 326 0.07 (1)
C-D	-56 / 0	-78.0	-78.0	0.03 (1)	6.25	B-F	0 / 61 0.01 (1)
E-D	-383 / 0	0.0	0.0	0.14 (1)	6.25		
G-B	-425 / 0	0.0	0.0	0.05 (1)	7.81		
G-F	0 / 0	-18.5	-18.5	0.14 (4)	10.00		
F-E	0 / 0	-18.5	-18.5	0.14 (4)	10.00		

DESIGN CRITERIA

SPECIFIED LOADS:			
TOP CH.	LL	=	21.0 PSF
	DL	=	6.0 PSF
BOT CH.	LL	=	0.0 PSF
	DL	=	7.4 PSF
TOTAL LOAD = 34.4 PSF			

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.25")
CALCULATED VERT. DEFL.(LL)= L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/360 (0.25")
CALCULATED VERT. DEFL.(TL)= L/ 999 (0.04")

CSI: TC=0.34/1.00 (B-C:1) , BC=0.14/1.00 (F-G:4) , WB=0.12/1.00 (C-F:1) , SSI=0.12/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES			
PLATE GRIP(DRY)	SHEAR	SECTION	
(PSI)	(PLI)	(PLI)	
MAX MIN	MAX MIN	MAX MIN	
MT20	650 371	1747 788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.64 (D) (INPUT = 0.90)
JSI METAL= 0.12 (B) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



Scale = 1:49.8



CONTINUED ON PAGE 2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H130		2	JT 45147	E21104375(2)

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:33 2021 Page 2

ID:hd511hZTz_bdeQoS817GKByhVxV-?hZhNc8bdiHtbJrMKg1ZbuUQ2jySNMjr9C9oXwyTUEG

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMWW-t	MT20	4.0	6.0	1.50	3.00
C	TMWW-t	MT20	4.0	4.0	1.50	1.50
D	TMW+w	MT20	2.0	4.0		
E	TS-t	MT20	3.0	6.0		
F	TMWW-t	MT20	4.0	4.0		
G	TMWW-t	MT20	4.0	4.0	1.75	1.75
H	TMVW-t	MT20	4.0	6.0	1.50	2.00
I	BMVK1+p	MT20	6.0	9.0	Edge	3.00
J	BMWW-t	MT20	5.0	6.0	2.50	2.00
K	BMWW-t	MT20	4.0	4.0	2.00	1.50
L	BS-t	MT20	5.0	6.0		
M	BMWWWW-t	MT20	5.0	8.0		
N	BMWW+t	MT20	4.0	6.0	2.50	1.50
O	BMW1+w	MT20	2.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (H) (INPUT = 0.90)
JSI METAL= 0.69 (L) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



Scale = 1:49.8

CONTINUED ON PAGE 2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H131		2	JT 45147	E21104376(2)

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:37 2021 Page 2

ID:hd511hZTz_bdeQoS817GKByhVxV-uSpBDzB5gwoJ4w87ZW6VikeBQLJbJC_Q4q70ghyTUEC

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMWW-t	MT20	4.0	6.0	1.75	2.25
C	TMWW-t	MT20	4.0	4.0	1.75	1.75
D	TMWW-t	MT20	4.0	4.0		
E	TS-t	MT20	3.0	6.0		
F	TMW+w	MT20	2.0	4.0		
G	TMWW-t	MT20	4.0	6.0	2.00	2.50
H	TMVW-t	MT20	4.0	6.0	1.50	2.50
I	BMVK1+p	MT20	4.0	4.0		
J	BMWW-t	MT20	5.0	6.0	2.50	2.50
K	BMWWWW-t	MT20	5.0	8.0		
L	BS-t	MT20	4.0	6.0		
M	BMWW-t	MT20	4.0	4.0	2.00	1.50
N	BMWW-t	MT20	5.0	6.0	2.50	2.75
O	BMW1+w	MT20	2.0	4.0		

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX	MIN	MAX MIN
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.90 (B) (INPUT = 0.90)

JSI METAL= 0.87 (L) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:36:47 2021 Page 1



SPECIFIED LOADS:

TOP	CH.	LL	=	21.0	PSF
		DL	=	6.0	PSF
BOT	CH.	LL	=	0.0	PSF
		DL	=	7.4	PSF
TOTAL LOAD				=	34.4 PSF

LOADING IN FLAT SECTION BASED ON
PIGGYBACK TRUSS WITH SLOPES OF 6.00/12
AND -6.00/12 AND RESPECTIVE HEEL HEIGHTS
OF 0-0 AND 0-0 AND AN ADDITIONAL DEAD
LOAD OF 3.0 P.S.F.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= $L/360$ (1.03")
 CALCULATED VERT. DEFL.(LL) = $L/999$ (0.06")
 ALLOWABLE DEFL.(TL)= $L/360$ (1.03")
 CALCULATED VERT. DEFL.(TL) = $L/999$ (0.22")

CSI: TC=0.89/1.00 (G-H:1), BC=0.47/1.00 (K-M:4),
WB=0.95/1.00 (B-N:1), SSI=0.29/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES					
PLATE	GRIP(DRY)		SHEAR		SECTION
	(PSI)		(PLI)		(PLI)
	MAX	MIN	MAX	MIN	MAX MIN
MT20	650	371	1747	788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.87 (J) (INPUT = 0.90)
JSI METAL= 0.33 (G) (INPUT = 1.00)

Scale = 1:50.5

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

C H O R D S				W E B S				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED		MAX. UNBRAC	MEMB.	MAX. FACTORED		
		VERT. LOAD (PLF)	LC1 MAX CSI (LC)			FORCE (LBS)	MAX CSI (LC)	
FR-TO		FROM	TO	LENGTH	FR-TO			
A-B	0 / 0	-78.0	-78.0	0.05 (1)	10.00	T-B	-3069 / 0	0.60 (1)
B-C	-2389 / 0	-78.0	-78.0	0.07 (1)	5.76	R-C	-2308 / 0	0.33 (1)
C-D	-4747 / 0	-78.0	-78.0	0.23 (1)	4.25	C-D	0 / 3066	0.38 (1)
D-E	-5773 / 0	-78.0	-78.0	0.28 (1)	3.87	Q-D	-1302 / 0	0.18 (1)
E-F	-5770 / 0	-78.0	-78.0	0.32 (1)	3.78	D-P	0 / 1358	0.17 (1)
F-G	-4480 / 0	-165.7	-165.7	0.41 (1)	4.15	P-E	-107 / 0	0.02 (1)
G-H	-4480 / 0	-165.7	-165.7	0.41 (1)	4.15	O-F	0 / 2934	0.36 (1)
H-I	-4086 / 0	-165.7	-165.7	0.49 (1)	4.17	O-F	-3218 / 0	0.83 (1)
I-J	-2652 / 0	-165.7	-165.7	0.43 (1)	5.05	N-H	0 / 566	0.07 (1)
K-J	-3079 / 0	0.0	0.0	0.95 (1)	6.59	O-H	-1269 / 0	0.33 (1)
						N-I	0 / 2060	0.25 (1)
T-S	0 / 703	-39.3	-39.3	0.07 (1)	10.00	L-I	-2483 / 0	0.64 (1)
S-R	0 / 840	-127.0	-127.0	0.12 (1)	10.00	L-J	0 / 3852	0.48 (1)
R-Q	0 / 2449	-127.0	-127.0	0.25 (1)	10.00	B-S	-315 / 0	0.08 (1)
Q-P	0 / 4748	-127.0	-127.0	0.40 (1)	10.00	B-R	0 / 3573	0.44 (1)
P-O	0 / 5362	-127.0	-127.0	0.52 (1)	10.00			
O-N	0 / 4086	-39.3	-39.3	0.43 (1)	10.00			
N-M	0 / 2652	-39.3	-39.3	0.31 (1)	10.00			
M-L	0 / 2652	-39.3	-39.3	0.31 (1)	10.00			
L-K	-82 / 0	-39.3	-39.3	0.14 (4)	6.25			

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H130T		2	JT 45147	E21104378(2)

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:35 2021 Page 2

ID:hd511hZTz_bdeQoS817GKByhVxV-y4hRolAr8JXbrc_kR531gJZn1Xe8rEp8dWewbpyTUEE

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMWW-t	MT20	5.0	8.0	2.00	4.00
C	TMWW-t	MT20	4.0	4.0	1.50	1.50
D	TMWW-t	MT20	4.0	4.0		
E	TMW+w	MT20	2.0	4.0		
F	TMWW-t	MT20	4.0	6.0		
G	TS-t	MT20	3.0	6.0		
H	TMWW-t	MT20	4.0	4.0		
I	TMWW-t	MT20	4.0	4.0	2.00	1.75
J	TMVW-t	MT20	4.0	6.0	1.50	2.75
K	BMVK1+p	MT20	6.0	7.0		
L	BMWW-t	MT20	4.0	6.0	1.50	2.75
M	BS-t	MT20	3.0	6.0		
N	BMWW-t	MT20	4.0	4.0	2.00	1.75
O	BBWW-m	MT20	5.0	6.0	Edge	2.50
P	BBWWW-m	MT20	7.0	8.0	4.00	3.25
Q	BMWW-t	MT20	4.0	6.0	2.00	2.75
R	BBWW-l	MT20	7.0	8.0		
S	BBW-l	MT20	5.0	6.0	3.00	4.25
T	BMW1+w	MT20	2.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX	MIN	MAX
MT20	650	371	1747
	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (L) (INPUT = 0.90)
JSI METAL= 0.53 (O) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



Scale = 1:50.5



TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX CS1 (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CS1 (LC)
FR-TO		FROM TO			FR-TO		
A-B	0 / 0	-78.0	-78.0 0.02 (1)	10.00	S-B	-2763 / 0	0.46 (1)
B-C	-3769 / 0	-153.5	-153.5 0.73 (1)	4.48	B-R	0 / 3913	0.48 (1)
C-D	-4543 / 0	-153.5	-153.5 0.78 (1)	4.13	R-C	-1843 / 0	0.40 (1)
D-E	-4543 / 0	-153.5	-153.5 0.78 (1)	4.13	C-P	0 / 930	0.12 (1)
E-F	-5945 / 0	-78.0	-78.0 0.34 (1)	4.19	E-P	-3368 / 0	0.73 (1)
F-G	-5945 / 0	-78.0	-78.0 0.18 (1)	4.43	E-O	0 / 2938	0.36 (1)
G-H	-4878 / 0	-78.0	-78.0 0.15 (1)	4.82	O-F	0 / 11	0.00 (4)
H-I	-2433 / 0	-78.0	-78.0 0.08 (1)	6.25	O-G	0 / 1352	0.17 (1)
I-J	-749 / 0	-153.5	-153.5 0.07 (1)	6.25	N-G	-1247 / 0	0.15 (1)
K-J	-2900 / 0	0.0	0.0 0.73 (1)	6.75	N-H	0 / 3037	0.38 (1)
					M-H	-2226 / 0	0.27 (1)
S-R	0 / 527	-36.4	-36.4 0.39 (4)	10.00	M-I	0 / 3488	0.43 (1)
R-Q	0 / 3769	-36.4	-36.4 0.56 (4)	10.00	L-I	-3045 / 0	0.66 (1)
Q-P	0 / 3769	-36.4	-36.4 0.56 (4)	10.00	L-J	0 / 2834	0.35 (1)
P-O	0 / 5429	-112.0	-112.0 0.52 (1)	10.00			
O-N	0 / 4878	-112.0	-112.0 0.40 (1)	10.00			
N-M	0 / 2497	-112.0	-112.0 0.25 (1)	10.00			
M-L	0 / 832	-112.0	-112.0 0.12 (1)	10.00			
L-K	-84 / 0	-36.4	-36.4 0.01 (4)	6.25			

COMPANION LIVE LOAD FACTOR = 1.00

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H131T		2	JT 45147	E21104379(2)

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:39 2021 Page 2

ID:hd511hZTz_bdeQoS817GKByhVxV-qrwyeftDMCY21JEIWgx8zr9kVY8?Qn2KjY8c7kayTUEA

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMWW-t	MT20	4.0	6.0	2.00	2.25
C	TMWW-t	MT20	4.0	4.0		
D	TS-t	MT20	3.0	6.0		
E	TMWW+t	MT20	4.0	4.0	1.50	1.50
F	TMW+w	MT20	2.0	4.0		
G	TMWW-t	MT20	4.0	4.0		
H	TMWW-t	MT20	4.0	4.0	1.50	1.50
I	TMWW+t	MT20	4.0	6.0	3.00	1.75
J	TMVW+p	MT20	4.0	6.0	2.75	2.00
K	BMVK1+p	MT20	6.0	7.0		
L	BBWW-l	MT20	6.0	7.0	2.50	5.50
M	BBWW-l	MT20	7.0	8.0		
N	BMWW-t	MT20	4.0	6.0		
O	BBWWW-m	MT20	7.0	8.0	4.00	3.25
P	BBWW-h	MT20	7.0	8.0	2.25	5.25
Q	BS-t	MT20	3.0	6.0		
R	BMWW-t	MT20	4.0	6.0	2.00	2.00
S	BMW1+w	MT20	2.0	4.0		

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (P) (INPUT = 0.90)

JSI METAL= 0.56 (Q) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



TOTAL WEIGHT = 152 lb


JSI GRIP= 0.89 (E) (INPUT = 0.90)
JSI METAL= 0.45 (Q) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H133T		1	TRUSS DESC. JT 45147	E21104381

Alpa Roof Truss, Maple


Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:46 2021 Page 1

ID:hd511hZTz bdeQoS817GKByhVxV-7Brb62IIzhw1fJKsavmcdWIZzPVwAFI9jp UqyTUE3

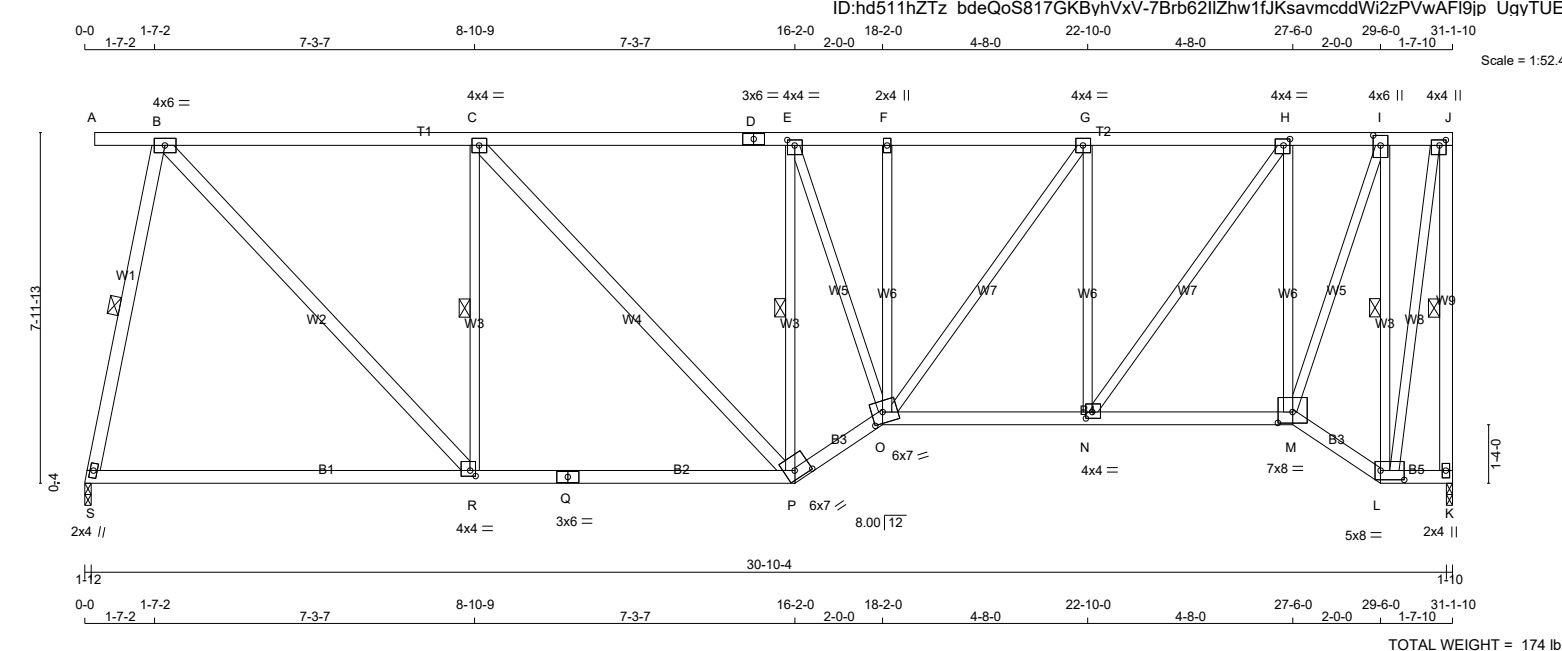

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. A - D 2x4 DRY No.2 SPF D - J 2x4 DRY No.2 SPF K - J 2x4 DRY No.2 SPF S - Q 2x4 DRY No.2 SPF Q - P 2x4 DRY No.2 SPF P - O 2x4 DRY No.2 SPF O - M 2x4 DRY No.2 SPF M - L 2x4 DRY No.2 SPF L - K 2x4 DRY No.2 SPF ALL WEBS 2x4 DRY No.2 SPF EXCEPT R - C 2x3 DRY No.2 SPF P - E 2x3 DRY No.2 SPF E - O 2x3 DRY No.2 SPF O - F 2x3 DRY No.2 SPF O - G 2x3 DRY No.2 SPF N - G 2x3 DRY No.2 SPF N - H 2x3 DRY No.2 SPF M - H 2x3 DRY No.2 SPF M - I 2x3 DRY No.2 SPF L - I 2x3 DRY No.2 SPF L - J 2x3 DRY No.2 SPF DRY: SEASONED LUMBER.				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS FACTORED MAXIMUM FACTORED INPUT REQD GROSS REACTION GROSS REACTION BRG JT VERT HORZ DOWN HORZ UPLIFT IN-SX IN-SX S 1487 0 1487 0 0 1-12 1-10 K 1495 0 1495 0 0 1-10 1-10 UNFACTORED REACTIONS 1ST LCASE MAX./MIN. COMPONENT REACTIONS JT COMBINED SNOW LIVE PERM.LIVE WIND DEAD SOIL S 1060 647 / 0 0 / 0 0 / 0 0 / 0 414 / 0 0 / 0 K 1066 651 / 0 0 / 0 0 / 0 0 / 0 415 / 0 0 / 0 BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.27 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. 1 LATERAL BRACE(S) AT 1 / 2 LENGTH OF B-S, J-K, C-R, E-P, I-L. END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW LOADING TOTAL LOAD CASES: (4) CHORDS WEBS MAX. FACTORED MAX. FACTORED MEMB. FORCE (LBS) VERT. LOAD (PLF) MAX. UNBRAC LENGTH FR-TO MEMB. FORCE (LBS) MAX. UNBRAC LENGTH FR-TO FR-TO FROM TO A-B 0 / 0 -78.0 -78.0 0.12 (1) 10.00 S-B -1451 / 0 0.44 (1) B-C -1295 / 0 -78.0 -78.0 0.73 (1) 4.60 B-R 0 / 1490 0.24 (1) C-D -1538 / 0 -78.0 -78.0 0.77 (1) 4.27 R-C -909 / 0 0.37 (1) D-E -1538 / 0 -78.0 -78.0 0.77 (1) 4.27 C-P 0 / 354 0.06 (1) E-F -1783 / 0 -78.0 -78.0 0.34 (1) 4.60 P-E -1203 / 0 0.48 (1) F-G -1785 / 0 -78.0 -78.0 0.28 (1) 4.72 E-O 0 / 828 0.19 (1) G-H -1460 / 0 -78.0 -78.0 0.26 (1) 5.13 O-F -155 / 0 0.11 (1) H-I -767 / 0 -78.0 -78.0 0.12 (1) 6.25 O-G 0 / 548 0.12 (1) I-J -295 / 0 -78.0 -78.0 0.08 (1) 6.25 N-G -842 / 0 0.62 (1) K-J -1480 / 0 0.0 0.0 0.42 (1) 5.39 N-H 0 / 1155 0.26 (1) M-H -1248 / 0 0.91 (1) S-R 0 / 279 -18.5 -18.5 0.37 (4) 10.00 M-I 0 / 1565 0.35 (1) R-Q 0 / 1295 -18.5 -18.5 0.47 (4) 10.00 L-I -1533 / 0 0.62 (1) Q-P 0 / 1295 -18.5 -18.5 0.47 (4) 10.00 L-J 0 / 1415 0.32 (1) P-O 0 / 1829 -18.5 -18.5 0.31 (1) 10.00 O-N 0 / 1460 -18.5 -18.5 0.29 (1) 10.00 N-M 0 / 787 -18.5 -18.5 0.18 (4) 10.00 M-L 0 / 329 -18.5 -18.5 0.07 (1) 10.00 L-K 0 / 0 -18.5 -18.5 0.01 (4) 10.00 DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF CBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD ALLOWABLE DEFL.(LL)= L/360 (1.03") CALCULATED VERT. DEFL.(LL)= L/ 999 (0.11") ALLOWABLE DEFL.(TL)= L/360 (1.03") CALCULATED VERT. DEFL.(TL)= L/ 999 (0.22") CSI: TC=0.77/1.00 (C-E:1), BC=0.47/1.00 (P-R:4) , WB=0.91/1.00 (H-M:1) , SSI=0.27/1.00 (B-C:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.89 (J) (INPUT = 0.90) JSI METAL= 0.38 (Q) (INPUT = 1.00)				PLATES (table is in inches) JT TYPE PLATES W LEN Y X B TMWW-t MT20 4.0 6.0 C TMWW-t MT20 4.0 4.0 D TS-t MT20 3.0 6.0 E TMWW-t MT20 4.0 4.0 1.50 2.00 F TMW+w MT20 2.0 4.0 G TMWW-t MT20 4.0 4.0 H TMWW-t MT20 4.0 4.0 1.75 1.75 I TMWW+t MT20 4.0 6.0 2.75 2.00 J TMVW+p MT20 4.0 4.0 1.50 1.75 K BMV1+p MT20 2.0 4.0 L BBWW-l MT20 5.0 8.0 2.50 6.50 M BBWW-l MT20 7.0 8.0 3.00 4.00 N BBWW-t MT20 4.0 4.0 1.75 1.75 O BBWWW-m MT20 6.0 7.0 3.00 3.00 P BBWW-h MT20 6.0 7.0 2.25 4.25 Q BS-t MT20 3.0 6.0 LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2 			
---	--	--	--	---	--	--	--	--	--	--	--

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H134T		1	TRUSS DESC. JT 45147	E21104382

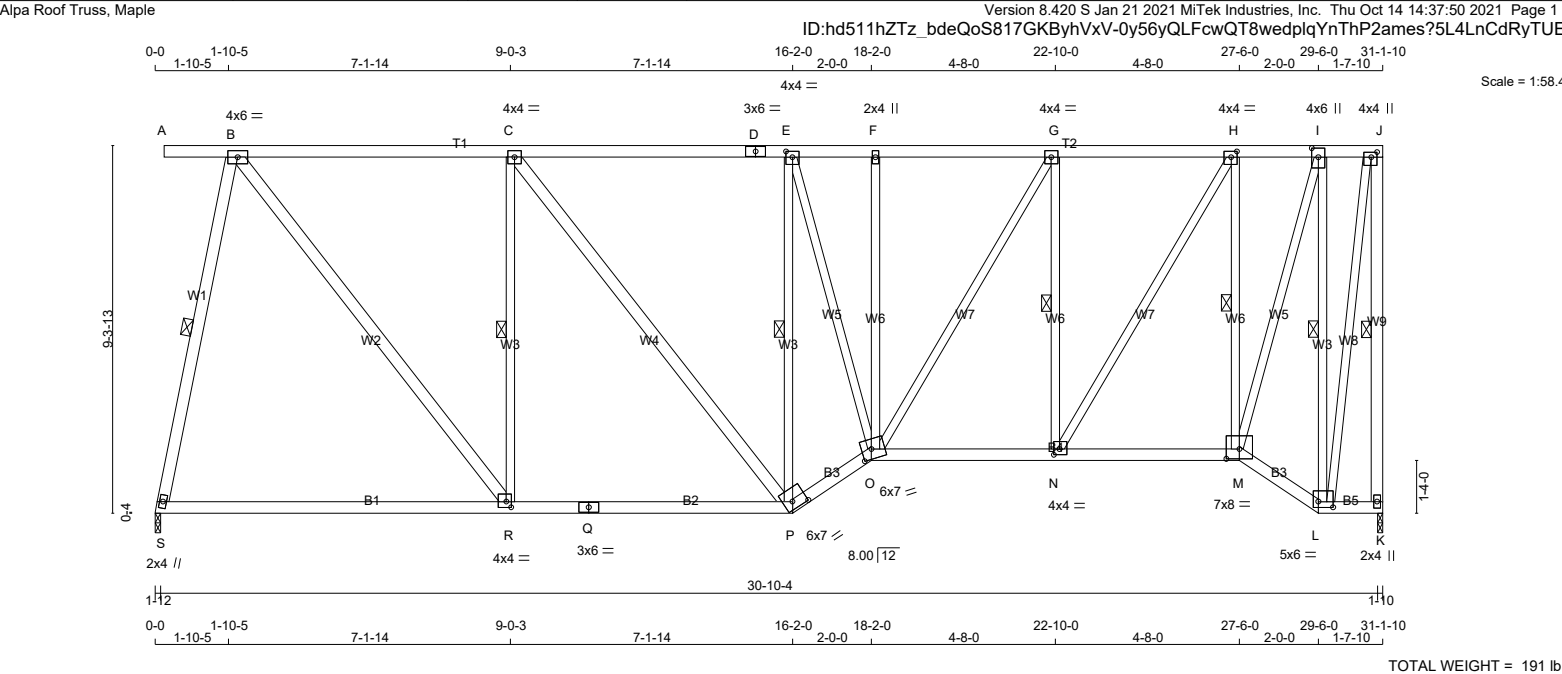

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY No.2	SPF
D - J	2x4	DRY No.2	SPF
K - J	2x4	DRY No.2	SPF
S - Q	2x4	DRY No.2	SPF
Q - P	2x4	DRY No.2	SPF
P - O	2x4	DRY No.2	SPF
O - M	2x4	DRY No.2	SPF
M - L	2x4	DRY No.2	SPF
L - K	2x4	DRY No.2	SPF
ALL WEBS EXCEPT	2x4	DRY No.2	SPF
R - C	2x3	DRY No.2	SPF
P - E	2x3	DRY No.2	SPF
E - O	2x3	DRY No.2	SPF
O - F	2x3	DRY No.2	SPF
O - G	2x3	DRY No.2	SPF
N - G	2x3	DRY No.2	SPF
N - H	2x3	DRY No.2	SPF
M - H	2x3	DRY No.2	SPF
M - I	2x3	DRY No.2	SPF
L - I	2x3	DRY No.2	SPF
L - J	2x3	DRY No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)				
JT TYPE	PLATES	W	LEN	Y X
B TMWW-t	MT20	4.0	6.0	
C TMWW-t	MT20	4.0	4.0	
D TS-t	MT20	3.0	6.0	
E TMWW-t	MT20	4.0	4.0	1.75 2.00
F TMW+w	MT20	2.0	4.0	
G TMWW-t	MT20	4.0	4.0	
H TMWW-t	MT20	4.0	4.0	1.75 1.75
I TMWW+t	MT20	4.0	6.0	2.75 2.00
J TMVW+p	MT20	4.0	4.0	1.50 1.75
K BMV1+p	MT20	2.0	4.0	
L BBWW-l	MT20	5.0	6.0	1.75 4.50
M BBWW-l	MT20	7.0	8.0	3.00 4.00
N BBWW-t	MT20	4.0	4.0	1.75 1.75
O BBWWW-m	MT20	6.0	7.0	3.00 3.00
P BBWW-h	MT20	6.0	7.0	2.25 4.25
Q BS-t	MT20	3.0	6.0	

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT	REQRD
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
S	1486	0	1486	0	1-12
K	1496	0	1496	0	1-10

UNFACTORED REACTIONS		1ST LCASE	MAX./MIN. COMPONENT REACTIONS		
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND
S	1060	646 / 0	0 / 0	0 / 0	0 / 0
K	1066	651 / 0	0 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.64 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF B-S, J-K, C-R, E-P, G-N, H-M, I-L.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING
TOTAL LOAD CASES: (4)

CHORDS		WEBS	
MEMB.	MAX. FACTORED FORCE (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)
FR-TO	FROM TO	FR-TO	FROM TO
A-B	0 / 0	S-B	-1448 / 0
B-C	-1114 / 0	B-R	0 / 1358
C-D	-1312 / 0	R-C	-889 / 0
D-E	-1312 / 0	C-P	0 / 318
E-F	-1475 / 0	P-E	-1049 / 0
F-G	-1477 / 0	E-O	0 / 664
G-H	-1209 / 0	O-F	-160 / 0
H-I	-634 / 0	O-G	0 / 517
I-J	-251 / 0	N-G	-843 / 0
K-J	-1481 / 0	N-H	0 / 1094
S-R	0 / 280	M-H	-1250 / 0
R-Q	0 / 1114	M-I	0 / 1514
Q-P	0 / 1114	L-I	-1503 / 0
P-O	0 / 1562	L-J	0 / 1404
O-N	0 / 1209		
N-M	0 / 650		
M-L	0 / 280		
L-K	0 / 0		

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 21.0 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.03")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.11")
ALLOWABLE DEFL.(TL)= L/360 (1.03")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.21")

CSI: TC=0.70/1.00 (C-E:1), BC=0.46/1.00 (P-R:4), WB=0.86/1.00 (I-L:1), SSI=0.26/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (L) (INPUT = 0.90)
JSI METAL= 0.35 (Q) (INPUT = 1.00)

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:54 2021 Page 1




LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE		LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF
D - J	2x4	DRY	No.2	SPF
K - J	2x4	DRY	No.2	SPF
S - Q	2x4	DRY	No.2	SPF
Q - P	2x4	DRY	No.2	SPF
P - O	2x4	DRY	No.2	SPF
O - M	2x4	DRY	No.2	SPF
M - L	2x4	DRY	No.2	SPF
L - K	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x4	DRY	No.2	SPF
E - O	2x3	DRY	No.2	SPF
O - F	2x3	DRY	No.2	SPF
O - G	2x3	DRY	No.2	SPF
N - G	2x3	DRY	No.2	SPF
N - H	2x3	DRY	No.2	SPF
M - H	2x3	DRY	No.2	SPF
M - I	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

Y. WIDYA
100225448
10/14/2021
PROVINCE OF ONTARIO

CHORDS				WEBS				
MAX. FACTORED		FACTORED		MAX. FACTORED		FACTORED		
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	MAX CSI (LC)	MAX. UNBRAC	MEMB.	FORCE (LBS)	MAX CSI (LC)	
FR-TO		FROM	TO	LENGTH	FR-TO			
A-B	0 / 0	-78.0	-78.0	0.22 (1)	10.00	S-B	-1446 / 0	0.88 (1)
B-C	-980 / 0	-78.0	-78.0	0.63 (1)	5.30	B-R	0 / 1263	0.20 (1)
C-D	-1144 / 0	-78.0	-78.0	0.65 (1)	4.98	R-C	-868 / 0	0.50 (1)
D-E	-1144 / 0	-78.0	-78.0	0.65 (1)	4.98	C-P	0 / 293	0.05 (1)
E-F	-1259 / 0	-78.0	-78.0	0.30 (1)	5.35	P-E	-932 / 0	0.53 (1)
F-G	-1261 / 0	-78.0	-78.0	0.26 (1)	5.43	E-O	0 / 550	0.12 (1)
G-H	-1031 / 0	-78.0	-78.0	0.25 (1)	5.87	O-F	-168 / 0	0.10 (1)
H-I	-540 / 0	-78.0	-78.0	0.10 (1)	6.25	O-G	0 / 499	0.11 (1)
I-J	-222 / 0	-78.0	-78.0	0.05 (1)	6.25	N-G	-846 / 0	0.48 (1)
K-J	-1482 / 0	0.0	0.0	0.85 (1)	5.38	N-H	0 / 1059	0.24 (1)
						M-H	-1232 / 0	0.70 (1)
S-R	0 / 280	-18.5	-18.5	0.38 (4)	10.00	M-I	0 / 1461	0.33 (1)
R-Q	0 / 980	-18.5	-18.5	0.45 (4)	10.00	L-I	-1508 / 0	0.86 (1)
Q-P	0 / 980	-18.5	-18.5	0.45 (4)	10.00	L-J	0 / 1425	0.23 (1)
P-O	0 / 1360	-18.5	-18.5	0.23 (1)	10.00			
O-N	0 / 1031	-18.5	-18.5	0.22 (1)	10.00			
N-M	0 / 554	-18.5	-18.5	0.16 (4)	10.00			
M-L	0 / 242	-18.5	-18.5	0.05 (1)	10.00			
L-K	0 / 0	-18.5	-18.5	0.01 (4)	10.00			

JSI GRIP= 0.90 (L) (INPUT = 0.90)
JSI METAL= 0.34 (Q) (INPUT = 1.00)

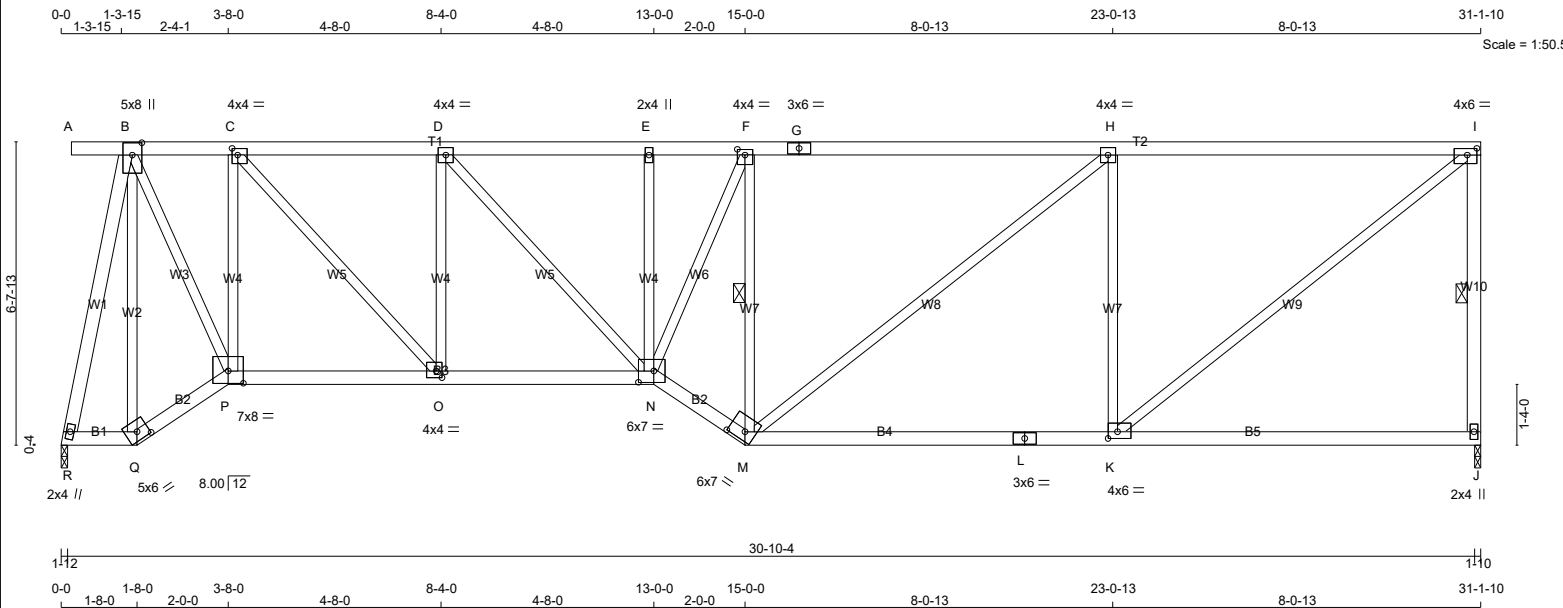

TOTAL WEIGHT = 147 lb

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER		DESCR.
A - G	2x4	DRY	1650F 1.5E	SPF
G - I	2x4	DRY	1650F 1.5E	SPF
J - I	2x4	DRY	No.2	SPF
R - Q	2x4	DRY	No.2	SPF
Q - P	2x4	DRY	No.2	SPF
P - N	2x4	DRY	No.2	SPF
N - M	2x4	DRY	No.2	SPF
M - L	2x4	DRY	No.2	SPF
L - J	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF
R - B	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
B	TMWVW+1	MT20	5.0	8.0	3.25	2.50
C	TMWVW-t	MT20	4.0	4.0	1.75	1.50
D	TMWVW-t	MT20	4.0	4.0		
E	TMWV+w	MT20	2.0	4.0		
F	TMWVW-t	MT20	4.0	4.0	1.50	2.00
G	TS-t	MT20	3.0	6.0		
H	TMWVW-t	MT20	4.0	4.0		
I	TMVW-t	MT20	4.0	6.0	1.75	2.50
J	BMV1+p	MT20	2.0	4.0		
K	BMVWV-t	MT20	4.0	6.0	1.75	2.50
L	BS-t	MT20	3.0	6.0		
M	BBVWV-h	MT20	6.0	7.0	2.25	4.25
N	BBVWVW-p	MT20	6.0	7.0	3.00	4.00
O	BMVWV-t	MT20	4.0	4.0	1.75	1.50
P	BBVWV-l	MT20	7.0	8.0	3.25	4.00
Q	BWV-h	MT20	5.0	6.0	2.25	3.00
R	BMV1+w	MT20	2.0	4.0		

LATERAL BRACE(S) SHOWN SHALL BE
2X4 SPF#2



DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS						
FACTORED			MAXIMUM FACTORED			INPUT
GROSS REACTION			GROSS REACTION			BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX
R	1488	0	1488	0	0	1-12
J	1494	0	1494	0	0	1-10

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
R	1061	647 / 0	0 / 0	0 / 0	0 / 0	414 / 0	0 / 0
J	1065	650 / 0	0 / 0	0 / 0	0 / 0	415 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.39 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

1 LATERAL BRACE(S) AT 1/ 2 LENGTH OF I-J, F-M.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

C H O R D S				W E B S			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED			MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)
		VERT. LOAD (PLF)	LC1	MAX. CSI (LC)			
FR-TO		FROM	TO		FR-TO		
A-B	0 / 0	-78.0	-78.0	0.07 (1)	10.00	R-B -1507 / 0	0.84 (1)
B-C	-940 / 0	-78.0	-78.0	0.09 (1)	6.25	B-P 0 / 1619	0.36 (1)
C-D	-1828 / 0	-78.0	-78.0	0.22 (1)	5.31	P-C -1233 / 0	0.52 (1)
D-E	-2249 / 0	-78.0	-78.0	0.23 (1)	4.90	C-O 0 / 1283	0.29 (1)
E-F	-2246 / 0	-78.0	-78.0	0.34 (1)	4.72	O-D -857 / 0	0.36 (1)
F-G	-1867 / 0	-78.0	-78.0	0.81 (1)	4.39	D-N 0 / 618	0.14 (1)
G-H	-1867 / 0	-78.0	-78.0	0.81 (1)	4.39	N-E -123 / 0	0.05 (1)
H-I	-1510 / 0	-78.0	-78.0	0.77 (1)	4.81	N-F 0 / 1040	0.23 (1)
J-I	-1436 / 0	0.0	0.0	0.29 (1)	5.45	M-F -1431 / 0	0.41 (1)
						M-H 0 / 454	0.10 (1)
R-Q	0 / 295	-18.5	-18.5	0.05 (1)	10.00	K-H -1009 / 0	0.74 (1)
Q-P	0 / 349	-18.5	-18.5	0.07 (1)	10.00	K-I 0 / 1922	0.43 (1)
P-O	0 / 965	-18.5	-18.5	0.21 (1)	10.00	Q-B -159 / 0	0.11 (1)
O-N	0 / 1828	-18.5	-18.5	0.34 (1)	10.00		
N-M	0 / 2215	-18.5	-18.5	0.37 (1)	10.00		
M-L	0 / 1510	-18.5	-18.5	0.49 (4)	10.00		
L-K	0 / 1510	-18.5	-18.5	0.49 (4)	10.00		
K-J	0 / 0	-18.5	-18.5	0.34 (4)	10.00		

DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL =	21.0	PSF
		DL =	6.0	PSF
BOT	CH.	LL =	0.0	PSF
		DL =	7.4	PSF

TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE
OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL
OR SMALL BUILDING REQUIREMENTS OF PART
9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.03")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.12")
ALLOWABLE DEFL.(TL)= L/360 (1.03")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.27")

CSI: TC=0.81/1.00 (F-H:1), BC=0.49/1.00 (K-M:4),
WB=0.84/1.00 (B-R:1), SSI=0.30/1.00 (H-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES					
PLATE	GRIP(DRY)		SHEAR		SECTION
	(PSI)		(PLI)		(PLI)
	MAX	MIN	MAX	MIN	MAX MIN
MT20	650	371	1747	788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.87 (C) (INPUT = 0.90)
JSI METAL= 0.43 (M) (INPUT = 1.00)

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H133A		1	TRUSS DESC. JT 45147	E21104385

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:44 2021 Page 1

ID:hd511hZTz_bdeQoS817GKByhVxV-BokrhNHU14gJQ?ATTUk8YCRlx9j7SHuShPKuQnyTUE5

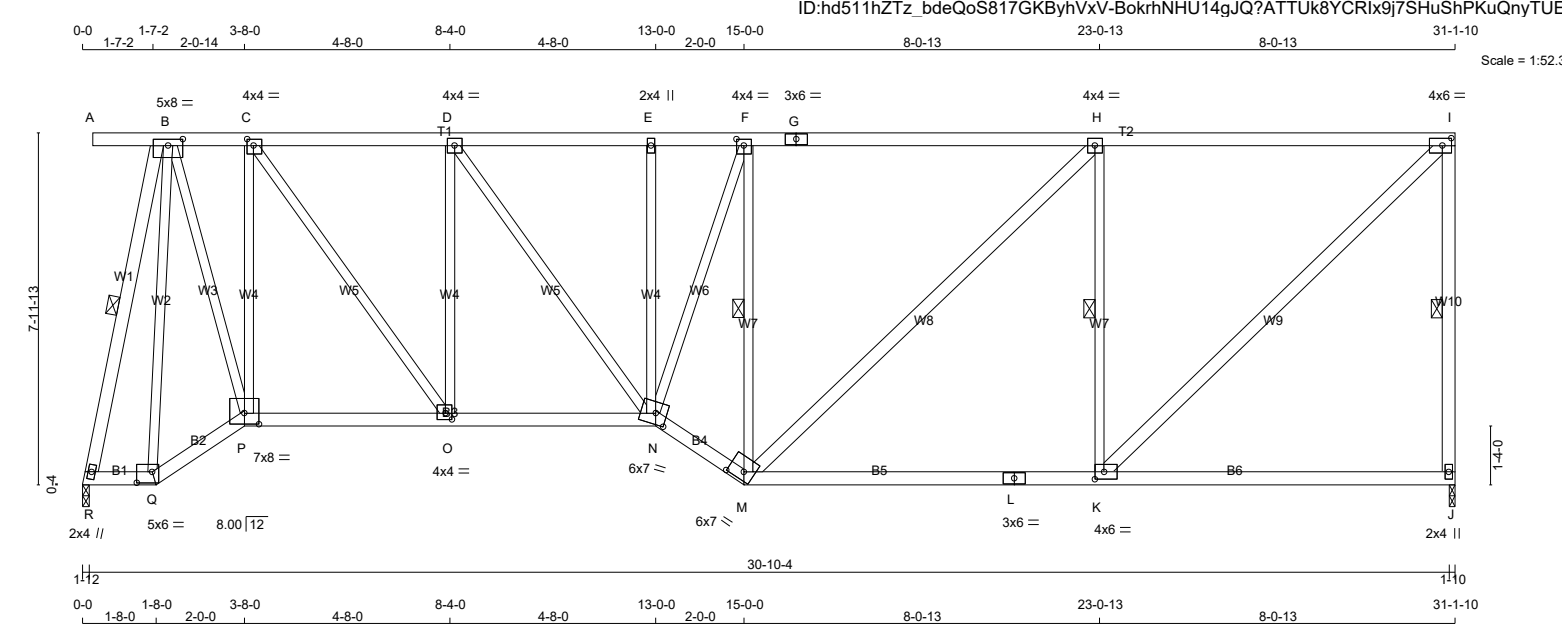

TOTAL WEIGHT = 169 lb

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. A - G 2x4 DRY No.2 SPF G - I 2x4 DRY No.2 SPF J - L 2x4 DRY No.2 SPF R - Q 2x4 DRY No.2 SPF Q - P 2x4 DRY No.2 SPF P - N 2x4 DRY No.2 SPF N - M 2x4 DRY No.2 SPF M - L 2x4 DRY No.2 SPF L - J 2x4 DRY No.2 SPF ALL WEBS 2x4 DRY No.2 SPF EXCEPT P - C 2x3 DRY No.2 SPF C - O 2x3 DRY No.2 SPF O - D 2x3 DRY No.2 SPF D - N 2x3 DRY No.2 SPF N - E 2x3 DRY No.2 SPF N - F 2x3 DRY No.2 SPF M - F 2x3 DRY No.2 SPF K - H 2x3 DRY No.2 SPF Q - B 2x3 DRY No.2 SPF B - P 2x3 DRY No.2 SPF				DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS FACTORED MAXIMUM FACTORED INPUT REQD GROSS REACTION GROSS REACTION BRG JT VERT HORZ DOWN HORZ UPLIFT IN-SX IN-SX R 1490 0 1490 0 0 1-12 1-10 J 1492 0 1492 0 0 1-10 1-10 UNFACTORED REACTIONS 1ST LCASE MAX./MIN. COMPONENT REACTIONS JT COMBINED SNOW LIVE PERM.LIVE WIND DEAD SOIL R 1062 648 / 0 0 / 0 0 / 0 0 / 0 414 / 0 0 / 0 J 1064 649 / 0 0 / 0 0 / 0 0 / 0 414 / 0 0 / 0 BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.75 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. 1 LATERAL BRACE(S) AT 1/2 LENGTH OF B-R, I-J, F-M, H-K. END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW LOADING TOTAL LOAD CASES: (4) CHORDS WEBS MAX. FACTORED MAX. FACTORED MEMB. FORCE (LBS) VERT. LOAD LC1 MAX. UNBRAC LENGTH FR-TO MEMB. FORCE (LBS) MAX. FACTORED FR-TO FROM TO FR-TO A-B 0 / 0 -78.0 -78.0 0.16 (1) 10.00 R-B -1514 / 0 0.46 (1) B-C -730 / 0 -78.0 -78.0 0.16 (1) 6.25 P-C -1147 / 0 0.84 (1) C-D -1440 / 0 -78.0 -78.0 0.28 (1) 5.13 C-O 0 / 1185 0.27 (1) D-E -1771 / 0 -78.0 -78.0 0.30 (1) 4.71 O-D -866 / 0 0.63 (1) E-F -1769 / 0 -78.0 -78.0 0.41 (1) 4.50 D-N 0 / 559 0.13 (1) F-G -1539 / 0 -78.0 -78.0 1.00 (1) 3.75 N-E -121 / 0 0.09 (1) G-H -1539 / 0 -78.0 -78.0 1.00 (1) 3.75 N-F 0 / 783 0.18 (1) H-I -1247 / 0 -78.0 -78.0 0.94 (1) 4.15 M-F -1215 / 0 0.49 (1) J-I -1435 / 0 0.0 0.0 0.41 (1) 5.46 M-H 0 / 403 0.06 (1) R-Q 0 / 334 -18.5 -18.5 0.06 (1) 10.00 K-H -1007 / 0 0.40 (1) Q-P 0 / 410 -18.5 -18.5 0.08 (1) 10.00 K-I 0 / 1723 0.28 (1) P-O 0 / 749 -18.5 -18.5 0.18 (4) 10.00 Q-B -194 / 0 0.24 (1) O-N 0 / 1440 -18.5 -18.5 0.29 (1) 10.00 B-P 0 / 1480 0.33 (1) N-M 0 / 1830 -18.5 -18.5 0.31 (1) 10.00 M-L 0 / 1247 -18.5 -18.5 0.47 (4) 10.00 L-K 0 / 1247 -18.5 -18.5 0.47 (4) 10.00 K-J 0 / 0 -18.5 -18.5 0.35 (4) 10.00				DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF CBC 2018 , ABC 2019 - PART 9 OF CBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 DESIGN ASSUMPTIONS -OVERHANG NOT TO BE ALTERED OR CUT OFF. (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD ALLOWABLE DEFL.(LL)= L/360 (1.03") CALCULATED VERT. DEFL.(LL) = L/ 999 (0.10") ALLOWABLE DEFL.(TL)= L/360 (1.03") CALCULATED VERT. DEFL.(TL) = L/ 999 (0.23") CSI: TC=1.00/1.00 (F-H:1) , BC=0.47/1.00 (K-M:4) , WB=0.84/1.00 (C-P:1) , SSI=0.30/1.00 (H-I:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.90 (C) (INPUT = 0.90) JSI METAL= 0.36 (L) (INPUT = 1.00)			
--	--	--	--	--	--	--	--	--	--	--	--

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMWW-t	MT20	5.0	8.0	1.75 4.00
C	TMWW-t	MT20	4.0	4.0	1.75 1.75
D	TMWW-t	MT20	4.0	4.0	
E	TMW+w	MT20	2.0	4.0	
F	TMWW-t	MT20	4.0	4.0	1.75 2.00
G	TS-t	MT20	3.0	6.0	
H	TMWW-t	MT20	4.0	4.0	
I	TMVW-t	MT20	4.0	6.0	2.00 2.50
J	BMV1+p	MT20	2.0	4.0	
K	BMWW-t	MT20	4.0	6.0	2.00 2.50
L	BS-t	MT20	3.0	6.0	
M	BBWW-h	MT20	6.0	7.0	2.25 4.25
N	BBWW-m	MT20	6.0	7.0	3.00 3.00
O	BMWW-t	MT20	4.0	4.0	1.75 1.75
P	BBWW-l	MT20	7.0	8.0	3.00 4.00
Q	BBW-l	MT20	5.0	6.0	3.00 4.25
R	BMW1+w	MT20	2.0	4.0	

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H134A		1	TRUSS DESC. JT 45147	E21104386

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:48 2021 Page 1

ID:hd511hZTz_bdeQoS817GKByhVxV-3azMXkK?4JAlvcUEiKo4i2c?jm5KO8n2c1I5ZYyTUE1

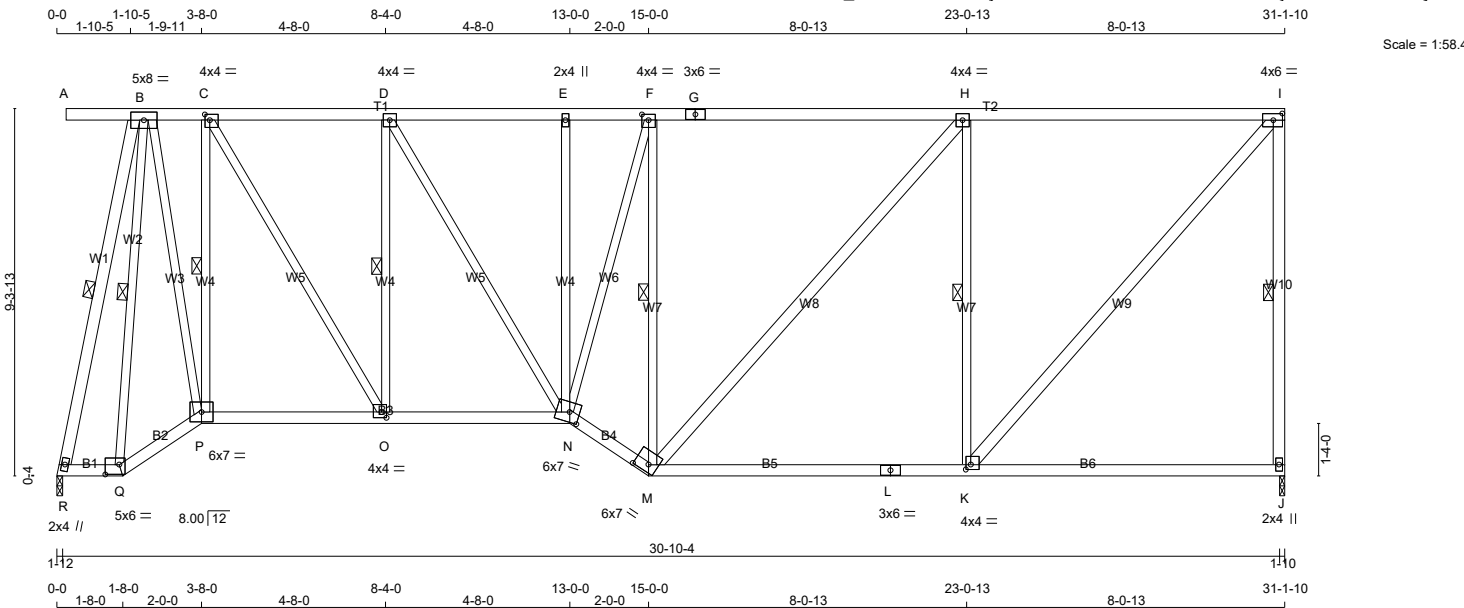

LUMBER TOTAL WEIGHT = 185 lb

N. L. G. A. RULES			DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER			DESIGN CRITERIA		
CHORDS			BEARINGS			SPECIFIED LOADS:		
A - G	2x4	DRY	No.2	SPF	FACTORED	TOP CH.	LL = 21.0	PSF
G - I	2x4	DRY	No.2	SPF	GROSS REACTION	DL = 6.0	PSF	
J - I	2x4	DRY	No.2	SPF	VERT	BOT CH.	LL = 0.0	PSF
R - Q	2x4	DRY	No.2	SPF	HORZ	DL = 7.4	PSF	
Q - P	2x4	DRY	No.2	SPF	DOWN	TOTAL LOAD = 34.4	PSF	
P - N	2x4	DRY	No.2	SPF	HORZ			
N - M	2x4	DRY	No.2	SPF	UPLIFT			
M - L	2x4	DRY	No.2	SPF	IN-SX			
L - J	2x4	DRY	No.2	SPF	IN-SX			
ALL WEBS			UNFACTORED REACTIONS			SPACING = 24.0 IN. C/C		
EXCEPT			1ST LCASE			LOADING IN FLAT SECTION BASED ON A SLOPE		
P - C	2x3	DRY	No.2	SPF	COMBINED	OF 2.00/12 MINIMUM		
C - O	2x3	DRY	No.2	SPF	SNOW	THIS TRUSS IS DESIGNED FOR RESIDENTIAL		
O - D	2x3	DRY	No.2	SPF	LIVE	OR SMALL BUILDING REQUIREMENTS OF PART		
D - N	2x3	DRY	No.2	SPF	PERM. LIVE	9, NBCC 2015		
N - E	2x3	DRY	No.2	SPF	WIND	THIS DESIGN COMPLIES WITH:		
N - F	2x3	DRY	No.2	SPF	DEAD	- PART 9 OF BCBC 2018 , ABC 2019		
M - F	2x3	DRY	No.2	SPF	SOIL	- PART 9 OF OBC 2012 (2019 AMENDMENT)		
K - H	2x3	DRY	No.2	SPF		- CSA 086-14		
Q - B	2x3	DRY	No.2	SPF		- TPIC 2014		
B - P	2x3	DRY	No.2	SPF		DESIGN ASSUMPTIONS		

DRY: SEASONED LUMBER.

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.05 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF B-R, I-J, C-P, D-O, F-M, H-K, B-Q.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

PLATES (table is in inches)						TOTAL LOAD CASES: (4)										ROOF LIVE LOAD									
JT	TYPE	PLATES	W	LEN	Y	X	CHORDS					WEBS													
B	TMWW-t	MT20	5.0	8.0			MAX. FACTORED		FACTORED		LC1		MAX		MEMB.		MAX. FACTORED								
C	TMWW-t	MT20	4.0	4.0	1.75	1.50	FORCE		VERT. LOAD		CSI (LC)		UNBRAC		FORCE		MAX								
D	TMWW-t	MT20	4.0	4.0			(LBS)		(PLF)		(LC)		LENGTH		(LBS)		CSI (LC)								
E	TMWW-w	MT20	2.0	4.0			FR-TO		FROM		TO		FR-TO		FR-TO										
F	TMWW-t	MT20	4.0	4.0	1.75	2.00	A-B	0 / 0	-78.0	-78.0	0.20	(1)	10.00	R-B	-1511 / 0	0.65	(1)	ALLOWABLE DEFL. (LL)= L/360 (1.03")							
G	TS-t	MT20	3.0	6.0			B-C	-602 / 0	-78.0	-78.0	0.20	(1)	6.25	P-C	-1106 / 0	0.44	(1)	CALCULATED VERT. DEFL. (LL) = L / 999 (0.09")							
H	TMWW-t	MT20	4.0	4.0			C-D	-1191 / 0	-78.0	-78.0	0.27	(1)	5.52	C-O	0 / 1125	0.25	(1)	ALLOWABLE DEFL. (TL)= L/360 (1.03")							
I	TMVV-t	MT20	4.0	6.0	2.00	2.75	D-E	-1463 / 0	-78.0	-78.0	0.29	(1)	5.09	O-D	-869 / 0	0.35	(1)	CALCULATED VERT. DEFL. (TL) = L / 999 (0.21")							
J	BMV1+p	MT20	2.0	4.0			E-F	-1462 / 0	-78.0	-78.0	0.40	(1)	4.88	D-N	0 / 525	0.12	(1)								
K	BMWW-t	MT20	4.0	4.0	1.50	1.50	F-G	-1311 / 0	-78.0	-78.0	0.95	(1)	4.05	N-E	-120 / 0	0.15	(1)	CSI: TC=0.95/1.00 (F-H:1), BC=0.45/1.00 (K-M:4),							
L	BS-t	MT20	3.0	6.0			G-H	-1311 / 0	-78.0	-78.0	0.95	(1)	4.05	N-F	0 / 616	0.14	(1)	WB=0.65/1.00 (B-R:1), SSI=0.30/1.00 (H-I:1)							
M	BBWW-h	MT20	6.0	7.0	2.25	4.25	H-I	-1063 / 0	-78.0	-78.0	0.90	(1)	4.46	M-F	-1066 / 0	0.61	(1)	DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10							
N	BBWW-m	MT20	6.0	7.0	3.00	3.00	J-I	-1435 / 0	0.0	0.0	0.58	(1)	5.46	M-H	0 / 372	0.06	(1)	COMP=1.10 SHEAR=1.10 TENS= 1.10							
O	BMWW-t	MT20	4.0	4.0	1.75	1.50								K-W	-1006 / 0	0.57	(1)	COMPANION LIVE LOAD FACTOR = 1.00							
P	BBWW-l	MT20	6.0	7.0			R-Q	0 / 320	-18.5	-18.5	0.06	(1)	10.00	K-I	0 / 1595	0.26	(1)								
Q	BBW-l	MT20	5.0	6.0	3.00	4.25	Q-P	0 / 397	-18.5	-18.5	0.08	(1)	10.00	Q-B	-187 / 0	0.11	(1)	TRUSS PLATE MANUFACTURER IS NOT							
R	BMW1+w	MT20	2.0	4.0			P-O	0 / 617	-18.5	-18.5	0.17	(4)	10.00	B-P	0 / 1405	0.32	(1)	RESPONSIBLE FOR QUALITY CONTROL IN THE							
							O-N	0 / 1191	-18.5	-18.5	0.25	(1)	10.00					TRUSS MANUFACTURING PLANT .							

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



ALLOWABLE DEFL.(LL)= L/360 (1.03")

CALCULATED VERT. DEFL.(LL) = L/ 999 (0.09")

ALLOWABLE DEFL.(TL)= L/360 (1.03")

CALCULATED VERT. DEFL.(TL) = L/ 999 (0.21")

CSI: TC=0.95/1.00 (F-H:1), BC=0.45/1.00 (K-M:4), WB=0.65/1.00 (B-R:1), SSI=0.30/1.00 (H-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10

COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES


PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX	MIN	MAX
MT20	650	371	1747
	788		1987
			1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (I) (INPUT = 0.90)

JSI METAL= 0.36 (K) (INPUT = 1.00)

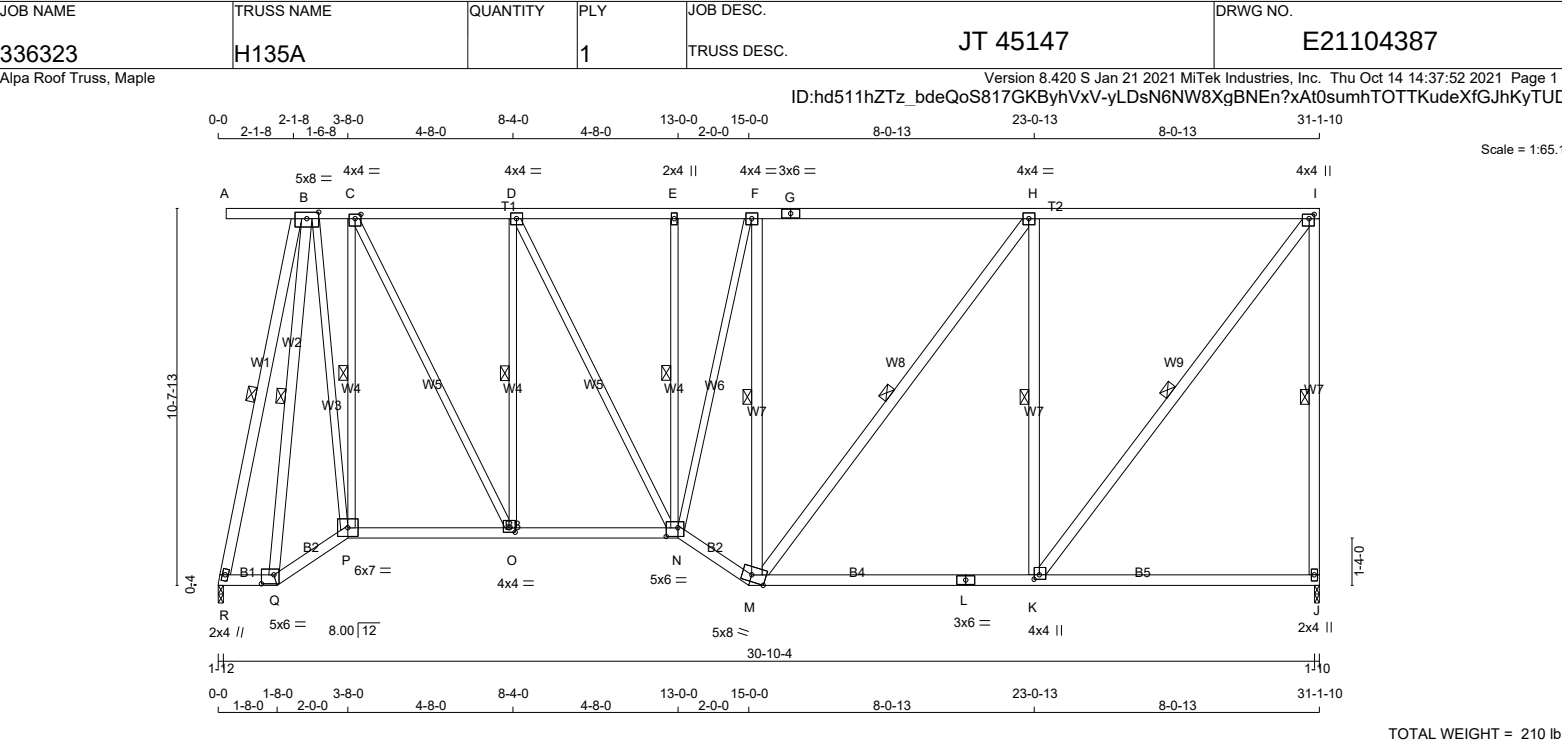

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - G	2x4	DRY	No.2
G - I	2x4	DRY	No.2
J - I	2x4	DRY	No.2
R - Q	2x4	DRY	No.2
Q - P	2x4	DRY	No.2
P - N	2x4	DRY	No.2
N - M	2x4	DRY	No.2
M - L	2x4	DRY	No.2
L - J	2x4	DRY	No.2
ALL WEBS	2x4	DRY	No.2
EXCEPT			
P - C	2x3	DRY	No.2
C - O	2x3	DRY	No.2
O - D	2x3	DRY	No.2
D - N	2x3	DRY	No.2
N - E	2x3	DRY	No.2
N - F	2x3	DRY	No.2
B - P	2x3	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMWW-t	MT20	5.0	8.0	2.25 4.00
C	TMWW-t	MT20	4.0	4.0	1.50 2.00
D, F, H					
D	TMWW-t	MT20	4.0	4.0	
E	TMW+w	MT20	2.0	4.0	
G	TS-t	MT20	3.0	6.0	
I	TMVW+p	MT20	4.0	4.0	1.50 1.75
J	BMV1+p	MT20	2.0	4.0	
K	BMWW+t	MT20	4.0	4.0	1.50 1.75
L	BS-t	MT20	3.0	6.0	
M	BBWW-m	MT20	5.0	8.0	Edge 4.75
N	BBWW-p	MT20	5.0	6.0	3.00 4.00
O	BMWW-t	MT20	4.0	4.0	1.50 2.00
P	BBWW-l	MT20	6.0	7.0	
Q	BBW-l	MT20	5.0	6.0	3.00 4.25
R	BMW1+w	MT20	2.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG	
JT	VERT	HORZ		DOWN	HORZ	UPLIFT	IN-SX	IN-SX	
R	1490	0		1490	0	0	1-12	1-10	
J	1492	0		1492	0	0	1-10	1-10	

UNFACTORED REACTIONS		1ST LCASE		MAX./MIN. COMPONENT REACTIONS	
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND
R	1062	648 / 0	0 / 0	0 / 0	0 / 0
J	1064	649 / 0	0 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.35 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF B-R, I-J, C-P, D-O, E-N, F-M, H-M, H-K, I-K, B-Q.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING		TOTAL LOAD CASES: (4)	
CHORDS		WEBS	
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED FORCE (LBS)
FR-TO		FROM TO	MEMB. MAX. FACTORED FORCE (LBS)
A-B	0 / 0	-78.0 -78.0 0.27 (1)	R-B -1512 / 0
B-C	-511 / 0	-78.0 -78.0 0.27 (1)	P-C -1021 / 0
C-D	-1016 / 0	-78.0 -78.0 0.27 (1)	C-O 0 / 1092
D-E	-1247 / 0	-78.0 -78.0 0.28 (1)	O-D -875 / 0
E-F	-1245 / 0	-78.0 -78.0 0.37 (1)	D-N 0 / 503
F-G	-1142 / 0	-78.0 -78.0 0.90 (1)	N-E -137 / 0
G-H	-1142 / 0	-78.0 -78.0 0.90 (1)	N-F 0 / 503
H-I	-926 / 0	-78.0 -78.0 0.87 (1)	M-F -946 / 0
J-I	-1435 / 0	0.0 0.0 0.82 (1)	M-H 0 / 353
R-Q	0 / 323	-18.5 -18.5 0.06 (1)	K-H -1004 / 0
Q-P	0 / 405	-18.5 -18.5 0.08 (1)	K-I 0 / 1507
P-O	0 / 523	-18.5 -18.5 0.16 (4)	Q-B -192 / 0
O-N	0 / 1016	-18.5 -18.5 0.22 (1)	B-P 0 / 1310
N-M	0 / 1347	-18.5 -18.5 0.23 (1)	
M-L	0 / 926	-18.5 -18.5 0.44 (4)	
L-K	0 / 926	-18.5 -18.5 0.44 (4)	
K-J	0 / 0	-18.5 -18.5 0.35 (4)	

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 21.0 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 34.4 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.03")
CALCULATED VERT. DEFL.(LL) = L/999 (0.08")
ALLOWABLE DEFL.(TL)= L/360 (1.03")
CALCULATED VERT. DEFL.(TL) = L/999 (0.20")

CSI: TC=0.90/1.00 (F-H:1) , BC=0.44/1.00 (K-M:4) , WB=0.92/1.00 (B-R:1) , SSI=0.30/1.00 (H-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (K) (INPUT = 0.90)
JSI METAL= 0.41 (I) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H136P		1	TRUSS DESC. JT 45147	E21104388

Alpa Roof Truss, Maple


ID:hd511hZTz bdeQoS817GKByhVxV-Mwu???PORS3IEhWacIQiUXOHVbX1XS94DdUzleyTUDW

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:55 2021 Page 1

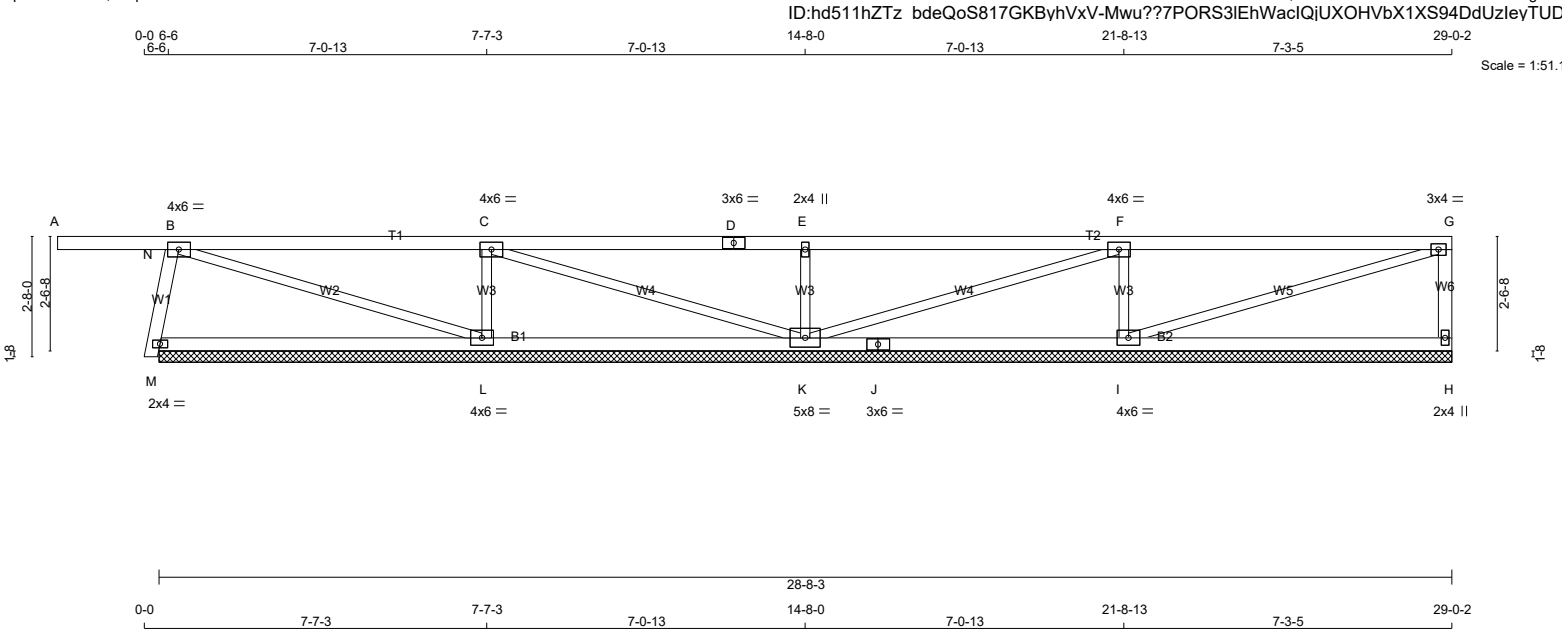

LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. A - D 2x4 DRY No.2 SPF D - G 2x4 DRY No.2 SPF H - G 2x4 DRY No.2 SPF M - J 2x4 DRY No.2 SPF J - H 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF EXCEPT N - B 2x4 DRY No.2 SPF DRY: SEASONED LUMBER.										DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS <table><thead><tr><th rowspan="2">JT</th><th colspan="2">FACTORED GROSS REACTION</th><th colspan="2">MAXIMUM FACTORED GROSS REACTION</th><th rowspan="2">INPUT BRG</th><th colspan="2">REQRD BRG</th></tr><tr><th>VERT</th><th>HORZ</th><th>DOWN</th><th>HORZ</th><th>IN-SX</th><th>IN-SX</th></tr></thead><tbody><tr><td>H</td><td>279</td><td>0</td><td>279</td><td>0</td><td>0</td><td>28-8-3 (12-8-1119</td><td></td></tr><tr><td>M</td><td>449</td><td>0</td><td>449</td><td>0</td><td>0</td><td>28-8-3 (12-8-1119</td><td></td></tr><tr><td>L</td><td>781</td><td>0</td><td>781</td><td>0</td><td>0</td><td>28-8-3 (12-8-1119</td><td></td></tr><tr><td>K</td><td>654</td><td>0</td><td>654</td><td>0</td><td>0</td><td>28-8-3 (12-8-1119</td><td></td></tr><tr><td>I</td><td>782</td><td>0</td><td>782</td><td>0</td><td>0</td><td>28-8-3 (12-8-1119</td><td></td></tr></tbody></table> VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH UNFACTORED REACTIONS <table><thead><tr><th rowspan="2">JT</th><th rowspan="2">1ST LCASE COMBINED</th><th colspan="6">MAX./MIN. COMPONENT REACTIONS</th></tr><tr><th>SNOW</th><th>LIVE</th><th>PERM.LIVE</th><th>WIND</th><th>DEAD</th><th>SOIL</th></tr></thead><tbody><tr><td>H</td><td>199</td><td>122 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>77 / 0</td><td>0 / 0</td></tr><tr><td>M</td><td>317</td><td>212 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>104 / 0</td><td>0 / 0</td></tr><tr><td>L</td><td>557</td><td>337 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>220 / 0</td><td>0 / 0</td></tr><tr><td>K</td><td>466</td><td>288 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>178 / 0</td><td>0 / 0</td></tr><tr><td>I</td><td>558</td><td>339 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>219 / 0</td><td>0 / 0</td></tr></tbody></table> BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H, M, L, K, I BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. MAX. UNBRACED INTERIOR CHORD LENGTH = 7.81 FT ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED. LOADING TOTAL LOAD CASES: (4) <table><thead><tr><th colspan="4">CHORDS</th><th colspan="4">WEBS</th></tr><tr><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>FACTORED VERT. LOAD (PLF)</th><th>MAX LC1 CSI (LC)</th><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>MAX LC1 CSI (LC)</th><th></th></tr></thead><tbody><tr><td>FR-TO</td><td></td><td>FROM TO</td><td></td><td>FR-TO</td><td></td><td></td><td></td></tr><tr><td>A-B</td><td>0 / 0</td><td>-78.0 -78.0</td><td>0.35 (1)</td><td>10.00</td><td>N-M</td><td>0 / 0</td><td>0.00 (1)</td></tr><tr><td>B-C</td><td>-23 / 0</td><td>-78.0 -78.0</td><td>0.56 (1)</td><td>6.25</td><td>M-B</td><td>-402 / 0</td><td>0.05 (1)</td></tr><tr><td>C-D</td><td>0 / 25</td><td>-78.0 -78.0</td><td>0.56 (1)</td><td>10.00</td><td>B-L</td><td>-58 / 0</td><td>0.06 (1)</td></tr><tr><td>D-E</td><td>0 / 25</td><td>-78.0 -78.0</td><td>0.56 (1)</td><td>10.00</td><td>L-C</td><td>-609 / 0</td><td>0.10 (1)</td></tr><tr><td>E-F</td><td>0 / 25</td><td>-78.0 -78.0</td><td>0.59 (1)</td><td>10.00</td><td>C-K</td><td>-51 / 0</td><td>0.06 (1)</td></tr><tr><td>F-G</td><td>-5 / 0</td><td>-78.0 -78.0</td><td>0.59 (1)</td><td>10.00</td><td>K-E</td><td>-510 / 0</td><td>0.08 (1)</td></tr><tr><td>H-G</td><td>-226 / 0</td><td>0.0 0.0</td><td>0.03 (1)</td><td>7.81</td><td>K-F</td><td>-31 / 0</td><td>0.03 (1)</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>I-F</td><td>-631 / 0</td><td>0.10 (1)</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>I-G</td><td>0 / 5</td><td>0.00 (1)</td></tr><tr><td>M-L</td><td>0 / 79</td><td>-18.5 -18.5</td><td>0.25 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>L-K</td><td>0 / 23</td><td>-18.5 -18.5</td><td>0.25 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>K-J</td><td>0 / 5</td><td>-18.5 -18.5</td><td>0.24 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>J-I</td><td>0 / 5</td><td>-18.5 -18.5</td><td>0.24 (4)</td><td>10.00</td><td></td><td></td><td></td></tr><tr><td>I-H</td><td>0 / 0</td><td>-18.5 -18.5</td><td>0.24 (4)</td><td>10.00</td><td></td><td></td><td></td></tr></tbody></table>										JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG		VERT	HORZ	DOWN	HORZ	IN-SX	IN-SX	H	279	0	279	0	0	28-8-3 (12-8-1119		M	449	0	449	0	0	28-8-3 (12-8-1119		L	781	0	781	0	0	28-8-3 (12-8-1119		K	654	0	654	0	0	28-8-3 (12-8-1119		I	782	0	782	0	0	28-8-3 (12-8-1119		JT	1ST LCASE COMBINED	MAX./MIN. COMPONENT REACTIONS						SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL	H	199	122 / 0	0 / 0	0 / 0	0 / 0	77 / 0	0 / 0	M	317	212 / 0	0 / 0	0 / 0	0 / 0	104 / 0	0 / 0	L	557	337 / 0	0 / 0	0 / 0	0 / 0	220 / 0	0 / 0	K	466	288 / 0	0 / 0	0 / 0	0 / 0	178 / 0	0 / 0	I	558	339 / 0	0 / 0	0 / 0	0 / 0	219 / 0	0 / 0	CHORDS				WEBS				MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1 CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX LC1 CSI (LC)		FR-TO		FROM TO		FR-TO				A-B	0 / 0	-78.0 -78.0	0.35 (1)	10.00	N-M	0 / 0	0.00 (1)	B-C	-23 / 0	-78.0 -78.0	0.56 (1)	6.25	M-B	-402 / 0	0.05 (1)	C-D	0 / 25	-78.0 -78.0	0.56 (1)	10.00	B-L	-58 / 0	0.06 (1)	D-E	0 / 25	-78.0 -78.0	0.56 (1)	10.00	L-C	-609 / 0	0.10 (1)	E-F	0 / 25	-78.0 -78.0	0.59 (1)	10.00	C-K	-51 / 0	0.06 (1)	F-G	-5 / 0	-78.0 -78.0	0.59 (1)	10.00	K-E	-510 / 0	0.08 (1)	H-G	-226 / 0	0.0 0.0	0.03 (1)	7.81	K-F	-31 / 0	0.03 (1)						I-F	-631 / 0	0.10 (1)						I-G	0 / 5	0.00 (1)	M-L	0 / 79	-18.5 -18.5	0.25 (4)	10.00				L-K	0 / 23	-18.5 -18.5	0.25 (4)	10.00				K-J	0 / 5	-18.5 -18.5	0.24 (4)	10.00				J-I	0 / 5	-18.5 -18.5	0.24 (4)	10.00				I-H	0 / 0	-18.5 -18.5	0.24 (4)	10.00				DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF BCBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD CSI: TC=0.59/1.00 (E-F:1) , BC=0.25/1.00 (L-M:4) , WB=0.10/1.00 (F-I:1) , SSI=0.27/1.00 (F-G:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.83 (G) (INPUT = 0.90) JSI METAL= 0.30 (M) (INPUT = 1.00)									
JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG																																																																																																																																																																																																																																																																											
	VERT	HORZ	DOWN	HORZ		IN-SX	IN-SX																																																																																																																																																																																																																																																																										
H	279	0	279	0	0	28-8-3 (12-8-1119																																																																																																																																																																																																																																																																											
M	449	0	449	0	0	28-8-3 (12-8-1119																																																																																																																																																																																																																																																																											
L	781	0	781	0	0	28-8-3 (12-8-1119																																																																																																																																																																																																																																																																											
K	654	0	654	0	0	28-8-3 (12-8-1119																																																																																																																																																																																																																																																																											
I	782	0	782	0	0	28-8-3 (12-8-1119																																																																																																																																																																																																																																																																											
JT	1ST LCASE COMBINED	MAX./MIN. COMPONENT REACTIONS																																																																																																																																																																																																																																																																															
		SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL																																																																																																																																																																																																																																																																										
H	199	122 / 0	0 / 0	0 / 0	0 / 0	77 / 0	0 / 0																																																																																																																																																																																																																																																																										
M	317	212 / 0	0 / 0	0 / 0	0 / 0	104 / 0	0 / 0																																																																																																																																																																																																																																																																										
L	557	337 / 0	0 / 0	0 / 0	0 / 0	220 / 0	0 / 0																																																																																																																																																																																																																																																																										
K	466	288 / 0	0 / 0	0 / 0	0 / 0	178 / 0	0 / 0																																																																																																																																																																																																																																																																										
I	558	339 / 0	0 / 0	0 / 0	0 / 0	219 / 0	0 / 0																																																																																																																																																																																																																																																																										
CHORDS				WEBS																																																																																																																																																																																																																																																																													
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1 CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX LC1 CSI (LC)																																																																																																																																																																																																																																																																											
FR-TO		FROM TO		FR-TO																																																																																																																																																																																																																																																																													
A-B	0 / 0	-78.0 -78.0	0.35 (1)	10.00	N-M	0 / 0	0.00 (1)																																																																																																																																																																																																																																																																										
B-C	-23 / 0	-78.0 -78.0	0.56 (1)	6.25	M-B	-402 / 0	0.05 (1)																																																																																																																																																																																																																																																																										
C-D	0 / 25	-78.0 -78.0	0.56 (1)	10.00	B-L	-58 / 0	0.06 (1)																																																																																																																																																																																																																																																																										
D-E	0 / 25	-78.0 -78.0	0.56 (1)	10.00	L-C	-609 / 0	0.10 (1)																																																																																																																																																																																																																																																																										
E-F	0 / 25	-78.0 -78.0	0.59 (1)	10.00	C-K	-51 / 0	0.06 (1)																																																																																																																																																																																																																																																																										
F-G	-5 / 0	-78.0 -78.0	0.59 (1)	10.00	K-E	-510 / 0	0.08 (1)																																																																																																																																																																																																																																																																										
H-G	-226 / 0	0.0 0.0	0.03 (1)	7.81	K-F	-31 / 0	0.03 (1)																																																																																																																																																																																																																																																																										
					I-F	-631 / 0	0.10 (1)																																																																																																																																																																																																																																																																										
					I-G	0 / 5	0.00 (1)																																																																																																																																																																																																																																																																										
M-L	0 / 79	-18.5 -18.5	0.25 (4)	10.00																																																																																																																																																																																																																																																																													
L-K	0 / 23	-18.5 -18.5	0.25 (4)	10.00																																																																																																																																																																																																																																																																													
K-J	0 / 5	-18.5 -18.5	0.24 (4)	10.00																																																																																																																																																																																																																																																																													
J-I	0 / 5	-18.5 -18.5	0.24 (4)	10.00																																																																																																																																																																																																																																																																													
I-H	0 / 0	-18.5 -18.5	0.24 (4)	10.00																																																																																																																																																																																																																																																																													
LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2																																																																																																																																																																																																																																																																																	
LICENSED PROFESSIONAL ENGINEER Y. WIDYA 100225448 10/14/2021 PROVINCE OF ONTARIO																																																																																																																																																																																																																																																																																	

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H137P		1	TRUSS DESC. JT 45147	E21104389

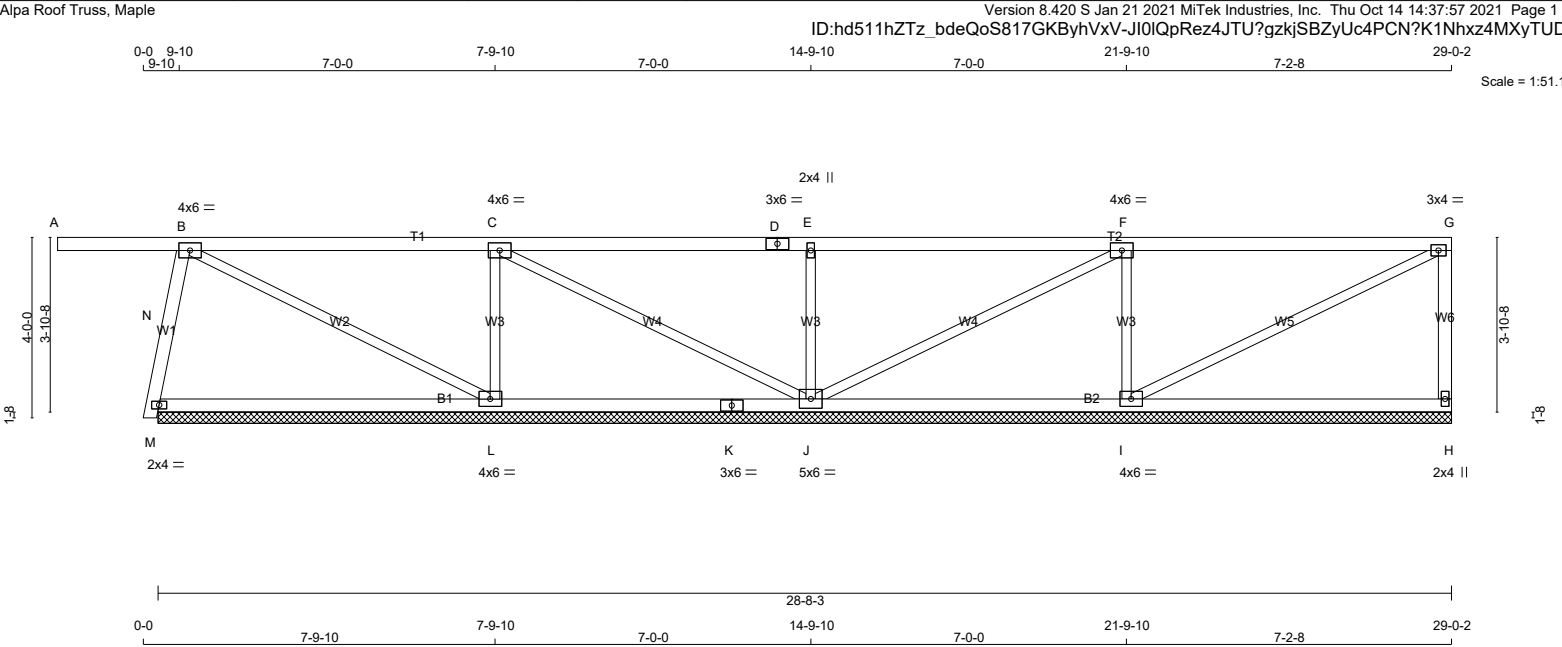


LUMBER N. L. G. A. RULES CHORDS SIZE LUMBER DESCR. A - D 2x4 DRY No.2 SPF D - G 2x4 DRY No.2 SPF H - G 2x4 DRY No.2 SPF M - K 2x4 DRY No.2 SPF K - H 2x4 DRY No.2 SPF ALL WEBS 2x3 DRY No.2 SPF EXCEPT N - B 2x4 DRY No.2 SPF DRY: SEASONED LUMBER.						DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER BEARINGS <table><tr><th rowspan="2">JT</th><th colspan="2">FACTORED GROSS REACTION</th><th colspan="2">MAXIMUM FACTORED GROSS REACTION</th><th rowspan="2">INPUT BRG</th><th colspan="2">REQRD BRG</th></tr><tr><th>VERT</th><th>HORZ</th><th>DOWN</th><th>HORZ</th><th>IN-SX</th><th>IN-SX</th></tr><tr><td>H</td><td>278</td><td>0</td><td>278</td><td>0</td><td>0</td><td>28-8-3 (15-11)</td><td>38</td></tr><tr><td>M</td><td>455</td><td>0</td><td>455</td><td>0</td><td>0</td><td>28-8-3 (15-11)</td><td>38</td></tr><tr><td>L</td><td>762</td><td>0</td><td>762</td><td>0</td><td>0</td><td>28-8-3 (15-11)</td><td>38</td></tr><tr><td>J</td><td>700</td><td>0</td><td>700</td><td>0</td><td>0</td><td>28-8-3 (15-11)</td><td>38</td></tr><tr><td>I</td><td>748</td><td>0</td><td>748</td><td>0</td><td>0</td><td>28-8-3 (15-11)</td><td>38</td></tr></table> VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH UNFACTORED REACTIONS <table><tr><th rowspan="2">JT</th><th colspan="2">1ST LCASE COMBINED</th><th colspan="2">MAX./MIN. COMPONENT REACTIONS</th><th rowspan="2">WIND</th><th rowspan="2">DEAD</th><th rowspan="2">SOIL</th></tr><tr><th>SNOW</th><th>LIVE</th><th>PERM.</th><th>LIVE</th></tr><tr><td>H</td><td>198</td><td>121 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>77 / 0</td><td>0 / 0</td></tr><tr><td>M</td><td>321</td><td>215 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>106 / 0</td><td>0 / 0</td></tr><tr><td>L</td><td>545</td><td>326 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>218 / 0</td><td>0 / 0</td></tr><tr><td>J</td><td>497</td><td>314 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>183 / 0</td><td>0 / 0</td></tr><tr><td>I</td><td>534</td><td>321 / 0</td><td>0 / 0</td><td>0 / 0</td><td>0 / 0</td><td>213 / 0</td><td>0 / 0</td></tr></table> BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H, M, L, J, I BRACING TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED. MAX. UNBRACED INTERIOR CHORD LENGTH = 7.81 FT ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED. LOADING TOTAL LOAD CASES: (4) <table><tr><th colspan="4">CHORDS</th><th colspan="4">WEBS</th></tr><tr><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>FACTORED VERT. LOAD (PLF)</th><th>MAX. UNBRACED LENGTH</th><th>MEMB.</th><th>MAX. FACTORED FORCE (LBS)</th><th>MAX. UNBRACED LENGTH</th><th></th></tr><tr><td>FR-TO</td><td></td><td>FROM TO</td><td></td><td>FR-TO</td><td></td><td></td><td></td></tr><tr><td>A-B</td><td>0 / 0</td><td>-78.0 -78.0 0.42 (1)</td><td>10.00</td><td>N-M</td><td>0 / 0</td><td>0.00 (1)</td><td></td></tr><tr><td>B-C</td><td>-20 / 0</td><td>-78.0 -78.0 0.55 (1)</td><td>6.25</td><td>M-B</td><td>-407 / 0</td><td>0.08 (1)</td><td></td></tr><tr><td>C-D</td><td>0 / 63</td><td>-78.0 -78.0 0.56 (1)</td><td>10.00</td><td>B-L</td><td>-67 / 0</td><td>0.08 (1)</td><td></td></tr><tr><td>D-E</td><td>0 / 63</td><td>-78.0 -78.0 0.56 (1)</td><td>10.00</td><td>L-C</td><td>-575 / 0</td><td>0.13 (1)</td><td></td></tr><tr><td>E-F</td><td>0 / 63</td><td>-78.0 -78.0 0.59 (1)</td><td>10.00</td><td>C-J</td><td>-94 / 0</td><td>0.12 (1)</td><td></td></tr><tr><td>F-G</td><td>-6 / 0</td><td>-78.0 -78.0 0.58 (1)</td><td>10.00</td><td>J-E</td><td>-505 / 0</td><td>0.12 (1)</td><td></td></tr><tr><td>H-G</td><td>-225 / 0</td><td>0.0 0.0 0.05 (1)</td><td>7.81</td><td>J-F</td><td>-78 / 0</td><td>0.10 (1)</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td>I-F</td><td>-599 / 0</td><td>0.14 (1)</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td>I-G</td><td>0 / 7</td><td>0.00 (1)</td><td></td></tr><tr><td>M-L</td><td>0 / 80</td><td>-18.5 -18.5 0.26 (4)</td><td>10.00</td><td></td><td></td><td></td><td></td></tr><tr><td>L-K</td><td>0 / 20</td><td>-18.5 -18.5 0.26 (4)</td><td>10.00</td><td></td><td></td><td></td><td></td></tr><tr><td>K-J</td><td>0 / 20</td><td>-18.5 -18.5 0.26 (4)</td><td>10.00</td><td></td><td></td><td></td><td></td></tr><tr><td>J-I</td><td>0 / 6</td><td>-18.5 -18.5 0.24 (4)</td><td>10.00</td><td></td><td></td><td></td><td></td></tr><tr><td>I-H</td><td>0 / 0</td><td>-18.5 -18.5 0.24 (4)</td><td>10.00</td><td></td><td></td><td></td><td></td></tr></table>										JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG		VERT	HORZ	DOWN	HORZ	IN-SX	IN-SX	H	278	0	278	0	0	28-8-3 (15-11)	38	M	455	0	455	0	0	28-8-3 (15-11)	38	L	762	0	762	0	0	28-8-3 (15-11)	38	J	700	0	700	0	0	28-8-3 (15-11)	38	I	748	0	748	0	0	28-8-3 (15-11)	38	JT	1ST LCASE COMBINED		MAX./MIN. COMPONENT REACTIONS		WIND	DEAD	SOIL	SNOW	LIVE	PERM.	LIVE	H	198	121 / 0	0 / 0	0 / 0	0 / 0	77 / 0	0 / 0	M	321	215 / 0	0 / 0	0 / 0	0 / 0	106 / 0	0 / 0	L	545	326 / 0	0 / 0	0 / 0	0 / 0	218 / 0	0 / 0	J	497	314 / 0	0 / 0	0 / 0	0 / 0	183 / 0	0 / 0	I	534	321 / 0	0 / 0	0 / 0	0 / 0	213 / 0	0 / 0	CHORDS				WEBS				MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH		FR-TO		FROM TO		FR-TO				A-B	0 / 0	-78.0 -78.0 0.42 (1)	10.00	N-M	0 / 0	0.00 (1)		B-C	-20 / 0	-78.0 -78.0 0.55 (1)	6.25	M-B	-407 / 0	0.08 (1)		C-D	0 / 63	-78.0 -78.0 0.56 (1)	10.00	B-L	-67 / 0	0.08 (1)		D-E	0 / 63	-78.0 -78.0 0.56 (1)	10.00	L-C	-575 / 0	0.13 (1)		E-F	0 / 63	-78.0 -78.0 0.59 (1)	10.00	C-J	-94 / 0	0.12 (1)		F-G	-6 / 0	-78.0 -78.0 0.58 (1)	10.00	J-E	-505 / 0	0.12 (1)		H-G	-225 / 0	0.0 0.0 0.05 (1)	7.81	J-F	-78 / 0	0.10 (1)						I-F	-599 / 0	0.14 (1)						I-G	0 / 7	0.00 (1)		M-L	0 / 80	-18.5 -18.5 0.26 (4)	10.00					L-K	0 / 20	-18.5 -18.5 0.26 (4)	10.00					K-J	0 / 20	-18.5 -18.5 0.26 (4)	10.00					J-I	0 / 6	-18.5 -18.5 0.24 (4)	10.00					I-H	0 / 0	-18.5 -18.5 0.24 (4)	10.00					DESIGN CRITERIA SPECIFIED LOADS: TOP CH. LL = 21.0 PSF DL = 6.0 PSF BOT CH. LL = 0.0 PSF DL = 7.4 PSF TOTAL LOAD = 34.4 PSF SPACING = 24.0 IN. C/C LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015 THIS DESIGN COMPLIES WITH: - PART 9 OF BCBC 2018 , ABC 2019 - PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014 (55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD CSI: TC=0.59/1.00 (E-F:1) , BC=0.26/1.00 (L-M:4) , WB=0.14/1.00 (F-I:1) , SSI=0.27/1.00 (F-G:1) DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10 COMPANION LIVE LOAD FACTOR = 1.00 TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT . NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873 PLATE PLACEMENT TOL. = 0.250 inches PLATE ROTATION TOL. = 5.0 Deg. JSI GRIP= 0.78 (G) (INPUT = 0.90) JSI METAL= 0.30 (M) (INPUT = 1.00)			
JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG																																																																																																																																																																																																																																																															
	VERT	HORZ	DOWN	HORZ		IN-SX	IN-SX																																																																																																																																																																																																																																																														
H	278	0	278	0	0	28-8-3 (15-11)	38																																																																																																																																																																																																																																																														
M	455	0	455	0	0	28-8-3 (15-11)	38																																																																																																																																																																																																																																																														
L	762	0	762	0	0	28-8-3 (15-11)	38																																																																																																																																																																																																																																																														
J	700	0	700	0	0	28-8-3 (15-11)	38																																																																																																																																																																																																																																																														
I	748	0	748	0	0	28-8-3 (15-11)	38																																																																																																																																																																																																																																																														
JT	1ST LCASE COMBINED		MAX./MIN. COMPONENT REACTIONS		WIND	DEAD	SOIL																																																																																																																																																																																																																																																														
	SNOW	LIVE	PERM.	LIVE																																																																																																																																																																																																																																																																	
H	198	121 / 0	0 / 0	0 / 0	0 / 0	77 / 0	0 / 0																																																																																																																																																																																																																																																														
M	321	215 / 0	0 / 0	0 / 0	0 / 0	106 / 0	0 / 0																																																																																																																																																																																																																																																														
L	545	326 / 0	0 / 0	0 / 0	0 / 0	218 / 0	0 / 0																																																																																																																																																																																																																																																														
J	497	314 / 0	0 / 0	0 / 0	0 / 0	183 / 0	0 / 0																																																																																																																																																																																																																																																														
I	534	321 / 0	0 / 0	0 / 0	0 / 0	213 / 0	0 / 0																																																																																																																																																																																																																																																														
CHORDS				WEBS																																																																																																																																																																																																																																																																	
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH																																																																																																																																																																																																																																																															
FR-TO		FROM TO		FR-TO																																																																																																																																																																																																																																																																	
A-B	0 / 0	-78.0 -78.0 0.42 (1)	10.00	N-M	0 / 0	0.00 (1)																																																																																																																																																																																																																																																															
B-C	-20 / 0	-78.0 -78.0 0.55 (1)	6.25	M-B	-407 / 0	0.08 (1)																																																																																																																																																																																																																																																															
C-D	0 / 63	-78.0 -78.0 0.56 (1)	10.00	B-L	-67 / 0	0.08 (1)																																																																																																																																																																																																																																																															
D-E	0 / 63	-78.0 -78.0 0.56 (1)	10.00	L-C	-575 / 0	0.13 (1)																																																																																																																																																																																																																																																															
E-F	0 / 63	-78.0 -78.0 0.59 (1)	10.00	C-J	-94 / 0	0.12 (1)																																																																																																																																																																																																																																																															
F-G	-6 / 0	-78.0 -78.0 0.58 (1)	10.00	J-E	-505 / 0	0.12 (1)																																																																																																																																																																																																																																																															
H-G	-225 / 0	0.0 0.0 0.05 (1)	7.81	J-F	-78 / 0	0.10 (1)																																																																																																																																																																																																																																																															
				I-F	-599 / 0	0.14 (1)																																																																																																																																																																																																																																																															
				I-G	0 / 7	0.00 (1)																																																																																																																																																																																																																																																															
M-L	0 / 80	-18.5 -18.5 0.26 (4)	10.00																																																																																																																																																																																																																																																																		
L-K	0 / 20	-18.5 -18.5 0.26 (4)	10.00																																																																																																																																																																																																																																																																		
K-J	0 / 20	-18.5 -18.5 0.26 (4)	10.00																																																																																																																																																																																																																																																																		
J-I	0 / 6	-18.5 -18.5 0.24 (4)	10.00																																																																																																																																																																																																																																																																		
I-H	0 / 0	-18.5 -18.5 0.24 (4)	10.00																																																																																																																																																																																																																																																																		
PLATES (table is in inches) <table><tr><th>JT TYPE</th><th>PLATES</th><th>W</th><th>LEN</th><th>Y</th><th>X</th></tr><tr><td>B, C, F</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>B TMWW-t</td><td>MT20</td><td>4.0</td><td>6.0</td><td></td><td></td></tr><tr><td>D TS-t</td><td>MT20</td><td>3.0</td><td>6.0</td><td></td><td></td></tr><tr><td>E TMW+w</td><td>MT20</td><td>2.0</td><td>4.0</td><td></td><td></td></tr><tr><td>G TMVW-t</td><td>MT20</td><td>3.0</td><td>4.0</td><td></td><td></td></tr><tr><td>H BMV1+p</td><td>MT20</td><td>2.0</td><td>4.0</td><td></td><td></td></tr><tr><td>I BMWW1-t</td><td>MT20</td><td>4.0</td><td>6.0</td><td></td><td></td></tr><tr><td>J BMWWW1-t</td><td>MT20</td><td>5.0</td><td>6.0</td><td></td><td></td></tr><tr><td>K BS-t</td><td>MT20</td><td>3.0</td><td>6.0</td><td></td><td></td></tr><tr><td>L BMWW1-t</td><td>MT20</td><td>4.0</td><td>6.0</td><td></td><td></td></tr><tr><td>M BWM1-t</td><td>MT20</td><td>2.0</td><td>4.0</td><td></td><td></td></tr></table>						JT TYPE	PLATES	W	LEN	Y	X	B, C, F						B TMWW-t	MT20	4.0	6.0			D TS-t	MT20	3.0	6.0			E TMW+w	MT20	2.0	4.0			G TMVW-t	MT20	3.0	4.0			H BMV1+p	MT20	2.0	4.0			I BMWW1-t	MT20	4.0	6.0			J BMWWW1-t	MT20	5.0	6.0			K BS-t	MT20	3.0	6.0			L BMWW1-t	MT20	4.0	6.0			M BWM1-t	MT20	2.0	4.0			LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2																																																																																																																																																																																							
JT TYPE	PLATES	W	LEN	Y	X																																																																																																																																																																																																																																																																
B, C, F																																																																																																																																																																																																																																																																					
B TMWW-t	MT20	4.0	6.0																																																																																																																																																																																																																																																																		
D TS-t	MT20	3.0	6.0																																																																																																																																																																																																																																																																		
E TMW+w	MT20	2.0	4.0																																																																																																																																																																																																																																																																		
G TMVW-t	MT20	3.0	4.0																																																																																																																																																																																																																																																																		
H BMV1+p	MT20	2.0	4.0																																																																																																																																																																																																																																																																		
I BMWW1-t	MT20	4.0	6.0																																																																																																																																																																																																																																																																		
J BMWWW1-t	MT20	5.0	6.0																																																																																																																																																																																																																																																																		
K BS-t	MT20	3.0	6.0																																																																																																																																																																																																																																																																		
L BMWW1-t	MT20	4.0	6.0																																																																																																																																																																																																																																																																		
M BWM1-t	MT20	2.0	4.0																																																																																																																																																																																																																																																																		

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H151		1	TRUSS DESC. JT 45147	E21104390

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:37:59 2021 Page 1

ID:hd511hZTz bdeQoS817GKBVhVxV-Fh8WrVsvVhZBjQMr8VffNZ mCxYTF0q8FSARQyTUDS

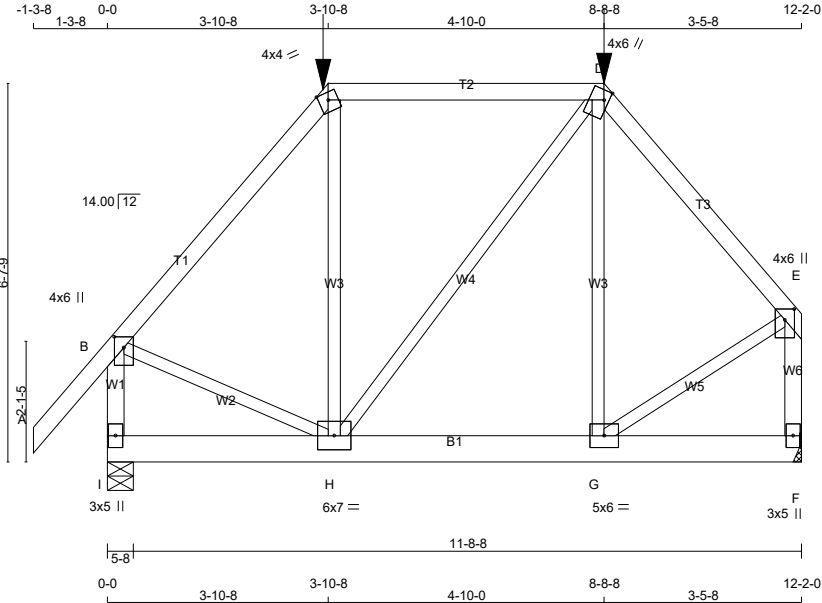

TOTAL WEIGHT = 69 lb [M]

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY No.2	SPF
C - D	2x4	DRY No.2	SPF
D - E	2x4	DRY No.2	SPF
I - B	2x4	DRY No.2	SPF
F - E	2x4	DRY No.2	SPF
I - F	2x6	DRY No.2	SPF
ALL WEBS EXCEPT	2x3	DRY No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	6.0	2.25	2.00
C	TTW-m	MT20	4.0	4.0	Edge	
D	TTWW+m	MT20	4.0	6.0	2.00	1.00
E	TMVW+p	MT20	4.0	6.0	2.25	2.00
F	BMV1+p	MT20	3.0	5.0		
G	BMWW-t	MT20	5.0	6.0		
H	BMWWW-t	MT20	6.0	7.0		
I	BMV1+p	MT20	3.0	5.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	IN-SX	IN-SX
I	946	0	946	0	0	5-8	1-8		
F	845	0	845	0	0	MECHANICAL			

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL	
I	673	420 / 0	0 / 0	0 / 0	0 / 0	252 / 0	0 / 0	
F	603	366 / 0	0 / 0	0 / 0	0 / 0	237 / 0	0 / 0	

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1 MAX CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX UNBRAC LENGTH	MAX CSI (LC)
FR-TO		FROM	TO	FR-TO			
A - B	0 / 42	-78.0	-78.0 0.12 (1)	10.00	H - C	-75 / 67	0.05 (1)
B - C	-620 / 0	-78.0	-78.0 0.24 (1)	6.25	H - D	0 / 40	0.01 (1)
C - D	-400 / 0	-114.5	-114.5 0.51 (1)	6.25	G - D	-105 / 47	0.07 (1)
D - E	-584 / 0	-78.0	-78.0 0.19 (1)	6.25	B - H	0 / 435	0.11 (1)
I - B	-900 / 0	0.0	0.0 0.11 (1)	7.81	G - E	0 / 441	0.11 (1)
F - E	-807 / 0	0.0	0.0 0.11 (1)	7.81			
I - H	0 / 0	-27.2	-27.2 0.06 (4)	10.00			
H - G	0 / 376	-27.2	-27.2 0.09 (4)	10.00			
G - F	0 / 0	-27.2	-27.2 0.05 (4)	10.00			

FACTORED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	3-10-8	-120	-120	---	FRONT	VERT	TOTAL	---	C1
D	8-8-8	-107	-107	---	FRONT	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 21.0 PSF
	DL = 6.0 PSF
BOT CH.	LL = 0.0 PSF
	DL = 7.4 PSF
TOTAL LOAD	= 34.4 PSF

SPACING = 24.0 IN./C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

GIRDER TYPE: CPrimeHip
LEFT SETBACK = 3-10-8
RIGHT SETBACK = 3-5-8
END SETBACK = 3-10-8
END WALL WIDTH = 0-0
CORNER FRAMING TYPE: CONVENTIONAL
END JACK TYPE: CONVENTIONAL
APPLIED TO FRONT SIDE
- ADDTL LOADS BASED ON 55 % OF GSL.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.41")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/360 (0.41")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01")

CSI: TC=0.51/1.00 (C-D:1) , BC=0.09/1.00 (G-H:4) , WB=0.11/1.00 (E-G:1) , SSI=0.24/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES				
PLATE	GRIP(DRY)	SHEAR	SECTION	
	(PSI)	(PLI)	(PLI)	
MT20	650	371	1747	788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.56 (C) (INPUT = 0.90)
JSI METAL= 0.27 (B) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2




JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	DRWG NO.
336323	H152		1	TRUSS DESC. JT 45147	E21104391

Alpa Roof Truss, Maple

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu Oct 14 14:38:00 2021 Page 1

ID:hd511hZTz_bdeQoS817GKByhVxV-jthu2rTXG?h2LSPYPr0uBa5B3cGECjApNvCkzsyTUDr

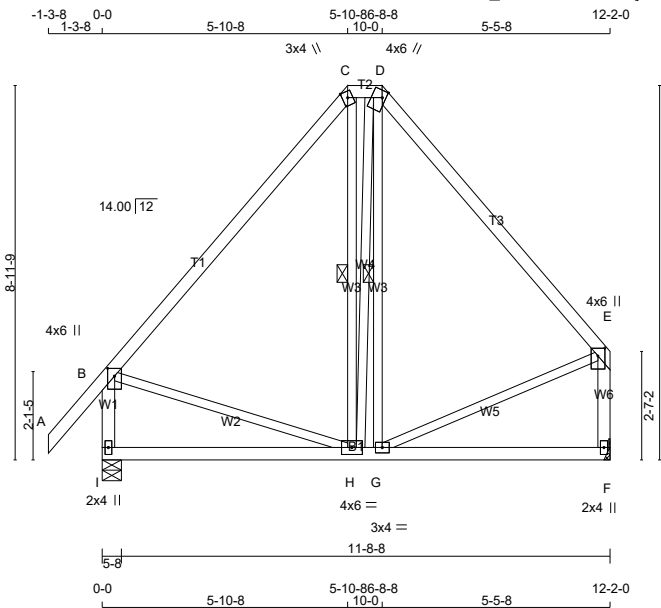

TOTAL WEIGHT = 72 lb

[M][F]

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2
A - D	2x4	DRY	No.2
D - E	2x4	DRY	No.2
I - B	2x4	DRY	No.2
F - E	2x4	DRY	No.2
I - F	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
EXCEPT			SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	6.0	2.25 2.00
C	TTW+m	MT20	3.0	4.0	Edge
D	TTWW+m	MT20	4.0	6.0	2.00 1.00
E	TMVW+p	MT20	4.0	6.0	2.25 2.00
F	BMV1+p	MT20	2.0	4.0	
G	BMWW-t	MT20	3.0	4.0	
H	BMWWW-t	MT20	4.0	6.0	
I	BMV1+p	MT20	2.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG IN-SX	REQD BRG IN-SX
	VERT	HORZ	DOWN	HORZ		
I	696	0	696	0	5-8	1-8
F	587	0	587	0	0	MECHANICAL

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

JT	1ST LCASE COMBINED		MAX./MIN. COMPONENT REACTIONS				DEAD	SOIL
	SNOW	LIVE	PERM.LIVE	WIND				
I	494	314 / 0	0 / 0	0 / 0	0 / 0	180 / 0	0 / 0	0 / 0
F	418	255 / 0	0 / 0	0 / 0	0 / 0	163 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-H, D-G.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD		MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED MAX	
		FROM	TO			CS1 (LC)	CS1 (LC)
FR-TO				LENGTH FR-TO			
A-B	0 / 42	-78.0	-78.0	10.00	H-C	-10 / 48	0.02 (4)
B-C	-330 / 0	-78.0	-78.0	6.25	H-D	0 / 27	0.01 (4)
C-D	-214 / 0	-78.0	-78.0	6.25	G-D	-24 / 22	0.01 (1)
D-E	-327 / 0	-78.0	-78.0	6.25	B-H	0 / 223	0.05 (1)
I-B	-652 / 0	0.0	0.0	7.81	G-E	0 / 228	0.05 (1)
F-E	-546 / 0	0.0	0.0	7.81			
I-H	0 / 0	-18.5	-18.5	10.00			
H-G	0 / 212	-18.5	-18.5	10.00			
G-F	0 / 0	-18.5	-18.5	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 21.0	PSF
	DL = 6.0	PSF
BOT CH.	LL = 0.0	PSF
	DL = 7.4	PSF
TOTAL LOAD	= 34.4	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 2.00/12 MINIMUM

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 23.0 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 21.0 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.41")
CALCULATED VERT. DEFL.(LL)= L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.41")
CALCULATED VERT. DEFL.(TL)= L/ 999 (0.03")

CSI: TC=0.35/1.00 (B-C:1) , BC=0.19/1.00 (G-H:4) , WB=0.05/1.00 (E-G:1) , SSI=0.12/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.37 (B) (INPUT = 0.90)
JSI METAL= 0.20 (B) (INPUT = 1.00)

LATERAL BRACE(S) SHOWN SHALL BE 2X4 SPF#2



LUS – Double Shear Joist Hangers



All LUS hangers have double shear nailing. This patented innovation distributes the load through two points on each joist nail for greater strength. It also allows the use of fewer nails, faster installation and the use of common nails for all connections.

Material: 18 gauge

Finish: G90 galvanized

Design:


- Factored resistances are in accordance with CSA O86-14.
- Uplift resistances have been increased 15%. No further increase is permitted.
- Wood shear is not considered in the factored resistances given. The specifier must ensure that the joist and header capacities are capable of withstanding these loads.

Installation:


- Use all specified fasteners.
- Nails: 16d = 0.162" dia. x 3½" long common wire, 10d = 0.148" x 3" long common wire.
- Double shear nails must be driven at an angle through the joist or truss into the header to achieve the table loads.
- Not designed for welded or nailer applications.

Options:

- These hangers cannot be modified




Typical LUS Installation

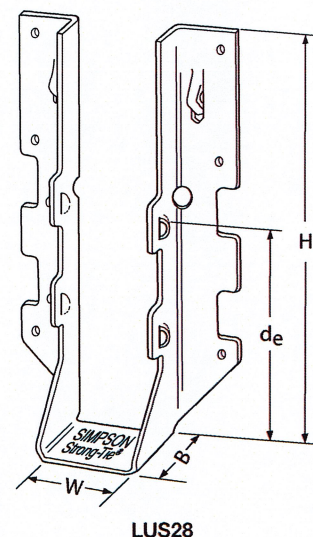

LUS28


Model No.	Ga.	Dimensions (in.)				Fasteners		Factored Resistance (lb.)			
		W	H	B	d _e ¹	Face	Joist	D.Fir-L		S-P-F	
								Uplift (K _p =1.15)	Normal (K _p =1.00)	Uplift (K _p =1.15)	Normal (K _p =1.00)
LUS24	18	1½	3½	1¾	1 15/16	(4) 10d	(2) 10d	710	1630	645	1155
LUS24-2	18	3½	3½	2	1 13/16	(4) 16d	(2) 16d	835	2020	590	1435
LUS26	18	1½	4¾	1¾	3½	(4) 10d	(4) 10d	1420	2170	1290	1630
LUS26-2	18	3½	4¾	2	4	(4) 16d	(4) 16d	1720	2595	1545	1920
LUS26-3	18	4½	4¾	2	3¼	(4) 16d	(4) 16d	1720	2595	1545	2340
LUS28	18	1½	6½	1¾	3¾	(6) 10d	(6) 10d	1420	2520	1290	1790
LUS28-2	18	3½	7	2	4	(6) 16d	(4) 16d	1720	3325	1545	2575
LUS28-3	18	4½	6¼	2	3¼	(6) 16d	(4) 16d	1720	3325	1545	2375
LUS210	18	1½	7 15/16	1¾	3¾	(8) 10d	(4) 10d	1420	2785	1290	2210
LUS210-2	18	3½	9	2	6	(8) 16d	(6) 16d	2580	4500	2320	3195
LUS210-3	18	4½	8¾	2	5¼	(8) 16d	(6) 16d	2580	3345	2320	2375

1. d_e is the distance from the seat of the hanger to the highest joist nail.



Dome Double Shear Nailing prevents tabs breaking off (available on some models).

U.S. Patent 5,603,580



Double Shear Nailing Top View.



LIMIT
STATES
DESIGN

This technical bulletin is effective until June 30, 2022, and reflects information available as of April 1, 2020. This information is updated periodically and should not be relied upon after June 30, 2022. Contact Simpson Strong-Tie for current information and limited warranty or see strongtie.com.

© 2020 Simpson Strong-Tie Company Inc.

T-SPECLUS20 3/20 exp. 6/22

(800) 999-5099
strongtie.com

HHUS – Double Shear Joist Hangers

All HHUS hangers have double shear nailing. This patented innovation distributes the load through two points on each joist nail for greater strength. It also allows the use of fewer nails, faster installation and the use of common nails for all connections. Do not bend or remove tabs.

Material: 14 gauge

Finish: G90 galvanized

Design:


- Factored resistances are in accordance with CSA O86-14.
- Uplift resistances have been increased 15%. No further increase is permitted.
- Wood shear is not considered in the factored resistances given. The specifier must ensure that the joist and header capacities are capable of withstanding these loads.

Installation:


- Use all specified fasteners
- Nails: 16d = 0.162" dia. x 3½" long common wire
- Double shear nails must be driven at an angle through the joist or truss into the header to achieve the table loads
- Not designed for welded or nailer applications

Options:


- See current catalogue for options

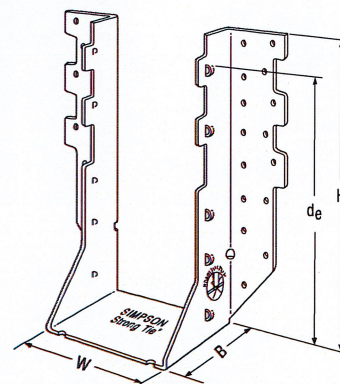

HHUS410




Typical HHUS Installation
(Truss Designer to provide fastener quantity for connecting multiple members together)



Typical HHUS Installation


Model No.	Ga.	Dimensions (in.)				Fasteners		Factored Resistance (lb.)			
		W	H	B	d _e ¹	Face	Joist	D.Fir-L		S-P-F	
								Uplift (K ₀ =1.15)	Normal (K ₀ =1.00)	Uplift (K ₀ =1.15)	Normal (K ₀ =1.00)
HHUS26-2	14	3½	5¼	3	3¼	(14) 16d	(6) 16d	2850	7335	2065	5205
HHUS28-2	14	3½	7½	3	6½	(22) 16d	(8) 16d	3765	8940	2675	6345
HHUS210-2	14	3½	9½	3	8	(30) 16d	(10) 16d	4670	9660	4235	7000
HHUS210-3	14	4¼	9	3	7¼	(30) 16d	(10) 16d	4670	9670	4235	6865
HHUS210-4	14	6¼	8¾	3	7¾	(30) 16d	(10) 16d	4670	10155	4235	7210
HHUS46	14	3½	5¼	3	3¼	(14) 16d	(6) 16d	2540	7335	2065	5205
HHUS48	14	3½	7½	3	6½	(22) 16d	(8) 16d	3765	8940	2675	6345
HHUS410	14	3½	9	3	8	(30) 16d	(10) 16d	4670	9855	4235	7000
HHUS5.50/10	14	5½	9	3	8	(30) 16d	(10) 16d	4670	10155	4235	7210
HHUS7.25/10	14	7¼	9	3½	7¾	(30) 16d	(10) 16d	4670	10155	3370	7210

1. d_e is the distance from the seat of the hanger to the highest joist nail.




Dome Double Shear Nailing prevents tabs breaking off (available on some models).

U.S. Patent
5,603,580



Double Shear Nailing Side View. Do not bend tab back.



Double Shear Nailing Top View.



LIMIT
STATES
DESIGN

This technical bulletin is effective until June 30, 2022, and reflects information available as of April 1, 2020. This information is updated periodically and should not be relied upon after June 30, 2022. Contact Simpson Strong-Tie for current information and limited warranty or see strongtie.com.

© 2020 Simpson Strong-Tie Company Inc.

T-SPECHHUS20 3/20 exp. 6/22

(800) 999-5099
strongtie.com

TC – Truss Connectors

SIMPSON
Strong-Tie

The TC truss connector is an ideal connector for scissor trusses and can allow horizontal movement up to 1¼". The TC also attaches plated trusses to top plates or sill plates to resist uplift forces. Typically used on one or both ends of truss as determined by the building designer.

Material: 16 gauge

Finish: G90 galvanized


Design: Factored resistances are in accordance with CSA 086-14

Installation:

- Use all specified fasteners.
- Nails: 10d = 0.148" dia. x 3" long common wire, 10d x 1½" = 0.148" dia. x 1½" long.
- Drive 10d nails into the truss at the inside end of the slotted holes (inside end is towards the centre of the truss) and clinch on the back side. Do not seat these nails into the truss—allow room under the nail head for movement of the truss with respect to the wall.


Optional TC Installation:

- Bend one flange up 90°. Drive specified nails into the top and face of the top plates or install Titen® screws into the top and face of masonry wall. See optional load tables and installation details.




TC24

U.S. Patent 4,932,173




TC26


(TC28 Similar)



Typical TC24 Installation



Optional TC26 Installation for Grouted Concrete Block using a Wood Nailer
(8", 10", 12" Wall Installation Similar)



Optional TC26 Installation for Grouted Concrete Block using Titen Screws

Model No.	Fasteners		Factored Resistance	
	Truss	Wall Plates	D.Fir-L	S-P-F
			Uplift (K ₀ =1.15)	Uplift (K ₀ =1.15)
TC24	(4) 10d	(4) 10d	605	430
TC26	(5) 10d	(6) 10d	1015	720
TC28	(5) 10d	(6) 10d	1015	720

Optional TC Installation Table

Model No.	Fasteners		Factored Resistance	
	Truss	Wall Plates	D.Fir-L	S-P-F
			Uplift (K ₀ =1.15)	Uplift (K ₀ =1.15)
TC26	(5) 10d	(6) 10d x 1½"	810	660
	(5) 10d	(6) 10d	930	660

1. Factored resistances have been increased 15% for earthquake or wind loading; no further increase allowed; reduce where other loads govern.
2. Grout strength is 15 MPa minimum.
3. Optional TC26 installation with 10d nails requires minimum 3" top plate thickness.
4. TC26 fastened to grouted concrete block with (6) – ¾" x 2¼" Titen screws has a factored uplift resistance of 275 lb.




**LIMIT
STATES
DESIGN**

This technical bulletin is effective until June 30, 2022, and reflects information available as of April 1, 2020. This information is updated periodically and should not be relied upon after June 30, 2022. Contact Simpson Strong-Tie for current information and limited warranty or see strongtie.com.

© 2020 Simpson Strong-Tie Company Inc.

T-SPECTC20 3/20 exp. 6/22

(800) 999-5099
strongtie.com

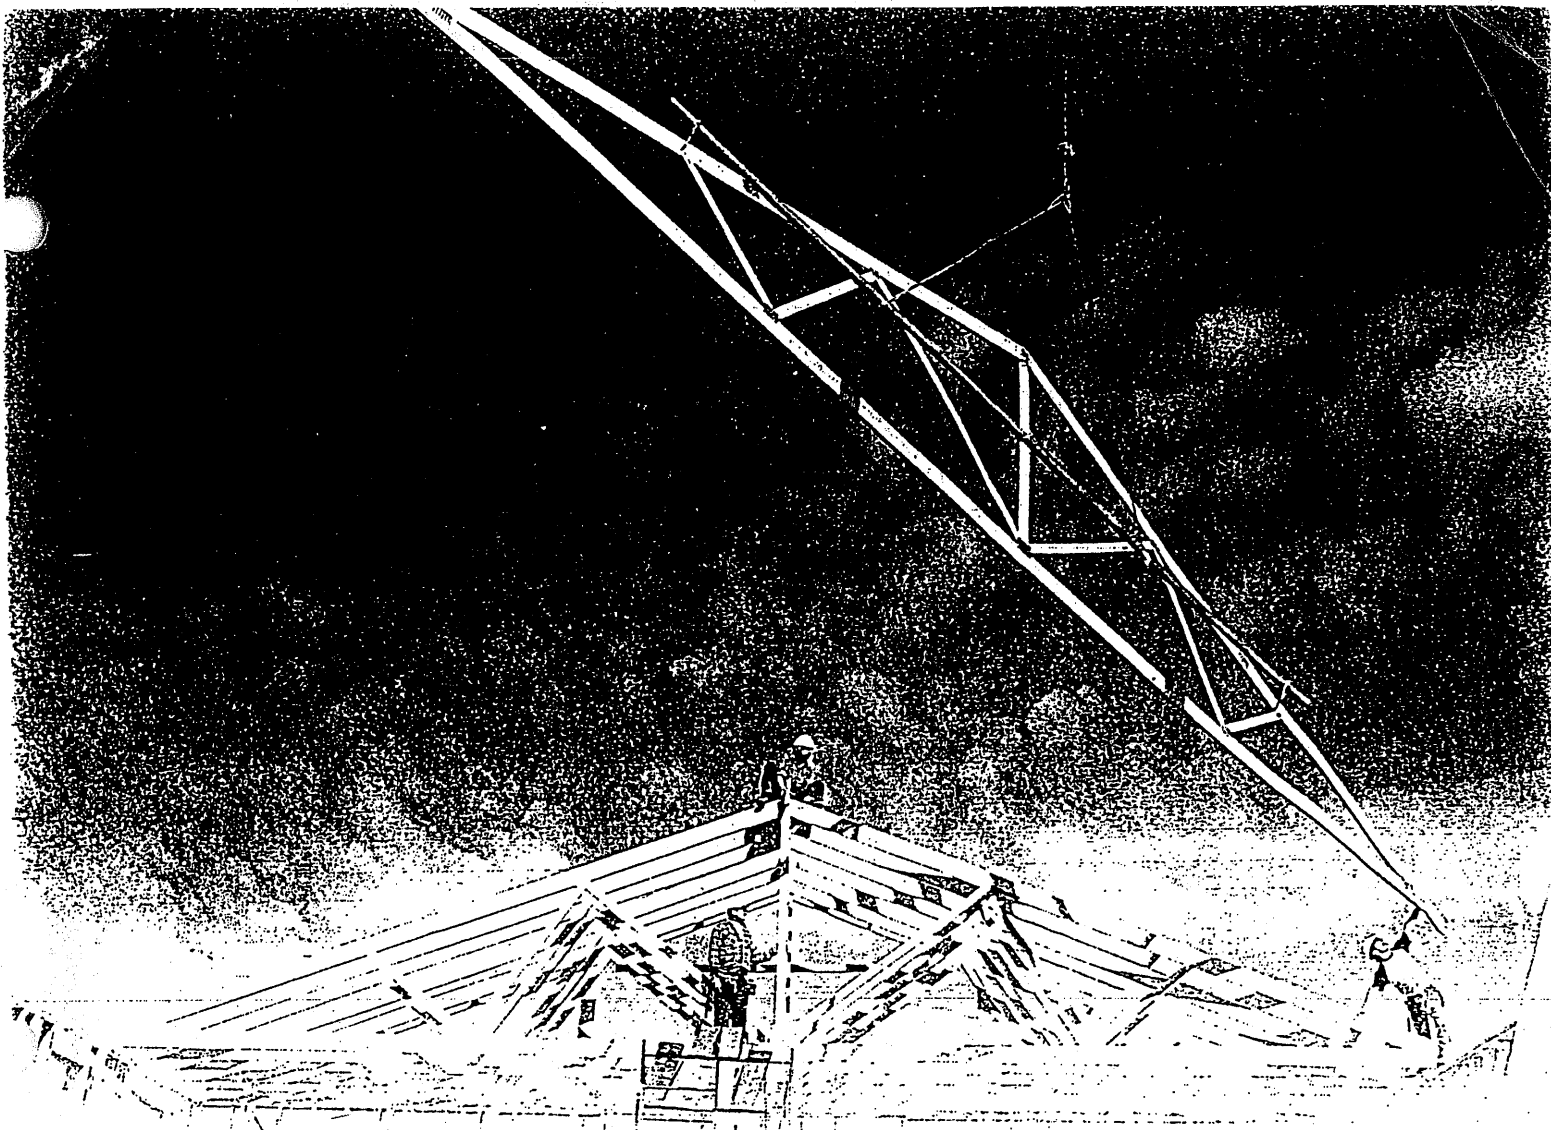


Wood Truss Installation

**A Guide to proper handling, erecting and bracing
metal plate connected wood trusses**

Table of Content

Warning.....	4
1 Unloading & Lifting.....	5
2 Job Site Handling.....	5
3 Hoisting.....	6
4 Beginning the Erection Process.....	7
5 Erection Tolerance.....	8
6 Bracing.....	8
7 Bracing Requirements for 3 Planes of Roof.....	9
8 Stacking Materials.....	10
Caution Notes.....	11

Warning



General

Familiarity with the Construction Design Documents, the Truss Design Drawings, and Truss Placement Plans (if required by the Construction Design Documents) is required to properly erect, brace, and connect the trusses to the building system.

All of the care and quality involved in the design and manufacture of wood trusses can be jeopardized if the trusses are not properly handled, erected, and braced.

The consequences of improper handling, erecting, and bracing may be a collapse of the structure, which at best is a substantial loss of time and materials, and at worst is a loss of life. The majority of truss accidents occur during truss installation and not as a result of improper design or manufacture.

Prior to truss erection, the builder/erector shall meet with the erection crew for a safety and planning meeting, making sure each crew member understands his or her roles and responsibilities during the erection process.

Temporary Erection Bracing

Trusses are not marked in any way to identify the frequency, or location of temporary erection bracing.

All temporary bracing shall comply with the latest edition of *Commentary and Recommendations for Handling, Installing & Bracing Metal Plate Connected Wood Trusses* (HIB), published by the Truss Plate Institute, and/or as specified in the Construction Design Documents prepared by the building designer.

Permanent Truss Bracing

Permanent bracing for the roof or floor trusses is the responsibility of the building designer and should be shown on the Construction Design Documents. Permanent bracing locations for individual compression members of a wood truss are shown on the Truss Design Drawings, and shall be installed by the building or erection contractor. This bracing is needed for the proper performance of individual trusses within the roof or floor system. The design and connection of the bracing to the truss and then to the overall building system is the responsibility of the building designer, and is in addition to the permanent bracing plan, which is also specified by the building designer.

Special Design Requirements


Special design requirements, such as wind bracing, portal bracing, seismic bracing, diaphragms, shear walls, or other load transfer elements and their connections to wood trusses must be considered separately by the building designer, who shall determine size, location, and method of connections for all bracing as needed to resist these forces.

1

Unloading & Lifting

Never handle trusses flat

Beginning with the unloading process, and throughout all phases of construction, care must be taken to avoid lateral bending of trusses, which can cause damage to the lumber and metal connector plates at the joints.





Avoid lateral bending

- Use special care in windy weather.
- If using a crane within 10 feet of an electric line, contact the local power company.
- If using a crane within 5 miles of an airport, contact the airport 30 days prior to erection to learn about any safety regulations that must be followed.


2

Job Site Handling




All trusses should be picked up at the top chords in a vertical position only

Proper banding and smooth ground allow for unloading of trusses without damage. This should be done as close to the building site as possible to minimize handling. Do not break banding until installation begins. Hand erection of trusses is allowed, provided excessive lateral bending is prevented.




Do not store unbraced bundles upright

If trusses are stored vertically they shall be braced in a manner that will prevent tipping or topping. Generally cutting of the banding is done just prior to installation.



Do not store on uneven ground

If trusses are stored horizontally, blocking should be used on eight to ten foot centers, or as required, to minimize lateral bending and moisture gain.




Care should be exercised when removing banding to avoid damaging trusses.


During long term storage, trusses shall be protected from the environment in a manner that provides for adequate ventilation of the trusses. If tarpaulins or other material is used, the ends shall be left open for ventilation. Plastic is not recommended, since it can trap moisture.

3 Hoisting


All trusses that are erected one at a time shall be held safely in position by the erection equipment until such time as all necessary bracing has been installed and the ends of the trusses are securely fastened to the building.




Avoid lateral bending

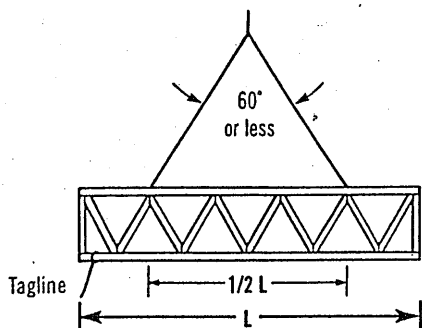


$L \leq 30'$

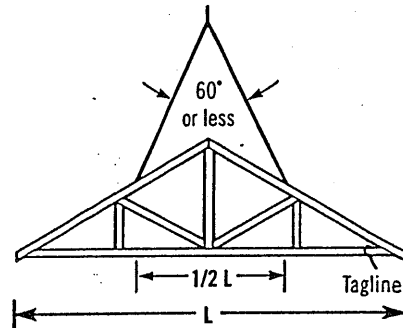


Truss sling is acceptable where these criteria are met.

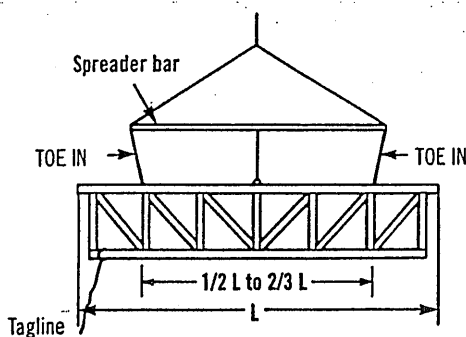


$30' < L \leq 60'$

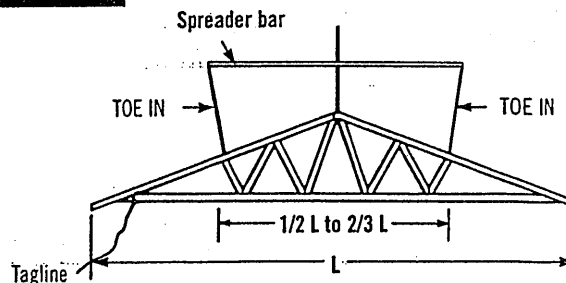

Use spreader bar in all other cases. It should be noted that the lines from the ends of the spreader bar "TOE IN"; if these lines should "TOE OUT" the truss may fold in half.

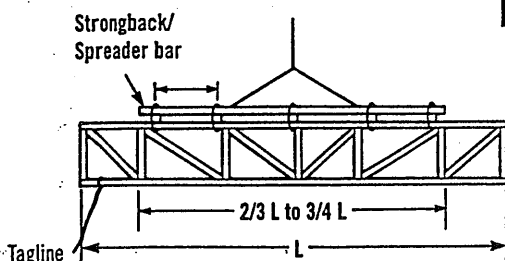

$L > 60'$

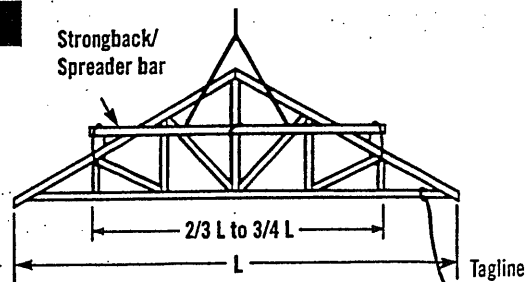


For lifting trusses with spans in excess of 60 feet, it is recommended that a strongback/spreader bar be used as illustrated. The strongback/spreader bar should be attached to the top chord and web members at intervals of approximately 10 feet. Further, the strongback/spreader bar should be at or above the mid-height of the truss to prevent overturning. The strongback/spreader bar can be of any material with sufficient strength to safely carry the weight of the truss and sufficient rigidity to adequately resist bending of the truss.

4 Beginning the Erection Process


It is important for the builder or erection contractor to provide substantial bracing for the first truss erected. The two or more trusses making up the rest of the first set are tied to and rely upon the first truss for stability. Likewise, after this first set of trusses is adequately cross-braced, the remaining trusses installed rely upon this first set for stability. Thus, the performance of the truss bracing system depends to a great extent on how well the first group of trusses is braced.

Ground Brace - Exterior

One satisfactory method ties the first unit of trusses off to a series of braces that are attached to a stake driven into the ground and securely anchored. The ground brace itself should be supported as shown below or it is apt to buckle. Additional ground braces in the opposite direction, inside the building, are also recommended.


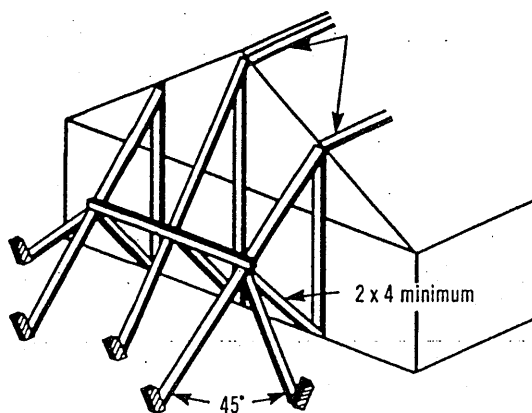


Note: Locate ground braces for first truss directly in line with all rows of top chord continuous lateral bracing (either temporary or permanent).

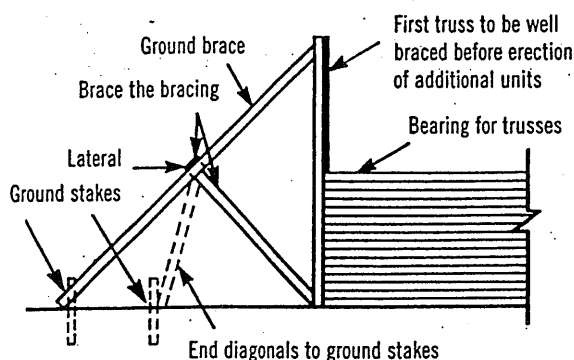

Ground Brace - Interior

Another satisfactory method where height of building or ground conditions prohibit bracing from the exterior is to tie the first truss rigidly in place from the interior at the floor level, provided the floor is substantially completed and capable of supporting the ground bracing forces. Securely fasten the first truss to the middle of the building. Brace the bracing similar to exterior ground bracing shown at left. Set trusses from the middle toward the end of the building. Properly cross-brace the first set of trusses before removing floor braces and setting remaining trusses.

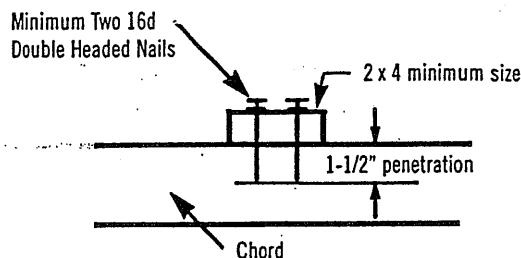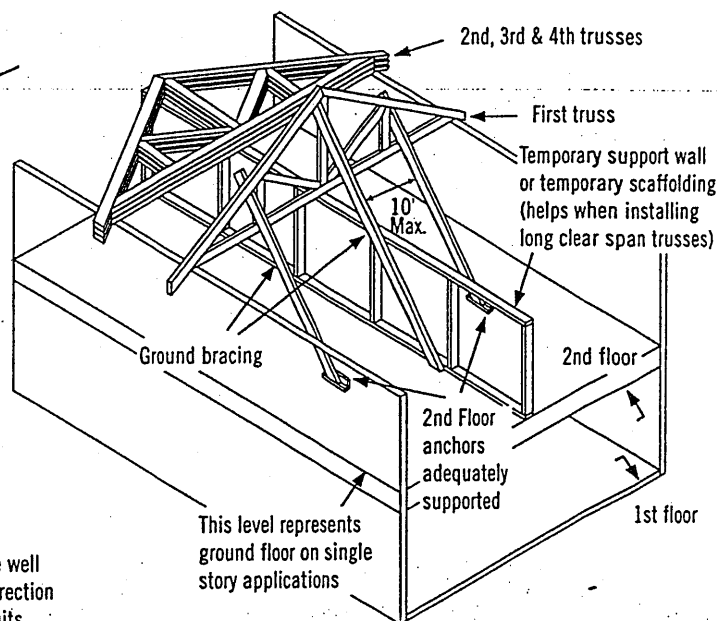


Inadequate size of bracing material or inadequate fastening is a major cause of erection dominoing.


5 Erection Tolerance

Complying with erection tolerances is critical to achieving an acceptable roof or floor line, and to accomplishing effective bracing. Setting trusses within tolerance the first time will prevent the need for the hazardous practice of respacing or adjusting trusses when roof sheathing or roof purlins are installed. Trusses leaning or bowing can cause nails to miss the top chords when sheathing is applied, and create cumulative stresses on the bracing, which is a frequent cause of dominoing.


When sheathing, make sure nails are driven into the top chord of the trusses.

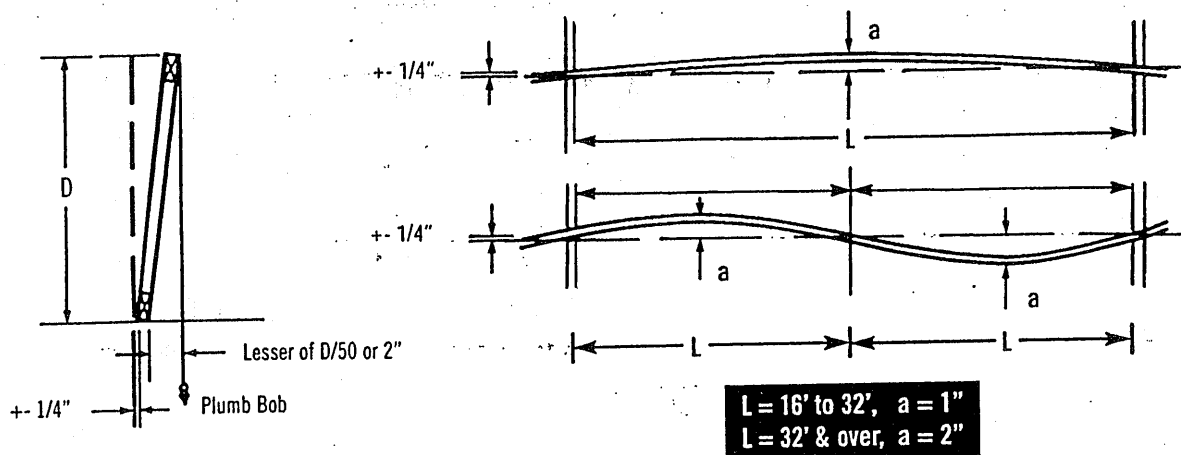

6 Bracing




Do not install trusses on temporarily connected supports



Do not walk on unbraced trusses



Do not walk on trusses or gable ends lying flat




Nails in withdrawal (parallel to force)

All anchors, hangers, tie-downs, seats, bearing ledgers, etc., that are part of the supporting structure shall be accurately and properly placed and permanently attached before truss installation begins. No trusses shall ever be installed on anchors or ties that have temporary connections to the supporting structure.

Nailing scabs to the end of the building to brace the first truss is not recommended.

All nailing of bracing should be done so that nails are driven perpendicular to the direction of force, as shown at right.




Well nailed (perpendicular to force)

7 Bracing Requirements for 3 Planes of Roof

Temporary erection bracing must be applied to three planes of the roof system to ensure stability: Plane 1) Top Chord (sheathing), Plane 2) Bottom Chord (ceiling plane), and Plane 3) Web Member plane or vertical plane perpendicular to trusses.

1) Top Chord Plane

Most important to the builder or erection contractor is bracing in the plane of the top chord. Truss top chords are susceptible to lateral buckling before they are braced or sheathed.

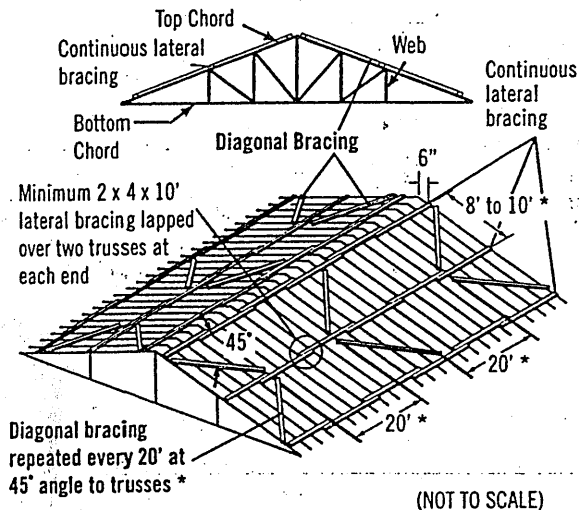


Exact spacing between trusses should be maintained as bracing is installed to avoid the hazardous practice of removing bracing to adjust spacing. This act of "adjusting spacing" can cause trusses to topple if connections are removed at the wrong time.

3) Web Member Plane

"X" bracing, as shown, is critical in preventing trusses from leaning or dominoing. Repeat as shown to create a succession of rigid units.


X-bracing should be installed on vertical web members wherever possible, at or near lateral bracing. Plywood or OSB may be substituted for X-bracing.

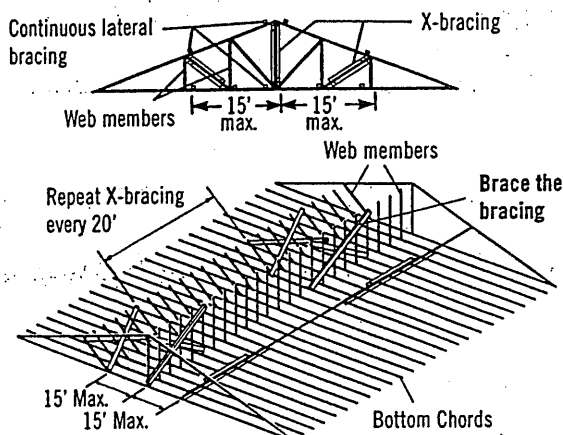

Note: Top chords and some web members are not shown, in order to make drawings more readable.


2) Bottom Chord Plane

In order to hold proper spacing on the bottom chord, temporary bracing is recommended on the top of the bottom chord.

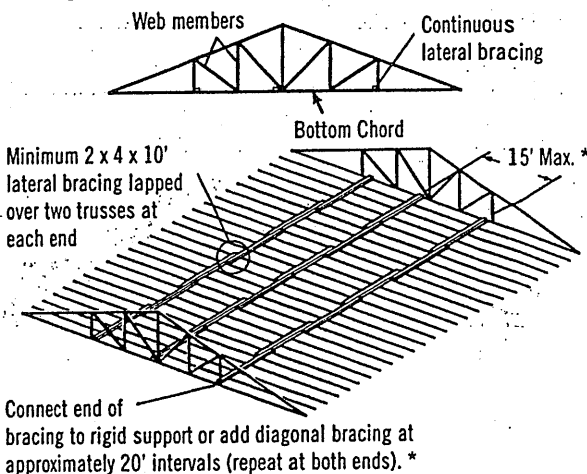


* Long spans, heavy loads or other spacing configurations may require closer spacing between lateral bracing and closer intervals between diagonals. Consult the building designer or HIB and DSB (Recommended Design Specification for Temporary Bracing of Metal-Plate Connected Wood Trusses) for details.

Diagonal or cross-bracing is very important!



Do not use short blocks to brace individual trusses without a specific bracing plan detailing their use





Bracing requirements using the same principles apply to parallel chord trusses

8 Stacking Materials

Do not proceed with building completion until all bracing is securely and properly in place


Never stack materials on unbraced or inadequately braced trusses




Platform must be rigidly braced

Proper distribution of construction materials is a must during construction.



Never stack materials near a peak

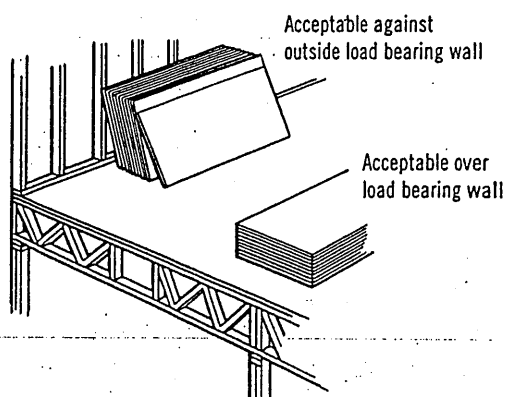

Never stack materials on the cantilever of a truss




Always stack materials over two or more trusses.





Single truss

Never overload small groups or single trusses. Position load over as many trusses as possible.



Roofing and mechanical contractors are cautioned to stack materials only along outside supporting members or directly over inside supporting members. Trusses are not designed for dynamic loads (i.e., moving vehicles). Extreme care should be taken when loading and stacking construction materials (rolled roofing, mechanical equipment, etc.) on the roof or floor system.

Never cut any structural member of a truss.



Sleepers

Panel point

Sleepers for mechanical equipment should be located at panel points (joints) or over main supporting members, and only on trusses that have been designed for such loads.

Caution Notes

Errors in building lines and/or dimensions, or errors by others shall be corrected by the contractor or responsible construction trade subcontractor or supplier before erection of trusses begins.

Cutting of nonstructural overhangs is considered a part of normal erection and shall be done by the builder or erection contractor.

Any field modification that involves the cutting, drilling, or relocation of any structural truss member or connector plate shall not be done without the approval of the truss manufacturer or a licensed design professional.

The methods and procedures outlined are intended to ensure that the overall construction techniques employed will put floor and roof trusses safely in place in a completed structure. These recommendations for bracing wood trusses originate from the collective experience of leading technical personnel in the wood truss industry, but must, due to the nature of responsibilities involved, be presented only as a guide for use by a qualified building designer, builder, or erection contractor. Thus, the Wood Truss Council of America expressly disclaims any responsibility for damages arising from the use, application, or reliance on the recommendations and information contained herein.

[Selected text and figures referenced or reproduced from HIB and DSB by permission of the Truss Plate Institute, Madison, WI.]

THE CANADIAN WOOD TRUSS ASSOCIATION



L'ASSOCIATION CANADIENNE DES FABRICANTS DE FERMES DE BOIS

1400 Blair Place, Suite 210, Ottawa, ON K1J 9B8
Tel.: 613-747-5544 Fax: 613-747-6264



**Wood Truss Council
of America**

One WTCA Center
6300 Enterprise Lane, Madison, WI 53719-1140
Tel.: 608-274-4849 Fax: 608-274-3329
wtca@woodtruss.com www.woodtruss.com