

CONSTRUCTION SUMMARY			
Charisma Condominiums - Genazzano Highrises Inc.			
PURCHASER: Fabian Nestor PEREZ GONZALEZ		RECEIVED	TEL:
SEP 12 2023			
Unit 10, Level 19 (2010-East)	Floor Plan B618		

CABINETRY

1 - KITCHEN - DELETE CABINETS ABOVE STOVE - VENDOR WILL SUPPLY 6 INCH VENT AS PER CONSTRUCTION SPECIFICATIONS 27Sep21 Note:	
1 - VANITY - MAIN BATHROOM - SANOSAN 1982 SNOW UPGRADE 3 27Sep21 Note:	
1 - KITCHEN - CHANGE COLOUR OF CABINET - MONACO 823 DRIFTWOOD 27Sep21 Note:	
1 - CABINETRY - EXTENDED UPPERS IN KITCHEN - STANDARD SERIES CABINETRY 27Sep21 Note:	



CERAMIC TILE

1 - CERAMIC TILE - UPGRADE 3 - - MAIN BATH FLOOR - VARENNA CARRARA POLISHED 12X24 27Sep21 Note:	
--	--

CONSTRUCTION

1 - SMOOTH CEILING - MASTER BEDROOM 27Sep21 Note:	
--	--

COUNTER TOP

1 - VANITY COUNTERTOP UPGRADE EDGE - EACH 27Sep21 Note:	
1 - MAIN BATH - VANITY COUNTERTOP UPGRADE MATERIAL - ANTIQUE BROWN (M) 27Sep21 Note:	

COUNTER TOP AND BACKSPLASH

1 - KITCHEN COUNTERTOP AND FULL HEIGHT BACKSPLASH - UPGRADE COLOUR - QUARTZ MISTRAL - INCLUDES BEHIND CHIMNEY HOOD FAN 27Sep21 Note:	
1 - KITCHEN COUNTERTOP UPGRADE EDGE 27Sep21 Note:	

ELECTRICAL

1 - **CANCEL** LIVING ROOM - DELETE STANDARD PLUG TO SWITCH - DO NOT INSTALL AS PER PURCHASER REQUEST SWITCH TO PLUG INSTALL PLUG ONLY 13Jan23 Note: REQUEST CANCELLED BY PURCHASER -- INSTALL STANDARD LIVING ROOM SWITCH TO PLUG	
1 - LIVING ROOM - ADD PLUG ON WALL AT 48" FROM FINISHED FLOOR FOR CONFIRMATION ONLY REGARDING HEIGHT OF PLUG AS PER EXTRA SOLD ON PE#26132 13Jan23 Note:	
1 - CENTER LIGHT AT LIVING/DINING ROOM AS PER SKETCH 13Jan23 Note: FOR CONFIRMATION ONLY	
1 - LIVING ROOM- ADD A PLUG ON WALL SEE SKETCH 27Sep21 Note:	



CONSTRUCTION SUMMARY			
Charisma Condominiums - Genazzano Highrises Inc.			
PURCHASER: Fabian Nestor PEREZ GONZALEZ			TEL:
Unit 10, Level 19 (2010-East)	Floor Plan B618		
1 - LIVING ROOM - DELETE STANDARD PLUG TO SWITCH - DO NOT INSTALL AS PER PURCHASERS REQUEST SWITCH TO PLUG - INSTALL PLUG ONLY 27Sep21 Note:			

FLOORING

1 - LAMINATE - FJORD SERIES IN LIEU OF STANDARD - ASTRID OAK #TLNEUM06 27Sep21 Note:	
LAMINATE-AVENUE SERIES IN LIEU OF STANDARD-	

PLUMBING

1 - KITCHEN - WATERLINE ROUGH-IN FOR FRIDGE 27Sep21 Note:	
--	--

This Document is Extremely Time Sensitive - Printed 11 Sep 23 at 14:36



KVWB600DSS

**KitchenAid®**

## 30" Wall-Mount, 3-Speed Canopy Hood

<http://www.kitchenaid.com>



### Key Features:

- 600 CFM/65K BTU Threshold
- Perimeter Ventilation
- Auto Speed Setting
- LED Task Lights
- Halogen Night Lights
- 3-Speed Electronic Glass Touch Control with Boost Function (10 Min.)
- Whisper Quiet® System @ 49 dBA (1.5 sones) at Low Speed
- Dishwasher Safe Grease Filters
- Easy In-line Conversion

### Product Dimensions:

Height: 24 5/8

Width: 30

Depth: 19 11/16

### Electrical Requirements:

15.

### Additional Information:

[Use And Care Guide](#)

[Dimension Guide](#)

[Installation Guide](#)

[Warranty Certificate](#)

Available in:

Black Stainless

☒ Stainless Steel

©Registered trademark/TM Trademark of Whirlpool, U.S.A. © 2016 Whirlpool Corporation. All Rights Reserved.  
All other trademarks are owned by their respective companies.  
Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. We also reserve the right to discontinue or transition products without notice.  
Manufacturer's Suggested Retail Price (MSRP) and Minimum Advertised Price (MAP) provided for reference purposes only. Dealer alone determines advertised and retail prices.  
Created On: Monday, March 06, 2017 19:59:05



**KitchenAid®**  
FOR THE WAY IT'S MADE.™

**30" (72.6 cm) and 36" (91.4 cm) Wall-Mount Canopy Range Hood**

**PRODUCT MODEL NUMBERS**

KVWB600D      KVWB606D

**Electrical:** A 120 volt, 60 Hz., AC only, 15-amp, fused electrical circuit is required.

**VENTING METHODS**

This canopy range hood is factory set for venting through the roof or through the wall.

A 6" (15.2 cm) round vent system is needed for installation (not included). The hood exhaust opening is 6" (15.2 cm) round.

**NOTE:** Flexible vent is not recommended. Flexible vent creates back pressure and air turbulence that greatly reduce performance.

Vent system can terminate either through the roof or wall. To vent through a wall, a 90° elbow is needed.


**Rear Discharge**

A 90° elbow may be installed immediately above the hood.

**For Non-Vented (Recirculating) Installations**


If it is not possible to vent cooking fumes and vapors to the outside, the hood can be used in the non-vented (recirculating) version, using a Recirculation Kit (which includes charcoal filters and a deflector). To order, see the "Assistance or Service" section.

**Roof Venting**

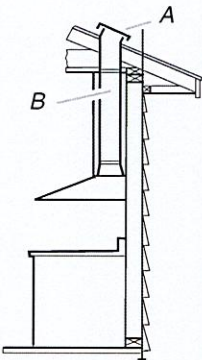


A. Roof cap  
B. 6" (15.2 cm) round vent

**Wall Venting**

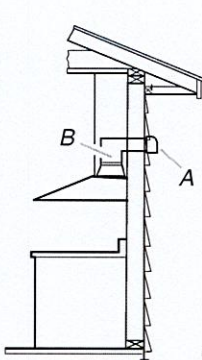

A. Wall cap  
B. 6" (15.2 cm) round vent

**Non-Vented (Recirculating)**

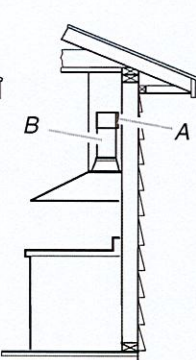



A. Diverter  
B. 6" (15.2 cm) round vent

**Calculating Vent System Length**


To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.

**Vent System**

Vent Piece	6" (15.2 cm) Round	
45° elbow	2.5 ft (0.8 m)	
90° elbow	5.0 ft (1.5 m)	

Maximum equivalent vent length is 35 ft (10.7 m).


**Example Vent System**

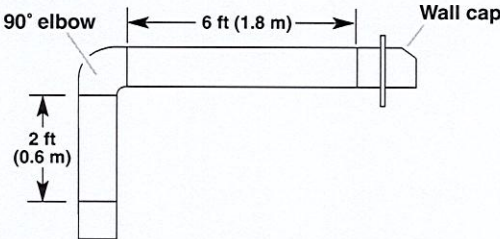

The following example falls within the maximum recommended vent length of 35 ft (10.7 m).

1 - 90° elbow	= 5.0 ft (1.5 m)
1 - wall cap	= 0.0 ft (0.0 m)
8 ft (2.4 m) straight	= 8.0 ft (2.4 m)
Length of system	= 13.0 ft (3.9 m)

**PRODUCT DIMENSIONS**

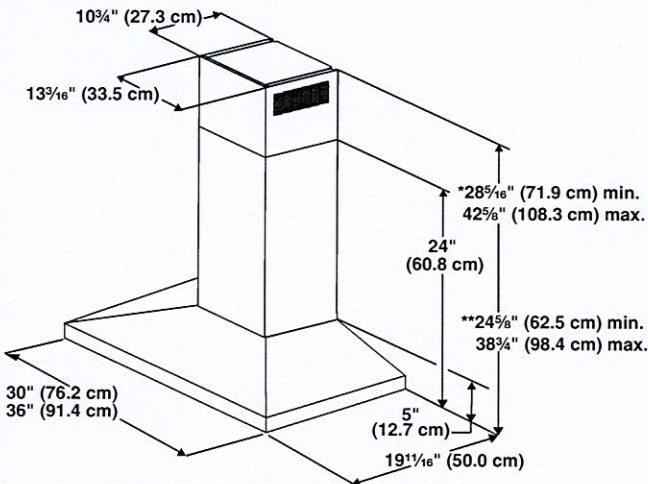


\*For non-vented (recirculating) installations

\*\*For vented installations



CABINET DIMENSIONS

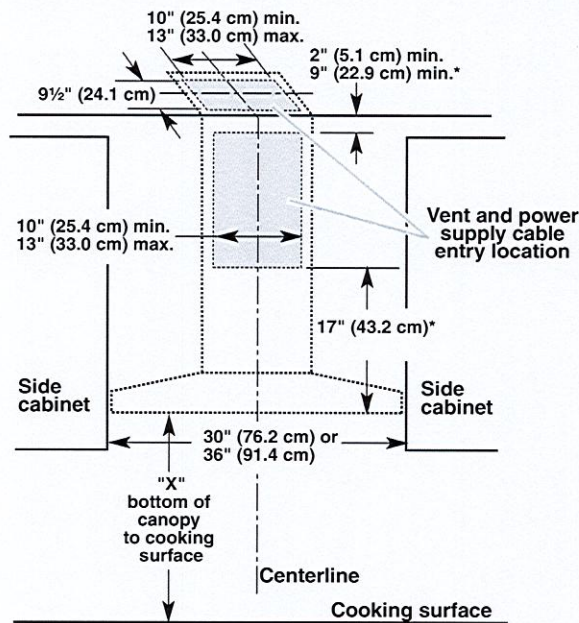

\*For non-vented (recirculating) installations

IMPORTANT:

- Minimum distance "X": 24" (61.0 cm) from electric cooking surface.
- Minimum distance "X": 27" (68.6 cm) from gas cooking surfaces.
- Suggested maximum distance "X": 36" (91.4 cm)

The chimneys can be adjusted for different ceiling heights. See the following chart.

Vented Installations		
	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 1" (2.16 m)	9' 2" (2.79 m)
Gas cooking surface	7' 4" (2.23 m)	9' 2" (2.79 m)
Non-vented (recirculating) Installations		
	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 1" (2.16 m)	9' 6" (2.9 m)
Gas cooking surface	7' 4" (2.23 m)	9' 6" (2.9 m)

**\*NOTE:** The range hood chimneys are adjustable and designed to meet varying ceiling or soffit heights depending on the distance "X" between the bottom of the range hood and the cooking surface. For higher ceilings, a Chimney Extension Kit is available from your dealer or an authorized parts distributor. The chimney extension replaces the chimney shipped with the range hood. To order, see the "Assistance or Service" section.