GREENYORK HOMES	DATE: JULY 24 <sup>TH</sup> 2020 REVISED: 22SEP20 REVISED: 02OCT20
PROJECT: 18 DENHAM, RICHMOND HILL (CARLO B.)	REVIOLD: 220E120
MODEL: AVIGNON 3	<b>SITE SUPER:</b> MIKE B (647) 212 2344
SQ FOOTAGE: 8,505 SQ FT.	

APPLIANCE SCHEDULE						
1 <sup>ST</sup> FLOOR						
LOCATION	TYPE	QTY	DESCRIPTION	SUPPLIER	ROUGH IN	NOTES
KITCHEN	FRIDGE	1	THERMADOR 36" BUILT IN FRESH FOOD COLUMN	APPLIANCE CANADA		
	FREEZER	1	THERMADOR - T36IF900SP 36" BUILT IN FREEZER COLUMN WITH INTERNAL ICE MAKER			
	OVEN (BUILT IN)	1	THERMADOR - MB30WP 30" BUILT-IN MICROWAVE			
	WARMING DRAWER	1	THERMADOR - WD30WC 30" WARMING DRAWER			
	STOVE	1	THERMADOR – PRG486WLH 48" GAR PRO HARMONY RANGE WITH GRILL			
	STOVE HOOD	1	THERMADOR VCIN48GWS 48" CUSTOM INSERT			
	DISHWASHER	1	DBI663IS 30 SERIES DISHWAHER – INTERGRATED HANDLE			
2 <sup>ND</sup> FLOOR						
LAUNDRY	WASHER	1	WHIRLPOOL 5.2CU STEAM WASHER WW WFW6620HW	APPLIANCE CANADA	TJ48371 BRAIDED HOSE FOR	
	DRYER	1	WHIRLPOOL STEAM DRYER YWED6620HW		LAUDRY	

1 | P a g e

CONTACT: JACK CELLI	
<b>OFFICE:</b> (4) 661 5329 <b>CELL:</b> (4) 737 6901	
EMAIL: JCELLI@GREENPARK.COM	FOR ANY CONCERNS REGARDING THIS COLOUR CHART,
ASSISTANT CONTACT: ALEXANDRA AVERSA	PLEASE CONTACT DESIGN TEAM.
<b>OFFICE:</b> (4) 661 5329 <b>CELL:</b> (6) 338 9456	
EMAIL: AAVERSA@GREENPARK.COM	

GREENYORK HOMES	DATE: JULY 24 <sup>TH</sup> 2020 REVISED: 22SEP20 REVISED: 02OCT20
PROJECT: 18 DENHAM, RICHMOND HILL (CARLO B.)	REVISED. 223E120
MODEL: AVIGNON 3	<b>SITE SUPER:</b> MIKE B (647) 212 2344
SQ FOOTAGE: 8,505 SQ FT.	

<b>APPLIANCE</b>	SCHEDULE					
BASEMENT						
LOCATION	TYPE	QTY	DESCRIPTION	SUPPLIER	ROUGH IN	NOTES
CHEF KITCHEN	FRIDGE	1	36" WIDTH BUILT IN FRIDGE SS KBBL306ESS	APPLIANCE CANADA		
	OVEN (BUILT IN)	1	30" SINGLE WALL OVEN KOSE500ESS			
	STOVE	1	30" GAS RANGE SS KFGC500JSS	_		
	STOVE HOOD	1	36" WALL MOUNT CANOPY HOOD KVWB406D			
	DISHWASHER	1	24" DISHWASHER KDPM604KPS			
NANNY SUITE W.I.C.	WASHER/DRYER COMBO	1	24" WHIRLPOOL LAUNDRY CENTER YWET402HW			
BAR	WINE FRIDGE	1	MARVEL WINE FRIDGE SS ML24WSG0RS			

2 | P a g e

CONTACT: JACK CELLI	
<b>OFFICE:</b> (4) 661 5329 <b>CELL:</b> (4) 737 6901	
EMAIL: JCELLI@GREENPARK.COM	FOR ANY CONCERNS REGARDING THIS COLOUR CHART,
ASSISTANT CONTACT: ALEXANDRA AVERSA	PLEASE CONTACT DESIGN TEAM.
<b>OFFICE:</b> (4) 661 5329 <b>CELL:</b> (6) 338 9456	
EMAIL: AAVERSA@GREENPARK.COM	









PROFESSIONAL SERIES



### **FEATURES & BENEFITS**

- Built-in microwave is the perfect companion for any Thermador
- Specially crafted gray glass on stainless steel for a luxurious look and finish
- 950 watts microwave power and 10 microwave power level
- Sensor cooking programs measure humidity and adjust cooking level and cooking time
- Designed for flexibility-standard or flush installation into kitchen cabinets



GENERAL PROPERTIES	
Cavity Color	Stainless Steel
Microwave Power (W)	950 W

### Modes

(10) Baked Potato, Sweet Potato, Fresh Vegetable, Frozen Vegetable, Ground Meat, Fish / Seafood, Brown Rice, White Rice, Frozen Entrées,

CAPACITY	
Cavity Capacity (cu. ft.)	1.6 cu. ft.
TECHNICAL DETAILS	
Watts (W)	1,650 W
Circuit Breaker (A)	15 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Plug Type	NEMA 5-15 – 3 prong
Power Cord Length (in.)	59"
DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (HxWxD) (in.)	19 5/8" x 29 3/4" x 19 5/8"
Required Cutout Size (HxWxD) (in) – Standard Install	19 1/4" x 28 1/2" x 19 1/4"
	THE RESERVE OF THE PERSON NAMED IN COLUMN 2 IS NOT THE OWNER.

all Appliance Dimensions (HxWxD) (in.)	19 5/8" x 29 3/4" x 19 5/8"
ired Cutout Size (HxWxD) (in) – dard Install	19 1/4" x 28 1/2" x 19 1/4"
ired Cutout Size (HxWxD) (in) – Flush Insta	II 20 1/8" x 30" x 20 3/4"
Overall Interior Dimensions (HxWxD) (in.)	9 7/8" x 16 1/2" x 16 1/2"
able Diameter (in.)	14 1/8"
Veight (lbs)	75 lbs.
Veight (lbs)	7.

### **ACCESSORIES (INCLUDED)**

Glass turntable

WARRANTY		
Limited Warranty, Entire Appliance, Parts and Labor	2 Year	


†To be fully ADA compliant, these units must be installed according to ADA guidelines. Please check current ADA requirements for guidance on installation.


Page 1 of 4 09 / 20

PROFESSIONAL SERIES



### INSTALLATION DETAILS

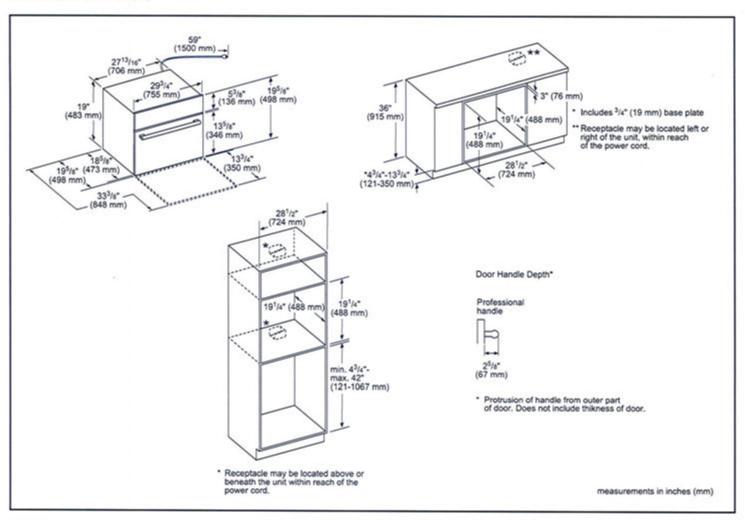


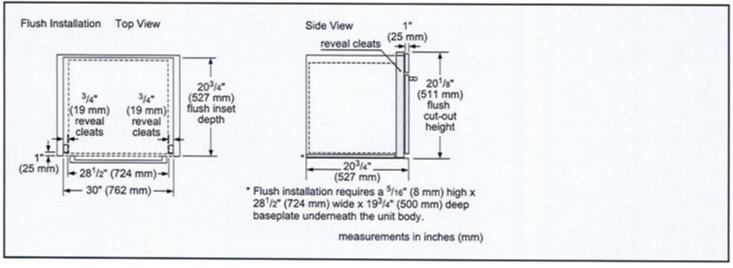

PROFESSIONAL SERIES



### INSTALLATION DETAILS

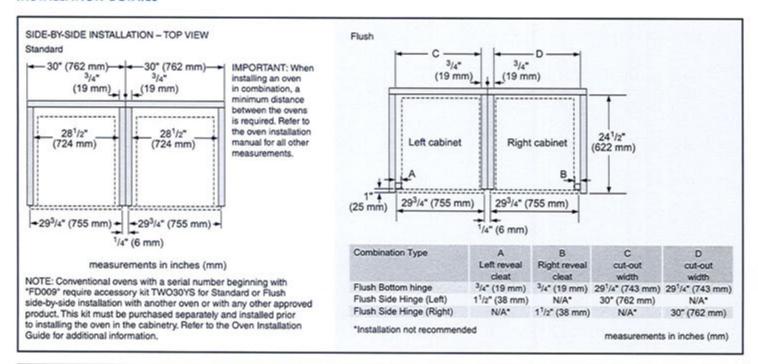

## THERMADOR SIDE-BY-SIDE BUILT-IN OVEN COMBINATION GUIDE

The following **OVENS** are approved to be installed side-by-side in combination and the installation has been certified by CSA. This guide is only effective with the use of the Thermador built-in oven side-by-side accessory kit TWO30YS. The built-in oven side-by-side accessory kit is required for approved installation.

The following **OVENS** and **DRAWERS** are approved by BSH Home Appliances Corporation to be installed in combination. These products, identified in the table below, may be installed in combination with other cooking units. The suitability of the combination has not been evaluated by CSA.

Conventional Ovens*	Steam Ovens
ME301WS	MEDS301WS
MED301WS	PODS301WS
MED301LWS	MEDS301WS w/ SDS30WC
MED301RWS	PODS301WS w/ SDS30WC
PO301W	
POD301W	
POD301LW	
POD301RW	

Conventional Ovens*	Steam Ovens	Microwave Ovens	Speed Ovens
ME301WS	MEDS301WS	MB30WS	MC30WS
MED301WS	PODS301WS	MB30WP	MC30WP
MED301LWS	MEDS301WS w/ SDS30WC	MB30WS w/ SD30WC	MC30WS w/ SD30WC
MED301RWS	PODS301WS w/ SDS30WC	MB30WP w/ SD30WC	MC30WP w/ SD30WC
PO301W		MB30WS w/ WD30WC	MC30WS w/ WD30WC
POD301W		MB30WP w/ WD30WC	MC30WP w/ WD30WC
POD301LW			
POD301RW			


\*Conventional ovens with a serial number beginning with "FD009" require accessory kit TWO30YS for side-by-side installation with another oven or in combination with any other approved product. All parts in the kit may not be required. Refer to the Oven Installation Guide for additional information.

Page 3 of 4 09 / 20

PROFESSIONAL SERIES



### INSTALLATION DETAILS

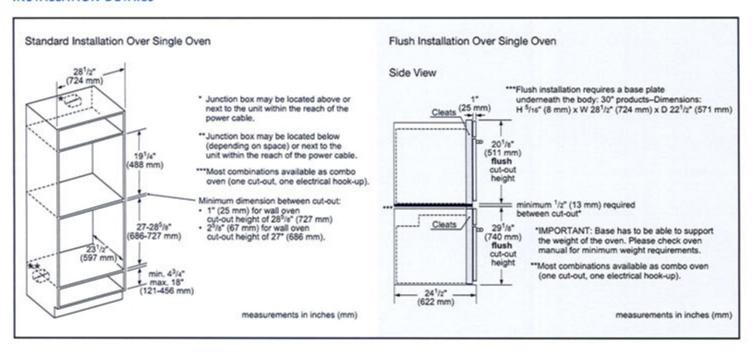


These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

### WD30WC 30-INCH WARMING DRAWER

PUSH TO OPEN











### **FEATURES & BENEFITS**

- Our warming drawer is the perfect combination of uncompromising performance, unique convenience features and elegant design
- Warming mode with four convenient temperature settings
- Drawer installs vertically under Thermador speed, steam or wall oven


GENERAL PROPERTIES	
Power Levels	Low, Med, High, Proof
Dough Proofing Mode	Yes
Temperature Settings	100° – 190° F
Timer	5 min. – 5 hours
Automatic Shut Off	After 1 hour
Door Opening	Push to Open
Control Type	Illuminated Touch Control
CAPACITY	
Cavity Capacity	2.2 cu. ft.
TECHNICAL DETAILS	
Watts	450 W
Circuit Breaker	15 A
Volts	120 V
Frequency	60 Hz
Power Cord Length	84*
Plug Type	120V 3 Prong
DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (HxWxD)	9 7/16" x 29 3/4" x 24 1/2"
Required Cutout Size (HxWxD) - Standard	9 1/4" x 28 1/2" x 23 1/2"
Required Cutout Size (HxWxD) - Flush	9 9/16" x 30" x 24 1/2"
Net Weight	55 lbs
WARRANTY	<b>是新发展</b> 音
Limited Warranty Parts and Labor	2 Year

Page 1 of 3 10/18



PUSH TO OPEN

### 30-INCH WARMING DRAWER AND CUTOUT DIMENSIONS

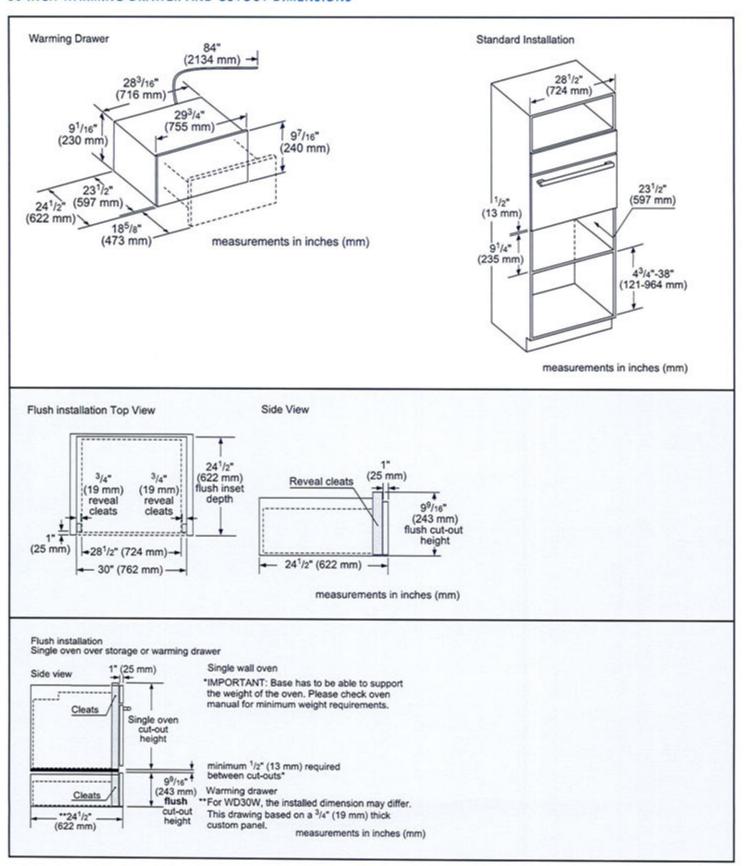


Page 2 of 3

### WD30WC 30-INCH WARMING DRAWER





### INSTALLATION DETAILS

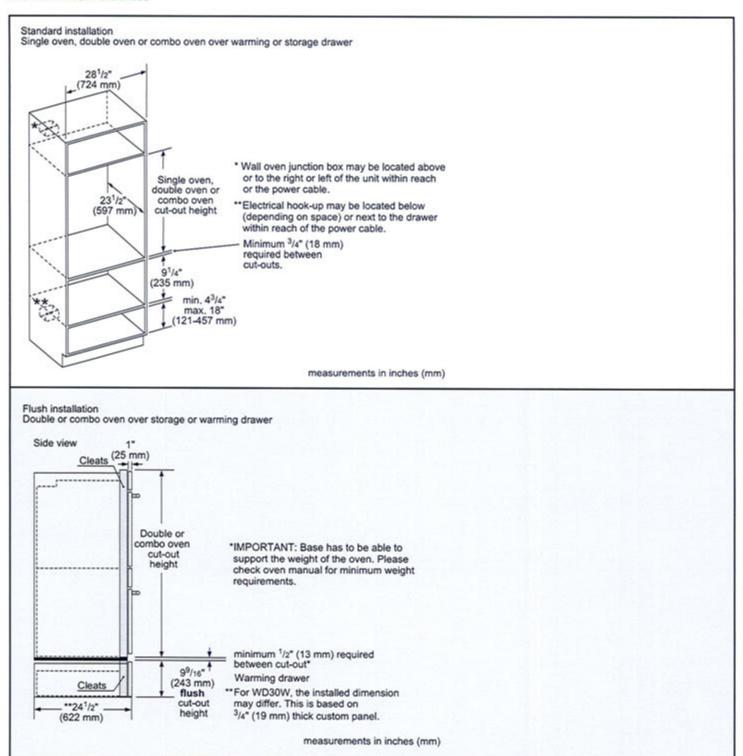

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2018 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.









# **DBI663IS**

# 30 SERIES DISHWASHER - INTEGRATED HANDLE

our useful Hygiene program for baby bottles and other items that need to be perfectly disinfected powerful Super Cleaning System+ which is developed to eliminate the need for you to pre-rinse and This built-in dishwasher has three basket levels for a better loading flexibility. Equipped with our

DRYING METHOD	Turbo Drying
PRODUCT LINE	Style
MODE OF INSTALLATION	Built In
SIZE	ADA height compliant
NUMBER OF BASKETS	ω
NUMBER OF PLACE SETTINGS	16 place settings
TOP TRAY	Easy height adjustment; Divisible and removable baskets in top rack; With rack for knives and utensils; With rack for bowls and cups; With telescopic rails; Handle
UPPER BASKET TYPE	Premium
LOWER BASKET TYPE	Premium
CUTLERY BASKET	Removable cuttery basket for easy unloading
COLOUR	Stainless steel

οõ

SCS+

This website uses cookies.

We use cookies to allow you an unimpeded and user-friendly experience. By further use of this website, you agree with our cookies policy

Accept and continue

ue Do you want to know more?

### 48-INCH GAS PRO HARMONY® RANGE WITH GRILL



PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE








### **FEATURES & BENEFITS**

- ★ The Star® Burner delivers superior flame spread for more even heating
- $\bigstar$  ExtraLow $^{\otimes}$ , the widest simmer temperature control as low as
- ★ 2 ExtraLow® burners for simmering, melting, or holding long
  - Superior grilling results, thermostatically controlled for even
  - Convection Bake offers precise multi-level baking results

TECHNICAL DETAILS	
Circuit Breaker	20 A
Volts	120 V, 60Hz
Energy Source	Gas
Plug Type USA	120V – 3 Prong
Power Cord Length	65" (1,651mm)
Gas Supply	3/4"
WARRANTY	
Limited Warranty, Entire Appliance, Parts and Labor	2 Year

SEE PAGE 2 FOR INCLUDED AND OPTIONAL ACCESSORIES

### RANGETOP



Total number of cooktop Burners	6 + Griddle
1 – Power of Back Left Burner BTU	15,000 and XLO
2 - Power of Front Left Burner BTU	18,000 and XLO
3 – Power of Back Center Burner BTU	15,000
4 - Power of Front Center Burner BTU	18,000
5 - Power of Center 12" Electric Grill	1,630 W (6-Pass)
6 – Power of Back Right Burner BTU	15,000
7 – Power of Front Right Burner BTU	18,000
OVEN	
Oven Capacity Lg. / Sm.	4.6 / 2.5 cu. ft.
Cooking Modes, Lg. Oven	

Bake, Convection Bake, Roast, Broil Cooking Modes, Sm. Oven

Bake, Proof, Keep Warm, Roast, Broil	
Sabbath Lg. / Sm.	Yes / Yes
Self-Clean Lg. / Sm.	No / No
Telescopic Rack(s) Lg. / Sm.	3/1
Interior Lights Lg. / Sm.	2/1
Bake Power Lg. / Sm.	20,500 BTU / 15,000 BTU
Broil Power Lg. / Sm.	17,500 BTU / 8,000 BTU Infrared
Home Connect™ (Wi-Fi Enabled)	Yes, Large Oven Only
Lg. Cavity Interior Dimensions (HxWxD)	16 1/2" x 26" x 18 5/8"
Lg. Cavity Usable Dimensions (HxWxD)	11 1/4" x 22 3/8" x 16 3/4"
Sm. Cavity Interior Dimensions (HxWxD)	16 1/2" x 14 1/4" x 18 5/8"
Sm. Cavity Usable Dimensions (HxWxD)	11 7/8" x 10 7/8" x 16"
DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (HxWxD)	35 3/4"-36 3/4" x 47 15/16"

DIMENSIONS & WEIGHT	
Overall Appliance Dimensions (HxWxD)	35 3/4"-36 3/4" x 47 15/16" x 24 5/8"
Required Cutout Size (HxWxD)	35 <sup>3</sup> /4"-36 <sup>3</sup> /4" × 48" × 24"
Net Weight	497 lbs.

Page 1 of 6 11 / 18

### 48-INCH GAS PRO HARMONY® RANGE WITH GRILL



PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE

### ACCESSORIES (INCLUDED)

3 Telescopic Racks, 1 Sm. Telescopic Rack, Meat Probe, 1 Griddle Plate. 1 Grease Tray, 1 Lg. Broil Pan, 1 Sm. Broil Pan, Island Trim

### **ACCESSORIES (OPTIONAL)**



### **PABRICKBKW**

Flat Ceramic Briquettes with Basket



### **PWOKRINGHC**

Wok Ring



### PAGRIDDLE

Professional Griddle, Sits on Top of Grates Over 2 Star Burners, High-Release Coating



### PA12LCVRN

12" Professional Indoor Grill Cover



### **PAKNOBLUWH**

Metallic Blue Knob Kit



### **PAALTKITGW**

Natural Gas Models from 5,400 ft.-10,200 ft.



### **PABRICKW**

Flat Ceramic Briquettes without Basket



### PA12CHPBLK

Chopping Block / Cutting Board



### **PAGRIDDLEW**

12" Pro Griddle Plate (for Briquette Grill Models), Fusion Coating



### PA48WLBH

Pro Harmony 7" Low Back Backguard\*



### **PALPKITGW**

LP Conversion Kit Gas Pro Ranges (4 & 6 Burner)



### Contact Customer Support

Propane Gas or Dual-Fuel Models Connected to LP Gas from 10,000 ft.–10,200 ft.

Page 2 of 6 11 / 18


<sup>\*</sup>Models PCG305xx, PRD305xx, and PRD606xx are suitable for 0" rear clearance to combustible surfaces. All other models: when using the included Island Trim a minimum 6" (152 mm) rear clearance is required to a combustible surface. When installing against a combustible surface, a Thermador® Low Backguard is required for a 0" rear clearance to the combustible surface. A Thermador Low Backguard must be purchased separately. A rear clearance to a surface covered in a noncombustible material (metal, ceramic tile, brick, marble, or stone) is 0" when using the included Island Trim. Clearances of less than 6" (152 mm) should be approved by the local codes and/or by the local authority having jurisdiction. Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA.

### 48-INCH GAS PRO HARMONY® RANGE WITH GRILL




PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE

### **48-INCH RANGE DIMENSIONS**



### **48-INCH RANGE CUTOUT DIMENSIONS**

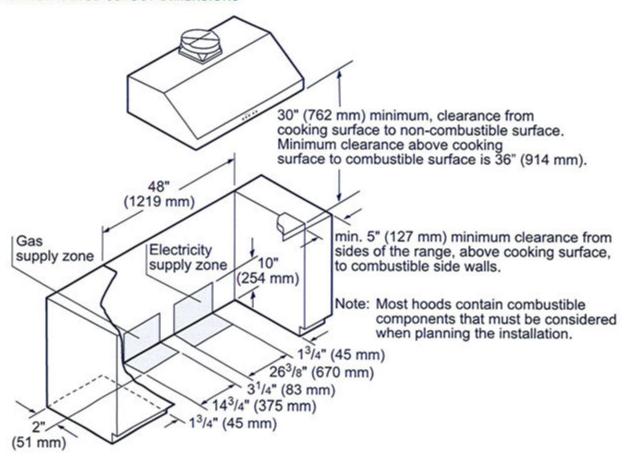


measurements in inches (mm)

### 48-INCH GAS PRO HARMONY® RANGE WITH GRILL



PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE

### **48-INCH RANGE CUTOUT DIMENSIONS**

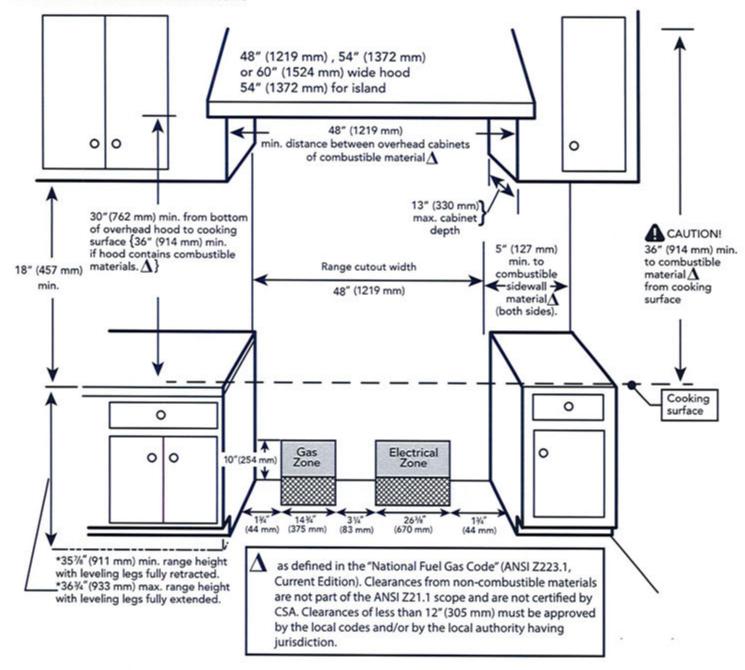


### PRG486WLH 48-INCH GAS PRO HARMONY® RANGE WITH GRILL

PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



### 48-INCH RANGE DIMENSIONS AND CLEARANCE REQUIREMENTS WITH "LOW BACK"

NOTE: A 36-inch minimum clearance is required between the top of the cooking surface and the bottom of an unprotected cabinet. A 30-inch clearance can be used when the bottom of the wood or metal cabinet is protected by not less than 1/4 inch of a flame retardant material covered with not less than No. 28 MSG sheet steel, 0.015 inch (0.4 mm) thick stainless steel, 0.024 inch (0.6 mm) aluminum, or 0.020 inch (0.5 mm) thick copper.

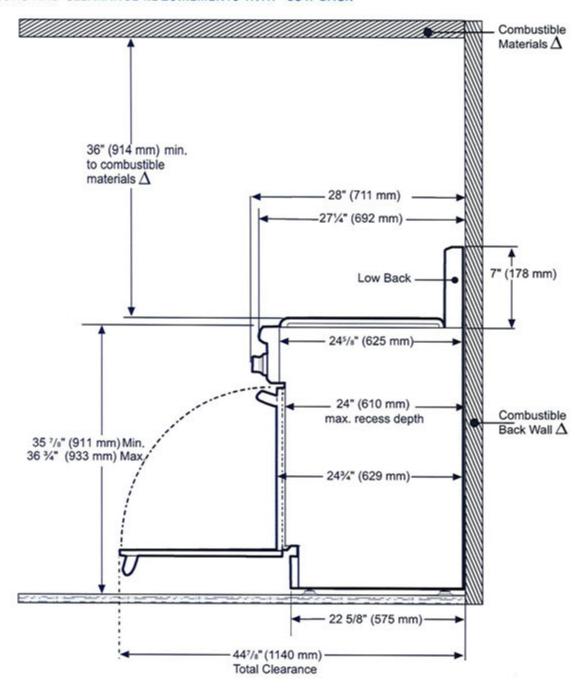

⚠ As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition),
Clearances from non-combustible materials are not part of the ANSI Z21.1
scope and are not certified by CSA. Clearances of less than 12" (305 mm)
must be approved by the local codes and/or by the local authority having jurisdiction.


Page 5 of 6 11 / 18

### PRG486WLH 48-INCH GAS PRO HARMONY® RANGE WITH GRILL

PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



AN INCH DANCE DIMENSIONS AND SIGNATURE DECIDENCE WITH THE COLUMN TO THE

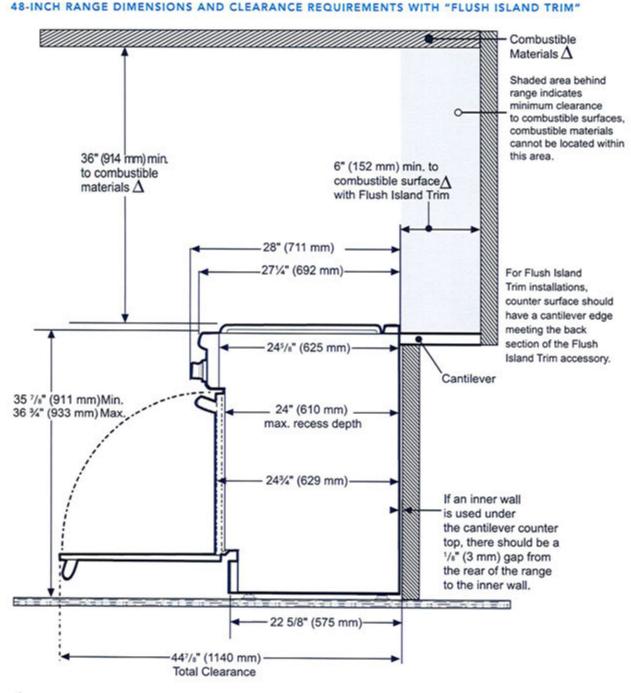

⚠ As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition).
Clearances from non-combustible materials are not part of the ANSI Z21.1
scope and are not certified by CSA. Clearances of less than 12" (305 mm)
must be approved by the local codes and/or by the local authority having jurisdiction.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada.

Thermador is not responsible for products that are transported from the U.S. for use in Canada.

<sup>1 800 735 4328 |</sup> USA THERMADOR COM | CANADA THERMADOR CA | \$\tilde{Q}2018 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

### T361R900SP

### 36-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY









### **FEATURES & BENEFITS**

- Freedom® Hinge enables true flush design
- Auto Door Opening provides the opening of the door with just a slight push or pull
- Delicate Produce Bins for expanded storage
- ThermaFresh System, Humidity and Temperature controlled drawers
- SoftClose® Drawers and Produce Bins for easy and controlled
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES	
Refrigerator	36°F (2°C) to 46°F (8°C)
Temperature Controlled Drawer	30°F (-1°C) to 38°F (3°C)
SuperCool	36°F (2°C) for approximately 6 hours
Energy Saving (Economy) Mode	43°F (6°C)

Panel Ready	Yes
Reversible Door Swing	Yes
SoftClose® Door	Yes*
SoftClose® Drawers	Yes
Carbon Air Filter	Yes
Lighting	LED Sidewall and Theater Lighting
Refrigerator Shelves	4
Adjustable Shelves	3
Shelf Material	Glass w/Aluminum
one moteria	Profile
Full Extension Drawers @ 115° Door Opening Angle	Yes
Full Extension Drawers @ 90° Door Opening Angle	Yes
General Use Drawer	1
Humidity Managed Drawer	1
Temperature Controlled Drawer	1
Door Bins	2
Gallon Door Bins	1
Delicate Produce Bins	1 Small, 2 Large
Door Open Alarm	Yes
Open Door Assist	Yes
Special Modes	Sabbath, Economy, Vacation
CAPACITY	
Total Capacity (cu. ft.)	20.6 cu. ft.
PERFORMANCE	
Dedicated Evaporator & Compressor System	Yes
Freeflow® Cold Air System	Yes
SuperCool	Yes
TECHNICAL DETAILS	
Watts (W)	350 W
Current (A)	15 A
Volts (V)	110-120 V
Frequency (Hz)	60 Hz
Power Cord Length (in.)	118
Plug Type	120V-3 Prong
DIMENSIONS & WEIGHT	
Appliance Dimensions (H x W x D) (in.)	83 3/4"** x 35 3/4" x 24
Required Cutout Size (H x W x D) (in.)	84" x 36" x 25"
	406 / 449 lbs
Net / Gross Weight (lbs)	
Net / Gross Weight (lbs)  EFFICIENCY  ENERGY STAR® Qualified	Yes

<sup>\*</sup>To verify if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328.

\*\*Height adjustable + / -1/2" (+ / -13 mm)

Page 1 of 3 3/20

### T361R900SP

### 36-INCH BUILT-IN FRESH FOOD COLUMN


FREEDOM® COLLECTION, PANEL-READY



WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System*; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System*; Parts Only	7th to 12th Year
Limited Warranty for Stainless Steel Rust-Through	Lifetime

<sup>\*</sup>Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

### **CUTOUT DIMENSIONS**




### Furniture return

A: Area for installation of power connection.


**B:** Area for running the water line. It is recommended that the waterbox is placed adjacent to the installation cavity, so that it can be accessed for service without uninstalling the appliance. If this is not possible, place the recessed waterbox adjacent to the water supply socket elevated at the heights as referenced in areas A and B.

C: Recess depth depends on kitchen design. For a flush installation, the depth needs to be at least 24 inches plus the thickness of the door panel.


Stainless steel models contain a panel-ready base unit, ready-to-install stainless steel door(s) with a right or left door swing and handle(s).



### TOP VIEW CLEARANCE

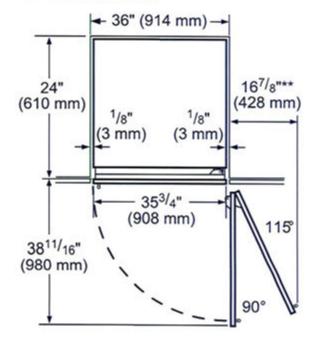

- \*\* Door handle must be added to this measurement
- \* Depends on the thickness of the unit door. 3/4" (19 mm) refers to the stainless steel door. (Special accessory).




### T361R900SP

### 36-INCH BUILT-IN FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY



### PRODUCT AND PANEL DIMENSIONS

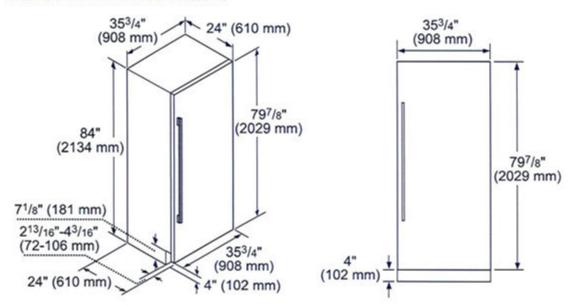

### ACCESSORIES (OPTIONAL)

### FLAT STAINLESS STEEL DOOR PANELS

30-Inch Flat Stainless Steel Door Panel



TFL36IR900 For use with Handle TFL36IR905\* Handleless

\*Available Summer 2019

NOTE: Handleless Panels should not be installed on units without the Soft-Close capability. If you are uncertain if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328.

### STORAGE



SPRODBIN10 Small Produce Bin



LPRODBIN10 Large Produce Bin



36PRODRAIL 36-Inch Produce Railing



36HFGALBIN 36-Inch Half Gallon Bin

### HANDLES

Choose between two options:

PR36HNDL20 36-Inch Professional Series Handle or

MS36HNDL20 36-Inch Masterpiece® Series Handle



### **HEATRKIT20 - 13W @ 120V**

Freedom® Heater Kit When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers. etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada.

Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION, ALL RIGHTS RESERVED.

### T361F900SP 36-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER



FREEDOM® COLLECTION, PANEL-READY







### **FEATURES & BENEFITS**

- Freedom® Hinge enables true flush design
- Auto Door Opening provides the opening of the door with just a slight push or pull
- Energy Efficient Diamond Ice made with twist tray technology
- Smooth Filtered Lighting for clear and easy viewing of all
- SoftClose® Drawers for easy and controlled storage
- Sleek clean design for the perfect symmetry when paired with additional columns
- TFT control panel managing all your columns functions

TEMPERATURE RANGES	
Freezer	-11°F (-24°C) to 7°F (-14°C)
SuperFreeze®	-22°F (-30°C) for approximately 52 hours
Energy Saving (Economy) Mode	3°F (-16°C)

GENERAL PROPERTIES	
Panel Ready	Yes
Reversible Door Swing	Yes
SoftClose® Door	Yes*
SoftClose® Drawers	Yes
Lighting	LED Sidewall and Theater Lighting
Freezer Shelves	4
Adjustable Shelves	3
Shelf Material	Glass w/Aluminum Profile
Full Extension Drawers @ 115° Door Opening Angle	Yes
General Use Drawer	2
Door Bins	3
External LED Proximity Sensor	No
Oversized Dispenser Opening	No
Chilled Water, Crushed and Cubed Ice	No
Rapid Water Replenishment System	No
Ice Maker with Diamond Ice System	Yes
Door Open Alarm	Yes
Open Door Assist	Yes
Special Modes	Sabbath, Economy, Vacation
CAPACITY	
Total Capacity (cu. ft.)	19.4 cu. ft.
PERFORMANCE	
Ten on one	
	Yes
Dedicated Evaporator & Compressor System	Yes
Dedicated Evaporator & Compressor System	1.44
Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process	Yes
Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS	Yes
Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W)	Yes Frost-Free
Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A)	Yes Frost-Free 350 W
Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A) Volts (V)	Yes Frost-Free 350 W
Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz)	Yes Frost-Free 350 W 15 A 110-120 V
Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.)	Yes Frost-Free 350 W 15 A 110-120 V 60 Hz
Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.)	Yes Frost-Free  350 W 15 A 110-120 V 60 Hz 118
Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT	Yes Frost-Free  350 W 15 A 110-120 V 60 Hz 118 120V-3 Prong
Dedicated Evaporator & Compressor System  SuperFreeze®  Defrost Process  TECHNICAL DETAILS  Watts (W)  Current (A)  Volts (V)  Frequency (Hz)  Power Cord Length (in.)  Plug Type  DIMENSIONS & WEIGHT  Appliance Dimensions (H x W x D) (in.)	Yes Frost-Free  350 W 15 A 110-120 V 60 Hz 118 120V-3 Prong
Dedicated Evaporator & Compressor System  SuperFreeze®  Defrost Process  TECHNICAL DETAILS  Watts (W)  Current (A)  Volts (V)  Frequency (Hz)  Power Cord Length (in.)  Plug Type  DIMENSIONS & WEIGHT  Appliance Dimensions (H x W x D) (in.)  Required Cutout Size (H x W x D) (in.)	Yes Frost-Free  350 W 15 A 110-120 V 60 Hz 118 120V-3 Prong
Dedicated Evaporator & Compressor System  SuperFreeze®  Defrost Process  TECHNICAL DETAILS  Watts (W)  Current (A)  Volts (V)  Frequency (Hz)  Power Cord Length (in.)  Plug Type  DIMENSIONS & WEIGHT  Appliance Dimensions (H x W x D) (in.)  Required Cutout Size (H x W x D) (in.)  Net / Gross Weight (lbs)	Yes Frost-Free  350 W 15 A 110-120 V 60 Hz 118 120V-3 Prong  83 3/4*** × 35 3/4* × 24 84* × 36* × 25*
Dedicated Evaporator & Compressor System SuperFreeze® Defrost Process TECHNICAL DETAILS Watts (W)	Yes Frost-Free  350 W 15 A 110-120 V 60 Hz 118 120V-3 Prong  83 3/4*** × 35 3/4* × 24 84* × 36* × 25*

<sup>\*</sup>To verify if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328.

\*\*Height adjustable + / -1/2" (+ / -13 mm)

Page 1 of 3 3/20

### T361F900SP 36-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER




FREEDOM® COLLECTION, PANEL-READY

VARRANTY		
imited, Entire Appliance, Parts and Labo	or on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
imited Warranty for Sealed Refrigeration	System*; Parts and Labor	3rd to 6th Year
imited Warranty for Sealed Refrigeration	System*; Parts Only	7th to 12th Year
imited Warranty for Stainless Steel Rust-	Through	Lifetime
		4

<sup>\*</sup>Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

### **CUTOUT DIMENSIONS**




A: Area for installation of power connection.


B: Area for running the water line. It is recommended that the waterbox is placed adjacent to the installation cavity, so that it can be accessed for service without uninstalling the appliance. If this is not possible, place the recessed waterbox adjacent to the water supply socket elevated at the heights as referenced in areas A and B.

C: Recess depth depends on kitchen design. For a flush installation, the depth needs to be at least 24 inches plus the thickness of the door panel.


Stainless steel models contain a panel-ready base unit, ready-to-install stainless steel door(s) with a right or left door swing and handle(s).



### TOP VIEW CLEARANCE



- \*\* Door handle must be added to this dimension
- Depends on the thickness of the furniture door. 3/4" (19 mm) is relevant for the stainless steel door. (special Accessory).




# T361F900SP 36-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER



FREEDOM® COLLECTION, PANEL-READY

### PRODUCT AND PANEL DIMENSIONS

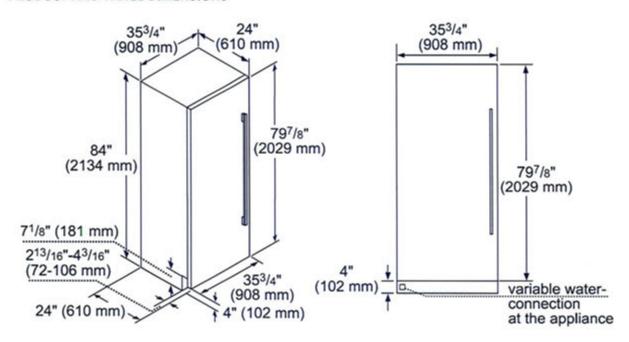

### ACCESSORIES (OPTIONAL)

### FLAT STAINLESS STEEL DOOR PANELS

30-Inch Flat Stainless Steel Door Panel Without Dispenser



TFL36IR900 For use with Handle TFL36IR905\* Handleless

\*Available Summer 2019

NOTE: Handleless Panels should not be installed on units without the Soft-Close capability. If you are uncertain if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328.

### HANDLES

Choose between two options:



MS36HNDL20 36-Inch Masterpiece® Series Handle

### FILTERS

Freedom® Water Filter Replacement water filter for use in all freezer and bottom freezer models

### SCRNFLTR10

REPLFLTR10

By-Pass Filter for use with existing in-home water filtration systems in all freezers and bottom freezer models

### STORAGE



ICEBUCKETL Large Ice Bucket



### **HEATRKIT20 - 13W @ 120V**

Freedom® Heater Kit

When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2020 BSH HOME APPLIANCES CORPORATION, ALL RIGHTS RESERVED.


### T361F900SP

### 36-INCH BUILT-IN FREEZER COLUMN WITH INTERNAL ICE MAKER

FREEDOM® COLLECTION, PANEL-READY



PRODUCT AND PANEL DIMENSIONS

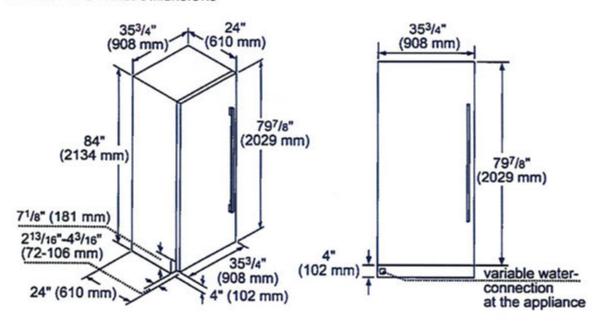

### ACCESSORIES (OPTIONAL)

### FLAT STAINLESS STEEL DOOR PANELS

30-Inch Flat Stainless Steel Door Panel Without Dispenser



TFL361R900 For use with Handle TFL36IR905\* Handleless

\*Available Summer 2019

NOTE: Handleless Panels should not be installed on units without the Soft-Close capability. If you are uncertain if you have a refrigeration unit with Soft-Close capability please contact our customer team by calling 1-800-735-4328.

### HANDLES

Choose between two options:



36-Inch Masterpiece® Series Handle

### FILTERS

### REPLFLTR10


Freedom® Water Filter Replacement water filter for use in all freezer and bottom freezer models

### SCRNFLTR10

By-Pass Filter for use with existing in-home water filtration systems in all freezers and bottom freezer models

### STORAGE

**ICEBUCKETL** Large Ice Bucket



### **HEATRKIT20 - 13W @ 120V**

Freedom® Heater Kit

When two appliances are installed side-by-side a sealing kit must be used. For combinations that involve a freezer column, this kit is included. For all other (non-traditional, i.e. two wine columns, two bottom freezers, etc.) side-by-side combinations or instances where any appliances are installed less than 6-inches (152 mm) apart from one another but not connected side-by-side, purchase this kit. This kit is recommended for use with any installation in areas that are subject to humidity, or located next to an outside wall.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | 02020 85H HOME APPLIANCES CORPORATION ALL RIGHTS RESERVED.

PROFESSIONAL® SERIES



VTR1030W - 1000 CFM VTR1330W - 1300 CFM VTI610W - 600 CFM

VTI1010W - 1000 CFM

VTN630W - 600 CFM VTN1090R - 1000 CFM

2 Year









### FEATURES & BENEFITS

- Revel in creative freedom with Professional® Series custom inserts that can blend in with cabinetry or make a bold statement
- ★- Equipped with the Thermador Connected Experience by Home Connect™
  - Powerfully Quiet® system accepts integral, inline, and remote blowers
  - Beautiful illumination with multi-level, vivid LED lights
  - Features automatic mode, delay shut-off, and check filter light

### ACCESSORIES (OPTIONAL)

25 ft. Blower Connector Cable - EXTNCB25W

For use with the following inline and remote blowers: VTR630W, VTR1030W, VTR1330W, VTI610W, VTI1010W

Roofplates

RFPLT600P - For use with 600 CFM remote blower VTR630W

RFPLT1000P - For use with 1000 CFM remote blower VTR1030W and 1300 CFM blower VTR1330W

**VCIN Trim Notes** 

NOTE: VCIN\_GWS series custom insert models include hood trim pieces to complete the installation.

Remote Control Panel

REMCPW - Ability to vertically install on cabinetry or wall to control hood in a convenient location



Multi-Level LED Lights with Fading Transitions Filter Reminder Light, Delay Shut-Off	, Automatic Mode, Check		
Operating Mode	Ducted		
Maximum CFM	Blower Sold Separatel		
Number of Speed Settings	4-Stage		
Number of Lights	4		
Bulb Type	LED		
Light Lumens	100 – 150		
Light Color (°K)	3500 – 4000		
Total Power of the Lamps (W)	4.8 W		
Damper Included	Yes		
Grease Filter Material	Washable Stainless Steel		
Grease Filter Type	Stainless-Steel Commercial Style Baffle Filter		
Home Connect™ (Wi-Fi Enabled)	Yes		
TECHNICAL DETAILS			
Watts (W)	See Chart on Page 3		
Current (A)	See Chart on Page 3		
Volts (V) 120 V			
Frequency (Hz)	60 Hz		
Plug Type	Fixed Connection		
Power Cord / Conduit Length (in)	Direct Wire at Junction Box		
DIMENSIONS & WEIGHT			
Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in)	12 <sup>13</sup> / <sub>16</sub> " × 45 <sup>3</sup> / <sub>4</sub> " × 22"		
Minimum Required Distance Above Gas / Electric Cooking Surface	30" Electric / 30" Gas		
Diameter of Air Duct (in.) Top	10"		
Net Weight (lbs)	65 lbs		
ACCESSORIES (REQUIRED)			
Blower (Sold Separately)			
BLOWER OPTIONS			
Remote Blowers	VTR630W - 600 CFM		

**GENERAL PROPERTIES** 

Features

Page 1 of 5 4 / 20

(Mounted to Roof or External Wall)

Integrated Blower (Mounted in Hood)

Limited Warranty Parts and Labor

WARRANTY


(Mounted Between Kitchen and External Wall)

PROFESSIONAL® SERIES



### HOOD DIMENSIONS

NOTE: VCIN Custom Insert models include hood trim pieces.

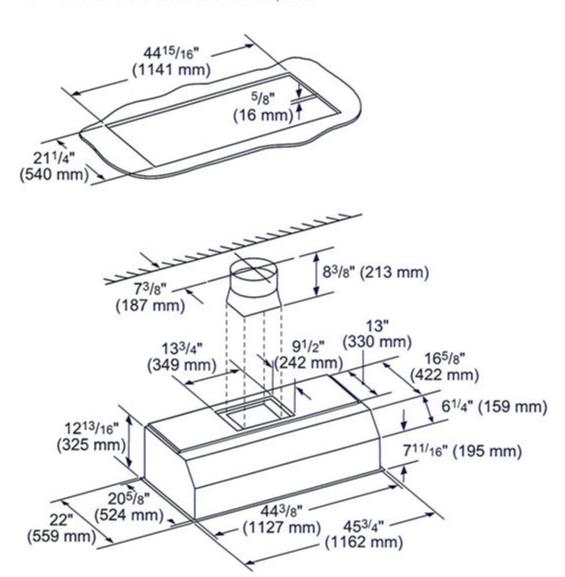

measurements in inches (mm)


PROFESSIONAL® SERIES




	DESCRIPTION		ELECTRIC LOAD						
MODEL			VTN630W	VTN1090R	VTI610W	VTI1010W	VTR630W	VTR1030W	VTR1330W
VCIN48GWS	48" Custom Insert	Amps	4.6	8.0	6.5	8.4	6.5	8.4	11.9
		Watts	552	960	780	1,008	780	1,008	1,428

### REMOTE BLOWERS (MOUNTED TO ROOF OR EXTERNAL WALL)


### VTR630W-600 CFM



### VTR1030W-1000 CFM



### VTR1330W-1300 CFM




measurements in inches and mm

PROFESSIONAL® SERIES




### INLINE BLOWERS (MOUNTED BETWEEN KITCHEN AND EXTERNAL WALL)

### VTI610W-600 CFM



measurements in inches and mm


### VTI1010W-1000 CFM



measurements in inches and mm


### INTEGRATED BLOWERS (MOUNTED IN HOOD)

### VTN630W-600 CFM



measurements in inches (mm)

### VTN1090R-1000 CFM



measurements in inches and mm











Shop Electric Dryers



### 7.4 cu. ft. Front Load Electric Dryer with Ste

YWED6620HW

4.8 (4) Write a review

MSRP: \$1,149.99

Colour: White





Where to buy

□ Compare



### **Product Overview**

### 7.4 cu. ft. Front Load Electric Dryer with Steam Cycles

Give your family's clothes the care they deserve with a front load electric dryer with the Wrinkle Shield™ Plus option with Steam. Advanced Moisture Sensing helps prevent overdrying by using three moisture sensors to end the cycle at just the right time. The ENERGY STAR® certified electric dryer even includes a Static Reduce option to help decrease static after drying.











< Shop Front Load Washers



### 5.2 cu. ft. I.E.C. Closet-Depth Front Load Wa

WFW6620HW

4.5 (4) Write a review

MSRP: \$1,449.99

Colour: White





Where to buy

♥ WishList

□ Compare


### **Product Overview**

### 5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ XL Dispenser

Skip adding detergent to every load with a Whirlpool® closet-depth front load washing machine. The Load & Go™ XL dispenser holds enough laundry soap for 40 loads and automatically adds the right amount. Intuitive Controls let you create customized washing machine cycles, and the ENERGY STAR® certified front load washer will even help you save on your utility bills.

Close

By closing this message, you consent to our cookies on this device in accordance with our Privacy Notice unless you have disabled them.

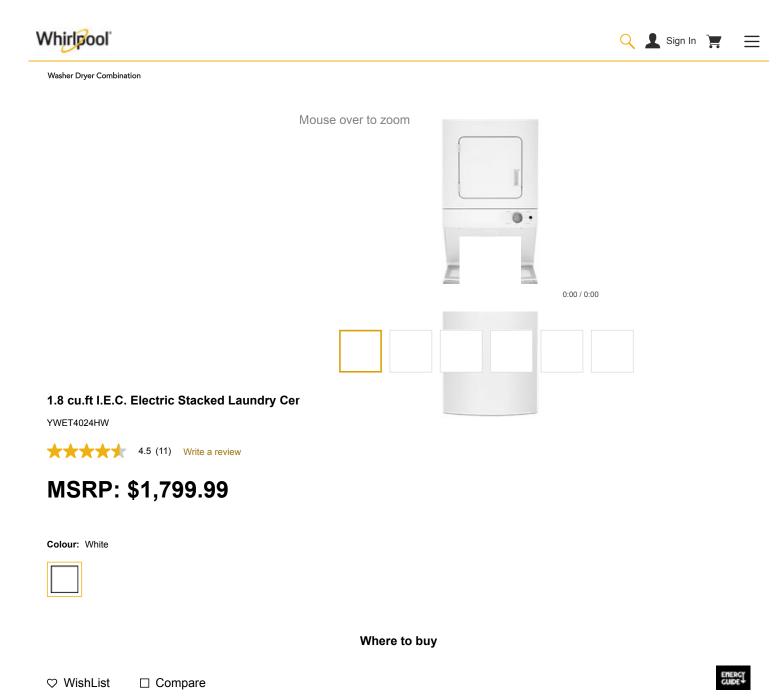

### **Product Overview**

### 1.8 cu.ft I.E.C. Electric Stacked Laundry Center 6 Wash cycles and AutoDry™

Wash and dry all the essentials with a stackable washer and dryer combination that accommodates small spaces. The see-through washer lid lets you easily check on your load while it's washing and the dryer automatically senses when clothes are dry to prevent overdrying.

**Features** 

CLOSE

### **KitchenAid**°







Fully Integrated Console Dishwashers



### 44 dBA Dishwasher in PrintS

KDPM604KPS



MSRP: \$1,699.99

**Colour:** Stainless Steel with PrintShield™ Finish





WHERE TO BUY







### **Specifications**

### Refinements

FEATURES Third Level Rack

### **Dimensions**

**DEPTH** 62.23 cm, 24-1/2 in

**DEPTH CLOSED EXCLUDING HANDLES** 62.23 cm, 24-1/2 in

**DEPTH CLOSED INCLUDING HANDLES** 62.23 cm, 24-1/2 in

**DEPTH WITH DOOR OPEN 90 DEGREE** 129.54 cm, 51.0 in

**HEIGHT** 80.01 cm, 31-1/2 in

NUMBER OF PLACE SETTINGS 16

**WIDTH** 60.64 cm, 23-7/8 in

### **Configuration and Overview**

DECIBEL LEVEL DBA 44

DISHWASHER TYPE Built-In

### **Controls**

AUTOMATIC TEMPERATURE CONTROLS

Yes

CONTROL LOCATION Top, Hidden

**SENSOR** Yes

### **Appearance**

DOOR STYLE Flat

HANDLE MATERIAL Plastic

### **Details**

DISPENSER	Detergent and Rinse Aid
INTERIOR LIGHT	No
NUMBER OF RACKS	3
NUMBER OF WASH LEVELS	7.0
NUMBER OF WASHARMS	5
RACK MATERIAL	Nylon
RINSE AID DISPENSER LEVEL INDICATOR	Yes
TRUE HOLD DOOR	Yes
TUB MATERIAL	Stainless Steel
TUB STYLE	Built-in Tall Tub 24""
WATER FILTRATION	Yes
Features	
SOUND PACKAGE	Yes
Cycles and Options	
NUMBER OF WASH CYCLES	5
Options	
DISHWASHER OPTION SELECTIONS	Hi Temp Wash, Sani Rinse®, ProDry™, Extended ProDry, Top 2 Racks, 1-24 Hour Delay
Lower Rack	
CUSHION-TIP TINES	Yes
FOLD-DOWN TINES	1 Adjustable & 1 Fold Down
STYLE	Extended
UTILITY BASKET	No
Silverware Basket	

COVERS

Yes

CLOSE


### **KitchenAid**°







Wall Mount Hoods and Vents

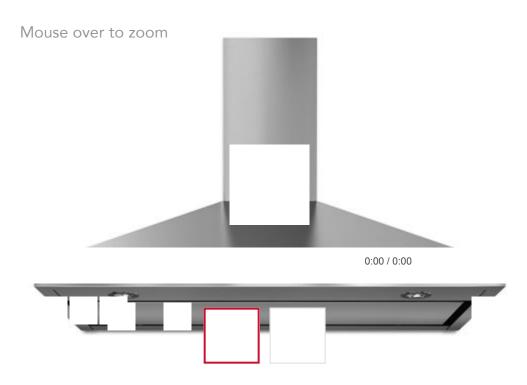

### 36" Wall-Mount, 3-Speed Canopy Hood

KVWB406DSS



4.0 (80) Write a review

Colour: Stainless Steel



♥ WishList

□ Compare

CLOSE

### **KitchenAid**°







Single Wall Ovens



30" Single Wall Oven with E

KOSE500ESS



4.5 (879) Write

MSRP: \$3,499.99

Colour: Stainless Steel









WHERE TO BUY





CLOSE

### **KitchenAid**°







**Built-In Bottom Freezer** 



20.9 Cu. Ft. 36" Width Built-I Design

KBBL306ESS



MSRP: \$10,499.99

Colour: Stainless Steel



WHERE TO BUY





# 24" Marvel Single Zone Wine Refrigerator

Model # ML24WSG0

### **Performance**

- Thermal-efficient cabinet ensures optimum wine preservation and energy efficiency while maximizing capacity
- Argon-filled, UV-resistant tinted dual pane glass door protects contents from damaging ultraviolet light, while conserving energy`
- Vibration Neutralization System<sup>™</sup> protects wine from agitation, allowing it to come to full maturation
- Now even quieter operation thanks to exclusive design enhancements to buffer and minimize sound

### **Storage Capabilities**

- 6.4 cu. ft. capacity, stores 45 bottles of wine including

   (1) 7-bottle display wine rack, (4) 8-bottle roll-out wine racks, and (1) 6-bottle wine cradle
- Heavy-gauge wire wine racks safely cradle each wine bottle
- Wire wine racks easily pull out to access your collection

### **Temperature Controls**

### **Aesthetics**

- White incandescent display lighting and midnight black interior
- Sleek stainless-steel-framed glass door and designer handle
- Natural maple shelf fronts are stainable to match cabinetry
- Finish: stainless steel

### Additional Convenience

- Close Door Assist System<sup>™</sup> gently and automatically draws door to a close, ensuring door is never accidentally left ajar
- Black toe kick adjustable to 4" with leveling legs
- 1-year parts and labor warranty, 5-year sealed system parts warranty

### Finish Options



Stainless Steel



### **Ordering Options**


Stainless Frame Glass Door, Right Hinge Stainless Designer Handle	ML24WSG0RS
Stainless Frame Glass Door, Left Hinge Stainless Designer Handle	ML24WSG0LS
HumiDrawer™	42242728

Note: Door style varies from other Marvel models. For side-by-side installations, please confirm door dimensions.



 $\operatorname{HumiDrawer}^{\operatorname{TM}}\operatorname{Fine}\operatorname{Cigar}\operatorname{Storage}$ 



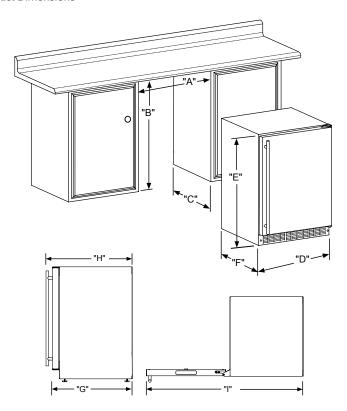

### Rough-In Dimensions

A. Rough-In Width	24"
B. Rough-In Height	34" to 35"
C. Rough-In Depth	24"

### **Product Dimensions**

D. Width	23 7/8"			
E. Height	33 3/4" to 34 3/4"			
F. Depth	22"			
G. Depth to Front of Door	Solid Door	24 1/16′		
	Overlay Door	NA		
H. Depth to Handle	26' (Stainless Steel)			
I. Depth with door at 90°	Solid Door	47"		
	Overlay Door	NA		

### **Product Features**

Todaot i catalos				
Interior Cabinet Finish	Black			
Capacity	Up to 45 wine bottles			
Shelving System	Roller-Glide System			
Shelf Fronts	Natural Maple			
Other Storage	NA			
Interior Lighting	White Incandescent			
Toe Grill Finish	Black			
Hinge	Classic Hinge			
Handle	Slim Designer Handle			
Control Type	Prime™			
Temperature Range	40° to 65° F			
Lock	No			
Electrical Requirements	120V / 60Hz / 15A			
Length of Power Cord	6′			
Shipping Weight	145 lbs			
Finishes	Stainless Steel			
Vacation Mode	No			
Agency Approvals	CSA			