

PRE-Sales Selection Sheet
Checklist

0138

LOT 189B-9 Model: 20-2095 END B The Forbes
PURCHASERS: GEETA SHARIF/WAIS SHARIF
VENDOR: Heathwood Homes (Huron) Limited

- ☒ FINISHED BASEMENT
☐ COLD CELLAR

UPGRADED / MODIFIED ELEVATION

- ☐ CORNER UPGRADE
☐ REAR UPGRADE

CEILING UPGRADE - SMOOTH

- ☐ MAIN FLOOR
☐ SECOND FLOOR
☐ BASEMENT

ADDITIONAL ROUGH-INS

- ☐ 200 AMP SERVICE
☐ WET BAR ROUGH-IN
☐ HUMIDIFIER
☒ AIR CONDITIONING

GAS ROUGH-IN

- ☒ STOVE
☐ DRYER
☐ BBQ
☐ ADDITIONAL FIREPLACE

KITCHEN: HOODFAN VENTING SIZE

- ☒ 6 IN ROUND DUCT
☐ 7 IN ROUND DUCT

FULL BASEMENT STAIRS:

UPPER BASEMENT STAIRS:

LOWER BASEMENT STAIRS:

MAIN STAIRS:

MEDIA STAIRS (if applicable):

LOFT STAIRS (if applicable):

Carpet Grade
N/A
N/A
All Oak
N/A
N/A

Oct 24/19 Signatures

Date Purchaser:

on file

Oct 24/19 IRIT SALEM

Date Decor Consultant:

Date Purchaser:

MR Green

Date Heathwood Homes (Huron) Limited

Locked Date:

Approved



Sales Selection Sheet

Wallaceton

2 of 38

PURCHASERS: GEETA SHARIF and WAIS SHARIF

TEL:

LOT / UNIT 189B-9	PHASE 1	MODEL 20-2095 END B The Forbes
----------------------	------------	-----------------------------------

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

APPLIANCES

1	FIVE APPLIANCES: SS FRIDGE, STOVE, DISHWASHER, WHITE FRONT LOAD WASHER/DRYER - TOWNHOMES	Qty: 1
16,811	Note: SEE UPGRADED APPLIANCE SPEC PAGES	

Sub Total
HST
Total

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment Summary	
Paid By	Amount
Total Payment:	

PURCHASER: Signatures on IRIT SALEM 24-Oct-19 24-Oct-19
GEETA SHARIF DATE Decor Consultant DATE

PURCHASER: file WAIS SHARIF 24-Oct-19 24-Oct-19
WAIS SHARIF DATE

Date Approved Heathwood Homes (Huron) Limited

TAX#:1

PREPARED BY: Irit Salem

PE 51-1

Simvoice.rpt 28may19

Customer Colours

GEETA SHARIF/WAIS SHARIF
Project: Wallaceton
Unit: 189B-9, Phase: 1
Model: 20-2095 END B The Forbes

Created: 8/26/2019 09:55:21
Locked:
Closed:

3 of 38

Kitchen

Cabinet Colour/Style	9112	VIKING IV CAPE COD ORCHID 3DL ***1**
Countertop	7820	Group 1-Granite-NEW CALEDONIA-3/4 inch ***STD***
Countertop Edge	4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD*** 
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Island Cabinet Colour/Style	9112	VIKING IV CAPE COD ORCHID 3DL ***1**
Island Countertop	7820	Group 1-Granite-NEW CALEDONIA-3/4 inch ***1***
Backsplash	1111	N/A *****
Backsplash Grout	1111	N/A *****
Backsplash Tile Pattern	1111	N/A *****

HoodFan

8894	SCB51430-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-STAINLESS STEEL *****
------	---

P2425

Appliance

8894	Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.
------	--

Appliance

8894	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
------	---

Comment

Kitchen/Breakfast

Flooring


9071	New Byzantine Azzuro 13X13 ***STD***
------	--------------------------------------

Floor Tile Grout

2225	Grout-(27) Silver ***STD***
------	-----------------------------

Floor Tile Pattern

3000	STANDARD SQUARE ***STD***
------	---------------------------



Comment

Customer Colours

GEETA SHARIF/WAIS SHARIF
Project: Wallaceton
Unit: 189B-9, Phase: 1
Model: 20-2095 END B The Forbes

Created: 8/26/2019 09:55:21

Locked:

Closed:

438

Foyer

Flooring

3000

GE.BY.AZR.1313 New Byzantine Azzuro 13

Floor Tile Grout


2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***



Comment

Laundry Room

Flooring

3000

GE.SU.ATR.1313 Sauble Anthracite (Black) 13

Floor Tile Grout

7704

Grout-(19) Pearl Gray ***STD***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***



Comment

Laundry Room Opt.

Cabinet - Uppers

1111

N/A *****

Cabinet Hardware

1111

N/A *****

Comment

Mud Room

Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***



Flooring

3000

GE.BY.AZR.1313 New Byzantine Azzuro 13

Customer Colours

GEETA SHARIF/MAIS SHARIF
Project: Wallaceton
Unit: 189B-9, Phase: 1
Model: 20-2095 END B The Forbes

Created: 8/26/2019 09:55:21

Locked:

Closed:

5 of 38

Comment

Powder Room

Flooring

1111

GE.BY,AZR.1313 New Byzantine Azzuro 13

Floor Tile Grout


2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***



Plumbing Fixture (Colour)

1737

Plumbing Fixtures-WHITE ***STD***

Comment

Hall

Flooring

1111

N/A *****

CERAMIC

1111

GE.BY,AZR.1313 NEW BYZANTINE AZZURO 13X13

CERAMIC GROUT

1111

GROUT SILVER

Comment

Great Room

Flooring

7498

Red Oak Pearl-Vintage Engineered-IRONGATE-3/4 inch x 3 1/4 inch ***STD***

Comment

Upper Hall

Flooring

7625

T-15-Dynasty Tex-T-15-40 oz Poly ***STD***

Comment

W/S
LWS

Customer Colours

GEETA SHARIF/WAIS SHARIF
Project: Wallaceon
Unit: 189B-9, Phase: 1
Model: 20-2095 END B The Forbes

Created: 8/26/2019 09:55:21

Locked:

Closed:

6 of 38

Finished Basement (new) Room/Room	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
-----------------------------------	------	--

Flooring

Comment

Master Bedroom

Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
----------	------	--

Comment

Bedroom 2

Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
----------	------	--

Comment

Bedroom 3

Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
----------	------	--

Comment

Bedroom 4

Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
----------	------	--

Comment

Ensuite 2

Cabinet Colour/Style	1111	N/A *****
----------------------	------	-----------

Countertop

1111	N/A *****
------	-----------

Countertop Edge

1111	N/A *****
------	-----------

Cabinet Hardware

1111	N/A *****
------	-----------

Floor Tile

1111	N/A *****
------	-----------

W/S
C/S

Customer Colours

GEETA SHARIF/WAIS SHARIF
Project: Wallaceston
Unit: 189B-9, Phase: 1
Model: 20-2095 END B The Forbes

Created: 8/26/2019 09:55:21
Locked:
Closed:

76F38



Floor Tile Grout 1111 N/A *****

Floor Tile Pattern 1111 N/A *****

Plumbing Fixture (colour) 1111 N/A *****

Tub Wall Tile 1111 N/A *****

Tub Wall Tile Grout 1111 N/A *****

Tub Wall Tile Pattern 1111 N/A *****

Comment

Master Ensuite

Cabinet Colour/Style 6304 Viking III-SLAB LPL-MERINGUE-LPL ***STD***

Countertop 8819 1876K-52-Countertop-SPRING CARNIVAL-Wilsonart ***STD***

Countertop Edge 1111 N/A *****

Cabinet Hardware 2086 9677-HARDWARE ***STD***

Floor Tile 2086 GE.SU.ATR.1313 Sauble Anthracite (Black) 13

Floor Tile Grout 7704 Grout-(19) Pearl Gray ***STD***

Floor Tile Pattern 3000 STANDARD SQUARE ***STD***



Shower Floor Tile 8661 OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***

Shower Floor Tile Grout 2226 Grout-(00) White ***STD***

Shower Floor Tile Pattern 1111 N/A *****

Customer Colours

GEETA SHARIF/WAIS SHARIF
Project: Wallaceton
Unit: 189B-9, Phase: 1
Model: 20-2095 END B The Forbes

Created: 8/26/2019 09:55:21

Locked:

Closed:

5 of 38

Shower Wall Tile

9020QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***

Shower Wall Tile Grout

2226Grout-(00) White ***STD***

Shower Wall Tile Pattern

3090VERTICAL STACKED ***STD***

Shower Jamb(s) and Sill(s)

8923Shower Jamb / Sill-Thassos White ***STD***

Plumbing Fixture (colour)

1737Plumbing Fixtures-WHITE ***STD***

Comment

Main Bathroom

Cabinet Colour/Style

6304Viking III-SLAB LPL-MERINGUE-LPL ***STD***

Countertop

88191876K-52-Countertop-SPRING CARNIVAL-Wilsonart ***STD***

Countertop Edge

1111N/A *****

Cabinet Hardware

20869677-HARDWARE ***STD***

Flooring

2086GE.SU.ATR.1313 Sauble Anthracite (Black) 13

Floor Tile Grout

7704Grout-(19) Pearl Gray ***STD***

Floor Tile Pattern

3000STANDARD SQUARE ***STD***

Wall Tile

9020QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***

Wall Tile Grout

2226Grout-(00) White ***STD***

Main Bathroom Tile Pattern

3090VERTICAL STACKED ***STD***

Plumbing Fixture (Colour)

1737Plumbing Fixtures-WHITE ***STD***

Customer Colours

GEETA SHARIF/WAIS SHARIF
Project: Wallaceton
Unit: 189B-9, Phase: 1
Model: 20-2095 END B The Forbes

Created: 8/26/2019 09:55:21

Locked:

Closed:

9430

Comment

Finished Basement Shower

Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	1111	N/A *****

Shower Wall Tile

9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
------	---

Shower Wall Tile Grout

2226	Grout-(00) White ****STD***
------	-----------------------------

Shower Wall Tile Pattern

3090	VERTICAL STACKED ***STD***
------	----------------------------

Shower Jamb(s)

8923	Shower Jamb / Sill-Thassos White ***STD***
------	--

Comment

Finished Basement Bathroom

Cabinet Colour/ Style	6304	Viking III-SLAB LPL-MERINGUE-LPL ***STD***
-----------------------	------	--

Countertop

8819	1876K-52-Countertop-SPRING CARNIVAL-Wilsonart ***STD***
------	---

Countertop Edge

1111	N/A *****
------	-----------

Cabinet Hardware

2086	9677-HARDWARE ***STD***
------	-------------------------

Flooring

2086	GE.SU.ATR.1313 Sauble Anthracite (Black) 13
------	---

Floor Tile Grout

7704	Grout-(19) Pearl Gray ***STD***
------	---------------------------------

Floor Tile Pattern

3000	STANDARD SQUARE ***STD***
------	---------------------------

Customer Colours

GEETA SHARIF/WAIS SHARIF
Project: Wallaceton
Unit: 189B-9, Phase: 1
Model: 20-2095 END B The Forbes

Created: 8/26/2019 09:55:21

Locked:

Closed:

1 OF 30

Plumbing Fixture (Colour)

1737

Plumbing Fixtures-WHITE ***STD***

Comment

Great Room Fireplace

Type

8865

Dimplex-Electric Fireplace-PF3033HL ***STD***

Mantle

9114

NF 15-Paint Grade Mantle- Cabinet (Per Plan)-WHITE
STD

P19

Comment

Basement Stairs

Type

9114

Carpet Grade Stairs ***STD BASEMENT STAIR ***

Colour

7912

Irongate (Gryphon) STAIN TO COMPLIMENT
HARDWOOD AND WILL VARY FROM FLOORING

Carpet Runner

1111

N/A *****

Handrail/Pickets/Post Type

1111

1 5/16 inch Square pickets with 3 1/2" Square/Cap
Post(s)-ALL OAK Towns Only ***STD***

Handrail/Pickets/Post Colours

1729

Carpet Grade-Stain handrail, pickets, stringers, nosing_pos

Carpet

7625

T-15-Dynasty Tex-T-15-40 oz Poly ***STD***

Custom Stain/Paint

Comment

Basement Stairs Landings (Upper and Lower)

Flooring

7625

T-15-Dynasty Tex-T-15-40 oz Poly ***STD***

Comment

Main Stairs

Type

1712

Oak Stairs ***STD MAIN STAIRS***

Colour

7912

Irongate (Gryphon) STAIN TO COMPLIMENT
HARDWOOD AND WILL VARY FROM FLOORING

Carpet Runner

1111

N/A *****

Handrail/Pickets/Posts Type

1111

1 5/16 inch Square pickets with 3 1/2" Square/Cap

Post(s)-ALL OAK Towns Only ***STD***

Customer Colours

33

GEETA SHARIF/WAIS SHARIF
Project: Wallaceton
Unit: 189B-9, Phase: 1
Model: 20-2095 END B The Forbes

Created: 8/26/2019 09:55:21

Locked:

Closed:

Post(s)-FALL OAK TOWELS Only STD

Handrail/Pickets/Posts Colour

1728

Oak Grade-Stain handrail,oak pickets,stringers,treads,risers

Custom Stain/Paint

1111

N/A *****

Comment

Main Stairs Landing(s) (Lower)

Flooring

1111

N/A *****

Flooring

RED OAK PEARL VINTAGE ENGINEERED - IRONGATE-3/4

Comment

Throughout

Walls - Paint Colour

1717

22-Wall-WARM GREY ***STD***

Underpad

1079

500 Series-Underpad ***STD***

Thresholds

2232

Metal Thresholds ***STD***

Switches and Plug

5796

Decora White Switches and Plugs ***STD***

Trim Size

8705

4 1/4 Baseboard and 2 3/4 Casings ***STD***

Trim - Paint Colour

1716

Trim-WHITE ***STD***

Comment

Purchaser:



GEETA SHARIF

Aug 26.19

Date



Decor Consultant

Aug 26.19

Date

Purchaser:



WAIS SHARIF

Aug 26.19

Date



Wallaceton

Date Approved



Sales Selection Sheet

Wallaceton

PURCHASERS: GEETA SHARIF and WAIS SHARIF

LOT / UNIT
189B-9

PHASE
1

MODEL
20-2095 END B The Forbes

TEL:

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

APPLIANCES

1	CYCLONE SC (B) 500 ALITO 50030	Qty: 1
10,265	Note: SPECS PAGES 24-25	
2	UPGRADED APPLIANCES FROM SCHEDULE 'E' PACKAGE	Qty: 1
10,806	Note: SEE SPEC PAGES 26-32	

Cabinetry

3	CABINETRY - 30H-WALL CABINET WITH SHELF FOR MICROWAVE (FINISHED INTERIOR) (OPENING 24"W X 13 3/4"H X	Qty: 1
112,669		
10,286	Note: KITCHEN SEE SKETCH 2 AND 3 PAGE# 15 AND 16 SPEC PAGE 30	
4	CABINETRY - VIKING IV - KITCHEN - UPGRADE 1	Qty: 1
106,732		
10,295	Note:	

Electrical

5	ELECTRICAL - CEILING ROUGH-IN (CAPPED)	Qty: 1
112,906		
10,272	Note: GREAT ROOM - TO BE INSTALLED IN THE CENTRE OF GREAT ROOM, USE STD. SWITCH PLUG SEE SKETCH# 2 PAGE# 15	
6	ELECTRICAL - EXTRA WALL INTERIOR OUTLET (120V/15A) ON A SEPARATE CIRCUIT (ON ARCFault)	Qty: 1
112,899		
10,273	Note: KITCHEN - TO BE USED FOR THE MICROWAVE SEE SKETCH # 2 AND 3 PAGE# 15 AND 16	

Heating/Air

7	STANDARD 220/240V TO REMAIN	Qty: 1
112,927		
10,277	Note: KITCHEN GAS LINE FOR GAS STOVE PAGE# / 28 AND 29 SEE SPEC#	

Security

8	SECURITY - SECURITY CAMERA ROUGH-IN	Qty: 3
113,223		
10,263	Note: INSTALL SECURITY CAMERA ROUGH-IN: 1-IN FRONT OF THE GARAGE-TO BE 2-IN THE BACK OF THE HOUSE-TO BE INSTALLED BETWEEN MAIN AND SECOND, FLOOR ON THE EXTERIOR WALL 3-IN INSIDE THE GARAGE SEE SKETCH # 2 AND 5 PAGE# 15 AND 18	

Structured Wiring

TAX#:1

PREPARED BY: Irit Salem

PE 50-1

Slrvoice.rpt.28may19

Initials:

MS



Sales Selection Sheet

Wallaceton

PURCHASERS: GEETA SHARIF and WAIS SHARIF

LOT / UNIT	PHASE	MODEL
189B-9	1	20-2095 END B The Forbes

Structured Wiring

9	Note: CONDUITE PIPE TO BE INSTALLEED FROM ATTICK TO BASEMENT	Qty: 1
113,234		
10,279		

Sub Total
HST
Total

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment Summary	
<u>Paid By</u>	<u>Amount</u>
<u>Total Payment:</u>	

PURCHASER: Geeta Sharif 22-Nov-19 RIT SALEM 22-Nov-19
DATE DATE
Decor Consultant
PURCHASER: Wais Sharif 22-Nov-19 W. Rosen
DATE DATE

Date Approved Heathwood Homes (Huron) Limited

TAX#:1

PREPARED BY: Irit Salem

PE 50-2

Invoice.rpt 28may19

UK 75 WALLACETON
20-2095 END, B
THE FORBES
LOT 189B-9

14 or 38


Sketch #1

THE FORBES

20-2095 END ELEV. B

ELEVATION B | 2,720 SQ. FT.

Includes 638 square feet of finished lower level

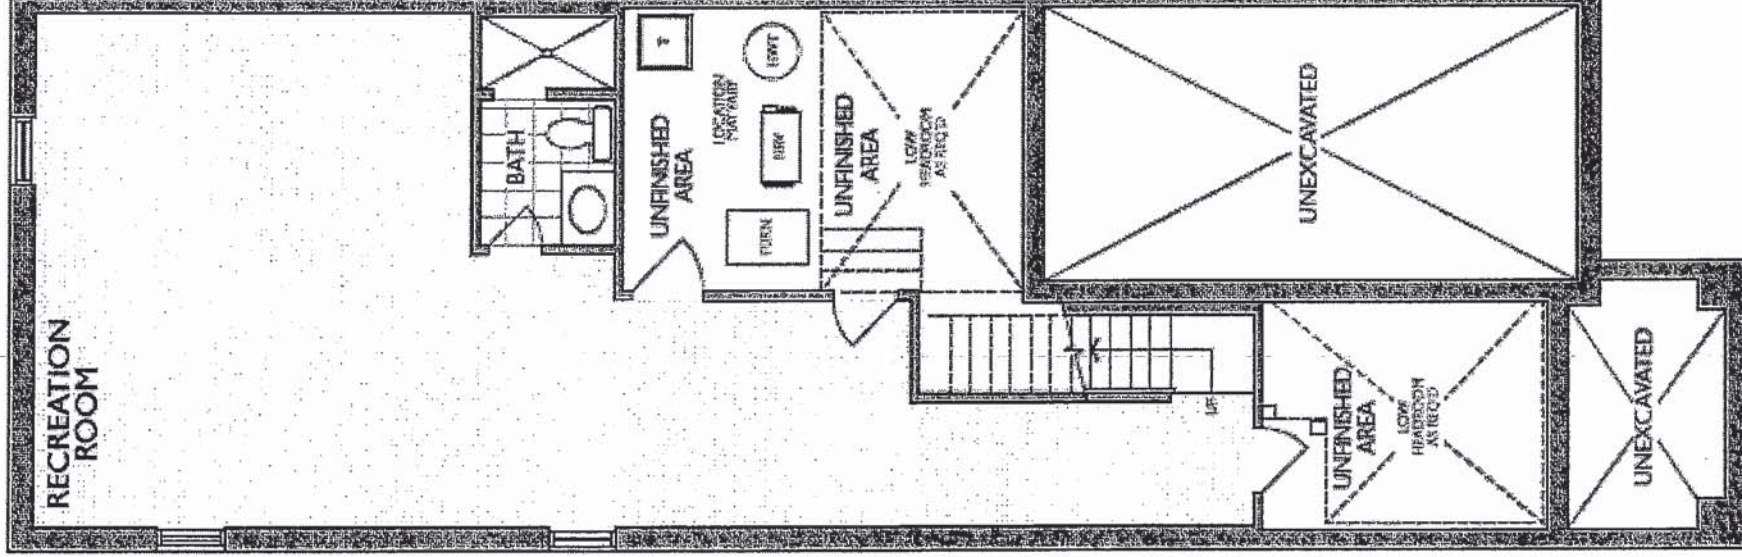

LOWER LEVEL
ELEVATION B

WS 65

UK 75 WALLACETON
20-2095 END B
THE FORBES
LOT 189B-9


15 of 38

Sketch # 2

THE FORBES

20-2095 END ELEV. B


ELEVATION B | 2,720 SQ. FT.
Includes 638 square feet of finished lower level

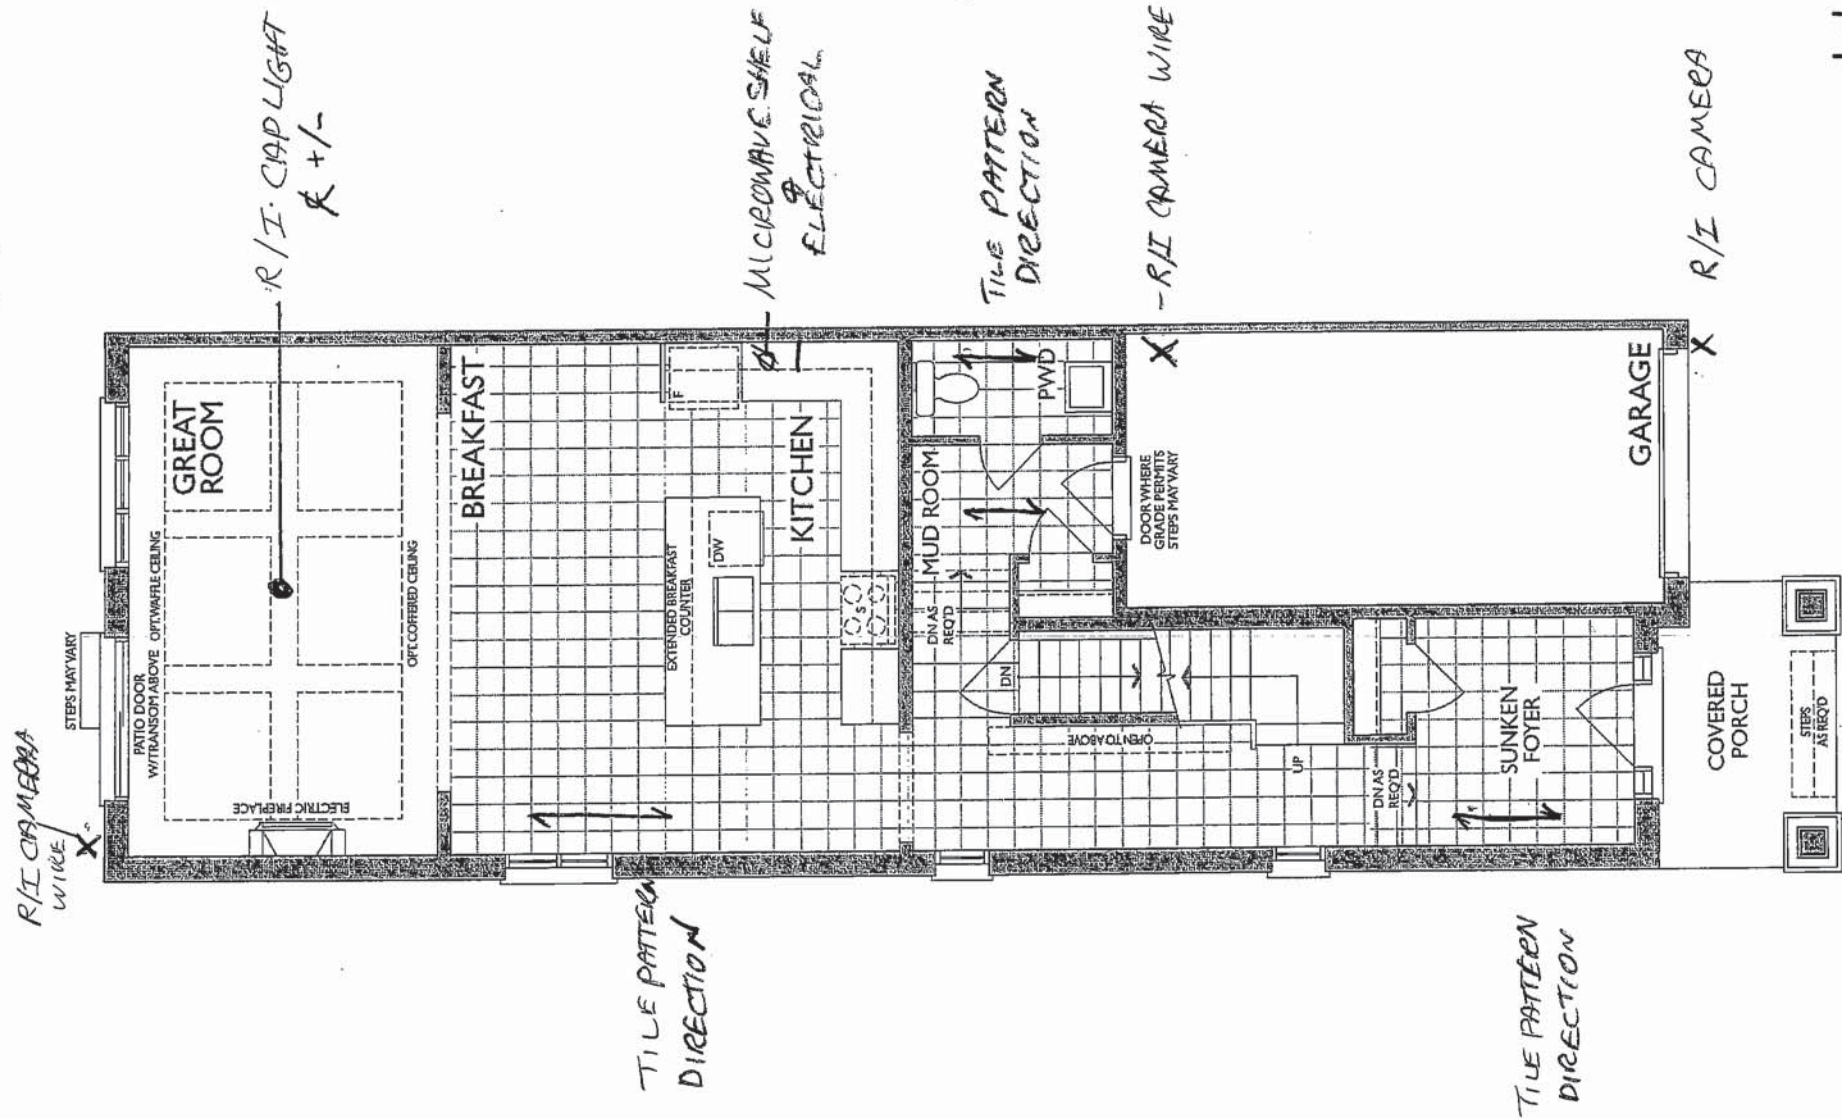





MAIN FLOOR
ELEVATION B

W.S
Gr-S

KITCHEN
(GROUND FLOOR)

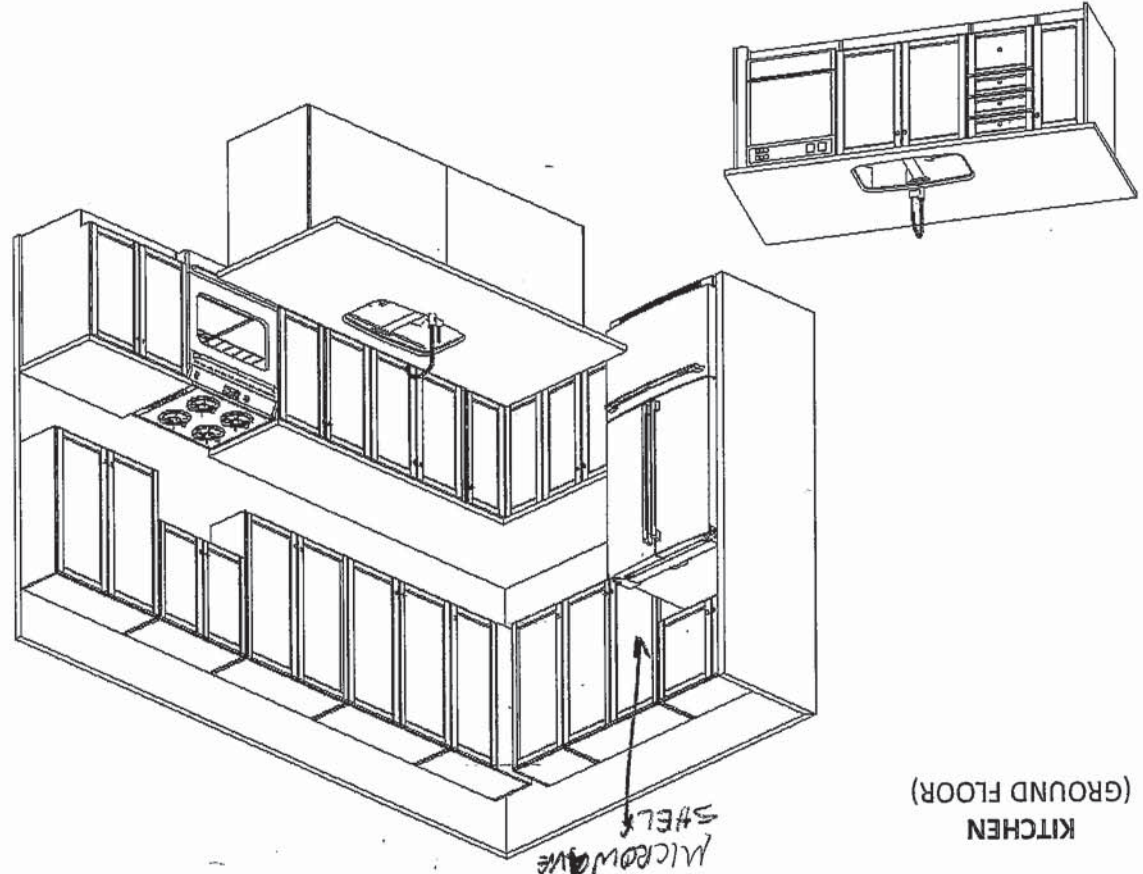

(2005 END) STANDARD 2ND FLOOR

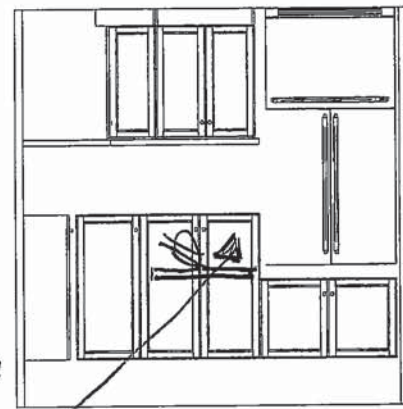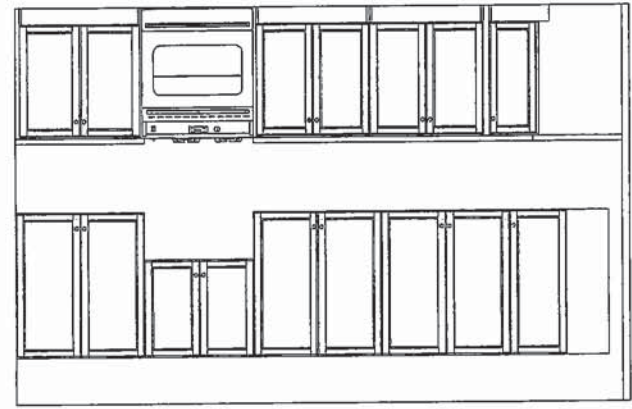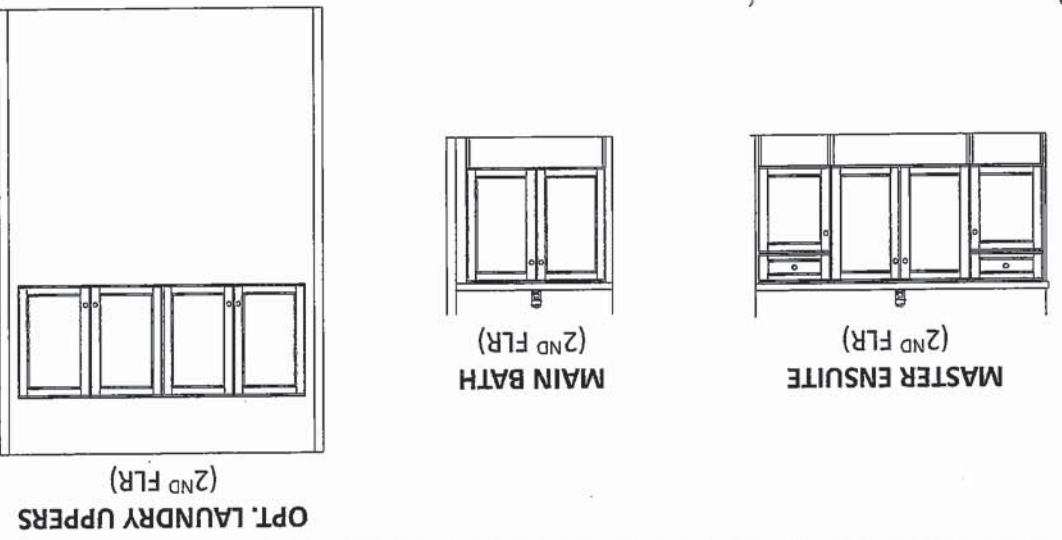

MICROWAVE
SHELF
ELECTRIC

HEATHWOOD HOMES
WALLACETON, KITCHENER ON
MODEL: 20-2095 (STD 2005 END)

STANDARD CONTRACT INCLUDES:

- Appliance Openings**
- Hood Opening: 30" W Std. hood
 - Fridge Opening: 37 3/8" W X 73 3/8" H
 - 30cm deep cabinet over fridge
 - Stove Opening: 30" Freestanding
 - Dishwasher Opening: 24"

- Standard Kitchens Scope:**
- 100cm H wall cabinets
 - Std. Blumotion Hinges - soft close doors
 - Std. Metabox Drawers - not soft close
 - Min 40cm W drawer
 - Base pie cut corner cabinets
 - Backing on all cabinets
 - Countertop by others
 - Upgrade applied paneled fridge
 - Dishwashers supply only (appliance hardware by others)

Standard Vanity & Laundry Scope:

- Powder by others, pedestal
- All vanities include laminate counter
- Std. Blumotion Hinges - not soft close
- Std. Metabox Drawers - not soft close
- Master Ensuite: Top drawers (Full height doors at sink)
- Mains: Full height doors (top drawers added if Masters can't accommodate)
- Optional laundry base & wall cabinets

UK 15 WALLACETON
20-2095 END A B
THE FORBES
LOT 189B-9

Sketch # 3

16 or 30mm

THIS DRAWING IS FOR DESIGN PURPOSES ONLY.
IT IS NOT AN EXACT REPRESENTATION.

UK 75 WALLACETON
20-2095 END B
THE FORBES
LOT 189B-9

17th 38


Sketch # 4

THE FORBES

20-2095 END ELEV. B

ELEVATION B | 2,720 SQ. FT.

Includes 638 square feet of finished lower level

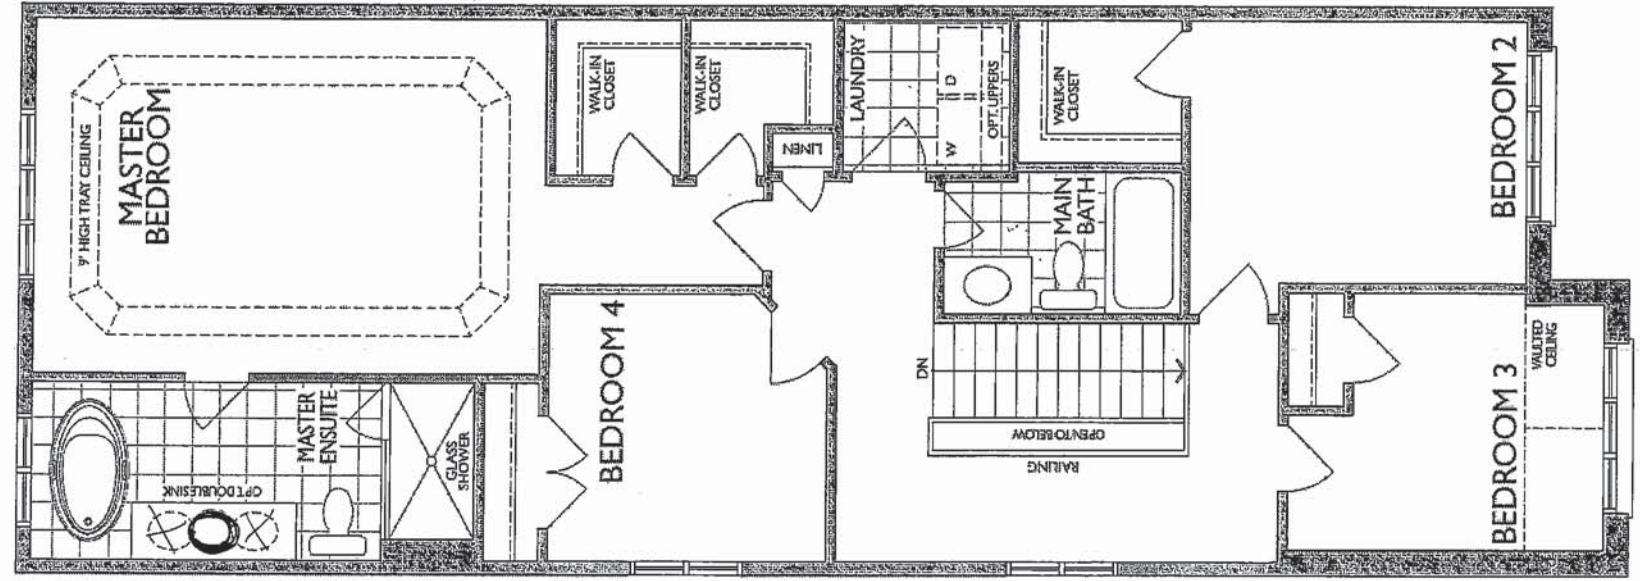

SECOND FLOOR
ELEVATION B

WS
6-5

UK 75 WALLACETON
20-2095 END 'B
THE FORBES
LOT 189B-9

18 of 38

Sketch # 5



HATHWOOD
COME AT LAST.


THE FORBES

ELEVATION B | 2,720 SQ. FT.

Includes 638 sq. ft. of finished lower level

UK 75 WALLACETON
20-2095 END B
THE FORBES
LOT 189B-9

19 of 38

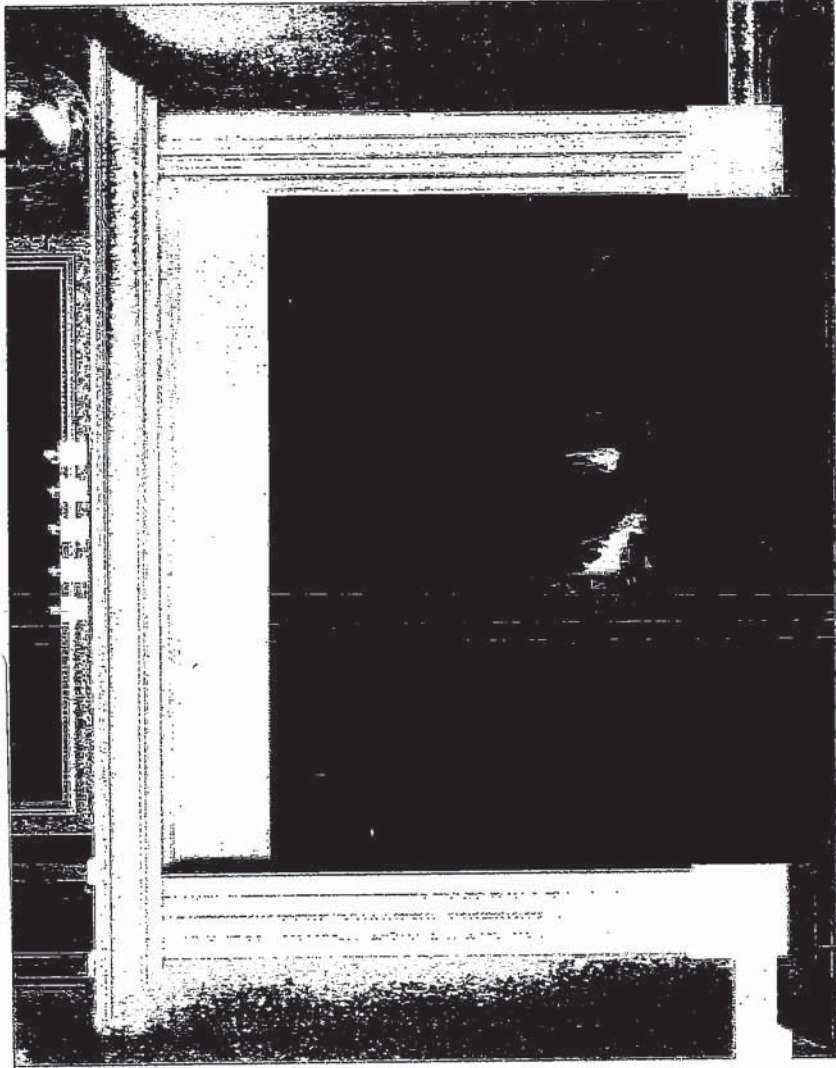

CABINET

STANDARD NF 15 Mantel

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)



STANDARD NF 17 Mantel

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

X




WS

6-5

UK 75 WALLACETON
20-2095 END B
THE FORBES
LOT 189B-9

20 of 38

KITCHEN

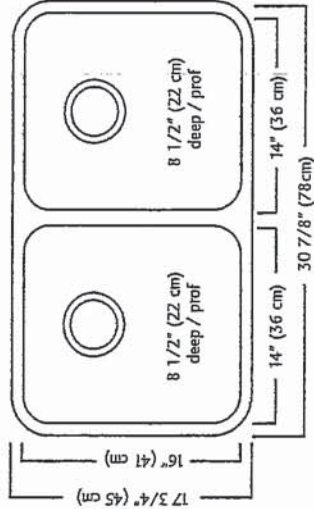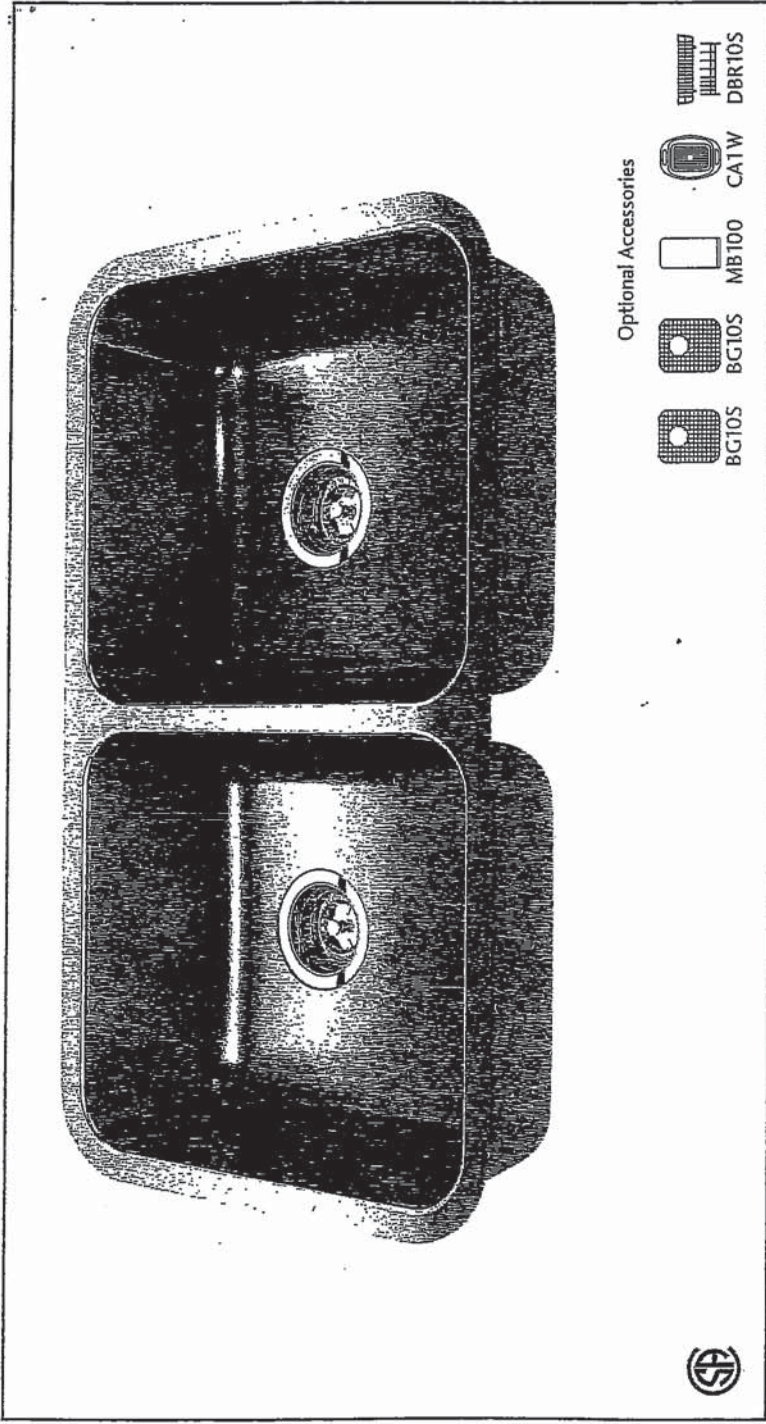

ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited
P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

6-5
WS


UK 75 WALLACETON
20-2095 END B
THE FORBES
LOT 189B-9

21 of 38

STANDARD KITCHEN FAUCET

Align

Modern

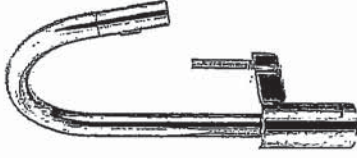

Single Handle Pull-Down Kitchen
Faucet[±]

Model 7565†

WS
UN-S

UK 75 WALLACETON
20-2095 END ALT B
THE FORBES
LOT 189B-9

22 of 38

BATHROOMS


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP†
(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

4.5
MS

23 of 38



Buy it for looks. Buy it for life.®

*There is more than 1 version of this model.
Page down to identify the version you have.*

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections
- Includes metal or 50/50 pop-up type waste assembly where noted

OPERATION

- Pivot action lever style handle
- Temperature controlled through 100° degree arc of handle travel

FLOW

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
 - 1.2 gpm max (4.5L/min) at 60 psi
 - 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge
- Nonmetallic/nonferrous and stainless steel material


STANDARDS

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- **ADA**  for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

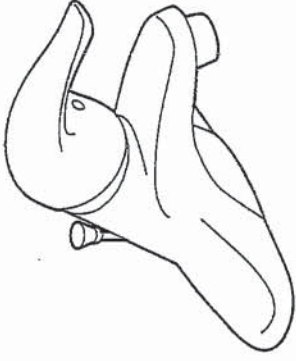

CHATEAU® Single-Handle Lavatory Faucet

with Metal Waste Assembly
Models: L4621 series

Bulk Pack Models (12 Per Carton):
L64620 series


with 50/50 Waste Assembly
Bulk Pack Model (12 Per Carton): L64621 series

Less Waste

Model: L4601 series

Bulk Pack Model (12 Per Carton):
L64601 series

NOTE: THIS FAUCET IS DESIGNED TO BE
INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER

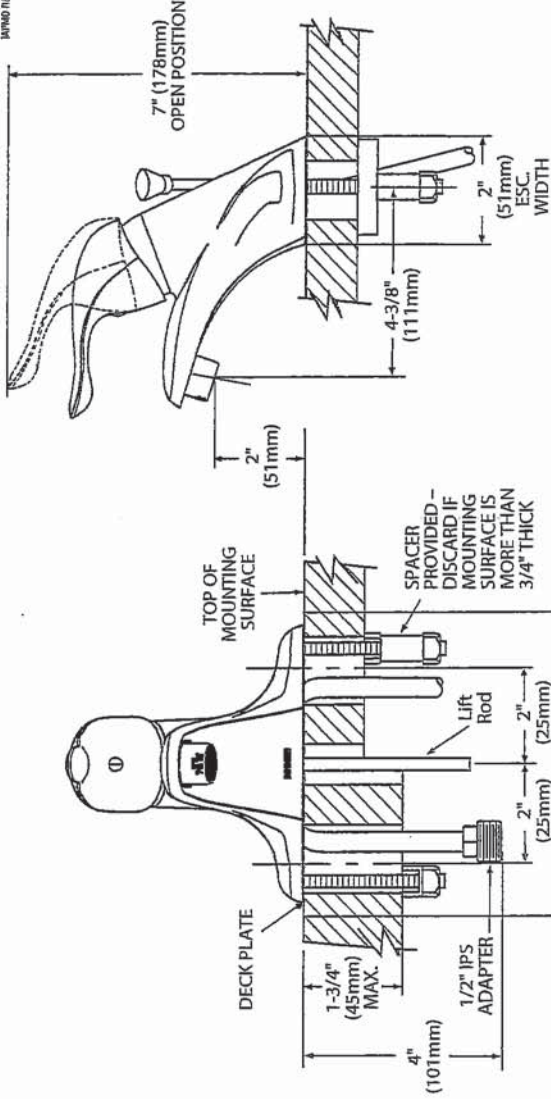

CRITICAL DIMENSIONS

(DO NOT SCALE)

Rev. 1/16

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN
www.moen.com


64-5
WS

UK 75 WALLACETON
20-2095 END ELEV B
THE FORBES
LOT 189B-9

24^{dr} 38

SC(B)500 | ALITO Collection

Cyclone[®]
Breathe Better

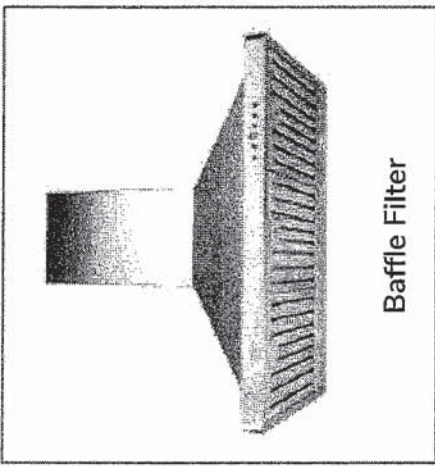

Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)500 is fitted with time-delay OFF feature up to nine minutes, 550 CFM fan, bright LED lights and a digital three-speed push button control panel.


Green Features



3 Speed Push Button
Control Panel




Dishwasher
Safe Filters



Long-Lasting
LED Light



Time-Delay
OFF Feature

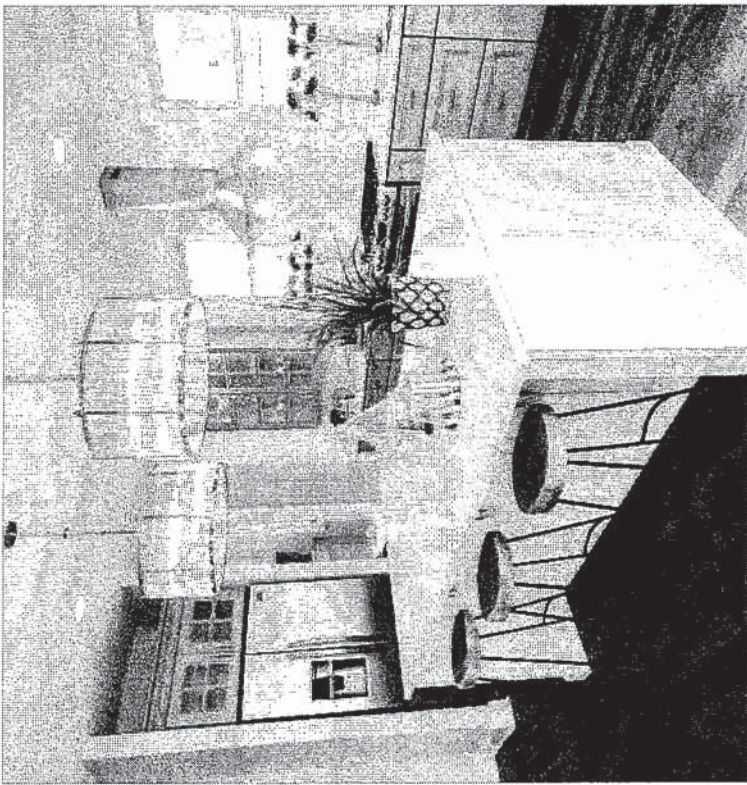

Model	Colour	Ducting	Filters	Size	CFM
SC50024	Stainless-Steel	6"	Mesh	24"	550
SC50030	Stainless-Steel	6"	Mesh	30"	550
SC50036	Stainless-Steel	6"	Mesh	36"	550
SCB50024	Stainless-Steel	6"	Baffle	24"	550
SCB50030	Stainless Steel	6"	Baffle	30"	550
SCB50036	Stainless-Steel	6"	Baffle	36"	550

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16, Toronto, ON, M1S 3J1, Canada.
Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com

UK 75 WALLACETON
20-2095 END · B
THE FORBES
LOT 189B-9

25 of 38


SC(B)500 | ALITO Collection

Cyclone®
Breathe Better


Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W)
- Dishwasher-safe mesh or baffle filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minute time-delay OFF feature
- Plug-in connection

Model: SC(B)50030
SC(B)50036

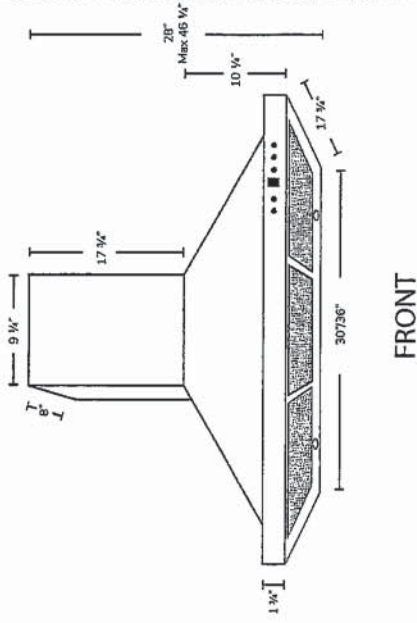

Model: SC(B)50024

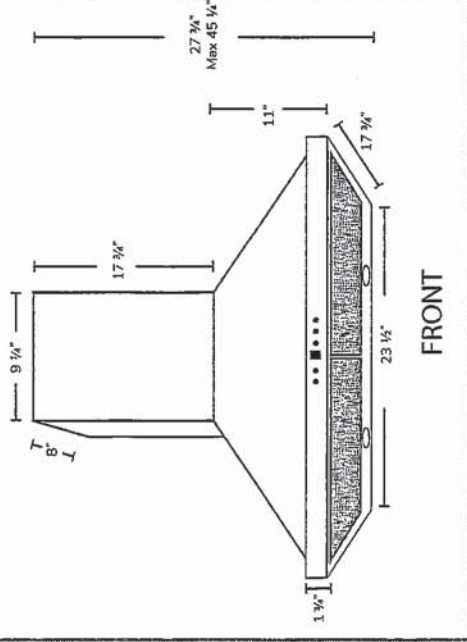

Options

- Filters: SC500 - Quick Release Aluminum Mesh Filters
- **SCB500** - Quick Release Stainless Steel Baffle Filters
- Available Chimney Flues:
 - Short (7 ft. - 8 ft.. A1.CH10)
 - Standard (8 ft. - 9 ft.. A1.CH18)
 - Extended (9 ft. - 11 ft. A1.CH30)
- Widths: 24", **30"**, 36"

Specifications

- Air Flow Volume: 550 CFM
- Electrical Connection: 120V/60Hz
- Power Consumption: 210 Watts
- Current: 2.5 Amps
- Fan Speed: 1600RPM
- Fan Type: Centrifugal Blower

- Finishes: Stainless Steel
- Ducting: 6" Round
- Dimensions: Width: 24", 30", 36"
Height: 46"
Depth: 18"

- Noise Level: Min. 2 Sones
Max. 6 Sones



Toronto • Vancouver • Boston
www.CycloneRangeHoods.com

UK 75 WALLACETON
20-2095 END ELEV B
THE FORBES
LOT 189B-9

26 of 38

HOME APPLIANCES

LG REFRIGERATION

LFXS26973_

3-Door French Door Refrigerator

Slim SpacePlus® Ice System

Dual Ice Maker

Fingerprint Resistant

Smart Cooling® System

LG SmartThinQ™ App Compatible

SmartDiagnosis™

LoDecibel™ Quiet Operation

ENERGY STAR® Qualified



Enjoy new ways to control your home with LG smart appliances

- Get an alert when kids forget to close the door
- Make more ice while you're at work
- Works with the LG SmartThinQ® app

SmartThinQ®

works with the Google Assistant



KEY FEATURES

SMART APPLIANCE

PRODUCT FEATURES

CAPACITY	Refrigerator (cu.ft.)	17.40
	Freezer (cu.ft.)	8.80
	Total Capacity (cu.ft.)	26.20
	ENERGY	
ENERGY STAR® Qualified	Energy Consumption (kWh/Year)	686
	ENERGY STAR® Qualified	Yes
WATER & ICE SYSTEM	Ice & Water Dispenser	Yes
	Dispenser Type	Integrated Tall Ice & Water Dispenser
IcePlus™ Production (lbs)	Daily Ice Production (lbs)	6.0 lbs.
	IcePlus™ Production (lbs)	6.5 lbs.
Ice Storage Capacity (lbs)	Ice Storage Capacity (lbs)	2.5 + 4.0 lbs
	Ice System	Slim SpacePlus®
Dual Ice	Dispenser Light	Yes
	Water Filter	Yes
COOLING	Water Filter	LT1000P
	Linear Compressor	Yes
Smart Cooling® System	Smart Cooling® System	Yes
	Multi-Air Flow Cooling	Yes
Temperature Sensors	Temperature Sensors	6
	Fresh Air Filter	Yes
CONVENIENCE	Membrane / White LED	
	Display Type	Electronic/Digital
Temperature Controls	Door Alarm	Yes
	Child Lock	Yes
Auto Closing Door Hinge	Sabbath Mode	Yes
	LoDecibel™ Quiet Operation	Yes
REFRIGERATOR	No. of Shelves	4 split
	Cantilevered Shelves	Hybrid Cantilevered
Shelf Construction	Spill Protector™ Tempered Glass	
	Crisper Bins	2 Humidity Crispers
Glide N' Serve® Drawer	Refrigerator Light	Yes
	Ceiling LED	
REFRIGERATOR DOOR	No. of Bins	6 Total (2 Adjustable Gallon Sized)
	Door Bin Construction	1 Piece (Clear)

FREEZER	Door Type	Pull Drawer
	Drawers	2-Tier Organization
	DuraBase™ Solid Drawer Base	Yes
	Drawer Divider	Yes
SmartThinQ® SMART FEATURES	Wi-Fi Enabled	Yes
	Voice Activation	Yes
	Works with	Google Assistant and Amazon Alexa
	Smart Grid Ready	Yes
SmartDiagnosis™	SmartDiagnosis™	Yes
	MATERIALS AND FINISHES	
	Contour Door	Yes
	Hidden Hinges	Yes
Surface	Smooth	
	PrintProof™ Stainless Steel	
All Available Colors	PrintProof™ Black Stainless Steel	
	PrintProof™ Black Stainless Steel	
DIMENSIONS / CLEARANCES / WEIGHTS	Depth with Handles	34 7/8"
	Depth without Handles	32 3/8"
	Depth (Total with Door Open)	27 3/4"
	Depth (Total with Door Open)	36 7/8"
Height to Top of Case	Height to Top of Door Hinge	68 3/8"
	Width	68 3/4"
Width (Door Open 90° with Handle)	Width (Door Open 90° without Handle)	35 3/4"
	Door Edge Clearance with Handle	44 1/4"
Door Edge Clearance without Handle	Door Edge Clearance	39 1/4"
	Installation Clearance	4 1/2"
Weight (Unit/Carton)	Sides 1/8", Top 1", Back 2"	1 1/3"
	Carton Dimensions (WxHxD)	Sides 1/8", Top 1", Back 2"
LIMITED WARRANTY	Weight (Unit/Carton)	284 lbs. / 316lbs.
	Carton Dimensions (WxHxD)	38" x 73" x 36"
PARTS & LABOR	Parts & Labor	1 Year
	Sealed System (Parts & Labor)	5 Years
	Compressor (Parts & Labor)	5 Years
	Linear Compressor (Parts Only)	6-10 Years
UPC CODES	LFXS26973S (PrintProof™ Stainless Steel)	048231797122
	LFXS26973D (PrintProof™ Black Stainless Steel)	048231797115

© 2018 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 2/8/19

UK 75 WALLACETON
20-2095 END ELEV B
THE FORBES
LOT 189B-9

27 of 38

HOME APPLIANCES

LG REFRIGERATION



LFXS26973

22 cu.ft. Counter Depth 3-Door French Door Refrigerator

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS/CLEARANCES/WEIGHTS	
A Depth without Handles	32 3/8"
B Width	35 3/4"
C Height to Top of Case	68 3/8"
D Height to Top of Door Hinge	69 3/4"
E Back Clearance	2"
F Depth without Door	27 3/4"
G Depth (Total with Door Open)	36 7/8"
M Depth with Handles	34 7/8"
Width (Door Open 90° with Handle)	44 1/4"
Width (Door Open 90° without Handle)	39 1/4"
Door Edge Clearance with Handle	4 1/2"
Door Edge Clearance without Handle	1 1/3"
Installation Clearance	Sides 1/8", Top 1", Back 2"
Carton Dimensions (WxHxD)	38" x 73" x 36"
ENERGY STAR® Qualified	685
Energy Consumption (kWh/Year)	Yes

CHOOSING THE PROPER LOCATION

WATER

Select a place where a water supply can be easily connected for the automatic

NOTE

- The water pressure must be 20–120 psi or 138–827 kPa or 1.4–8.4 kgf/cm². If the refrigerator is installed in an area with low water pressure (below 20 psi), you can install a booster pump to compensate for the low pressure.

ELECTRICITY

The refrigerator should always be plugged into its own individual properly grounded electrical outlet rated for 115 Volts, 60 Hz, AC only, and fused at 15 or 20 amperes. This provides the best performance and also prevents overloading house wiring circuits which could cause a fire hazard from overheated wires. It is recommended that a separate circuit serving only this appliance be provided.

WARNING

- To reduce the risk of electric shock, do not install the refrigerator in a wet or damp area.

FLOORING

To avoid noise and vibration, the unit must be leveled and installed on a solidly constructed floor. If required, adjust the leveling legs to compensate for the unevenness of the floor. The front should be slightly higher than the rear to aid in door closing. Leveling legs can be turned easily by tipping the cabinet slightly. Turn the leveling legs to the left to raise the unit or to the right to lower it.



NOTE

- Installing on carpeting, soft tile surfaces, a platform or weakly supported structure is not recommended.

AMBIENT TEMPERATURE


Install this appliance in an area where the temperature is between 55°F (13°C) and 110°F (43°C). If the temperature around the appliance is too low or high, cooling ability may be adversely affected.

PRODUCT DIMENSIONS

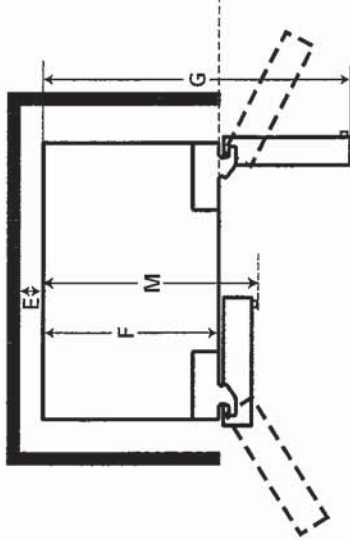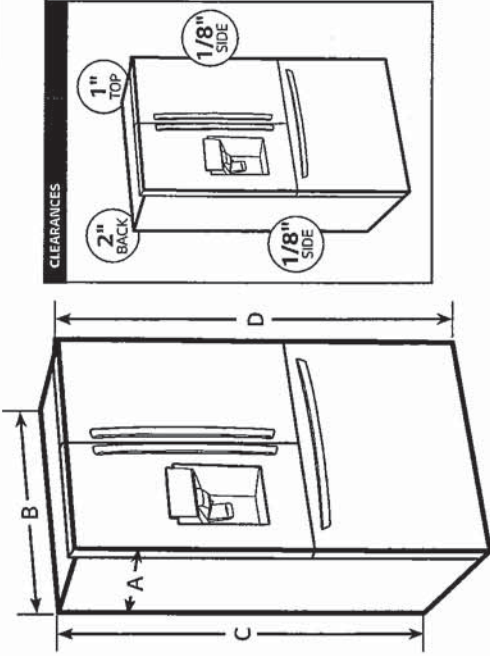

CONNECTING POWER AND SECURING SPACE FOR WATER SUPPLY PIPE


- A** Make sure the location of the water supply pipe is within the marked range.
- A** Before connecting the power, always make sure to ground the product. (If the product is not grounded, the user may be able to feel the electricity due to the minute leakage current when touching the refrigerator door handle or side corner even when there is no issue with the product.)
- A** Do not ground the product to gas pipe, plastic water pipe or telephone wire etc. It can cause electric shock and explosion.



Power connection

The location of the 115V 60Hz power connector must be located on the rear side of the product as shown in the picture.

When installing the product, make sure to check whether the cord is hung on the hook on the rear side so that it is not pressed on the refrigerator. Damaged power cord can cause a fire.



Installation space for water supply pipe

Place the water hose for ice maker and water dispenser as shown in the picture, and prepare hose to come up from the floor. (Copper pipe with diameter of 5/16\"/>

UK 75 WALLACETON
20-2095 END ELEV B
THE FORBES
LOT 189B-9

28 of 38


HOME APPLIANCES

LG COOKING



LRG3060ST

5.4 cu. ft. Gas Single Oven Range

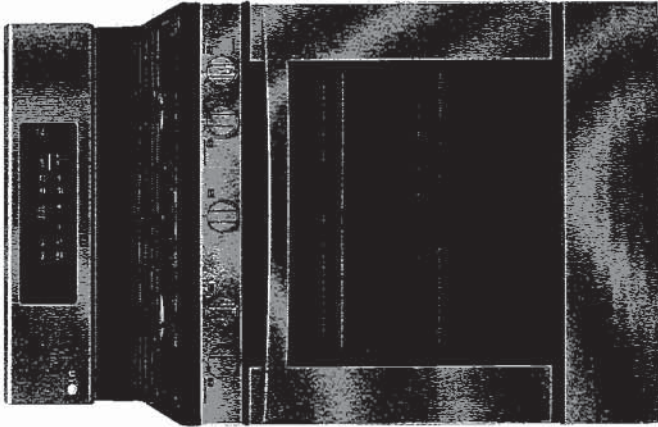

5.4 cuft Large Capacity

SuperBoil™ 17K BTU Burner
EasyClean®

AVAILABLE COLORS



STAINLESS STEEL

PRODUCT FEATURES

CAPACITY	
Oven Capacity (cu. ft.)	5.4
Storage Drawer Capacity (cu. ft.)	0.8 (No Handle)
COOKTOP	
Burner/BTU - Left Rear	9100 / 9100
Burner/BTU - Right Rear	5000 / 5000
Burner/BTU - Left Front	12000 / 9500
Burner/BTU - Right Front	17000 / 10000 (SuperBoil™)
Center (Warming Zone) (BTU)	8000 / 8000 (Oval)
Burner Simmer / BTU - Left Rear	1100
Burner Simmer / BTU - Right Rear	650
Burner Simmer / BTU - Left Front	1100
Burner Simmer / BTU - Right Front	1200
Center (Warming Zone)	2300
OVEN FEATURES	
Broil Element (BTU)	15500 / 12500
Bake Element (BTU)	19000 / 18000 (LNG/LPG)
Oven Modes	Bake, Broil, Proof, Warm
Oven Control Features	Keypad
EasyClean®	Yes
GoCook Smart Oven Light	1 Light
No. of Rack Positions	7
Door Lock	Yes
Automatic Safety Shut-Down	After 12 Hours

DRAWER FEATURES	
Type	Storage
Control	Front Control Knobs
Cooktop Control Type	Keypad
Oven Control Type	LED Green
Display	English
Language	12 hr or 24 hr (option)
Clock	Yes
Kitchen Timer	Yes
Timed Cook	Fahrenheit / Celsius
Temperature Unit of Measure	1. Hi 2Lo 3.Off
Cooking Complete Reminder	
Volume	
APPEARANCE	
All Available Colors	Stainless Steel
Knobs	Silver
Handle	Stainless Steel
Oven Door Feature	WideView™
Cooktop Finish	Black Porcelain
SMART FEATURES	
SmartDiagnosis™	Yes

DIMENSIONS/CLEARANCES/WEIGHTS	
Shipping Weight (lbs)	210
Product Weight (lbs)	189
Cabinet Width (in)	30"
Overall Depth (in) - including handle	28 3/4"
Overall Height (in)	47 7/16"
Overall Width (in)	30"
Oven Interior Dimensions (in)	24 1/2" x 19 1/2" x 19 3/8"
Height to Cooking Surface (in)	36"
Drawer Dimensions (in) (W x H x D)	22 2/16" x 4 1/2" x 16 3/8"
Carton Dimensions (in) (W x H x D)	32 1/2" x 51 9/16" x 30 1/2"
POWER/RATINGS	
Amp Rating at 240V	4.5A (120VAC, 60Hz)
ACCESSORIES	
Standard Rack	2
Spray Bottle	Yes
Scouring Pad	Yes
Conversion Kit	Yes
LIMITED WARRANTY	
Parts & Labor	1 Year
LPG CODES	
LRG3060ST (Stainless Steel)	0482232335484

30
of
2



LG COOKING

LRG3060ST

5.4 cu. ft. Gas Single Oven Range

5.4 cu. ft. Gas Single Oven Range



QUICK INSTALL & CLEARANCES

IMPORTANT


DIMENSIONS AND WEIGHT	
Cabinet Width (in)	30"
Overall Depth (in) - including handle	28 3/4"
Overall Height (in)	47 7/16"
Overall Width (in)	30"
Oven Interior Dimensions (in) (W x H x D)	24 1/2" x 19 1/2" x 19 3/8"
Height to Cooking Surface (in)	36"
Drawer Dimensions (in) (W x H x D)	22 3/16" x 4 1/2" x 16 3/8"
Carton Dimensions (in) (W x H x D)	32 1/2" x 51 9/16" x 30 1/2"
POWER RATING Amp Rating at 240V 4.5A (120VAC, 60Hz)	



GAS PIPE AND ELECTRICAL LOCATIONS

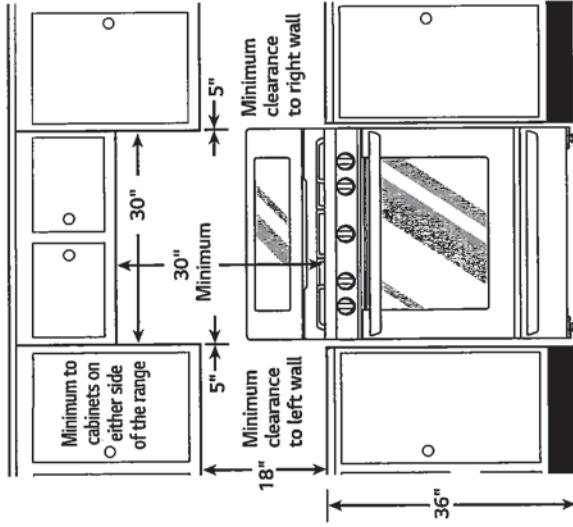

GAS PIPE AND ELECTRICAL LOCATIONS

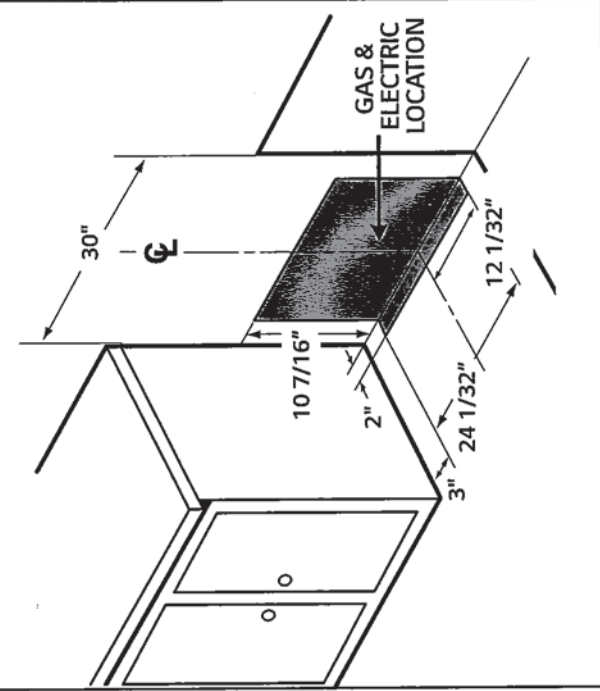


© 2019 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. 2/11/19

Visit A Local Showroom For Our Best Prices* [Click here for more information.](#)

Home (https://www.canadianappliance.ca/) > Microwaves (https://www.canadianappliance.ca/Microwave-Ovens-20/) > Countertop Microwaves
(https://www.canadianappliance.ca/Microwave-Ovens-20/Countertop-Microwaves-102/) > Panasonic (https://www.canadianappliance.ca/Panasonic/Microwave-Ovens-
20/Countertop-Microwaves-102/) Availability

Panasonic (https://www.canadianappliance.ca/Panasonic-Appliances-Canada-B615/) 7-20 Business Days
NNSD786S Authorized Dealer

2916189250

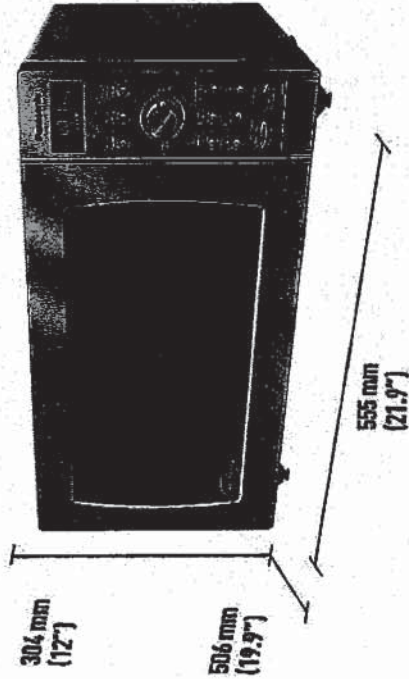

CAS

(/img/xxlarge/panasonic/counter-top-microwave/NNSD786S-
canada.jpg)



(/img/xxlarge/panasonic/counter-top-
microwave/NNSD786S-
reviews.jpg)

Step up to Panasonic NNS796S for an
(https://www.canadianappliance.ca/pro

MSRP Price ~~\$459.99~~ CAD

35% off (Ends September 9). \$160.90 CAD

Online Price\$

Visit
A
CAS
Showroom
For
Our
Best
Prices

Add to Cart

Visit a Showroom

Sales: (877) 374-439
(tel:18773743439)

Postal Code

Calculate Delivery



Features Specs Literature Video Reviews

Rebates

Warranty

Financing

Install

FAQ

UK 75 WALLACETON
20-2095 END ELEV B
THE FORBES
LOT 189B-9


31 of 38

HOME APPLIANCES

LG DISHWASHERS

LDP6797ST

Top Control Dishwasher with QuadWash™

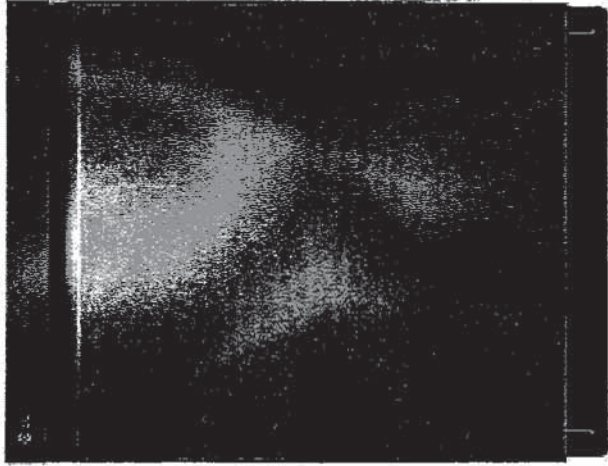

KEY FEATURES

- QuadWash™
- EasyRack™ Plus with 3rd Rack and Glide Rail
- Inverter DirectDrive Motor - 10 Year Warranty
- 44 dBA LoDecibel™ Quiet Operation
- 15 Place Settings
- 9 Wash Cycles
- NeverRust™ Stainless Steel Tub
- ENERGY STAR® Qualified
- Available in Stainless Steel (ST) and Black Stainless Steel (BD)

PRODUCT FEATURES

- CAPACITY**
 - Total Place Settings 15
 - Upper Rack Dish Height Limit 7.1"
 - Lower Rack Dish Height Limit 12.5"
- RACKS AND BASKETS**
 - Cutlery Baskets *
 - Cup Rack *
 - Stemware Holders *
 - Fold Down Tines (Half Fold on Upper & Full Fold on Lower) *
 - BPA-Free Nylon Coated Racks and Tines *
 - Rack Handle (Upper Only) *
 - Glide Rail *
 - Height Adjustability Easy One Touch (3 Level) *
 - EasyRack™ Plus System *
 - Upper Rack Color-Coded Foldable Tines Half Fold
 - Lower Rack Color-Coded Foldable Tines Full Fold
 - Height Adjustable Upper Rack *
 - Height Adjustable 3rd Rack *
- STYLE AND DESIGN**
 - Electronic Controls Touch
 - LED Indicator Lights 3
 - Tub Material NeverRust™ Stainless Steel
 - Tub Insulation Damping Sheet, Sound Absorbing Material (felt), Base Flush Handle
 - Handle Stainless Steel (ST), Black Stainless Steel (BD)
- FEATURES**
 - LoDecibel™ Quiet Operation 44 dBA
 - Inverter Direct Drive Motor *
 - Overflow Detector *
 - 120°F Inlet Water Capability *
 - 3-Stage Filtration System *
 - SenseClean™ Wash System *
 - Vario Wash *
 - Variable Spray Intensities *
 - No. of Spray Arms 3 (Top, Upper, Lower) *
 - Multi-Level Water Direction *
 - Hybrid Condensing Drying System *
 - Detergent and Rinse-Aid Dispenser *

- Rinse-Aid Indicator *
- Hidden Water Heater *
- Safety Float Switch (Leaks) *
- Soil (Turbidity) Sensor *
- Status Indicator *
- End of Cycle Indicator Beeper + END Indication on Display
- PERFORMANCE**
 - Number of Wash Cycles 9 (Auto, Heavy, Delicate, Normal, Turbo, Download Cycle, Machine Clean, Rinse, Express)
 - Number of Wash Options 8 (Dual Zone, Half Load, Energy Saver, High Temp, Extra Dry, Delay Start (up to 12 hrs), Control Lock, Night Dry)
- QuadWash™ *
- ENERGY/WATER**
 - Water Factor (WF) 2.8
 - Energy Use (kWh/Year) 258 kWh/Year
 - ENERGY STAR® Qualified *
 - CEE Tier 1
- DIMENSIONS**
 - Unit Dimensions (WxHxD) 23.75" x 33.6" x 24.6"
 - Depth with Door Closed (Handle) 27 1/8"
 - Depth with Door Open 50.5"
 - Carton Dimensions (WxHxD) 28" x 34.7" x 29.6"
 - Clearances (WxHxD) 24" x 33.5" x 24"
 - Weight (Unit/Carton) 83.8 lbs / 95.9 lbs
- LIMITED WARRANTY**
 - 2 Years Parts and 1 Year Labour,
 - 5 Years on Control Board/Rack and Liner/Tub,
 - 10 Years on Inverter Direct Drive Motor
- UPC CODES**
 - LDP6797ST (Stainless Steel) 772454 068874
 - LDP6797BD (Black Stainless Steel) 772454 068867

© 2017 LG Electronics Canada, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 03/05/2017

20 Noweco Drive, North York, Ontario M9L 2X6 Tel: 647-253-6300 | Customer Service 8 Parts 1-888-542-2623

LG.com

UK 75 WALLACETON
20-2095 END B
THE FORBES
LOT 189B-9

32 of 38


CABINET CUTOUT DIMENSIONS

WIDE 320 PAX

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear levelling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

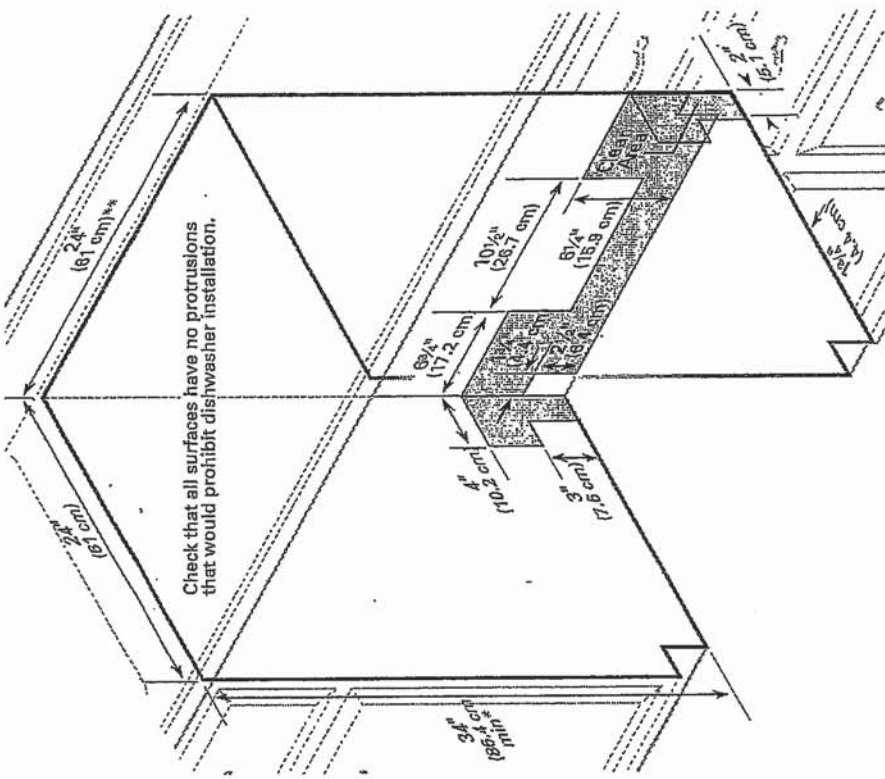

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


64-5
M

UK 75 WALLACETON
20-2095 END B
THE FORBES
LOT 189B-9


33 of 38

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW

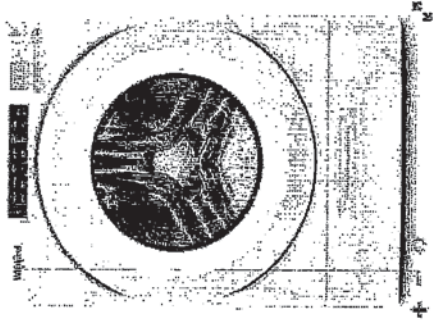

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

6-5
WS

UK 75 WALLACETON
20-2095 END B
THE FORBES
LOT 189B-9

34 of 38

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS


Proper installation is your responsibility.

You will need:


- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

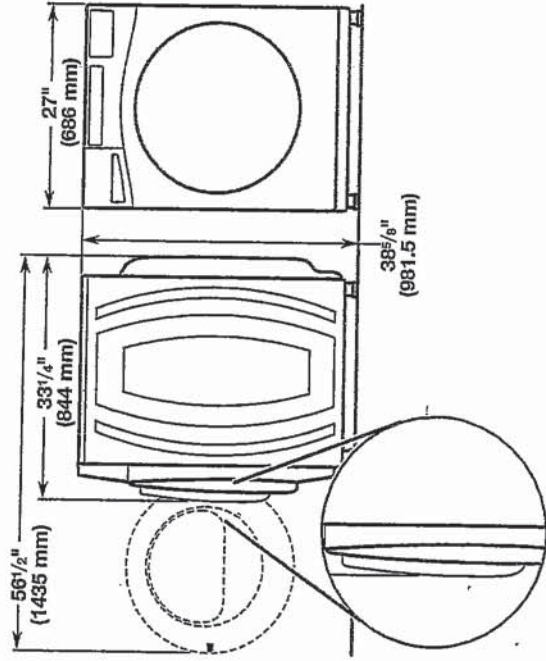


Maytag Models

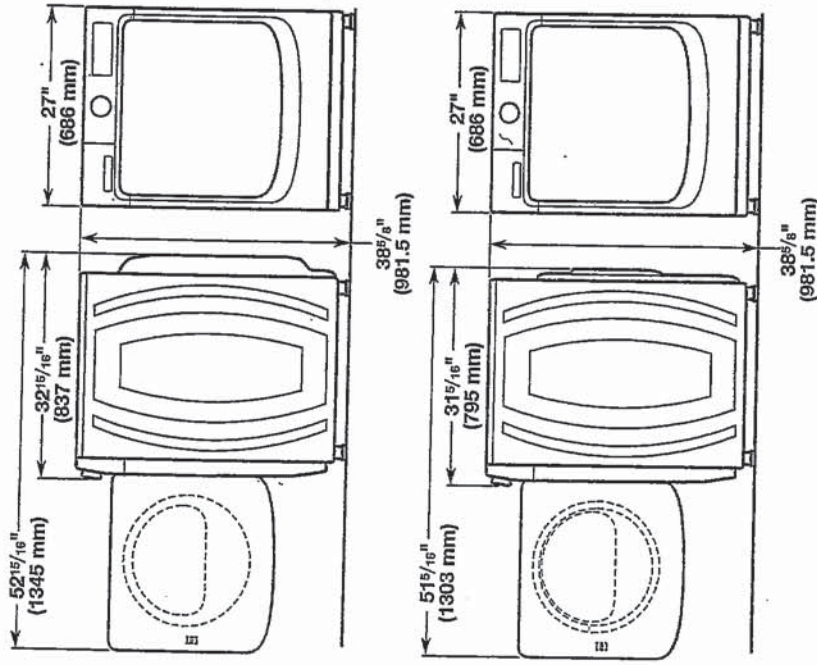

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

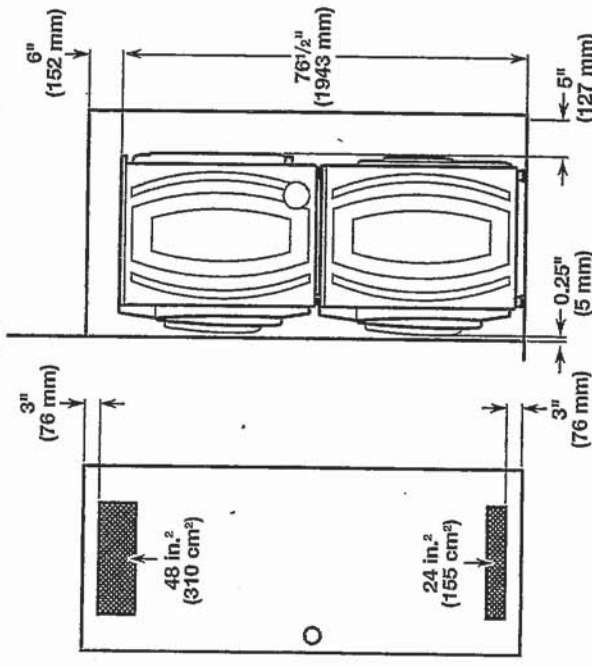

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.


WJ 4-5

UK 75 WALLACETON
20-2095 END B
THE FORBES
LOT 189B-9


35 of 38

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

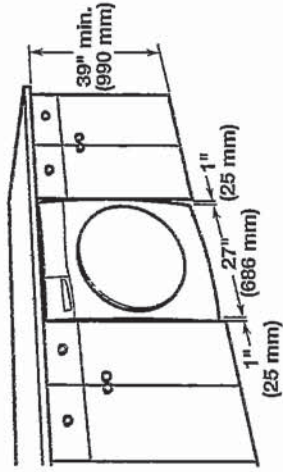

Recessed area or closet installation:

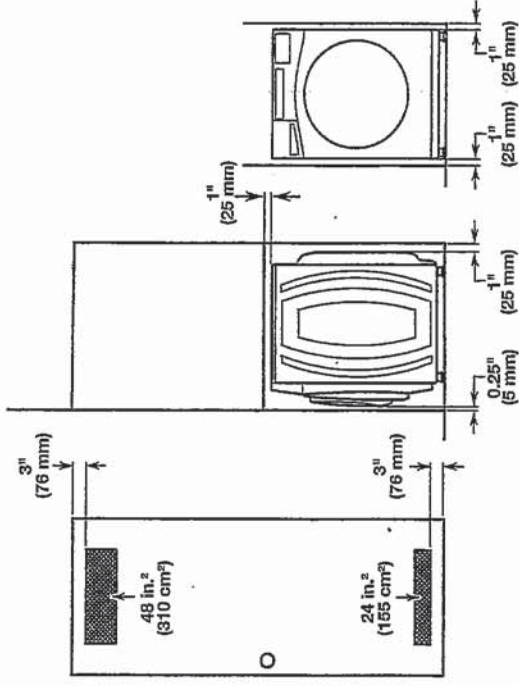

Custom cabinet installation:

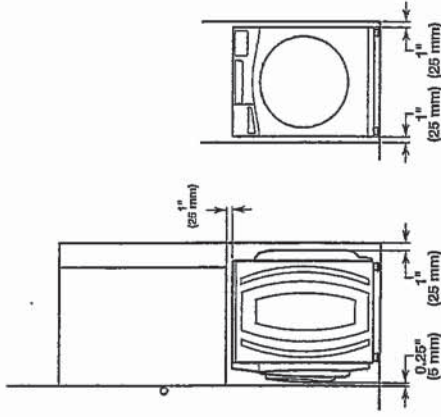


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

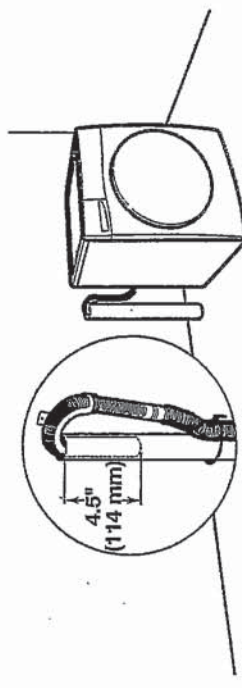


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

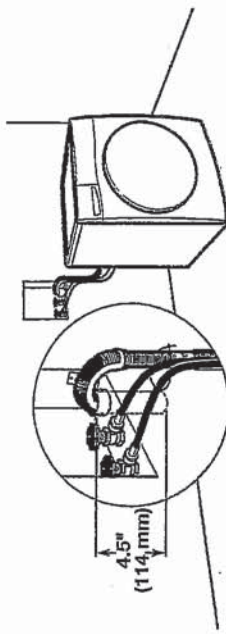

See requirements for floor standpipe drain system.

Laundry tub drain system

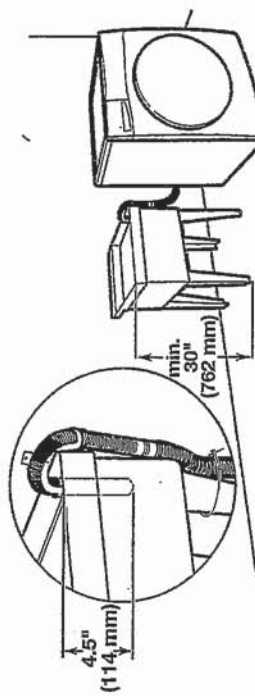

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

69.5


WS

UK 75 WALLACETON
20-2095 END B
THE FORBES
LOT 189B-9

36 of 38

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada (English) | Washers and Dryers | Dryers | Electric Dryers | YWED5620HW

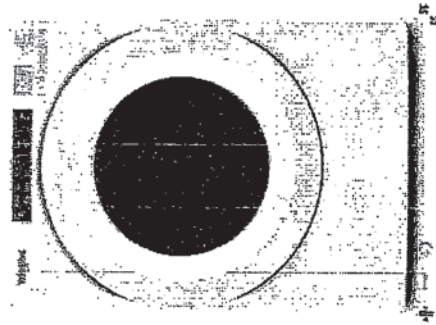

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical


Hz	60
Power Cord Included	Yes

4-5

WS

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

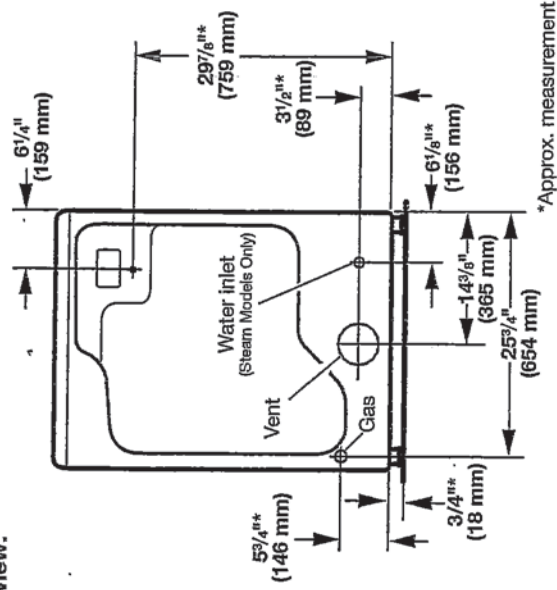

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

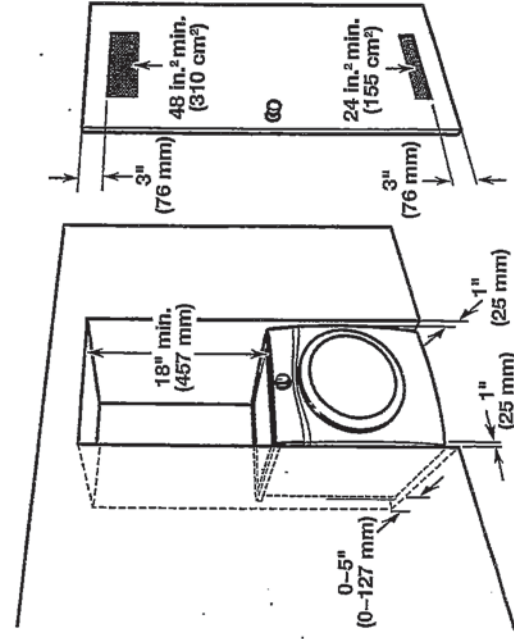

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

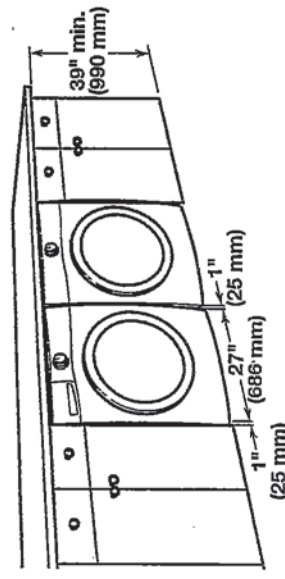

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

6-5
MS

UK 75 WALLACETON
20-2095 END B
THE FORBES
LOT 189B-9

3800F38

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

! WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.


Failure to do so can result in death, explosion, or fire.

You will need:


- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS
Front view:

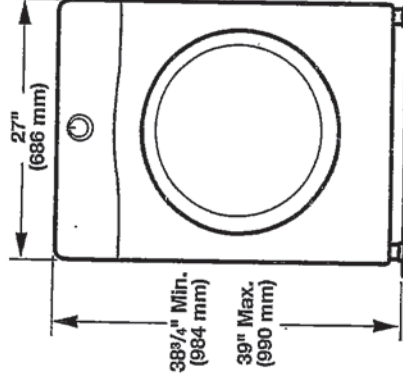

Side view:
Whirlpool Models

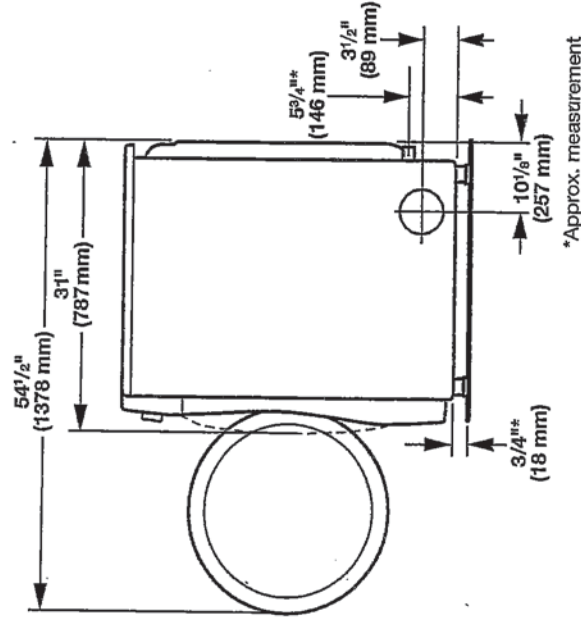

Maytag Models

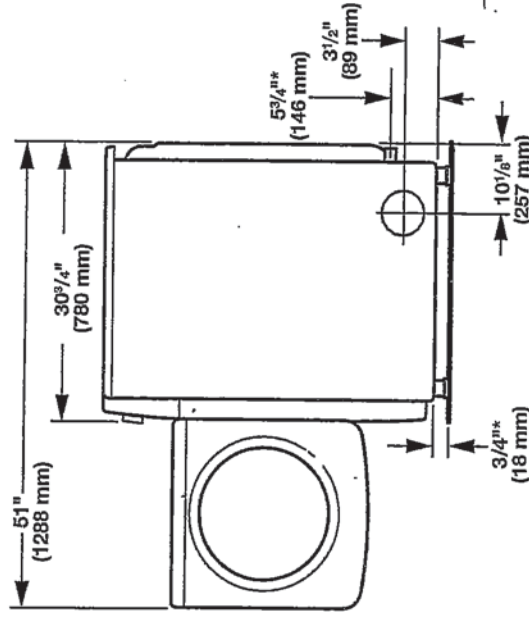

*Approx. measurement.

6.5