

PRE-Sales Selection Sheet
Checklist

1 of 38

LOT 190B-10 Model: 20-1606 A The Grassfield
PURCHASERS: GEROME, ARQUINTI ABA/
VENDOR: Heathwood Homes (Huron) Limited

OPTIONAL DOUBLE SINKS IN MASTER ENSUITE BATHROOM

- ☒ FINISHED BASEMENT
☐ COLD CELLAR

UPGRADED / MODIFIED ELEVATION

- ☐ CORNER UPGRADE
☐ REAR UPGRADE

CEILING UPGRADE - SMOOTH

- ☐ MAIN FLOOR
☐ SECOND FLOOR
☐ BASEMENT

ADDITIONAL ROUGH-INS

- ☐ 200 AMP SERVICE
☐ WET BAR ROUGH-IN
☐ HUMIDIFIER
☒ AIR CONDITIONING

GAS ROUGH-IN

- ☐ STOVE
☐ DRYER
☐ BBQ
☐ ADDITIONAL FIREPLACE

KITCHEN: HOODFAN VENTING SIZE

- ☐ 6 IN ROUND DUCT
☒ 7 IN ROUND DUCT

FULL BASEMENT STAIRS:

UPPER BASEMENT STAIRS:

LOWER BASEMENT STAIRS:

MAIN STAIRS:

MEDIA STAIRS (if applicable):

LOFT STAIRS (if applicable):

N/A

All Oak

Carpet Grade

All Oak

N/A

N/A

Dec. 9/19

Date

Purchaser

Signatures

on file

DEC. 9/19

Date

Decor Consultant:

IRIT SALEM

IRIT SALEM

Date

Purchaser:

Locked Date:

Date
Approved

Heathwood Homes (Huron) Limited



Sales Selection Sheet

Wallaceton

2 of 38

TEL: RES.: 647-783-4220

LOT / UNIT 190B-10	PHASE 1	MODEL 20-1606 A The Grassfield
-----------------------	------------	-----------------------------------

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

APPLIANCES

1	SCHEDULE E- FIVE APPLIANCES: SS FRIDGE, STOVE, DISHWASHER, WHITE FRONT LOADER WASHER/DRYER- TOWNHOMES	Qty: 1
17,904	Note:	

Sub Total
HST
Total

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment Summary	Amount
Paid By	
Total Payment:	

PURCHASER: Signature on file 11-Dec-19 11-Dec-19
GEROME, ARQUINTI ABA DATE DATE
Decor Consultant
IRIT SALEM 11-Dec-19
DATE
M. Rosen
Date Approved Heathwood Homes (Huron) Limited

TAX#:1

PREPARED BY: Marilyn Rosen

PE 182-1

Invoice.rpt 28may19

Customer Colours

SEROME, ARQUINTI ABA/
Project: Wallaceton
Unit: 190B-10, Phase: 1
Model: 20-1606 A The Grassfield

Created: 11/19/2019 10:17:07

Locked:

Closed:

3 of 38

Kitchen

Cabinet Colour/Style

6279 Viking III-TORONTO-ESPRESSO CL-MAPLE ***STD***

Countertop

9069 MSI Quartz GROUP 1 ICED WHITE ***STD***

Countertop Edge

4010 SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD***



Cabinet Hardware

2086 9677-HARDWARE ***STD***

Island Cabinet Colour/Style

6279 Viking III-TORONTO-ESPRESSO CL-MAPLE ***STD***

Island Countertop

9069 MSI Quartz GROUP 1 ICED WHITE ***STD***

Backsplash

1111 N/A *****

Backsplash Grout

1111 N/A *****

Backsplash Tile Pattern

1111 N/A *****

HoodFan

1111 AV1308 Air King 30

PAGE 22

Appliance

1111 Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.

Appliance

1111 Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.

Appliance

1111 Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after

Comment

Kitchen/Breakfast

Flooring

9071 New Byzantine Azzuro 13X13 ***STD***

TILE LINE PATTERN S 2 P 15

Floor Tile Grout

2225 Grout-(27) Silver ***STD***

Floor Tile Pattern

3000 STANDARD SQUARE ***STD***

--	--	--	--

GEROME, ARQUINTI ABA/
Project: Wallaceaton
Unit: 190B-10, Phase: 1
Model: 20-1606 A The Grassfield

Created: 11/19/2019 10:17:07

Locked:

Closed:

4 of 38

Comment

Foyer

Flooring

3000

GE.BY.AZR.1313 New Byzantine Azzuro 13

TILE LINE PATTERN S 2 P 15

Floor Tile Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***

Comment

Laundry Room

Flooring

3000

GE.BY.AZR.1313 New Byzantine Azzuro 13

TILE LINE PATTERN S 3 P 16

Floor Tile Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***

Comment

Mud Room

Flooring

3000

GE.BY.AZR.1313 New Byzantine Azzuro 13

TILE LINE PATTERN S 2 P 15

Floor Tile Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***

Comment

Customer Colours

GEROME, ARQUINTIABA/
Project: Wallaceton
Unit: 190B-10, Phase: 1
Model: 20-1606 A The Grassfield

Created: 11/19/2019 10:17:07

Locked:

Closed:

5 of 38

Powder Room

Flooring

3000

GE.BY.AZR.1313 New Byzantine Azzuro 13

TILE LINE PATTERN S 2 P 15

Floor Tile Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***



Plumbing Fixture (Colour)

1737

Plumbing Fixtures-WHITE ***STD***

Comment

Hall

Flooring

1737

GE.BY.AZR.1313 New Byzantine Azzuro 13

TILE LINE PATTERN S 2 P 15

Grout


2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***



Comment

Great Room

Flooring

7502

Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3 1/4 inch ***STD***

Comment

Upper Hall

Flooring

7625

T-15-Dynasty Tex-T-15-40 oz Poly ***STD***

Comment

Customer Colours

GEROME, ARQUINTI ABA/
Project: Wallaceton
Unit: 190B-10, Phase: 1
Model: 20-1606 A The Grassfield

Created: 11/19/2019 10:17:07

Locked:

Closed:

10 of 38

Finished Basement (Rec) Room/Hall

Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Comment		

Master Bedroom

Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Comment		

Bedroom 2

Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Comment		

Bedroom 3

Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Comment		

Master Ensuite

Cabinet Colour/Style	6279	Viking III-TORONTO-ESPRESSO CL-MAPLE ***STD***
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2082	196-HARDWARE ***STD***
Floor Tile	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13 TILE LINE PATTERN S 3 P 16
Floor Tile Grout	2225	Grout-(27) Silver ***STD***

Customer Colours

GEROME, ARQUINTI ABA/
Project: Wallaceton
Unit: 190B-10, Phase: 1
Model: 20-1606 A The Grassfield

Created: 11/19/2019 10:17:07

Locked:

Closed:

7 of 38

Floor Tile Pattern	3000	STANDARD SQUARE ***STD***	<table><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>																
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***																	
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***																	
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***	<table><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>																
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***																	
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***																	
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***	<table><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>																
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***																	
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***																	
Comment																			

Main Bathroom

Cabinet Colour/Style	6279	Viking III-TORONTO-ESPRESSO CL-MAPLE ***STD***					
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***					
Countertop Edge	1111	N/A *****					
Cabinet Hardware	2082	196-HARDWARE ***STD***					
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13 TILE LINE PATTERN S3 P16					
Floor Tile Grout	2225	Grout-(27) Silver ***STD***					
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***	<table><tr><td></td><td></td><td></td><td></td></tr></table>				

GEROME, ARQUINTI ABA/
Project: Wallaceton
Unit: 190B-10, Phase: 1
Model: 20-1606 A The Grassfield

Created: 11/19/2019 10:17:07

Locked:

Closed:

8 of 38

Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***	<table><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>												
Wall Tile Grout	2226	Grout-(00) White ***STD***													
Main Bathroom Tile Pattern	3090	VERTICAL STACKED ***STD***	<table><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>												
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***													
Comment															

Finished Basement Bathroom

Cabinet Colour/Style	6279	Viking III-TORONTO-ESPRESSO CL-MAPLE ***STD***													
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***													
Countertop Edge	1111	N/A *****													
Cabinet Hardware	2082	196-HARDWARE ***STD***													
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13 TILE LINE PATTERN S1 P14													
Floor Tile Grout	2225	Grout-(27) Silver ***STD***													
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***	<table><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>												
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***													
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***													
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***	<table><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>												
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***													

Customer Colours

GEROME, ARQUINTI ABA/
Project: Wallaceton
Unit: 190B-10, Phase: 1
Model: 20-1606 A The Grassfield

Created: 11/19/2019 10:17:07

Locked:

Closed:

9 of 38

Shower Wall Tile Grout	2226	Grout-(00) White ***STD***												
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD*** <table><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>												
Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***												
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***												
Comment														

Great Room Fireplace

Type	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***
Mantle	9114	NF 15-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD*** PAGE 18
Surround Opt.	1111	N/A *****
Note	1111	Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.
Note	1111	Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.

Comment		
---------	--	--

Basement Stairs

Type	1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***
Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***
Handrail/Pickets/Post Colours	1729	Carpet Grade-Stain handrail, pickets, stringers, nosing_pos
Carpet	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Custom Stain/Paint	1111	N/A *****

Customer Colours

GEROME, ARQUINTI ABA/
Project: Wallaceton
Unit: 190B-10, Phase: 1
Model: 20-1606 A The Grassfield

Created: 11/19/2019 10:17:07

Locked:

Closed:

10 of 38

Comment

Basement Stairs Landings (Upper and Lower)

Flooring 7502 Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3 1/4 inch ***3***

Comment

Main Stairs

Type 1712 Oak Stairs ***STD MAIN STAIRS***

Colour 7922 Eclipse (Pewter) STAIN TO COMPLEMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***

Carpet Runner 1111 N/A *****

Handrail/Pickets/Posts Type 7651 1 5/16 inch Turned pickets with 3 1/2" Turned Post(s)-ALL OAK***STD***

Handrail/Pickets/Posts Colour 1728 Oak Grade-Stain handrail,oak pickets,stringers,treads,risers
Custom Stain/Paint 1111 N/A *****

Comment

Main Stairs Landing(s)

Flooring 7502 Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3 1/4 inch ***STD***

Comment

Throughout

Walls - Paint Colour 1717 22-Wall-WARM GREY ***STD***

Underpad 1079 500 Series-Underpad ***STD***

Thresholds 2232 Metal Thresholds ***STD***

Switches and Plug 5796 Decora White Switches and Plugs ***STD***

Trim Size 8705 4 1/4 Baseboard and 2 3/4 Casings ***STD***

GEROME, ARQUINTI ABA
Project: Wallaceton
Unit: 190B-10, Phase: 1
Model: 20-1606 A The Grassfield

Created: 11/19/2019 10:17:07

Locked:

Closed:

Trim - Paint Colour

1/16

Trim-WHITE

SID

Comment

Purchaser:

GEROME, ARQUINTI ABA

12/09/19

Date

Decor Consultant

Date

Purchaser:

Wallaceton

Date

Date Approved



Sales Selection Sheet

Wallaceton

12 of 38

TEL: RES.: 647-783-4220

LOT / UNIT 190B-10	PHASE 1	MODEL 20-1606 A The Grassfield
-----------------------	------------	-----------------------------------

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

Cabinetry

1 112,804	CABINETRY - 11A-UPPER ANGLE CORNER PER UNIT - UPGRADE 1	Qty: 1
17,873	Note: KITCHEN SKETCH # 4 PAGE 17	

Electrical

2 112,906	ELECTRICAL - CEILING ROUGH-IN (CAPPED)	Qty: 1
17,870	Note: KITCHEN- TO BE INSTALLED ABOVE THE BREAKFASR BAR, USE WITH STD. KITCHEN SWITCH SEE SKETCH # 2 PAGE# 15	
3 112,906	ELECTRICAL - CEILING ROUGH-IN (CAPPED)	Qty: 1
17,871	Note: GREAT ROOM- TO BE INSTALLED IN THE CENTRE OF THE ROOM U SE STD. SWITCH PLUG SEE SKETCH # 2 PAGE# 15	

Plumbing

4 115,443	PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET, STD COLONY SINK,INCLUDING CABINET CONVERSION 2D VIKING AND ONE EXTRA VANITY LIGHT	Qty: 1
17,872	Note: MASTER BATHROOM SKETCH # 3, 4 PAGES 16, 17	

Structured Wiring

5 113,226	STRUCTURED WIRING - TV CABLE LINE ROUGH-IN RG 6	Qty: 1
17,869	Note: BEDROOM 2 SEE SKETCH # 3 PAGE# 16	

Sub Total
HST
Total

TAX#:1

PREPARED BY: Irit Salem

PE 161-1

SIInvoice.rpt 28May19

W G.A



Sales Selection Sheet

Wallaceton

3 of 38

TEL: RES.: 647-783-4220

LOT / UNIT	PHASE	MODEL
190B-10	1	20-1606 A The Grassfield

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. The Vendor acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment Summary	
Paid By	Amount
VISA	
Total Payment:	\$ 3287.17

PURCHASER:

GEROME, ARQUINTI ABA

09-Dec-19

DATE

09-Dec-19

DATE

Decor Consultant

09-Dec-19

DATE

09-Dec-19

DATE

Decor Consultant

Date Approved Heathwood Homes (Huron) Limited

TAX#:1

PREPARED BY: Irit Salem

PE 161-2

SlInvoice.rpt 28may19

UK 75 WALLACETON
20-1606 ELEV A
THE GRASSFIELD
LOT 190B-10


14 of 38

THE GRASSFIELD

ELEVATION A | 1,986 SQ. FT.
Includes 380 square feet of finished lower level

20-1606 ELEV. A

Sketch #1
WALLACETON
EST. 1870

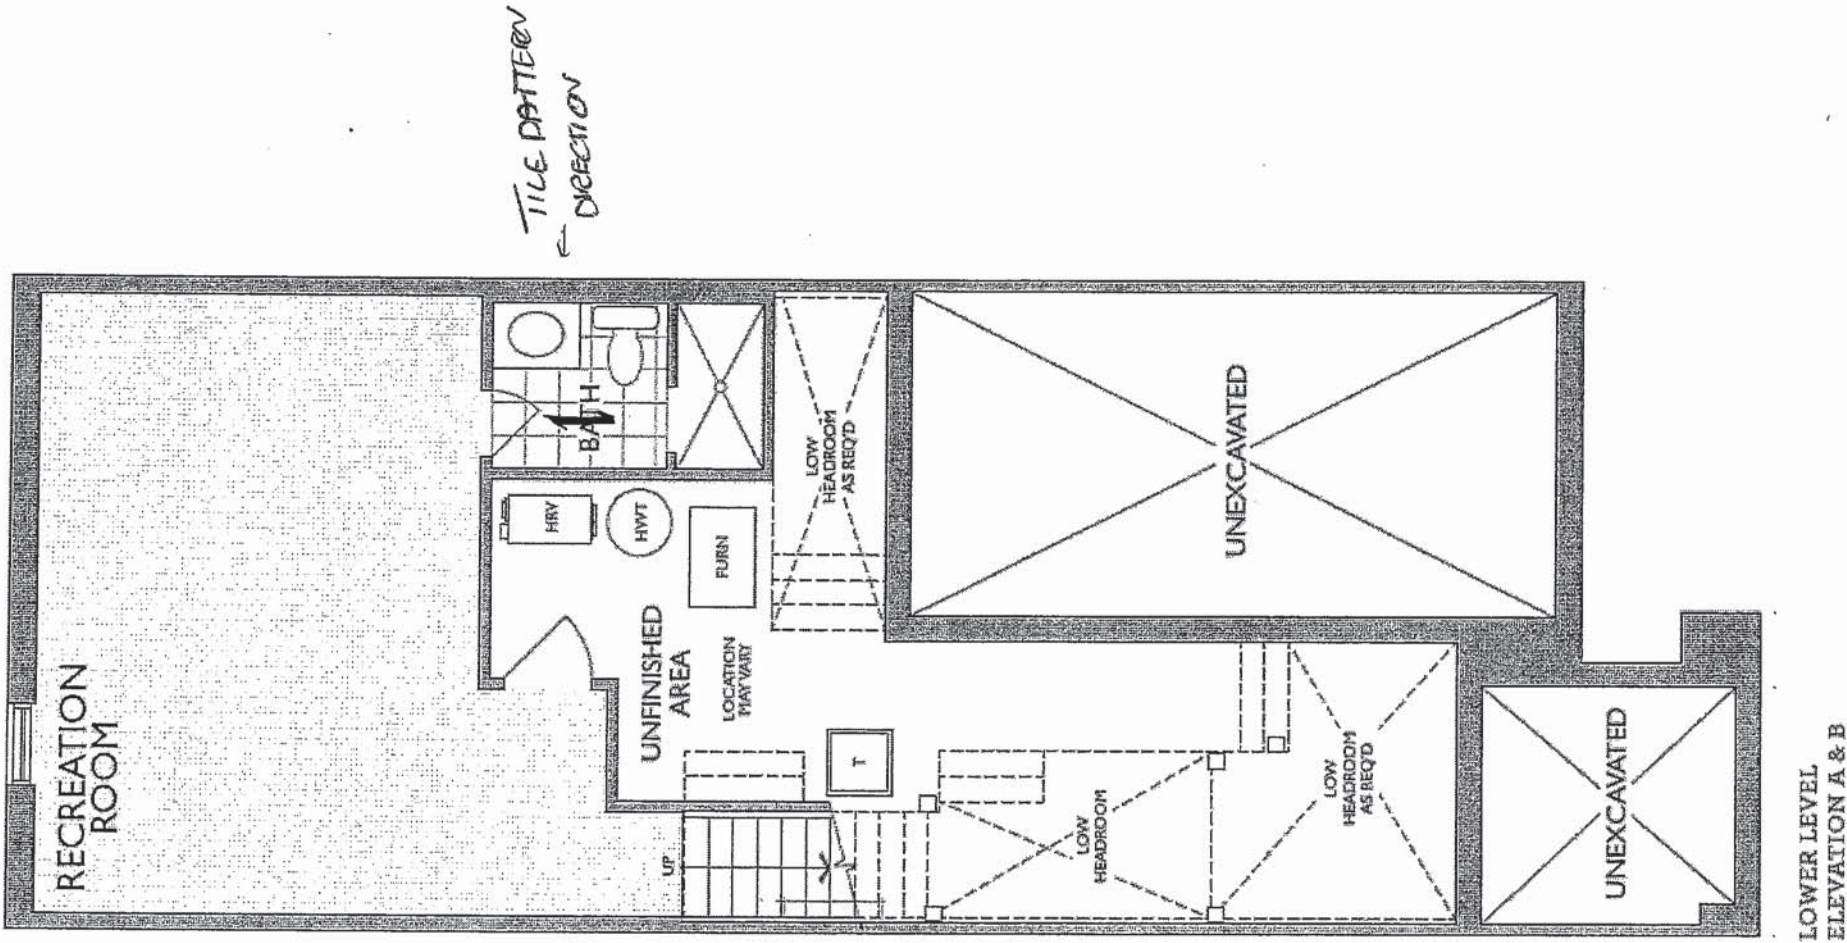

UK 75 WALLACETON
20 - 1606 ELEV A
THE GRASSFIELD
LOT 190B-10

15 of 38

THE GRASSFIELD


ELEVATION A | 1,986 SQ. FT.

Includes 380 square feet of finished lower level

WALLACETON
EST. 1870

Sketch #2

20-1606 ELEV. A

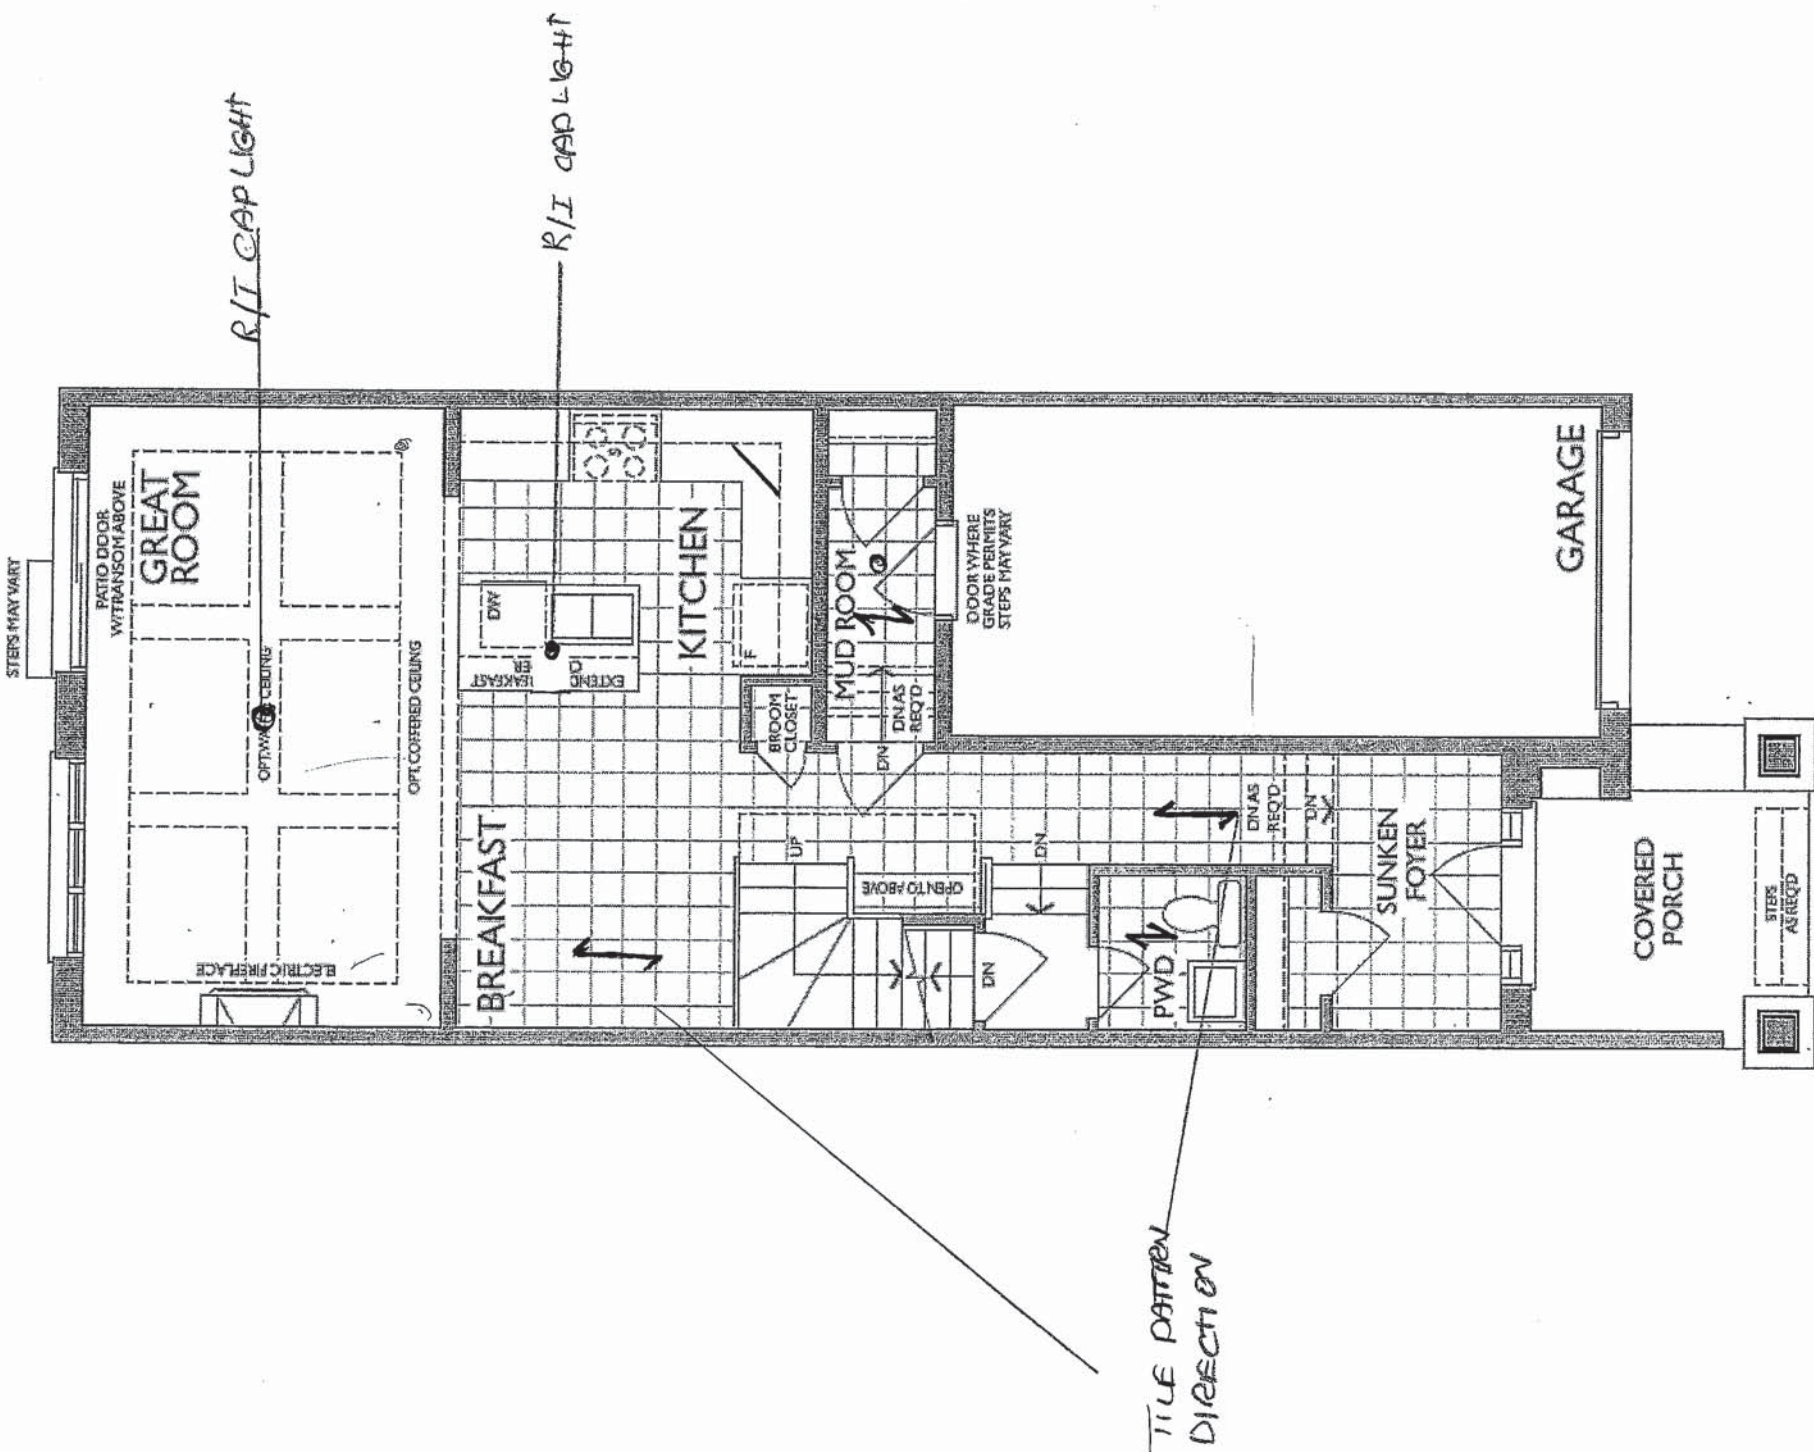

MAIN FLOOR
ELEVATION A

not
G.A

Sketch #2


THE GRASSFIELD

ELEVATION A | 1,986 SQ. FT.

Includes 380 square feet of finished lower level

WALLACETON
EST. 1870

20-1606 ELEV. A

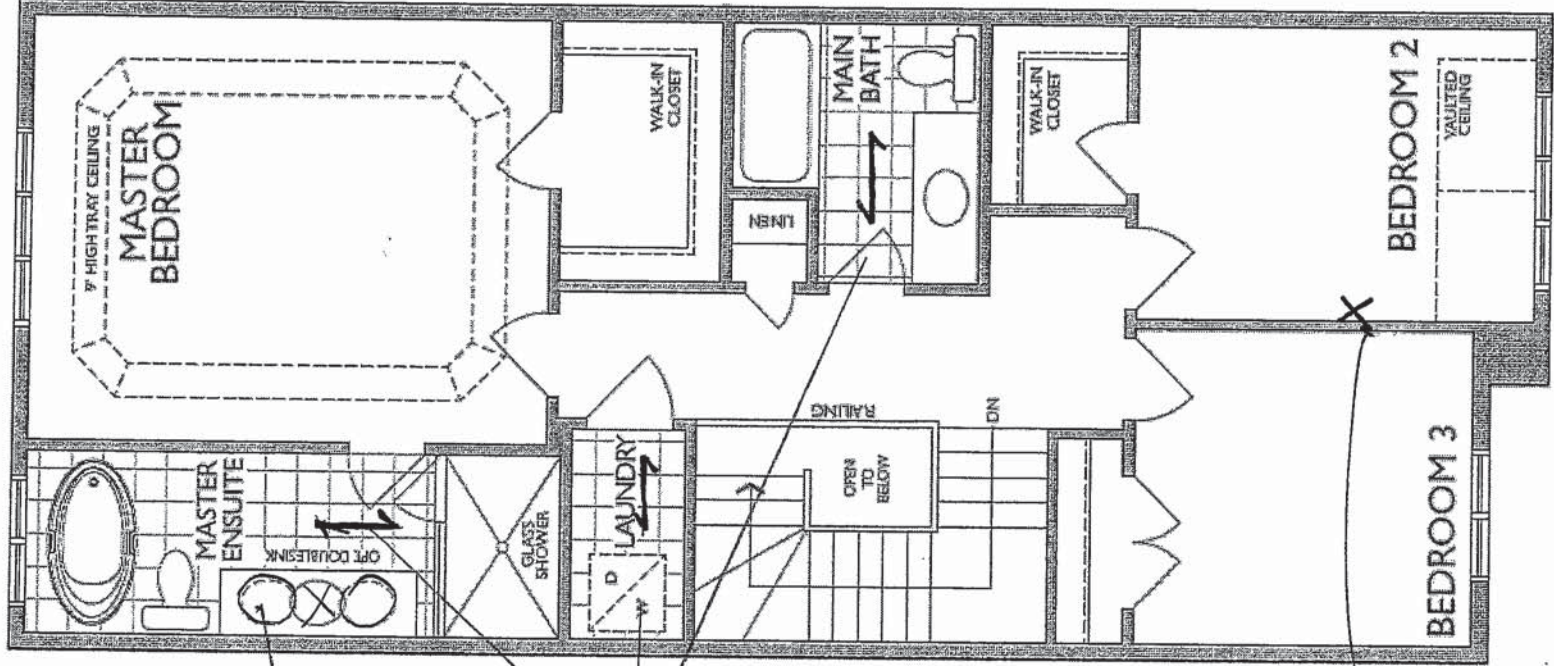

SECOND FLOOR
ELEVATION A

X

opt

G.A

UK 75 WALLACETON
20 - 1606 ELEV A
THE GRASSFIELD
LOT 190B-10

F R E N D E
K I T C H E N S L I M I T E
1350 Shawson Drive, Mississauga, ON L4W 1C



HEATHWOOD HOMES
WALLACETON, KITCHENER
MODEL: 20-1606 (2003)

STANDARD CONTRACT INCLUDES:

- Appliance Openings**
- Hood Opening: 30" W Std. hood
 - Fridge Opening: 37 3/8" W X 73 3/8" H
 - 30cm deep cabinet over fridge
 - Stove Opening: 30" Freestanding
 - Dishwasher Opening: 24"

Standard Kitchens Scope:

- 100cm H wall cabinets
- Std. Blumotion Hinges- soft close doors
- Std. Metabox Drawers- not soft close
- Min 40cm W drawer
- Base pie cut corner cabinets
- Backing on all cabinets
- Countertop by others
- Upgrade applied paneled fridge & dishwashers supply only (appliance hardware by others)

Standard Vanity & Laundry Scope:


- Powder by others, pedestal
- All vanities include laminate counter
- Std. Blumotion Hinges- not soft close
- Tandem Box Drawers- soft close
- Master Ensuite: Top drawers (Full height doors at sink)
- Mains: Full height doors (top drawers added if Masters can't accommodate)
- Optional laundry base & wall cabinets

Sketch # 3

17 of 38


THIS DRAWING IS FOR DESIGN PURPOSES ONLY.
IT IS NOT AN EXACT REPRESENTATION.

STD. BASEMENT BATH



MASTER ENSUITE


(2ND FLR)

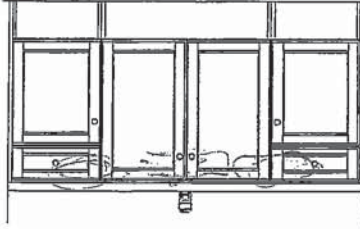


OPT DOUBLE SINKS

MAIN BATH




(2ND FLR)



UPPER ANGLE

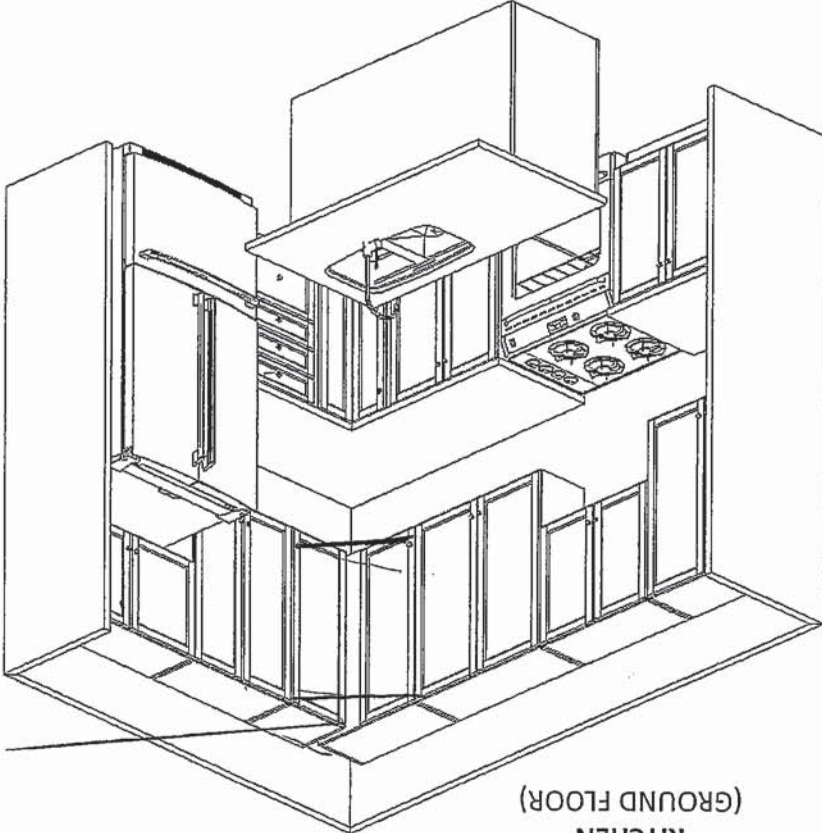


KITCHEN
(GROUND FLOOR)

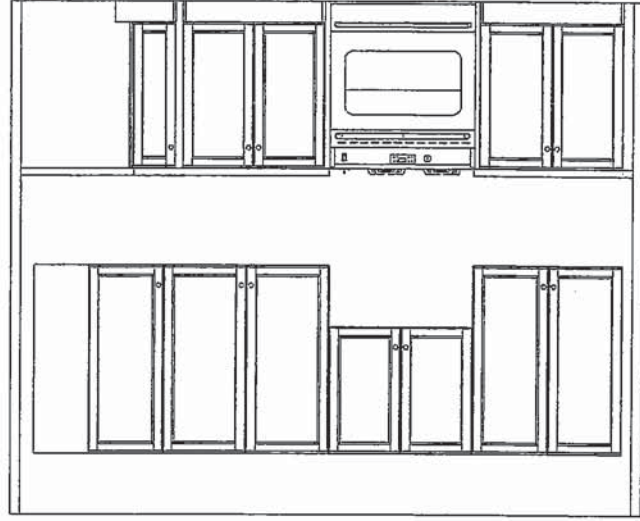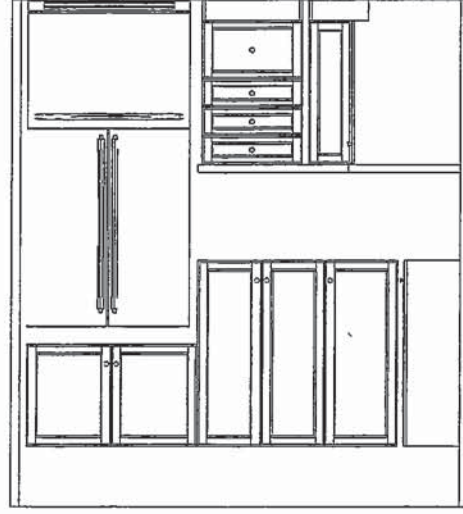

10/23/2019

UK 75 WALLACETON
20-1606 ELEV A
THE GRASSFIELD
LOT 190B-10

18 of 38

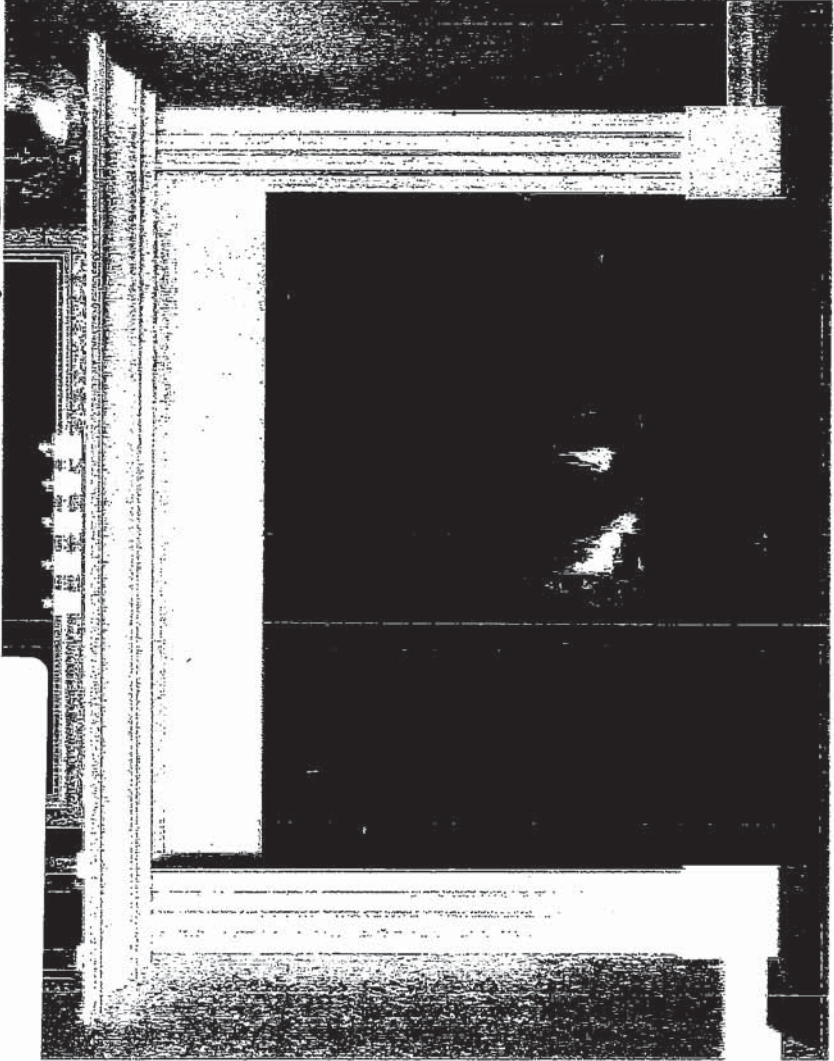


✓ YES

STANDARD NF 15 Mantel

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH - PRICED SEPARATELY)

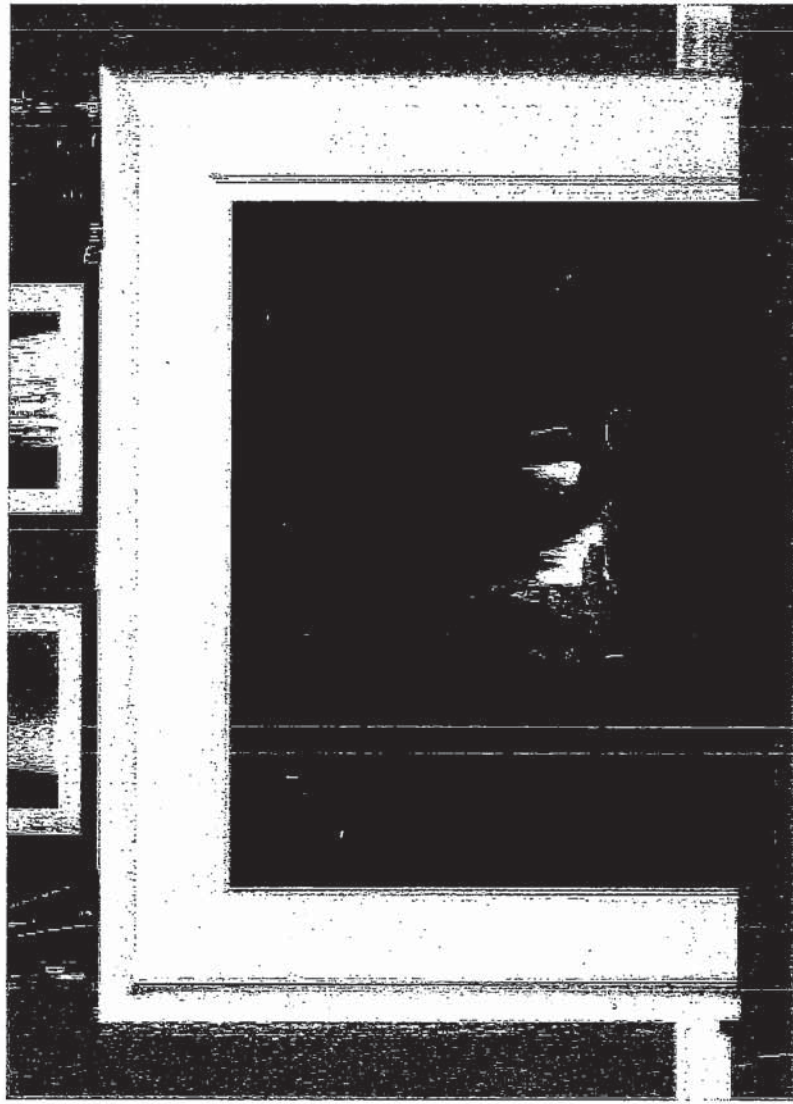

X

STANDARD NF 17 Mantel

WHITE PAINT GRADE FINISH


(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH - PRICED SEPARATELY)

UK 75 WALLACETON
20-1606 ELEV A
THE GRASSFIELD
LOT 190B-10

19th 38

Reginox

ND1831UA/9

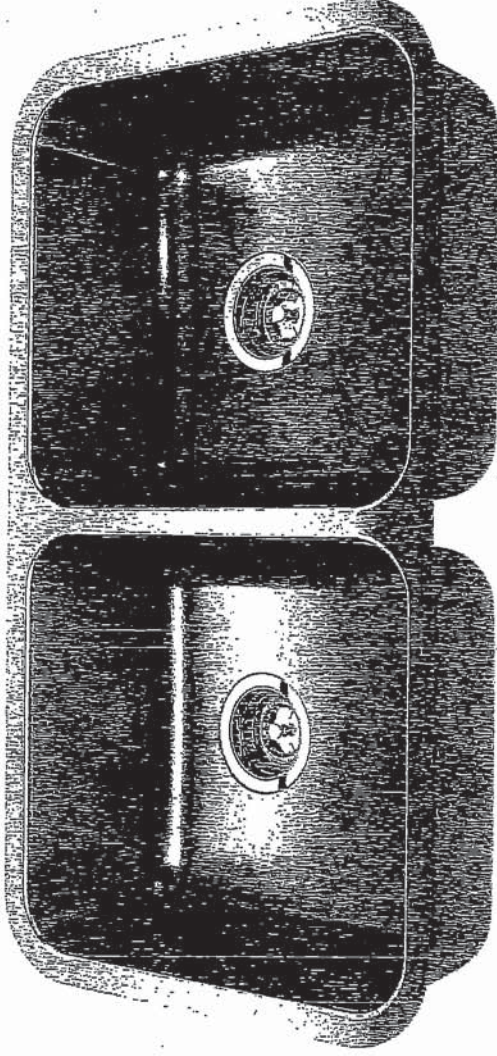

Optional Accessories




BG10S

BG10S

MB100

CA1W

DBR10S

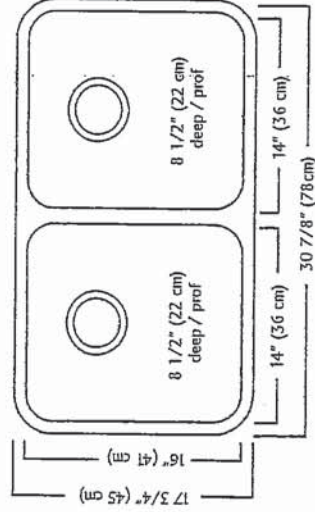

ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited
P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408


UK 75 WALLACETON
20-1606 ELEV A
THE GRASSFIELD
LOT 190B-10

20 of 38

STANDARD KITCHEN FAUCET

Align

Modern

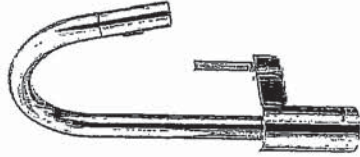

Single Handle Pull-Down Kitchen
Faucet*


Model 7565†

UK 75 WALLACETON
20-1606 ELEV A
THE GRASSFIELD
LOT 190B-10

21 of 38


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP†
(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

UK 75 WALLACETON
20-1606 ELEV A
THE GRASSFIELD
LOT 190B-10

STANDARD HOODFAN FOR
WALLACETON TOWNS AND SINGLES

22 of 38



SPECIFICATIONS
AV SERIES
RANGE HOODS



180 CFM/7.0 Sones @ 0.10" SP. Horizontal
180 CFM/7.5 Sones @ 0.10" SP. Vertical

• **Dimensions**

Overall bottom projection - 18 3/8"
Overall top projection - 12"
Height - 6"
Available widths: 21", 24", 30", 36" & 42"

• **Hood Body**

Stainless Steel: 24 gauge, grade 430 stainless steel.
Painted: 23 gauge cold rolled commercial grade (CRCO) steel, auto welded, coated with a baked enamel finish.

• **Motor**

2 speed, single coil, thermally protected, permanently lubricated.
Rated 120 volts, 60 Hz. Complete with 200°C lead wires.

• **Lighting**

Single 60 watt cook light capacity (bulb not included).

• **Ducting Options**


Horizontal ducting: 3 1/4"x10" (duct adapter and damper included).
Vertical ducting: 3 1/4"x10" (duct adapter and damper included).
Vertical ducting: 7" round (duct adapter and damper not included).
Ductless: removable front vent (charcoal filter not included).

• **Fan Blade**


One piece polymeric, electronically balanced blade. 6 5/8" diameter with 5 paddles.

• **Electrical connection**

Hood top - 7/16" knockout hole for use with 1/2" cable clamp
Hood back - 7/8" knockout hole for use with 1/2" cable clamp

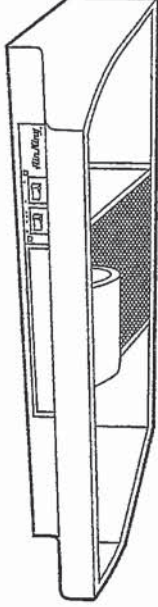

AV SERIES

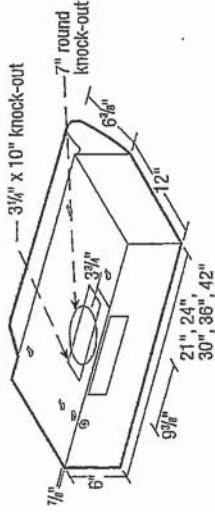

• **Filters**

UL rated, class 2 filter.
Grease Filter: RF35 - 8 7/8"x10 3/8" (included).
Charcoal Filter: RF34 (not included).
Combo Grease/Charcoal: RF55 (not included).

• **Available Finishes**

White, Biscuit, Almond, Black & Stainless Steel.

EXPANDED PERFORMANCE

Air Flow - CFM	Static Pressure (inches of w.g.)						Sones @ .1 SP	Fan Speed RPM	Power Watts	Amps
	0	0.05	0.1	0.15	0.2	0.25				
Vertical Ducting High	246	232	218	203	181	147	7.5	2973	87.0	2.1
Horizontal Ducting High	225	210	180	175	155	120	7.0	3024	87.0	2.1

PROJECT	ARCHITECT		
LOCATION	ENGINEER		
CONTRACTOR	SUBMITTED BY	DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.
		RPM	WATTS
		AMPS	SONES
		QTY	OPTIONAL EQUIPMENT & REMARKS



Air King: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada:
Brampton, Ontario
Tel: 905-456-2033
Fax: (905) 456-1015

Specifications subject to change without notice.

Updated 2-18

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

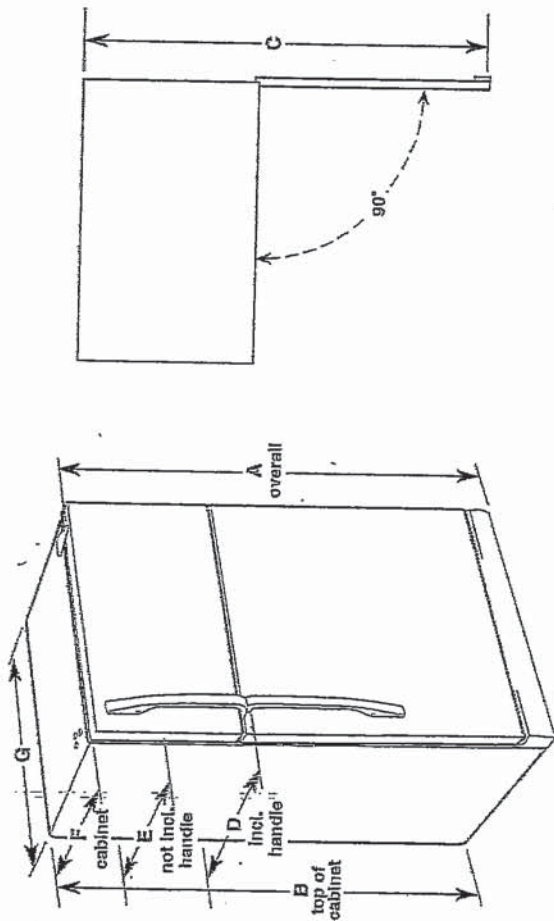

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	32 1/4" (83.5 cm)	30 5/8" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/2" (82.3 cm)	28 1/4" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

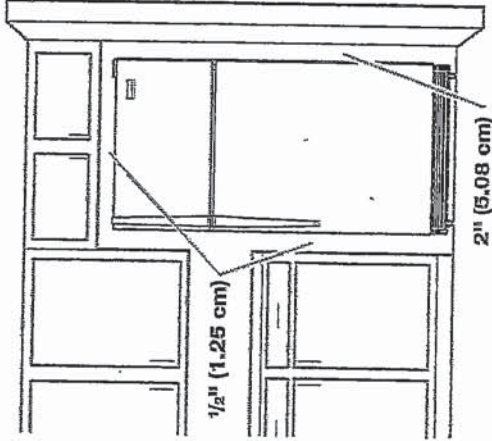

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.





If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

UK 75 WALLACETON
20-1606 ELEV A
THE GRASSFIELD
LOT 190B-10

24 of 38

Refrigerator Door Swing Verification

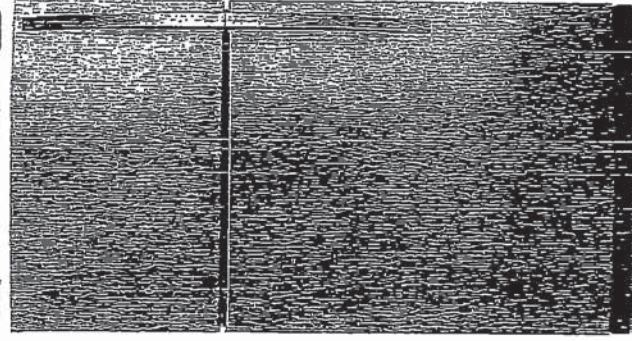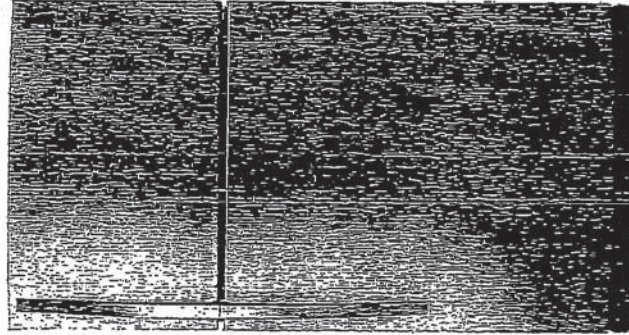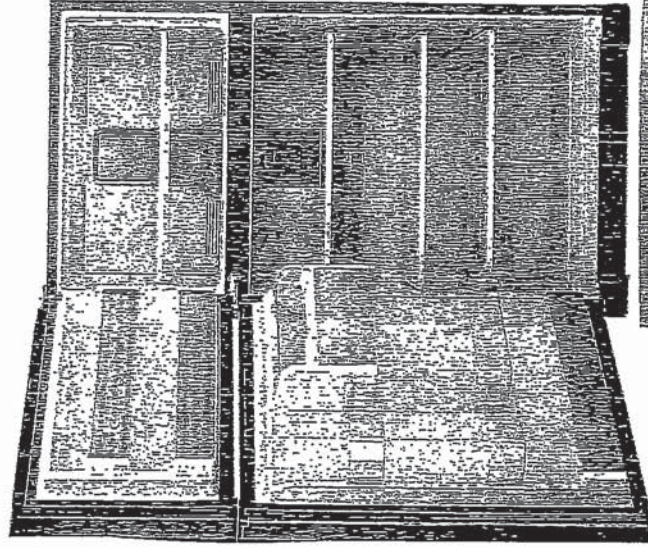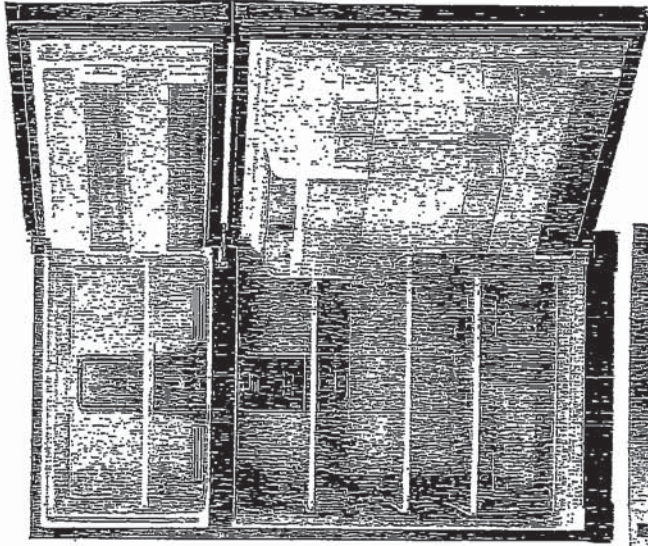

When facing the refrigerator

☐

RIGHT HAND
DOOR OPENING

- Hinges on right
- Handle on left

INITIAL

☒

LEFT HAND
DOOR OPENING

- Hinges on left
- Handle on right

INITIAL

MR

INITIAL

Please check and INITIAL your door swing selection.

30



Black

Universal Silver

Biscuit
Model: WFE610S0AT

White
Model: WFE510SDAW

DIMENSIONS		KEY FEATURES
Height	46 7/8 inches	Eco-Friendly Ceramic Glass Cooktop AccuBake® Temperature Management System 9" / 6" Dual radiant element Traditional Self-Cleaning Oven Large Oven Window Oven Light Custom Broil
Depth	27 3/4 inches	
Width	29 7/8 inches	
Dimensions shown are for planning purposes only. For complete information, see installation instructions packaged with product.		
ELECTRICAL		
40 Amps, 40 Amps Amps, 60 Hz. 120/240 or 120/208 V.		
Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.		

Er. A. H.

UK 75 WALLACETON
20 - 1606 ELEV A
THE GRASSFIELD
LOT 190B-10

26 of 38

Whirlpool® 4.8 cu. ft. Capacity Electric Range with Self-Cleaning System (YWFE510S0... Page 2 of 2

Right Front Element-Burner Type: Glow
Right Rear Element-Burner Power:
Right Rear Element-Burner Size: Single
Right Rear Element-Burner Type:

Oven Features No
Automatic Convection Conversion Temperature Adjust:
Heating Element On Indicator Light: Yes
Hot Surface Indicator Light: Yes
Power On Indicator Light: 2400
Bake Element Power: 3400@240 V
Broiler Element Power: Top of Oven
Broiler Location: None
Convection Element Type: No
Convection Functions: No
Hidden Bake Element: Incandescent
Light Type: 1
Number of Oven Lights: 6
Number of Rack Guides: Thermal
Oven Cooking System: Standard
Oven Rack Type: Self-Cleaning
Self-Cleaning:

Controls
Drawer Type: Storage Drawer
Drawer Type: Metal
Handle Material: Automatic Door Latch, Clock, Control Lock, Sabbath Mode, Timer
Selections: Yes
Sabbath Mode: Yes
UL:

Dimensions
See Dimension Guide for Metric Measurements
Depth: 48 7/8
Height: 28 7/8
Width:

This product has been discontinued, but there may be limited availability at your local retailer. Please visit our Single Oven Freestanding Category page to view all of our current models.

Register this product
Manuals & Literature
Schedule Service

MSRP is Manufacturer's Suggested Retail Price and may not necessarily be the price at which the product is sold in the consumer's area. Dealer alone determines actual price.
© Registered trademark/™ Trademark of Whirlpool, U.S.A. © 2016 Whirlpool Corporation. All Rights Reserved. All other trademarks are owned by their respective companies.

[http://www.whirlpool.ca/en_CA/\[YWFE510S0AS\]-1304408/YWFE510S0AS/](http://www.whirlpool.ca/en_CA/[YWFE510S0AS]-1304408/YWFE510S0AS/)

5/10/2016

✓
G.A

UK 75 WALLACETON
20 - 1606 ELEV A
THE GRASSFIELD
LOT 190B-10

27 of 38



Whirlpool® 30" (76.2 cm) Freestanding Electric Range

PRODUCT MODEL NUMBERS

WFC110M0A	WFE330W0A	WFE530C0A
WFC120M0A	WFE510S0A	WFE540H0A
WFC130M0A	WFE520C0A	WFE710H0A
WFC150MLA	WFE524CLA	WFE714HLA
WFC310S0A	WFE524CLB	WFE720H0A
WFC340S0A	WFE524WLA	WFE910H0A
WFE320M0A	WFE525C0B	

Electrical: To properly install your range, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Range must be connected to the proper electrical voltage and frequency as specified on the model/serial number rating plate. The model/serial number rating plate is located on the left side frame behind the storage drawer panel or behind the top right side of the oven door. Refer to the figures in the "Product Dimensions" section of the "Location Requirements" section.

- This range is manufactured with the neutral terminal connected to the cabinet. Use a 3-wire, UL listed, 40- or 50-amp power supply cord (pigtail) (see following Range Rating chart). If local codes do not permit ground through the neutral, use a 4-wire power supply cord rated at 250 volts, 40 or 50 amps and investigated for use with ranges.

Range Rating*	Specified Rating of Power Supply Cord Kit and Circuit Protection	
	120/208 Volts	Amps
8.8 - 16.5 KW	7.8 - 12.5 KW	40 or 50**
16.6 - 22.5 KW	12.6 - 18.5 KW	50

*The NEC calculated load is less than the total connected load listed on the model/serial rating plate.

**If connecting to a 50-amp circuit, use a 50-amp rated cord with kit. For 50-amp rated cord kits, use kits that specify use with a nominal 1 $\frac{3}{4}$ " (34.9 mm) diameter connection opening.

- A circuit breaker is recommended.

CABINET OPENING DIMENSIONS

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.


IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than $\frac{1}{4}$ " (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than $\frac{1}{4}$ " (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

PRODUCT DIMENSIONS

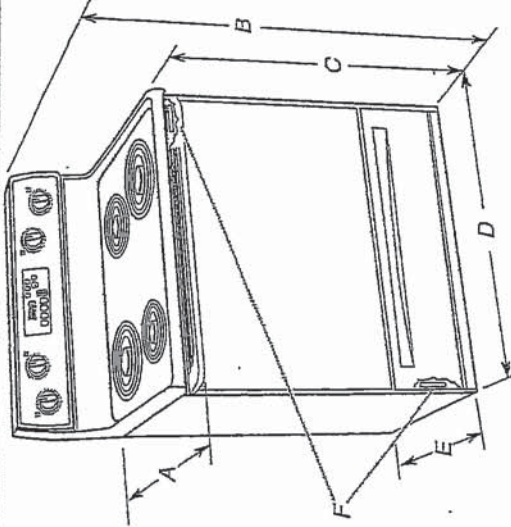

A. 27 $\frac{3}{8}$ " (70.5 cm) max. depth with handle
B. 48 $\frac{7}{8}$ " (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*

D. 29 $\frac{3}{8}$ " (75.9 cm) width


E. 25 $\frac{5}{8}$ " (64.3 cm) depth - back of range to front of cooktop**

F. Model/serial rating plate (located on the left side frame behind storage drawer or right side of frame behind the oven door)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

**Front of door and drawer may extend further forward depending on styling.

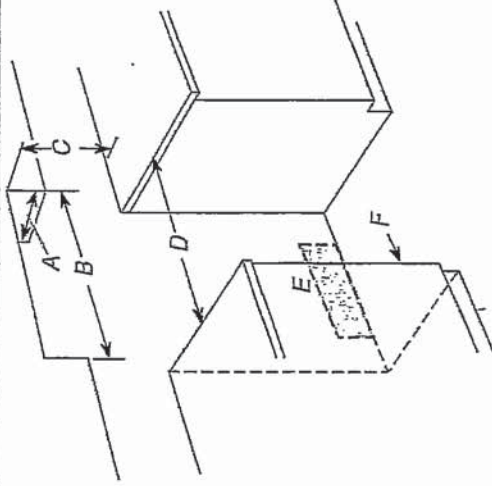

A. 13" (33.0 cm) max. upper cabinet depth

B. 30" (76.2 cm) min. opening width

C. For minimum clearance to top of cooktop, see NOTE*

D. 30 $\frac{1}{8}$ " (76.5 cm) min. opening width

E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 5 $\frac{1}{2}$ " (14.0 cm) max. from floor

F. Cabinet door or hinges should not extend into the cutout

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10403811B
9/10/13

27 of 38
G.A.

28 of 38

3 4

YVFE5150

INSTALLATION REQUIREMENTS

Tools and Parts


Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

Tools needed

- Tape measure
- Flat-blade screwdriver
- Phillips screwdriver
- Level
- Hammer
- Hand or electric drill
- Wrench or pliers
- Marker or pencil
- Masking tape
- 1/4" drive ratchet
- 1/4" nut driver
- 5/8" and 9/16" nut driver
- 1/8" (3.2 mm) drill bit (for wood floors)

Parts supplied

Check that all parts are included.

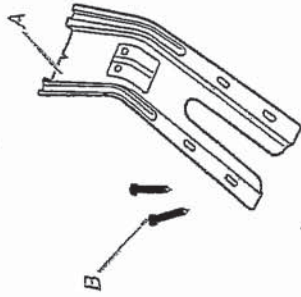

A. Anti-tip bracket
B. #12 x 1 5/8" screws (2)

- Anti-tip bracket must be securely mounted to floor or wall. Thickness of flooring may require longer screws to anchor bracket to floor.

Parts needed

Check local codes. Check existing electrical supply. See "Electrical Requirements" section.

It is recommended that all electrical connections be made by a licensed, qualified electrical installer.

Location Requirements

IMPORTANT: Observe all governing codes and ordinances.

- It is the installer's responsibility to comply with installation clearances specified on the model/serial rating plate. The model/serial rating plate is located on the frame behind a top corner of the door or either side of the drawer.
- To eliminate the risk of burns or fire by reaching over heated surface units, cabinet storage space located above the surface units should be avoided. If cabinet storage is to be provided, the risk can be reduced by installing a range hood that projects horizontally a minimum of 5" (12.7 cm) beyond the bottom of the cabinets.
- Cabinet opening dimensions that are shown must be used. Given dimensions are minimum clearances.
- The anti-tip bracket must be installed. To install the anti-tip bracket shipped with the range, see "Install Anti-Tip Bracket" section.
- Grounded electrical supply is required. See "Electrical Requirements" section.

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).

Mobile Home - Additional Installation Requirements


The installation of this range must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home Construction and Safety, Title 24, HUD Part 280). When such standard is not applicable, use the Standard for Manufactured Home Installations, ANSI A225.1/NFPA 501A or with local codes.

In Canada, the installation of this range must conform with the current standards CAN/CSA-Z240-latest edition, or with local codes.

Mobile home installations require:

- When this range is installed in a mobile home, it must be secured according to the instructions in this document.

Product Dimensions

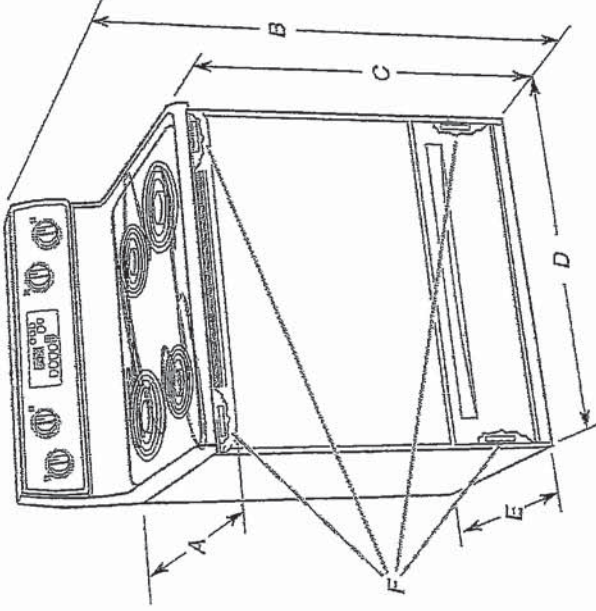

- A. 27 3/4" (70.5 cm) max. depth with handle
- B. 46 1/2" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 28 3/4" (75.9 cm) width
- E. 25 9/16" (64.3 cm) depth - back of range to front of cooktop**
- F. Model/serial rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

**Front of door and drawer may extend further forward depending on styling.

pk 1K
G.A

UK 75 WALLACETON
20 - 1606 ELEV A
THE GRASSFIELD
LOT 190B-10


29 of 38

WIFE SINDO

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

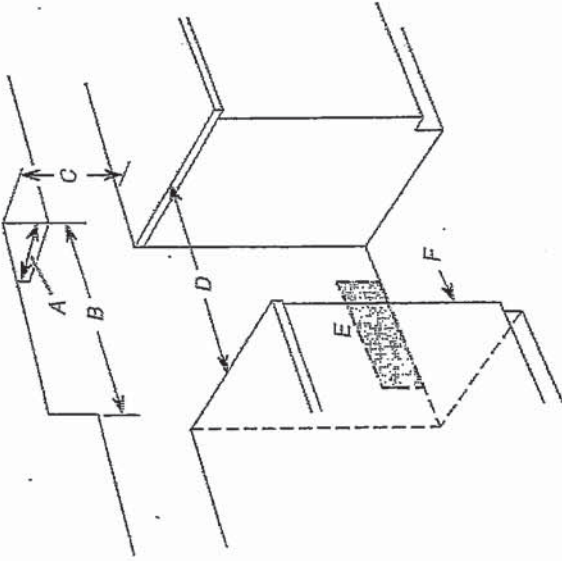

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 31" (78.7 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminium or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Electrical Requirements - Canada Only

A WARNING



Electrical Shock Hazard

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association
178 Rexdale Blvd.
Toronto, ON M9W 1R3 CANADA

- Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*

Specified Rating of Power Supply Cord Kit and Circuit Protection


120/240 Volts	120/208 Volts	Amps
8.8 - 16.5 KW	7.8 - 12.5 KW	40 or 50**
16.6 - 22.5 KW	12.6 - 18.5 KW	50

*The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

**If connecting to a 50-amp circuit, use a 50-amp rated cord with a kit. For 50-amp rated cord kits, use kits that specify use with a nominal 1 1/8" (34.9 mm) diameter connection opening.

- A time-delay fuse or circuit breaker is recommended.

- This range is equipped with a CSA International Certified Power Cord Intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



- Do not use an extension cord.

INSTALLATION INSTRUCTIONS

Unpack Range


A WARNING

Excessive Weight Hazard

Use two or more people to move and install range.

Failure to do so can result in back or other injury.

1. Remove shipping materials, tape and film from range.
2. Remove oven racks and parts package from inside oven.
3. Do not remove the shipping base at this time.



A. Shipping base

W G-A

3003



OTHER AVAILABLE COLORS

Blisquit-on-Biscuit
Model: WDF310PAAT

Universal Silver
Model: WDF310PAAD

DIMENSIONS		KEY FEATURES
Maximum Height	34 1/2 Inches	ENERGY STAR® Qualified
Minimum Height	33 1/2 Inches	No One Has Fewer Repairs 17 Years In A Row
Height	34 1/2 Inches	Resource - Efficient Wash System
Depth	24 1/2 Inches	CEE Tier 1 qualified
Width	23 7/8 Inches	Tall Tub Design
Dimensions shown are for planning purposes only. For complete information, see installation instructions packaged with product.		White Plastic Interior
		Quiet Partner(TM) Sound Package
		Auto Soil Sensor
		Electronic Controls
		3 Automatic Cycles
		1-Hour Wash Cycle
		Heavy Wash Cycle
		Normal Cycle
ELECTRICAL		4 Options
		High Temperature Wash System
		Heated Dry Option
		4 Hour Delay Wash Option
15 Amps Amps. 60 Hz. 120 V. 15,		4-Tier SheerClear® Direct Feed Wash System
		Control Lock
		Vinyl Racks
		In-Rack Silverware Basket
Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.		

2 G.A

3/23

Undercounter Dishwasher

PRODUCT DIMENSIONS

WDF530PSY
WDF540PAD
WDF730PAY
WDT710PAY
WDT720PAD
WDT770PAY


If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.



Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit

instructions for installing the power


Instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



Water Supply Requirements—A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at disinwasher. Use ¾" O.D. copper tubing with compression fitting or flexible braided water supply line (½" minimum plastic tubing is not recommended). Use a 90° elbow with ¾"N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 33955566) that meets all current AHAM/JAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended that the drain hose either be




looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house

plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

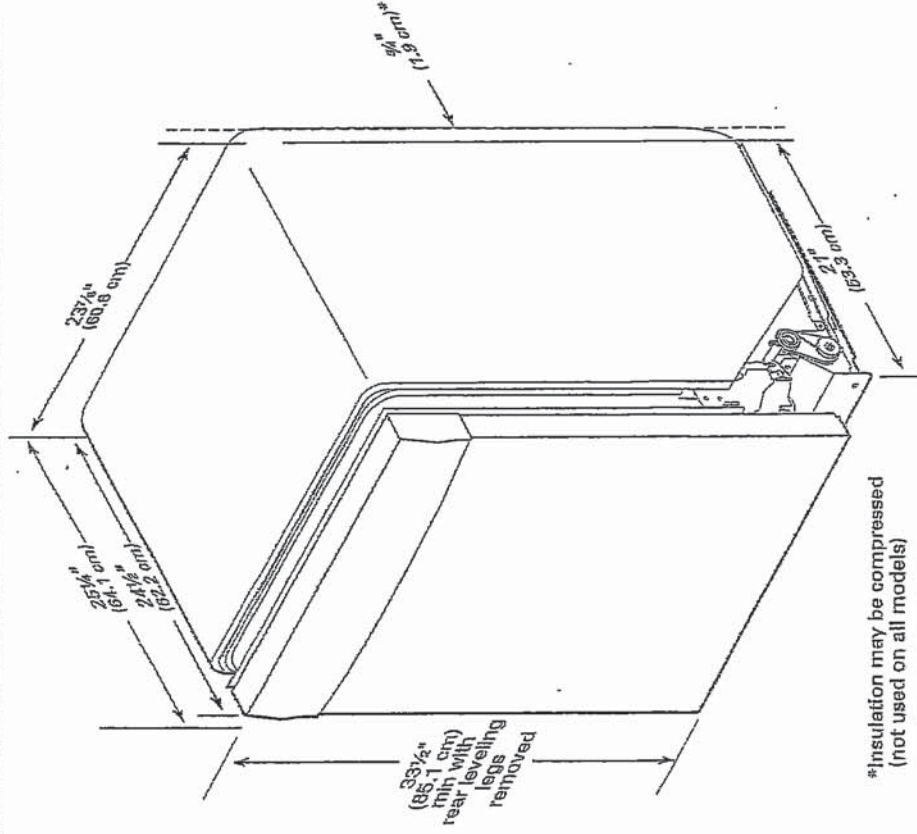

*Insulation may be compressed
(not used on all models)

2 G.A.

UK 75 WALLACETON
20 - 1606 ELEV A
THE GRASSFIELD
LOT 190B-10

32 of 38


CABINET CUTOUT DIMENSIONS

WDF 320 PAB

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

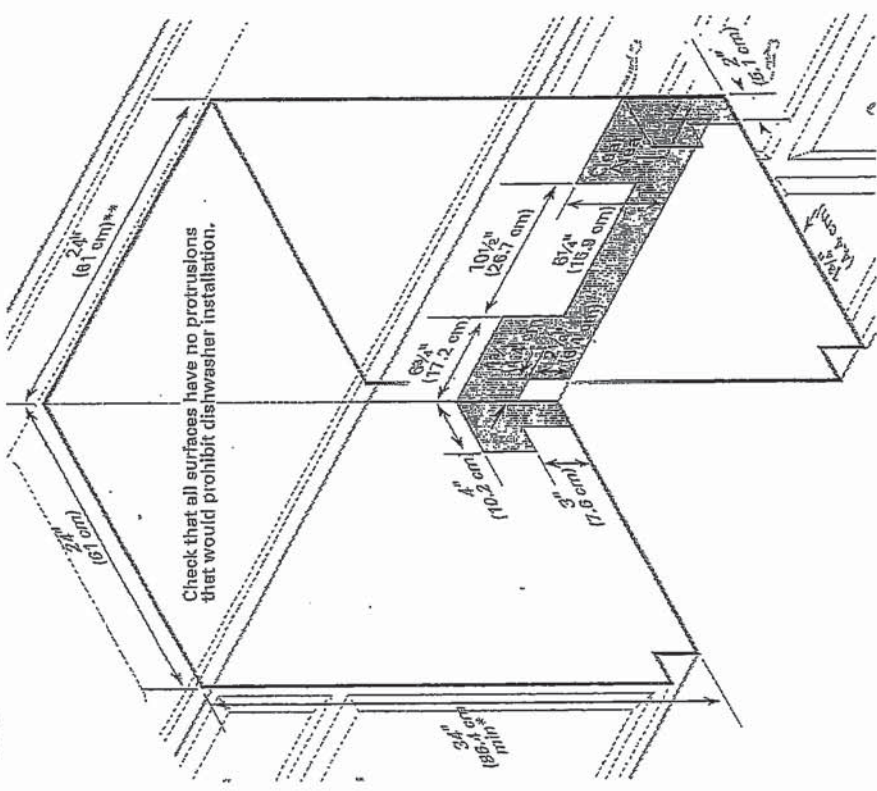


pk G.A

UK 75 WALLACETON
20 - 1606 ELEV A
THE GRASSFIELD
LOT 190B-10

33 of 38

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW

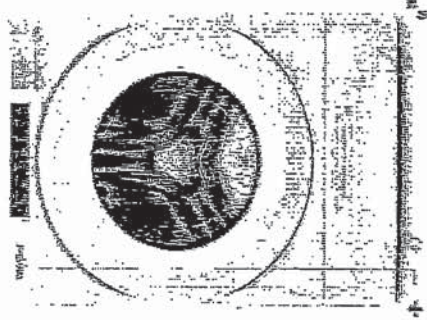

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	86.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD-Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	97
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

Wx
Gr-A

UK 75 WALLACETON
20 - 1606 ELEV A
THE GRASSFIELD
LOT 190B-10

34 of 38

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).


IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

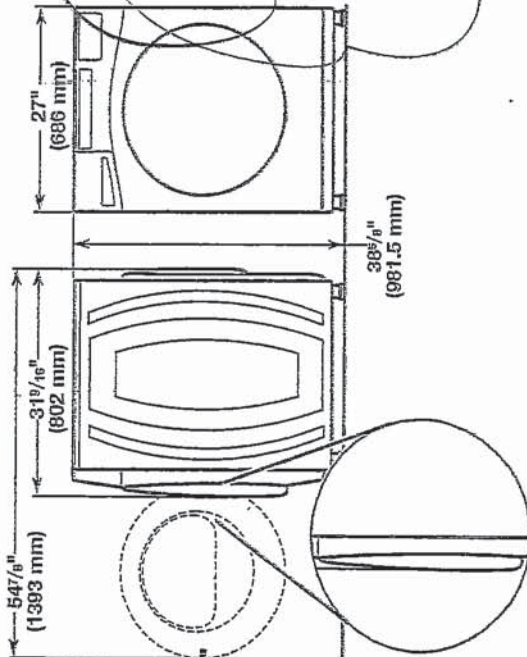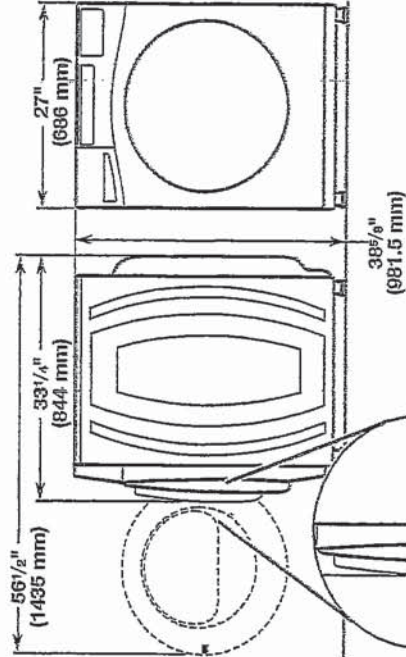

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

Maytag Models

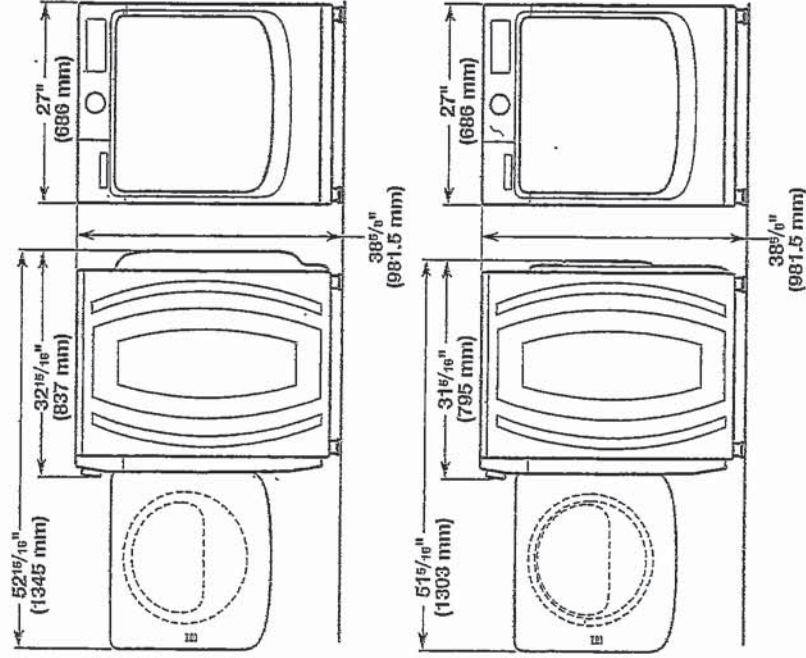


All dimensions show minimum spacing allowed.

For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open.

Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

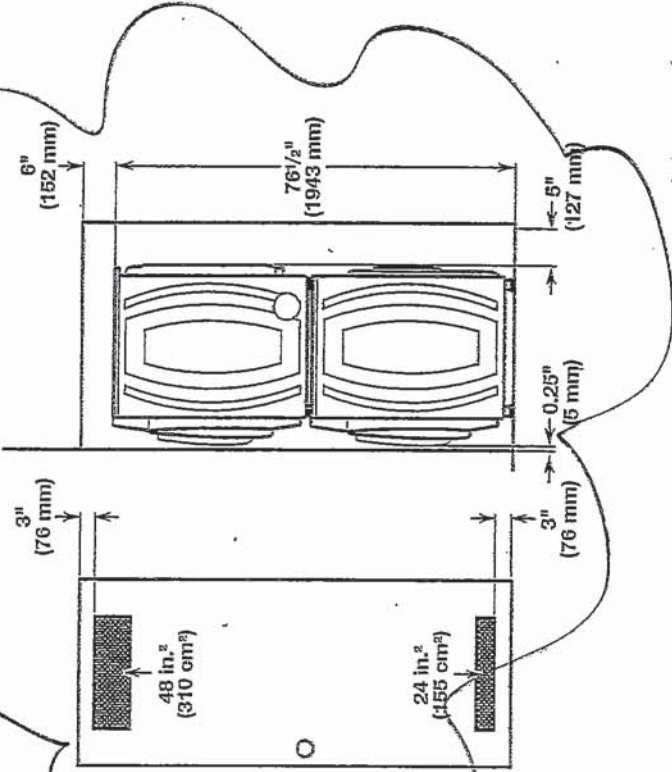


34 of 38

UK 75 WALLACETON
20 - 1606 ELEV A
THE GRASSFIELD
LOT 190B-10


35 of 38

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

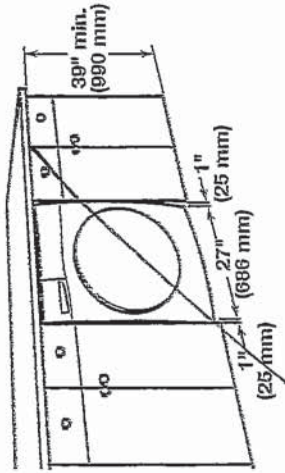

Recessed area or closet installation:

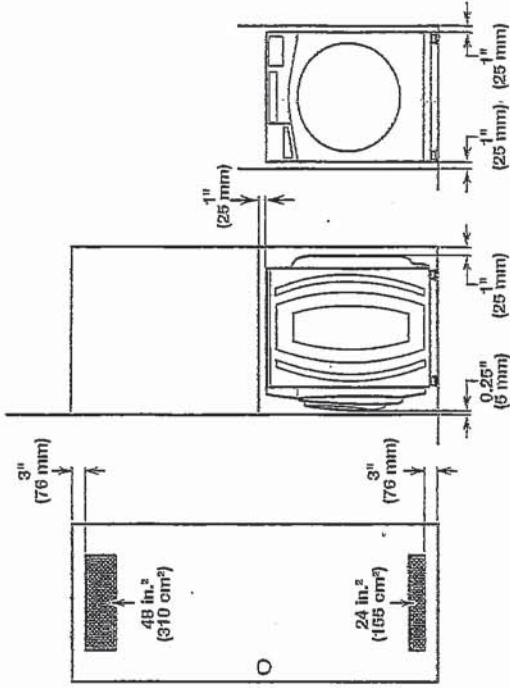

Custom cabinet installation:

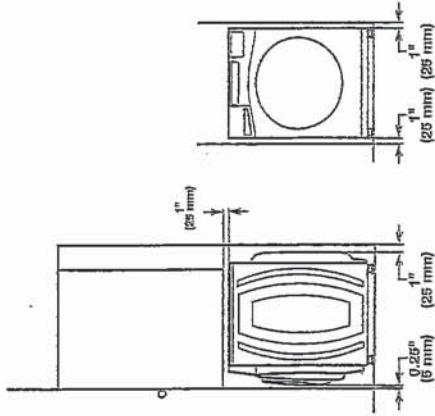


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

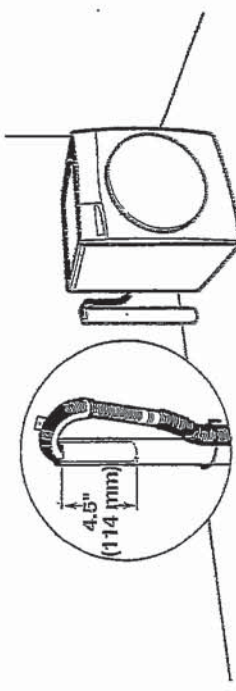


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

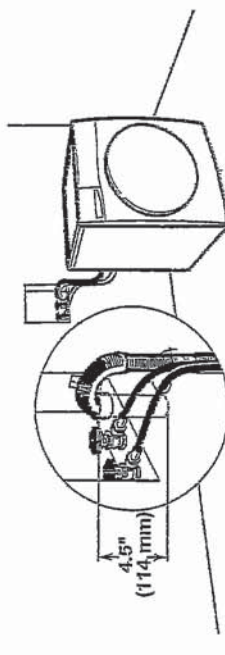

See requirements for floor standpipe drain system.

Laundry tub drain system

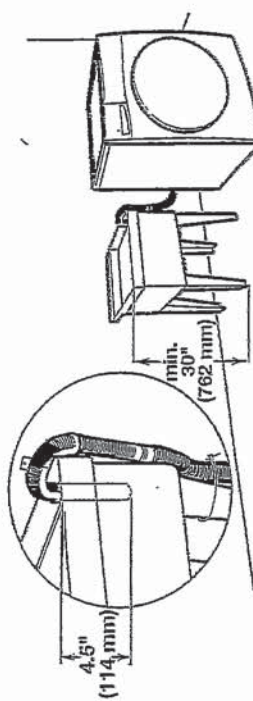

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


✓ G.A

UK 75 WALLACETON
20 - 1606 ELEV A
THE GRASSFIELD
LOT 190B-10

36 of 38

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW

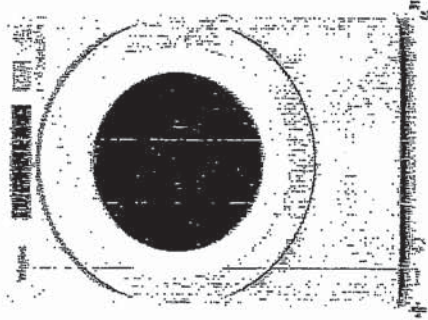

Define Your Style

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls



Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	79.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	99.42 cm, 39-3/4 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	56
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60
----	----

Power Cord Included

Yes


X
✓
G.A

UK 75 WALLACETON
20 - 1606 ELEV A
THE GRASSFIELD
LOT 190B-10

37 of 38

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

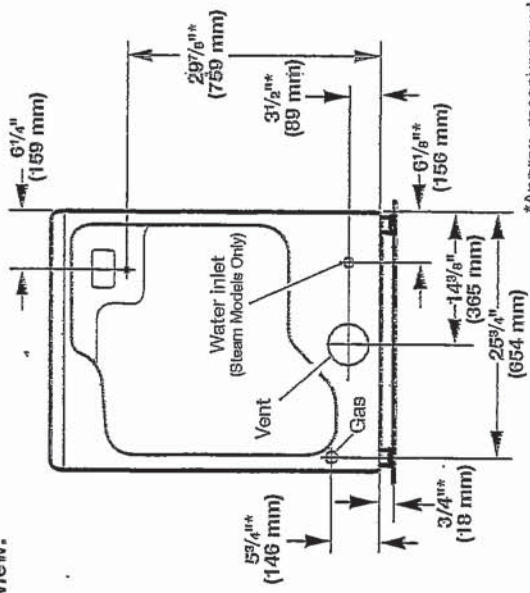

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

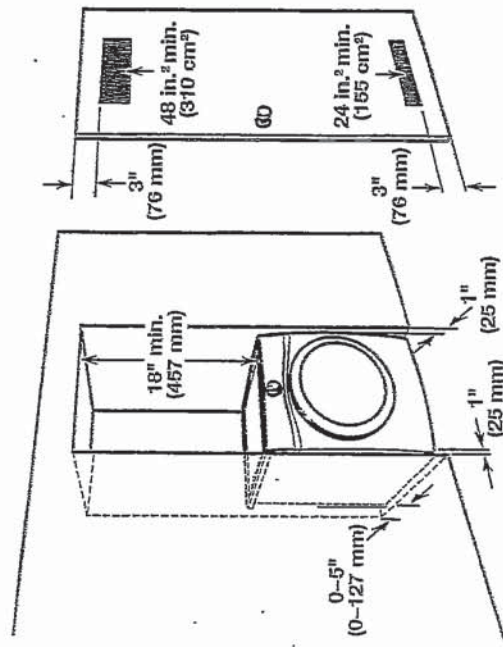

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

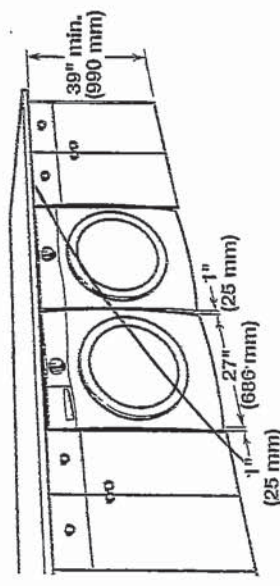

Mobile home - Additional installation requirements:
This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

WJ G.A

38 of 38

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING


Explosion Hazard
Keep flammable materials and vapors, such as gasoline, away from dryer.
Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
Failure to do so can result in death, explosion, or fire.

You will need:


- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS
Front view:

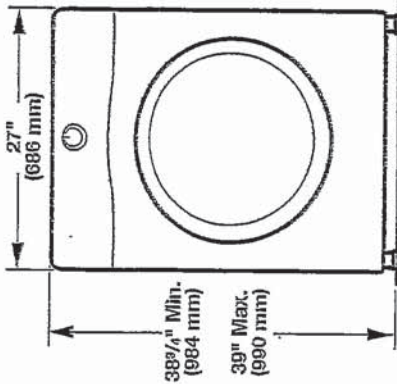

Side view:
Whirlpool Models

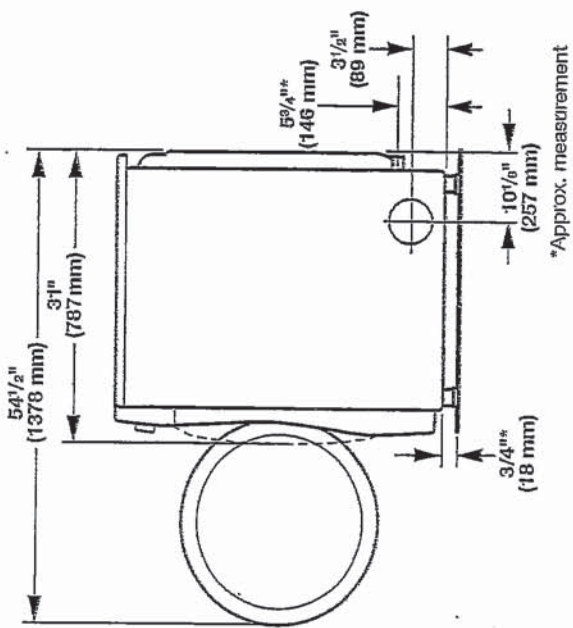

Maytag Models

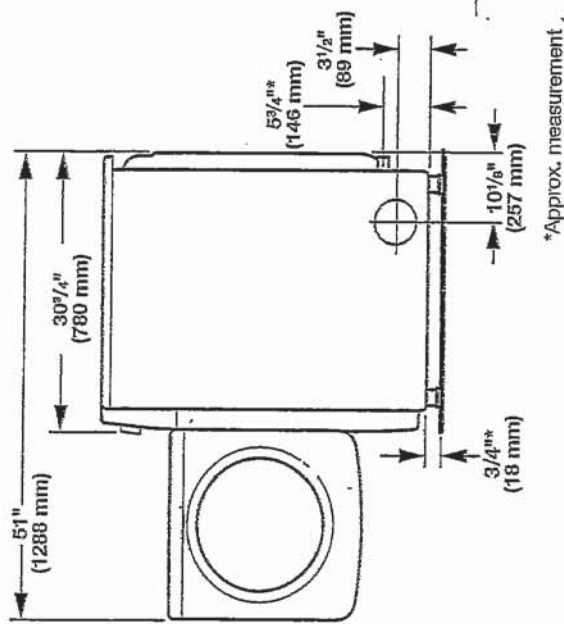

*Approx. measurement.

GA