



PRE-Sales Selection Sheet
Checklist

40 of

LOT 189C-21

20-1790 A The Dunmore

PURCHASER: Model Home Lot 189C-21

TEL: RES.: 416-494-0804

VENDOR: Heathwood Homes (Huron) Limited

- ☒ FINISHED BASEMENT
☐ COLD CELLAR

UPGRADED / MODIFIED ELEVATION

- ☐ CORNER UPGRADE
☐ REAR UPGRADE
☐ WALK OUT DECK
☐ WALK OUT BASEMENT

CEILING UPGRADE - SMOOTH OR KNOCKDOWN

- ☐ MAIN FLOOR
☐ SECOND FLOOR
☐ BASEMENT

ADDITIONAL ROUGH-INS

- ☐ 200 AMP SERVICE
☐ WET BAR ROUGH-IN
☒ HUMIDIFIER

GAS ROUGH-IN

- ☐ STOVE
☐ DRYER
☐ BBQ
☐ ADDITIONAL FIREPLACE

KITCHEN: HOODFAN VENTING SIZE

- ☒ 6 IN ROUND DUCT
☒ 7 IN ROUND DUCT

FULL BASEMENT STAIRS: N/A

UPPER BASEMENT STAIRS: All Oak

LOWER BASEMENT STAIRS: Carpet Grade

MAIN STAIRS: All Oak

MEDIA STAIRS (if applicable): N/A

LOFT STAIRS (if applicable): N/A

Purchaser's Signatures

Model Home

Date July 10/19

UNSOLD

Date

Customer Colours

Model Home Lot 189C-21/
Project: Wallaceton
Unit: 189C-21, Phase: 1
Model: 20-1790 A The Dunmore

Created: 7/8/2019 15:59:44

Locked:

Closed:

2 of 40

Kitchen

Cabinet Colour/Style	6316	Viking III-SIMCOE-ONTARIO WHITE-3DL ***STD***
Countertop	9053	Group 1-Quartz-BAYSHORE SAND ***STD***
Countertop Edge	4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD*** 
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Island Cabinet Colour/Style	6316	Viking III-SIMCOE-ONTARIO WHITE-3DL ***STD***
Island Countertop	9053	Group 1-Quartz-BAYSHORE SAND ***1***
Backsplash	1111	N/A *****
Backsplash Grout	1111	N/A *****
Backsplash Tile Pattern	1111	N/A *****

HoodFan

8907	AIR KING AV SERIES HOODFAN STEEL-30 inch ***STD***
------	---

P25

Comment

Kitchen/Breakfast

Flooring	8894	TR.ST.BYZ.1313-Serpentine-Beyaz/White-13x13 See Tile Line Pattern on Sketch Page ***STD*** S2P14
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	1111	N/A *****

Comment

Foyer

Flooring	8261	TR.ST.BYZ.1313-Serpentine-Beyaz/White-13x13 See Tile Line Pattern on Sketch Page ***STD*** S2P14
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	1111	N/A *****

Model Home Lot 189C-21/
Project: Wallaceon
Unit: 189C-21, Phase: 1
Model: 20-1790 A The Dunmore

Created: 7/8/2019 15:59:44

Locked:

Closed:

3 of 40

Comment

Laundry Room

Flooring

8261

TR.ST.BYZ.1313-Serpentine-Beyaz/White-13x13 See Tile
Line Pattern on Sketch 3 Page 15 ***STD***

S3P15

Floor Tile Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

1111

N/A *****

Comment

Laundry Room Opt.

Cabinet - Uppers

6316

Viking III-SIMCOE-ONTARIO WHITE-3DL ***1***

Cabinet - Base

1111

N/A *****

Cabinet Hardware

2086

9677-HARDWARE ***STD***

Countertop

1111

N/A *****

Countertop Edge

1111

N/A *****

Comment

Mud Room

Flooring

8261

TR.ST.BYZ.1313-Serpentine-Beyaz/White-13x13 See Tile
Line Pattern on Sketch 2 Page 14 ***STD***

S2P14

Floor Tile Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

1111

N/A *****

Comment

Powder Room

Flooring

8261

TR.ST.BYZ.1313-Serpentine-Beyaz/White-13x13 See Tile
Line Pattern on Sketch 2 Page 14 ***STD***

S2P14

Customer Colours

Model Home Lot 189C-21/
Project: Wallaceton
Unit: 189C-21, Phase: 1
Model: 20-1790 A The Dunmore

Created: 7/8/2019 15:59:44

Locked:

Closed:

4 of 40

Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	1111	N/A *****

Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		

Dining Room/Hall		
Flooring	7502	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3 1/4 inch ***STD***
Comment		

Great Room		
Flooring	7502	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3 1/4 inch ***STD***
Comment		

Upper Hall		
Flooring	7630	T-04-Dynasty Tex-T-04-40 oz Poly ***STD***
Comment		

Finished Basement (Rec) Room/Hall		
Flooring	7630	T-04-Dynasty Tex-T-04-40 oz Poly ***STD***
Comment		

Master Bedroom		
Flooring	7630	T-04-Dynasty Tex-T-04-40 oz Poly ***STD***
Comment		

Bedroom 2		
Flooring	7630	T-04-Dynasty Tex-T-04-40 oz Poly ***STD***

Customer Colours

Model Home Lot 189C-21/
Project: Wallaceton
Unit: 189C-21, Phase: 1
Model: 20-1790 A The Dunmore

Created: 7/8/2019 15:59:44

Locked:

Closed:

5 of 40

Bedroom 3

Flooring

7630

T-04-Dynasty Tex-T-04-40 oz Poly ***STD***

Comment

Master Ensuite

Cabinet Colour/Style

6316

Viking III-SIMCOE-ONTARIO WHITE-3DL ***STD***

Countertop

8801

P-344 LM-Countertop-INUKSHUK GREY-Arborite ***STD***

Countertop Edge

1111

N/A *****

Cabinet Hardware

2034

103B-HARDWARE ***STD***

Floor Tile

8261

TR.ST.BYZ.1313-Serpentine-Beyaz/White-13x13 ***STD*** SKETCH # 3 PAGE 15

Floor Tile Grout

2225

Grout-(27) Silver ***STD***

Floor Tile Pattern

1111

N/A *****

Shower Floor Tile

8661

OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***

Shower Floor Tile Grout


2226

Grout-(00) White ***STD***

Shower Floor Tile Pattern

3000

STANDARD SQUARE ***STD***



Shower Wall Tile

9022

QT.WV.TGR.0810-Weave-Tender Grey-8 x 10 ***STD***

Shower Wall Tile Grout


2226

Grout-(00) White ***STD***

Shower Wall Tile Pattern

3090

VERTICAL STACKED ***STD***



Shower Jamb(s) and Sill(s)

8923

Shower Jamb / Sill-Thassos White ***STD***

Plumbing Fixture (colour)

1737

Plumbing Fixtures-WHITE ***STD***

Comment

Customer Colours

Model Home Lot 189C-21/
Project: Wallaceton
Unit: 189C-21, Phase: 1
Model: 20-1790 A The Dunmore

Created: 7/8/2019, 15:59:44
Locked:
Closed:

6 of 40

Main Bathroom

Cabinet Colour/Style	6304	Viking III-SLAB LPL-MERINGUE-LPL ***STD***
Countertop	8800	P-345 LM-Countertop-INUKSHUK TAUPE-Arborite ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2034	103B-HARDWARE ***STD***
Flooring	8623	GE.CM.GRY.1313-Corte Milia-Grey-13 x 13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	1111	N/A *****

Tub Wall Tile

8833	QT.UW.WHT.0810-Uniwall-White-8 x 10 ***STD***
------	---

Tub Wall Tile Grout

2226	Grout-(00) White ***STD***
------	----------------------------

Tub Wall Tile Pattern

3070	HORIZONTAL STACKED ***STD***

Plumbing Fixture (Colour)

1737	Plumbing Fixtures-WHITE ***STD***
------	-----------------------------------

Comment

Finished Basement Bathroom Opt.

Cabinet Colour/ Style	6316	Viking III-SIMCOE-ONTARIO WHITE-3DL ***STD***
Countertop	8801	P-344 LM-Countertop-INUKSHUK GREY-Arborite ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2076	181-HARDWARE ***STD***
Flooring	8261	TR.ST.BYZ.1313-Serpentine-Beyaz/White-13x13 ***STD*** SKETCH # 1 PAGE 13
Floor Tile Grout	2226	Grout-(00) White ***STD***
Floor Tile Pattern	1111	N/A *****

S1P13

Shower Floor Tile

8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
------	---

Model Home Lot 189C-21/
Project: Wallaceton
Unit: 189C-21, Phase: 1
Model: 20-1790 A The Dunmore

Created: 7/8/2019 15:59:44

Locked:

Closed:

7 of 40

Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

Shower Wall Tile	9022	QT.WV.TGR.0810-Weave-Tender Grey-8 x 10 ***STD***
------------------	------	---

Shower Wall Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***

Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***

Comment		
---------	--	--

Great Room Fireplace

Type	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***

Surround Opt.	1111	N/A *****
---------------	------	-----------

Comment		
---------	--	--

Basement Stairs

Type		
Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***

Carpet Runner	1111	N/A *****
---------------	------	-----------

Handrail/Pickets/Post Type	7652	1 5/16 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK Towns Only ***STD***
----------------------------	------	--

Handrail/Pickets/Post Colours	1728	Stain all Oak Grade include Wood Pickets ***99***
Carpet	7630	T-04-Dynasty Tex-T-04-40 oz Poly ***STD***

Custom Stain/Paint	1111	N/A *****
--------------------	------	-----------

Comment		
---------	--	--

Basement Stairs Landing(s)

Flooring	1111	N/A *****
----------	------	-----------

Customer Colours

Model Home Lot 189C-21/
Project: Wallaceton
Unit: 189C-21, Phase: 1
Model: 20-1790 A The Dunmore

Created: 7/8/2019 15:59:44

Locked:

Closed:

8 of 40

Comment

Main Stairs

Type	1712	Oak Stairs ***STD***
Colour	7922	Eclipse (Pewter) STAIN TO COMPLEMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Posts Type	7652	1 5/16 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK Towns Only ***STD***
Handrail/Pickets/Posts Colour	1728	Stain all Oak Grade include Wood Pickets ***99***
Custom Stain/Paint	1111	N/A *****

Comment

Main Stairs Landing(s)

Flooring	7922	RED OAK PEARL-VINTAGE ENGINEERED ECLIPSE 3/4 inch x 3 1/4 inch * STD *
----------	------	--

Comment

Throughout

Walls - Paint Colour	1717	22-Wall-WARM GREY ***STD***
Underpad	1079	500 Series-Underpad ***STD***
Thresholds	2232	Metal Thresholds ***STD***
Switches and Plug	5796	Decora White Switches and Plugs ***STD***
Trim Size	8705	4 1/4 Baseboard and 2 3/4 Casings ***STD***

Trim - Paint Colour

1716 Trim-WHITE ***STD***

Comment CUSTOM PAINT COLOURS OR WALLPAPER IF APPLICABLE TO FOLLOW FROM ESQAPE DESIGN

Purchaser:

MODEL

July 10/19

MARILYN ROSEN

July 10/19

Model Home Lot 189C-21

Decor Consultant

Date

Purchaser:

UNSOLD

July 10/19

Wallaceton

Date Approved

- APPROVED -

-07-10 2019

M. Rosen



Sales Selection Sheet
Wallaceton

9 of 40

PURCHASER: Model Home Lot 189C-21

TEL: RES.: 416-494-0804

LOT / UNIT 189C-21	PHASE 1	MODEL 20-1790 A The Dunmore
-----------------------	------------	--------------------------------

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

APPLIANCES

*1 68,500 4,423	HOOD FAN - STANDARD 30" AIR KING AV SERIES STAINLESS HOODFAN Note: SEE SPECS PAGE 25	Qty: 1
2 5,057	SEE APPLIANCE PAGES 26-40 Note:	Qty: 1

CABINETRY / ELE

*3 68,509 4,427	LOWER VALANCE TRIM WITH LIGHT INCLUDING SWITCH (LUMINIZ LED SLIMLINE STRIP LIGHT) Note:	Qty: 1
-----------------------	--	--------

CABINETRY GENI

*4 68,648 4,428	11A- UPPER ANGLE CORNER PER UNIT - VIKING Note: SEE SKETCH # 2 PAGE 14	Qty: 1
*5 68,570 5,063	04H- 66CM DEEP FRIDGE ENCLOSURE (COUNTER DEPTH) INCLUDES [1] 66CM DEEP CABINET AND [1] 66CM DEEP GABLE (1-WALL BESIDE FRIDGE) (NOTE: THIS IS NOT A ZERO CLEARANCE ENCLOSURE. STANDARD HEIGHTS AND WIDTHS WILL BE USED) - Note: SKETCH 2 PAGE 14	Qty: 1

ELECTRICAL

*6 69,042 5,055	POTLIGHT - POTLIGHT BUNDLE - 8 X T477GR-W 4" LINE VOLTAGE POTLIGHTS INSTALLED ON MAIN FLOOR INCLUDES 2 SWITCHES - Note: 6 IN FINISHED BASEMENT WITH ONE SWITCH, 4 IN KITCHEN ON ONE SWITCH, RELOCATE STANDARD KITCHEN LIGHT CENTERED +/- ABOVE ISLAND, 4 IN BREAKFAST ROOM ON ONE SWITCH, 6 IN GREAT ROOM ON ONE SWITCH AND 4 IN DINING ROOM ON ONE SWITCH KEEP STANDARD LIGHTS IN THESE ROOMS. SEE SKETCH 1, 2 & 4 PAGES 13, 14 & 15	Qty: 3
*7 69,007 5,059	USE THIS CODE/FEE FOR RELOCATION OF SWITCHES/LIGHTS (MUST SPECIFY LOCATION) - NOTE: PLUGS CANNOT BE RELOCATED - MUST PURCHASE ADDITIONAL OUTLET. Note: KITCHEN-RELOCATE STD. KITCHEN LIGHT TO ABOVE THE ISLAND SEE SKETCH 2 PAGE 14 *Use this code/fee for relocation of switches/lights (must specify location) - note: plugs cannot be relocated - must purchase additional outlet.	Qty: 1
8 5,065	INSTALL KILL SWITCH FOR MODEL PURPOSES IN FRONT FOYER HALL LOCATION TBC Note:	Qty: 1

GLASS AND MIRR

TAX#:1

PREPARED BY: Bei Liu

PE 31-1

Slrvoice.rpt 28may19



Sales Selection Sheet

Wallaceton

10 of 40

PURCHASER: Model Home Lot 189C-21

TEL: RES.: 416-494-0804

LOT / UNIT 189C-21	PHASE 1	MODEL 20-1790 A The Dunmore
-----------------------	------------	--------------------------------

GLASS AND MIRR

9	SUPPLY AND INSTALL GOLD FRAMED SHOWER ENCLOSURE IN LIEU OF CHROME FRAMED	Qty: 1
5,050	Note: MASTER ENSUITE	

HEATING / AIR

*10 69,115	OPTIONAL HUMIDIFIER -	Qty: 1
4,424	Note:	

PLUMBING

*11 69,283	MOEN -ALIGN - KITCHEN - SINGLE HANDLE PULLDOWN KITCHEN FAUCET BRUSHED GOLD (MODEL: 7565BG)	Qty: 1
4,425	Note: KITCHEN/BREAKFAST PAGE 18	
*12 69,426	BLANCO PRECIS U SINGLE 27 BOWL UNDERMOUNT SINK MODEL 401893 TRUFFLE	Qty: 1
4,426	Note: KITCHEN PAGE 17	
13	BOULEVARD PEDESTAL SINK - FAUCET HOLES ON 8" CENTERS	Qty: 1
4,507	Note: POWDER ROOM PAGE 19	
14	ALIGN TWO HANDLE 8" WIDESPREAD FAUCET BRUSHED GOLD MODEL T6193/69000 BG	Qty: 1
4,508	Note: POWDER ROOM PAGE 21	
15	2 X COLONY COUNTERTOP SINKS MODEL 0346 001 CENTER HOLE ONLY WHITE	Qty: 2
4,509	Note: MASTER BATHRRROM PAGE 20	
16	2 X COLONY COUNTERTOP SINKS MODEL 0346 001 CENTRE HOLE ONLY WHITE	Qty: 2
4,510	Note: MAIN BATHROOM PAGE 20	
17	2 X MOEN ALIGN SINGLE HANDLE LAV FAUCET BRUSHED GOLD MODEL 6190 BG	Qty: 2
4,511	Note: MASTER ENSUITE PAGE 21	
18	2 X MOEN ALIGN SINGLE HANDLE LAV FAUCET BRUSHED GOLD MODEL 6190 BG	Qty: 2
4,512	Note: MAIN BATHROOM PAGE 21	
*19 70,554	MOEN -ALIGN - POSI-TEMP ECO-PERFORMANCE PRESSURE BALANCED TUB/SHOWER BRUSHED GOLD (MODEL: 62320/T2193EP BG) -	Qty: 1
5,047	Note: MAIN BATHROOM PAGE 23	
*20 70,557	MOEN -ALIGN - POSI-TEMP WITH 3 FUNCTION DIVERTER VALVE, SLIDE BAR WITH HAND HELD AND SHOWERHEAD (LESS TUB SPOUT) BRUSHED GOLD (MODEL: 62320/3372/T4191/T2192EP/3887EP/A725) -	Qty: 1
5,051	Note: MASTER ENSUITE PAGE 22	

TAX#:1

PREPARED BY: Bei Liu

PE 31-2

SlInvoice.rpt 28may19



Sales Selection Sheet
Wallaceton

11040

PURCHASER: Model Home Lot 189C-21

TEL: RES.: 416-494-0804

LOT / UNIT 189C-21	PHASE 1	MODEL 20-1790 A The Dunmore
-----------------------	------------	--------------------------------

PLUMBING

*21 70,541 5,052	MOEN -ALIGN - 4 PIECE ROMAN TUB - BRUSHED GOLD (MODEL: 9796/T394BG) - Note: MASTER BATHROOM PAGE 21	Qty: 1
22	STANDARD CHATEAU CHROME PLUMING FIXTURES	Qty: 1
5,053	Note: FINISH BATHROOM	
23	STANDARD WHITE TOILETS THROUGHOUT	Qty: 1
5,054	Note:	
24	ALIGN ACCESSORIES IN BG BRUSHED GOLD	Qty: 1
5,056	Note: 3 X PIVOTING PAPER HOLDER MODEL YB0408 BG IN POWDER ROOM, MAIN BATH AND MASTER ENSUITE, 1 X 18" TOWEL BAR MODEL YB0418 BG IN MAIN BATH 1 X 24" TOWEL BAR MODEL YB0424 BG IN MASTER ENSUITE AND 1 X TOWEL RING MODEL YB0486 BG IN POWDER ROOM SEE SKETCH 2 & 3 PAGES 14 & 15 AND SPEC PAGE 24	

PLUMBING FIXTU

25 5,064	SUPPLY AND INSTALL MOEN ALIGN BRUSHED GOLD ACCESSORIES 3 X PAPER HOLDER MODEL YB0408BG IN MASTER ENSUITE, MAIN BATH AND POWDER ROOM 18" TOWEL BAR MODEL YB0418BG IN MAIN BATH, 24" TOWEL BAR MODEL YB0424 IN MASTER ENSUITE, TOWEL RING YB0486BG IN POWDER Note: SEE PAGE 23	Qty: 1
-----------------	--	--------

Sub Total
HST
Total

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment Summary	
<u>Paid By</u>	<u>Amount</u>
<u>Total Payment:</u>	

TAX#:1

PREPARED BY: Bei Liu

PE 31-3

Slrvoice.rpt 28may19

Initials:



PURCHASER: Model Home Lot 189C-21

Sales Selection Sheet

Wallaceton

TEL: RES.: 416-494-0804

LOT / UNIT	PHASE	MODEL
189C-21	1	20-1790 A The Dunmore

PURCHASER:

Model

Model Home Lot 189C-21

10-Jul-19

DATE

MARILYN ROSEN

Decor Consultant

10-Jul-19

DATE

- APPROVED -

-07-10-2019

MBRAN

Date Approved Heathwood Homes (Huron) Limited

TAX#:1

PREPARED BY: Bei Liu

PE 31-4

S\invoice.rpt 28may19

UK-75 WALLACETON
LOT 189C-21
20-1790 ELEV A
THE DUNMORE


13 of 40

20-1790 ELEV. A

SKETCH #1

THE DUNMORE

ELEVATION A | 2,233 SQ. FT.
Includes 443 square feet of finished lower level

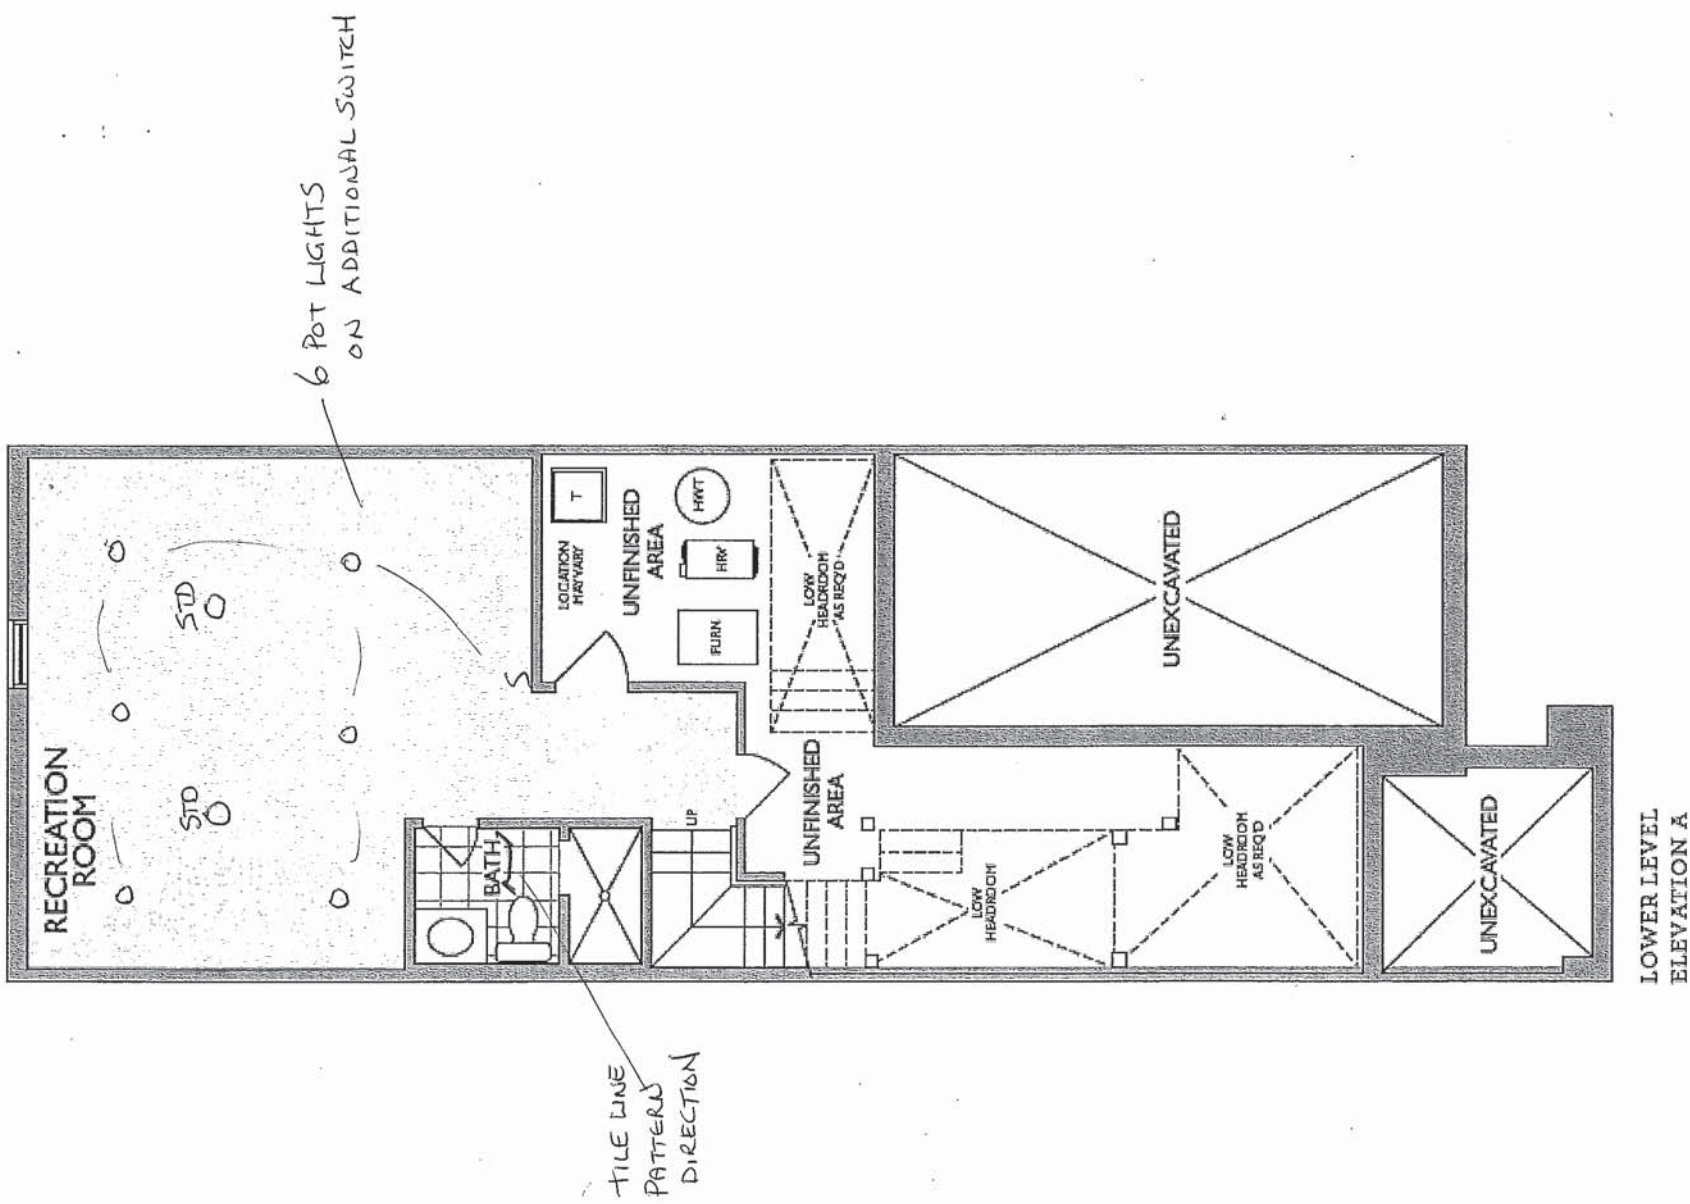

UK-75 WALLACETON

LOT 189C-21


20-1790 ELEV A

THE DUNMORE

14A 40
OF




20-1790 ELEV. A

Sketch #2A

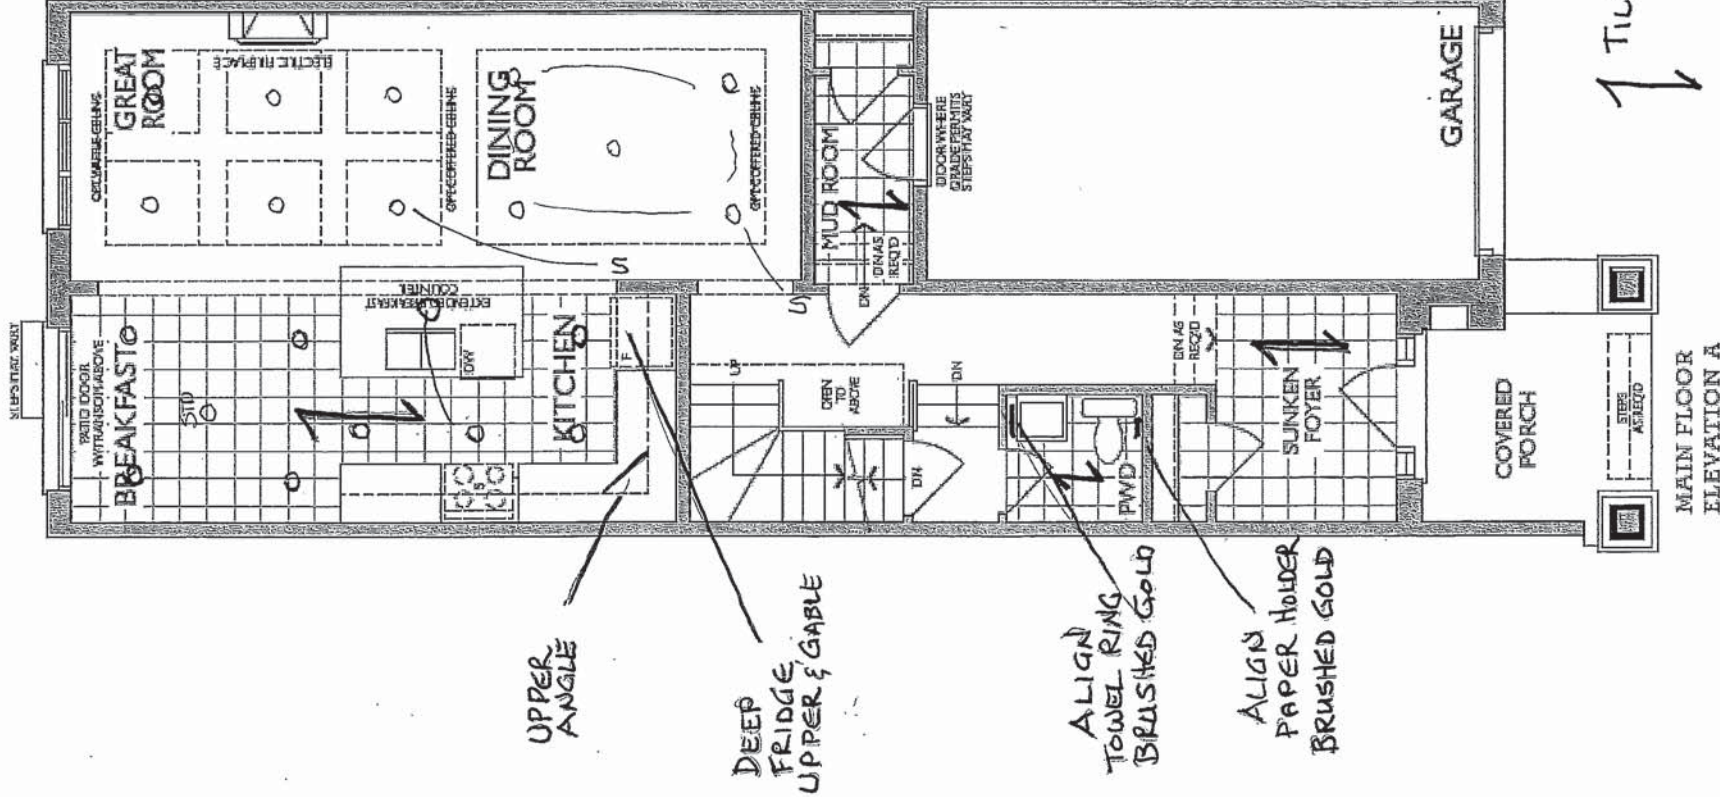


UK-75 WAKKACETIB
LOT 189C-21
20-1790 ELEV A
THE DUNMORE

KITCHEN (GROUND FLOOR)

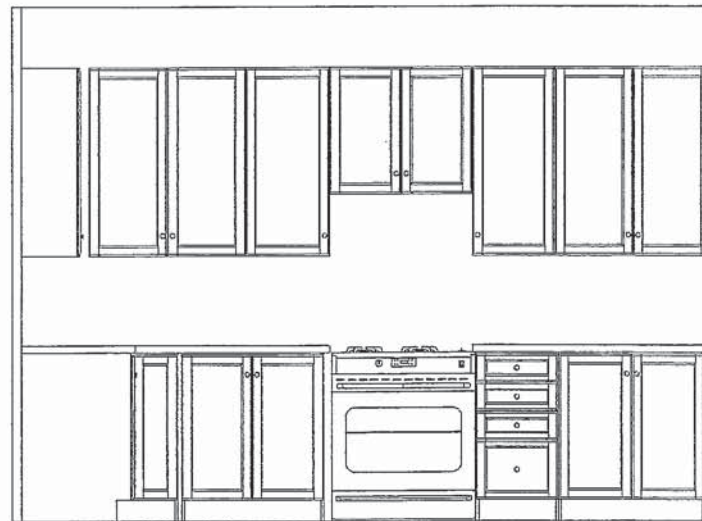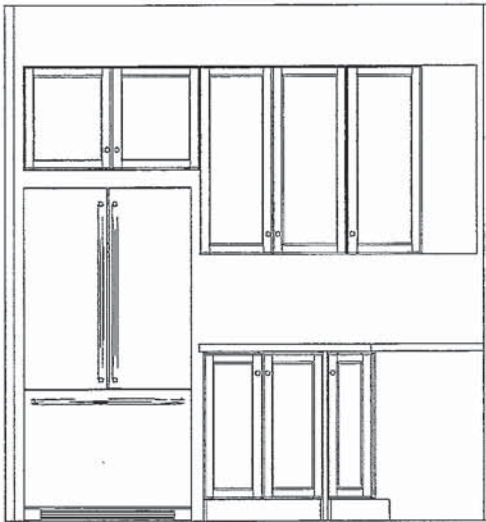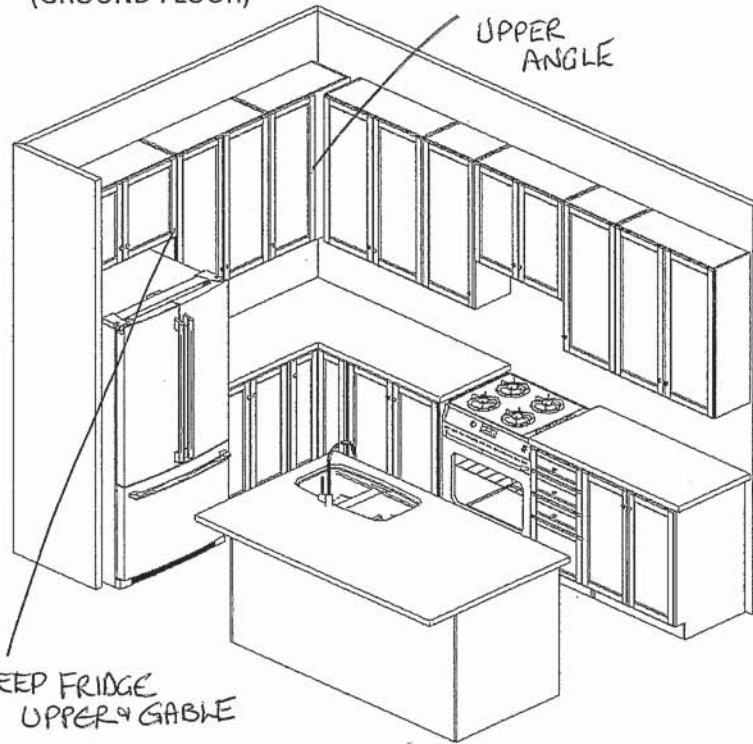


5/13/2019


MASTER ENSUITE (2ND FLR)

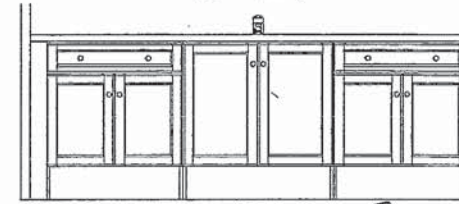


↑ OPT DOUBLE
MAIN BATH SINKS
(2ND FLR)

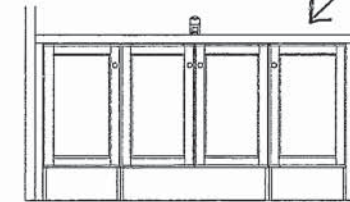

OPT. LAUNDRY UPPERS
(2ND FLR) ✓

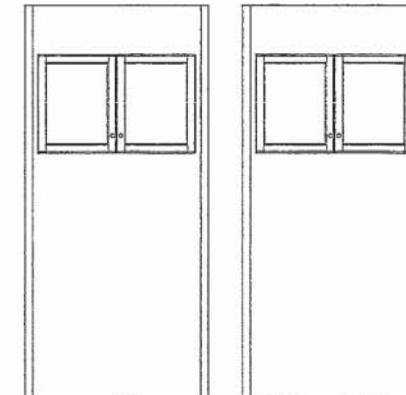

STD. BASEMENT BATH



HEATHWOOD HOMES WALLACETON, KITCHENER MODEL: 20-1790 (2004)

STANDARD CONTRACT INCLUDES:

Appliance Openings

- Hood Opening: 30" W Std. hood
- Fridge Opening: 37 3/8" W X 73 3/8"
- 30cm deep cabinet over fridge
- Stove Opening: 30" Freestanding
- Dishwasher Opening: 24"

Standard Kitchens Scope:

- 100cm H wall cabinets
- Std. Blumotion Hinges- **soft close d**
- Std. Metabox Drawers- **not soft clo**
- Min 40cm W drawer
- Base pie cut corner cabinets
- Backing on all cabinets
- Countertop by others
- Upgrade applied paneled fridge & dishwashers supply only (appliance hardware by others)

Standard Vanity & Laundry Scope:

- Powder by others, pedestal
- All vanities include laminate count
- Std. Blumotion Hinges- **not soft clo**
- Std. Metabox Drawers- **not soft clo**
- Master Ensuite: Top drawers (Full height doors at sink)
- Mains: Full height doors (top drawers added if Masters can't accommodate)
- Optional laundry base & wall cabinets


THIS DRAWING IS FOR DESIGN PURPOSES ONLY
IT IS NOT AN EXACT RENDITION.

UK-75 WALLACETON
LOT 189C-21
20-1790 ELEV A
THE DUNMORE

15 of 40

SKETCH #3


20-1790 ELEV. A

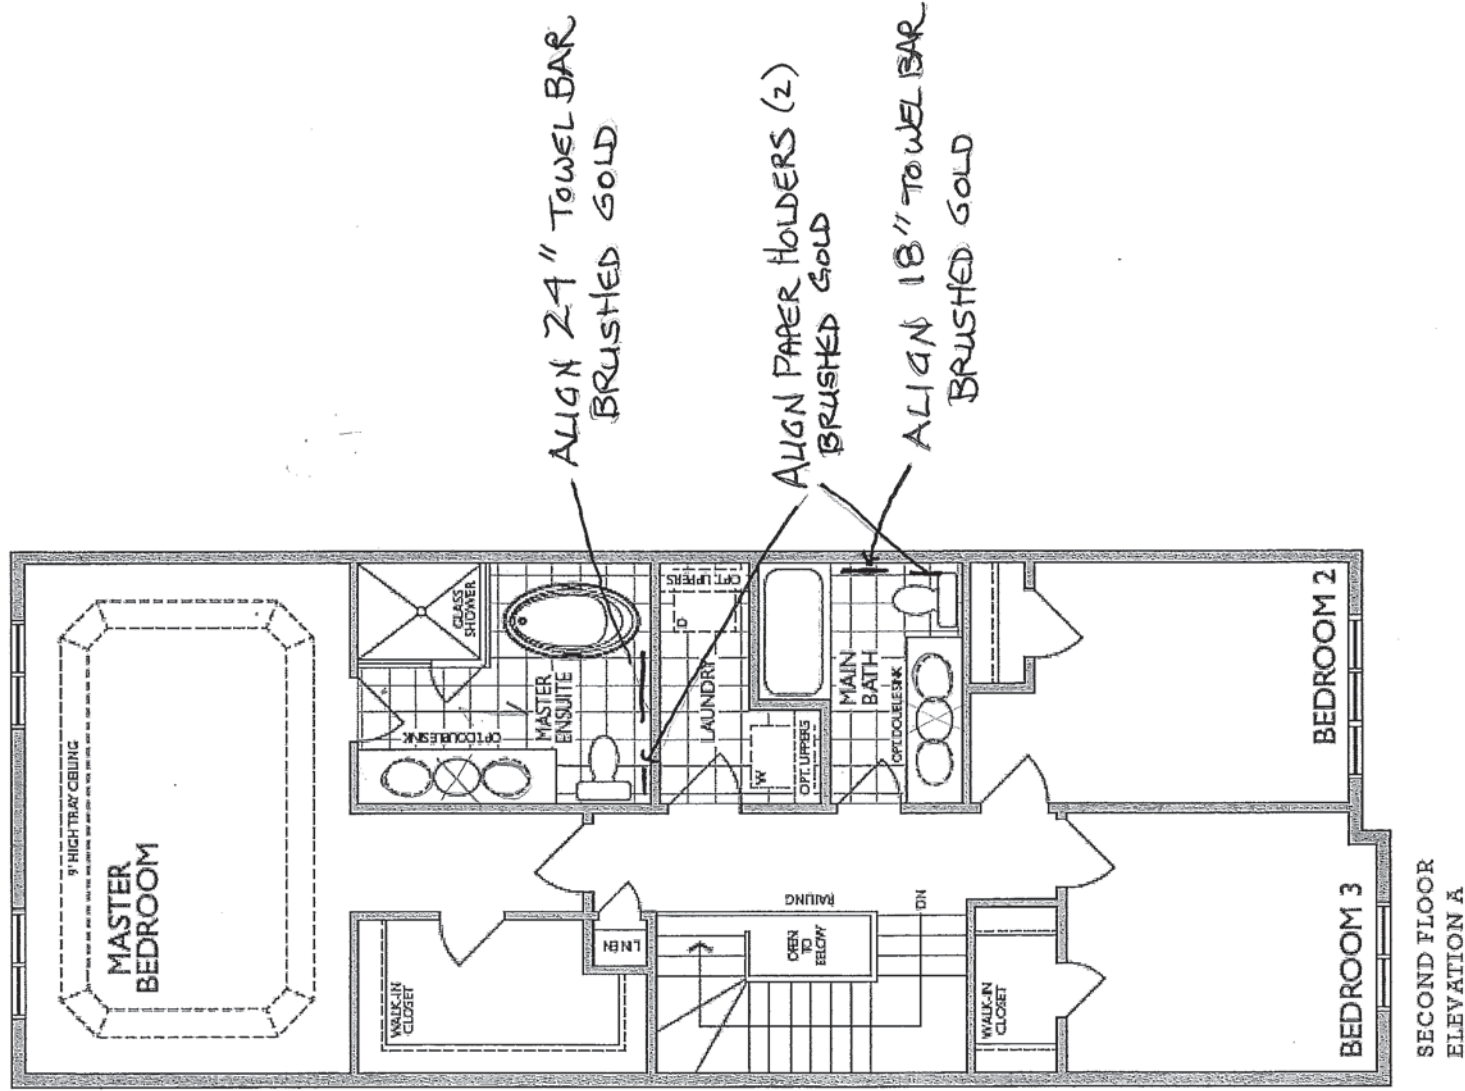


UK-75 WALLACETON
LOT 189C-21
20-1790- ELEV A
THE DUNMORE

16 of 40

Sketch #4

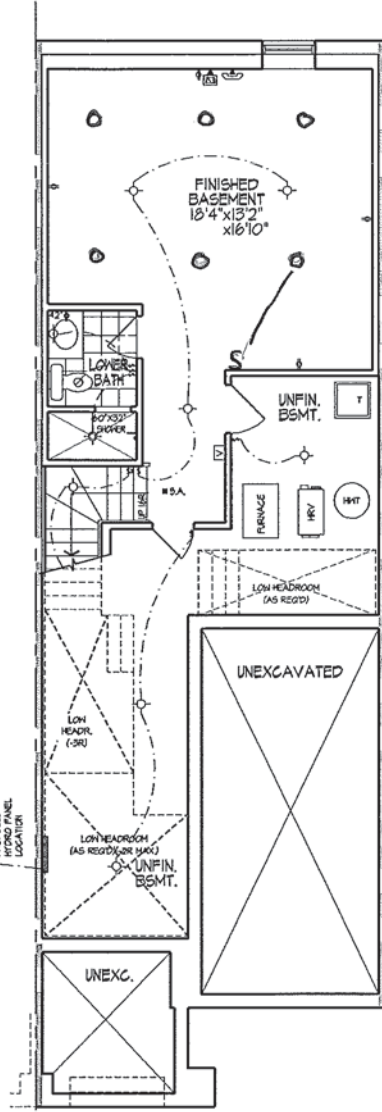


BASEMENT PLAN, ELEV. 'A'
(ELEVATION 'B' SIMILAR)

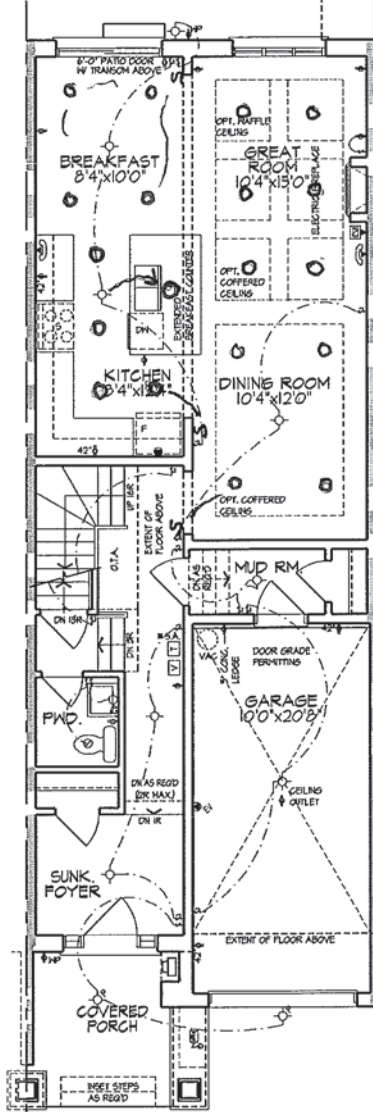


GROUND FLOOR PLAN, ELEV. 'A'

LEGEND


AUTOMATIC LITE		LITE SWITCH		VACUUM SYSTEM	
POT LITE		THERMOSTAT		VACUUM OUTLET	
PHONE		CHIME		HIGH VOLTAGE OUTLET	
CABLE		HALL MOUNT LITE		42" HIGH LOCATED OUTLET	
OUTLET		LITE		3-WAY LITE SWITCH	
		ROUGH IN FOR ELECTRIC VEHICLE			

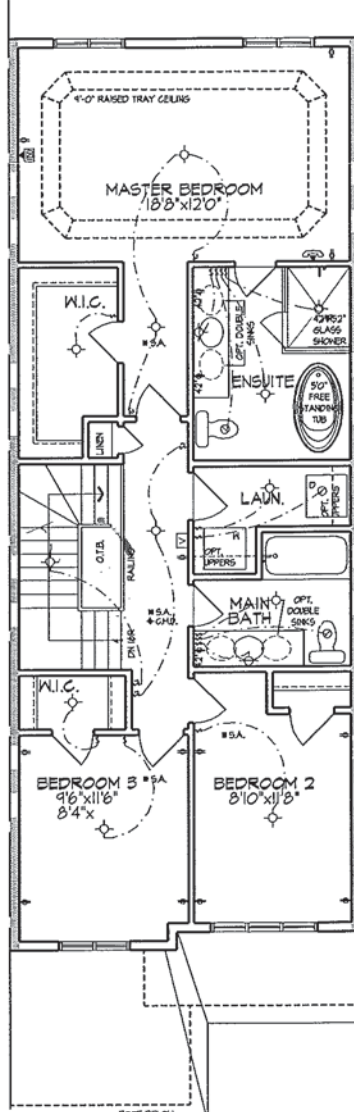

SECOND FLOOR PLAN, ELEV. 'A'

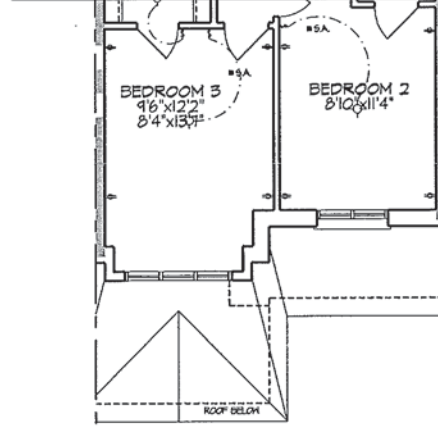

PART. SECOND FLOOR PLAN, ELEV. 'B'

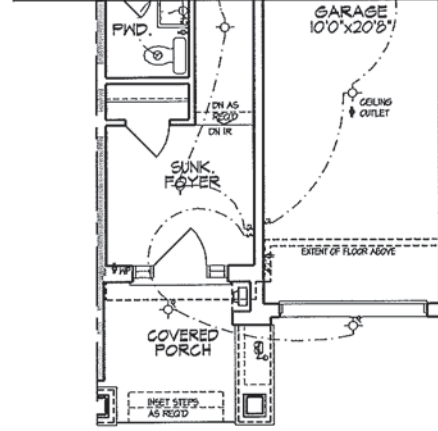

PART. GROUND FLOOR PLAN, ELEV. 'B'

ELECTRICAL PLANS

HEATHWOOD HOMES - 217132
WALLACETON, KITCHENER, ON
20-1790 (2004)
REV. 2019.06.05

HUNT
DESIGN ASSOCIATES INC.
www.hunt-design.com

UNDESIGNED HAS REVIEWED AND TAKES RESPONSIBILITY FOR THE DESIGN AND HAS THE QUALIFICATIONS AND MEETS THE REQUIREMENTS SET OUT IN THE CANADIAN BUILDING CODE TO BE A DESIGNER.
NAME: [Signature]
RESIDENTIAL INFORMATION
HUNT DESIGN ASSOCIATES INC.
18895

Quantity: 1
Unit: 1
Material: 1
Finish: 1
Color: 1
Notes: 1
E1 of E1

All drawings, specifications, related documents and designs are the property of Hunt Design Associates (H.D.A.). Reproduction of this property in whole or in part is strictly prohibited without H.D.A.'s written permission (H.D.A. assumes no responsibility or liability for this property unless it bears the appropriate H.D.A. number and original signature).


UK-75 WALLACETON
LOT 189C-21
20-1790 ELEV A
THE DUNMORE

17 of 140

Product Specification Sheet


BLANCO PRECIS U SINGLE 27

SILGRANIT®

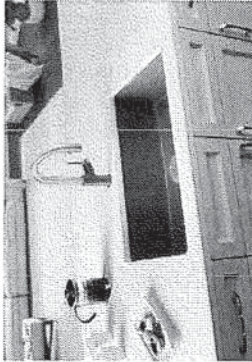

KITCHEN SINK

PRODUCT DIMENSIONS



BLANCO PRECIS U SINGLE 27

FEATURES / SPECIFICATIONS

- Made in Canada and Germany
- SILGRANIT® - natural granite composite material
- Exceptional resistance to heat, scratches and impact
- Repellent material – does not absorb any liquids, acids or stains
- Non-porous surface does not require use of any harsh chemicals
- Includes Hygienic+Plus surface protection formula against bacteria
- Rear-positioned and centred drain hole maximizes usable bowl and cabinet storage
- Virtually flat sink bottom prevents glassware from tipping over
- Limited Lifetime Warranty

DESIGN AND PLANNING TIPS

Cabinet Size: 30" (760 mm)

Bowl depth: 8 5/8" (220 mm)

Depending on cabinet construction, a different cabinet size may be required. Consult the cabinet manufacturer.

	White	401894
	Truffle	401893
	Metallic Gray	401892
	Cinder	401891
	Café	401890
	Biscuit	401889
	Anthracite	401888

WARRANTY

Limited Lifetime warranty

Code/Standards Compliance

BLANCO sinks and faucets are third-party tested and certified to CSA, cUPC, ANSI/ASME and NSF standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.

BLANCO CANADA
100 Corporation Drive
Brampton, ON L6S 6B5
Tel: 905 494 2400
Fax: 905 494 2425
www.blancocanada.com

Toll Free: 1 877 425 2626
Toll Free: 1 877 825 2626

© 2016 BLANCO CANADA

UK-75 WALLACETON
LOT 189C -21
20-1790 ELEV A
THE DUNMORE


18 of 140

KITCHEN FAUCET

Align®

Traditional | Transitional | Modern


*From intimate galley kitchens to large gourmet workstations,
Align faucets bring a refreshed modern look to your home.*

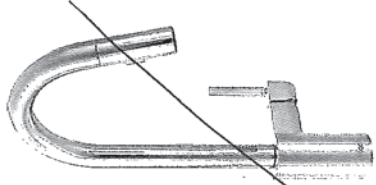

**MotionSense™ Hands-Free Single
Handle Pulldown Kitchen Faucet ***

*Not Available in BL or BG
Model 7565E*

Chrome -
Other -

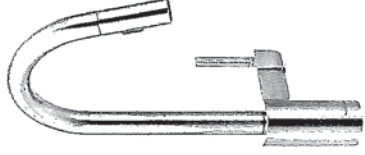


**Single Handle Pulldown
Kitchen Faucet ***

Available in BG

Model 7565

Chrome -
Other -

BRUSHED GOLD




**Single Handle Kitchen Faucet
with Side Spray ***

Not Available in BL or BG

Model 7165

Chrome -
Other -




Single Handle Kitchen Faucet *

Not Available in BL or BG

Model 7365

Chrome -
Other -




**Single Handle Pulldown
Bar/Prep Faucet ***

Available in BG

Model 5965

Chrome -
Other -

FINISH OPTIONS:



To order, combine the model number with one of these finish letter(s):
Spot Resist™ Stainless [SRS], Matte Black [BL] & Brushed Gold [BG]
To order Chrome [C] model, use model number only.
For Chrome MotionSense, order 7565EC.

* Deckplate sold separately - 141002 series

UK-75 WALLACETON
LOT 189C-21
20-1790 ELEV A
THE DUNMORE

19 of 40

Powder Room



**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK


- ☒ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated).
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☒ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
- **Design coordinates with Boulevard® Toilet**
- Basin has flat bottom to also allow use as an **above counter sink** or a **drop-in sink** (with u-shaped cut out)

Nominal Dimensions:
24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:
17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

**Compliance Certifications -
Meets or Exceeds the Following Specifications:**
• ASME A112.19.2 - 2008/CSA B45.1-08

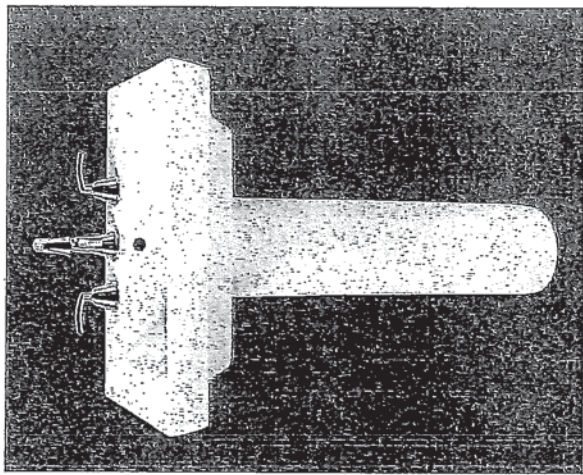

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

To Be Specified:
☐ Color: ☐ White ☐ Linen
☐ Faucet Finish:
☐ Supplies:
☐ 1-1/4" Trap:
☐ Nipple:

* See faucet section for additional models available

UK-75 WALLACETON
LOT 189C-21
20-1790 ELEV A
THE DUNMORE

20 of 40

American Standard

 BARRIER FREE

VANITY SINKS

COLONY™
COUNTERTOP SINK
VITREOUS CHINA

COLONY COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)




0346 803

Faucet holes on 203mm (8") centres



0346 403 (Illustrated) - X 1 BASEMENT BATH

Faucet holes on 102mm (4") centres



0346 001

Centre hole only

- X 4

2- MASTER ENSUITE





2- MAIN BATH

Nominal Dimensions:

521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

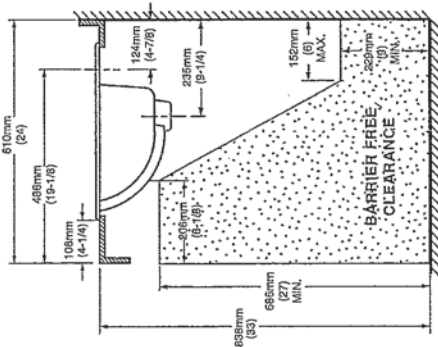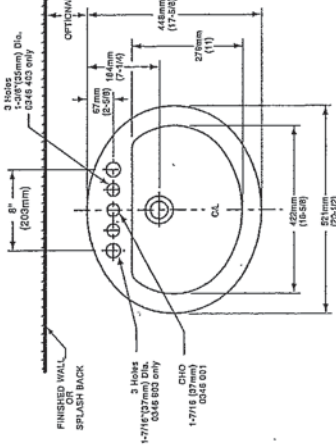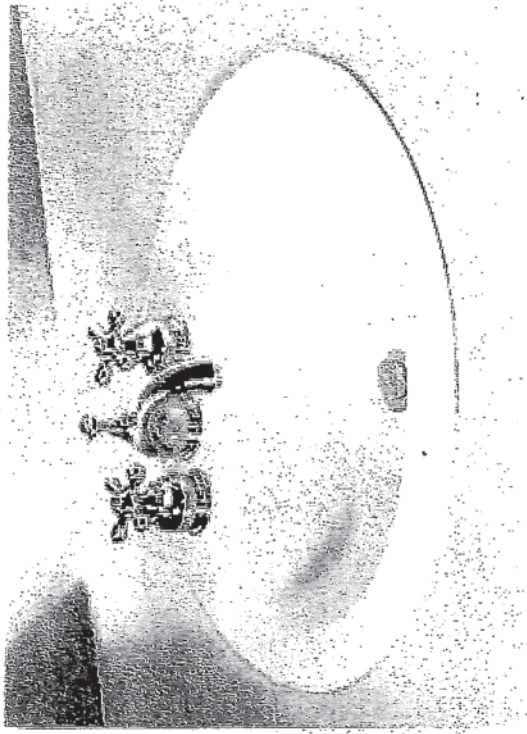

COMPLIANCE CERTIFICATIONS –

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.

To Be Specified

☐ Colour: ☒ White ☐ Bone ☐ Silver Gray

☐ Linen

☐ Faucet*:

☐ Faucet Finish:

☐ Supplies & Stops:

☐ Trap 1-1/4" (32 mm):

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND 1" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

* See faucet section for additional models available

BAS-198

© 2000 American Standard Inc.

01/07


UK-75 WALLACETON
LOT 189C -21
20-1790 ELEV A
THE DUNMORE

21 of 40

Align®

Traditional | Transitional | Modern

From large, open master baths to minimalist powder rooms, Align faucets and accessories bring a refreshed modern look to your home.



**Single Handle Vessel Lav
Faucet with Push-Button
Drain without Overflow ~**

NEW! Available in BG

Not Available in BL

Chrome

Other

Model 6192 / 140780



**Single Handle
Lav Faucet
with Lift Rod Drain ^**

NEW!


Available in BG

Model 6190

Chrome

Other

X 4



2 x MASTER ENSUITE

2 x MAIN BATH



**Two Handle Adjustable
Widespread (8" - 16") Lav Faucet
with Lift Rod Drain**


NEW!

Available in BG


Model T6193 / 69000

Chrome

Other



1 x Powder Room



**Two Handle
Roman Tub Faucet**

NEW!

Available in BG

Model T393 / 4796

Chrome


Other



Tub Drain Half Kits Available **

Chrome

Other



**Two Handle Roman Tub
Faucet with Hand Shower**

NEW!

Available in BG

Not Available in BL

Model T394 / 9796

Chrome

Other




Tub Drain Half Kits Available **

Chrome

Other



X 1



**Two Handle
Bidet Faucet**


Not Available in BL or BG

Model T5191 / 9265

Chrome

Other

FINISH OPTIONS:

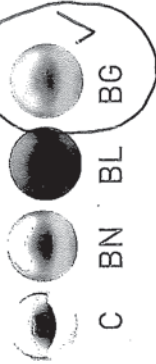

To order, combine the model number with one of these finish letter(s):
LifeShine® Brushed Nickel (BN), Matte Black (BL) & Brushed Gold (BG)
To order Chrome (C) model, use model number only.

^ Deckplate included - Deckplate sold separately - 172666 series
** T90331 / 140680


UK-75 WALLACETON
LOT 189C-21
20-1790 ELEV A
THE DUNMORE

22 of 40

Align®

Traditional | Transitional | Modern

From large, open master baths to minimalist powder rooms, Align faucets and accessories bring a refreshed modern look to your home.

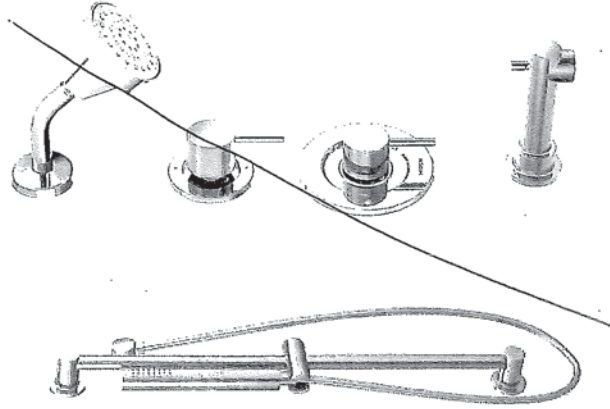

**Posi-Temp® Tub/Shower Faucet
with 3 Function Transfer Valve/Trim
and Slide Bar with Hand Shower ***


NEW!

Available in BL & BG

Model T2193EP / 3372 / 128284 / T4191 /
62320 / 3887EP / A725

Chrome

Other

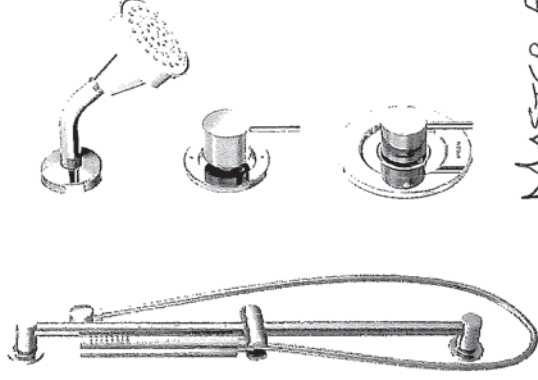

**Posi-Temp® Shower Only
with 3 Function Transfer Valve/Trim
and Slide Bar with Hand Shower ***

NEW!

Available in BL & BG


Model T2192EP / 3372 / T4191 / 62320 /
3887EP / A725

Chrome

Other

MASTER ENDSUITE
SHOWER

FINISH OPTIONS:



To order, combine the model number with one of these finish letter(s):
LifeShine® Brushed Nickel (BN), Matte Black (BL) & Brushed Gold (BG)
To order Chrome (C) model, use model number only.

* Please see vertical spa guide for installation #700106


UK-75 WALLACETON
LOT 189C-21
20-1790 ELEV A
THE DUNMORE

23 of 40

Align®

Traditional | Transitional | Modern

From large, open master baths to minimalist powder rooms, Align faucets and accessories bring a refreshed modern look to your home.

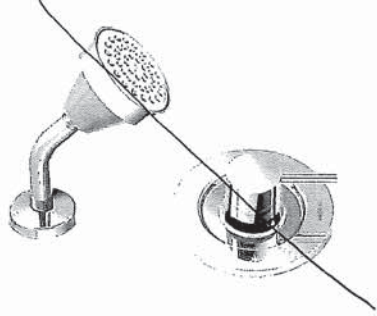

MAIN BATH

Eco-Performance Posi-Temp®

Tub/Shower Faucet

Available in BL & BG

Model T2193EP / 62320

NEW!



Chrome

Other

Eco-Performance Posi-Temp®

Shower Only

Available in BL & BG

Model T2192EP / 62320

NEW!



FINISH OPTIONS:



C BN BL BG

To order, combine the model number with one of these finish letter(s):
LifeShine® Brushed Nickel (BN), Matte Black (BL) & Brushed Gold (BG)
To order Chrome (C) model, use model number only.

UK-75 WALLACETON
LOT 189C-21
20-1790 ELEV A
THE DUNMORE

24 of 40

Align®

Traditional | Transitional | Modern

From large, open master baths to minimalist powder rooms, Align faucets and accessories bring a refreshed modern look to your home.



Swiveling Double Robe Hook
Model YB0402


Not Available in BG

Chrome
Other



Robe Hook
Model YB0403

Chrome
Other



Pivoting Paper Holder
Model YB0408


Chrome
Other



Single Post Paper Holder
Model YB0409


Not Available in BG

Chrome
Other



18" Towel Bar
Model YB0418

Chrome
Other




24" Towel Bar
Model YB0424

Chrome
Other



Towel Ring
Model YB0486

Chrome
Other

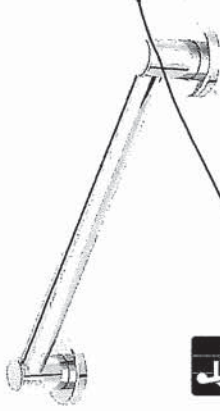


Designer Grab Bar

Models:

	Chrome	Other
12" - YG0412	\$151.48	\$182.91
18" - YG0418	\$158.27	\$191.87
24" - YG0424	\$165.27	\$206.92
36" - YG0436	\$188.16	\$233.03
42" - YG0442	\$275.94	\$345.03

Not Available in BL
Available in BG for 18" & 24"

FINISH OPTIONS:

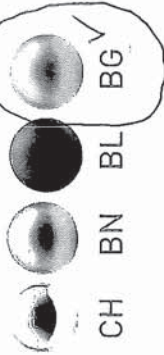

To order, combine the model number with one of these finish letter(s):
Chrome (CH), LifeShine® Brushed Nickel (BN), Matte Black (BL)
& Brushed Gold (BG)

UK-75 WALLACETON
LOT 189C -21
20-1790 ELEV A
THE DUNMORE

25 of 40

STANDARD 30" HOOD FAN



SPECIFICATIONS
AV SERIES
RANGE HOODS

HVI 2100
CERTIFIED **180 CFM/7.0 Sones @ 0.10" SP. Horizontal**
180 CFM/7.5 Sones @ 0.10" SP. Vertical

• **Dimensions**

Overall bottom projection - 183/8"
Overall top projection - 12"
Height - 6"
Available widths: 21", 24", 30", 36" & 42"

• **Hood Body**

Stainless Steel: 24 gauge, grade 430 stainless steel.
Painted: 23 gauge cold rolled commercial grade (CRCQ) steel, auto welded, coated with a baked enamel finish.

• **Motor**

2 speed, single coil, thermally protected, permanently lubricated.
Rated 120 volts, 60 hz. Complete with 200°C lead wires.

• **Lighting**

Single 60 watt cook light capacity (bulb not included).

• **Ducting Options**


Horizontal ducting: 3 1/4"x10" (duct adapter and damper included).
Vertical ducting: 3 1/4"x10" (duct adapter and damper included).
Vertical ducting: 7" round (duct adapter and damper not included).
Ductless: removable front vent (charcoal filter not included).

• **Fan Blade**


One piece polymeric, electronically balanced blade. 65/8" diameter with 5 paddles.

• **Electrical connection**

Hood top - 7/8" knockout hole for use with 1/2" cable clamp
Hood back - 7/8" knockout hole for use with 1/2" cable clamp

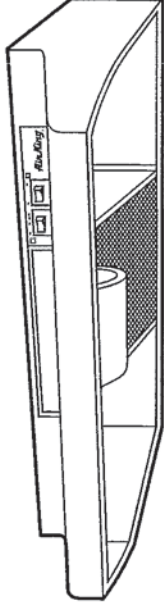

AV SERIES

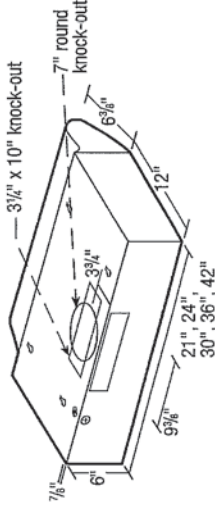

• **Filters**

UL rated, class 2 filter.
Grease Filter: RF35 - 87/8"x103/8" (included).
Charcoal Filter: RF34 (not included).
Combo Grease/Charcoal: RF55 (not included).

• **Available Finishes**

White, Biscuit, Almond, Black & Stainless Steel.

EXPANDED PERFORMANCE									
Air Flow - CFM		Static Pressure (inches of w.g.)		Sones		Fan Speed		Power	
Vertical Ducting High		0	0.05	0.1	0.2	0.25	RPM	Watts	Apms
Horizontal Ducting High		246	232	218	203	181	2973	87.0	2.1
		225	210	180	175	155	3024	87.0	2.1

PROJECT	ARCHITECT
LOCATION	ENGINEER
CONTRACTOR	SUBMITTED BY
FAN MODEL NUMBER	DATE
CFM	SONES
IN W.C.	QTY
RPM	AMPS
WATTS	OPTIONAL EQUIPMENT & REMARKS



Air King: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada:
Brampton, Ontario
Tel: 905-456-2033
Fax: (905) 456-1015

Whirlpool® Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

WRF532SMB WRF535SMB
WRF535SMB WRF540CWB

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

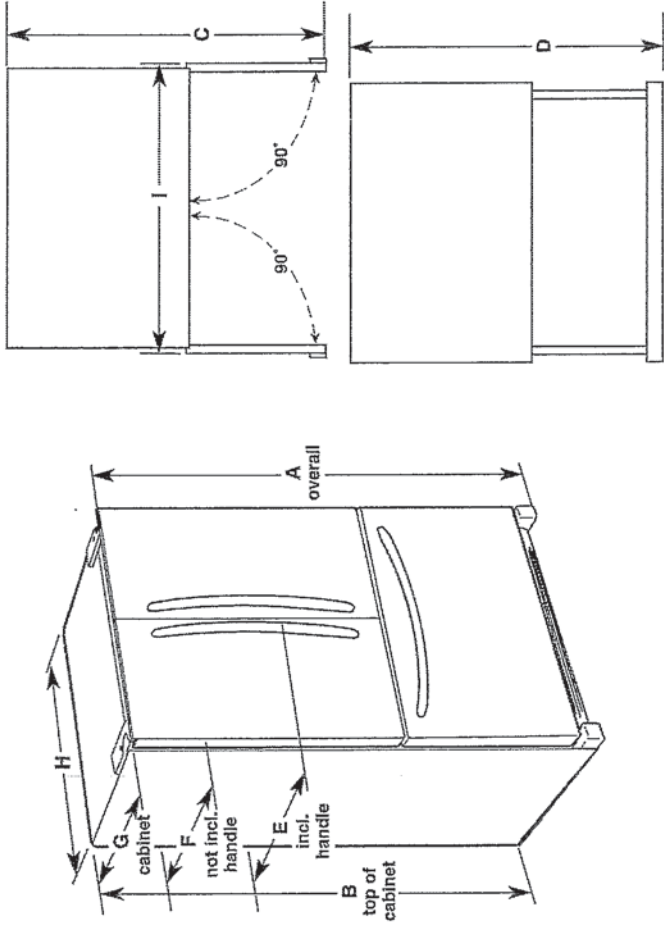

Model Number/Size	Height - Overall - "A"	Height - Top of Cabinet - "B"	Depth - Doors Open 90° - "G"	Depth - Drawer Open - "D"	Depth - With Handles - "E"	Depth - Without Handles - "F"	Depth - Cabinet Only - "G"	Width - Cabinet - "H"	Width - Door Open 90° - "I"
WRF535SMB 25.2 cu. ft.	70 ^{3/8} " (178.1 cm)	68 ^{3/8} " (174.8 cm)	48 ^{1/2} " (122.1 cm)	53 ^{1/2} " (135 cm)	35 ^{1/2} " (90 cm)	32 ^{1/2} " (83.7 cm)	29 ^{1/2} " (74 cm)	35 ^{1/2} " (90.5 cm)	43 ^{3/8} " (110.2 cm)
WRF535SMB 25.2 cu. ft.	70 ^{3/8} " (178.1 cm)	68 ^{3/8} " (174.8 cm)	48 ^{1/2} " (122.1 cm)	53 ^{1/2} " (135 cm)	35 ^{1/2} " (90 cm)	32 ^{1/2} " (83.7 cm)	29 ^{1/2} " (74 cm)	35 ^{1/2} " (90.5 cm)	43 ^{3/8} " (110.2 cm)
WRF532SMB 22.1 cu. ft.	70 ^{3/8} " (178.1 cm)	68 ^{3/8} " (174.8 cm)	47 ^{1/2} " (119.5 cm)	52 ^{1/2} " (132.4 cm)	34 ^{1/2} " (87.5 cm)	31 ^{1/2} " (80.1 cm)	28 ^{1/2} " (71.4 cm)	32 ^{1/2} " (82.9 cm)	42 ^{3/8} " (107.6 cm)
WRF540CWB 20 cu. ft.	70 ^{3/8} " (178.1 cm)	68 ^{3/8} " (174.8 cm)	48" (121.9 cm)	44 ^{1/2} " (113.0 cm)	29 ^{1/2} " (74.6 cm)	28" (71.1 cm)	24 ^{1/2} " (61.3 cm)	35 ^{1/2} " (90.5 cm)	39 ^{3/8} " (100.0 cm)

LOCATION REQUIREMENTS

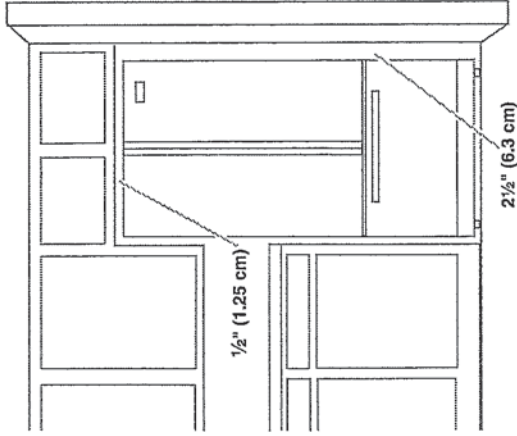

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2 1/2" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10597594B
10/17/14

UK-75 WALLACETON
LOT 189C-21
20-1790- ELEV A
THE DUNMORE

27 of 40

Whirlpool® 4.8 cu. ft. Capacity Electric Range with Self-Cleaning System

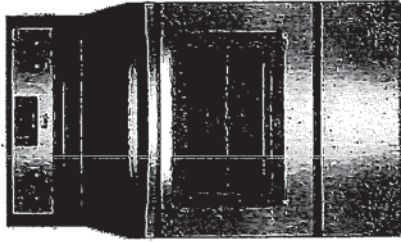

WFE510S0AS Stainless Steel

OTHER AVAILABLE COLORS

Black
Model: WFE510S0AB

Universal Silver
Model: WFE510S0AD

Biscuit
Model: WFE510S0AT

White
Model: WFE510S0AW

DIMENSIONS		KEY FEATURES Eco-Friendly Ceramic Glass Cooktop AccuBake® Temperature Management System 9 7/8" Dual radiant element Traditional Self-Cleaning Oven Large Oven Window Oven Light Custom Broil
Height	46 7/8 Inches	
Depth	27 3/4 Inches	
Width	29 7/8 Inches	
Dimensions shown are for planning purposes only. For complete information, see Installation Instructions packaged with product.		
ELECTRICAL		
40 Amps. 40 Amps Amps. 60 Hz. 120/240 or 120/208 V.		
Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.		

Right Front Element-Burner Type 800W
Right Rear Element-Burner Power :
Right Rear Element-Burner Size Single
Right Rear Element-Burner Type :

Oven Features No
Automatic Convection Conversion Temperature Adjust :
Heating Element On Indicator Light :
Hot Surface Indicator Light Yes
Power On Indicator Light 2400
Bake Element Power : 3400@240 V
Broiler Element Power : Top of Oven
Broiler Location : None
Convection Element Type : No
Convection Functions : No
Hidden Bake Element : Incandescent
Light Type : 1
Number of Oven Lights : 5
Number of Rack Guides : Thermal
Oven Cooking System : Standard
Oven Rack Type : Self-Cleaning
Self-Cleaning :

Controls Storage Drawer
Drawer Type : Metal
Handle Material : Automatic Door Lock, Clock, Control Lock, Sabbath Mode, Timer
Selections : Yes
Sabbath Mode : Yes
UL :

Dimensions
See Dimension Guide for Metric Measurements
Depth : 46 7/8
Height : 29 7/8
Width :

This product has been discontinued, but there may be limited availability at your local retailer. Please visit our Single Oven Freestanding Category page to view all of our current models.

Register this product
Manuals & Literature
Schedule Service

MSRP is Manufacturer's Suggested Retail Price and may not necessarily be the price at which the product is sold in the consumer's area. Dealer alone determines actual price.
© Registered Trademark/™ Trademark of Whirlpool, U.S.A. © 2016 Whirlpool Corporation. All Rights Reserved. All other trademarks are owned by their respective companies.

UK-75 WALLACETON
LOT 189C-21
20-1790- ELEV A
THE DUNMORE

29 of 40

Whirlpool® 30" (76.2 cm) Freestanding Electric Range

PRODUCT MODEL NUMBERS

WFC110M0A	WFE330W0A	WFE530C0A
WFC120M0A	WFE510S0A	WFE540H0A
WFC130M0A	WFE520C0A	WFE710H0A
WFC150MLA	WFE524CLA	WFE714HLA
WFC310S0A	WFE524CLB	WFE720H0A
WFC340S0A	WFE524WLA	WFI910H0A
WFE320M0A	WFE525C0B	

Electrical: To properly install your range, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Range must be connected to the proper electrical voltage and frequency as specified on the model/serial number rating plate. The model/serial number rating plate is located on the left side frame behind the storage drawer panel or behind the top right side of the oven door. Refer to the figures in the "Product Dimensions" section of the "Location Requirements" section.

- This range is manufactured with the neutral terminal connected to the cabinet. Use a 3-wire, UL listed, 40- or 50-amp power supply cord (pigtail) (see following Range Rating chart). If local codes do not permit ground through the neutral, use a 4-wire power supply cord rated at 250 volts, 40 or 50 amps and investigated for use with ranges.

Range Rating*			Specified Rating of Power Supply Cord and Circuit Protection
120/240 Volts	120/208 Volts	Amps	
8.8 - 16.5 KW	7.8 - 12.5 KW	40 or 50**	
16.6 - 22.5 KW	12.6 - 18.5 KW	50	

*The NEC calculated load is less than the total connected load listed on the model/serial rating plate.

**If connecting to a 50-amp circuit, use a 50-amp rated cord with kit. For 50-amp rated cord kits, use kits that specify use with a nominal 1/8" (34.9 mm) diameter connection opening.

- A circuit breaker is recommended.

CABINET OPENING DIMENSIONS

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.


IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

PRODUCT DIMENSIONS

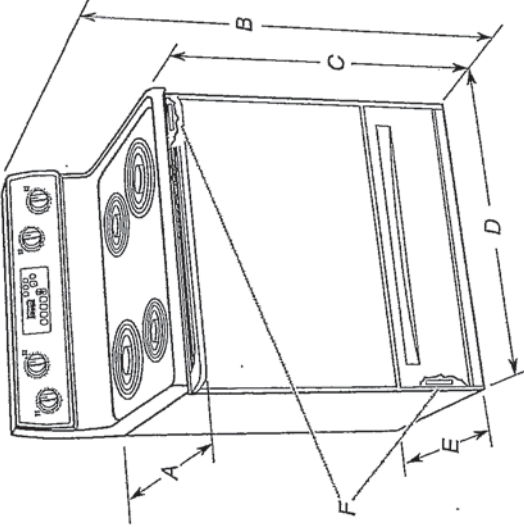

A. 27 3/4" (70.5 cm) max. depth with handle
B. 46 7/8" (119.1 cm) overall height (max.) with leveling legs
C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*

D. 29 7/8" (75.9 cm) width


E. 25 5/8" (64.3 cm) depth - back of range to front of cooktop**

F. Model/serial rating plate (located on the left side frame behind storage drawer or right side of frame behind the oven door)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

**Front of door and drawer may extend further forward depending on styling.

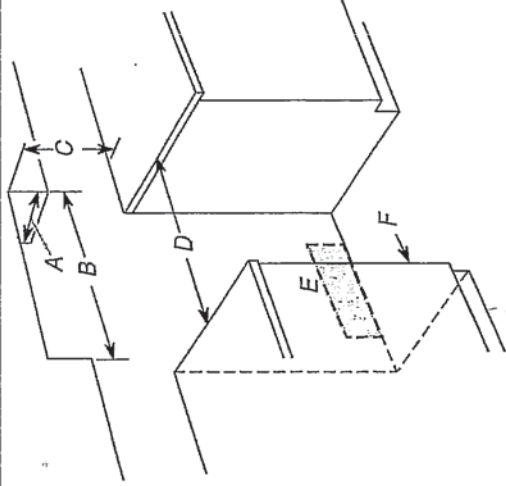

A. 13" (33.0 cm) max. upper cabinet depth

B. 30" (76.2 cm) min. opening width

C. For minimum clearance to top of cooktop, see NOTE*

D. 30 1/8" (76.5 cm) min. opening width

E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 5 1/2" (14.0 cm) max. from floor

F. Cabinet door or hinges should not extend into the cutout

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. WT0403811B
9/10/13

INSTALLATION REQUIREMENTS

Tools and Parts


Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

Tools needed

- Tape measure
- Flat-blade screwdriver
- Phillips screwdriver
- Level
- Hammer
- Hand or electric drill
- Wrench or pliers
- Marker or pencil
- Masking tape
- 1/4" drive ratchet
- 1/4" nut driver
- 3/8" and 5/16" nut driver
- 1/8" (3.2 mm) drill bit (for wood floors)

Parts supplied

Check that all parts are included.

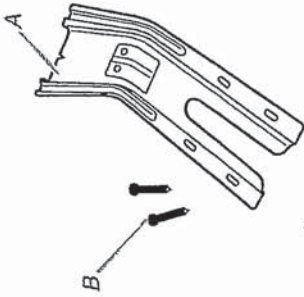

A. Anti-tip bracket
B. #12 x 1 3/8" screws (2)

- Anti-tip bracket must be securely mounted to floor or wall. Thickness of flooring may require longer screws to anchor bracket to floor.

Parts needed

Check local codes. Check existing electrical supply. See "Electrical Requirements" section. It is recommended that all electrical connections be made by a licensed, qualified electrical installer.

Location Requirements

IMPORTANT: Observe all governing codes and ordinances.

- It is the installer's responsibility to comply with installation clearances specified on the model/serial rating plate. The model/serial rating plate is located on the frame behind a top corner of the door or either side of the drawer.
- To eliminate the risk of burns or fire by reaching over heated surface units, cabinet storage space located above the surface units should be avoided. If cabinet storage is to be provided, the risk can be reduced by installing a range hood that projects horizontally a minimum of 5" (12.7 cm) beyond the bottom of the cabinets.
- Cabinet opening dimensions that are shown must be used. Given dimensions are minimum clearances.
- The anti-tip bracket must be installed. To install the anti-tip bracket shipped with the range, see "Install Anti-Tip Bracket" section.
- Grounded electrical supply is required. See "Electrical Requirements" section.

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).


Mobile Home - Additional Installation Requirements

The installation of this range must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home Construction and Safety, Title 24, HUD Part 280). When such standard is not applicable, use the Standard for Manufactured Home Installations, ANSI A225.1/NFPA 501A or with local codes. In Canada, the installation of this range must conform with the current standards CAN/CSA-Z240-latest edition, or with local codes.

Mobile home installations require:

- When this range is installed in a mobile home, it must be secured according to the instructions in this document.

Product Dimensions

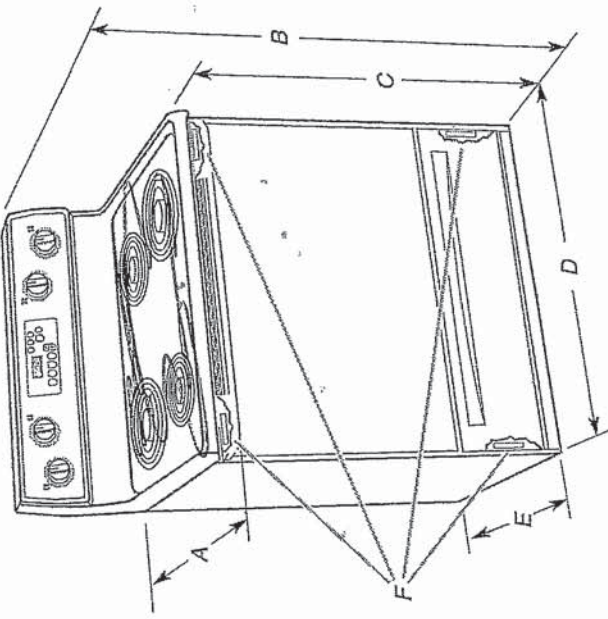

- A. 27 1/4" (70.5 cm) max. depth with handle
- B. 46 7/8" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29 1/8" (75.9 cm) width
- E. 25 5/16" (64.3 cm) depth - back of range to front of cooktop**
- F. Model/serial rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

**Front of door and drawer may extend further forward depending on styling.


31 of 40

YWFE S10S0

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

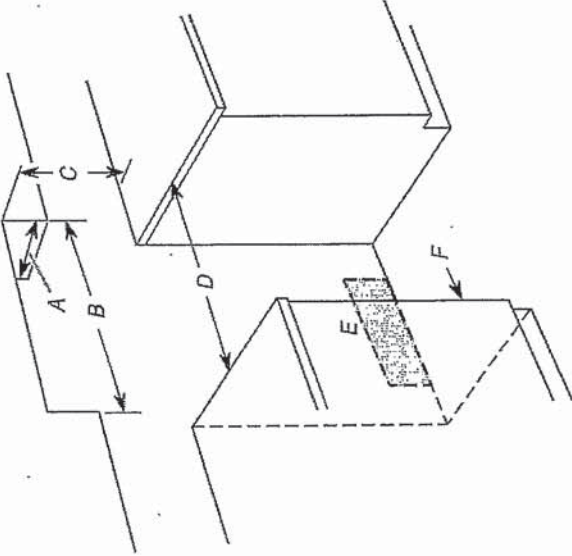

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 31" (78.7 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Electrical Requirements - Canada Only

A WARNING



Electrical Shock Hazard

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association
178 Rexdale Blvd.
Toronto, ON M9W 1R3 CANADA

- Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*

Specified Rating of Power Supply Cord Kit and Circuit Protection


120/240 Volts	120/208 Volts	Volts	Amps
8.8 - 16.5 KW	7.8 - 12.5 KW	40 or 50**	
16.6 - 22.5 KW	12.6 - 18.5 KW	50	

*The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

**If connecting to a 50-amp circuit, use a 50-amp rated cord with a kit. For 50-amp rated cord kits, use kits that specify use with a nominal 1 3/8" (34.9 mm) diameter connection opening.

- A time-delay fuse or circuit breaker is recommended.

- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



- Do not use an extension cord.

INSTALLATION INSTRUCTIONS


Unpack Range

A WARNING

Excessive Weight Hazard

Use two or more people to move and install range.
Failure to do so can result in back or other injury.

1. Remove shipping materials, tape and film from range.
2. Remove oven racks and parts package from inside oven.
3. Do not remove the shipping base at this time.



A. Shipping base

3270



Whirlpool
Home Appliances

ENERGY STAR

□

Table 1

Universal Silver
Model: WDF310PAAD

DIMENSIONS		KEY FEATURES
Maximum Height	34 1/2 Inches	
Minimum Height	33 1/2 Inches	
Height	34 1/2 Inches	
Depth	24 1/2 Inches	
Width	23 7/8 Inches	
Dimensions shown are for planning purposes only. For complete information, see Installation Instructions packaged with product.		
ELECTRICAL		
15 Amps Amps. 60 Hz. 120 V. 15,		
Before purchasing this appliance, read important information about its estimated energy consumption. An energy efficiency rating that is available from your dealer.		

ENERGY STAR® Qualified
No One Has Fewer Repairs 17 Years In A Row
Resource - Efficient Wash System
CEE Tier 1 qualified
Tall Tub Design
White Plastic Interior
Quiet Partner(TM) Sound Package
Auto Soil Sensor
Electronic Controls
3 Automatic Cycles
1-Hour Wash Cycle
Heavy Wash Cycle
Normal Cycle
4 Options
High Temperature Wash System
Heated Dry Option
4 Hour Delay Wash Option
4-Tier SheerClean Direct Feed Wash System
Control Lock
Vinyl Racks
In-Rack Silverware Basket

UK-75 WALLACETON
LOT 189C-21
20-1790- ELEV A
THE DUNMORE

33 of 40

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB
WDF111PAB
WDF120PAF
WDF121PAF
WDF310PAA
WDF310PCA

WDE310ELA
WDF320PAD
WDF510PAY
WDF520PAD
WDF530PAY
WDF530PLY

WDF530PSY
WDF540PAD
WDF730PAY
WDT710PAY
WDT720PAD
WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.


Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 1/4"N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

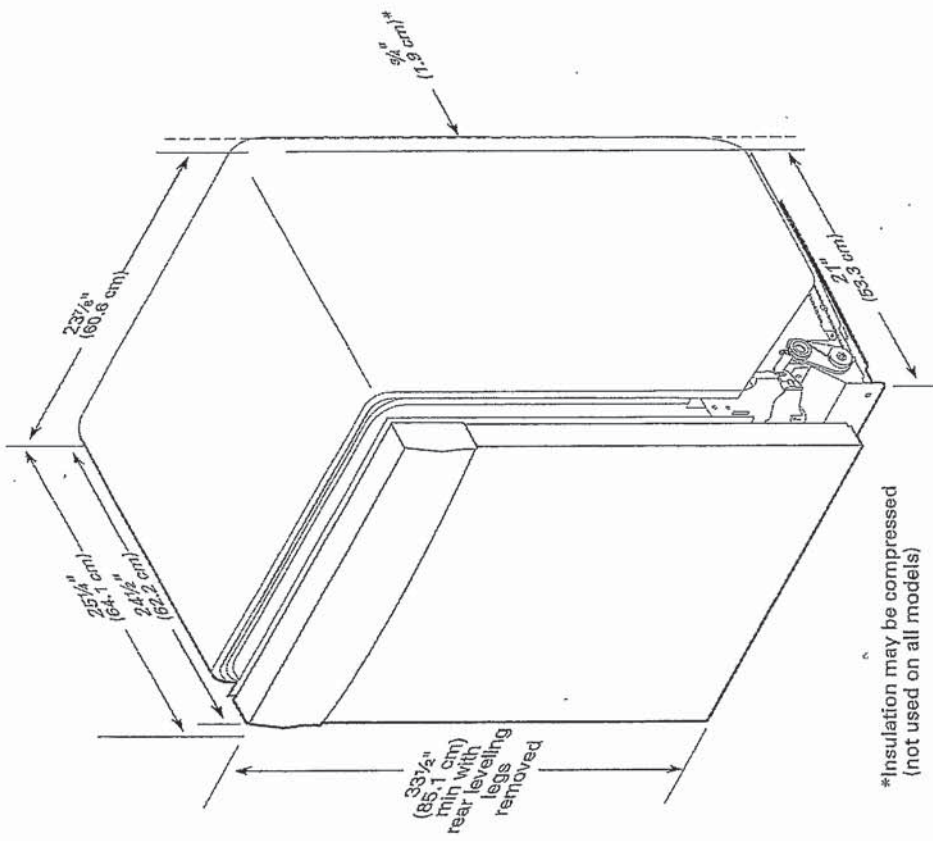


*Insulation may be compressed (not used on all models)

34 of 40

WDF-320 Pak

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

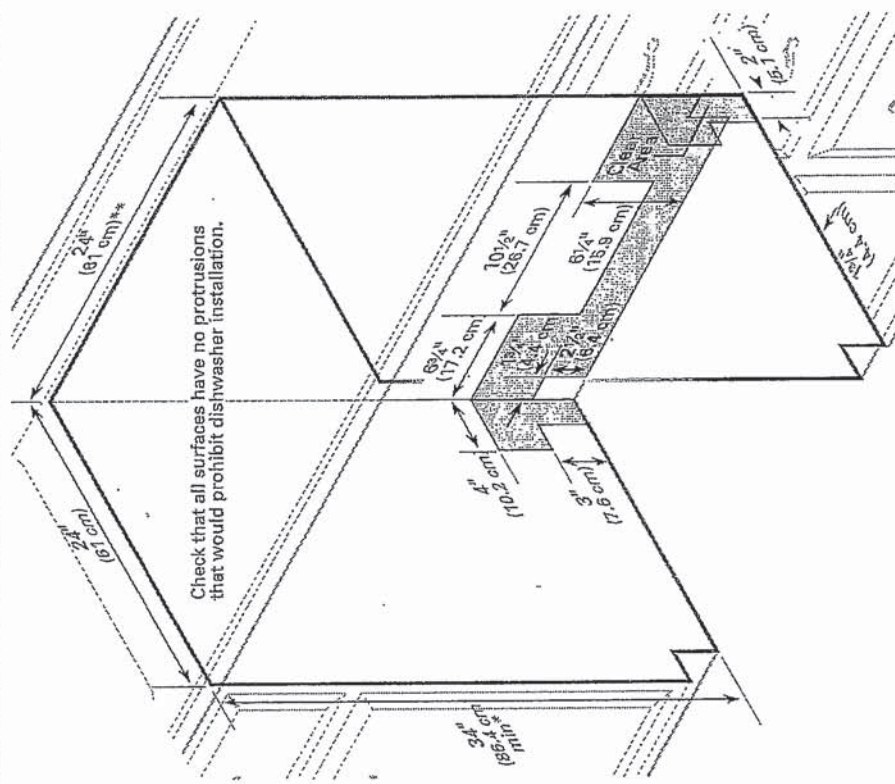


UK-75 WALLACETON
LOT 189C-21
20-1790- ELEV A
THE DUNMORE

35 of 40

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washers and Dryers | Washers | Front Load Washers | WFW5620HW

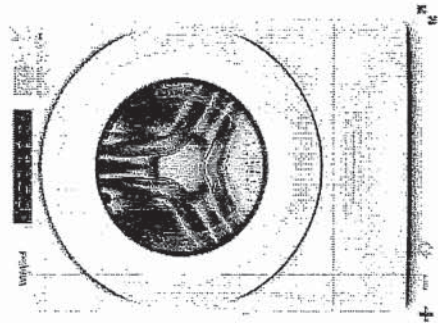

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

36 of 40

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS


Proper installation is your responsibility.

You will need:


- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

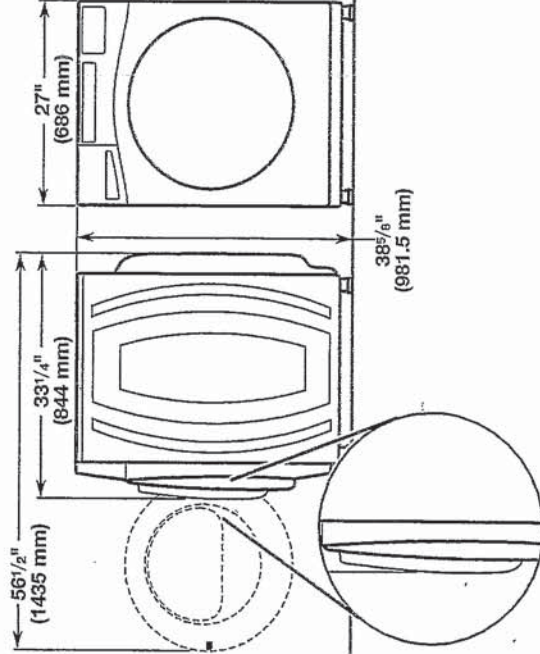


Maytag Models

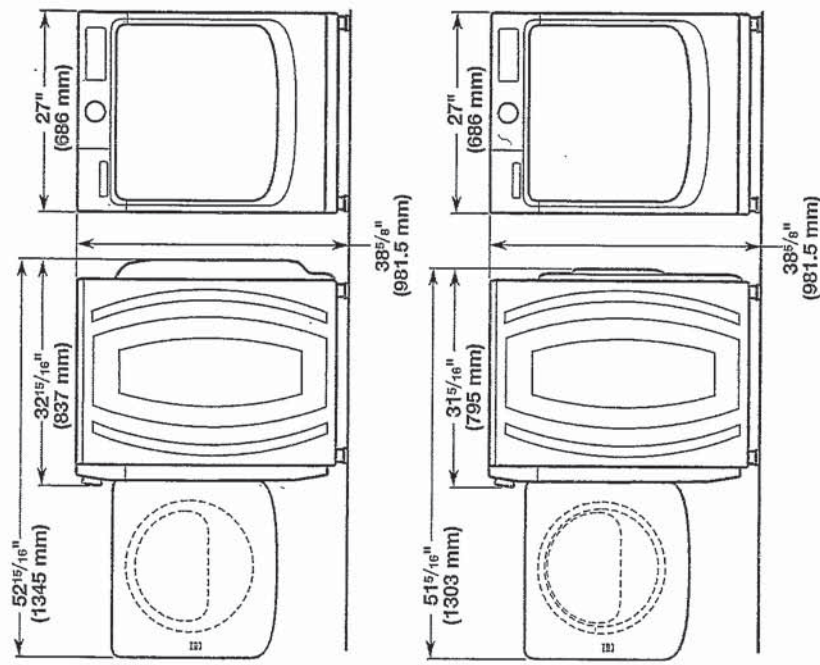

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.


**Recessed area or closet installation
(stacked washer and dryer):**

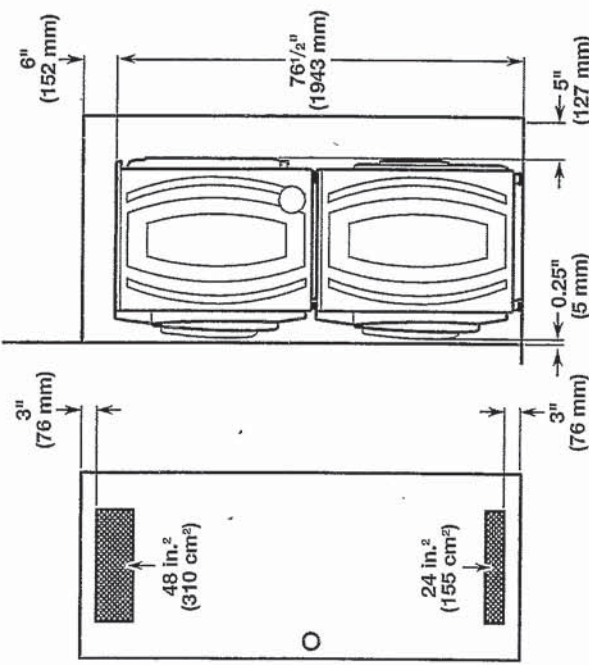


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

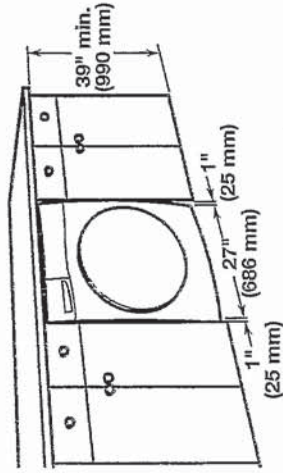

Recessed area or closet installation:

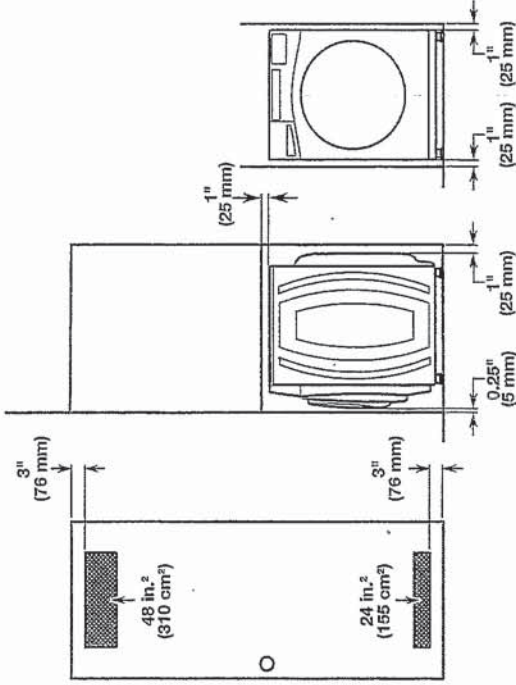

Custom cabinet installation:

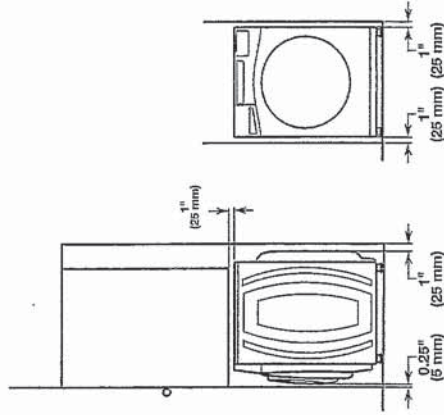


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

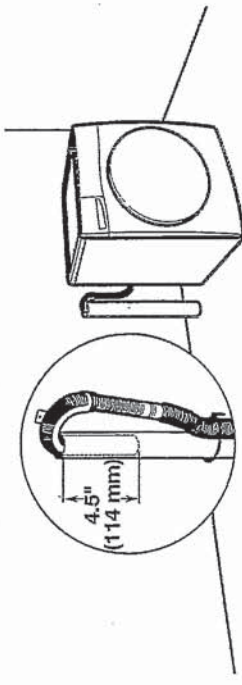


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

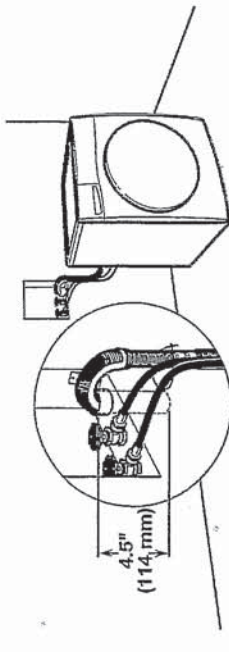

See requirements for floor standpipe drain system.

Laundry tub drain system

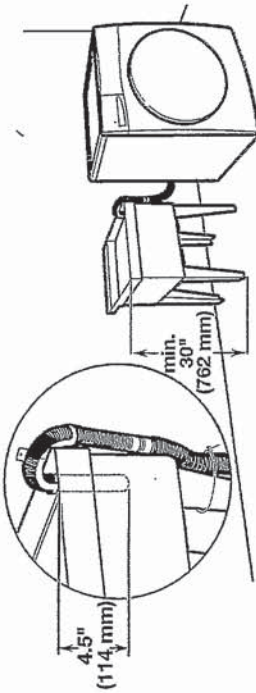

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


UK-75 WALLACETON
LOT 189C-21
20-1790- ELEV A
THE DUNMORE

38 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Weather and Dryers | Dryers | Electric Dryers | YWED5620HW

Define
Your Style

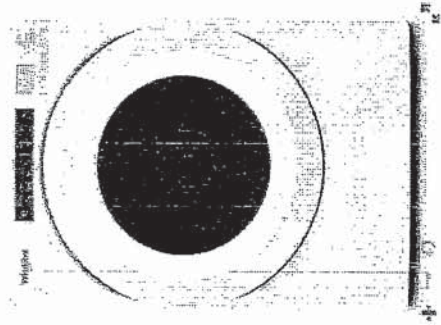

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear


Electrical

Hz	60
Power Cord Included	Yes

39 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

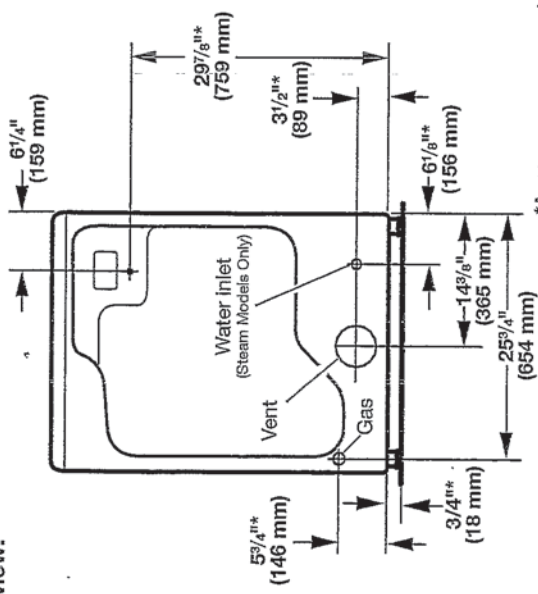

*Approx. measurement

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

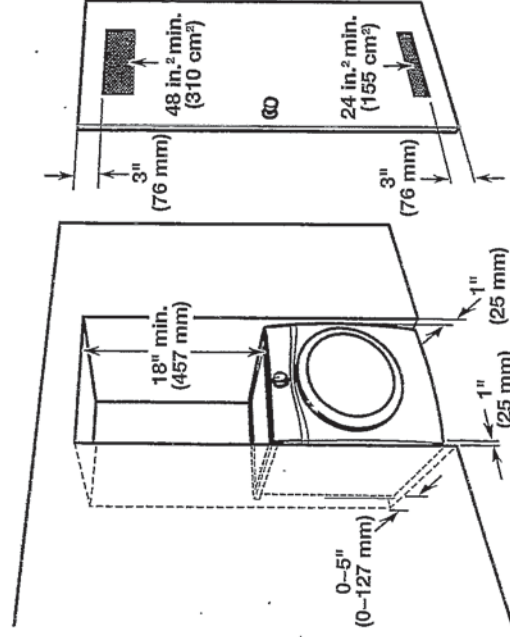

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

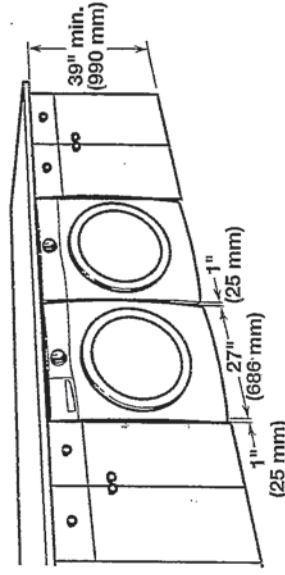

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

40 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING




Explosion Hazard

- Keep flammable materials and vapors, such as gasoline, away from dryer.
- Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
- Failure to do so can result in death, explosion, or fire.


You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
 - A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
 - If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
 - Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
 - Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
 - Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
 - For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
 - The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.
- IMPORTANT:** Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.

DRYER DIMENSIONS
Front view:

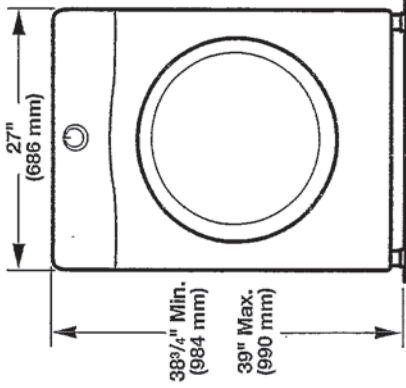


Side view:
Whirlpool Models

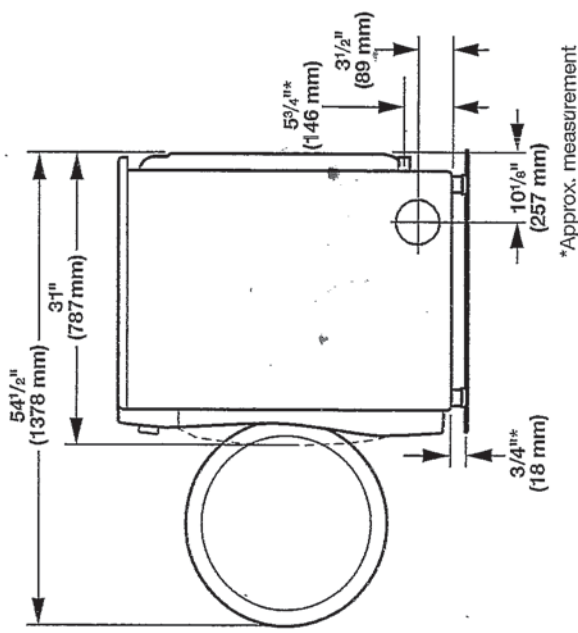

*Approx. measurement

Maytag Models

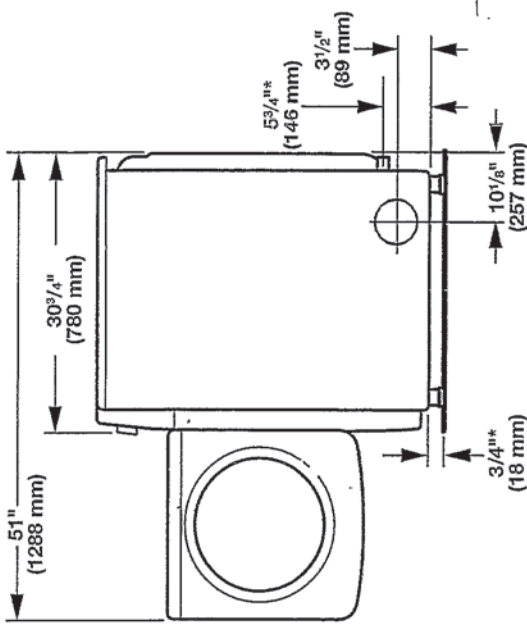

*Approx. measurement