

4 AUG 30/22



REVISED SPECIFICATIONS

PAGE 1 OF 8

LOT 506  
RG. PH 4

RECEIVED


AUG 30 2022

## Café™ 36" Built-In Gas Cooktop

CGP95363MS2 / CGP95362MS1

C A F É

DISTINCT BY DESIGN™

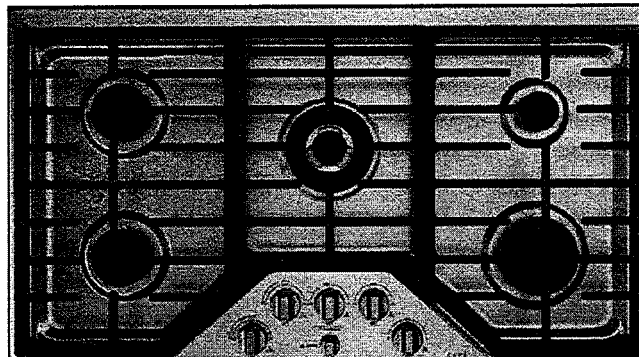

ADA  
COMPLIANT

ALSO  
AVAILABLE IN



CGP95362MS1  
Stainless Steel with  
Brushed Stainless  
knobs

### FEATURES & BENEFITS

Sear, fry and sauté on a **20,000 BTU triple ring burner**

Enjoy peace of mind with a touch of style thanks to **white LED backlit, heavy-duty knobs** that let you know when a burner is activated at a glance

Get the most from your cooktop and eliminate the need for extra cookware with **an extra-large, integrated cooktop griddle**

When you're updating your kitchen, attention to detail is a priority. That's why Café cooktops are guaranteed for an exact fit or Café Appliances will pay up to \$100 toward modifications

Always get your hollandaise just right with a **simmer burner** that provides low, even heat

Easily move heavy cookware across the surface without worry, thanks to **continuous, cast-iron burners**

Keep your kitchen sparkling, even when there's a spill with **sealed cooktop burners** that contain messes for easy cleanup

Prevent unintended burner activation with **control lock capability**

Enjoy the party without worrying about clean up, thanks to **dishwasher-safe grates**

### APPEARANCE

Control Knobs	Dishwasher Safe White LED Backlit
Cooktop Burner Grate Color	Matte Black

### FEATURES

Cooktop Burner Type	5 Sealed
Cooktop Surface	Deep Stainless Steel
Ignition System	Electronic
Burner - Left Front	9,500 BTU
Burner - Left Rear	9,500 BTU
Burner - Right Front	15,000 BTU Power Boil
Burner - Right Rear	5,000 BTU
Burner - Center	20,000 BTU Tri-ring Power Boil
Control Type	Knob
Cooktop Control Features	Child Lock
Control Location	Front Center
Cooktop Burner Grate Features	Continuous Grates Dishwasher Safe Edge-to-Edge Grates
Cooktop Burner Grate Material	Heavy Cast
Fuel Type	Natural Gas (factory set)
Valves (Degree of Turn)	270

### POWER/RATINGS

Burner BTU Ratings (000's/BTU) - LP Gas	(1) 18.0
	(1) 15.0
	(2) 9.5
	(1) 5.0
Burner BTU Ratings (000's/BTU) - Natural Gas	(1) 20.0
	(1) 15.0
	(2) 9.5
	(1) 5.0
Volts/Hertz/Amps	120V
	60Hz
	5A

### WEIGHTS & DIMENSIONS

Approximate Shipping Weight	57 lb
Cabinet Width	36 in
Cutout Dimensions Width x Depth (In.)	33-7/8 x 19-1/8
Net Weight	51 lb
Overall Depth	21 in
Overall Height	5 1/2 in
Overall Width	36 in

### ACCESSORIES

Stainless Steel Cleaner	Included
Griddle	Cast Iron - Included
LP Conversion Kit	Included

Café™ 36" Built-In Gas Cooktop

CGP95363MS2 / CGP95362MS1



WARRANTY	
Parts warranty	Limited 1-year entire appliance
Labor warranty	Limited 1-year entire appliance
Warranty notes	See written warranty for full details

DIMENSIONS AND INSTALLATION


**AGA Requirement:** All gas cooktop models require 7/16" free area below cooktop height to combustible material. Requires 18" minimum from countertop to adjacent overhead cabinets.

**Note:** If installing with Telescopic Downdraft System, consult both cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft.



**Electrical Rating:** 120V, 60Hz, 5A

**Installation With Single Wall Oven Information:** 36" Gas cooktops are approved for use over select 30" Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data.

**Installation Information:** Before installing, consult installation instructions, packed with product, for current dimensional data.

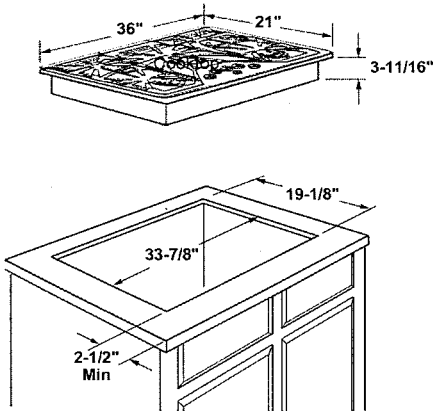

Installation above a wall oven

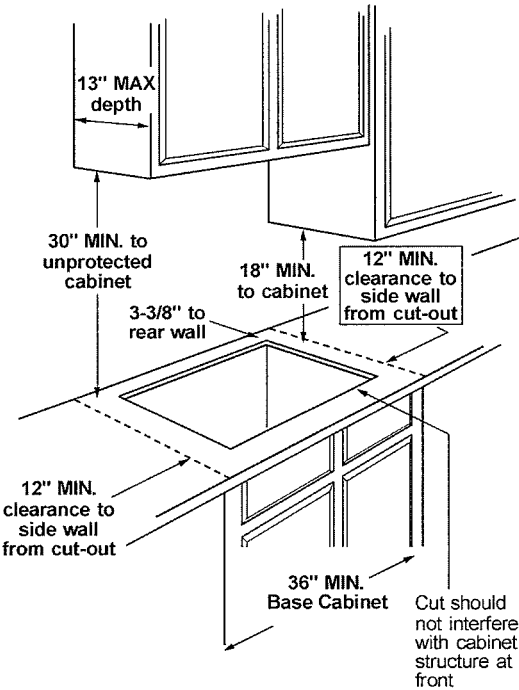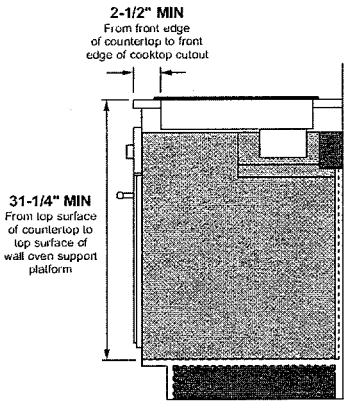

Dimension and installation information are shown in inches.  
\*Allow 5-3/4" depth at rear for electrical and gas connections

ADDITIONAL ACCESSORIES



CXCG1K0PMBZ  
Brushed Bronze  
Knobs




CXCG1K0PMSS  
Brushed Stainless  
Knobs



CXCG1K0PMBT  
Brushed Black  
Knobs



CXCG1K0PMCU  
Brushed Copper  
Knobs

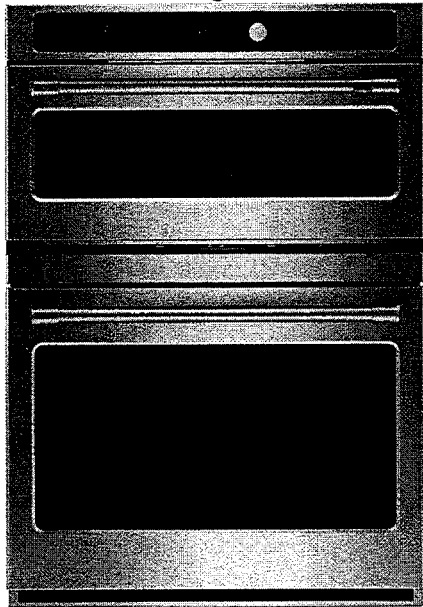

FEATURES & BENEFITS

Unmatched versatility to unleash your imagination - Enjoy a whole new level of cooking flexibility with a single oven that can be used in five different ways. Use it as a Convection Oven, Microwave, Toaster Oven, Warming/Proofing Oven, and Precision Cook Oven with Advantium Technology (upper oven).

The perfect marriage of quality and speed - Eliminate the need for preheating and cook your favorite foods two- to four-times faster than a conventional oven (upper oven)

The perfect bake is now perfectly easy - Achieve unrivaled performance with the only system that delivers top-down true convection for consistent results on special occasion favorites like roasts, chicken, turkey and more (lower oven)

The oven rack that handles it all - Easily remove heavy dishes with a roller rack that is specially designed to glide smoothly and stay in the oven during the self-clean cycle, so you never have to handle cumbersome racks again (lower oven)

The perfect fit you've always dreamed of - When you're updating your kitchen, attention to detail is a priority. That's why Café wall ovens are guaranteed for an exact fit or Café Appliances will pay up to \$300 toward modifications.

APPEARANCE

Color Appearance	Stainless Steel
Handle	Brushed Stainless
Handle Design	Café Pro
Installation	Above Warming Drawer

FEATURES	
Configuration	Double Oven
	Convection Bake (Upper) Microwave (Upper) Proof (Upper) Speedcook (Upper) Warm (Upper)
Advantium Cooking Modes	
Cooking System	True European Convection (Lower)
Oven Cleaning Type	Self-Clean with Steam Clean Option (Lower)
Style	Built-In
Cleaning Time	Variable with Delay Clean Option (Lower)
Program Cooking	Over 175 Programmed Menu Selections
	Convection Bake (Lower) Convection Bake Multi/Single Rack (Lower) Convection Broil (Lower) Convection Roast (Lower)
Oven Cooking Modes	
Self-Clean Oven Door Lock	Automatic (Lower)
Baking/Speed Cook Pan	Porcelain (Upper)
	Dial Glass Touch
Control Type	
Oven Features	10-Pass Bake Element 8-Pass Broil Element
	1 Self-Clean Heavy-Duty Roller Rack 2 Self-Clean Heavy-Duty Oven Racks 6 Ladder-Rack Positions (Lower)
Oven Rack Features	
Product Type	Double Oven Microwave Oven Combination
	Audible Preheat Signal Auto Recipe Conversion Sabbath Mode Control Lock Capability C° or F° Programmable Defrost Mode Delay Clean Option Delay Start Electronic Clock & Kitchen Timer (Lower) Hi / Low Broil Proof Mode Temperature Probe Warm Mode
Oven Control Features	
	Cook Defrost Express Reheat
Microwave Sensor Cooking Controls	
Microwave Watts (IEC-705)	1000.0
Power Levels	10
Turntable Size	16.0
Cooking Technology	Advantium
Fuel Type	Electric
	1 Halogen Interior Oven Light (Upper) 2 Halogen Interior Oven Lights (Lower) Hidden Bake
Oven Interior	

CAPACITY

Capacity (Cu. Ft.)	17 Upper / 5.0 Lower
--------------------	----------------------

POWER / RATINGS

Amp Rating at 208V	30
Amp Rating at 240V	30
Bake Wattage	2850W
Broiler Wattage	3400W
Convection Wattage	2400W
Electrical Input - 120V Amperage	15
Electrical Input - 120V Watts	1800
KW Rating at 208V	5.4
KW Rating at 240V	7.2

WEIGHTS & DIMENSIONS

Approximate Shipping Weight	235
Net Weight	215
Overall Height	42 3/8
Overall Width	29 3/4
Overall Depth	26 3/4
Cabinet Width	30
Cutout Dimensions (w x h x d) (in.)	28-5/8 x 42-1/4 x 23-1/2
Oven Interior Dimensions (lower)	25 x 17-3/8 x 20-1/4
Oven Interior Dimensions (upper)	20-1/16 x 8-1/2 x 17

ACCESSORIES

Cookbook	Yes (Advantium)
----------	-----------------

WARRANTY

Parts warranty	Limited 1-year entire appliance
Labor warranty	Limited 1-year entire appliance
Warranty notes	See written warranty for full details

DIMENSIONS AND INSTALLATION INFORMATION

**Note:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

**Installation Information:** Before installing, consult installation instructions packed with product for current dimensional data.

Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.**

**Note:** These ovens are not approved for stackable or side-by-side installations.

**ATTENTION INSTALLER:** All electric wall ovens must be hard-wired (direct-wired) into an approved junction box. A plug and receptacle is NOT permitted on these products.


**NOTE:** If the cabinet does not have a solid bottom, two braces or runners must be installed to support the weight of the oven. For single ovens, the runners and braces must support 200 lbs (91 kg). For double ovens, the runners and braces must support 375 lbs. (170 kg).

**NOTE:** If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or opening are covered.

**NOTE:** If the cabinet does not have a front frame and the sides are less than 3/4" (1.9 cm) thick, shim both sides equally to establish the cutout width.

**CT9800**  
**PT9800**  
**PT7800**  
**JT3800**

<b>CABINET</b>	30"
<b>A</b> —Overlap of oven at top of cutout	1"
<b>B</b> —Overlap of oven over side of edges of cutout	3/4"
<b>C</b> —Overlap of oven at bottom of cutout	1"
<b>OVEN</b>	
<b>D</b> —Install depth	23-1/2"
<b>E</b> —Overall height with trim	42-3/8"
<b>F</b> —Overall width	29-3/4"

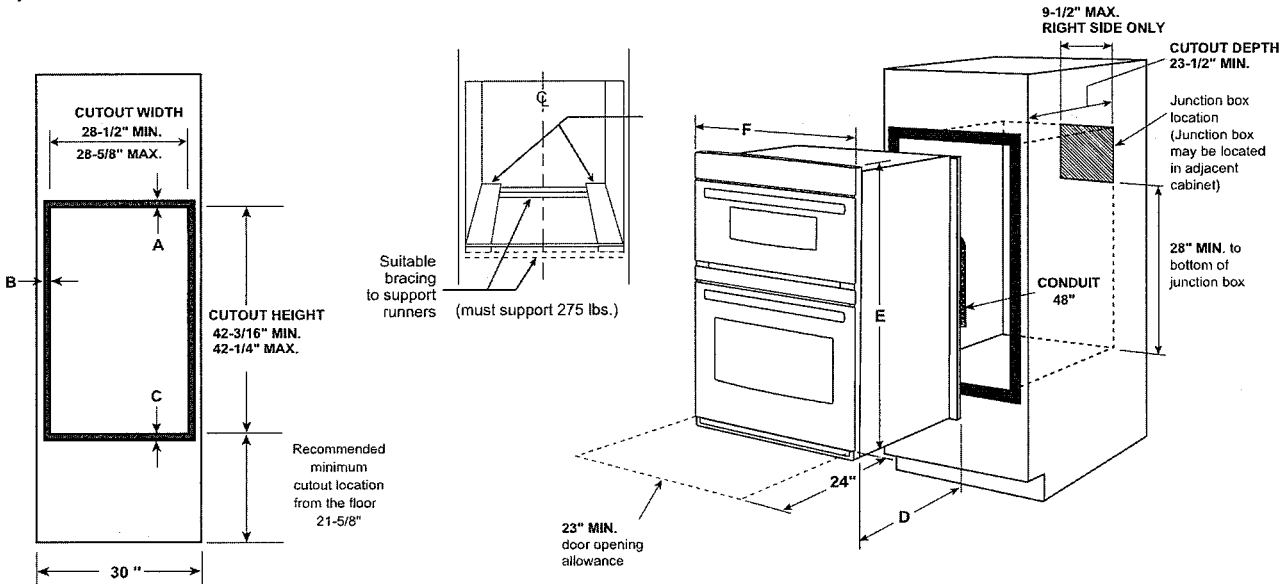

ADDITIONAL ACCESSORIES



CXWD0H0PMBZ  
Brushed Bronze  
2 handles



CXWD0H0PMSS  
Brushed Stainless  
2 handles



CXWD0H0PMBT  
Brushed Black  
2 handles



CXWD0H0PMCUC  
Brushed Copper  
2 handles

LOT 506  
R.G. PH 4

PAGE 5 of 8

UVW9361SL/BL  
36" WiFi Enabled Designer Wall Mount Hood w/Perimeter Venting

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)



INSTALLATION INFORMATION:

Before installing, consult Use & Care/installation instructions packed with product for current dimensional data.

OPTIONAL ACCESSORIES

- UX12DC9SLSS/BLTS - 12(ft.) Ceiling Duct Cover Kit  
Max ceiling height installation with kit - 12'-0" (36" hood spacing)
- UX14DC9SLSS/BLTS - 14(ft.) Ceiling Duct Cover Kit  
Max ceiling height installation with kit - 14'-0"
- UXCF91 - Charcoal Filter (needed if used in recirculation mode)
- UXRC1 - Remote Control (Wireless)

AMP RATING	
120V	TBD

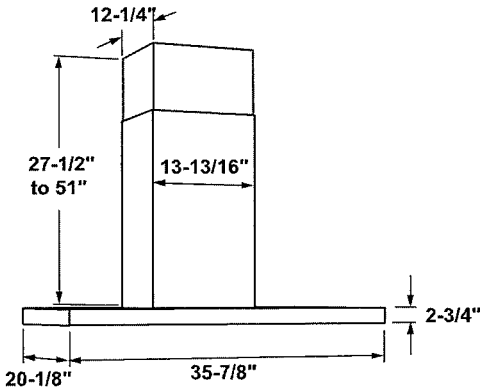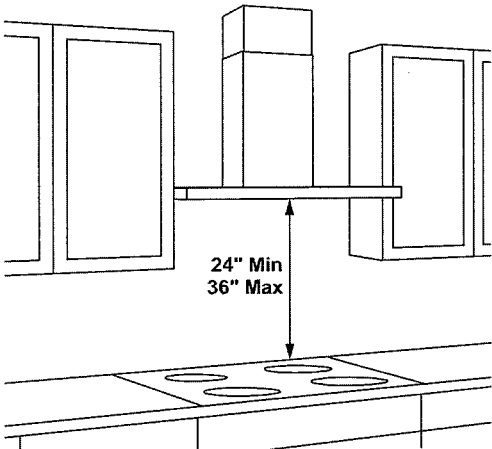

36"models require a 36"-wide opening  
\*The supplied duct cover fits 7'-7" to 10'-6" ceiling heights  
(12' ceiling height with optional high ceiling kit UX12DC9SLSS/UX12DC9BLTS)  
(14' ceiling height with optional high ceiling kit UX14DC9SLSS/UX14DC9BLTS)

The vent hood must be installed 24" min. above the cooking surface. For optimal performance, installing the hood more than 36" above the cooking surface is not recommended. The hood installation height above the cooking surface depends upon ceiling height. The telescopic duct cover conceals the ductwork running from the top of the hood to the ceiling.

NOTE: Installation height should be measured from the cooking surface to the lowest part of the hood. This hood may be installed onto a wall and vented to the outdoors, or it can be installed for recirculating operation. Parts for recirculating operation are supplied with the hood.



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Specification Revised 10/21

AUG 30/22

★ REVISED SPECS ★

LOT 506  
R.G. PH4

PAGE 6 OF 8

UVW9361SL/BL

36" WiFi Enabled Designer Wall Mount Hood w/Perimeter Venting

FEATURES AND BENEFITS

Adjustable CFM blower – High powered 610 CFM blower adjustable downward to either 380 or 290 maximum CFM to accommodate different installation needs

LED backlit glass touch control – Attractive controls are easy to read and instantly wipe clean

Perimeter venting – Provides a clean, modern design that makes a statement of style in any kitchen

WiFi Connect – Control appliances with a smart device or just the sound of your voice

10-ft. ceiling height – Included duct cover extensions reach up to 10' ceilings and work with optional accessories to reach up to 14' ceilings

Triple LED dimmable lighting-bulbs included – LED modules ensure bright lighting for the entire cooking environment

Convertible venting options – Select recirculating or external venting


Remote control capable – Activate and adjust your hood functions from anywhere in the kitchen with optional accessory

Timer and clock – Enjoy the convenience of a bright display at the ideal height

Chef Connect – Automatically control the hood's lights and fan by syncing with the range

Model UUV9361SLSS – Stainless steel

Model UUV9361BLTS – Black stainless

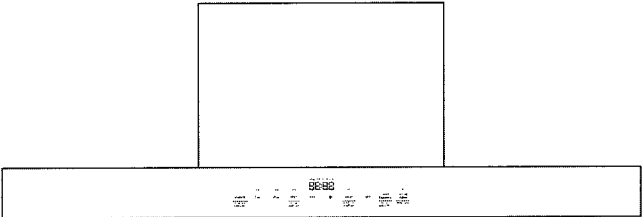


For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.

Specification Revised 10/21

LOT 506  
R.G. PH 4

PAGE 7 OF 8

Café™ ENERGY STAR® 27.4 Cu. Ft.  
Smart Quad-Door Refrigerator  
CQE28DM5NS5

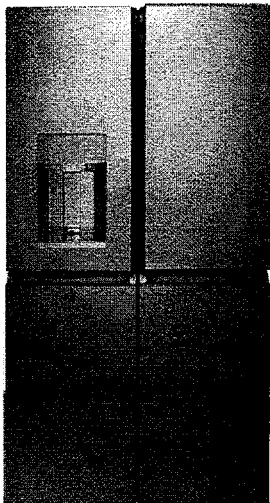

CQE28DM5NS5  
Platinum



FEATURES & BENEFITS

Angular, modern lines and the striking **platinum glass finish** creates an easy-to-clean, contemporary look for your kitchen

Organize your freezer with ease, thanks to **storage options** that include five drawers, two tilt-out door bins, a slide-out shelf and more

Enjoy the flexibility of a fully **convertible zone**, with sophisticated temperature settings designed to complement your lifestyle. With temperature adjustments from fresh food to full freeze, this is the perfect place to chill your signature beverage, freeze delicious sorbet or refrigerate party platters

Effortlessly fill containers with filtered water by simply pressing the **Auto Fill** button, which uses sensors to dispense the perfect amount every time

Keep your produce fresher thanks to a **Humidity Control System** with two distinct bins—a sealed, high-humidity bin that preserves leafy green vegetables longer and a vented bin that provides the perfect environment for fruits

Easily locate refrigerated favorites, thanks to an **LED light wall** that sheds crisp, uniform light throughout the interior

Enjoy even more storage space inside your refrigerator thanks to an **in-the-door icemaker**, which adds interior shelf space

Show-stopping style meets phenomenal functionality in a refrigerator designed to meet modern cabinet standards, with a **unique four-door design** for maximum flexibility and organization

Receive alerts on your smart device whenever your refrigerator's internal temperature rises above normal, thanks to **built-in WiFi connectivity** that helps keep foods party-platter ready

Spend more time filling and less time fumbling thanks to the **Integrated Dispenser Design**, which senses your proximity and automatically illuminates, so you never have to compromise on function and fashion.

APPEARANCE

Exterior design	Flat doors
Handle	Integrated pocket
Handle design	Café Minimal
Hidden door hinge(s)	Yes

FEATURES

Configuration	Quad door
WiFi connect	Built-in
Connected capabilities	Amazon Alexa; The Google Assistant; IFTTT
Temperature management features	Multiflow air system
Temperature management system	Triple evaporator
Defrost type	Frost Guard
Control type	Electronic temperature controls
Dispenser	Large stainless steel; Cubes, crushed ice and chilled water
Dispenser features	Hands-Free AutoFill; Door alarm; LED dispenser light; Water filter indicator light
Icemaker	Space saving ice
Water filtration	GE water filtration 6 month; XWF; Water filter indicator light
Filter location	Left door
Fresh food cabinet drawers	2 total; 2 adjustable humidity drawers
Fresh food cabinet shelves	4 glass split; 1 Quick Space shelf
Fresh food door bins	6 total; 2 with gallon storage; 1 adjustable
Fresh food door features	Dairy compartment
Fresh food features	LED light wall; Deli pan
	Located bottom right; Electronic temperature control; Convertible Zone; 3 temperature settings; Freezer: -6 to 5 (recommend 0); Refrigerator: 34 to 40 (recommend 37); Wine: 41 to 43 (recommend 42); LED lighting; Slide out pizza/bottle zone; 9" and 11" drawers; 3 adjustable bins
Select Zone Quad Door	
	Located bottom left; Electronic temperature control; LED lighting; Two 9" drawers and one 11" drawer; 3 door bins (1 fixed, 1 short tilt-out and 1 tall tilt-out)
Standard Zone Quad Door	
Exterior style	Free-standing
Leveling system	2 point front adjustable
Performance features	Easily removable door gaskets; Sabbath mode capable

CAPACITY

Total capacity (cubic feet)	27.4 cu. ft.
Fresh food capacity	15.62 cu. ft.
Freezer capacity	5.92 cu. ft.
Convertible drawer capacity	5.87 cu. ft.

WEIGHTS & DIMENSIONS

Overall depth	34-3/8 in.
Overall height	70 in.
Overall width	35-3/4 in.
Case depth without door	29-3/4 in.
Depth with door open 90°	48-3/4 in.
Height to top of hinge cover	69-7/8 in.
Height to top of case	68-5/8 in.
Width w/door open 90°	39-5/8 in.
Back air clearances	2 in.
Side air clearances	1/8 in.
Top air clearances	1 in.
Approximate shipping weight	425 lb.
Net weight	390 lb.

LOT 506  
R.G. PA 4

AUG 30/22 ★ REVISED SPES ★


PAGE 8 of 8

Café™ ENERGY STAR® 27.4 Cu. Ft.  
Smart Quad-Door Refrigerator  
CQE28DM5NS5



WARRANTY	
Parts warranty	Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
Labor warranty	Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
Warranty notes	See written warranty for full details

DIMENSIONS

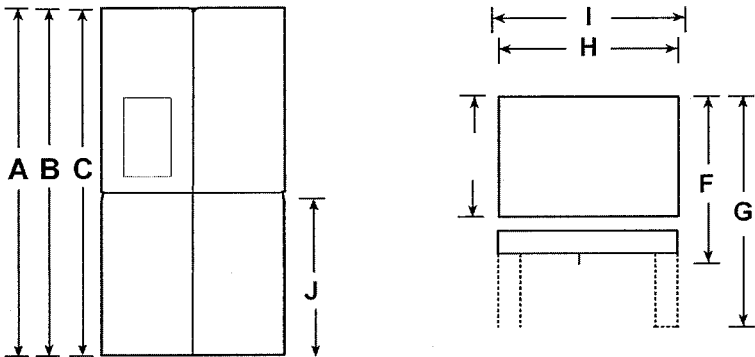

Overall Dimensions	A - Overall Height to top of door (in)	70
	B - Height to top of hinge cover (in)	69 7/8
	C - Height to top of case (in)	68 5/8
	D - Hinge Cover Depth from Case Flange (in)	6
	E - Case Depth without door (in)	29 3/4
	F - Overall Case Depth with Door Handle (in)	34 3/8
	G - Depth with FF Door open 90 deg (in)	48 3/4
	H - Case Width (in)	35 3/4
	I - Width with door open 90 deg including handle (in)	39 5/8
	J - Top Endcap of Freezer Doors to Floor (in)	33 1/4