

#### Sales Selection Sheet

Wallaceton
Schedule ^E 1



PURCHASER: INVENTORY HOME\_5

LOT / UNIT 25	PHASE 1	MODEL 25-2140 E The Wallace ALT PLAN

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

#### **APPLIANCES**

1	SCHEDULE E: FIVE APPLIANCES: SS FRIDGE, STOVE, CHIMNEY HOODFAN, DISHWASHER; WHITE FRONT LOADING WASHER/DRYER SEE SPECS PAGES 26-38	Qty: 1	
30,291	Note:		

Sub Total HST Total

- 1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
- 2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
- 3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
- 4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- 5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- 6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- 7. Selections will not be processed unless signed by Heathwood Homes Head Office.
- 8. The selections made on this schedule are final and cannot be changed once submitted.
- 9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Paid By	<u>Amount</u>			,
Total Payment:		,		
PURCHASER:	UNSOLD INVENTORY	27-Jul-20 DATE	MARILYN ROSEN  Decor Consultant	27-Jul-20 DATE
	INVENTORY HOME_5	DATE .	- APPENTED -	
			-07- 2 7 2020  Date Approved Heathwood Home	S (Huron) Limited

**TAX#:1** 

PREPARED BY: Marilyn Rosen

PE 362-1

Sinvoice.rpt 28may19

INVENTORY HOME\_5/

Project: Wallaceton
Unit: 25, Phase: 1
Model: 25-2140 E The Wallace ALT PLAN

Created: 3/10/2020 16:29:44

Locked:

Closed:

Kitchen		
Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***
Countertop	8595	Group 2-Quartz-Caesarstone-OCEAN FOAM #6141-3/4 inch with built-up edge ***2***
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG***
Cabinet Hardware	2098	12881 HARDWARE ***STD***
Island Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***
Island Countertop	8595	Group 2-Quartz-Caesarstone-OCEAN FOAM #6141-3/4 inch with built-up edge ***2***
Backsplash	5730	QT.CD.ARW.0306MT-Colour and Dimension Matte-Arctic White-3 x 6 ***STD***
Backsplash Grout	2226	Grout-(00) White ***STD***
Backsplash Tile Pattern	3060	HORIZONTAL BRICK ***STD***
HoodFan	9117	SCB50030-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-SS
Appliances	9117	Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.
Appliances	9117	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
Appliances	9117	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after
Comment	· ·	
Kitchen/Breakfast		
Flooring	7502	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3 1/4 inch ***8***
Floor Tile Grout	1111	N/A *****
Floor Tile Pattern	1111	N/A *****

INVENTORY HOME_5/ Project: Wallaceton Unit: 25, Phase: 1 Model: 25-2140 E The \

Wallace ALT PLAN

Created: 3/10/2020 16:29:44

Locked:

Closed:



	·
Comment	
yer	
Flooring	1111 GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225 Grout-(27) Silver ***STD***
Floor Tile Pattern	3000 STANDARD SQUARE ***STD***
Comment TO INCLUDE HA	LL BY DOUBLE FOYER CLOSET
undry Room	
Flooring	3000 GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	2225 Grout-(27) Silver ***STD***
Floor Tile Pattern	STANDARD SQUARE ***STD***
Comment	
undry Room Opt.	
Cabinet - Uppers	1111 N/A ******
Cabinet Hardware	1111 N/A *****
Comment	
ud Room	
Flooring	GE.MD.WHT.1818.MT Madison Series White Matte 18

NVENTORY HOME_5/ Project: Wallaceton		Created: 3/10/2020 16:29:44
Jnit: 25, Phase: 1 Model: 25-2140 E The Wallace (入し	IT PLAN	Locked: Closed:
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
Powder Room		
Flooring	3000	GE.MD.WHT.1818.MT Madison Series White Matte 18
,	3000	
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
Dining Room/Hall	in .	
Flooring	7502	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3
. 1001g	<u> </u>	1/4 inch ***STD***
Comment		
Dining Room/Hall		
Flooring	1111	N/A *****
Comment		
O4 D	ar	·
Great Room	7502	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3
Flooring	[/ 3UZ	1/4 inch ***STD***
Comment	<u>-</u>	
and the second second of the	Water Committee to the committee of the	

NVENTORY HOME_5/ Project: Wallaceton Unit: 25, Phase: 1 Model: 25-2140 E The Wa	illace ALT PLAN	Created: 3/10/2020 16:29:44 Locked: Closed:
Upper Hall		
Flooring	7502	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3 1/4 inch ***3***
Comment		
Opt. Finished Baseme	ent (Rec) Room/Hall	
Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Comment		
Master Bedroom		
Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Comment	<u> </u>	
Bedroom 2		
Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Comment		
Bedroom 3		
Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Comment		
Bedroom 4		
Flooring	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Comment ি	and the second s	

INVENTORY HOME_5/ Project: Wallaceton		Created: 3/10/2020 16:29:44
Unit: 25, Phase: 1 Model: 25-2140 E The Wallace ALT R	المما	Locked:
Children   Total Control Con	Helifekt rinning reger ar and rinning reger	Closed:
	7	
Master Ensuite		
Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Countertop Edge	4006	GROUP 1 - DOUBLE MITRE 1 1/2 INCH ***2***
Cabinet Hardware	7672	135-HARDWARE ***STD***
		<u> </u>
Floor Tile	7672	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
		Willie Matte-2 X 2 STD
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	8833	QT.UW.WHT.0810-Uniwall-White-8 x 10 ***STD***
Shower wan the	0000	Q1.0vv.vv111.0010-01110valii-vv11ite-0 x 10
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3060	HORIZONTAL BRICK ***UPG***
Shower wall file I attern	0000	TOTAL BANGK OF O
	<b>-</b>	
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***

Comment


INVENTORY HOME\_5/

Project: Wallaceton
Unit: 25, Phase: 1
Model: 25-2140 E The Wallace

Created: 3/10/2020 16:29:44

Locked:

Closed:



Main Bathroom		
Address to the programme first of Chapter on A ware with the productional of Marilla Data and the companion of Marilla Data.		10
Cabinet Colour/Style	9156	Viking III-SIMCOE-RAIN CLOUD-3DL ***STD***
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	7672	135-HARDWARE ***STD***
Flooring	7672	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Wall Tile Grout	2226	Grout-(00) White ***STD***
Main Bathroom Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
		·
Opt. Shower Floor Tile m	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Ob access Marill Title	<b>a</b> ooo	QT.UW.WHT.0810-Uniwali-White-8 x 10 ***STD***
Shower Wall Tile	8833	QT.OVV.VVFTT.0010-Offivvair-vvffite-0 X TO STD
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***

INVENTORY HOME_5/ Project: Wallaceton Unit: 25, Phase: 1	<b>6</b>	Created: 3/10/2020 16:29:44 Locked:
Model: 25, Fliase. 1  Model: 25-2140 E The Wallace	PLAN	Closed:
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Cabinet Colour/Style	9157	Viking III-SIMCOE-MOONLIGHT-3DL ***STD***
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2098	12801-HARDWARE ***STD***
Flooring	2098	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Plumbing Fixture (Colour)  Comment	1737	Plumbing Fixtures-WHITE ***STD***
Great Room Fireplace	j	
Туре	8869	Majestic MERC32 ***STD***
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***  PAGE 22
Surround Opt.	1111	N/A *****
Note	1111	Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.
Note	1111	Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.
Comment		
Basement Stairs		
Туре	1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***
Page 7 of 3		

INVENTORY HOME_5/ Project: Wallaceton	-	Created: 3/10/2020 16:29:44
Unit: 25, Phase: 1 Model: 25-2140 E The Wallace	PLAN	Locked: Closed:
		Side of the second seco
Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***
Handrail/Pickets/Post Colours	1729	Carpet Grade-Stain handrail, pickets, stringers, nosing _pos
Carpet	7625	T-15-Dynasty Tex-T-15-40 oz Poly ***STD***
Custom Stain/Paint	1111	N/A *****
Comment		
Landing to Basement		
and the state of t	and the	
Flooring	1111	N/A *****
Comment		
		·
Main Stairs		
Туре	1712	Oak Stairs ***STD MAIN STAIRS***
Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A ******
Handrail/Pickets/Posts Type	7652	1 5/16 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***STD***
Handrail/Pickets/Posts Colour	1728	Oak Grade-Stain handrail,oak pickets,stringers,treads,risers
Custom Stain/Paint	1111	N/A *****
Comment		
Hall		
Flooring	1111	N/A *****
(ଜିଲ୍ଲାମ୍ଲ (ଖି.ର) (ଜି.		

INVENTORY HOME_5/ Project: Wallaceton Unit: 25, Phase: 1 Model: 25-2140 E The Wallace ALT	EAN	Created: 3/1 Locked: Closed:	0/2020 16:29:44
Comment			
Throughout			
Walls - Paint Colour	1717 22-Wall-V	VARM GREY ***STD***	
Underpad	1079 500 Serie	s-Underpad ***STD***	
Thresholds	2232 Metal Thr	esholds ***STD***	
Switches and Plug	5796 Decora W	hite Switches and Plugs ***S	TD***
Trim Size	8705 4 1/4 Base	board and 2 ¾ Casings ***STE	)***
Trim - Paint Colour	1716 Trim-WHI	TE ***STD***	
Comment			
Purchaser: UNSOLD INUE INVENTORY HOME_5	ENTORY JULY 27/2	Decor Consultant	July 27/20 Date - APPRILL .
Purchaser:	Date	Wallaceton	-07- 2 7 2020 Date Approved



## Sales Selection Sheet

Wallaceton



PURCHASER: INVENTORY HOME\_5

LOT / UNIT PHASE MODEL 25 1 25-2140 E The Wallace ALT PLAN	· · · · · · · · · · · · · · · · · · ·				
25 1 25-2140 E The Wallace 17 FLAN	LOT / UNIT	PHASE	MODEL		
	25	1		$A \cap A \cap A \cap A$	

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

#### **APPLIANCES**

1	UPGRADE FROM STANDARD WHIRLPOOL ELECTRIC RANGE AS PER SCHEDULE E TO 30" WHIRLPOO GAS RANGE MODEL WEG745HOF SEE SPECS PAGES 27-30	Qty: 1
30,293	Note:	
Cabinetr	у	
2	04D - Increase vanity to kitchen height greater than 3' (90cm high, maintains vanity depth) - MASTER ENSUITE	Qty: 1
30,301	Note:	
CERAMI	C	
3	CERAMIC:- FOYER - FLOOR - UPG 1	· Qty: 1
30,303	Note:	
4	CERAMIC - GAR ENTRY/MUD ROOM - FLOOR - UPGRADE 1	Qty: 1
30,304	Note:	
5	CERAMIC - POWDER ROOM - FLOOR - UPG 1	Qty: 1
30,306	Note:	
6	CERAMIC - ENSUITE BATHROOM - FLOOR - UPG 1	Qty: 1
30,307	Note:	
7	CERAMIC - ENSUITE BATHROOM - SHOWER WALL AND CEILING SPECIAL PATTERN - INSTALL IN HORIZONTAL BRICK PATTERN	Qty: 1
30,310	Note:	
8	KITCHEN- GROUP 1 -3 X 6 TILE INSTALLED IN STANDARD BRICK PATTERN TO INCLUDE AREA BEHIND CHIMNEY HOOD FAN	Qty: 1
30,334	Note:	
GLASS A	AND MIRF	
9	GLASS AND MIRROR - ENSUITE MASTER - FRAMELESS GLASS SHOWER	Qty: 1

GRANITE - KITCHEN - GROUP 2 QUARTZ 3/4" WITH MITRE EDGE

Page 1 of 2

Initials: M

Qty: 1

**TAX#:1** 

PREPARED BY: Marilyn Rosen

Note:

30,322 Note:

**GRANITE** 


10

30,311



# Sales Selection Sheet

Wallaceton

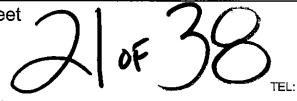

PURCHASER: INVENTORY HOME\_5

LOT / UNIT <b>25</b>	PHASE 1	MODEL 25-2140 E The Wallace	ALT PLAN	

ΔΙ	МI	

11	GRANITE - ENSUITE BATHROOM - GROUP 1 MITRE EDGE	Qty: 1	Ī
30,312	Note:		

#### **HARDWOOD**

12	HARDWOOD - KITCHEN/BREAKFAST - 3/4" X 3 1/4" VINTAGE ENGINEERED HARDWOOD	Qty: 1
30,319	Note:	
13	HARDWOOD - UPPER HALL - 3/4" X 3-1/4" RED OAK ENGINEERED	Qty: 1
30,320	Note:	

Sub Total HST Total

- 1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
- 2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
- 3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
- 4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- 5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- 6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- 7. Selections will not be processed unless signed by Heathwood Homes Head Office.
- 8. The selections made on this schedule are final and cannot be changed once submitted.
- 9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment Summary Paid By	<u>Amount</u>	
Total Payment:		

PURCHASER:

UNSOLD INVENTORY
INVENTORY HOME 5

27-Jul-20

DATE

MARIYN HOS

Decor Consultant

raser 27-Jul-20

- APPROVED

-07- 2 7 2020


Date Approved Heathwood Homes (Huron) Limited

**TAX#:1** 

PREPARED BY: Marilyn Rosen

PE 363-2


Sinvoice.rpt 28may19

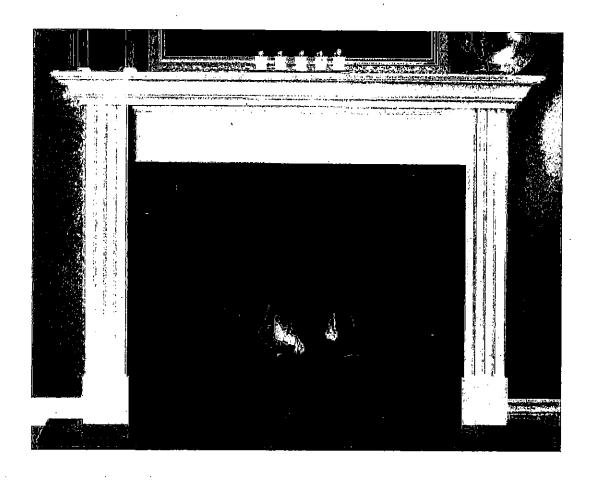

# **STANDARD NF 15 Mantel**

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

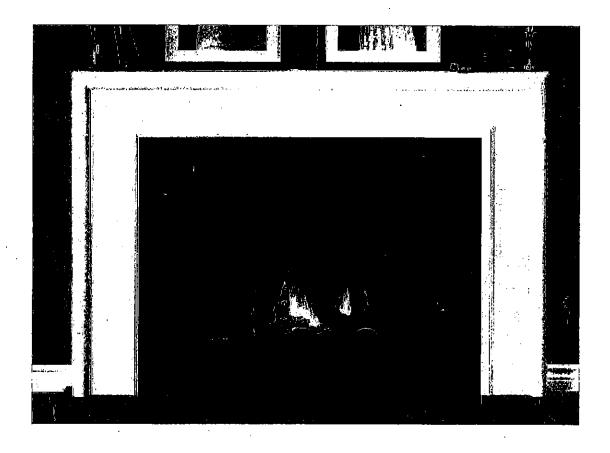



# STANDARD NF 17 Mantel WHITE PAINT GRADE FINISH


(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

Printed in Canada

Franke Kindred Canada Limited

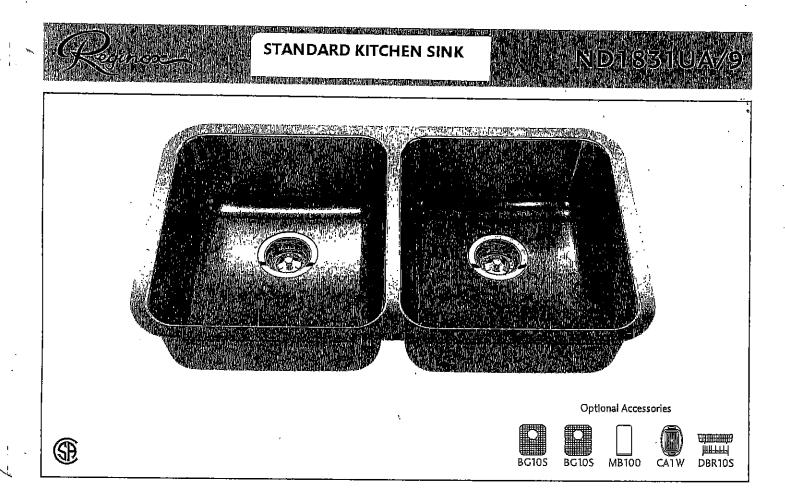

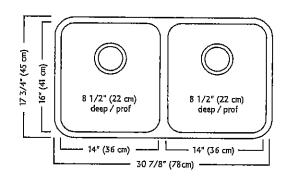



## ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

24,38

STANDARD KITCHEN FAUCET

Align

Modern



Single Handle Pull-Down Kitchen Faucet<sup>±</sup>

Model 7565†

# Chateau

Transitional



Lavatory Faucet with Pop-Up Drain Model L4621†

VANITY SINKS AND PEDESTAL





Posi-Temp® Pressure Balancing Tub/Shower Model 62320 / TL183†

Posi-Temp Valve and Tub/Shower Trim with Eco-Performance Easy Clean® XL Model 62320 / TL183EP†
[TL183EP not available in BC]

SHOWER AND 5' TUB FAUCETS





**2 Handle Roman Tub with 9" Spout** Model 4796 / T990†

FREESTANDING TUB FAUCETS



# **Bottom Mount Refrigerator**

#### PRODUCT MODEL NUMBERS

WRF532SMB WRF535SMB

WRE535SWR WRF540CWB

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of Installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting, See "Using the Controls."


Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker and water dispenser. If you have questions bout your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).


#### PRODUCT DIMENSIONS

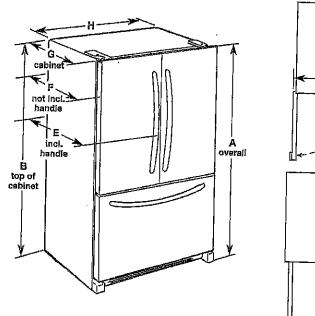

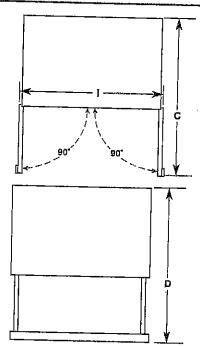

Model Numbe Size	r/ Overall "A"	Helght - Top of Cabinet "B"	Døpth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "!"
WAF535S 25.2 cu.		681% (174.8 cm)	481/e" (122.1 cm)	53%" (135 cm)	35%" (90 cm)	32 15/6" (83.7 cm)	291⁄2° (74 cm)	35%" (90.5 cm)	43%" (110.2 cm)
WRF535S 25.2 cu.	MB 70½" ft. (178.1 cm)	681%;' (174.8 cm)	48%" (122.1 cm)	53½" (135 cm)	35¾₅" (90 cm)	32½" (83.7 cm)	29%" (74 cm)	35%" (90.5 cm)	43%" (110.2 cm)
WRF532S -22 1 cu.		68 %; <del>(174.8 sm)</del>	47 // <sub>6</sub> ° <del>-(119.5-оп)</del> -	52%" <del>(132,4-em)</del>	34% <del>-(87.5 cm)</del> -	31'%" <del>(81:1-cm;)-</del>	28½" <del>-(71.4-cm)-</del>	32%"	42½" -(1 <del>07:6-em)</del>
WRF5400 20 cu. fi		66°%₁" (174.8 cm)	48" (121.9 cm)	44½* (113.0 cm)	29%" (74.6 cm)	28" (71.1 cm)	. 24½* (61.3 cm)	35%"	39%* (100.0 cm)

#### LOCATION REQUIREMENTS

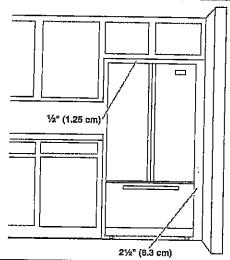

To ensure proper ventilation for your refrigerator, allow for a  $\frac{1}{2}$ " (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an Ice maker, make sure you leave some extra space at the back for the water line connections.


If you are installing your refrigerator next to a fixed wall, leave 2% (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.


**NOTE:** This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirippol Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Ref. W10597594B 10/1/14

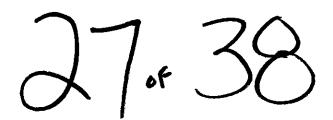

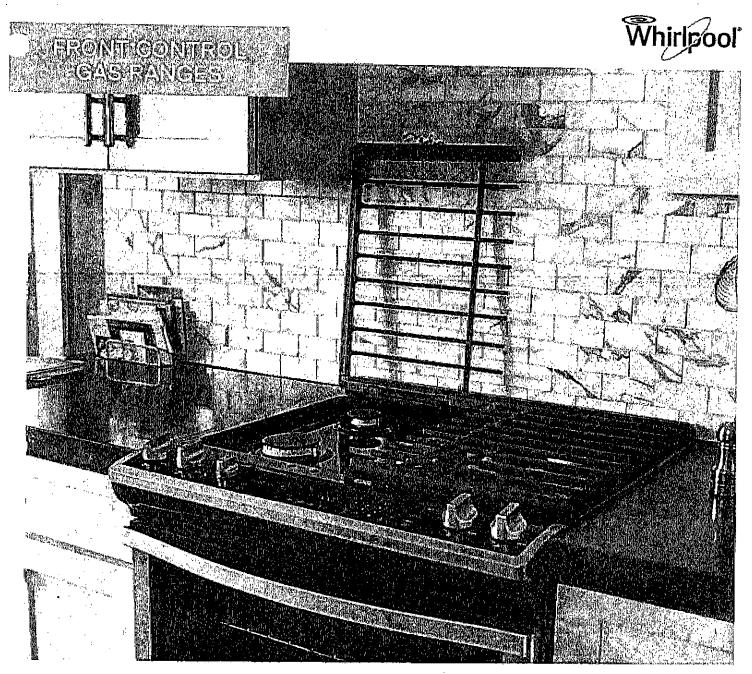

#### **FEATURING**



TimeSavor™ system
The TimeSavor™ system's Frozen
Bake Technology allows you to skip
preheating for favorites like pizza,
lasagna, chicken nuggets, fries or ples
so you can cook frozen foods faster.



#### HeatRight" system

The HealRight" system's True convection helps you to cook food faster" with a rear Ian and third heating element to circulate hot air over, under, and around food.




#### CompleteClean™ system


The CompleteClean\* system's EZ-2-Litt\* hinged grates give you quick access to spills on the cooktop. The industry first hinged design allows you to wipe up under them without removing them entirely. For a more thorough clean, the grates are also dishwasher-safe.

# Every day, care.

From the #1 Selling Appliance brand in the USA<sup>†</sup>

# Front Control Gas Ranges

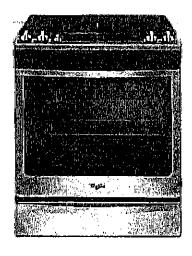



## WEG745HOF

30" Freestanding Range - 5.8 cu. ft.



TimeSavor™system

Frozen Bake" Technology



#### HeatRight<sup>™</sup> system

- True Convection
- Convection Conversion
- AccuS(mmer<sup>3</sup> burner
- Center Oval burner
- Temperature Sensor



#### CompleteClean System

- EZ-2-Lift" Hinged Grates
   AquaLift® Soft-cleaning Technology
- D:shwasher-safe knobs



# ReadySet™ system • (2) SpeedHeat\* burners


- Rapid Preheat
- Keep Warm
- Delay Cook

Available colors










- "In Till of Complete to Cock
- of lanua F, 174 of 173 3 and dust, Aupto Experimental to Laco of Prings.
- T. Clarge mant de level ellér mulalissen. Folica Une Instructions in lier a' nozzen. Dung the secration de a colorotest for irrefele the carrys to est



- . १ का निवादिक केन्द्रांच्यां कर्ता कारणांच्यां प्रति हिन्त होता हता. १ का निवादिक केन्द्रांच्यां कर्ता कारणांच्यां हैं ११ हैं हैं होता है

#### **ACCESSORIES & REPLACEMENT PARTS** ♥ Part number 8273888A Anti-Tip Kit for Range

- « Part number 4378577 Brick Baking Stone
- ▼ Part number 4396923 Pércelain Broller Pan & Grid
- Part number W10123240 Premium Broll Pan & Roasting Rock
- ▶ Part number 8009 Appliance Light Bulb 40 Watt



pared to a fraditional prehear and bake cycle for pezza, nuggef*allin*os, plea and tasagna. "Compared to thermal-bake cycle o el. [Baaut on 12-month everage of unit anies. Petingeration, Cooking. Diahwashers, and Laundry appliances. Traditino, 2014,

# 30" (76.2 cm) Slide-in Gas Range



#### PRODUCT MODEL NUMBERS

WEGZSIEHOD

WEG760HoD

WEG745H0F

#### GAS SUPPLY REQUIREMENTS

#### Gas supply line;

■ Provide a gas supply line of ¾" (1.9 cm) rigid pipe to the range location. A smaller size pipe on longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be ½" (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.


NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON®† tape.

#### Flexible metal appllance connector:

If local codes permit, a new CSA design-certified, 4 to 5 ft (122 to 152.4 cm) long, ½" (1.3 cm) or ¾" (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.



- $\,\blacksquare\,$  A ½" (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the appliance pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the range.
- Must include a shutoff valve:
  The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



- A. Gas supply line B. Shutoff valve "open" position
- C. To range

#### Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The Inlet pressure to the regulator should be as follows for proper operation:


Natural gas: Minimum pressure: 5" WCP Maximum pressure: 14" WCP

LP gae: Minimum pressure: 11" WCP Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

#### PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

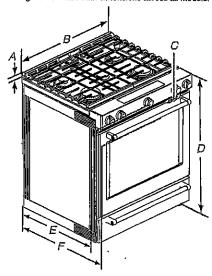

- 1¾c° (3.0 cm) height from cooklop to top of vent
- cooktop to top of vent

  B. 29%" (75.9 cm)

  C. Model/seriel number plate (located behind the oven door on the top right-hand side of the oven frame)

  D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in\*
- 28 1/16" (71.9 cm) max. depth from front of console to back of range. E.
- 28%" (73,3 cm) max, depth from handle to back of range,

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

\*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

#### Type of Gas Natural gas:

This range is factory set for use with Natural gas. See "Gas Conversions" section. The model/serial rating plate located behind the control papel has information on the types of gas that can be used. If the types of gas ilsted do not include the type of gas available, check with the local gas supplier.

#### LP gas conversion:

Conversion must be done by a qualified service technician. No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

<sup>18</sup>TEFLON is a registered trademark of Chemours.


#### Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

Range may be installed next to combustible walls with zero clearance.

NOTE: When installed in a slide-in cutout, the front of oven door may protrude beyond the base cabinet. Slide-In Cutout Freestanding Cutout

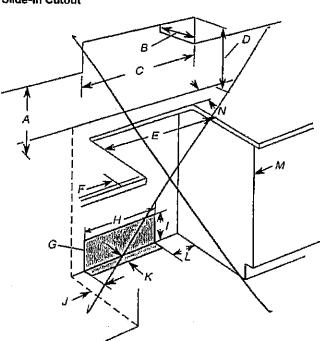

- A. 18" (45.7 cm) upper side cabinet to countertop B. 13" (33 cm) max, upper cabinet depth
- C. 30° (76.2 cm) min. opening width

- E. 30° (76.2 cm) min. opening width

  F. 3° (76.6 cm) min. opening width

  F. 3° (7.6 cm) min. clearance from both sides of range to side wall or other combustible material
- G. The shaded area is recommended for installation of rigid gas pipe and grounded outlet.
- H. 13 %" (33.3 cm) I. 7 ½" (19.5 cm) J. 4 ½" (12.2 cm)

- K. 3 1/16" (9.4 cm)
- L. 12" (30.5 cm)
- M. Cabinet door or hinges should not extend into the cutout.

- A. 18" (45.7 cm) upper side cabinet to countertop 8.13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE'.
- E. 30" (76.2 cm) min. opening width
- F. 3\* (7.6 cm) min. clearance from both sides of range to side well or other combustible material
- G. The shaded area is recommended for installation of rigid gas pipe and grounded outlet.
- H. 13 ½" (33,3 cm) I. 7 ½" (19.5 cm) J. 4 ¾" (12,2 cm)

- K. 3 11/18" (9.4 cm) plus measurement of N
- L. 12" (30.5 cm)
  M. Cabinet door or hinges should not extend into the cutout.
- N. Remaining counter depth should not exceed 21/4" (5.7 cm).
- \*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is shielded by not less than 1/4" (0.64 cm) flame retardant millipoard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.
- 30° (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.



#### PRODUCT MODEL NUMBERS

WDF110PAB WDF111PAB WDF120PAF WDF121PAF WDF310PAA WDF310PCA

WDF310PLA WDF320PAD WDF510PAY WDF520PAD WDF630PAY WDF530PLY

WDE530PSY-WDF540PAD WDF730PAY WDT710PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored,

or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for

your home and local codes and ordinances, Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit

Instructions for installing the power supply cord. Power supply cord must plug into a grounded

3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use % 0.D. copper tubing with compression fitting or flexible braided water supply line (½" minimum plastic tubing is not recommended), Use a 90%lbow with %TV.P.T. external pipe threads on one end. Do not solderwithin 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385566) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an alr gap if the drain hose is connected to house plumbing lower than 20" (50,8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.


#### PRODUCT DIMENSIONS

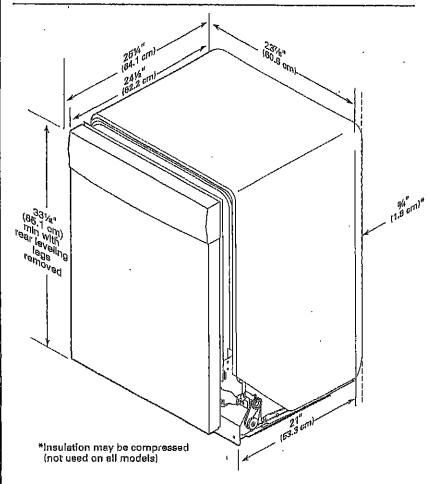

#### CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.


- \*Measure from the lowest point on the underside of the countertop. May be reduced to 331/2" (85.1 cm) by removing the rear leveling legs from dishwasher.
- \*\*Minimum, measured from narrowest point of opening.

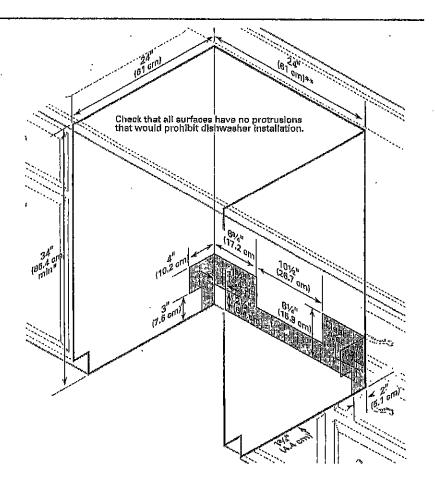

# 33×38

#### WHIRLPOOL WASHER Model #: WFW5620ዛW

Whitipoot Brand Cataida English | Wester and Oryem | Washers | Front Load Westers | WFW5920HW



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser









Whirlpool

5.2 cu. ff. I.E.C. Closef-Depth Front Load Washer with Load &  $\text{Go}^{\tau_M}$  Dispenser

Mariet #: WFW6620HV

#### Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in
Appearance	- Control of the Cont
LCD Touch Scieen	No
Window	Yes
Details	
Druin Material	Statiniess Steel

## Cycles and Options

į					44.	사실상	U j		$G_{\mathcal{A}}$				30-3
ì	Numbe	rot	Wash C	ycles		٠.	3	f		•	•	٠.	
ì				, *	٠.		•••	andiona amides	41 - A 11	- 11			200

#### Electrical

I		21.00		137		 			1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	
1:	Hz		٠.	. ,	100	 	60	+ 31		
			, '				4		and the same of the	

Power Cord Included

Yes

#### LOCATION REQUIREMENTS


Proper Installation is your responsibility.


#### You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Gulde for winterizing information.


#### Whirlpool Models\*

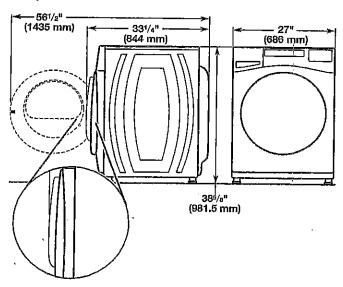

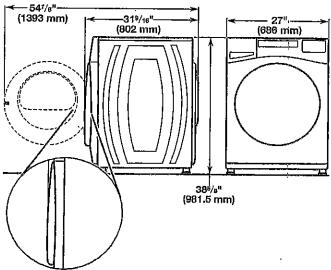

\*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.


#### Maytag Models

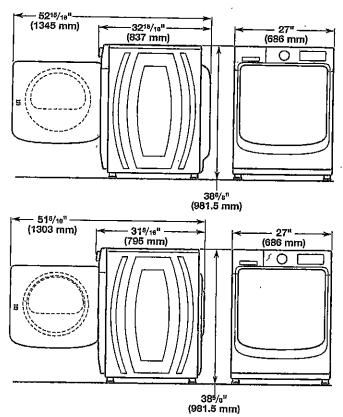


All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.


# Recessed area or closet installation (stacked washer and dryer):

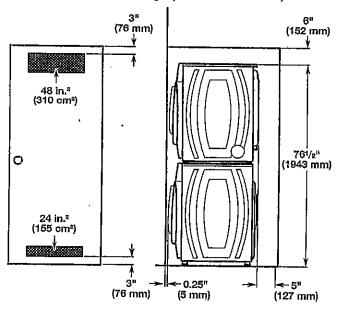


#### Custom under-counter installation:

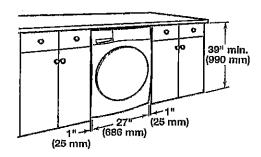

#### Recessed area or closet installation:

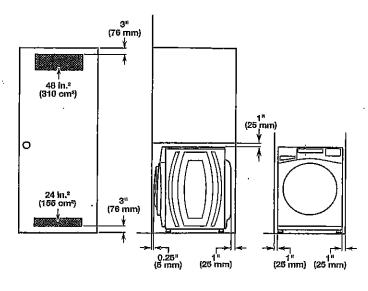

#### Custom cabinet installation:




#### **DRAIN SYSTEM**

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

#### Floor standpipe drain system

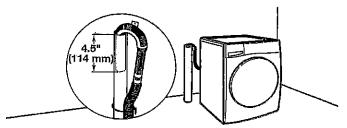


Minimum diameter for a standplpe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standplpe Adapter Klt is available (Part Number 3363920). Top of standplpe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

#### Wall standpipe drain system

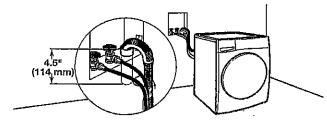

See requirements for floor standpipe drain system.

#### Laundry tub drain system

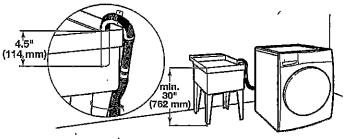


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

# 36 of 38

## WHIRLPOOL DRYER Model #: YWED5620HW

Whiripant Desic/ Caracia English | Washer and Divers | Divers | Electric Divers | YWGD552049





7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls


WhjrJpool"

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

#### Dimensions

Depth With Door Open 90 Degree	196.43 cm, 54-1/2 in
Height Width	98.42 cm, 38-6/4 in 68.58 cm, 27.0 in
Configuration and Overview	
Fuel Type	Electric
Cycles and Options	teritoria e propriede de la compansión d
Cycle Time Remaining	Yas Yas
Lint Filter Indicator	No
Number of Diver Cycles	36
Number of Dryness Levels	3 3
Ventilation System	
Long Vent	No.
Waximum Vent Length	64
Venting Direction	Left, Flight, Bottom, Rear
Electrical	
He a second of the second of	134 - <b>40</b> 0
Power Cord Included	Y66

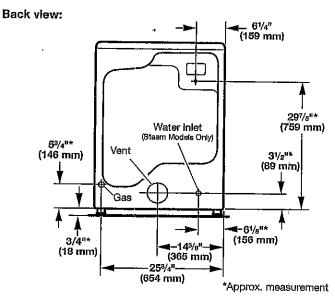

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

#### Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appllances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

# Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

## Recommended installation clearances (dryer only):

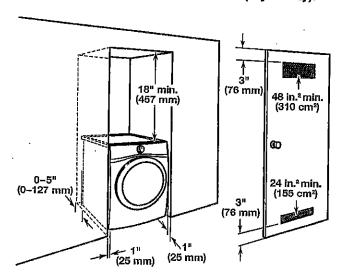

 $0\,\text{''}$  (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

#### Custom under-counter installation:

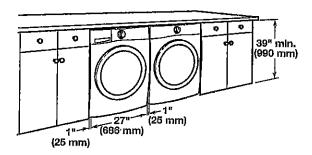

#### Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

#### Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

### For mobile home installation of gas dryers:

■ Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

#### If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 voit minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

#### Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

## **LOCATION REQUIREMENTS**

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

## AWARNING



#### Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.

Failure to do so can result in death, explosion, or fire.


#### You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

**IMPORTANT:** Do not operate, Install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.

#### **DRYER DIMENSIONS**

Front view:



#### Side view: Whirlpool Models

(1378 mm)

(787mm)

(787mm)

(146 mm)

(31/2"
(89 mm)

\*Approx. measurement

#### Maytag Models

