





Products				
PlotID	Length	Product	Plies	Net Qty
J1	16-00-00	9 1/2" NI-40x	1	7
J2	14-00-00	9 1/2" NI-40x	1	47
J2DJ	14-00-00	9 1/2" NI-40x	2	4
J3	10-00-00	9 1/2" NI-40x	1	1
J4	4-00-00	9 1/2" NI-40x	1	1
J5	2-00-00	9 1/2" NI-40x	1	4
B1	16-00-00	1 3/4" x 9 1/2" (2.0E 3100) WestFraser LVL	2	2
B4	14-00-00	1 3/4" x 9 1/2" (2.0E 3100) WestFraser LVL	2	2
B3	4-00-00	1 3/4" x 9 1/2" (2.0E 3100) WestFraser LVL	1	1
B2	4-00-00	1 3/4" x 9 1/2" (2.0E 3100) WestFraser LVL	2	2
B5	4-00-00	1 3/4" x 9 1/2" (2.0E 3100) WestFraser LVL	2	2

Connector Summary		
Qty	Manuf	Product
3	H1	IUS2.56/9.5
5	H1	IUS2.56/9.5
2	H1	IUS2.56/9.5
6	H1	IUS2.56/9.5
2	H2	HUS1.81/10
1	H4C	HUC410
1	H4	HGUS410



THIS IS A FLOOR COMPONENT PLACEMENT PLAN ONLY.

The wood beams and joists outlined on this plan are designed as individual building components to be incorporated into the design of the building at the specification of the building designer. Please see the individual beam reports, joist reports, and/or joist span tables for each component identified on this placement plan.

The supporting structure is to be specified by the building designer prior to the installation of joist(s) and/or beam(s). The building designer is responsible for the bracing of the floor system and its integration into the bracing of the overall structure. All components labelled "by others" or "as per plan", and all steel beams, are not within the scope of work of this seal.

The building designer must review and approve this plan to ascertain conformity to the overall structural plan of the building. All dimensions to be verified on site.

DATE: 2022-07-18

1st FLOOR FRAMING

Garden 12

Elevation 3



FROM PLAN DATED: 2022/05
BUILDER: GREENPARK HOMES
SITE: BARLASSINA CONSTRUCTION
MODEL: GARDEN 12
ELEVATION: 1,2,3
LOT: LOT
CITY: CAMBRIDGE
SALESMAN: RICK DICIANO
DESIGNER: AJ
REVISION:

REFER TO THE **NORDIC INSTALLATION** GUIDE FOR PROPER STORAGE AND INSTALLATION.
SQUASH BLOCKS OF 2x4, 2x6, 2x8 SPF #2 REQ'D UNDER INTERIOR UNIFORM LOAD BEARING WALLS.
MULTIPLE SQUASH BLOCKS REQ'D UNDER CONCENTRATED LOADS. SEE FIGURE 1.
CANTILEVERED JOISTS INCLUDING **CANT' OVER BRICK** REQ. I-JOIST BLOCKING ALONG BEARING AND RIMBOARD CLOSURE AT ENDS. SEE FIGURES 4/5 FOR REINFORCEMENT REQUIREMENTS.
FOR **HOLES** INCLUDING **DUCT CHASE** AND **FIELD CUT OPENINGS** SEE FIGURE 6 AND TABLES 6.1/6.2.
CERAMIC TILE APPLICATION AS PER OBC 9.30.6.

ALL **CONNECTORS** MUST BE INSTALLED AS PER THE **MANUFACTURER'S SPECIFICATIONS** USING THE MANUFACTURER **SPECIFIED FASTENERS**.
ALL **BEAM HANGER FASTENERS** INSTALLED INTO THE **SUPPORTING MEMBER MUST** BE A MINIMUM OF **3.5"** IN LENGTH UNLESS OTHERWISE SPECIFIED BY THE SUPPORTING MEMBER ENGINEER OF RECORD.

LOADING:
LIVE LOAD: 40.0 lb/ft²
DEAD LOAD: 15.0 lb/ft²
TILE LOAD: +5.0 lb/ft²

JOIST LL DEFLECTION LIMIT: L/480
SUBFLOOR: 3/4" GLUED AND NAILED

Garden 12
Elevation 3




FROM PLAN DATED: 2022/05
BUILDER: GREENPARK HOMES
SITE: BARLASSINA CONSTRUCTION
MODEL: GARDEN 12
ELEVATION: 1,2,3
LOT: LOT
CITY: CAMBRIDGE
SALESMAN: RICK DICIANO
DESIGNER: AJ
REVISION:

REFER TO THE **NORDIC INSTALLATION** GUIDE FOR PROPER STORAGE AND INSTALLATION.
SQUASH BLOCKS OF 2x4, 2x6, 2x8 SPF #2 REQ'D UNDER INTERIOR UNIFORM LOAD BEARING WALLS.
MULTIPLE SQUASH BLOCKS REQ'D UNDER CONCENTRATED LOADS. SEE FIGURE 1.
CANTILEVERED JOISTS INCLUDING **CANT' OVER BRICK** REQ. I-JOIST BLOCKING ALONG BEARING AND RIMBOARD CLOSURE AT ENDS. SEE FIGURES 4/5 FOR REINFORCEMENT REQUIREMENTS.
FOR **HOLES** INCLUDING **DUCT CHASE** AND **FIELD CUT OPENINGS** SEE FIGURE 6 AND TABLES 6.1/6.2.
CERAMIC TILE APPLICATION AS PER OBC 9.30.6.

ALL **CONNECTORS** MUST BE INSTALLED AS PER THE **MANUFACTURER'S SPECIFICATIONS** USING THE MANUFACTURER **SPECIFIED FASTENERS**.
ALL **BEAM HANGER FASTENERS** INSTALLED INTO THE **SUPPORTING MEMBER** MUST BE A MINIMUM OF **3.5"** IN LENGTH UNLESS OTHERWISE SPECIFIED BY THE SUPPORTING MEMBER ENGINEER OF RECORD.

LOADING:
LIVE LOAD: 40.0 lb/ft²
DEAD LOAD: 15.0 lb/ft²
TILE LOAD: +5.0 lb/ft²

JOIST LL DEFLECTION LIMIT: L/480
SUBFLOOR: 5/8" GLUED AND NAILED



Products				
PlotID	Length	Product	Plies	Net Qty
J1	16-00-00	9 1/2" NI-40x	1	14
J2	14-00-00	9 1/2" NI-40x	1	65
J3	10-00-00	9 1/2" NI-40x	1	2
B8 DR	14-00-00	1 3/4" x 9 1/2" (2.0E 3100) WestFraser LVL	3	3
B6	10-00-00	1 3/4" x 9 1/2" (2.0E 3100) WestFraser LVL	2	2
B7	6-00-00	1 3/4" x 9 1/2" (2.0E 3100) WestFraser LVL	2	2

Connector Summary		
Qty	Manuf	Product
13	H1	IUS2.56/9.5

DWG# TF22080214 TO TF22080216



STRUCTURAL COMPONENTS ONLY
DWG# TF22080218

THIS IS A FLOOR COMPONENT
PLACEMENT PLAN ONLY.

The wood beams and joists outlined on this plan are designed as individual building components to be incorporated into the design of the building at the specification of the building designer. Please see the individual beam reports, joist reports, and/or joist span tables for each component identified on this placement plan.
The supporting structure is to be specified by the building designer prior to the installation of joist(s) and/or beam(s). The building designer is responsible for the bracing of the floor system and its integration into the bracing of the overall structure. All components labelled "by others" or "as per plan", and all steel beams, are not within the scope of work of this seal.
The building designer must review and approve this plan to ascertain conformity to the overall structural plan of the building. All dimensions to be verified on site.

DATE: 2022-07-18

2nd FLOOR FRAMING

INSTALLATION GUIDE
NORDIC JOIST
-G133
ENGLISH
VERSION
2020-10-01

BASIC INSTALLATION GUIDE FOR RESIDENTIAL FLOORS




NORDIC
STRUCTURES

nordic.ca

- Installation of Nordic Joists shall be as shown in details 1, 2.
- Except for cutting to length, I-joist flanges should never be cut, drilled or notched.
- Install I-joists so that top and bottom flanges are within 1/2 inch of true vertical alignment.
- Concentrated loads should only be applied to the top surface of the top flange. Concentrated loads should not be suspended from the bottom flange with the exception of light loads, such as ceiling fans or light fixtures.
- I-joists must be protected from the weather prior to installation.
- I-joists must not be used in applications where they will be permanently exposed to weather, or will reach a moisture content of 15 percent or greater, such as in swimming pool or hot tub areas. They must not be installed where they will remain in direct contact with concrete or masonry.
- End bearing length must be at least 1-3/4 inch. For multiple-span joists, intermediate bearing length must be at least 3-1/2 inches.
- Ends of floor joists shall be restrained to prevent rollover. Use rim board or I-joist blocking panels.
- I-joists installed beneath bearing walls perpendicular to the joists shall have full-depth blocking panels, rim board, or squash blocks (cripple blocks) to transfer gravity loads from above the floor system to the wall or foundation below.
- For I-joists installed directly beneath bearing walls parallel to the joists or used as rim board or blocking panels, the maximum vertical load using a single I-joist is 3,300 plf, and 6,600 plf if double I-joists are used.
- Continuous lateral support of the I-joist's compression flange is required to prevent rotation and buckling. In simple span uses, lateral support of the top flange is normally supplied by the floor sheathing. In multiple-span or cantilever applications, bracing of the I-joist's bottom flange is also required at interior supports of multiple-span joists, and at the end support next to the cantilever extension. The ends of all cantilever extensions must be laterally braced as shown in details 3, 4, or 5.
- Nails installed in flange face or edge shall be spaced in accordance with the applicable building code requirements or approved building plans, but should not be closer than those specified on page 3.3 of the Nordic Joist Technical Guide (NS-GT3).
- Details 1 show only I-joist-specific fastener requirements. For other fastener requirements, see the applicable building code.
- For proper temporary bracing of wood I-joists and placement of temporary construction loads, see [AIA Technical Note: Temporary Construction Loads over I-Joist Roofs and Floors](#), Form J735.

All nails shown in the details are assumed to be common nails unless otherwise noted. Nails shall have a diameter not more than 0.128 inch for 2-1/2-inch nails, or 0.144 inch for 3-inch nails. Individual components not shown to scale for clarity.

NORDIC I-JOIST SERIES



NI-20	NI-40x
2x3 G-P F No. 2	2x3 1950F MSR
3/8 in. web	3/8 in. web
Depths	Depths
9-1/2" and 11-7/8 in.	9-1/2", 11-7/8" and 14 in.
33 pieces per unit	33 pieces per unit

RESIDENTIAL

NI-20 2x4 S-P-F No. 2 3/8 in. web Depths 9-1/2 and 11-7/8 in. 33 pieces per unit	NI-40x 2x4 1950F MSR 3/8 in. web Depths 9-1/2, 11-7/8 and 14 in. 33 pieces per unit	NI-60 2x3 2100F MSR 3/8 in. web Depths 9-1/2, 11-7/8, 14 and 16 in. 33 pieces per unit	NI-80 2x4 2100F MSR 3/8 in. web Depths 9-1/2, 11-7/8, 14 and 16 in. 23 pieces per unit	NI-90 2x4 2400F MSR 7/16 in. web Depths 11-7/8, 14 and 16 in. 23 pieces per unit	RIM BOARDS <table border="1"> <thead> <tr> <th>Width</th> <th>Length</th> </tr> </thead> <tbody> <tr> <td>1-1/8 in.</td> <td>16 ft</td> </tr> </tbody> </table> Depths 9-1/2 to 16 in. APA Rim Board Plus	Width	Length	1-1/8 in.	16 ft
Width	Length								
1-1/8 in.	16 ft								

I-joists are not stable until completely installed, and will not carry any load until fully braced and sheathed.

Avoid Accidents by Following these Important Guidelines:

1. Brace and nail each I-joist as it is installed, using hangers, blocking panels, rim board, and/or cross-bridging at joist ends. When I-joists are applied continuous over interior supports and a load-bearing wall is planned at that location, blocking will be required at the interior support.
2. When the building is completed, the floor sheathing will provide lateral support for the top flanges of the I-joists. Until this sheathing is applied, temporary bracing, often called struts, or temporary sheathing must be applied to prevent I-joist rollover or buckling.
 - Temporary bracing or struts must be 1x4 inch minimum, at least 8 feet long and spaced no more than 8 feet on centre, and must be secured with a minimum of two 2-1/2-inch nails fastened to the top surface of each I-joist. Nail the bracing to a lateral restraint at the end of each bay. Lap ends of adjoining bracing over at least two I-joists.
 - Or, sheathing (temporary or permanent) can be nailed to the top flange of the first 4 feet of I-joists at the end of the bay.
3. For cantilevered I-joists, brace top and bottom flanges, and brace ends with closure panels, rim board, or cross-bridging.
4. Install and fully nail permanent sheathing to each I-joist before placing loads on the floor system. Then, stack building materials over beams or walls only.
5. **Never** install a damaged I-joist.

Improper storage or installation, failure to follow applicable building codes, failure to follow span ratings for Nordic I-joists, failure to follow allowable hole sizes and locations, or failure to use web stiffeners when required can result in serious accidents. Follow these installation guidelines carefully.

Do not walk on I-joists until fully fastened and braced, or serious injuries can result.

Never stack building materials over unsheathed I-joists. Once sheathed, do not overstress I-joist with concentrated loads from building materials.

WEB HOLES IN I-JOISTS

Rules for Cutting Holes in I-Joints

1. The distance between the inside edge of the support and the centreline of any hole shall be in compliance with the requirements of Table 6.1.
2. I-joint top and bottom flanges must never be cut, notched or otherwise modified.
3. Whenever possible, field-cut holes must be centred on the middle of the web.
4. The maximum size hole that can be cut into an I-joint web shall equal the clear distance between the flanges of the I-joint minus 1/4 inch. A minimum of 1/8 inch should always be maintained between the top or bottom of the hole and the adjacent I-joint flange.
5. The sides of square holes or longest sides of rectangular holes should not exceed 3/4 of the diameter of the maximum round hole permitted at that location.
6. Where more than one hole is necessary, the distance between adjacent hole edges shall exceed twice the diameter of the largest round hole or twice the size of the largest square hole - or twice the length of the longest side of the longest rectangular hole -, and each hole must be sized and located in compliance with the requirements of Table 6.1.
7. Holes measuring 1-1/2 inch or smaller shall be permitted anywhere in a cantilevered section of a joist. Holes of greater size may be permitted subject to verification.
8. A 1-1/2 inch hole or smaller can be placed anywhere in the web provided that it meets the requirements of rule number 6 above.
9. All holes shall be cut in accordance with the restrictions listed above and as illustrated in detail 6a.
10. Limit three maximum-size holes per span.
11. A group of round holes at approximately the same location shall be permitted if it meets the requirements for a single round hole circumscribed around them.

Notes:

1. Never drill, cut or notch the flange, or over-cut the web.
2. Holes in web should be cut with a sharp saw.
3. For rectangular holes, avoid over-cutting the corners, as this can cause unnecessary stress concentrations. Slightly rounding the corners is recommended. Starting the rectangular hole by drilling a 1-inch-diameter hole in each of the four corners and then making the cuts between the holes is another good method to minimize damage to the I-joist.

Rules for Cutting Duct Chase Openings in I-joints

1. The distance between the inside edge of the support and the centreline of a duct chase opening shall be in compliance with the requirements of Table 6.2.
2. I-joint top and bottom flanges must never be cut, notched or otherwise modified.
3. The maximum depth of a duct chase opening that can be cut into an I-joint web shall equal the clear distance between the flanges of the I-joint minus 1/4 inch. A minimum of 1/8 inch should always be maintained between the top or bottom of the opening and the adjacent I-joint flange.
4. All openings shall be cut in accordance with the restrictions listed above and as illustrated in detail 6b.
5. Limit one maximum-size duct chase opening per span.

6b

Notes:

1. Never drill, cut or notch the flange, or over-cut the web.
2. Holes in web should be cut with a sharp saw.
3. Avoid over-cutting the corners, as this can cause unnecessary stress concentrations. Slightly rounding the corners is recommended.

Starting the rectangular hole by drilling a 1-inch-diameter hole in each of the four corners and then making the cuts between the holes is another good method to minimize damage to the I-joint.

I-joint depth (in.)	Maximum depth of the opening (in.)
9-1/2	6-1/4
11-7/8	8-5/8
14	10-3/4
16	12-3/4

Maximum Allowable Hole Size in Lateral-restraint-only Blocking Panels

1. The maximum allowable hole size for a lateral-restraint-only blocking panel is 2/3 of the lesser dimension of the blocking's depth or length. Assuming the blocking panel is longer than its height (or depth), the table above applies. For other applications, contact Nordic Structures.
2. Holes cut into the blocking panels are subject to the following limitations:
 - The top and bottom flanges of an I-joist blocking panel must never be cut, notched or otherwise modified.
 - Field-cut holes must be centred in the blocking horizontally.
 - While round holes are preferred, rectangle holes may be used provided the corners are not over cut. Slightly rounding corners or pre-drilling corners with a 1-inch-diameter bit is recommended.
 - All holes must be cut in a workman-like manner in accordance with the limitations listed above.

I-joist or rim board blocking depth (in.)	Maximum allowable hole diameter (in.) ^(a)
9-1/2	6-1/4
11-7/8	7-3/4
14	9-1/4
16	10-1/2

^(a) Maximum allowable hole diameter in blocking panel, where the blocking panel is longer than its height.

The diagram illustrates the required stiffener size for two conditions: Concentrated Load and End Bearing.

Concentrated Load (Load Stiffener): This diagram shows a cross-section of a beam with a stiffener. The stiffener is labeled "Tight joint, no gap" and the beam is labeled "Gap".

End Bearing (Bearing Stiffener): This diagram shows a cross-section of a beam with a stiffener. The stiffener is labeled "Gap" and the beam is labeled "Tight joint, no gap".

Stiffener Size Requirements: This diagram shows a cross-section of a beam with a stiffener. The stiffener is labeled "Flange width 2-1/2\" or 3-1/2\" and "Approx. 2\". The stiffener is also labeled "Four 2-1/2\" nails, 3\" nails required for I-joints with 3-1/2\" flange width" and "No gap".

Nailing to Only One Flange Edge (Top View)

Nailing to Both Flange Edges (Top View)

Recommended Closest Nail Spacing for Fastening Sheathing to I-joist Flanges to Minimize Splitting

Fastener size (diameter x length)	Flange face nailing ⁽¹⁾		Flange edge nailing ⁽¹⁾	
	End distance (in.)	Nail spacing (in.)	Nail spacing (in.)	
			Nailed to only one flange edge	Nailed to both flange edges
0.128" or smaller in diameter, and 3-1/4" or shorter in length	2	2	2	4
Greater than 0.128" up to 0.148" in diameter, and 3-1/4" or shorter in length	2	3	2	6

⁽¹⁾ If more than one row is required, offset rows a minimum of 1/2 inch and stagger.
⁽²⁾ Closest nail spacing measured from one flange edge. Nails on opposite flange edge must be offset one-half the minimum spacing.

1a

Nordic I-joint blocking panel

2-1/2" nails at 6" o.c. to top plate (when used for lateral shear transfer, nail to bearing plate with same nailing as required for floor sheathing)

Attach I-joint to top plate per detail 1b

1b

Load-bearing wall above shall align vertically with the wall below. Other conditions, such as offset bearing walls, are not covered by this detail.

Blocking panel required over all interior supports under load-bearing walls or when floor joists are not continuous over support. The NIBC requires blocking at load-bearing and non-load-bearing walls constructed with required braced wall panels (shearwalls).

Joint attachment per detail 1b

2-1/2" nails at 6" o.c. to top plate

Nordic I-joint blocking panel per detail 1a

Notes:

1. An occasional blocking panel (one per line of blocking) may be left out for the passage of plumbing or ventilation ducts.
2. For other applications, contact Nordic Structures.
3. For other options, see details 1p-1 to 1g-5.

Use backer block if hanger load exceeds 350 lbf. Before installing a backer block to a double joist, drive three additional 3" nails through the webs and filler block where the backer block will fit. Clinch. Install backer block tight to top flange. Use twelve 3" nails, clinched when possible. Maximum resistance for hanger for this detail = 1,620 lbf.

Double Joist header

Filler block per detail 1p

Top-of-face-mount hanger

Backer block required:

- Only on the loaded side for top-mount hangers
- On both sides for face-mount hangers

Flange width (in.)	Material thickness required (in.) ⁽¹⁴⁾	Minimum depth (in.) ⁽¹⁵⁾
2-1/2	1	5-1/2
3-1/2	1-1/2	7-1/4

⁽¹⁴⁾ Minimum grade for backer block material shall be S-P-F No. 2 or better for solid sawn lumber and wood structural panels conforming to CAN/CSA C226 Standard.

⁽¹⁵⁾ For face-mount hangers use net joist depth minus 3-1/4 inches for joists with 1-1/2-inch-thick flanges.

1b

Rim board

One 2-1/2" nail at top and bottom flange

Attach rim board to top plate using 2-1/2" toe-nails at 6" o.c.

One 2-1/2" face nail at each side at bearing

Note:
1. To avoid splitting flange, start nails at least 1-1/2 inch from end of I-post. Nails may be driven at an angle to avoid splitting of bearing plate.

1j

Nordic Lam or SCL

Top- or face-mount hanger installed per manufacturer's recommendations

1m

Install hanger per manufacturer's recommendations

Multiple i-joint header with full depth filler block shown. Nordic Lamin or SCL headers may also be used. Verify header resistance to support concentrated loads.

Backer block per detail 1h

Filler block per detail 1p

Note:
1. See detail 1h for maximum support resistance.

1n

Do not bevel-cut i-joint beyond inside face of wall

Attach i-joint per detail 1b

Note:
1. Blocking required at bearing for lateral support, not shown for clarity.

1d

This diagram shows a cross-section of a wall or beam assembly. A blocking panel is installed between two vertical members. The panel is secured with a top flange and a bottom flange, each with a 2-1/2" nail. A squish block is placed between the panel and the vertical member, with a length longer than the I-post depth.

Nordic I-post or rim board blocking panel per detail 1a

Squash block, 1 1/16" longer than the I-post depth

Attach squash block to top and bottom flange with one 2-1/2" nail at each location

1k

This diagram shows a cross-section of a wall or beam assembly. A top-mount hanger is installed on the top flange of a vertical member. The hanger is secured with a 2x plate flush with the inside face of the wall or beam, with a 1/8" overhang allowed past the inside face of the wall or beam.

2x plate flush with inside face of wall or beam, 1/8" overhang allowed past inside face of wall or beam.

Top-mount hanger installed per manufacturer's recommendations

Note:
1. Unless hanger sides laterally support the top flange, bearing stiffeners shall be used.

Notes:

- Support back of I-joint web during nailing to prevent damage to web/flange connection.
- Leave a 1/8-inch to 1/4-inch gap between top of filler block and bottom of top I-joint flange.
- Filler block is required between joists for full length of span.
- For flange width of 2-1/2 inches, nail joints together with two rows of 3-inch nails at 12 inches o.c. (clinched when possible) on each side of the double I-joint (total of four nails per foot). For flange width of 3-1/2 inches, use two rows of 3-inch nails at 6 inches o.c. on each side of the double I-joint (total of eight nails per foot).
- The maximum factored load that may be applied to one side of the double I-joint using this detail is 860 lb/ft.

Filler Block Requirements for Double I-joint Connection

Flange width (in.)	Nail depth (in.)	Filler block size (in.)	Example
2-1/2	9-1/2	2-1/8 to 2-1/4 x 6	2x6 + 5/8" or 3/4" sheathing
	11-7/8	2-1/8 to 2-1/4 x 8	2x8 + 5/8" or 3/4" sheathing
	14	2-1/8 to 2-1/4 x 10	2x10 + 5/8" or 3/4" sheathing
	16	2-1/8 to 2-1/4 x 12	2x12 + 5/8" or 3/4" sheathing
3-1/2	9-1/2	3 x 6	2 x 2x6
	11-7/8	3 x 8	2 x 2x8
	14	3 x 10	2 x 2x10
	16	3 x 12	2 x 2x12

Note:

- The height of the filler block may be different from that specified in the table, as long as it allows nailing and respects the required gap.

15-1

See note 2

1/8" gap minimum

Two 2-1/2" nails from each web-to-lumber piece

2x4 minimum

Blocking panel (note 1)

One 2-1/2" nail at top and bottom flange

Rim board

2-1/2" nails at 6" o.c.

One 2-1/2" nail, one side only

1-1/2"

Notes:

1. In some local codes, blocking panels are prescriptively required in the first joist space (or first and second joist spaces) next to the starter joist. Where required, use local code requirements for spacing of the blocking panels. As a minimum, it is recommended to use blocking panels spaced at 4 feet on centre.
2. Details shown are for minimum blocking attachment. Transfer of lateral loads may require additional fasteners. In such cases, nail size, nail space, spacing and specific design detailing shall be provided by the building designer.
3. Where blocking panels are required between adjacent joists, the blocking panels can be staggered by approximately 3 inches, and end-nailed as shown.
4. Nails attaching lumber piece to joist web should be driven from the web side and clinched on the lumber side.

This document supersedes all previous versions. For the latest version, consult nordic.ca or contact Nordic Structures.

+ FOR ALL

construction details

→ DC3

Simple or multiple span																
Minimum distance from inside face of any support to centre of hole (ft-in.)																
Joist depth	Joist series	Round hole diameter (in.)														
		2	3	4	5	6	6 1/4	7	8	8-8/8	9	10	10-3/4	11	12	12-3/4
9-1/2"	NI-20	0-7"	1'-6"	2'-0"	4'-3"	5'-8"	6'-0"	-	-	-	-	-	-	-	-	-
	NI-40x	0-7"	1'-6"	3'-0"	4'-4"	6'-0"	6'-4"	-	-	-	-	-	-	-	-	-
	NI-60	1'-3"	2'-6"	4'-0"	5'-4"	7'-0"	7'-5"	-	-	-	-	-	-	-	-	-
	NI-80	2'-3"	3'-6"	5'-0"	6'-6"	8'-2"	8'-8"	-	-	-	-	-	-	-	-	-
11-7/8"	NI-20	0-7"	0-8"	1'-0"	2'-4"	3'-8"	4'-0"	5'-0"	6'-6"	7'-9"	-	-	-	-	-	-
	NI-40x	0-7"	0-8"	1'-3"	2'-8"	4'-0"	4'-4"	5'-5"	7'-0"	8'-4"	-	-	-	-	-	-
	NI-60	0-7"	1'-6"	3'-0"	4'-3"	5'-9"	6'-0"	7'-3"	8'-10"	10'-0"	-	-	-	-	-	-
	NI-80	1'-9"	2'-2"	4'-2"	5'-8"	7'-0"	7'-5"	8'-6"	10'-3"	-	-	-	-	-	-	-
14"	NI-20	0-7"	0-8"	1'-5"	3'-2"	5'-4"	5'-4"	6'-9"	8'-9"	10'-2"	-	-	-	-	-	-
	NI-40x	0-7"	0-8"	0-8"	1'-0"	2'-4"	2'-9"	3'-9"	5'-2"	6'-0"	6'-6"	8'-3"	10'-2"	-	-	-
	NI-60	0-7"	0-8"	1'-8"	3'-0"	4'-3"	4'-8"	5'-8"	7'-2"	8'-0"	8'-8"	10'-4"	11'-9"	-	-	-
	NI-80	0'-10"	2'-0"	3'-4"	4'-9"	6'-2"	6'-5"	7'-6"	9'-0"	10'-0"	11'-8"	12'-4"	13'-9"	-	-	-
16"	NI-20	0-7"	0-8"	0'-10"	2'-5"	4'-0"	4'-5"	5'-9"	7'-5"	8'-8"	9'-4"	11'-2"	12'-11"	-	-	-
	NI-60	0-7"	0-8"	0-8"	1'-6"	2'-10"	3'-2"	4'-2"	5'-6"	6'-4"	7'-0"	8'-5"	9'-8"	10'-2"	12'-2"	13'-9"
	NI-80	0-7"	1'-3"	2'-8"	3'-10"	5'-3"	5'-6"	6'-6"	8'-0"	9'-0"	9'-5"	11'-9"	12'-3"	12'-9"	14'-5"	16'-0"
	NI-90	0-7"	0-8"	0-8"	1'-9"	3'-3"	3'-8"	4'-9"	6'-5"	7'-5"	8'-0"	9'-10"	11'-9"	13'-9"	15'-9"	15'-4"

Notes:

- Tabulated values are applicable to residential floor construction meeting the above design criteria.
- The above table is based on the I-joists being used at their maximum spans. The minimum distance as given above may be reduced for shorter spans; consult your joist distributor.

Design Criteria	
Joist spacing	Up to 24 inches
Loads	Live Load = 40 psf and dead load = 15 psf
Deflection limits	L/480 under live load and L/240 under total load

Simple span		Minimum distance from inside face of any support to centre of opening (ft.-in.)									
Joist depth	Joist series	Duct chase length (in.)									
		8	10	12	14	16	18	20	22	24	
9-1/2"	Ni-20	4'-1"	4'-5"	4'-10"	-	-	-	-	-	-	-
	Ni-40x	5'-3"	5'-8"	6'-0"	6'-5"	6'-10"	7'-3"	7'-8"	-	-	-
	Ni-60	5'-4"	5'-9"	6'-2"	6'-7"	7'-1"	7'-5"	7'-8"	-	-	-
	Ni-80	5'-3"	5'-8"	6'-0"	6'-5"	6'-10"	7'-3"	8'-0"	8'-2"	8'-6"	-
	Ni-20	5'-9"	6'-2"	6'-6"	-	-	-	-	-	-	-
11-7/8"	Ni-40x	6'-8"	7'-2"	7'-6"	8'-1"	8'-6"	9'-1"	9'-6"	-	-	-
	Ni-60	7'-3"	7'-8"	8'-0"	8'-6"	9'-0"	9'-3"	9'-8"	-	-	-
	Ni-80	7'-2"	7'-7"	8'-0"	8'-5"	8'-10"	8'-3"	9'-8"	10'-2"	10'-8"	-
	Ni-20	7'-6"	7'-11"	8'-4"	9'-0"	9'-2"	9'-7"	10'-1"	10'-7"	10'-11"	-
	Ni-40x	8'-1"	8'-7"	9'-0"	9'-6"	10'-1"	10'-7"	11'-2"	-	-	-
14"	Ni-60	8'-9"	9'-3"	9'-9"	10'-11"	10'-6"	11'-1"	11'-6"	-	-	-
	Ni-80	9'-0"	9'-3"	9'-9"	10'-1"	10'-7"	11'-1"	11'-6"	12'-1"	12'-6"	-
	Ni-20	9'-2"	9'-8"	10'-0"	10'-6"	10'-11"	11'-5"	11'-9"	12'-4"	12'-11"	-
	Ni-40x	10'-3"	10'-8"	11'-2"	11'-6"	12'-1"	12'-6"	13'-2"	-	-	-
	Ni-60	10'-4"	10'-9"	11'-3"	11'-9"	12'-1"	12'-7"	13'-1"	13'-8"	14'-4"	-
16"	Ni-80	10'-9"	11'-2"	11'-8"	12'-0"	12'-6"	13'-0"	13'-6"	14'-2"	14'-10"	-

8a

Rim Board Joint Between Floor Joists

Toe-nails at 6" o.c. (typical)

One 2-1/2" nail top and bottom (typical)

Rim board joint

Toe-nails at 6" o.c. (typical)

8b

Rim Board Joint at Corner

Toe-nails at 6" o.c. (typical)

Rim board joint

Rim board

Top plate

Door or window opening

(4'-0" maximum, engineering design of rim board required)

Note:

1. Do not cut holes in rim board installed over openings, such as doors or windows, where the rim board is not fully supported except that holes of 1-1/2 inch or less in size are permitted provided they are positioned at the mid-depth and in the middle one-third of the span.

The diagram illustrates the markings on a WOODC JOIST. The markings are as follows:

- WOODC JOIST** (Logo and brand name)
- APA** (Associated with Certified by APA)
- PLANT 1052 202781326** (Associated with Plant Number)
- CCMC 13032-R ESR-1742** (Associated with CCMC Evaluation Report Number)
- CE 1224-CPD-0176 ETA-09/0035** (Associated with CE Certification Numbers)
- NI-40x** (Associated with I-joist Series)
- MADE IN CANADA** (Country of origin)

Labels with leader lines pointing to the markings include:

- Certified by APA
- Plant Number
- CCMC Evaluation Report Number
- CE Certification Numbers
- Production Number
- ICC-ES Evaluation Report Number
- I-joist Series



BUILDER: GREENPARK HOMES
SITE: BARLASSINA
MODEL: GARDEN 12
CITY: CAMBRIDGE

Job Name: **GARDEN 12 EL 1,2,3**
Level: **1ST FLR FRAMING**
Label: **B1 - i1513**
Type: **Beam**


2 Ply Member
1 3/4" x 9 1/2" (2.0E 3100)
WestFraser LVL

Status:
**Design
Passed**

Illustration Not to Scale. Pitch: 0/12

Designed by Single Member Design Engine in MiTek® Structure Version
8.5.3.233.Update5.15

Report Version: 2021.03.26 06-24-2022 08:21



DESIGN INFORMATION

Building Code: NBCC 2015, Part9, BCBC 2018,
ABC 2019, OBC 2012 (2019
Amendment)
Design Methodology: LSD
Service Condition: Dry
LL Deflection Limit: L/360,
TL Deflection Limit: L/240,

Lateral Restraint Requirements:

Both ends of the member and the outer supports
must be laterally restrained. Top and bottom edges
of the member must be fully restrained or have the
following maximum unbraced length:

Top: 0' Bottom: 13'- 2 1/4"

Factored Resistance of Support Material:

- 615 psi Wall @ 0'- 1 3/8"
- 615 psi Beam @ 14'- 8 3/4"

ANALYSIS RESULTS

Design Criteria	Location	Load Combination	LDF	Design	Limit	Result
Factored Pos. Moment:	9'- 5 9/16"	1.25D + 1.5L	1.00	2993 lb ft	23299 lb ft	Passed - 13%
Factored Neg. Moment:	14'- 8 3/4"	1.25D + 1.5L	1.00	404 lb ft	19539 lb ft	Passed - 2%
Factored Shear:	13'- 10 1/4"	1.25D + 1.5L	1.00	2230 lb	11052 lb	Passed - 20%
Live Load (LL) Pos. Defl.:	7'- 10 11/16"	L		0.102"	L/360	Passed - L/999
Total Load (TL) Pos. Defl.:	7'- 10"	D + L		0.173"	L/240	Passed - L/999

SUPPORT AND REACTION INFORMATION

ID	Input Bearing Length	Controlling Load Combination	LDF	Factored Downward Reaction	Factored Uplift Reaction	Factored Resistance of Member	Factored Resistance of Support	Result
1	2-06	1.25D + 1.5L	1.00	654 lb		8645 lb	5114 lb	Passed - 13%
2	5-04	1.25D + 1.5L	1.00	5265 lb		19110 lb	11301 lb	Passed - 47%

SPECIFIED LOADS

Type	Start Loc	End Loc	Source	Face	Dead (D)	Live (L)	Snow (S)	Wind (W)
Self Weight	-0'	15'- 1"	Self Weight	Top	9 lb/ft	-	-	-
Uniform	-0'	13'- 6 3/8"	FC1 Floor Decking (Plan View Fill)	Top	13 lb/ft	27 lb/ft	-	-
Uniform	13'- 6 3/8"	14'- 10 3/8"	FC1 Floor Decking (Plan View Fill)	Top	10 lb/ft	21 lb/ft	-	-
Point	13'- 5 1/2"	13'- 5 1/2"	B3(i1493)	Front	461 lb	905 lb	-	-
Point	14'- 10 3/8"	14'- 10 3/8"	2(i384)	Top	753 lb	1356 lb	-	-

UNFACTORED REACTIONS

ID	Start Loc	End Loc	Source	Dead (D)	Live (L)	Snow (S)	Wind (W)
1	-0'	0'- 2 3/8"	W16(i30)	208 lb	274 lb	-	-
2	14'- 7 3/4"	15'- 1"	STL BM(i41)	1344 lb	2378 lb	-	-

DESIGN NOTES

- The dead loads used in the design of this member were applied to the structure as sloped dead loads.
- Lateral stability factor (KL) was based on user preference to use the width of all plies. (Consult with manufacturer for guideline pertaining to this design option.)
- Analysis and Design has been performed using precision loading from actual modeled conditions. Some loads may have been modified to simplify reporting.
- Tributary Loads have been generated based on actual spacing between members in the model which may differ from the default system spacing. The actual loads applied to the member are shown in the Specified Loads table.
- Transfer reactions may differ from design results as allowed per building codes and standard load distribution practices.
- This report is based on modeled conditions input by the user. Source information for the loads and supports are provided for reference only. Verify that all loads and support conditions are correct.
- Review all loads and reactions to ensure that the member/bearing/connector/structure can resist adequately. Unless already specified on this report, anchorage for uplift reactions to be specified by others. Installation of member and accessories (if required) as per manufacturer's instruction.
- When the applied loads are coming from a member/post/wall above that does not sit directly on this beam, adequate load transfer elements, such as squash blocks, wall studs, or beveled plates are required to transfer the loads to this beam.
- Bearing capacity of member at support 1, 2 was verified for the effect of concentrated load applied near the support. At support 2. Required Load Area: L=1.500", W=3.500". LDF=1.00, Pf=2975 lb, Qr=5460 lb, Result=54.49%.

PLY TO PLY CONNECTION

- Member design assumed proper ply to ply connection by others. Fastener spacing along length of member must not exceed 4 times depth of member. Verify connection between plies according to code specification and follow the manufacturer's installation instruction. Loads assumed to be distributed equally to each ply.

PLY TO PLY CONNECTION:

3 ROWS OF 3.25" PNEUMATIC GUN
NAILS (0.120"x3.25") @ 8" O/C

PLY TO PLY CONNECTION ASSUMES ANY
SUPPORTED BEAM HANGERS ARE FASTENED
TO THIS BEAM WITH MIN. 3.5" FASTENERS.



STRUCTURAL COMPONENT ONLY
DWG # TF22080209



BUILDER: GREENPARK HOMES
SITE: BARLASSINA
MODEL: GARDEN 12
CITY: CAMBRIDGE

Job Name: **GARDEN 12 EL 1,2,3**
Level: **1ST FLR FRAMING**
Label: **B2 - i1447**
Type: **Beam**


2 Ply Member
1 3/4" x 9 1/2" (2.0E 3100)
WestFraser LVL

Status:
**Design
Passed**

Illustration Not to Scale. Pitch: 0/12

Designed by Single Member Design Engine in MiTek® Structure Version
8.5.3.233.Update5.15

Report Version: 2021.03.26 06-24-2022 08:21



DESIGN INFORMATION

Building Code: NBCC 2015, Part9, BCBC 2018,
ABC 2019, OBC 2012 (2019
Amendment)

Design Methodology: LSD

Service Condition: Dry

LL Deflection Limit: L/360,

TL Deflection Limit: L/240,

Lateral Restraint Requirements:

Both ends of the member and the outer supports
must be laterally restrained. Top and bottom edges
of the member must be fully restrained or have the
following maximum unbraced length:

Top: 0' Bottom: 1'- 1 1/2"

Factored Resistance of Support Material:

- 615 psi Wall @ 0'- 2 1/2"
- 615 psi Wall @ 2'- 10"

ANALYSIS RESULTS

Design Criteria	Location	Load Combination	LDF	Design	Limit	Result
Factored Pos. Moment:	1'- 5"	1.25D + 1.5L	1.00	1143 lb ft	23299 lb ft	Passed - 5%
Factored Shear:	1'- 1"	1.25D + 1.5L	1.00	1476 lb	11052 lb	Passed - 13%

SUPPORT AND REACTION INFORMATION

ID	Input Bearing Length	Controlling Load Combination	LDF	Factored Downward Reaction	Factored Uplift Reaction	Factored Resistance of Member	Factored Resistance of Support	Result
1	3-08	1.25D + 1.5L	1.00	2294 lb		12740 lb	7536 lb	Passed - 30%
2	4-00	1.25D + 1.5L	1.00	2077 lb		14560 lb	8613 lb	Passed - 24%

SPECIFIED LOADS

Type	Start Loc	End Loc	Source	Face	Dead (D)	Live (L)	Snow (S)	Wind (W)
Self Weight	0'	3'- 1"	Self Weight	Top	9 lb/ft	-	-	-
Tapered	-0'	3'- 1"	E10(i253)	Top	245 lb/ft	291 To 290 lb/ft	-	-
Point	0'- 5 1/4"	0'- 5 1/4"	B4(i1481)	Back	198 lb	263 lb	-	-
Point	1'	1'	J1(i1449)	Back	137 lb	274 lb	-	-
Point	2'- 4"	2'- 4"	J1(i1525)	Back	193 lb	386 lb	-	-

UNFACTORED REACTIONS

ID	Start Loc	End Loc	Source	Dead (D)	Live (L)	Snow (S)	Wind (W)
1	0'	0'- 3 1/2"	W24(i43)	717 lb	969 lb	-	-
2	2'- 9"	3'- 1"	W14(i31)	597 lb	850 lb	-	-

DESIGN NOTES

- The dead loads used in the design of this member were applied to the structure as sloped dead loads.
- Lateral stability factor (KL) was based on user preference to use the width of all plies. (Consult with manufacturer for guideline pertaining to this design option.)
- Analysis and Design has been performed using precision loading from actual modeled conditions. Some loads may have been modified to simplify reporting.
- Tributary Loads have been generated based on actual spacing between members in the model which may differ from the default system spacing. The actual loads applied to the member are shown in the Specified Loads table.
- Transfer reactions may differ from design results as allowed per building codes and standard load distribution practices.
- This report is based on modeled conditions input by the user. Source information for the loads and supports are provided for reference only. Verify that all loads and support conditions are correct.
- Review all loads and reactions to ensure that the member/bearing/connector/structure can resist adequately. Unless already specified on this report, anchorage for uplift reactions to be specified by others. Installation of member and accessories (if required) as per manufacturer's instruction.
- When the applied loads are coming from a member/post/wall above that does not sit directly on this beam, adequate load transfer elements, such as squash blocks, wall studs, or beveled plates are required to transfer the loads to this beam.

PLY TO PLY CONNECTION

- Member design assumed proper ply to ply connection by others. Fastener spacing along length of member must not exceed 4 times depth of member. Verify connection between plies according to code specification and follow the manufacturer's installation instruction. Loads assumed to be distributed equally to each ply.



STRUCTURAL COMPONENT ONLY
DWG # TF22080210



BUILDER: GREENPARK HOMES
SITE: BARLASSINA
MODEL: GARDEN 12
CITY: CAMBRIDGE

Job Name: **GARDEN 12 EL 1,2,3**
Level: **1ST FLR FRAMING**
Label: **B3 - i1493**
Type: **Beam**


1 Ply Member
1 3/4" x 9 1/2" (2.0E 3100)
WestFraser LVL

Status:
**Design
Passed**

Illustration Not to Scale. Pitch: 0/12

Designed by Single Member Design Engine in MiTek® Structure Version
8.5.3.233.Update5.15

Report Version: 2021.03.26 06-24-2022 08:21



DESIGN INFORMATION

Building Code: NBCC 2015, Part9, BCBC 2018,
ABC 2019, OBC 2012 (2019
Amendment)

Design Methodology: LSD

Service Condition: Dry

LL Deflection Limit: L/360,

TL Deflection Limit: L/240,

Lateral Restraint Requirements:

Both ends of the member and the outer supports
must be laterally restrained. Top and bottom edges
of the member must be fully restrained or have the
following maximum unbraced length:

Top: 0' Bottom: 1'- 1 1/2"

Factored Resistance of Support Material:

- 615 psi Beam @ 0'
- 615 psi Beam @ 3'- 7"

ANALYSIS RESULTS

Design Criteria	Location	Load Combination	LDF	Design	Limit	Result
Factored Pos. Moment:	1'- 7 1/2"	1.25D + 1.5L	1.00	1715 lb ft	11650 lb ft	Passed - 15%
Factored Shear:	0'- 9 1/2"	1.25D + 1.5L	1.00	974 lb	5526 lb	Passed - 18%
Total Load (TL) Pos. Defl.:	1'- 9 7/16"	D + L		0.011"	L/240	Passed - L/999

SUPPORT AND REACTION INFORMATION

ID	Input Bearing Length	Controlling Load Combination	LDF	Factored Downward Reaction	Factored Uplift Reaction	Factored Resistance of Member	Factored Resistance of Support	Result
1	1-08	1.25D + 1.5L	1.00	1893 lb		2730 lb	-	Passed - 69%
2	1-08	1.25D + 1.5L	1.00	1773 lb		2730 lb	-	Passed - 65%

CONNECTOR INFORMATION

ID	Part No.	Manufacturer	Nailing Requirements			Other Information or Requirement for Reinforcement Accessories
			Top	Face	Member	
1	HUS1.81/10		-	-	-	Connector manually specified by the user.
2	HUS1.81/10		-	-	-	Connector manually specified by the user.

* Connectors: Refer to manufacturer's specifications, fasteners requirements and installation instruction. Where header fasteners are longer than the width of the supporting member, install backer block or clinch header nails.

SPECIFIED LOADS

Type	Start Loc	End Loc	Source	Face	Dead (D)	Live (L)	Snow (S)	Wind (W)
Self Weight	0'	3'- 7"	Self Weight	Top	5 lb/ft	-	-	-
Uniform	0'	3'- 7"	User Load	Top	120 lb/ft	240 lb/ft	-	-
Point	0'- 3 1/2"	0'- 3 1/2"	J2(i1477)	Front	120 lb	240 lb	-	-
Point	1'- 7 1/2"	1'- 7 1/2"	J2(i1484)	Front	172 lb	344 lb	-	-
Point	2'- 11 1/2"	2'- 11 1/2"	J2(i1516)	Front	136 lb	271 lb	-	-

UNFACTORED REACTIONS

ID	Start Loc	End Loc	Source	Dead (D)	Live (L)	Snow (S)	Wind (W)
1	0'	0'	B1(i1513)	461 lb	905 lb	-	-
2	3'- 7"	3'- 7"	B4(i1481)	414 lb	810 lb	-	-

DESIGN NOTES

- The dead loads used in the design of this member were applied to the structure as sloped dead loads.
- Analysis and Design has been performed using precision loading from actual modeled conditions. Some loads may have been modified to simplify reporting.
- Tributary Loads have been generated based on actual spacing between members in the model which may differ from the default system spacing. The actual loads applied to the member are shown in the Specified Loads table.
- Transfer reactions may differ from design results as allowed per building codes and standard load distribution practices.
- This report is based on modeled conditions input by the user. Source information for the loads and supports are provided for reference only. Verify that all loads and support conditions are correct.
- Review all loads and reactions to ensure that the member/bearing/connector/structure can resist adequately. Unless already specified on this report, anchorage for uplift reactions to be specified by others. Installation of member and accessories (if required) as per manufacturer's instruction.
- When the applied loads are coming from a member/post/wall above that does not sit directly on this beam, adequate load transfer elements, such as squash blocks, wall studs, or beveled plates are required to transfer the loads to this beam.



STRUCTURAL COMPONENT ONLY
DWG # TF22080211



BUILDER: GREENPARK HOMES
SITE: BARLASSINA
MODEL: GARDEN 12
CITY: CAMBRIDGE

Job Name: **GARDEN 12 EL 1,2,3**
Level: **1ST FLR FRAMING**
Label: **B4 - i1481**
Type: **Beam**


2 Ply Member
1 3/4" x 9 1/2" (2.0E 3100)
WestFraser LVL

Status:
**Design
Passed**

Illustration Not to Scale. Pitch: 0/12

Designed by Single Member Design Engine in MiTek® Structure Version
8.5.3.233.Update5.15

Report Version: 2021.03.26 06-24-2022 08:21



DESIGN INFORMATION

Building Code: NBCC 2015, Part9, BCBC 2018,
ABC 2019, OBC 2012 (2019
Amendment)

Design Methodology: LSD

Service Condition: Dry

LL Deflection Limit: L/360,

TL Deflection Limit: L/240,

Lateral Restraint Requirements:

Both ends of the member and the outer supports
must be laterally restrained. Top and bottom edges
of the member must be fully restrained or have the
following maximum unbraced length:

Top: 0' Bottom: 12'- 6 1/4"

Factored Resistance of Support Material:

- 615 psi Beam @ 0'
- 615 psi Beam @ 13'- 10 1/2"

ANALYSIS RESULTS

Design Criteria	Location	Load Combination	LDF	Design	Limit	Result
Factored Pos. Moment:	9'- 3 1/16"	1.25D + 1.5L	1.00	2932 lb ft	23299 lb ft	Passed - 13%
Factored Shear:	13'- 1"	1.25D + 1.5L	1.00	1984 lb	11052 lb	Passed - 18%
Live Load (LL) Pos. Defl.:	7'- 5 1/8"	L		0.090"	L/360	Passed - L/999
Total Load (TL) Pos. Defl.:	7'- 4 1/2"	D + L		0.151"	L/240	Passed - L/999

SUPPORT AND REACTION INFORMATION

ID	Input Bearing Length	Controlling Load Combination	LDF	Factored Downward Reaction	Factored Uplift Reaction	Factored Resistance of Member	Factored Resistance of Support	Result
1	1-08	1.25D + 1.5L	1.00	650 lb		5460 lb	-	Passed - 12%
2	1-08	1.25D + 1.5L	1.00	2026 lb		5460 lb	-	Passed - 37%

CONNECTOR INFORMATION

ID	Part No.	Manufacturer	Nailing Requirements			Other Information or Requirement for Reinforcement Accessories		
			Top	Face	Member			
1	HGUS410		-	-	-	Connector manually specified by the user.		
2	HUC410		-	-	-	Connector manually specified by the user.		

* Connectors: Refer to manufacturer's specifications, fasteners requirements and installation instruction. Where header fasteners are longer than the width of the supporting member, install backer block or clinch header nails.

SPECIFIED LOADS

Type	Start Loc	End Loc	Source	Face	Dead (D)	Live (L)	Snow (S)	Wind (W)
Self Weight	0'	13'- 10 1/2"	Self Weight	Top	9 lb/ft	-	-	-
Uniform	0'	12'- 8"	FC1 Floor Decking (Plan View Fill)	Top	13 lb/ft	27 lb/ft	-	-
Uniform	12'- 8"	13'- 10 1/2"	FC1 Floor Decking (Plan View Fill)	Top	7 lb/ft	14 lb/ft	-	-
Point	12'- 7 1/8"	12'- 7 1/8"	B3(i1493)	Back	414 lb	810 lb	-	-

UNFACTORED REACTIONS

ID	Start Loc	End Loc	Source	Dead (D)	Live (L)	Snow (S)	Wind (W)
1	0'	0'	B2(i1447)	198 lb	263 lb	-	-
2	13'- 10 1/2"	13'- 10 1/2"	B5(i1499)	531 lb	914 lb	-	-

DESIGN NOTES

- The dead loads used in the design of this member were applied to the structure as sloped dead loads.
- Lateral stability factor (KL) was based on user preference to use the width of all plies. (Consult with manufacturer for guideline pertaining to this design option.)
- Analysis and Design has been performed using precision loading from actual modeled conditions. Some loads may have been modified to simplify reporting.
- Tributary Loads have been generated based on actual spacing between members in the model which may differ from the default system spacing. The actual loads applied to the member are shown in the Specified Loads table.
- Transfer reactions may differ from design results as allowed per building codes and standard load distribution practices.
- This report is based on modeled conditions input by the user. Source information for the loads and supports are provided for reference only. Verify that all loads and support conditions are correct.
- Review all loads and reactions to ensure that the member/bearing/connector/structure can resist adequately. Unless already specified on this report, anchorage for uplift reactions to be specified by others. Installation of member and accessories (if required) as per manufacturer's instruction.
- When the applied loads are coming from a member/post/wall above that does not sit directly on this beam, adequate load transfer elements, such as squash blocks, wall studs, or beveled plates are required to transfer the loads to this beam.

PLY TO PLY CONNECTION

- Member design assumed proper ply to ply connection by others. Fastener spacing along length of member must not exceed 4 times depth of member. Verify connection between plies according to code specification and follow the manufacturer's installation instruction. Loads assumed to be distributed equally to each ply.



STRUCTURAL COMPONENT ONLY
DWG # TF22080212



BUILDER: GREENPARK HOMES
SITE: BARLASSINA
MODEL: GARDEN 12
CITY: CAMBRIDGE

Job Name: **GARDEN 12 EL 1,2,3**
Level: **1ST FLR FRAMING**
Label: **B5 - i1499**
Type: **Beam**


2 Ply Member
1 3/4" x 9 1/2" (2.0E 3100)
WestFraser LVL

Status:
**Design
Passed**

Illustration Not to Scale. Pitch: 0/12

Designed by Single Member Design Engine in MiTek® Structure Version
8.5.3.233.Update5.15

Report Version: 2021.03.26 06-24-2022 08:21



DESIGN INFORMATION

Building Code: NBCC 2015, Part9, BCBC 2018,
ABC 2019, OBC 2012 (2019
Amendment)

Design Methodology: LSD

Service Condition: Dry

LL Deflection Limit: L/360,

TL Deflection Limit: L/240,

Lateral Restraint Requirements:

Both ends of the member and the outer supports
must be laterally restrained. Top and bottom edges
of the member must be fully restrained or have the
following maximum unbraced length:

Top: 0' Bottom: 1'- 1 1/2"

Factored Resistance of Support Material:

- 615 psi Column @ 0'- 2 1/2"
- 615 psi Wall @ 3'- 7 1/2"

PLY TO PLY CONNECTION:
3 ROWS OF 3.25" PNEUMATIC GUN
NAILS (0.120"x3.25") @ 4" O/C

PLY TO PLY CONNECTION ASSUMES ANY
SUPPORTED BEAM HANGERS ARE FASTENED
TO THIS BEAM WITH MIN. 3.5" FASTENERS.



STRUCTURAL COMPONENT ONLY
DWG # TF22080213

ANALYSIS RESULTS

Design Criteria	Location	Load Combination	LDF	Design	Limit	Result
Factored Pos. Moment:	2'- 1/2"	1.25D + 1.5L	1.00	1347 lb ft	23299 lb ft	Passed - 6%
Factored Neg. Moment:	3'- 7 1/2"	1.25D + 1.5L	1.00	549 lb ft	23299 lb ft	Passed - 2%
Factored Shear:	2'- 9"	1.25D + 1.5L	1.00	1849 lb	11052 lb	Passed - 17%

SUPPORT AND REACTION INFORMATION

ID	Input Bearing Length	Controlling Load Combination	LDF	Factored Downward Reaction	Factored Uplift Reaction	Factored Resistance of Member	Factored Resistance of Support	Result
1	3-08	1.25D + 1.5L	1.00	3708 lb		12740 lb	7534 lb	Passed - 49%
2	5-08	1.25D + 1.5L	1.00	6069 lb		20020 lb	11843 lb	Passed - 51%

SPECIFIED LOADS

Type	Start Loc	End Loc	Source	Face	Dead (D)	Live (L)	Snow (S)	Wind (W)
Self Weight	0'	4'	Self Weight	Top	9 lb/ft	-	-	-
Uniform	0'- 3 1/2"	3'- 7 3/8"	User Load	Top	120 lb/ft	240 lb/ft	-	-
Point	0'- 1 3/4"	0'- 1 3/4"	B4(i1481)	Front	531 lb	914 lb	-	-
Point	0'- 8 1/2"	0'- 8 1/2"	J1(i1449)	Front	139 lb	278 lb	-	-
Point	2'- 1/2"	2'- 1/2"	J1(i1525)	Front	193 lb	386 lb	-	-
Point	3'- 4 1/2"	3'- 4 1/2"	J1(i1421)	Front	194 lb	388 lb	-	-
Point	3'- 9 1/4"	3'- 9 1/4"	E19(i382)	Top	946 lb	1722 lb	-	-

UNFACTORED REACTIONS

ID	Start Loc	End Loc	Source	Dead (D)	Live (L)	Snow (S)	Wind (W)
1	0'	0'- 3 1/2"	PBO1(i48)	985 lb	1777 lb	-	-
2	3'- 6 1/2"	4'	W22(i38)	1455 lb	2708 lb	-	-

DESIGN NOTES

- The dead loads used in the design of this member were applied to the structure as sloped dead loads.
- Lateral stability factor (KL) was based on user preference to use the width of all plies. (Consult with manufacturer for guideline pertaining to this design option.)
- Analysis and Design has been performed using precision loading from actual modeled conditions. Some loads may have been modified to simplify reporting.
- Tributary Loads have been generated based on actual spacing between members in the model which may differ from the default system spacing. The actual loads applied to the member are shown in the Specified Loads table.
- Transfer reactions may differ from design results as allowed per building codes and standard load distribution practices.
- This report is based on modeled conditions input by the user. Source information for the loads and supports are provided for reference only. Verify that all loads and support conditions are correct.
- Review all loads and reactions to ensure that the member/bearing/connector/structure can resist adequately. Unless already specified on this report, anchorage for uplift reactions to be specified by others. Installation of member and accessories (if required) as per manufacturer's instruction.
- When the applied loads are coming from a member/post/wall above that does not sit directly on this beam, adequate load transfer elements, such as squash blocks, wall studs, or beveled plates are required to transfer the loads to this beam.
- Bearing capacity of member at support 1, 2 was verified for the effect of concentrated load applied near the support. At support 2. Required Load Area: L=1.500", W=3.500". LDF=1.00, Pf=3766 lb, Qr=5460 lb, Result=68.97%.

PLY TO PLY CONNECTION

- Member design assumed proper ply to ply connection by others. Fastener spacing along length of member must not exceed 4 times depth of member. Verify connection between plies according to code specification and follow the manufacturer's installation instruction. Loads assumed to be distributed equally to each ply.



BUILDER: GREENPARK HOMES
SITE: BARLASSINA
MODEL: GARDEN 12
CITY: CAMBRIDGE

Job Name: **GARDEN 12 EL 1,2,3**
Level: **2ND FLR FRAMING**
Label: **B6 - i388**
Type: **Beam**


2 Ply Member
1 3/4" x 9 1/2" (2.0E 3100)
WestFraser LVL

Status:
Design Passed

Illustration Not to Scale. Pitch: 0/12

Designed by Single Member Design Engine in MiTek® Structure Version
8.5.3.233.Update5.15

Report Version: 2021.03.26 06-24-2022 08:21



DESIGN INFORMATION

Building Code: NBCC 2015, Part9, BCBC 2018, ABC 2019, OBC 2012 (2019 Amendment)

Design Methodology: LSD

Service Condition: Dry

LL Deflection Limit: L/360,

TL Deflection Limit: L/240,

Lateral Restraint Requirements:

Both ends of the member and the outer supports must be laterally restrained. Top and bottom edges of the member must be fully restrained or have the following maximum unbraced length:

Top: 0' Bottom: 0'- 9 1/2"

Factored Resistance of Support Material:

- 615 psi Wall @ 0'- 4 1/2"
- 615 psi Wall @ 7'- 8"

ANALYSIS RESULTS

Design Criteria	Location	Load Combination	LDF	Design	Limit	Result
Factored Pos. Moment:	4'- 7 13/16"	1.25D + 1.5L	1.00	5883 lb ft	23299 lb ft	Passed - 25%
Factored Shear:	6'- 9 1/2"	1.25D + 1.5L	1.00	2943 lb	11052 lb	Passed - 27%
Live Load (LL) Pos. Defl.:	4'- 1 1/4"	L		0.053"	L/360	Passed - L/999
Total Load (TL) Pos. Defl.:	4'- 1 1/4"	D + L		0.081"	L/240	Passed - L/999

SUPPORT AND REACTION INFORMATION

ID	Input Bearing Length	Controlling Load Combination	LDF	Factored Downward Reaction	Factored Uplift Reaction	Factored Resistance of Member	Factored Resistance of Support	Result
1	5-08	1.25D + 1.5L	1.00	2912 lb		20020 lb	11843 lb	Passed - 25%
2	5-08	1.25D + 1.5L	1.00	3374 lb		20020 lb	11843 lb	Passed - 28%

SPECIFIED LOADS

Type	Start Loc	End Loc	Source	Face	Dead (D)	Live (L)	Snow (S)	Wind (W)
Self Weight	0'	8'- 1/2"	Self Weight	Top	9 lb/ft	-	-	-
Uniform	0'- 5 1/2"	0'- 9"	FC2 Floor Decking (Plan View Fill)	Top	3 lb/ft	6 lb/ft	-	-
Uniform	4'- 1"	7'- 7"	User Load	Top	120 lb/ft	240 lb/ft	-	-
Uniform	6'- 9"	7'- 9 3/8"	FC2 Floor Decking (Plan View Fill)	Top	3 lb/ft	6 lb/ft	-	-
Tapered	1'- 3"	7'- 3"	Smoothed Load	Front	145 To 143 lb/ft	288 To 285 lb/ft	-	-
Point	0'- 9"	0'- 9"	J1(i443)	Front	172 lb	344 lb	-	-
Point	0'- 5 1/2"	0'- 5 1/2"	FC2 Floor Decking (Plan View Fill)	Top	1 lb	1 lb	-	-

UNFACTORED REACTIONS

ID	Start Loc	End Loc	Source	Dead (D)	Live (L)	Snow (S)	Wind (W)
1	0'	0'- 5 1/2"	2(i384)	712 lb	1346 lb	-	-
2	7'- 7"	8'- 1/2"	E19(i382)	822 lb	1566 lb	-	-

DESIGN NOTES

- The dead loads used in the design of this member were applied to the structure as sloped dead loads.
- Lateral stability factor (KL) was based on user preference to use the width of all plies. (Consult with manufacturer for guideline pertaining to this design option.)
- Analysis and Design has been performed using precision loading from actual modeled conditions. Some loads may have been modified to simplify reporting.
- Tributary Loads have been generated based on actual spacing between members in the model which may differ from the default system spacing. The actual loads applied to the member are shown in the Specified Loads table.
- Transfer reactions may differ from design results as allowed per building codes and standard load distribution practices.
- This report is based on modeled conditions input by the user. Source information for the loads and supports are provided for reference only. Verify that all loads and support conditions are correct.
- Review all loads and reactions to ensure that the member/bearing/connector/structure can resist adequately. Unless already specified on this report, anchorage for uplift reactions to be specified by others. Installation of member and accessories (if required) as per manufacturer's instruction.
- When the applied loads are coming from a member/post/wall above that does not sit directly on this beam, adequate load transfer elements, such as squash blocks, wall studs, or beveled plates are required to transfer the loads to this beam.

PLY TO PLY CONNECTION

- Member design assumed proper ply to ply connection by others. Fastener spacing along length of member must not exceed 4 times depth of member. Verify connection between plies according to code specification and follow the manufacturer's installation instruction. Loads assumed to be distributed equally to each ply.



STRUCTURAL COMPONENT ONLY
DWG # TF22080214



BUILDER: GREENPARK HOMES
SITE: BARLASSINA
MODEL: GARDEN 12
CITY: CAMBRIDGE

Job Name: **GARDEN 12 EL 1,2,3**
Level: **2ND FLR FRAMING**
Label: **B7 - i389**
Type: **Beam**


2 Ply Member
1 3/4" x 9 1/2" (2.0E 3100)
WestFraser LVL

Status:
**Design
Passed**

Illustration Not to Scale. Pitch: 0/12

Designed by Single Member Design Engine in MiTek® Structure Version
8.5.3.233.Update5.15

Report Version: 2021.03.26 06-24-2022 08:21



DESIGN INFORMATION

Building Code: NBCC 2015, Part9, BCBC 2018,
ABC 2019, OBC 2012 (2019
Amendment)

Design Methodology: LSD

Service Condition: Dry

LL Deflection Limit: L/360,

TL Deflection Limit: L/240,

Lateral Restraint Requirements:

Both ends of the member and the outer supports
must be laterally restrained. Top and bottom edges
of the member must be fully restrained or have the
following maximum unbraced length:

Top: 0' Bottom: 1'- 1 1/2"

Factored Resistance of Support Material:

- 615 psi Wall @ 0'- 2 1/2"
- 615 psi Wall @ 3'- 10 1/2"

ANALYSIS RESULTS

Design Criteria	Location	Load Combination	LDF	Design	Limit	Result
Factored Pos. Moment:	1'- 7"	1.25D + 1.5L	1.00	1919 lb ft	23299 lb ft	Passed - 8%
Factored Shear:	3'	1.25D + 1.5L	1.00	1729 lb	11052 lb	Passed - 16%

SUPPORT AND REACTION INFORMATION

ID	Input Bearing Length	Controlling Load Combination	LDF	Factored Downward Reaction	Factored Uplift Reaction	Factored Resistance of Member	Factored Resistance of Support	Result
1	3-08	1.25D + 1.5L	1.00	2886 lb		12740 lb	7536 lb	Passed - 38%
2	3-08	1.25D + 1.5L	1.00	1742 lb		12740 lb	7536 lb	Passed - 23%

SPECIFIED LOADS

Type	Start Loc	End Loc	Source	Face	Dead (D)	Live (L)	Snow (S)	Wind (W)
Self Weight	0'	4'- 1"	Self Weight	Top	9 lb/ft	-	-	-
Uniform	0'	3'- 7"	Smoothed Load	Back	137 lb/ft	273 lb/ft	-	-
Tapered	0'	3'- 7"	Smoothed Load	Front	164 lb/ft	328 To 329 lb/ft	-	-

UNFACTORED REACTIONS

ID	Start Loc	End Loc	Source	Dead (D)	Live (L)	Snow (S)	Wind (W)
1	0'	0'- 3 1/2"	4(i386)	717 lb	1396 lb	-	-
2	3'- 9 1/2"	4'- 1"	5(i387)	399 lb	760 lb	-	-

DESIGN NOTES

- The dead loads used in the design of this member were applied to the structure as sloped dead loads.
- Lateral stability factor (KL) was based on user preference to use the width of all plies. (Consult with manufacturer for guideline pertaining to this design option.)
- Analysis and Design has been performed using precision loading from actual modeled conditions. Some loads may have been modified to simplify reporting.
- Tributary Loads have been generated based on actual spacing between members in the model which may differ from the default system spacing. The actual loads applied to the member are shown in the Specified Loads table.
- Transfer reactions may differ from design results as allowed per building codes and standard load distribution practices.
- This report is based on modeled conditions input by the user. Source information for the loads and supports are provided for reference only. Verify that all loads and support conditions are correct.
- Review all loads and reactions to ensure that the member/bearing/connector/structure can resist adequately. Unless already specified on this report, anchorage for uplift reactions to be specified by others. Installation of member and accessories (if required) as per manufacturer's instruction.
- When the applied loads are coming from a member/post/wall above that does not sit directly on this beam, adequate load transfer elements, such as squash blocks, wall studs, or beveled plates are required to transfer the loads to this beam.

PLY TO PLY CONNECTION

- Member design assumed proper ply to ply connection by others. Fastener spacing along length of member must not exceed 4 times depth of member. Verify connection between plies according to code specification and follow the manufacturer's installation instruction. Loads assumed to be distributed equally to each ply.

PLY TO PLY CONNECTION:
3 ROWS OF 3.25" PNEUMATIC GUN
NAILS (0.120"x3.25") @ 4" O/C

PLY TO PLY CONNECTION ASSUMES ANY
SUPPORTED BEAM HANGERS ARE FASTENED
TO THIS BEAM WITH MIN. 3.5" FASTENERS.



STRUCTURAL COMPONENT ONLY
DWG # TF22080215



BUILDER: GREENPARK HOMES
SITE: BARLASSINA
MODEL: GARDEN 12
CITY: CAMBRIDGE

Job Name: **GARDEN 12 EL 1,2,3**
Level: **2ND FLR FRAMING**
Label: **B8 DR - i1298**
Type: **Beam**


3 Ply Member
1 3/4" x 9 1/2" (2.0E 3100)
WestFraser LVL

Status:
**Design
Passed**

Illustration Not to Scale. Pitch: 0/12

Designed by Single Member Design Engine in MiTek® Structure Version
8.5.3.233.Update5.15

Report Version: 2021.03.26 06-24-2022 08:21



DESIGN INFORMATION

Building Code: NBCC 2015, Part9, BCBC 2018, ABC 2019, OBC 2012 (2019 Amendment)
Design Methodology: LSD
Service Condition: Dry
LL Deflection Limit: L/360,
TL Deflection Limit: L/240,

Lateral Restraint Requirements:

Both ends of the member and the outer supports must be laterally restrained. Top and bottom edges of the member must be fully restrained or have the following maximum unbraced length:
Top: 1'- 2 3/4" Bottom: 12'- 7"

Factored Resistance of Support Material:

- 812 psi Wall @ 0'- 2 1/2"
- 812 psi Wall @ 12'- 4 1/2"

PLY TO PLY CONNECTION:
3 ROWS OF 3.25" PNEUMATIC GUN
NAILS (0.120"x3.25") @ 8" O/C
NAIL FROM BOTH FACES (STAGGER 1/2 SPACE)

PLY TO PLY CONNECTION ASSUMES ANY
SUPPORTED BEAM HANGERS ARE FASTENED
TO THIS BEAM WITH MIN. 3.5" FASTENERS.



STRUCTURAL COMPONENT ONLY
DWG # TF22080216

ANALYSIS RESULTS

Design Criteria	Location	Load Combination	LDF	Design	Limit	Result
Factored Pos. Moment:	5'- 11 3/8"	1.25D + 1.5L	1.00	20508 lb ft	34949 lb ft	Passed - 59%
Factored Shear:	1'- 1"	1.25D + 1.5L	1.00	6159 lb	16578 lb	Passed - 37%
Live Load (LL) Pos. Defl.:	6'- 3 7/16"	L		0.347"	L/360	Passed - L/415
Total Load (TL) Pos. Defl.:	6'- 3 7/16"	D + L		0.530"	L/240	Passed - L/271
Permanent Deflection:	6'- 3 7/16"			-	L/360	Passed - L/809

SUPPORT AND REACTION INFORMATION

ID	Input Bearing Length	Controlling Load Combination	LDF	Factored Downward Reaction	Factored Uplift Reaction	Factored Resistance of Member	Factored Resistance of Support	Result
1	3-08	1.25D + 1.5L	1.00	6859 lb		19110 lb	14920 lb	Passed - 46%
2	3-08	1.25D + 1.5L	1.00	7557 lb		19110 lb	14920 lb	Passed - 51%

SPECIFIED LOADS

Type	Start Loc	End Loc	Source	Face	Dead (D)	Live (L)	Snow (S)	Wind (W)
Self Weight	0'	12'- 7"	Self Weight	Top	14 lb/ft	-	-	-
Uniform	0'- 5 3/8"	7'- 5 3/8"	Smoothed Load	Top	252 lb/ft	503 lb/ft	-	-
Uniform	7'- 5 3/8"	12'- 7"	Smoothed Load	Top	127 lb/ft	253 lb/ft	-	-
Point	0'- 5"	0'- 5"	J2(i1209)	Top	163 lb	325 lb	-	-
Point	7'- 11 3/8"	7'- 11 3/8"	J2(i1229)	Top	111 lb	222 lb	-	-
Point	8'- 7"	8'- 7"	J2(i1221)	Top	122 lb	244 lb	-	-
Point	9'- 9"	9'- 9"	J2(i1253)	Top	169 lb	339 lb	-	-
Point	11'- 1"	11'- 1"	J2(i1213)	Top	181 lb	361 lb	-	-
Point	12'- 5"	12'- 5"	J2(i1296)	Top	181 lb	361 lb	-	-

UNFACTORED REACTIONS

ID	Start Loc	End Loc	Source	Dead (D)	Live (L)	Snow (S)	Wind (W)
1	0'	0'- 3 1/2"	3(i385)	1674 lb	3159 lb	-	-
2	12'- 3 1/2"	12'- 7"	4(i386)	1851 lb	3515 lb	-	-

DESIGN NOTES

- The dead loads used in the design of this member were applied to the structure as sloped dead loads.
- Lateral stability factor (KL) was based on user preference to use the width of all plies. (Consult with manufacturer for guideline pertaining to this design option.)
- Analysis and Design has been performed using precision loading from actual modeled conditions. Some loads may have been modified to simplify reporting.
- Tributary Loads have been generated based on actual spacing between members in the model which may differ from the default system spacing. The actual loads applied to the member are shown in the Specified Loads table.
- Transfer reactions may differ from design results as allowed per building codes and standard load distribution practices.
- This report is based on modeled conditions input by the user. Source information for the loads and supports are provided for reference only. Verify that all loads and support conditions are correct.
- Review all loads and reactions to ensure that the member/bearing/connector/structure can resist adequately. Unless already specified on this report, anchorage for uplift reactions to be specified by others. Installation of member and accessories (if required) as per manufacturer's instruction.
- When the applied loads are coming from a member/post/wall above that does not sit directly on this beam, adequate load transfer elements, such as squash blocks, wall studs, or beveled plates are required to transfer the loads to this beam.

PLY TO PLY CONNECTION

- Member design assumed proper ply to ply connection by others. Fastener spacing along length of member must not exceed 4 times depth of member. Verify connection between plies according to code specification and follow the manufacturer's installation instruction. Loads assumed to be distributed equally to each ply.

Maximum Floor Spans – S2.1

Design Criteria

Spans:	Simple span
Loads:	Live load = 40 psf and dead load = 15 psf
Deflection limits:	L/480 under live load and L/240 under total load
Sheathing:	5/8 in. nailed-glued oriented strand board (OSB) sheathing

Maximum Floor Spans

Joist depth	Joist series	Bare On centre spacing				1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-1"	14'-3"	13'-10"	-	15'-7"	14'-9"	14'-3"	-
	NI-40x	16'-2"	15'-3"	14'-8"	-	16'-7"	15'-8"	15'-1"	-
	NI-60	16'-4"	15'-4"	14'-10"	-	16'-9"	15'-9"	15'-3"	-
	NI-80	17'-3"	16'-3"	15'-8"	-	17'-8"	16'-7"	16'-0"	-
11-7/8"	NI-20	17'-0"	16'-0"	15'-6"	-	17'-6"	16'-7"	16'-0"	-
	NI-40x	18'-2"	17'-1"	16'-6"	-	18'-9"	17'-6"	16'-11"	-
	NI-60	18'-5"	17'-3"	16'-8"	-	19'-0"	17'-8"	17'-1"	-
	NI-80	19'-9"	18'-3"	17'-7"	-	20'-4"	18'-10"	18'-0"	-
	NI-90	20'-2"	18'-8"	17'-10"	-	20'-9"	19'-2"	18'-4"	-
14"	NI-40x	20'-1"	18'-8"	17'-10"	-	20'-10"	19'-4"	18'-6"	-
	NI-60	20'-6"	18'-11"	18'-2"	-	21'-2"	19'-8"	18'-9"	-
	NI-80	21'-11"	20'-3"	19'-4"	-	22'-7"	20'-11"	20'-0"	-
	NI-90	22'-5"	20'-8"	19'-9"	-	23'-0"	21'-4"	20'-4"	-
16"	NI-60	22'-4"	20'-8"	19'-9"	-	23'-1"	21'-5"	20'-6"	-
	NI-80	23'-11"	22'-1"	21'-1"	-	24'-8"	22'-10"	21'-9"	-
	NI-90	24'-5"	22'-6"	21'-6"	-	25'-1"	23'-2"	22'-2"	-

Joist depth	Joist series	Mid-span blocking with 1x4 inch strap On centre spacing				Mid-span blocking and 1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-8"	15'-3"	14'-5"	-	16'-8"	15'-3"	14'-5"	-
	NI-40x	17'-11"	17'-0"	16'-1"	-	18'-5"	17'-1"	16'-1"	-
	NI-60	18'-2"	17'-1"	16'-4"	-	18'-8"	17'-4"	16'-4"	-
	NI-80	19'-5"	18'-0"	17'-5"	-	19'-10"	18'-5"	17'-8"	-
11-7/8"	NI-20	19'-7"	18'-2"	17'-3"	-	19'-11"	18'-3"	17'-3"	-
	NI-40x	21'-1"	19'-7"	18'-8"	-	21'-8"	20'-2"	19'-2"	-
	NI-60	21'-4"	19'-9"	18'-11"	-	21'-11"	20'-5"	19'-6"	-
	NI-80	22'-9"	21'-1"	20'-2"	-	23'-3"	21'-8"	20'-8"	-
	NI-90	23'-3"	21'-6"	20'-6"	-	23'-9"	22'-0"	21'-0"	-
14"	NI-40x	23'-8"	21'-11"	20'-11"	-	24'-4"	22'-8"	21'-8"	-
	NI-60	24'-0"	22'-3"	21'-3"	-	24'-8"	22'-11"	21'-11"	-
	NI-80	25'-7"	23'-9"	22'-7"	-	26'-2"	24'-4"	23'-3"	-
	NI-90	26'-1"	24'-2"	23'-0"	-	26'-8"	24'-9"	23'-7"	-
16"	NI-60	26'-5"	24'-6"	23'-5"	-	27'-2"	25'-3"	24'-2"	-
	NI-80	28'-2"	26'-1"	24'-10"	-	28'-10"	26'-9"	25'-6"	-
	NI-90	28'-8"	26'-6"	25'-3"	-	29'-3"	27'-2"	25'-11"	-

Notes:

1. The tabulated clear spans are based on CSA O86-14 and NBC 2015, and are applicable to residential floor construction meeting the above design criteria.
2. For multiple-span applications, the end spans shall be 40% or more of the adjacent span.
3. Minimum bearing length shall be 1-3/4 inch for end bearings, and 3-1/2 inches for intermediate bearings.
4. Bearing stiffeners are not required when I-joists are used in accordance with this table, except as required for hangers.
5. Nordic I-joists are listed in CCMC Evaluation Report 13032-R and APA Product Report PR-L274C.

Maximum Floor Spans – S4.1

Design Criteria

Spans:	Simple span
Loads:	Live load = 40 psf and dead load = 15 psf
Deflection limits:	L/480 under live load and L/240 under total load
Sheathing:	3/4 in. nailed-glued oriented strand board (OSB) sheathing

Maximum Floor Spans

Joist depth	Joist series	Bare On centre spacing				1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-11"	15'-0"	14'-6"	13'-5"	16'-5"	15'-5"	14'-6"	13'-5"
	NI-40x	17'-0"	16'-0"	15'-5"	14'-10"	17'-5"	16'-5"	15'-10"	15'-2"
	NI-60	17'-2"	16'-2"	15'-7"	14'-11"	17'-7"	16'-7"	16'-0"	15'-4"
	NI-80	18'-3"	17'-1"	16'-5"	15'-9"	18'-8"	17'-5"	16'-9"	16'-1"
11-7/8"	NI-20	17'-11"	16'-11"	16'-3"	15'-8"	18'-7"	17'-5"	16'-10"	16'-2"
	NI-40x	19'-4"	17'-11"	17'-3"	16'-7"	19'-11"	18'-6"	17'-9"	17'-0"
	NI-60	19'-7"	18'-2"	17'-6"	16'-9"	20'-2"	18'-9"	17'-11"	17'-2"
	NI-80	21'-1"	19'-6"	18'-6"	17'-7"	21'-7"	20'-0"	19'-0"	18'-0"
	NI-90	21'-6"	19'-10"	18'-11"	17'-11"	22'-0"	20'-4"	19'-5"	18'-4"
14"	NI-40x	21'-5"	19'-11"	18'-11"	18'-0"	22'-1"	20'-7"	19'-7"	18'-7"
	NI-60	21'-10"	20'-2"	19'-3"	18'-3"	22'-6"	20'-10"	19'-11"	18'-10"
	NI-80	23'-5"	21'-7"	20'-7"	19'-5"	24'-0"	22'-3"	21'-2"	20'-0"
	NI-90	23'-10"	22'-1"	21'-0"	19'-10"	24'-5"	22'-7"	21'-6"	20'-4"
16"	NI-60	23'-9"	22'-0"	21'-0"	19'-10"	24'-6"	22'-9"	21'-8"	20'-7"
	NI-80	25'-6"	23'-7"	22'-5"	21'-2"	26'-2"	24'-3"	23'-1"	21'-10"
	NI-90	26'-0"	24'-0"	22'-10"	21'-6"	26'-7"	24'-8"	23'-5"	22'-2"

Joist depth	Joist series	Mid-span blocking with 1x4 inch strap On centre spacing				Mid-span blocking and 1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-10"	15'-5"	14'-6"	13'-5"	16'-10"	15'-5"	14'-6"	13'-5"
	NI-40x	18'-8"	17'-2"	16'-3"	15'-2"	18'-10"	17'-2"	16'-3"	15'-2"
	NI-60	18'-11"	17'-6"	16'-6"	15'-5"	19'-2"	17'-6"	16'-6"	15'-5"
	NI-80	20'-3"	18'-10"	17'-11"	16'-10"	20'-8"	19'-3"	18'-2"	16'-10"
11-7/8"	NI-20	20'-1"	18'-5"	17'-5"	16'-2"	20'-1"	18'-5"	17'-5"	16'-2"
	NI-40x	21'-10"	20'-4"	19'-4"	17'-8"	22'-5"	20'-6"	19'-4"	17'-8"
	NI-60	22'-1"	20'-7"	19'-8"	18'-4"	22'-8"	20'-10"	19'-8"	18'-4"
	NI-80	23'-8"	22'-0"	20'-11"	19'-10"	24'-1"	22'-6"	21'-6"	20'-0"
	NI-90	24'-1"	22'-5"	21'-4"	20'-2"	24'-7"	22'-11"	21'-10"	20'-7"
14"	NI-40x	24'-5"	22'-9"	21'-9"	19'-5"	25'-1"	23'-2"	21'-9"	19'-5"
	NI-60	24'-10"	23'-2"	22'-1"	20'-10"	25'-6"	23'-8"	22'-4"	20'-10"
	NI-80	26'-6"	24'-8"	23'-6"	22'-2"	27'-1"	25'-3"	24'-1"	22'-9"
	NI-90	27'-0"	25'-1"	23'-11"	22'-7"	27'-6"	25'-8"	24'-6"	23'-2"
16"	NI-60	27'-3"	25'-5"	24'-3"	22'-11"	28'-0"	26'-2"	24'-9"	23'-1"
	NI-80	29'-1"	27'-1"	25'-9"	24'-4"	29'-8"	27'-9"	26'-5"	25'-0"
	NI-90	29'-7"	27'-6"	26'-2"	24'-9"	30'-2"	28'-2"	26'-10"	25'-5"

Notes:

1. The tabulated clear spans are based on CSA O86-14 and NBC 2015, and are applicable to residential floor construction meeting the above design criteria.
2. For multiple-span applications, the end spans shall be 40% or more of the adjacent span.
3. Minimum bearing length shall be 1-3/4 inch for end bearings, and 3-1/2 inches for intermediate bearings.
4. Bearing stiffeners are not required when I-joists are used in accordance with this table, except as required for hangers.
5. Nordic I-joists are listed in CCMC Evaluation Report 13032-R and APA Product Report PR-L274C.

Maximum Floor Spans – S6.1

Design Criteria

Spans:	Simple span
Loads:	Live load = 40 psf and dead load = 15 psf
Deflection limits:	L/480 under live load and L/240 under total load
Sheathing:	5/8 in. nailed-glued Canadian softwood plywood

Maximum Floor Spans

Joist depth	Joist series	Bare On centre spacing				1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	14'-11"	14'-1"	13'-7"	-	15'-4"	14'-6"	14'-1"	-
	NI-40x	15'-11"	15'-0"	14'-6"	-	16'-4"	15'-5"	14'-11"	-
	NI-60	16'-1"	15'-2"	14'-8"	-	16'-6"	15'-7"	15'-1"	-
	NI-80	17'-1"	16'-1"	15'-6"	-	17'-5"	16'-5"	15'-10"	-
11-7/8"	NI-20	16'-9"	15'-10"	15'-4"	-	17'-4"	16'-4"	15'-10"	-
	NI-40x	17'-10"	16'-10"	16'-3"	-	18'-6"	17'-4"	16'-9"	-
	NI-60	18'-1"	17'-0"	16'-5"	-	18'-9"	17'-6"	16'-11"	-
	NI-80	19'-6"	18'-0"	17'-4"	-	20'-1"	18'-7"	17'-9"	-
	NI-90	19'-11"	18'-4"	17'-8"	-	20'-5"	18'-11"	18'-1"	-
14"	NI-40x	19'-10"	18'-4"	17'-8"	-	20'-6"	19'-1"	18'-3"	-
	NI-60	20'-2"	18'-8"	17'-11"	-	20'-10"	19'-4"	18'-6"	-
	NI-80	21'-8"	20'-0"	19'-1"	-	22'-4"	20'-8"	19'-9"	-
	NI-90	22'-1"	20'-5"	19'-6"	-	22'-9"	21'-0"	20'-1"	-
16"	NI-60	22'-0"	20'-4"	19'-6"	-	22'-9"	21'-1"	20'-2"	-
	NI-80	23'-7"	21'-10"	20'-10"	-	24'-4"	22'-6"	21'-6"	-
	NI-90	24'-1"	22'-2"	21'-2"	-	24'-9"	22'-11"	21'-10"	-

Joist depth	Joist series	Mid-span blocking with 1x4 inch strap On centre spacing				Mid-span blocking and 1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-6"	15'-1"	14'-3"	-	16'-6"	15'-1"	14'-3"	-
	NI-40x	17'-9"	16'-10"	15'-11"	-	18'-2"	16'-11"	15'-11"	-
	NI-60	17'-11"	16'-11"	16'-2"	-	18'-5"	17'-2"	16'-2"	-
	NI-80	19'-3"	17'-10"	17'-3"	-	19'-8"	18'-3"	17'-7"	-
11-7/8"	NI-20	19'-4"	18'-0"	17'-1"	-	19'-9"	18'-1"	17'-1"	-
	NI-40x	20'-10"	19'-4"	18'-6"	-	21'-5"	19'-11"	19'-0"	-
	NI-60	21'-1"	19'-7"	18'-8"	-	21'-8"	20'-2"	19'-3"	-
	NI-80	22'-6"	20'-10"	19'-11"	-	23'-1"	21'-5"	20'-5"	-
	NI-90	23'-0"	21'-3"	20'-4"	-	23'-6"	21'-10"	20'-10"	-
14"	NI-40x	23'-5"	21'-8"	20'-9"	-	24'-0"	22'-5"	21'-5"	-
	NI-60	23'-9"	22'-0"	21'-0"	-	24'-5"	22'-8"	21'-8"	-
	NI-80	25'-4"	23'-6"	22'-5"	-	25'-11"	24'-1"	23'-0"	-
	NI-90	25'-10"	23'-11"	22'-9"	-	26'-5"	24'-6"	23'-4"	-
16"	NI-60	26'-2"	24'-3"	23'-2"	-	26'-11"	25'-0"	23'-11"	-
	NI-80	27'-11"	25'-10"	24'-7"	-	28'-7"	26'-6"	25'-3"	-
	NI-90	28'-5"	26'-3"	25'-0"	-	29'-0"	26'-11"	25'-8"	-

Notes:

1. The tabulated clear spans are based on CSA O86-14 and NBC 2015, and are applicable to residential floor construction meeting the above design criteria.
2. For multiple-span applications, the end spans shall be 40% or more of the adjacent span.
3. Minimum bearing length shall be 1-3/4 inch for end bearings, and 3-1/2 inches for intermediate bearings.
4. Bearing stiffeners are not required when I-joists are used in accordance with this table, except as required for hangers.
5. Nordic I-joists are listed in CCMC Evaluation Report 13032-R and APA Product Report PR-L274C.

Maximum Floor Spans – S7.1

Design Criteria

Spans:	Simple span
Loads:	Live load = 40 psf and dead load = 15 psf
Deflection limits:	L/480 under live load and L/240 under total load
Sheathing:	3/4 in. nailed-glued Canadian softwood plywood

Maximum Floor Spans

Joist depth	Joist series	Bare On centre spacing				1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-10"	15'-0"	14'-5"	13'-5"	16'-4"	15'-5"	14'-6"	13'-5"
	NI-40x	16'-11"	15'-11"	15'-4"	14'-9"	17'-4"	16'-4"	15'-9"	15'-1"
	NI-60	17'-1"	16'-1"	15'-6"	14'-10"	17'-6"	16'-6"	15'-11"	15'-3"
	NI-80	18'-1"	17'-0"	16'-4"	15'-8"	18'-7"	17'-4"	16'-8"	16'-0"
11-7/8"	NI-20	17'-10"	16'-10"	16'-2"	15'-7"	18'-5"	17'-4"	16'-9"	16'-1"
	NI-40x	19'-3"	17'-10"	17'-2"	16'-6"	19'-10"	18'-5"	17'-8"	16'-11"
	NI-60	19'-6"	18'-1"	17'-4"	16'-8"	20'-1"	18'-8"	17'-10"	17'-1"
	NI-80	20'-11"	19'-4"	18'-5"	17'-7"	21'-5"	19'-10"	18'-11"	17'-11"
	NI-90	21'-4"	19'-9"	18'-9"	17'-10"	21'-10"	20'-3"	19'-3"	18'-3"
14"	NI-40x	21'-4"	19'-9"	18'-10"	17'-11"	22'-0"	20'-5"	19'-6"	18'-6"
	NI-60	21'-8"	20'-1"	19'-2"	18'-2"	22'-4"	20'-9"	19'-9"	18'-9"
	NI-80	23'-3"	21'-6"	20'-5"	19'-4"	23'-10"	22'-1"	21'-0"	19'-11"
	NI-90	23'-9"	21'-11"	20'-10"	19'-8"	24'-3"	22'-6"	21'-5"	20'-3"
16"	NI-60	23'-7"	21'-10"	20'-10"	19'-9"	24'-4"	22'-7"	21'-7"	20'-5"
	NI-80	25'-4"	23'-5"	22'-3"	21'-1"	26'-0"	24'-1"	22'-11"	21'-8"
	NI-90	25'-10"	23'-10"	22'-8"	21'-5"	26'-5"	24'-6"	23'-4"	22'-0"

Joist depth	Joist series	Mid-span blocking with 1x4 inch strap On centre spacing				Mid-span blocking and 1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-10"	15'-5"	14'-6"	13'-5"	16'-10"	15'-5"	14'-6"	13'-5"
	NI-40x	18'-7"	17'-2"	16'-3"	15'-2"	18'-10"	17'-2"	16'-3"	15'-2"
	NI-60	18'-10"	17'-6"	16'-6"	15'-5"	19'-1"	17'-6"	16'-6"	15'-5"
	NI-80	20'-2"	18'-9"	17'-11"	16'-10"	20'-7"	19'-2"	18'-2"	16'-10"
11-7/8"	NI-20	20'-1"	18'-5"	17'-5"	16'-2"	20'-1"	18'-5"	17'-5"	16'-2"
	NI-40x	21'-9"	20'-3"	19'-4"	17'-8"	22'-4"	20'-5"	19'-4"	17'-8"
	NI-60	22'-0"	20'-6"	19'-7"	18'-4"	22'-7"	20'-10"	19'-8"	18'-4"
	NI-80	23'-6"	21'-10"	20'-10"	19'-9"	24'-0"	22'-5"	21'-4"	20'-0"
	NI-90	24'-0"	22'-4"	21'-3"	20'-1"	24'-6"	22'-10"	21'-9"	20'-7"
14"	NI-40x	24'-4"	22'-8"	21'-8"	19'-5"	25'-0"	23'-2"	21'-9"	19'-5"
	NI-60	24'-9"	23'-0"	22'-0"	20'-9"	25'-5"	23'-8"	22'-4"	20'-10"
	NI-80	26'-5"	24'-6"	23'-4"	22'-1"	27'-0"	25'-2"	24'-0"	22'-8"
	NI-90	26'-11"	25'-0"	23'-10"	22'-6"	27'-5"	25'-7"	24'-5"	23'-1"
16"	NI-60	27'-2"	25'-4"	24'-2"	22'-10"	27'-11"	26'-1"	24'-9"	23'-1"
	NI-80	29'-0"	26'-11"	25'-8"	24'-3"	29'-7"	27'-7"	26'-4"	24'-11"
	NI-90	29'-6"	27'-5"	26'-1"	24'-8"	30'-1"	28'-1"	26'-9"	25'-4"

Notes:

1. The tabulated clear spans are based on CSA O86-14 and NBC 2015, and are applicable to residential floor construction meeting the above design criteria.
2. For multiple-span applications, the end spans shall be 40% or more of the adjacent span.
3. Minimum bearing length shall be 1-3/4 inch for end bearings, and 3-1/2 inches for intermediate bearings.
4. Bearing stiffeners are not required when I-joists are used in accordance with this table, except as required for hangers.
5. Nordic I-joists are listed in CCMC Evaluation Report 13032-R and APA Product Report PR-L274C.

Maximum Floor Spans – M2.1

Design Criteria

Spans:	Simple span
Loads:	Live load = 40 psf and dead load = 20 psf
Deflection limits:	L/480 under live load and L/240 under total load
Sheathing:	5/8 in. nailed-glued oriented strand board (OSB) sheathing

Maximum Floor Spans

Joist depth	Joist series	Bare On centre spacing				1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-1"	14'-3"	13'-10"	-	15'-7"	14'-9"	14'-3"	-
	NI-40x	16'-2"	15'-3"	14'-8"	-	16'-7"	15'-8"	15'-1"	-
	NI-60	16'-4"	15'-4"	14'-10"	-	16'-9"	15'-9"	15'-3"	-
	NI-80	17'-3"	16'-3"	15'-8"	-	17'-8"	16'-7"	16'-0"	-
11-7/8"	NI-20	17'-0"	16'-0"	15'-6"	-	17'-6"	16'-7"	16'-0"	-
	NI-40x	18'-2"	17'-1"	16'-6"	-	18'-9"	17'-6"	16'-11"	-
	NI-60	18'-5"	17'-3"	16'-8"	-	19'-0"	17'-8"	17'-1"	-
	NI-80	19'-9"	18'-3"	17'-7"	-	20'-4"	18'-10"	18'-0"	-
	NI-90	20'-2"	18'-8"	17'-10"	-	20'-9"	19'-2"	18'-4"	-
14"	NI-40x	20'-1"	18'-8"	17'-10"	-	20'-10"	19'-4"	18'-6"	-
	NI-60	20'-6"	18'-11"	18'-2"	-	21'-2"	19'-8"	18'-9"	-
	NI-80	21'-11"	20'-3"	19'-4"	-	22'-7"	20'-11"	20'-0"	-
	NI-90	22'-5"	20'-8"	19'-9"	-	23'-0"	21'-4"	20'-4"	-
16"	NI-60	22'-4"	20'-8"	19'-9"	-	23'-1"	21'-5"	20'-6"	-
	NI-80	23'-11"	22'-1"	21'-1"	-	24'-8"	22'-10"	21'-9"	-
	NI-90	24'-5"	22'-6"	21'-6"	-	25'-1"	23'-2"	22'-2"	-

Joist depth	Joist series	Mid-span blocking with 1x4 inch strap On centre spacing				Mid-span blocking and 1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-8"	15'-3"	14'-5"	-	16'-8"	15'-3"	14'-5"	-
	NI-40x	17'-11"	17'-0"	16'-1"	-	18'-5"	17'-1"	16'-1"	-
	NI-60	18'-2"	17'-1"	16'-4"	-	18'-8"	17'-4"	16'-4"	-
	NI-80	19'-5"	18'-0"	17'-5"	-	19'-10"	18'-5"	17'-8"	-
11-7/8"	NI-20	19'-7"	18'-2"	17'-3"	-	19'-11"	18'-3"	17'-3"	-
	NI-40x	21'-1"	19'-7"	18'-8"	-	21'-8"	20'-2"	19'-0"	-
	NI-60	21'-4"	19'-9"	18'-11"	-	21'-11"	20'-5"	19'-6"	-
	NI-80	22'-9"	21'-1"	20'-2"	-	23'-3"	21'-8"	20'-8"	-
	NI-90	23'-3"	21'-6"	20'-6"	-	23'-9"	22'-0"	21'-0"	-
14"	NI-40x	23'-8"	21'-11"	20'-11"	-	24'-4"	22'-8"	20'-11"	-
	NI-60	24'-0"	22'-3"	21'-3"	-	24'-8"	22'-11"	21'-11"	-
	NI-80	25'-7"	23'-9"	22'-7"	-	26'-2"	24'-4"	23'-3"	-
	NI-90	26'-1"	24'-2"	23'-0"	-	26'-8"	24'-9"	23'-7"	-
16"	NI-60	26'-5"	24'-6"	23'-5"	-	27'-2"	25'-3"	24'-2"	-
	NI-80	28'-2"	26'-1"	24'-10"	-	28'-10"	26'-9"	25'-6"	-
	NI-90	28'-8"	26'-6"	25'-3"	-	29'-3"	27'-2"	25'-11"	-

Notes:

1. The tabulated clear spans are based on CSA O86-14 and NBC 2015, and are applicable to residential floor construction meeting the above design criteria.
2. For multiple-span applications, the end spans shall be 40% or more of the adjacent span.
3. Minimum bearing length shall be 1-3/4 inch for end bearings, and 3-1/2 inches for intermediate bearings.
4. Bearing stiffeners are not required when I-joists are used in accordance with this table, except as required for hangers.
5. Nordic I-joists are listed in CCMC Evaluation Report 13032-R and APA Product Report PR-L274C.

Maximum Floor Spans – M4.1

Design Criteria

Spans:	Simple span
Loads:	Live load = 40 psf and dead load = 20 psf
Deflection limits:	L/480 under live load and L/240 under total load
Sheathing:	3/4 in. nailed-glued oriented strand board (OSB) sheathing

Maximum Floor Spans

Joist depth	Joist series	Bare On centre spacing				1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-11"	15'-0"	14'-6"	13'-5"	16'-5"	15'-5"	14'-6"	13'-5"
	NI-40x	17'-0"	16'-0"	15'-5"	14'-10"	17'-5"	16'-5"	15'-10"	14'-11"
	NI-60	17'-2"	16'-2"	15'-7"	14'-11"	17'-7"	16'-7"	16'-0"	15'-4"
	NI-80	18'-3"	17'-1"	16'-5"	15'-9"	18'-8"	17'-5"	16'-9"	16'-1"
11-7/8"	NI-20	17'-11"	16'-11"	16'-3"	15'-8"	18'-7"	17'-5"	16'-10"	16'-1"
	NI-40x	19'-4"	17'-11"	17'-3"	16'-7"	19'-11"	18'-6"	17'-9"	17'-0"
	NI-60	19'-7"	18'-2"	17'-6"	16'-9"	20'-2"	18'-9"	17'-11"	17'-2"
	NI-80	21'-1"	19'-6"	18'-6"	17'-7"	21'-7"	20'-0"	19'-0"	18'-0"
	NI-90	21'-6"	19'-10"	18'-11"	17'-11"	22'-0"	20'-4"	19'-5"	18'-4"
14"	NI-40x	21'-5"	19'-11"	18'-11"	18'-0"	22'-1"	20'-7"	19'-7"	18'-7"
	NI-60	21'-10"	20'-2"	19'-3"	18'-3"	22'-6"	20'-10"	19'-11"	18'-10"
	NI-80	23'-5"	21'-7"	20'-7"	19'-5"	24'-0"	22'-3"	21'-2"	20'-0"
	NI-90	23'-10"	22'-1"	21'-0"	19'-10"	24'-5"	22'-7"	21'-6"	20'-4"
16"	NI-60	23'-9"	22'-0"	21'-0"	19'-10"	24'-6"	22'-9"	21'-8"	20'-7"
	NI-80	25'-6"	23'-7"	22'-5"	21'-2"	26'-2"	24'-3"	23'-1"	21'-10"
	NI-90	26'-0"	24'-0"	22'-10"	21'-6"	26'-7"	24'-8"	23'-5"	22'-2"

Joist depth	Joist series	Mid-span blocking with 1x4 inch strap On centre spacing				Mid-span blocking and 1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-10"	15'-5"	14'-6"	13'-5"	16'-10"	15'-5"	14'-6"	13'-5"
	NI-40x	18'-8"	17'-2"	16'-3"	14'-11"	18'-10"	17'-2"	16'-3"	14'-11"
	NI-60	18'-11"	17'-6"	16'-6"	15'-5"	19'-2"	17'-6"	16'-6"	15'-5"
	NI-80	20'-3"	18'-10"	17'-11"	16'-10"	20'-8"	19'-3"	18'-2"	16'-10"
11-7/8"	NI-20	20'-1"	18'-5"	17'-5"	16'-1"	20'-1"	18'-5"	17'-5"	16'-1"
	NI-40x	21'-10"	20'-4"	19'-0"	17'-0"	22'-5"	20'-6"	19'-0"	17'-0"
	NI-60	22'-1"	20'-7"	19'-8"	18'-4"	22'-8"	20'-10"	19'-8"	18'-4"
	NI-80	23'-8"	22'-0"	20'-11"	19'-10"	24'-1"	22'-6"	21'-6"	20'-0"
	NI-90	24'-1"	22'-5"	21'-4"	20'-2"	24'-7"	22'-11"	21'-10"	20'-7"
14"	NI-40x	24'-5"	22'-9"	20'-11"	18'-8"	25'-1"	22'-11"	20'-11"	18'-8"
	NI-60	24'-10"	23'-2"	22'-1"	20'-10"	25'-6"	23'-8"	22'-4"	20'-10"
	NI-80	26'-6"	24'-8"	23'-6"	22'-2"	27'-1"	25'-3"	24'-1"	22'-9"
	NI-90	27'-0"	25'-1"	23'-11"	22'-7"	27'-6"	25'-8"	24'-6"	23'-2"
16"	NI-60	27'-3"	25'-5"	24'-3"	22'-11"	28'-0"	26'-2"	24'-9"	23'-1"
	NI-80	29'-1"	27'-1"	25'-9"	24'-4"	29'-8"	27'-9"	26'-5"	25'-0"
	NI-90	29'-7"	27'-6"	26'-2"	24'-9"	30'-2"	28'-2"	26'-10"	25'-5"

Notes:

1. The tabulated clear spans are based on CSA O86-14 and NBC 2015, and are applicable to residential floor construction meeting the above design criteria.
2. For multiple-span applications, the end spans shall be 40% or more of the adjacent span.
3. Minimum bearing length shall be 1-3/4 inch for end bearings, and 3-1/2 inches for intermediate bearings.
4. Bearing stiffeners are not required when I-joists are used in accordance with this table, except as required for hangers.
5. Nordic I-joists are listed in CCMC Evaluation Report 13032-R and APA Product Report PR-L274C.

Maximum Floor Spans – M6.1

Design Criteria

Spans:	Simple span
Loads:	Live load = 40 psf and dead load = 20 psf
Deflection limits:	L/480 under live load and L/240 under total load
Sheathing:	5/8 in. nailed-glued Canadian softwood plywood

Maximum Floor Spans

Joist depth	Joist series	Bare On centre spacing				1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	14'-11"	14'-1"	13'-7"	-	15'-4"	14'-6"	14'-1"	-
	NI-40x	15'-11"	15'-0"	14'-6"	-	16'-4"	15'-5"	14'-11"	-
	NI-60	16'-1"	15'-2"	14'-8"	-	16'-6"	15'-7"	15'-1"	-
	NI-80	17'-1"	16'-1"	15'-6"	-	17'-5"	16'-5"	15'-10"	-
11-7/8"	NI-20	16'-9"	15'-10"	15'-4"	-	17'-4"	16'-4"	15'-10"	-
	NI-40x	17'-10"	16'-10"	16'-3"	-	18'-6"	17'-4"	16'-9"	-
	NI-60	18'-1"	17'-0"	16'-5"	-	18'-9"	17'-6"	16'-11"	-
	NI-80	19'-6"	18'-0"	17'-4"	-	20'-1"	18'-7"	17'-9"	-
	NI-90	19'-11"	18'-4"	17'-8"	-	20'-5"	18'-11"	18'-1"	-
14"	NI-40x	19'-10"	18'-4"	17'-8"	-	20'-6"	19'-1"	18'-3"	-
	NI-60	20'-2"	18'-8"	17'-11"	-	20'-10"	19'-4"	18'-6"	-
	NI-80	21'-8"	20'-0"	19'-1"	-	22'-4"	20'-8"	19'-9"	-
	NI-90	22'-1"	20'-5"	19'-6"	-	22'-9"	21'-0"	20'-1"	-
16"	NI-60	22'-0"	20'-4"	19'-6"	-	22'-9"	21'-1"	20'-2"	-
	NI-80	23'-7"	21'-10"	20'-10"	-	24'-4"	22'-6"	21'-6"	-
	NI-90	24'-1"	22'-2"	21'-2"	-	24'-9"	22'-11"	21'-10"	-

Joist depth	Joist series	Mid-span blocking with 1x4 inch strap On centre spacing				Mid-span blocking and 1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-6"	15'-1"	14'-3"	-	16'-6"	15'-1"	14'-3"	-
	NI-40x	17'-9"	16'-10"	15'-11"	-	18'-2"	16'-11"	15'-11"	-
	NI-60	17'-11"	16'-11"	16'-2"	-	18'-5"	17'-2"	16'-2"	-
	NI-80	19'-3"	17'-10"	17'-3"	-	19'-8"	18'-3"	17'-7"	-
11-7/8"	NI-20	19'-4"	18'-0"	17'-1"	-	19'-9"	18'-1"	17'-1"	-
	NI-40x	20'-10"	19'-4"	18'-6"	-	21'-5"	19'-11"	19'-0"	-
	NI-60	21'-1"	19'-7"	18'-8"	-	21'-8"	20'-2"	19'-3"	-
	NI-80	22'-6"	20'-10"	19'-11"	-	23'-1"	21'-5"	20'-5"	-
	NI-90	23'-0"	21'-3"	20'-4"	-	23'-6"	21'-10"	20'-10"	-
14"	NI-40x	23'-5"	21'-8"	20'-9"	-	24'-0"	22'-5"	20'-11"	-
	NI-60	23'-9"	22'-0"	21'-0"	-	24'-5"	22'-8"	21'-8"	-
	NI-80	25'-4"	23'-6"	22'-5"	-	25'-11"	24'-1"	23'-0"	-
	NI-90	25'-10"	23'-11"	22'-9"	-	26'-5"	24'-6"	23'-4"	-
16"	NI-60	26'-2"	24'-3"	23'-2"	-	26'-11"	25'-0"	23'-11"	-
	NI-80	27'-11"	25'-10"	24'-7"	-	28'-7"	26'-6"	25'-3"	-
	NI-90	28'-5"	26'-3"	25'-0"	-	29'-0"	26'-11"	25'-8"	-

Notes:

1. The tabulated clear spans are based on CSA O86-14 and NBC 2015, and are applicable to residential floor construction meeting the above design criteria.
2. For multiple-span applications, the end spans shall be 40% or more of the adjacent span.
3. Minimum bearing length shall be 1-3/4 inch for end bearings, and 3-1/2 inches for intermediate bearings.
4. Bearing stiffeners are not required when I-joists are used in accordance with this table, except as required for hangers.
5. Nordic I-joists are listed in CCMC Evaluation Report 13032-R and APA Product Report PR-L274C.

Maximum Floor Spans – M7.1

Design Criteria

Spans:	Simple span
Loads:	Live load = 40 psf and dead load = 20 psf
Deflection limits:	L/480 under live load and L/240 under total load
Sheathing:	3/4 in. nailed-glued Canadian softwood plywood

Maximum Floor Spans


Joist depth	Joist series	Bare On centre spacing				1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	15'-10"	15'-0"	14'-5"	13'-5"	16'-4"	15'-5"	14'-6"	13'-5"
	NI-40x	16'-11"	15'-11"	15'-4"	14'-9"	17'-4"	16'-4"	15'-9"	14'-11"
	NI-60	17'-1"	16'-1"	15'-6"	14'-10"	17'-6"	16'-6"	15'-11"	15'-3"
	NI-80	18'-1"	17'-0"	16'-4"	15'-8"	18'-7"	17'-4"	16'-8"	16'-0"
11-7/8"	NI-20	17'-10"	16'-10"	16'-2"	15'-7"	18'-5"	17'-4"	16'-9"	16'-1"
	NI-40x	19'-3"	17'-10"	17'-2"	16'-6"	19'-10"	18'-5"	17'-8"	16'-11"
	NI-60	19'-6"	18'-1"	17'-4"	16'-8"	20'-1"	18'-8"	17'-10"	17'-1"
	NI-80	20'-11"	19'-4"	18'-5"	17'-7"	21'-5"	19'-10"	18'-11"	17'-11"
	NI-90	21'-4"	19'-9"	18'-9"	17'-10"	21'-10"	20'-3"	19'-3"	18'-3"
14"	NI-40x	21'-4"	19'-9"	18'-10"	17'-11"	22'-0"	20'-5"	19'-6"	18'-6"
	NI-60	21'-8"	20'-1"	19'-2"	18'-2"	22'-4"	20'-9"	19'-9"	18'-9"
	NI-80	23'-3"	21'-6"	20'-5"	19'-4"	23'-10"	22'-1"	21'-0"	19'-11"
	NI-90	23'-9"	21'-11"	20'-10"	19'-8"	24'-3"	22'-6"	21'-5"	20'-3"
16"	NI-60	23'-7"	21'-10"	20'-10"	19'-9"	24'-4"	22'-7"	21'-7"	20'-5"
	NI-80	25'-4"	23'-5"	22'-3"	21'-1"	26'-0"	24'-1"	22'-11"	21'-8"
	NI-90	25'-10"	23'-10"	22'-8"	21'-5"	26'-5"	24'-6"	23'-4"	22'-0"

Joist depth	Joist series	Mid-span blocking with 1x4 inch strap On centre spacing				Mid-span blocking and 1/2 in. gypsum ceiling On centre spacing			
		12"	16"	19.2"	24"	12"	16"	19.2"	24"
9-1/2"	NI-20	16'-10"	15'-5"	14'-6"	13'-5"	16'-10"	15'-5"	14'-6"	13'-5"
	NI-40x	18'-7"	17'-2"	16'-3"	14'-11"	18'-10"	17'-2"	16'-3"	14'-11"
	NI-60	18'-10"	17'-6"	16'-6"	15'-5"	19'-1"	17'-6"	16'-6"	15'-5"
	NI-80	20'-2"	18'-9"	17'-11"	16'-10"	20'-7"	19'-2"	18'-2"	16'-10"
11-7/8"	NI-20	20'-1"	18'-5"	17'-5"	16'-1"	20'-1"	18'-5"	17'-5"	16'-1"
	NI-40x	21'-9"	20'-3"	19'-0"	17'-0"	22'-4"	20'-5"	19'-0"	17'-0"
	NI-60	22'-0"	20'-6"	19'-7"	18'-4"	22'-7"	20'-10"	19'-8"	18'-4"
	NI-80	23'-6"	21'-10"	20'-10"	19'-9"	24'-0"	22'-5"	21'-4"	20'-0"
	NI-90	24'-0"	22'-4"	21'-3"	20'-1"	24'-6"	22'-10"	21'-9"	20'-7"
14"	NI-40x	24'-4"	22'-8"	20'-11"	18'-8"	25'-0"	22'-11"	20'-11"	18'-8"
	NI-60	24'-9"	23'-0"	22'-0"	20'-9"	25'-5"	23'-8"	22'-4"	20'-10"
	NI-80	26'-5"	24'-6"	23'-4"	22'-1"	27'-0"	25'-2"	24'-0"	22'-8"
	NI-90	26'-11"	25'-0"	23'-10"	22'-6"	27'-5"	25'-7"	24'-5"	23'-1"
16"	NI-60	27'-2"	25'-4"	24'-2"	22'-10"	27'-11"	26'-1"	24'-9"	23'-1"
	NI-80	29'-0"	26'-11"	25'-8"	24'-3"	29'-7"	27'-7"	26'-4"	24'-11"
	NI-90	29'-6"	27'-5"	26'-1"	24'-8"	30'-1"	28'-1"	26'-9"	25'-4"

Notes:

1. The tabulated clear spans are based on CSA O86-14 and NBC 2015, and are applicable to residential floor construction meeting the above design criteria.
2. For multiple-span applications, the end spans shall be 40% or more of the adjacent span.
3. Minimum bearing length shall be 1-3/4 inch for end bearings, and 3-1/2 inches for intermediate bearings.
4. Bearing stiffeners are not required when I-joists are used in accordance with this table, except as required for hangers.
5. Nordic I-joists are listed in CCMC Evaluation Report 13032-R and APA Product Report PR-L274C.

7c


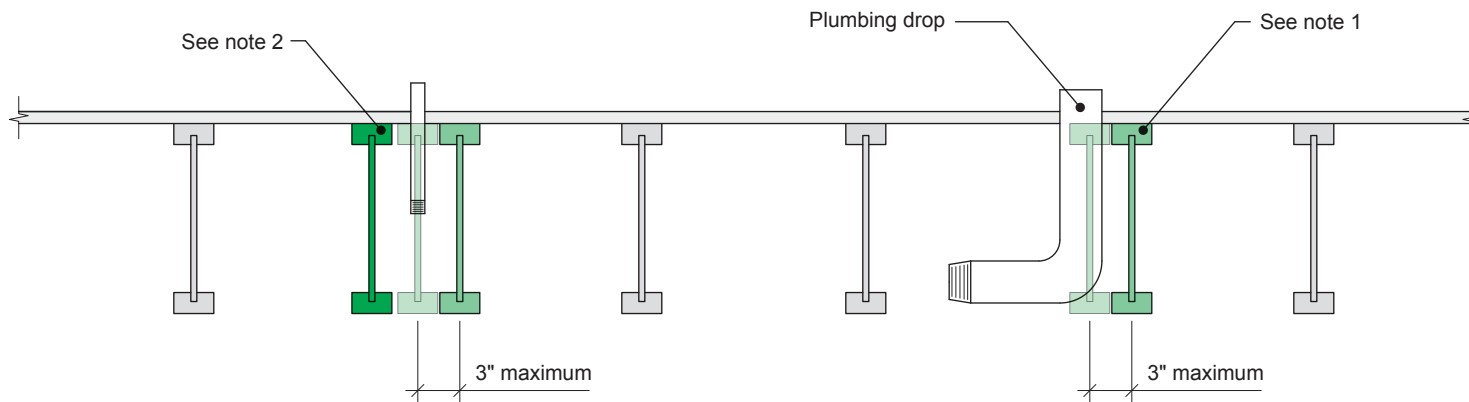


Notes:

1. To prevent interference with plumbing, a joist may be shifted up to 3 inches if the edge of the floor panel is supported and the span rating is not exceeded.
2. In all other cases, an additional joist is required.

All nails shown in the details are assumed to be common nails unless otherwise noted. Nails shall have a diameter not less than 0.128 inch for 2-1/2-inch nails, or 0.144 inch for 3-inch nails. Individual components not shown to scale for clarity.

7d

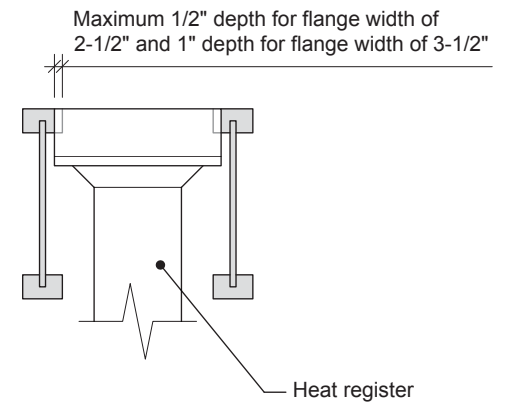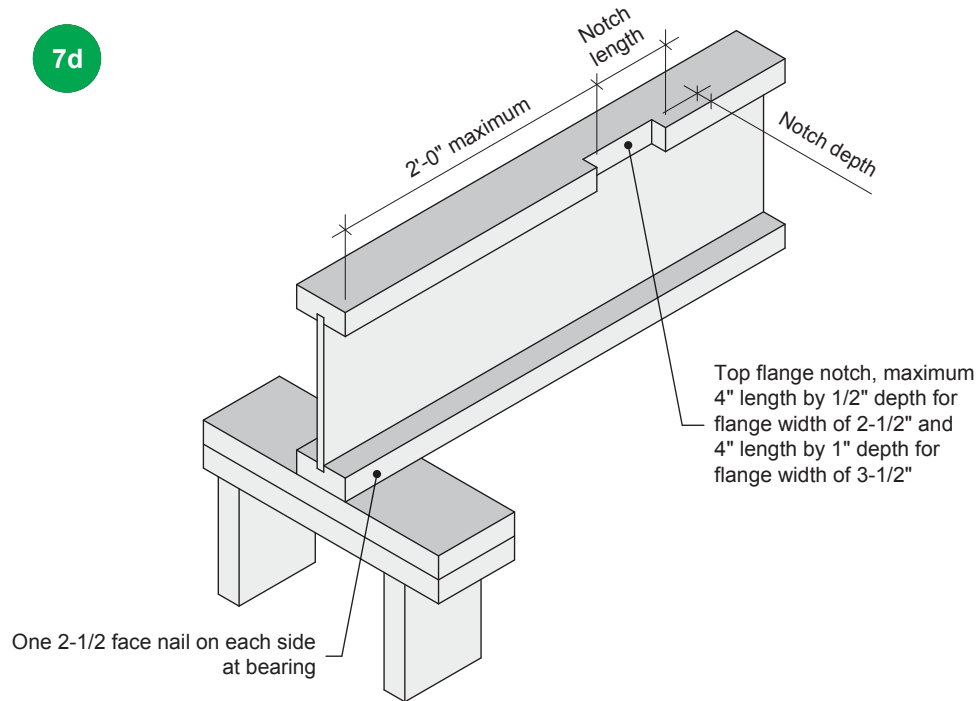

Notes:

1. Blocking required at bearing for lateral support, not shown for clarity.
2. The maximum dimensions for a notch on the side of the top flange are 4-inch length by 1/2-inch depth for flange width of 2-1/2 inches, and 4-inch length by 1-inch depth for flange width of 3-1/2 inches.
3. This detail applies to simple-span joists and multiple-span joists where the notch is located at the end half-span.
4. For other applications, contact Nordic Structures.

All nails shown in the details are assumed to be common nails unless otherwise noted. Nails shall have a diameter not less than 0.128 inch for 2-1/2-inch nails, or 0.144 inch for 3-inch nails. Individual components not shown to scale for clarity.