



Sales Selection Sheet

Wallaceton
REVISED

47 of 48

PURCHASERS: VO Viet Phuong Nguyen and Thi Ga Nguyen

TEL: RES.: 519-496-8890

LOT / UNIT	PHASE	MODEL	
190E-35	1	20-2095 END ALT B The Forbes	

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

Cabinetry

1		Qty: 1	
36,662	Note: PURCHASER CHANGE FRIDGE SPEC FROM ORIGINAL APPLIANCE PACKAGE, CABINETS SIZE DID NOT CHANGE SEE SPEC PAGE# 48		

Sub Total

HST

Total

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment Summary

Paid By	Amount
---------	--------

Total Payment:

PURCHASER:

Signature on file
VO Viet Phuong Nguyen

21-Sep-20

DATE

IRIT SALEM
Decor Consultant

21-Sep-20

DATE

PURCHASER:

Thi Ga Nguyen

21-Sep-20

DATE

APPROVE!

Signature
-09- 25 2020

Date Approved Heathwood Homes (Huron) Limited

TAX#:1

PREPARED BY: Irit Salem

PE 500-1

SInvoice.rpt 28may19

48 of 48



French Door Bottom Mount Refrigerator

WRF535SMH2

PRODUCT MODEL NUMBERS

~~WRF532SMH~~ WRF535SMH
~~WRF540GWH~~

Electrical: A 115 V, 60 Hz, AC only 15 or 20 A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.



NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


Reverse Osmosis Water Supply:
If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

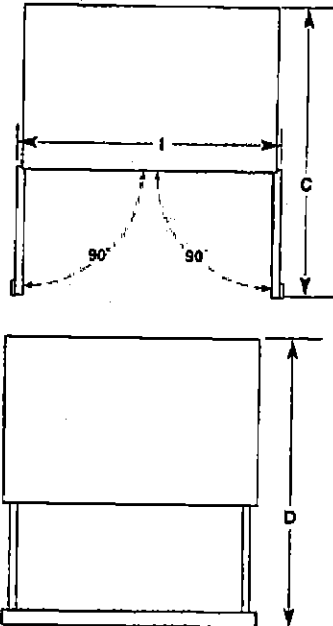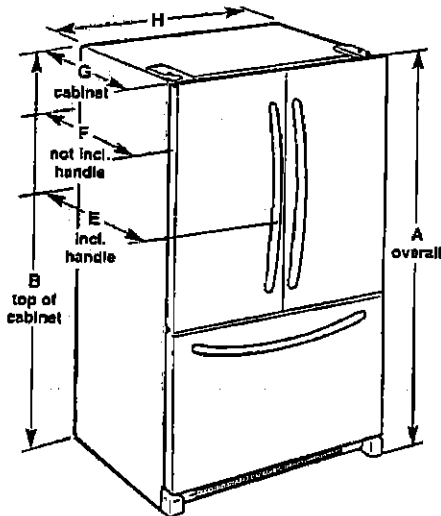

Model Number	Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"
WRF532SMH	22 1/4" cu. ft. (620.1 cm)	70 1/4" (178.1 cm)	68 1/4" (174.9 cm)	47 1/4" (119.7 cm)	52 1/4" (132.4 cm)	34 1/2" (87.4 cm)	32" (81.3 cm)	28 1/2" (72.5 cm)	32 1/4" (82.9 cm)
WRF535SMH	25 1/2" cu. ft. (720.1 cm)	70 1/4" (178.1 cm)	68 1/4" (174.9 cm)	48 1/4" (122.2 cm)	52 1/4" (132.4 cm)	35 1/2" (89.9 cm)	33" (83.8 cm)	29 1/4" (73.9 cm)	35 1/4" (90.5 cm)
WRF540GWH	20" cu. ft. (566.3 cm)	70 1/4" (178.1 cm)	68 1/4" (174.9 cm)	43" (109.2 cm)	45 1/4" (115.3 cm)	30 1/2" (77.5 cm)	26 1/4" (66.3 cm)	24 1/4" (61.2 cm)	35 1/4" (90.5 cm)

LOCATION REQUIREMENTS

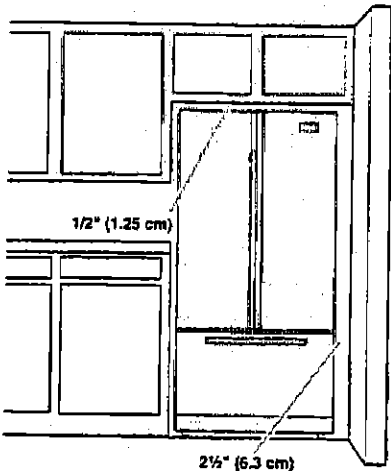

IMPORTANT: This refrigerator is designed only for indoor, household use only.

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2 1/2" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.