


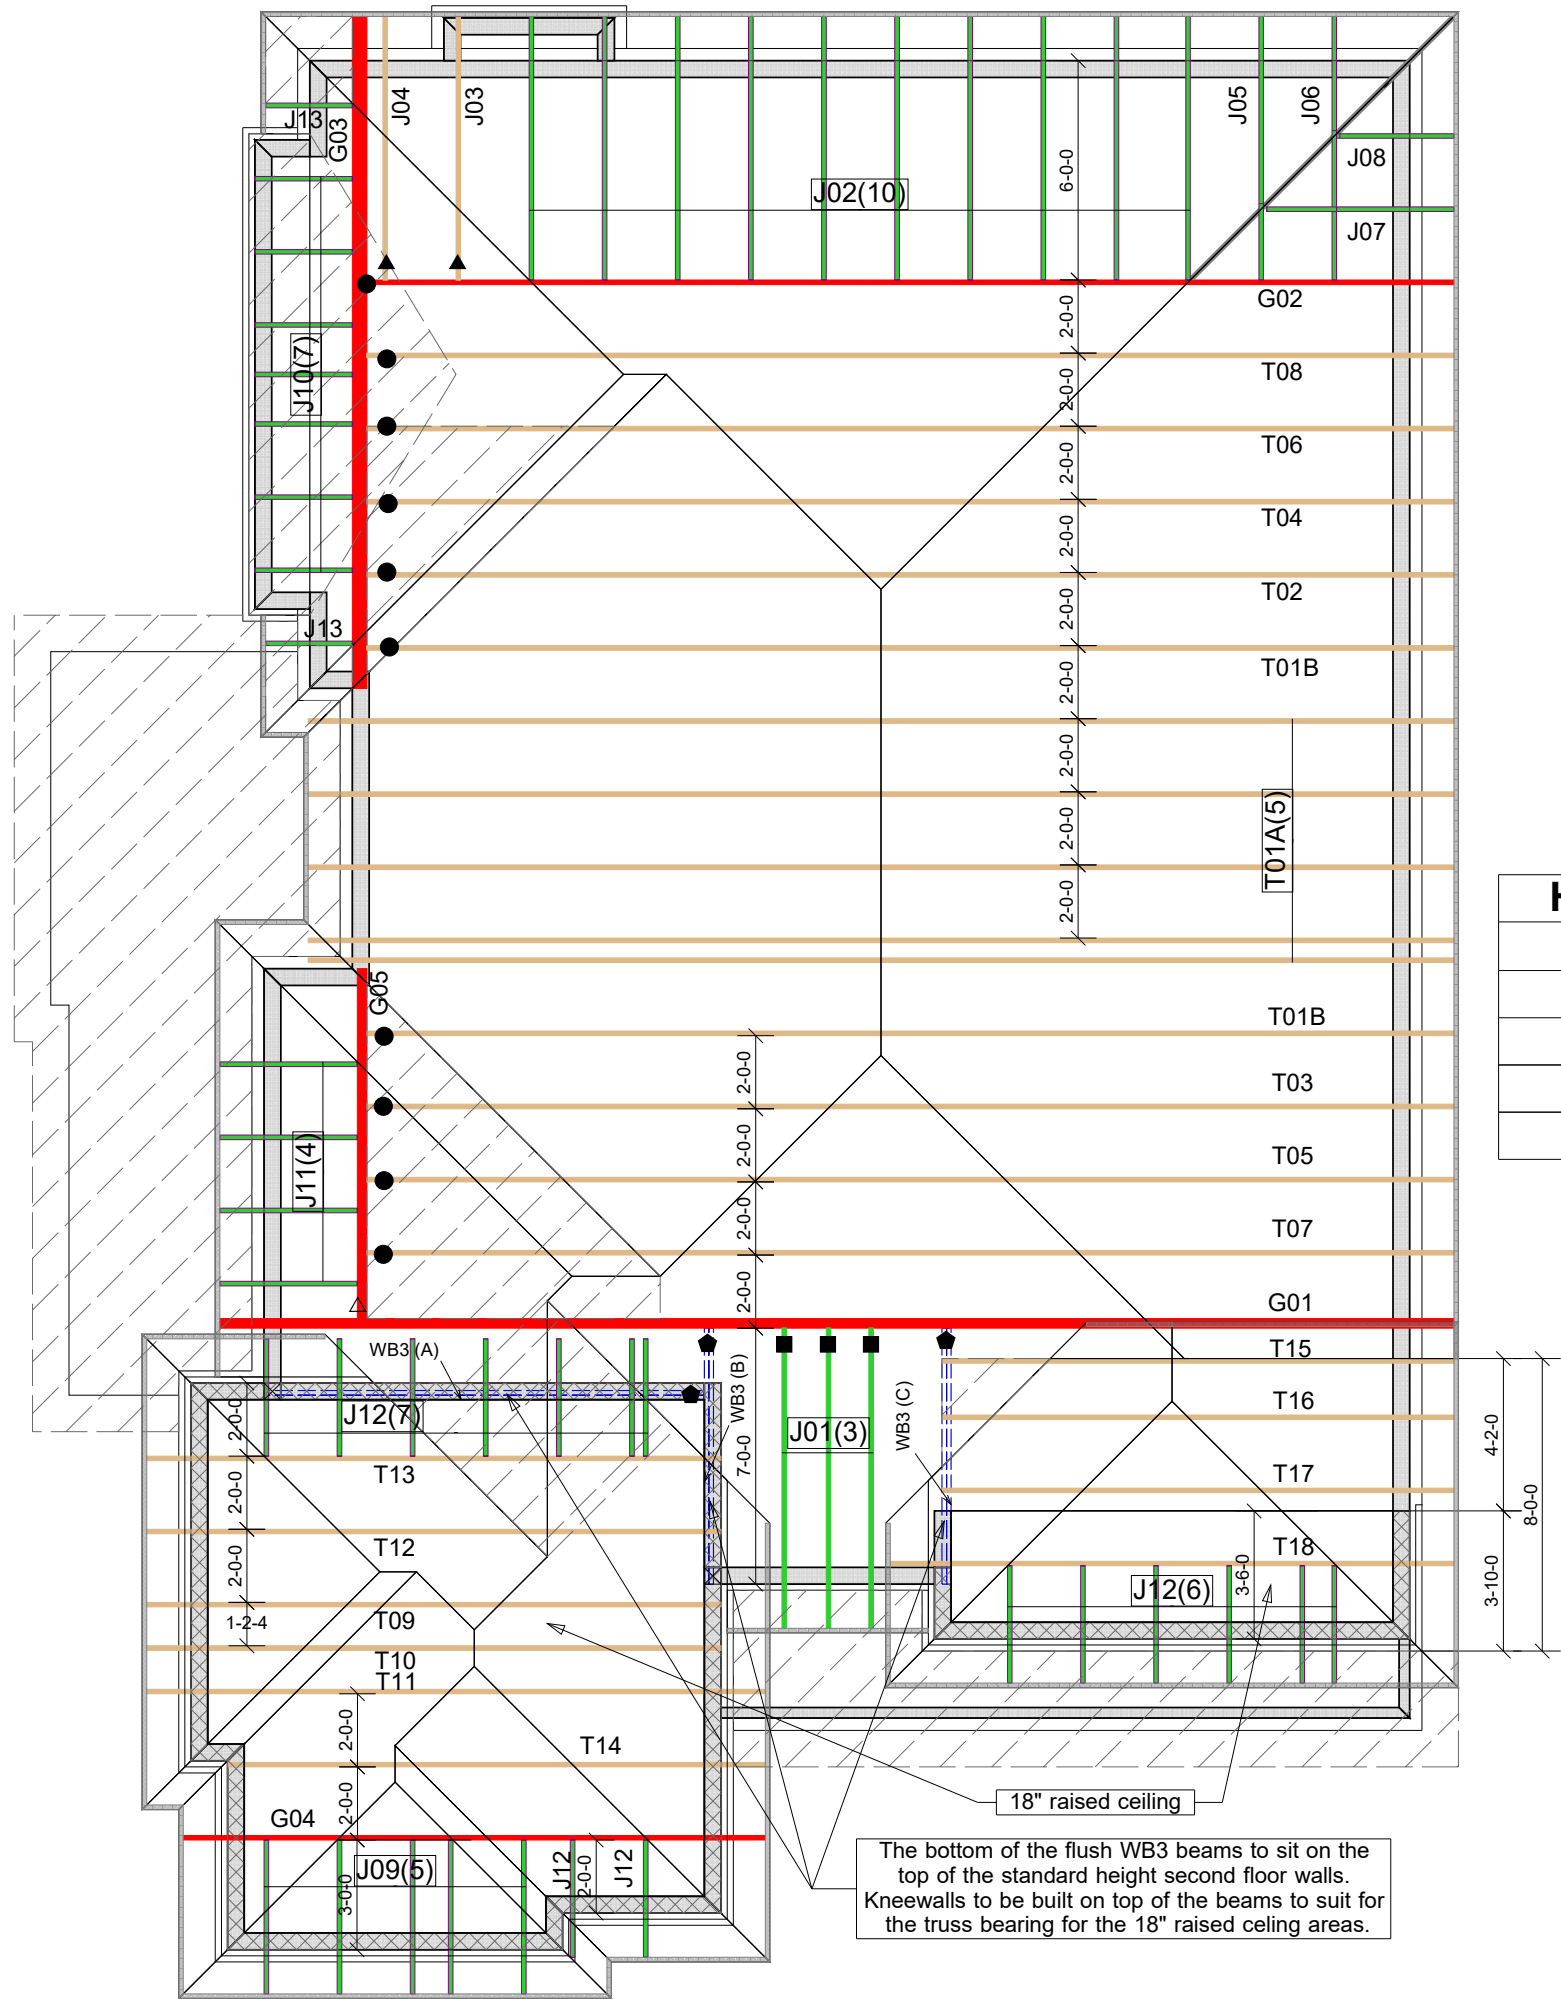

| Hanger Name | Symbol | QTY |
|-------------|--------|-----|
| LUS24       | ▲      | 2   |
| LUS26       | ■      | 3   |
| LJS26DS     | ●      | 10  |
| LUS28-2     | ⬆      | 3   |
| HGUS26-2    | △      | 1   |

CONVENTIONAL  
FRAMING BY OTHERS

ALL CONVENTIONAL FRAMING TO CONFORM WITH PART 9 OF THE OBC. ROOF RAFTERS THAT CROSS OVER TRUSSES TO BE MIN. 2x4 SPF @ 24" C/C WITH A 2x4 VERTICAL POST TO THE TRUSS BELOW. VERTICAL POSTS TO BE LATERALLY BRACED SO THAT UNBRACED LENGTH DOES NOT EXCEED 6'. DESIGN OF CONVENTIONAL FRAMING IS THE RESPONSIBILITY OF THE PROJECT ENGINEER.

JOB INFORMATION

|           |                                                              |
|-----------|--------------------------------------------------------------|
| Customer  | ROUNDEL HOMES INC                                            |
| Job #     | 23-00027R0                                                   |
| Address   | ROUNDEL HOMES<br>PINETREE 11<br>RICHMOND HILL, ON            |
| Model     | PINETREE 11 ELEV 3                                           |
| Sales Rep | RALPH MIRIGELLO                                              |
| Designer  | KR                                                           |
| Date      | 3/22/2023                                                    |
| Path      | C:\MITEK\CA\JOBS\GREENPARK GROUP\ROUNDEL HOMES INC\T-PT11-3\ |

DESIGN INFORMATION

|               |                                                       |
|---------------|-------------------------------------------------------|
| Code          | NBCC 2015                                             |
| Bldg          | Residential - HSB (NBCC Part 9)                       |
| TC LL         | 25.6 lb/ft²                                           |
| TC DL         | 3.0 lb/ft²                                            |
| BC LL         | 0.0 lb/ft²                                            |
| BC DL         | 7.3 lb/ft²                                            |
| Deflection    | LL=L/360 TL=L/360                                     |
| Spacing       | 24" O/C unless otherwise noted                        |
| Complies With | OBC 2012 (2019 Amendment)<br>CSA O86-14 and TPIC 2014 |

IMPORTANT INFORMATION

Hangers and Fasteners to be installed as per manufacturer

Refer to truss drawings in the Truss Engineering Package for ply-to-ply attachment notes

For site-framed valleys: top chords of all roof trusses must be laterally supported using 2x4 continuous bracing @24 O/C - all bracing must be anchored at ends as per TPIC Installation Guidelines

Read all notes on this page in addition to those shown on the KOTT Truss Engineering package

Field erection, handling and bracing are not the responsibility of KOTT, or KOTT Engineering

Unless noted otherwise, hurricane ties are to be installed at the bearings of all trusses > 40 ft clear span, and any girder or beam supporting trusses with a clear span >40 ft. See hanger legend for type.

Unless noted otherwise, for Part 9 bldgs, all trusses are to be anchored to the top of supporting walls as follows: trusses with a clear span <40 ft use 3-1/4" nails @ each bearing; trusses with a clear span >40 ft use 3-1/4" nails @ each bearing in addition to the appropriate hurricane tie.

CITY OF RICHMOND HILL  
BUILDING DIVISION


05/24/2023

RECEIVED  
Per: joshua.nabua

KOTT  
14 Anderson Blvd.  
Uxbridge, ON  
905.642.4400

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:36 2023 Page 1


ID:qkoKX8tEThltErnD1?qzgxzYQay-GTKZRDuEai1Q5oYtEzfDTPaaZiq?B03pswvbPwzOUJv



RECEIVED  
Per: joshua.nabua

1) **C1:** A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

| JT | TYPE   | PLATES | W   | LEN  | Y    | X    |
|----|--------|--------|-----|------|------|------|
| B  | TMVWm  | MT20   | 4.0 | 10.0 | 1.75 | 5.00 |
| C  | TTWW+m | MT20   | 5.0 | 8.0  | Edge |      |



**READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: TRUSSES. THE NOTE PAGE  
IS AN INTEGRAL PART OF THIS DRAWING AS IT  
CONTAINS SPECIFICATIONS AND CRITERIA USED  
IN THE DESIGN OF THIS COMPONENT.**

RECEIVED  
Per: joshua.nabua

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | G01        | 1        | 2   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:36 2023 Page 2

ID:qkoKX8tEThltErnD1?qzgzYQay-GTKZRDuEai1Q5oYtEzfDTPaaZiq?B03pswvbPwzOUJv

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN  | Y    | X    |
|----|---------|--------|-----|------|------|------|
| D  | TMW+w   | MT20   | 2.0 | 4.0  |      |      |
| E  | TS-t    | MT20   | 4.0 | 5.0  |      |      |
| F  | TMWW-t  | MT20   | 3.0 | 4.0  |      |      |
| G  | TTWW+m  | MT20   | 6.0 | 6.0  | 2.00 | 2.50 |
| H  | TMWW-t  | MT20   | 3.0 | 4.0  | 1.50 | 1.25 |
| I  | TMVW-p  | MT20   | 4.0 | 12.0 | 1.00 | 5.50 |
| K  | BMV1+p  | MT20   | 3.0 | 4.0  | 2.25 | 1.50 |
| L  | BMWW-t  | MT20   | 6.0 | 8.0  | 3.00 | 3.50 |
| M  | BMWW-t  | MT20   | 4.0 | 4.0  | 2.25 | 2.00 |
| N  | BMWW-t  | MT20   | 5.0 | 5.0  | 2.50 | 2.25 |
| O  | BS-t    | MT20   | 6.0 | 8.0  |      |      |
| P  | BMWWW-t | MT20   | 5.0 | 8.0  | 2.50 | 3.25 |
| Q  | BMWW-t  | MT20   | 5.0 | 5.0  | 2.50 | 1.50 |
| R  | BMV1+p  | MT20   | 2.0 | 4.0  |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE  
TOUCHES EDGE OF CHORD.

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (L) (INPUT = 0.90 )

JSI METAL= 0.88 (O) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: TRUSSES. THE NOTE PAGE  
IS AN INTEGRAL PART OF THIS DRAWING AS IT  
CONTAINS SPECIFICATIONS AND CRITERIA USED  
IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION


05/24/2023



Per: joshua.nabua

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:37 2023 Page 1

ID:qkoKX8tEThltErnD1?qzgxzYQay-kfuxfYvsx0AHix73ogAS0d6qL64zwVlz5af9xMzOUJu




TOTAL WEIGHT = 116 lb

## WB - INDICATES BLOCKING REQUIRED

1) **C1:** A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .



**READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: TRUSSES. THE NOTE PAGE  
IS AN INTEGRAL PART OF THIS DRAWING AS IT  
CONTAINS SPECIFICATIONS AND CRITERIA USED  
IN THE DESIGN OF THIS COMPONENT.**

CONTINUED ON PAGE 2

05/24/2023

01/24/2025  
KOTT  
RECEIVED

Per: joshua.nabua

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | G02        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:37 2023 Page 2  
ID:qkoKX8tEThltErnD1?qzgxyzYQay-kfuxfYvsx0AHix73ogAS0d6qL64zwVlz5af9xMzOUJu

NAIL VALUES  

| PLATE | GRIP(DRY) | SHEAR    | SECTION   |
|-------|-----------|----------|-----------|
|       | (PSI)     | (PLI)    | (PLI)     |
|       | MAX MIN   | MAX MIN  | MAX MIN   |
| MT20  | 650 371   | 1747 788 | 1987 1873 |

  
PLATE PLACEMENT TOL. = 0.250 inches  
  
PLATE ROTATION TOL. = 5.0 Deg.  
  
JSI GRIP= 0.90 (S) (INPUT = 0.90 )  
JSI METAL= 0.97 (O) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: TRUSSES. THE NOTE PAGE  
IS AN INTEGRAL PART OF THIS DRAWING AS IT  
CONTAINS SPECIFICATIONS AND CRITERIA USED  
IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION


05/24/2023  
  
RECEIVED

Per: joshua.nabua

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | G03        | 1        | 3   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:37 2023 Page 1  
ID:qkoKX8tEThlEmD1?zqgxzYQay-kfuxfYvsx0AHix73ogAS0d6tR67YwS2z5af9xmZOUJu

1-2-8 1-2-8 0-0 1-2-0 1-2-0 4-10-12 6-0-12 3-3-12 9-4-8 3-3-12 12-8-4 3-3-12 16-0-0 1-2-0 17-2-0  
Scale = 1:28.3

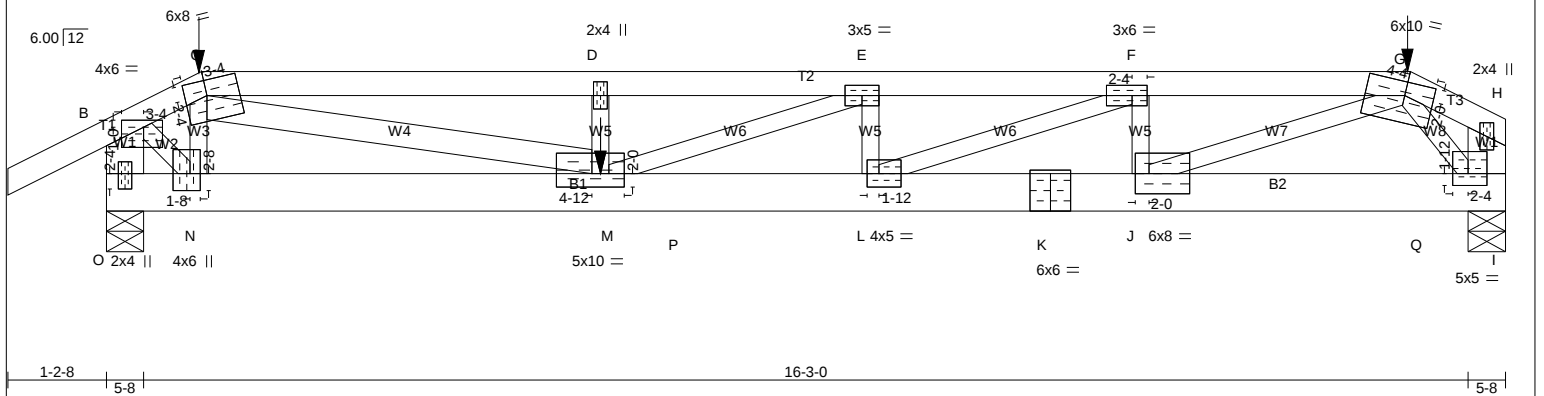

TOTAL WEIGHT = 3 X 73 = 218 lb

|                                                                                                                                                                                                      |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    |                                                     |                       |                                                                                            |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----|-------------|-----------------------------------------------------------------------------------------------|----------------|------|------------------|------|-------|--------|-------|-------|------------------------------------|-----------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------------|--|
| LUMBER                                                                                                                                                                                               |        |     |             | DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER |                |      |                  |      |       |        |       |       |                                    | DESIGN CRITERIA                                     |                       |                                                                                            |  |
| N. L. G. A. RULES                                                                                                                                                                                    |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | *** SPECIAL LOADS ANALYSIS ***                      |                       |                                                                                            |  |
| CHORDS                                                                                                                                                                                               |        |     |             | BEARINGS                                                                                      |                |      |                  |      |       |        |       |       |                                    | GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.        |                       |                                                                                            |  |
| A - C                                                                                                                                                                                                | 2x4    | DRY | 2100F 1.8E  | SPF                                                                                           | FACTORED       |      | MAXIMUM FACTORED |      | INPUT |        | REQRD |       | LOADS WERE DERIVED FROM USER INPUT |                                                     |                       |                                                                                            |  |
| C - G                                                                                                                                                                                                | 2x4    | DRY | 2100F 1.8E  | SPF                                                                                           | GROSS REACTION |      | GROSS REACTION   |      | BRG   |        | BRG   |       | NO FURTHER MODIFICATIONS WERE MADE |                                                     |                       |                                                                                            |  |
| G - H                                                                                                                                                                                                | 2x4    | DRY | 2100F 1.8E  | SPF                                                                                           | JT             | VERT | HORZ             | DOWN | HORZ  | UPLIFT | IN-SX | IN-SX |                                    |                                                     |                       |                                                                                            |  |
| O - B                                                                                                                                                                                                | 2x6    | DRY | No.2        | SPF                                                                                           | O              | 4792 | 0                | 4792 | 0     | 0      | 5-8   | 1-8   |                                    |                                                     |                       |                                                                                            |  |
| I - H                                                                                                                                                                                                | 2x6    | DRY | No.2        | SPF                                                                                           | I              | 6065 | 0                | 6065 | 0     | 0      | 5-8   | 2-3   |                                    |                                                     |                       |                                                                                            |  |
| O - K                                                                                                                                                                                                | 2x6    | DRY | 2100F 1.8E  | SPF                                                                                           |                |      |                  |      |       |        |       |       |                                    |                                                     | SPECIFIED LOADS:      |                                                                                            |  |
| K - I                                                                                                                                                                                                | 2x6    | DRY | No.2        | SPF                                                                                           |                |      |                  |      |       |        |       |       |                                    |                                                     | TOP CH. LL = 25.6 PSF |                                                                                            |  |
| ALL WEBS 2x3 DRY No.2 SPF                                                                                                                                                                            |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | DL = 3.0 PSF                                        |                       |                                                                                            |  |
| EXCEPT                                                                                                                                                                                               |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | BOT CH. LL = 0.0 PSF                                |                       |                                                                                            |  |
| C - M                                                                                                                                                                                                | 2x4    | DRY | No.2        | SPF                                                                                           |                |      |                  |      |       |        |       |       |                                    |                                                     | DL = 7.3 PSF          |                                                                                            |  |
| DRY: SEASONED LUMBER.                                                                                                                                                                                |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | TOTAL LOAD = 35.9 PSF                               |                       |                                                                                            |  |
| DESIGN CONSISTS OF 3 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:                                                                                                                     |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | SPACING = 24.0 IN. C/C                              |                       |                                                                                            |  |
| CHORDS #ROWS SURFACE SPACING (IN) LOAD(PLF)                                                                                                                                                          |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12 |                       |                                                                                            |  |
| TOP CHORDS : (0.122"x3") SPIRAL NAILS                                                                                                                                                                |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | GIRDER TYPE: CStdGirder                             |                       |                                                                                            |  |
| A - C                                                                                                                                                                                                | 1      | 12  | SIDE(2.5)   |                                                                                               |                |      |                  |      |       |        |       |       |                                    | START DISTANCE = 7-0-12                             |                       |                                                                                            |  |
| C - G                                                                                                                                                                                                | 1      | 12  | SIDE(3.8)   |                                                                                               |                |      |                  |      |       |        |       |       |                                    | START SPAN CARRIED = 28-1-0                         |                       |                                                                                            |  |
| G - H                                                                                                                                                                                                | 1      | 12  | SIDE(2.5)   |                                                                                               |                |      |                  |      |       |        |       |       |                                    | END DISTANCE = 16-2-0                               |                       |                                                                                            |  |
| O - B                                                                                                                                                                                                | 2      | 12  | TOP         |                                                                                               |                |      |                  |      |       |        |       |       |                                    | END SPAN CARRIED = 28-1-0                           |                       |                                                                                            |  |
| I - H                                                                                                                                                                                                | 2      | 12  | TOP         |                                                                                               |                |      |                  |      |       |        |       |       |                                    | END WALL WIDTH = 0-0                                |                       |                                                                                            |  |
| BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS                                                                                                                                                             |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | APPLIED TO BACK SIDE OF BOTTOM CHORD.               |                       |                                                                                            |  |
| O - K                                                                                                                                                                                                | 2      | 5   | SIDE(726.4) |                                                                                               |                |      |                  |      |       |        |       |       |                                    | - ADDTL LOADS BASED ON 55 % OF GSL.                 |                       |                                                                                            |  |
| K - I                                                                                                                                                                                                | 2      | 6   | SIDE(445.6) |                                                                                               |                |      |                  |      |       |        |       |       |                                    | GIRDER TYPE: CPrimeHip                              |                       |                                                                                            |  |
| WEBS : (0.122"x3") SPIRAL NAILS                                                                                                                                                                      |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | SIDE SETBACK = 1-2-7                                |                       |                                                                                            |  |
| 2x3                                                                                                                                                                                                  | 1      | 6   |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | END SETBACK = 2-8-0                                 |                       |                                                                                            |  |
| 2x4                                                                                                                                                                                                  | 1      | 6   |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | END WALL WIDTH = 5-8                                |                       |                                                                                            |  |
| STAGGER NAILS BY HALF THE SURFACE SPACING IN ADJACENT PLIES.                                                                                                                                         |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | CORNER FRAMING TYPE: CONVENTIONAL                   |                       |                                                                                            |  |
| GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.                                                                                                                         |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | END JACK TYPE: CONVENTIONAL                         |                       |                                                                                            |  |
| TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.                                                                     |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | APPLIED TO FRONT SIDE                               |                       |                                                                                            |  |
| SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP. |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | - ADDTL LOADS BASED ON 55 % OF GSL.                 |                       |                                                                                            |  |
| PLATES (table is in inches)                                                                                                                                                                          |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    | *** NON STANDARD GIRDER ***                         |                       |                                                                                            |  |
| JT TYPE                                                                                                                                                                                              | PLATES | W   | LEN         | Y                                                                                             | X              |      |                  |      |       |        |       |       |                                    |                                                     |                       | ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.                                        |  |
| B TMVW-p                                                                                                                                                                                             | MT20   | 4.0 | 6.0         | 1.00                                                                                          | 3.25           |      |                  |      |       |        |       |       |                                    |                                                     |                       | THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015 |  |
| C TTWW-m                                                                                                                                                                                             | MT20   | 6.0 | 8.0         | 2.25                                                                                          | 3.25           |      |                  |      |       |        |       |       |                                    |                                                     |                       | THIS DESIGN COMPLIES WITH:                                                                 |  |
| D TMW+w                                                                                                                                                                                              | MT20   | 2.0 | 4.0         |                                                                                               |                |      |                  |      |       |        |       |       |                                    |                                                     |                       | - PART 9 OF CBC 2018 , NBC-2019AE                                                          |  |
|                                                                                                                                                                                                      |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    |                                                     |                       | - PART 9 OF OBC 2012 (2019 AMENDMENT)                                                      |  |
|                                                                                                                                                                                                      |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    |                                                     |                       | - CSA 086-14                                                                               |  |
|                                                                                                                                                                                                      |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    |                                                     |                       | - TPIC 2014                                                                                |  |
|                                                                                                                                                                                                      |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    |                                                     |                       | DESIGN ASSUMPTIONS                                                                         |  |
|                                                                                                                                                                                                      |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    |                                                     |                       | -OVERHANG NOT TO BE ALTERED OR CUT OFF.                                                    |  |
|                                                                                                                                                                                                      |        |     |             |                                                                                               |                |      |                  |      |       |        |       |       |                                    |                                                     |                       | (55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F.                                                |  |

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | G03        | 1        | 3   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:38 2023 Page 2

ID: gkoKX8tEThtErnD1?qzgxzYQay-CsRKsuwUikI8K5iFMOhhYgf2AVTnfvI6JEOitpzOUJt

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN  | Y    | X    |
|----|---------|--------|-----|------|------|------|
| E  | TMWW-t  | MT20   | 3.0 | 5.0  |      |      |
| F  | TMWW-t  | MT20   | 3.0 | 6.0  | 1.50 | 2.25 |
| G  | TTWW-m  | MT20   | 6.0 | 10.0 | 2.00 | 4.25 |
| H  | TMV+p   | MT20   | 2.0 | 4.0  |      |      |
| I  | BMVW1-t | MT20   | 5.0 | 5.0  | 1.75 | 2.25 |
| J  | BMWW-t  | MT20   | 6.0 | 8.0  | 3.00 | 2.00 |
| K  | BS-t    | MT20   | 6.0 | 6.0  |      |      |
| L  | BMWW-t  | MT20   | 4.0 | 5.0  | 2.00 | 1.75 |
| M  | BMWW-t  | MT20   | 5.0 | 10.0 | 2.00 | 4.75 |
| N  | BMWW-t  | MT20   | 4.0 | 6.0  | 2.50 | 1.50 |
| O  | BMV1+p  | MT20   | 2.0 | 4.0  | 2.25 | 1.00 |

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT  
RESPONSIBLE FOR QUALITY CONTROL IN  
THE TRUSS MANUFACTURING PLANT .**NAIL VALUES**

| PLATE | GRIP(DRY)<br>(PSI) | SHEAR<br>(PLI) | SECTION<br>(PLI) |
|-------|--------------------|----------------|------------------|
|       | MAX MIN            | MAX MIN        | MAX MIN          |
| MT20  | 650 371            | 1747 788       | 1987 1873        |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (F) (INPUT = 0.90 )

JSI METAL= 0.94 (K) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: TRUSSES. THE NOTE PAGE  
IS AN INTEGRAL PART OF THIS DRAWING AS IT  
CONTAINS SPECIFICATIONS AND CRITERIA USED  
IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION


05/24/2023



Per: joshua.nabua

|            |            |          |     |             |          |
|------------|------------|----------|-----|-------------|----------|
| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
| IM0423-072 | G04        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:38 2023 Page 1  
ID:qkoX8tEhltEmD1?qzgxzYQay-CsRKsuwUiK8K5iFMohYqf2Gvbx5f56JE0iTpzOUJt

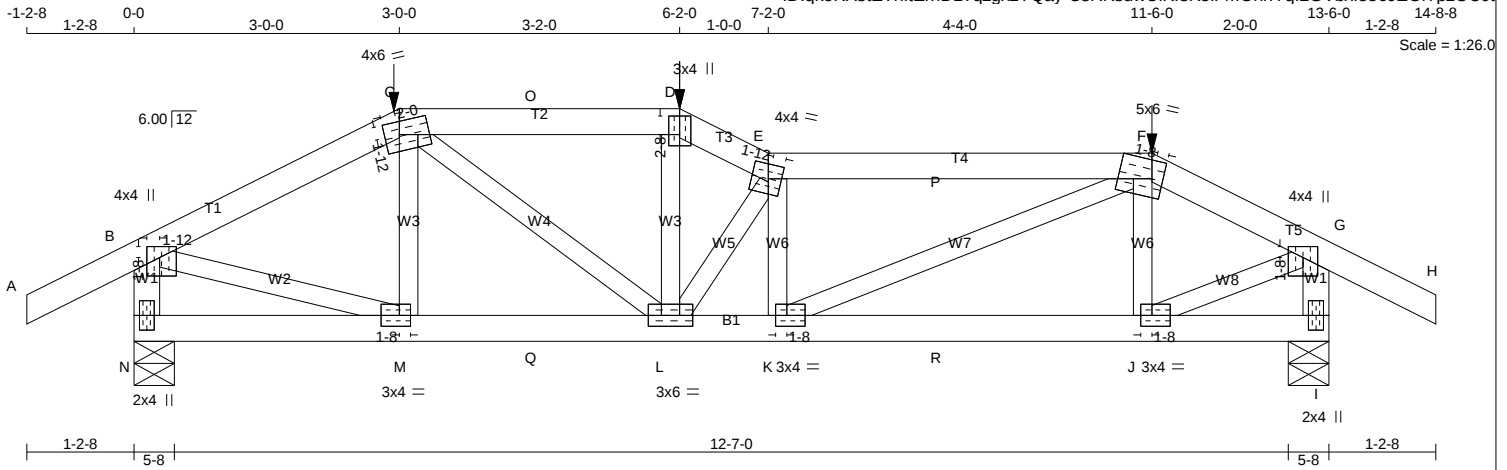**LUMBER**

| N. L. G. A. RULES     | CHORDS | SIZE | LUMBER | DESCR. |
|-----------------------|--------|------|--------|--------|
| A - C                 | 2x4    | DRY  | No.2   | SPF    |
| C - D                 | 2x4    | DRY  | No.2   | SPF    |
| D - E                 | 2x4    | DRY  | No.2   | SPF    |
| E - F                 | 2x4    | DRY  | No.2   | SPF    |
| F - H                 | 2x4    | DRY  | No.2   | SPF    |
| N - B                 | 2x4    | DRY  | No.2   | SPF    |
| I - G                 | 2x4    | DRY  | No.2   | SPF    |
| N - I                 | 2x4    | DRY  | No.2   | SPF    |
| ALL WEBS              | 2x3    | DRY  | No.2   | SPF    |
| EXCEPT                |        |      |        |        |
| DRY: SEASONED LUMBER. |        |      |        |        |

**PLATES (table is in inches)**

| JT      | TYPE   | PLATES | W   | LEN | Y    | X    |
|---------|--------|--------|-----|-----|------|------|
| B       | TMVW+p | MT20   | 4.0 | 4.0 | 1.50 | 1.75 |
| C       | TTWW-m | MT20   | 4.0 | 6.0 | 1.75 | 2.00 |
| D       | TTW+p  | MT20   | 3.0 | 4.0 | 2.50 | 1.50 |
| E       | TTWW-m | MT20   | 4.0 | 4.0 | 2.00 | 1.75 |
| F       | TTWW-m | MT20   | 5.0 | 6.0 | Edge | 4.50 |
| G       | TMVW+p | MT20   | 4.0 | 4.0 | 1.50 | 2.00 |
| I       | BMV1+p | MT20   | 2.0 | 4.0 |      |      |
| J, K, M |        |        |     |     |      |      |
| J       | BMWW-t | MT20   | 3.0 | 4.0 | 1.50 | 1.50 |
| L       | BMWW-t | MT20   | 3.0 | 6.0 |      |      |
| N       | BMV1+p | MT20   | 2.0 | 4.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

| BEARINGS             |          | FACTORED       | MAXIMUM FACTORED              | INPUT     | REQD    |
|----------------------|----------|----------------|-------------------------------|-----------|---------|
| JT                   | VERT     | GROSS REACTION | GROSS REACTION                | BRG       | BRG     |
| N                    | 917      | 0              | 917                           | 0         | 5-8     |
| I                    | 849      | 0              | 849                           | 0         | 5-8     |
| UNFACTORED REACTIONS |          | 1ST LCASE      | MAX./MIN. COMPONENT REACTIONS |           |         |
| JT                   | COMBINED | SNOW           | LIVE                          | PERM.LIVE | WIND    |
| N                    | 639      | 474 / 0        | 0 / 0                         | 0 / 0     | 165 / 0 |
| I                    | 591      | 441 / 0        | 0 / 0                         | 0 / 0     | 150 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N, I

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.02 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| CHORDS |                           | WEBS  |                           |
|--------|---------------------------|-------|---------------------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | MEMB. | MAX. FACTORED FORCE (LBS) |
| FR-TO  |                           | FR-TO |                           |
| A-B    | 0 / 24                    | M-C   | -153 / 23                 |
| B-C    | -958 / 0                  | C-L   | 0 / 400                   |
| C-D    | -1168 / 0                 | L-D   | 0 / 320                   |
| O-D    | -1168 / 0                 | L-E   | -600 / 0                  |
| D-E    | -1290 / 0                 | K-E   | -282 / 0                  |
| E-P    | -1448 / 0                 | K-F   | 0 / 791                   |
| P-F    | -1448 / 0                 | J-F   | -208 / 0                  |
| F-G    | -822 / 0                  | B-M   | 0 / 885                   |
| G-H    | 0 / 24                    | J-G   | 0 / 787                   |
| N-B    | -889 / 0                  |       |                           |
| I-G    | -846 / 0                  |       |                           |
| N-M    | 0 / 0                     |       |                           |
| M-Q    | 0 / 849                   |       |                           |
| Q-L    | 0 / 849                   |       |                           |
| L-K    | 0 / 1464                  |       |                           |
| K-R    | 0 / 722                   |       |                           |
| R-J    | 0 / 722                   |       |                           |
| J-I    | 0 / 0                     |       |                           |

**SPECIFIED CONCENTRATED LOADS (LBS)**

| JT | LOC.   | LC1 | MAX- | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|--------|-----|------|------|-------|------|-------|------|-------|
| C  | 3-0-0  | -43 | -43  | ---  | FRONT | VERT | TOTAL | ---  | C1    |
| D  | 6-2-0  | -4  | -4   | ---  | FRONT | VERT | DEAD  | ---  | C1    |
| D  | 6-2-0  | -38 | -38  | ---  | FRONT | VERT | SNOW  | ---  | C1    |
| F  | 11-6-0 | -10 | -10  | ---  | FRONT | VERT | TOTAL | ---  | C1    |

**CONNECTION REQUIREMENTS**

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

**DESIGN CRITERIA**

\*\*\* SPECIAL LOADS ANALYSIS \*\*\*  
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.  
LOADS WERE DERIVED FROM USER INPUT  
NO FURTHER MODIFICATIONS WERE MADE

**SPECIFIED LOADS:**

|            |   |      |     |
|------------|---|------|-----|
| TOP CH. LL | = | 25.6 | PSF |
| DL         | = | 3.0  | PSF |
| BOT CH. LL | = | 0.0  | PSF |
| DL         | = | 7.3  | PSF |
| TOTAL LOAD | = | 35.9 | PSF |

SPACING = 24.0 IN./C/C

LOADING IN ALL FLAT SECTIONS BASED ON A SLOPE OF 6.00/12

GIRDER TYPE: CPrimeHip  
LEFT SETBACK = 3-0-0  
RIGHT SETBACK = 2-0-0  
END SETBACK = 3-0-0  
END WALL WIDTH = 5-8  
CORNER FRAMING TYPE: CONVENTIONAL  
END JACK TYPE: CONVENTIONAL  
APPLIED TO FRONT SIDE  
- ADDTL. LOADS BASED ON 55 % OF GSL.  
LOADS APPLIED TO FIRST 4-7-0 OF SPAN MEASURED FROM THE LEFT.

GIRDER TYPE: CPrimeHip  
LEFT SETBACK = 3-0-0  
RIGHT SETBACK = 2-0-0  
END SETBACK = 2-0-0  
END WALL WIDTH = 5-8  
CORNER FRAMING TYPE: CONVENTIONAL  
END JACK TYPE: CONVENTIONAL  
APPLIED TO FRONT SIDE  
- ADDTL. LOADS BASED ON 55 % OF GSL.  
LOADS APPLIED TO FIRST 4-4-0 OF SPAN MEASURED FROM THE RIGHT.

\*\*\* NON STANDARD GIRDER \*\*\*  
ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF BCBC 2018, NBC-2019AE  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 086-14  
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.45")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.04")  
ALLOWABLE DEFL.(TL) = L/360 (0.45")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.06")

CSI: TC=0.32/1.00 (E-F:1), BC=0.28/1.00 (K-L:1), WB=0.22/1.00 (B-M:1), SSI=0.15/1.00 (E-F:1)

CITY OF RICHMOND HILL  
BUILDING DIVISION  
CONTINUED ON PAGE 2

05/24/2023

KOTT  
RECEIVED

Per: joshua.nabua



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | G04        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:38 2023 Page 2

ID:qkoKX8tEtHtErnD1?qzgxyzYQay-CsRKsuwUiKl8K5iFMOhhYqf2GVbxf556JE0ItpzOUJt

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT  
RESPONSIBLE FOR QUALITY CONTROL IN  
THE TRUSS MANUFACTURING PLANT .

## NAIL VALUES

| PLATE | GRIP(DRY) | SHEAR | SECTION            |
|-------|-----------|-------|--------------------|
| (PSI) | (PLI)     | (PLI) | (PLI)              |
| MAX   | MIN       | MAX   | MIN                |
| MT20  | 650       | 371   | 1747 788 1987 1873 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (M) (INPUT = 0.90 )

JSI METAL= 0.29 (M) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: TRUSSES. THE NOTE PAGE  
IS AN INTEGRAL PART OF THIS DRAWING AS IT  
CONTAINS SPECIFICATIONS AND CRITERIA USED  
IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION

05/24/2023




Per: joshua.nabua

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | G05        | 1        | 2   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:39 2023 Page 1

ID:qkoKX8tEThltErnD1?zqgxzYQay-g2?i4Ew6TdQ?yFHSw5Cw52CGYvvgOSUGYu8F?FzOUJs

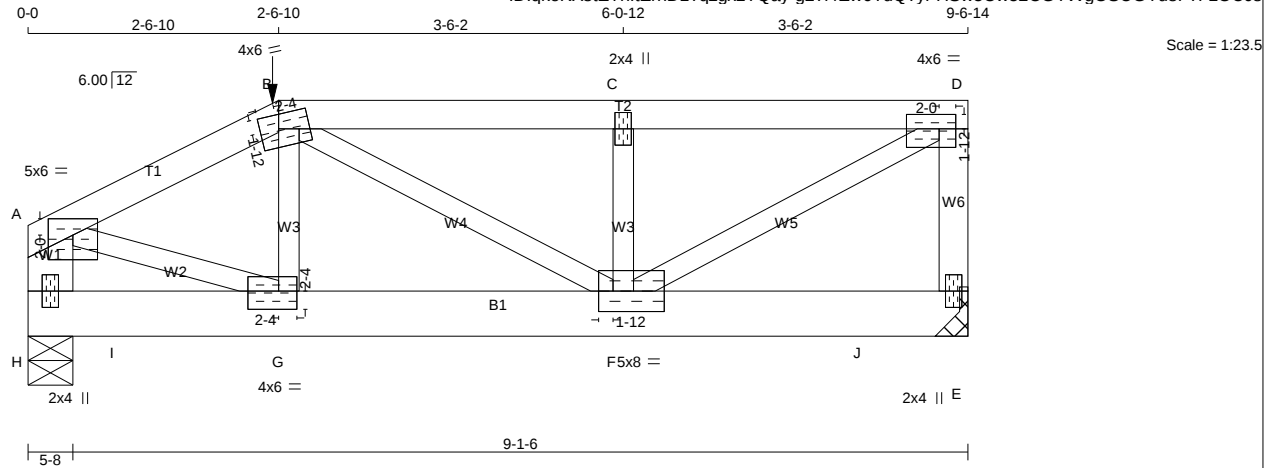

TOTAL WEIGHT = 2 X 42 = 83 lb

**LUMBER**

N. L. G. A. RULES

| CHORDS | SIZE | LUMBER | DESCR. |
|--------|------|--------|--------|
| A - B  | 2x4  | DRY    | No.2   |
| B - D  | 2x4  | DRY    | No.2   |
| E - D  | 2x4  | DRY    | No.2   |
| H - A  | 2x6  | DRY    | No.2   |
| H - E  | 2x6  | DRY    | No.2   |

|          |     |     |      |     |
|----------|-----|-----|------|-----|
| ALL WEBS | 2x3 | DRY | No.2 | SPF |
| EXCEPT   |     |     |      |     |

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

| CHORDS #ROWS                             | SURFACE SPACING (IN) | LOAD (PLF)  |
|------------------------------------------|----------------------|-------------|
| TOP CHORDS : (0.122"x3") SPIRAL NAILS    |                      |             |
| A - B 1 12                               |                      | SIDE(0.0)   |
| B - D 1 12                               |                      | SIDE(1.0)   |
| D - E 1 12                               |                      | TOP         |
| H - A 2 12                               |                      | TOP         |
| BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS |                      |             |
| H - E 2 8                                |                      | SIDE(334.2) |
| WEBS : (0.122"x3") SPIRAL NAILS          |                      |             |
| 2x3 1 6                                  |                      |             |

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERRING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| A  | TMVW-p  | MT20   | 5.0 | 6.0 | 2.00 | 3.00 |
| B  | TTWW-m  | MT20   | 4.0 | 6.0 | 1.75 | 2.25 |
| C  | TMW-w   | MT20   | 2.0 | 4.0 |      |      |
| D  | TMVW-t  | MT20   | 4.0 | 6.0 | 1.75 | 2.00 |
| E  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |
| F  | BMVWW-t | MT20   | 5.0 | 8.0 | 2.50 | 1.75 |
| G  | BMVW-t  | MT20   | 4.0 | 6.0 | 2.25 | 2.25 |
| H  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY****BUILDING DESIGNER****BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | HORZ                            | DOWN      | HORZ     |
| E  | 3042                    | 0                               | 3042      | 0        |
| H  | 3056                    | 0                               | 3056      | 0        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-10.

**UNFACTORED REACTIONS**

| JT | 1ST LCASE COMBINED | SNOW     | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
|----|--------------------|----------|-------|-----------|-------|---------|-------|
| E  | 2130               | 1520 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 610 / 0 | 0 / 0 |
| H  | 2139               | 1528 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 611 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.55 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| C H O R D S |                           |                           |                        | W E B S              |       |                           |               |
|-------------|---------------------------|---------------------------|------------------------|----------------------|-------|---------------------------|---------------|
| MEMB.       | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. LC1 MAX. CSI (LC) | MAX. UNBRACED LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CSI (LC) |
| FR-TO       |                           | FROM TO                   |                        |                      | FR-TO |                           |               |
| A - B       | -3920 / 0                 | -84.3 -84.3               | 0.10 (1)               | 4.71                 | G - B | 0 / 1124                  | 0.14 (1)      |
| B - C       | -4156 / 0                 | -86.2 -86.2               | 0.15 (1)               | 4.55                 | B - F | 0 / 688                   | 0.09 (1)      |
| C - D       | -4156 / 0                 | -86.2 -86.2               | 0.15 (1)               | 4.55                 | F - C | -312 / 0                  | 0.03 (1)      |
| E - D       | -2540 / 0                 | 0.0 0.0                   | 0.16 (1)               | 7.11                 | F - D | 0 / 4799                  | 0.59 (1)      |
| H - A       | -2836 / 0                 | 0.0 0.0                   | 0.10 (1)               | 7.81                 | A - G | 0 / 3632                  | 0.45 (1)      |
| H - I       | 0 / 0                     | -18.7 -18.7               | 0.15 (1)               | 10.00                |       |                           |               |
| I - G       | 0 / 0                     | -687.1 -687.1             | 0.15 (1)               | 10.00                |       |                           |               |
| G - F       | 0 / 3560                  | -687.1 -687.1             | 0.44 (1)               | 10.00                |       |                           |               |
| F - J       | 0 / 0                     | -687.1 -687.1             | 0.24 (1)               | 10.00                |       |                           |               |
| J - E       | 0 / 0                     | -18.7 -18.7               | 0.24 (1)               | 10.00                |       |                           |               |

**SPECIFIED CONCENTRATED LOADS (LBS)**

| JT | LOC.   | LC1 | MAX- | MAX+ | FACE  | DIR. | TYPE  | HEEL | CONN. |
|----|--------|-----|------|------|-------|------|-------|------|-------|
| B  | 2-6-10 | -26 | -26  | ---  | FRONT | VERT | TOTAL | ---  | C1    |

**CONNECTION REQUIREMENTS**

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

**DESIGN CRITERIA****SPECIFIED LOADS:**

|            |    |      |      |     |
|------------|----|------|------|-----|
| TOP CH.    | LL | =    | 25.6 | PSF |
|            | DL | =    | 3.0  | PSF |
| BOT CH.    | LL | =    | 0.0  | PSF |
|            | DL | =    | 7.3  | PSF |
| TOTAL LOAD | =  | 35.9 | PSF  |     |

**SPACING = 24.0 IN. C/C**

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

GIRDER TYPE: CPrimeHip  
LEFT SETBACK = 2-6-10  
RIGHT SETBACK = 0-0  
END SETBACK = 2-6-10  
END WALL WIDTH = 5-8  
CORNER FRAMING TYPE: CONVENTIONAL  
END JACK TYPE: CONVENTIONAL  
APPLIED TO FRONT SIDE  
- ADD'L LOADS BASED ON 55 % OF GSL.

GIRDER TYPE: CStdGirder  
START DISTANCE = 1-0-0  
START SPAN CARRIED = 28-1-0  
END DISTANCE = 8-6-14  
END SPAN CARRIED = 28-1-0  
END WALL WIDTH = 0-0  
APPLIED TO BACK SIDE OF BOTTOM CHORD.  
- ADD'L LOADS BASED ON 55 % OF GSL.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF CBC 2018, NBC-2019AE  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 086-14  
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.32")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.04")  
ALLOWABLE DEFL.(TL)= L/360 (0.32")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.07")

CSI: TC=0.16/1.00 (D-E:1) , BC=0.44/1.00 (F-G:1) , WB=0.59/1.00 (D-F:1) , SSI=0.41/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00  
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES  
PLATE GRIP(DRY) SHEAR SECTION  
(PSI) (PLI) (PLI)

MAX MIN MAX MIN MAX MIN  
MT20 650 371 1747 788 1987 1873

CITY OF RICHMOND HILL  
BUILDING DIVISION  
CONTINUED ON PAGE 2

05/24/2023

KOTT

RECEIVED

Per: joshua.nabua



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | G05        | 1        | 2   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:39 2023 Page 2

ID:qkoKX8tEThltErnD1?qzgxzYQay-g2?i4Ew6TdQ?yFHSw5Cw52CGYwvqOSUGYu8F?FzOUJs

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (G) (INPUT = 0.90 )

JSI METAL= 0.62 (B) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: TRUSSES. THE NOTE PAGE  
IS AN INTEGRAL PART OF THIS DRAWING AS IT  
CONTAINS SPECIFICATIONS AND CRITERIA USED  
IN THE DESIGN OF THIS COMPONENT.


CITY OF RICHMOND HILL  
BUILDING DIVISION

05/24/2023



Per: joshua.nabua

|            |            |          |     |             |          |
|------------|------------|----------|-----|-------------|----------|
| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
| IM0423-072 | J01        | 3        | 1   | TRUSS DESC. |          |

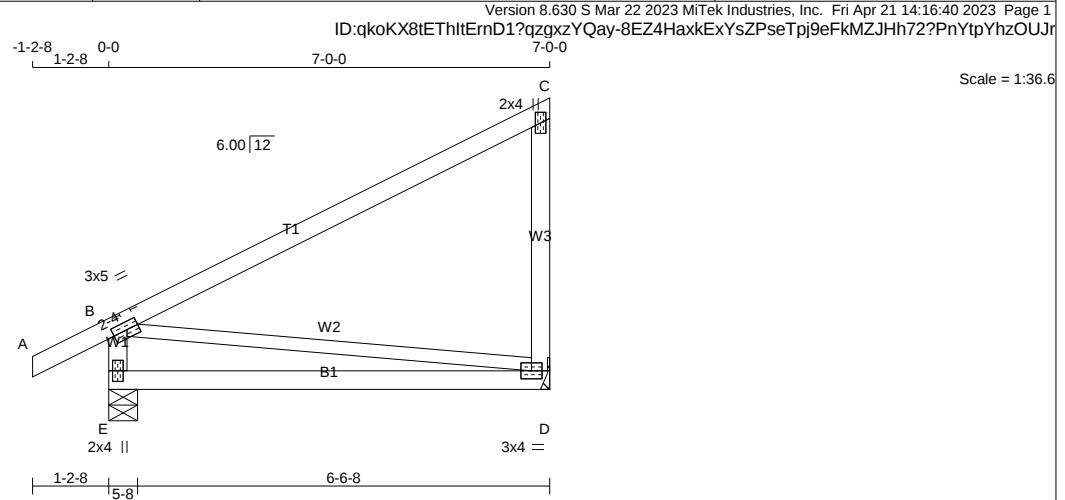

**LUMBER**  
N. L. G. A. RULES

| CHORDS   | SIZE    | LUMBER     | DESCR. |
|----------|---------|------------|--------|
| E - B    | 2x4 DRY | No.2       | SPF    |
| A - C    | 2x4 DRY | 2100F 1.8E | SPF    |
| D - C    | 2x4 DRY | No.2       | SPF    |
| E - D    | 2x4 DRY | No.2       | SPF    |
| ALL WEBS | 2x3 DRY | No.2       | SPF    |

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| B  | TMVW-t  | MT20   | 3.0 | 5.0 | 1.50 | 2.25 |
| C  | TMV+p   | MT20   | 2.0 | 4.0 |      |      |
| D  | BMVW1-t | MT20   | 3.0 | 4.0 |      |      |
| E  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

**BEARINGS**

|    | FACTORED       | MAXIMUM FACTORED | INPUT | REQD |
|----|----------------|------------------|-------|------|
|    | GROSS REACTION | GROSS REACTION   | BRG   | BRG  |
| JT | VERT           | HORZ             | DOWN  | HORZ |
| E  | 466            | 0                | 466   | 0    |
| D  | 359            | 0                | 359   | 0    |

MECHANICAL

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT D. MINIMUM BEARING LENGTH AT JOINT D = 1-8.

**UNFACTORED REACTIONS**

| JT | 1ST LCASE | MAX./MIN. | COMPONENT REACTIONS |
|----|-----------|-----------|---------------------|
|    | COMBINED  | SNOW      | LIVE                |
| E  | 324       | 244 / 0   | 0 / 0               |
| D  | 251       | 179 / 0   | 0 / 0               |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| C H O R D S |                           |                  |                      | W E B S |                           |                      |  |
|-------------|---------------------------|------------------|----------------------|---------|---------------------------|----------------------|--|
| MEMB.       | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PLF) | MAX. UNBRACED LENGTH | MEMB.   | MAX. FACTORED FORCE (LBS) | MAX. UNBRACED LENGTH |  |
| FR-TO       |                           | FROM TO          |                      | FR-TO   |                           |                      |  |
| E-B         | -402 / 0                  | 0.0 0.0          | 0.04 (1)             | B-D     | 0 / 0                     | 0.00 (1)             |  |
| A-B         | 0 / 24                    | -84.3 -84.3      | 0.06 (1)             |         |                           |                      |  |
| B-C         | 0 / 0                     | -84.3 -84.3      | 0.46 (1)             |         |                           |                      |  |
| D-C         | -295 / 0                  | 0.0 0.0          | 0.10 (1)             |         |                           |                      |  |
| E-D         | 0 / 0                     | -18.2 -18.2      | 0.26 (4)             |         |                           |                      |  |

**DESIGN CRITERIA**

**SPECIFIED LOADS:**  
TOP CH. LL = 25.6 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.3 PSF  
TOTAL LOAD = 35.9 PSF

**SPACING = 24.0 IN. C/C**

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF CBC 2018, NBC-2019AE  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 086-14  
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(TL)= L/360 (0.23")  
CALCULATED VERT. DEFL.(TL) = L/786 (0.11")

CSI: TC=0.46/1.00 (B-C:1) , BC=0.26/1.00 (D-E:4) ,  
WB=0.00/1.00 (B-D:1) , SSI=0.21/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

**NAIL VALUES**  
PLATE GRIP(DRY) SHEAR SECTION  
(PSI) (PLI) (PLI)  
MAX MIN MAX MIN MAX MIN  
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.35 (B) (INPUT = 0.90 )  
JSI METAL= 0.12 (C) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION


05/24/2023  
KOTT

RECEIVED

Per: joshua.nabua

|            |            |          |     |             |          |
|------------|------------|----------|-----|-------------|----------|
| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
| IM0423-072 | J02        | 10       | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:41 2023 Page 1  
ID:qkoKX8tEThltEmD1?qzgxzYQay-dR7SVwyN?FgJBZQq1WEOATHYMjfusVFZ0BdM48zOUJq

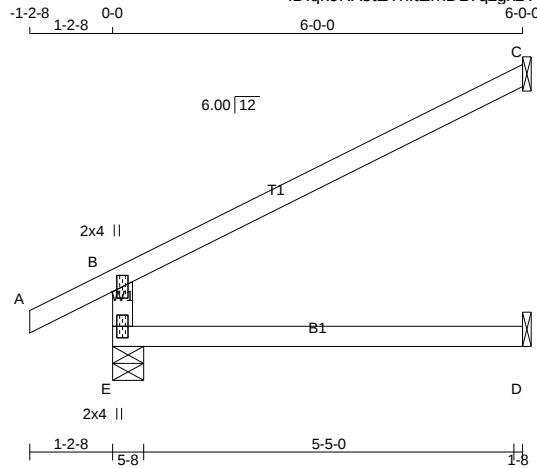

Scale = 1:33.7

TOTAL WEIGHT = 10 X 17 = 169 lb

| LUMBER            |      |        |        |     |
|-------------------|------|--------|--------|-----|
| N. L. G. A. RULES |      |        |        |     |
| CHORDS            | SIZE | LUMBER | DESCR. | SPF |
| E - B             | 2x4  | DRY    | No.2   | SPF |
| A - C             | 2x4  | DRY    | No.2   | SPF |
| E - D             | 2x4  | DRY    | No.2   | SPF |

DRY: SEASONED LUMBER.

| PLATES (table is in inches) |        |        |     |     |     |
|-----------------------------|--------|--------|-----|-----|-----|
| JT                          | TYPE   | PLATES | W   | LEN | Y X |
| B                           | TMV+p  | MT20   | 2.0 | 4.0 |     |
| E                           | BMV1+p | MT20   | 2.0 | 4.0 |     |

#### DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |                | FACTORED |      | MAXIMUM FACTORED |      | INPUT |       | REQD |       |
|----------|----------------|----------|------|------------------|------|-------|-------|------|-------|
| JT       | GROSS REACTION | VERT     | HORZ | DOWN             | HORZ | BRG   | IN-SX | BRG  | IN-SX |
| E        | 488            | 0        | 0    | 488              | 0    | 0     | 5-8   | 1-8  |       |
| C        | 190            | 0        | 0    | 190              | 0    | 0     | 1-8   | 1-8  |       |
| D        | 45             | 0        | 0    | 50               | 0    | 0     | 1-8   | 1-8  |       |

SEE MITK STANDARD DETAIL MSD2015-H FOR CONNECTION TO JOINT(S) C , D

#### UNFACTORED REACTIONS

| 1ST LCASE |          | MAX./MIN. COMPONENT REACTIONS |       |           |       |        |       |
|-----------|----------|-------------------------------|-------|-----------|-------|--------|-------|
| JT        | COMBINED | SNOW                          | LIVE  | PERM.LIVE | WIND  | DEAD   | SOIL  |
| E         | 339      | 257 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 82 / 0 | 0 / 0 |
| C         | 129      | 115 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 14 / 0 | 0 / 0 |
| D         | 36       | 0 / 0                         | 0 / 0 | 0 / 0     | 0 / 0 | 36 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

#### BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

#### LOADING

TOTAL LOAD CASES: (4)

| C H O R D S |                           | W E B S                   |                           |
|-------------|---------------------------|---------------------------|---------------------------|
| MEMB.       | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED FORCE (LBS) |
| FR-TO       |                           | FROM TO                   | LENGTH FR-TO              |
| E-B         | -423 / 0                  | 0.0 0.0 0.11 (4)          | 7.81                      |
| A-B         | 0 / 24                    | -84.3 -84.3 0.10 (1)      | 10.00                     |
| B-C         | -28 / 0                   | -84.3 -84.3 0.40 (1)      | 6.25                      |
| E-D         | 0 / 0                     | -18.2 -18.2 0.14 (4)      | 10.00                     |

#### DESIGN CRITERIA

SPECIFIED LOADS:  
TOP CH. LL = 25.6 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.3 PSF  
TOTAL LOAD = 35.9 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF BCBC 2018 , NBC-2019AE  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 086-14  
- TPIC 2014

DESIGN ASSUMPTIONS  
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")  
ALLOWABLE DEFL.(TL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.03")

CSI: TC=0.40/1.00 (B-C:1) , BC=0.14/1.00 (D-E:4) ,  
WB=0.00/1.00 (n/a:0) , SSI=0.22/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

| NAIL VALUES |                 |             |               |
|-------------|-----------------|-------------|---------------|
| PLATE       | GRIP(DRY) (PSI) | SHEAR (PLI) | SECTION (PLI) |
|             | MAX MIN         | MAX MIN     | MAX MIN       |
| MT20        | 650 371         | 1747 788    | 1987 1873     |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.24 (B) (INPUT = 0.90 )  
JSI METAL= 0.18 (B) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION


05/24/2023  
KOTT

RECEIVED

Per: joshua.nabua

|            |            |          |     |             |          |
|------------|------------|----------|-----|-------------|----------|
| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
| IM0423-072 | J03        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:41 2023 Page 1  
ID:qkoKX8tEThltErnD1?zqgxzYQay-dR7SVwyN?FgjBZQq1WE0ATHcsjgrsVOZ0BdM48zOUJq

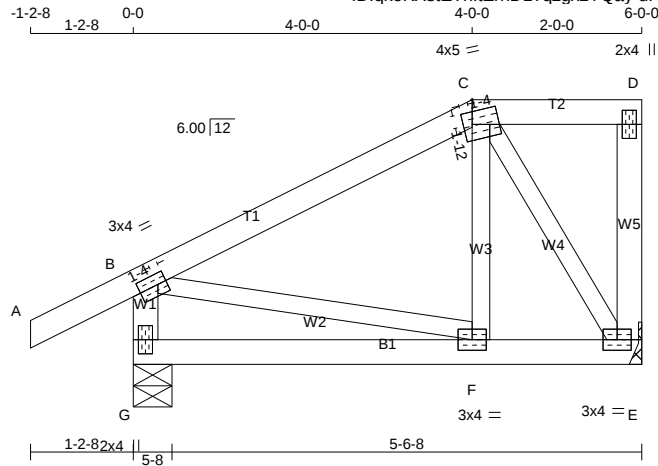

Scale = 1:27.2

TOTAL WEIGHT = 27 lb

**LUMBER**

N. L. G. A. RULES

| CHORDS | SIZE    | LUMBER | DESCR. |
|--------|---------|--------|--------|
| A - C  | 2x4 DRY | No.2   | SPF    |
| C - D  | 2x4 DRY | No.2   | SPF    |
| E - D  | 2x4 DRY | No.2   | SPF    |
| G - B  | 2x4 DRY | No.2   | SPF    |
| G - E  | 2x4 DRY | No.2   | SPF    |

ALL WEBS 2x3 DRY No.2 SPF  
EXCEPT

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| B  | TMVW-t  | MT20   | 3.0 | 4.0 | 1.50 | 1.25 |
| C  | TTWW-m  | MT20   | 4.0 | 5.0 | 1.75 | 1.25 |
| D  | TMV+p   | MT20   | 2.0 | 4.0 |      |      |
| E  | BMVW1-t | MT20   | 3.0 | 4.0 |      |      |
| F  | BMVW-t  | MT20   | 3.0 | 4.0 |      |      |
| G  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER****BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | HORZ                            | DOWN      | UPLIFT   |
| E  | 308                     | 0                               | 308       | 0        |
| G  | 415                     | 0                               | 415       | 0        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

**UNFACTORED REACTIONS**

| JT | 1ST LCASE COMBINED | SNOW    | LIVE  | PERM.LIVE | WIND  | DEAD   | SOIL  |
|----|--------------------|---------|-------|-----------|-------|--------|-------|
| E  | 215                | 154 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 62 / 0 | 0 / 0 |
| G  | 288                | 219 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 69 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) G

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| C H O R D S |                           |                           |              |                      | W E B S |                           |                        |          |  |
|-------------|---------------------------|---------------------------|--------------|----------------------|---------|---------------------------|------------------------|----------|--|
| MEMB.       | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | LC1 MAX (LC) | MAX. UNBRACED LENGTH | MEMB.   | MAX. FACTORED FORCE (LBS) | MAX. FACTORED CSI (LC) |          |  |
| FR-TO       |                           | FROM                      | TO           |                      | FR-TO   |                           |                        |          |  |
| A-B         | 0 / 24                    | -84.3                     | -84.3        | 0.10 (1)             | 10.00   | F-C                       | 0 / 74                 | 0.03 (4) |  |
| B-C         | -171 / 0                  | -84.3                     | -84.3        | 0.17 (1)             | 6.25    | C-E                       | -267 / 0               | 0.06 (1) |  |
| C-D         | 0 / 0                     | -84.3                     | -84.3        | 0.06 (1)             | 10.00   | B-F                       | 0 / 156                | 0.04 (1) |  |
| E-D         | -84 / 0                   | 0.0                       | 0.0          | 0.01 (1)             | 7.81    |                           |                        |          |  |
| G-B         | -383 / 0                  | 0.0                       | 0.0          | 0.04 (1)             | 7.81    |                           |                        |          |  |
| G-F         | 0 / 0                     | -18.2                     | -18.2        | 0.06 (4)             | 10.00   |                           |                        |          |  |
| F-E         | 0 / 154                   | -18.2                     | -18.2        | 0.08 (4)             | 10.00   |                           |                        |          |  |

**DESIGN CRITERIA****SPECIFIED LOADS:**

|            |    |      |      |     |
|------------|----|------|------|-----|
| TOP CH.    | LL | =    | 25.6 | PSF |
|            | DL | =    | 3.0  | PSF |
| BOT CH.    | LL | =    | 0.0  | PSF |
|            | DL | =    | 7.3  | PSF |
| TOTAL LOAD | =  | 35.9 | PSF  |     |

**SPACING = 24.0 IN.CI**

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, NBC-2019AE
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")  
ALLOWABLE DEFL.(TL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01")

CSI: TC=0.17/1.00 (B-C:1) , BC=0.08/1.00 (E-F:4) ,  
WB=0.06/1.00 (C-E:1) , SSI=0.12/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

**NAIL VALUES**

| PLATE | GRIP(DRY) (PSI) | SHEAR (PLI) | SECTION (PLI) |
|-------|-----------------|-------------|---------------|
|       | MAX             | MIN         | MAX           |
| MT20  | 650             | 371         | 1747          |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.36 (B) (INPUT = 0.90 )  
JSI METAL= 0.10 (B) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.


CITY OF RICHMOND HILL  
BUILDING DIVISION

05/24/2023  
KOTT

RECEIVED

Per: joshua.nabua

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:42 2023 Page 1  
ID:qkoKX8tEThlErnD1?zqgxzYQay-5dhqiGz?mYoapj?1bDldjgqmj703bxLiErMvcazOUJp




TOTAL WEIGHT = 24 lb



| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | J05        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:43 2023 Page 1  
ID:qkoKX8tEThltErnD1?qzgxZYQay-ZpFDvczdXswRQsaD9xHsFuMyQWKMKPlrTV6T90zOUJo

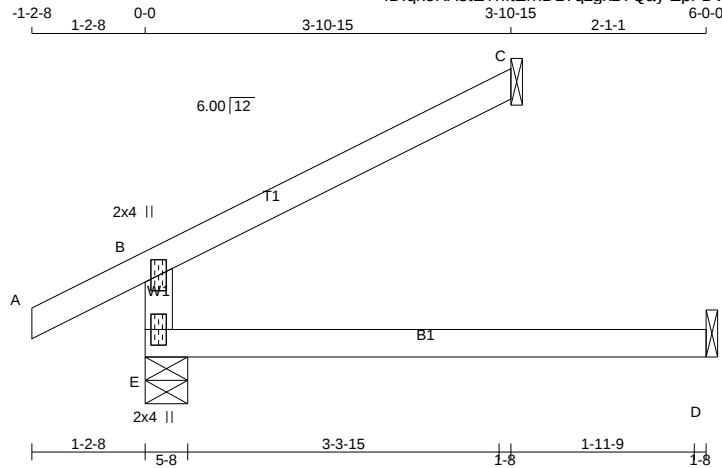

Scale = 1:24.6

TOTAL WEIGHT = 14 lb

**LUMBER**

N. L. G. A. RULES

CHORDS SIZE

E - B 2x4 DRY

A - C 2x4 DRY

E - D 2x4 DRY

LUMBER

No.2

No.2

No.2

DESCR.

SPF

SPF

SPF

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE   | PLATES | W   | LEN | Y | X |
|----|--------|--------|-----|-----|---|---|
| B  | TMV+p  | MT20   | 2.0 | 4.0 |   |   |
| E  | BMV1+p | MT20   | 2.0 | 4.0 |   |   |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY****BUILDING DESIGNER****BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | HORZ                            | DOWN      | HORZ     |
| E  | 378                     | 0                               | 378       | 0        |
| C  | 124                     | 0                               | 124       | 0        |
| D  | 45                      | 0                               | 50        | 0        |

SEE MITEK STANDARD DETAIL MSD2015-H FOR CONNECTION TO JOINT(S) C, D

**UNFACTORED REACTIONS**

| JT | 1ST LCASE | MAX./MIN. COMPONENT REACTIONS | WIND  | DEAD   | SOIL  |
|----|-----------|-------------------------------|-------|--------|-------|
| E  | 264       | 190 / 0                       | 0 / 0 | 74 / 0 | 0 / 0 |
| C  | 84        | 75 / 0                        | 0 / 0 | 9 / 0  | 0 / 0 |
| D  | 36        | 0 / 0                         | 0 / 0 | 36 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E, C

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| C H O R D S |                           |                           |               | W E B S              |       |                           |               |
|-------------|---------------------------|---------------------------|---------------|----------------------|-------|---------------------------|---------------|
| MEMB.       | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. LC1 (LC) | MAX. UNBRACED LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. LC1 (LC) |
| FR-TO       |                           | FROM                      | TO            |                      | FR-TO |                           |               |
| E-B         | -313 / 0                  | 0.0                       | 0.0           | 0.11 (4)             | 7.81  |                           |               |
| A-B         | 0 / 24                    | -84.3                     | -84.3         | 0.10 (1)             | 10.00 |                           |               |
| B-C         | -18 / 0                   | -84.3                     | -84.3         | 0.17 (1)             | 6.25  |                           |               |
| E-D         | 0 / 0                     | -18.2                     | -18.2         | 0.14 (4)             | 10.00 |                           |               |

**DESIGN CRITERIA****SPECIFIED LOADS:**

|            |      |      |     |
|------------|------|------|-----|
| TOP CH.    | LL = | 25.6 | PSF |
|            | DL = | 3.0  | PSF |
| BOT CH.    | LL = | 0.0  | PSF |
|            | DL = | 7.3  | PSF |
| TOTAL LOAD | =    | 35.9 | PSF |

**SPACING = 24.0 IN. C/C**

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

**THIS DESIGN COMPLIES WITH:**

- PART 9 OF BCBC 2018, NBC-2019AE
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

**DESIGN ASSUMPTIONS**

-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) =  $L/360$  (0.20")  
CALCULATED VERT. DEFL.(LL) =  $L/999$  (0.00")  
ALLOWABLE DEFL.(TL) =  $L/360$  (0.20")  
CALCULATED VERT. DEFL.(TL) =  $L/999$  (0.03")

CSI: TC=0.17/1.00 (B-C:1), BC=0.14/1.00 (D-E:4), WB=0.00/1.00 (n/a:0), SSI=0.14/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**

| PLATE | GRIP(DRY) (PSI) | SHEAR (PLI) | SECTION (PLI) |
|-------|-----------------|-------------|---------------|
|       | MAX             | MIN         | MAX           |
| MT20  | 650             | 371         | 1747          |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.18 (B) (INPUT = 0.90 )  
JSI METAL= 0.13 (B) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION


05/24/2023

KOTT  
RECEIVED

Per: joshua.nabua

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | J06        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:44 2023 Page 1  
ID:qkoX8tEhltErnD1?zqgzYQay-10pb7y\_FIA2I209Pieo5o5v80wgb3s??i9r0hSzOUJn

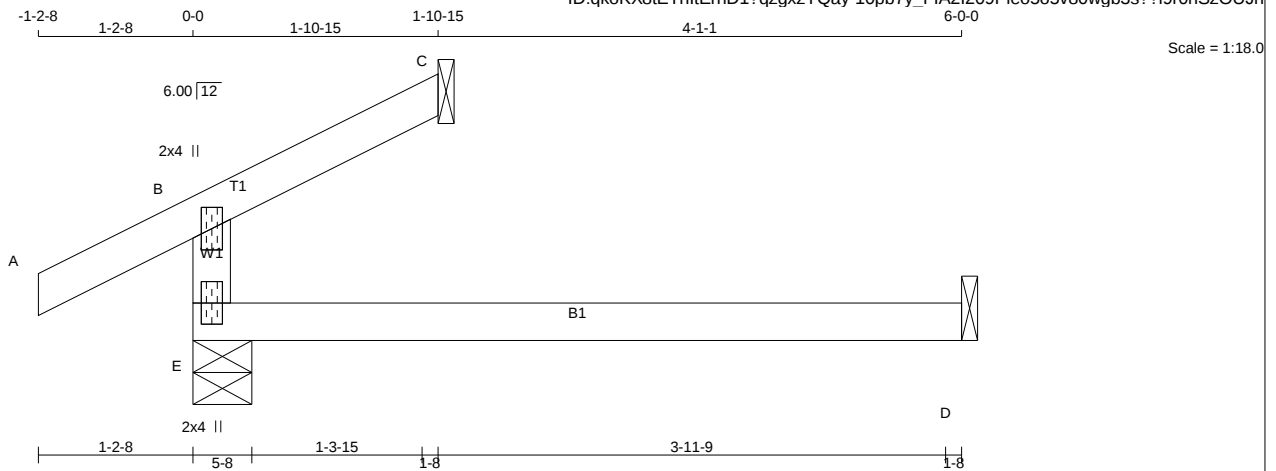

TOTAL WEIGHT = 12 lb

**LUMBER**

N. L. G. A. RULES

| CHORDS | SIZE | LUMBER | DESCR. |
|--------|------|--------|--------|
| E - B  | 2x4  | DRY    | No.2   |
| A - C  | 2x4  | DRY    | No.2   |
| E - D  | 2x4  | DRY    | No.2   |

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE   | PLATES | W   | LEN | Y | X |
|----|--------|--------|-----|-----|---|---|
| B  | TMV+p  | MT20   | 2.0 | 4.0 |   |   |
| E  | BMV1+p | MT20   | 2.0 | 4.0 |   |   |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER****BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | HORZ                            | DOWN      | HORZ     |
| E  | 272                     | 0                               | 272       | 0        |
| C  | 61                      | 0                               | 61        | 0        |
| D  | 45                      | 0                               | 50        | 0        |

SEE MITEK STANDARD DETAIL MSD2015-H FOR CONNECTION TO JOINT(S) C, D

**UNFACTORED REACTIONS**

| JT | 1ST LCASE | MAX./MIN. COMPONENT REACTIONS | SNOW  | LIVE  | PERM.LIVE | WIND  | DEAD   | SOIL  |
|----|-----------|-------------------------------|-------|-------|-----------|-------|--------|-------|
| E  | 192       | 126 / 0                       | 0 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 66 / 0 | 0 / 0 |
| C  | 41        | 37 / 0                        | 0 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 4 / 0  | 0 / 0 |
| D  | 36        | 0 / 0                         | 0 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 36 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E, C

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| MEMB. | CHORDS   | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PLF) | FACTORED VERT. LOAD (PLF) | LC1 MAX | MAX. UNBRACED LENGTH | W E B S | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. UNBRACED LENGTH |
|-------|----------|---------------------------|------------------|---------------------------|---------|----------------------|---------|-------|---------------------------|----------------------|
| FR-TO |          |                           |                  |                           |         |                      |         | FR-TO |                           |                      |
| E-B   | -207 / 0 | 0.0                       | 0.0              | 0.11 (4)                  | 7.81    |                      |         |       |                           |                      |
| A-B   | 0 / 24   | -84.3                     | -84.3            | 0.10 (1)                  | 10.00   |                      |         |       |                           |                      |
| B-C   | -9 / 0   | -84.3                     | -84.3            | 0.04 (1)                  | 10.00   |                      |         |       |                           |                      |
| E-D   | 0 / 0    | -18.2                     | -18.2            | 0.14 (4)                  | 10.00   |                      |         |       |                           |                      |

**DESIGN CRITERIA****SPECIFIED LOADS:**

|            |    |      |      |     |
|------------|----|------|------|-----|
| TOP CH.    | LL | =    | 25.6 | PSF |
| DL         | =  | 3.0  | PSF  |     |
| BOT CH.    | LL | =    | 0.0  | PSF |
| DL         | =  | 7.3  | PSF  |     |
| TOTAL LOAD | =  | 35.9 | PSF  |     |

**SPACING = 24.0 IN. C/C**

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

**THIS DESIGN COMPLIES WITH:**

- PART 9 OF BCBC 2018, NBC-2019AE
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

**DESIGN ASSUMPTIONS**

-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")  
ALLOWABLE DEFL.(TL)= L/360 (0.20")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.03")

CSI: TC=0.11/1.00 (B-E:4), BC=0.14/1.00 (D-E:4),  
WB=0.00/1.00 (n/a:0), SSI=0.09/1.00 (D-E:4)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
| (PSI) | (PLI)     | (PLI) | (PLI)   |
| MAX   | MIN       | MAX   | MIN     |
| MT20  | 650       | 371   | 1747    |
|       |           | 788   | 1987    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.12 (B) (INPUT = 0.90 )  
JSI METAL= 0.09 (B) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION


05/24/2023

KOTT  
RECEIVED

Per: joshua.nabua

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | J07        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:44 2023 Page 1  
ID:qkoKX8tEThtErnD1?zqgzYQay-10pb7y\_FIA2I209Pieo5o5v6NwiT3s??i9r0hSzOUJn

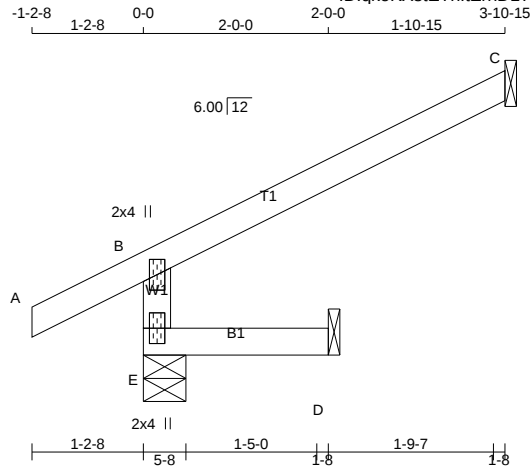

Scale = 1:24.9

TOTAL WEIGHT = 10 lb

**LUMBER**

N. L. G. A. RULES

CHORDS SIZE

E - B 2x4 DRY

A - C 2x4 DRY

E - D 2x4 DRY

LUMBER

No.2

No.2

No.2

DESCR.

SPF

SPF

SPF

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE   | PLATES | W   | LEN | Y | X |
|----|--------|--------|-----|-----|---|---|
| B  | TMV+p  | MT20   | 2.0 | 4.0 |   |   |
| E  | BMV1+p | MT20   | 2.0 | 4.0 |   |   |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY****BUILDING DESIGNER****BEARINGS**

|    | FACTORED       | MAXIMUM FACTORED | INPUT | REQD |
|----|----------------|------------------|-------|------|
|    | GROSS REACTION | GROSS REACTION   | BRG   | BRG  |
| JT | VERT           | HORZ             | DOWN  | HORZ |
| E  | 333            | 0                | 333   | 0    |
| C  | 124            | 0                | 124   | 0    |
| D  | 16             | 0                | 16    | 0    |

SEE MITEK STANDARD DETAIL MSD2015-H FOR CONNECTION TO JOINT(S) C, D

**UNFACTORED REACTIONS**

| JT | 1ST LCASE | MAX./MIN. COMPONENT REACTIONS | SNOW  | LIVE  | PERM.LIVE | WIND  | DEAD   | SOIL  |
|----|-----------|-------------------------------|-------|-------|-----------|-------|--------|-------|
| E  | 229       | 190 / 0                       | 0 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 39 / 0 | 0 / 0 |
| C  | 84        | 75 / 0                        | 0 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 9 / 0  | 0 / 0 |
| D  | 13        | 0 / 0                         | 0 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 13 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| C H O R D S |               |       |            | W E B S       |       |               |       |
|-------------|---------------|-------|------------|---------------|-------|---------------|-------|
| MEMB.       | MAX. FACTORED | FORCE | VERT. LOAD | MAX. FACTORED | MEMB. | MAX. FACTORED | FORCE |
|             | (LBS)         | (PLF) | LC1        | (LBS)         |       | (LBS)         | (LC)  |
| FR-TO       |               |       | FROM       | TO            | FR-TO |               |       |
| E-B         | -313 / 0      | 0.0   | 0.0        | 0.01 (4)      | 7.81  |               |       |
| A-B         | 0 / 24        | -84.3 | -84.3      | 0.10 (1)      | 10.00 |               |       |
| B-C         | -18 / 0       | -84.3 | -84.3      | 0.22 (1)      | 6.25  |               |       |
| E-D         | 0 / 0         | -18.2 | -18.2      | 0.02 (4)      | 10.00 |               |       |

**DESIGN CRITERIA****SPECIFIED LOADS:**

|            |      |      |     |
|------------|------|------|-----|
| TOP CH.    | LL = | 25.6 | PSF |
|            | DL = | 3.0  | PSF |
| BOT CH.    | LL = | 0.0  | PSF |
|            | DL = | 7.3  | PSF |
| TOTAL LOAD | =    | 35.9 | PSF |

**SPACING = 24.0 IN. C/C**

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

**THIS DESIGN COMPLIES WITH:**

- PART 9 OF BCBC 2018, NBC-2019AE
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

**DESIGN ASSUMPTIONS**

-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(TL) = L/360 (0.19")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.00")

CSI: TC=0.22/1.00 (B-C:1) , BC=0.02/1.00 (D-E:4) ,  
WB=0.00/1.00 (n/a:0) , SSI=0.14/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

**NAIL VALUES**

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
| (PSI) | (PLI)     | (PLI) | (PLI)   |
| MAX   | MIN       | MAX   | MIN     |
| MT20  | 650       | 371   | 1747    |
|       | 788       | 1987  | 1873    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.18 (B) (INPUT = 0.90 )  
JSI METAL= 0.13 (B) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION

05/24/2023  
KOTT


RECEIVED

Per: joshua.nabua

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | J08        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:45 2023 Page 1

ID:qkoKX8tEThitErnD1?zgxyzYQay-VCMzKI?i3TA9gAkbgMJKLJSI1K2ioJE8wpbaDvzOUJm

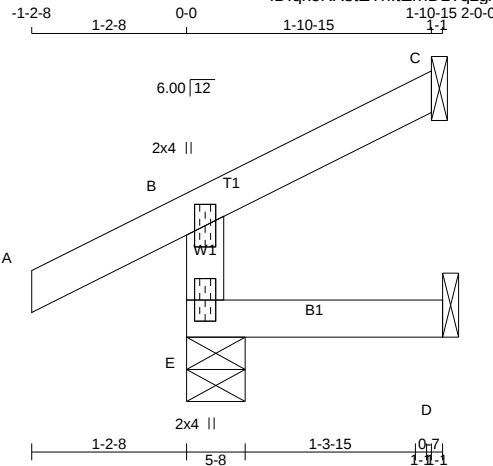

Scale = 1:18.0

TOTAL WEIGHT = 7 lb

**LUMBER**

N. L. G. A. RULES

CHORDS SIZE

E - B 2x4 DRY  
A - C 2x4 DRY  
E - D 2x4 DRY

LUMBER

No.2

No.2

No.2

DESCR.

SPF

SPF

SPF

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE   | PLATES | W   | LEN | Y | X |
|----|--------|--------|-----|-----|---|---|
| B  | TMV+p  | MT20   | 2.0 | 4.0 |   |   |
| E  | BMV1+p | MT20   | 2.0 | 4.0 |   |   |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY****BUILDING DESIGNER****BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQRD BRG |
|----|-------------------------|---------------------------------|-----------|-----------|
| JT | VERT                    | HORZ                            | DOWN      | UP/LIFT   |
| E  | 228                     | 0                               | 228       | 0         |
| C  | 61                      | 0                               | 61        | 0         |
| D  | 16                      | 0                               | 18        | 0         |

SEE MITEK STANDARD DETAIL MSD2015-H FOR CONNECTION TO JOINT(S) C, D

**UNFACTORED REACTIONS**

| JT | 1ST LCASE COMBINED | SNOW    | LIVE  | PERM.LIVE | WIND  | DEAD   | SOIL  |
|----|--------------------|---------|-------|-----------|-------|--------|-------|
| E  | 157                | 126 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 31 / 0 | 0 / 0 |
| C  | 41                 | 37 / 0  | 0 / 0 | 0 / 0     | 0 / 0 | 4 / 0  | 0 / 0 |
| D  | 13                 | 0 / 0   | 0 / 0 | 0 / 0     | 0 / 0 | 13 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E, C

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.

MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (5)

| C H O R D S |                           |                           |              | W E B S              |       |                           |              |
|-------------|---------------------------|---------------------------|--------------|----------------------|-------|---------------------------|--------------|
| MEMB.       | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX LC1 (LC) | MAX. UNBRACED LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX LC1 (LC) |
| FR-TO       |                           | FROM                      | TO           |                      | FR-TO |                           |              |
| E-B         | -207 / 0                  | 0.0                       | 0.0          | 0.01 (4)             | 7.81  |                           |              |
| A-B         | 0 / 24                    | -84.3                     | -84.3        | 0.10 (1)             | 10.00 |                           |              |
| B-C         | -9 / 0                    | -84.3                     | -84.3        | 0.05 (1)             | 10.00 |                           |              |
| E-D         | 0 / 0                     | -18.2                     | -18.2        | 0.02 (4)             | 10.00 |                           |              |

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

PATTERN-LOADING CHECK APPLIED TO THIS TRUSS.

**DESIGN CRITERIA****SPECIFIED LOADS:**

TOP CH. LL = 25.6 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.3 PSF  
TOTAL LOAD = 35.9 PSF

**SPACING = 24.0 IN. C/C**

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, NBC-2019AE  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 086-14  
- TPIC 2014

**DESIGN ASSUMPTIONS**

-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")  
ALLOWABLE DEFL.(TL)= L/360 (0.19")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.00")

CSI: TC=0.10/1.00 (A-B:1), BC=0.02/1.00 (D-E:4),  
WB=0.00/1.00 (n/a:0), SSI=0.07/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**

| PLATE | GRIP(DRY) (PSI) | SHEAR (PLI) | SECTION (PLI) |
|-------|-----------------|-------------|---------------|
|       | MAX MIN         | MAX MIN     | MAX MIN       |
| MT20  | 650 371         | 1747 788    | 1987 1873     |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.12 (B) (INPUT = 0.90 )  
JSI METAL= 0.09 (B) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION05/24/2023  
KOTT


RECEIVED

Per: joshua.nabua

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | J09        | 5        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:45 2023 Page 1

ID:qkoKX8tEtHtErnD1?oqgxzYQay-VCMzKI?i3TA9gAkBGMJKLJSHXK2PoJE8wpbaDvzOUJm

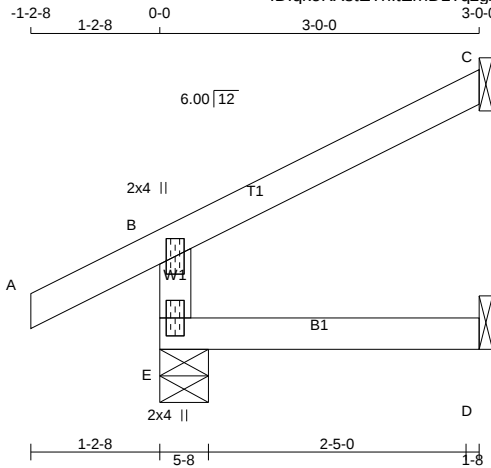

Scale = 1:21.6

TOTAL WEIGHT = 5 X 10 = 48 lb

**LUMBER**

N. L. G. A. RULES

CHORDS SIZE

E - B 2x4 DRY  
A - C 2x4 DRY  
E - D 2x4 DRY

LUMBER

No.2

No.2

No.2

DESCR.

SPF

SPF

SPF

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE   | PLATES | W   | LEN | Y | X |
|----|--------|--------|-----|-----|---|---|
| B  | TMV+p  | MT20   | 2.0 | 4.0 |   |   |
| E  | BMV1+p | MT20   | 2.0 | 4.0 |   |   |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY****BUILDING DESIGNER****BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQRD BRG |
|----|-------------------------|---------------------------------|-----------|-----------|
| JT | VERT                    | HORZ                            | DOWN      | HORZ      |
| E  | 296                     | 0                               | 296       | 0         |
| C  | 95                      | 0                               | 95        | 0         |
| D  | 24                      | 0                               | 26        | 0         |

SEE MITEK STANDARD DETAIL MSD2015-H FOR CONNECTION TO JOINT(S) C, D

**UNFACTORED REACTIONS**

| JT | 1ST LCASE | SNOW    | LIVE  | PERM.LIVE | WIND  | DEAD   | SOIL  |
|----|-----------|---------|-------|-----------|-------|--------|-------|
| E  | 205       | 161 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 44 / 0 | 0 / 0 |
| C  | 64        | 58 / 0  | 0 / 0 | 0 / 0     | 0 / 0 | 7 / 0  | 0 / 0 |
| D  | 19        | 0 / 0   | 0 / 0 | 0 / 0     | 0 / 0 | 19 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (7)

| MEMB. | MAX. FACTORED FORCE (LBS) | VERT. LOAD (PLF) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) |
|-------|---------------------------|------------------|---------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| FR-TO |                           |                  |                           |                                |                                |                                |                                |
| E-B   | -265 / 0                  | 0.0              | 0.0                       | 0.03 (4)                       | 7.81                           |                                |                                |
| A-B   | 0 / 24                    | -84.3            | -84.3                     | 0.10 (5)                       | 10.00                          |                                |                                |
| B-C   | -14 / 0                   | -84.3            | -84.3                     | 0.13 (6)                       | 6.25                           |                                |                                |
| E-D   | 0 / 0                     | -18.2            | -18.2                     | 0.04 (4)                       | 10.00                          |                                |                                |

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

PATTERN-LOADING CHECK APPLIED TO THIS TRUSS.

**DESIGN CRITERIA****SPECIFIED LOADS:**

TOP CH. LL = 25.6 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.3 PSF  
TOTAL LOAD = 35.9 PSF

**SPACING = 24.0 IN. C/C**

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

**THIS DESIGN COMPLIES WITH:**

- PART 9 OF BCBC 2018, NBC-2019AE  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 086-14  
- TPIC 2014

**DESIGN ASSUMPTIONS**

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")  
ALLOWABLE DEFL.(TL)= L/360 (0.19")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.00")

CSI: TC=0.13/1.00 (B-C:6), BC=0.04/1.00 (D-E:4), WB=0.00/1.00 (n/a:0), SSI=0.11/1.00 (B-C:6)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**

| PLATE | GRIP(DRY) (PSI) | SHEAR (PLI) | SECTION (PLI) |
|-------|-----------------|-------------|---------------|
| MT20  | 650             | 371         | 1747          |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.15 (B) (INPUT = 0.90)  
JSI METAL= 0.11 (B) (INPUT = 1.00)



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION


05/24/2023  
KOTT

RECEIVED

Per: joshua.nabua

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | J10        | 7        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:46 2023 Page 1  
ID:qkoKX8tEThlErnD1?zqgzYQay-zOwLYd0Vqnl0HKJoq3qZIW\_TDKN4XmUI9TK7ILzOUJl

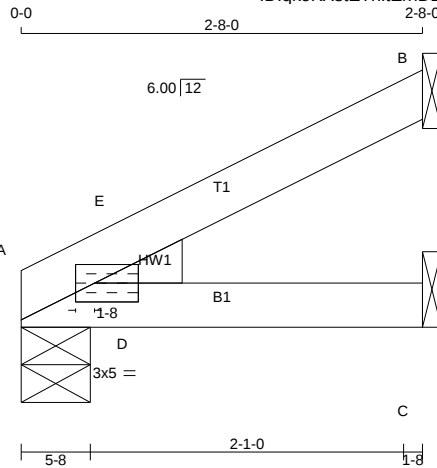

Scale = 1:15.3

TOTAL WEIGHT = 7 X 7 = 51 lb

**LUMBER**

N. L. G. A. RULES

CHORDS SIZE

A - B 2x4 DRY

LUMBER

No.2

DESCR.

SPF

A - C 2x4 DRY

No.2

SPF

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| A  | TMBH1-I | MT20   | 3.0 | 5.0 | 1.50 | 1.50 |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER****BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG | HEEL WEDGE |
|----|-------------------------|---------------------------------|-----------|----------|------------|
| JT | VERT                    | HORZ                            | DOWN      | HORZ     | UPLIFT     |
| B  | 92                      | 0                               | 92        | 0        | 0          |
| C  | 45                      | 0                               | 45        | 0        | 0          |
| A  | 137                     | 0                               | 137       | 0        | 0          |

SEE MITEK STANDARD DETAIL MSD2015-H FOR CONNECTION TO JOINT(S) B, C

**UNFACTORED REACTIONS**

| JT | 1ST LCASE COMBINED | SNOW   | LIVE  | PERM.LIVE | WIND  | DEAD   | SOIL  |
|----|--------------------|--------|-------|-----------|-------|--------|-------|
| B  | 63                 | 53 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 10 / 0 | 0 / 0 |
| C  | 33                 | 16 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 17 / 0 | 0 / 0 |
| A  | 96                 | 68 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 27 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| MEMB. | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) | MAX. FACTORED VERT. LOAD (PLF) |
|-------|---------------------------|---------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| FR-TO |                           |                           |                                |                                |                                |                                |                                |
| A-E   | -15 / 0                   | -84.3                     | -84.3                          | 0.03 (1)                       | 6.25                           | D-E                            | -69 / 10                       |
| E-B   | 0 / 6                     | -84.3                     | -84.3                          | 0.07 (1)                       | 10.00                          |                                |                                |
| A-D   | 0 / 0                     | -18.2                     | -18.2                          | 0.07 (1)                       | 10.00                          |                                |                                |
| D-C   | 0 / 0                     | -18.2                     | -18.2                          | 0.07 (1)                       | 10.00                          |                                |                                |

**DESIGN CRITERIA****SPECIFIED LOADS:**

TOP CH. LL = 25.6 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.3 PSF  
TOTAL LOAD = 35.9 PSF

**SPACING = 24.0 IN. C/C**

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

**THIS DESIGN COMPLIES WITH:**

- PART 9 OF BCBC 2018, NBC-2019AE  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 086-14  
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")  
ALLOWABLE DEFL.(TL)= L/360 (0.19")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.01")

CSI: TC=0.07/1.00 (B-E:1), BC=0.07/1.00 (A-D:1), WB=0.00/1.00 (D-E:1), SSI=0.06/1.00 (B-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

**NAIL VALUES**

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
| (PSI) | (PLI)     | (PLI) | (PLI)   |
| MT20  | 650       | 371   | 1747    |
|       | 788       | 1987  | 1873    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.07 (A) (INPUT = 0.90 )  
JSI METAL= 0.01 (A) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.


CITY OF RICHMOND HILL  
BUILDING DIVISION

05/24/2023  
KOTT

RECEIVED

Per: joshua.nabua

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:46 2023 Page 1




TOTAL WEIGHT = 4 X 9 = 34 lb

## Per: joshua.nabua

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | J12        | 15       | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:47 2023 Page 1

ID:qkoKX8tEThlErnD1?zqgzYQay-RbUj1z17b5QtvUu\_OnLoQkXeX8kAGDkRO74glnzOUJk

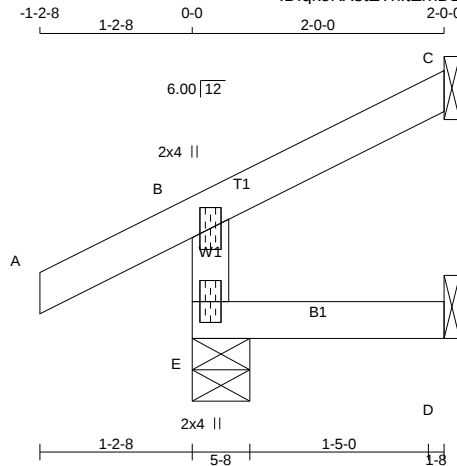

Scale = 1:18.3

TOTAL WEIGHT = 15 X 7 = 109 lb

**LUMBER**

| N. L. G. A. RULES | CHORDS | SIZE | LUMBER | DESCR. |
|-------------------|--------|------|--------|--------|
| E - B             | 2x4    | DRY  | No.2   | SPF    |
| A - C             | 2x4    | DRY  | No.2   | SPF    |
| E - D             | 2x4    | DRY  | No.2   | SPF    |

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE   | PLATES | W   | LEN | Y | X |
|----|--------|--------|-----|-----|---|---|
| B  | TMV+p  | MT20   | 2.0 | 4.0 |   |   |
| E  | BMV1+p | MT20   | 2.0 | 4.0 |   |   |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER****BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | HORZ                            | DOWN      | UPLIFT   |
| E  | 232                     | 0                               | 232       | 0        |
| C  | 64                      | 0                               | 64        | 0        |
| D  | 16                      | 0                               | 18        | 0        |

SEE MITEK STANDARD DETAIL MSD2015-H FOR CONNECTION TO JOINT(S) C, D

**UNFACTORED REACTIONS**

| JT | 1ST LCASE COMBINED | SNOW    | LIVE  | PERM.LIVE | WIND  | DEAD   | SOIL  |
|----|--------------------|---------|-------|-----------|-------|--------|-------|
| E  | 160                | 129 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 31 / 0 | 0 / 0 |
| C  | 43                 | 39 / 0  | 0 / 0 | 0 / 0     | 0 / 0 | 5 / 0  | 0 / 0 |
| D  | 13                 | 0 / 0   | 0 / 0 | 0 / 0     | 0 / 0 | 13 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.  
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (5)

| C H O R D S |                           |                           |             | W E B S              |       |                           |                      |
|-------------|---------------------------|---------------------------|-------------|----------------------|-------|---------------------------|----------------------|
| MEMB.       | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX LC1 MAX | MAX. UNBRACED LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. UNBRACED LENGTH |
| FR-TO       |                           | FROM TO                   |             |                      | FR-TO |                           |                      |
| E-B         | -212 / 0                  | 0.0                       | 0.0         | 0.01 (4)             | 7.81  |                           |                      |
| A-B         | 0 / 24                    | -84.3                     | -84.3       | 0.10 (1)             | 10.00 |                           |                      |
| B-C         | -9 / 0                    | -84.3                     | -84.3       | 0.06 (1)             | 10.00 |                           |                      |
| E-D         | 0 / 0                     | -18.2                     | -18.2       | 0.02 (4)             | 10.00 |                           |                      |

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

PATTERN-LOADING CHECK APPLIED TO THIS TRUSS.

**DESIGN CRITERIA****SPECIFIED LOADS:**

|            |    |      |      |     |
|------------|----|------|------|-----|
| TOP CH.    | LL | =    | 25.6 | PSF |
|            | DL | =    | 3.0  | PSF |
| BOT CH.    | LL | =    | 0.0  | PSF |
|            | DL | =    | 7.3  | PSF |
| TOTAL LOAD | =  | 35.9 | PSF  |     |

**SPACING = 24.0 IN. C/C**

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

**THIS DESIGN COMPLIES WITH:**

- PART 9 OF BCBC 2018, NBC-2019AE
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

**DESIGN ASSUMPTIONS**

-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")  
 CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")  
 ALLOWABLE DEFL.(TL)= L/360 (0.19")  
 CALCULATED VERT. DEFL.(TL) = L/ 999 (0.00")

CSI: TC=0.10/1.00 (A-B:1), BC=0.02/1.00 (D-E:4),  
 WB=0.00/1.00 (n/a:0), SSI=0.07/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

**NAIL VALUES**

| PLATE | GRIP(DRY) (PSI) | SHEAR (PLI) | SECTION (PLI) |
|-------|-----------------|-------------|---------------|
|       | MAX MIN         | MAX MIN     | MAX MIN       |
| MT20  | 650 371         | 1747 788    | 1987 1873     |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.12 (B) (INPUT = 0.90 )  
 JSI METAL= 0.09 (B) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
 BUILDING DIVISION


05/24/2023  
 RECEIVED

Per: joshua.nabua

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | J13        | 2        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:47 2023 Page 1

ID:qkoKX8tEThltErnD1?zqgzxYQay-RbUjzlz17b5QtvUu\_OnLoQkXeX8k1GDkRO74glnzOUJk

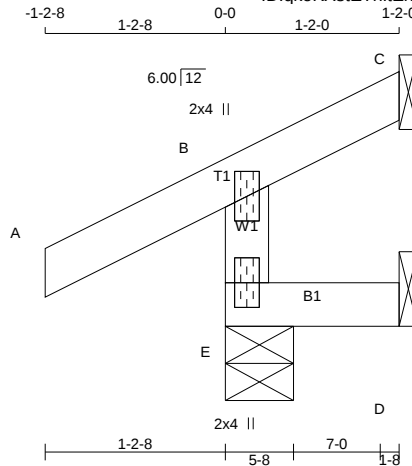

Scale = 1:15.5

TOTAL WEIGHT = 2 X 5 = 11 lb

**LUMBER**

N. L. G. A. RULES

CHORDS SIZE

E - B 2x4 DRY

A - C 2x4 DRY

E - D 2x4 DRY

LUMBER

No.2

No.2

No.2

DESCR.

SPF

SPF

SPF

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE   | PLATES | W   | LEN | Y | X |
|----|--------|--------|-----|-----|---|---|
| B  | TMV+p  | MT20   | 2.0 | 4.0 |   |   |
| E  | BMV1+p | MT20   | 2.0 | 4.0 |   |   |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER****BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | HORZ                            | DOWN      | HORZ     |
| E  | 226                     | 0                               | 226       | 0        |
| C  | 4                       | 0                               | 4         | 0        |
| D  | -3                      | 0                               | 10        | 0        |

SEE MITEK STANDARD DETAIL MSD2015-H FOR CONNECTION TO JOINT(S) C, D

PROVIDE ANCHORAGE AT BEARING JOINT C FOR 150 LBS FACTORED UPLIFT  
 PROVIDE ANCHORAGE AT BEARING JOINT D FOR 150 LBS FACTORED UPLIFT

**UNFACTORED REACTIONS**

| JT | 1ST LCASE COMBINED | MAX./MIN. SNOW | MAX./MIN. LIVE | PERM. LIVE | WIND  | DEAD   | SOIL  |
|----|--------------------|----------------|----------------|------------|-------|--------|-------|
| E  | 154                | 131 / 0        | 0 / 0          | 0 / 0      | 0 / 0 | 24 / 0 | 0 / 0 |
| C  | 3                  | 2 / -26        | 0 / 0          | 0 / 0      | 0 / 0 | 1 / 0  | 0 / 0 |
| D  | -1                 | 0 / -10        | 0 / 0          | 0 / 0      | 0 / 0 | 7 / 0  | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (5)

| CHORDS |                           |                           |                        | WEBS     |                           |                        |  |
|--------|---------------------------|---------------------------|------------------------|----------|---------------------------|------------------------|--|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED CSI (LC) | MEMB.    | MAX. FACTORED FORCE (LBS) | MAX. FACTORED CSI (LC) |  |
| FR-TO  |                           | FROM TO                   |                        | FR-TO    |                           |                        |  |
| E-B    | -202 / 0                  | 0.0                       | 0.03 (5)               | 7.81     |                           |                        |  |
| A-B    | 0 / 24                    | -84.3                     | -84.3                  | 0.10 (1) | 10.00                     |                        |  |
| B-C    | -20 / 0                   | -84.3                     | -84.3                  | 0.07 (1) | 6.25                      |                        |  |
| E-D    | 0 / 0                     | -18.2                     | -18.2                  | 0.03 (5) | 10.00                     |                        |  |

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

PATTERN-LOADING CHECK APPLIED TO THIS TRUSS.

**DESIGN CRITERIA**

SPECIFIED LOADS:

|            |    |      |      |     |
|------------|----|------|------|-----|
| TOP CH.    | LL | =    | 25.6 | PSF |
|            | DL | =    | 3.0  | PSF |
| BOT CH.    | LL | =    | 0.0  | PSF |
|            | DL | =    | 7.3  | PSF |
| TOTAL LOAD | =  | 35.9 | PSF  |     |

**SPACING = 24.0 IN. C/C**

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, NBC-2019AE
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")  
 CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")  
 ALLOWABLE DEFL.(TL)= L/360 (0.19")  
 CALCULATED VERT. DEFL.(TL) = L/ 999 (0.00")

CSI: TC=0.10/1.00 (A-B:1), BC=0.03/1.00 (D-E:5),  
 WB=0.00/1.00 (n/a:0), SSI=0.07/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

| PLATE | GRIP(DRY) (PSI) | SHEAR (PLI) | SECTION (PLI) |
|-------|-----------------|-------------|---------------|
|       | MAX MIN         | MAX MIN     | MAX MIN       |
| MT20  | 650 371         | 1747 788    | 1987 1873     |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.11 (B) (INPUT = 0.90 )  
 JSI METAL= 0.08 (B) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.


CITY OF RICHMOND HILL  
 BUILDING DIVISION

05/24/2023  
 RECEIVED

Per: joshua.nabua

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | T01A       | 5        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:48 2023 Page 1  
ID:qkoX8tEtHtEmD1?zqgxYQay-vn26zJ1mLOYjXeTAxUs1yx4fkX\_3?a6adnpEqEzOUJj

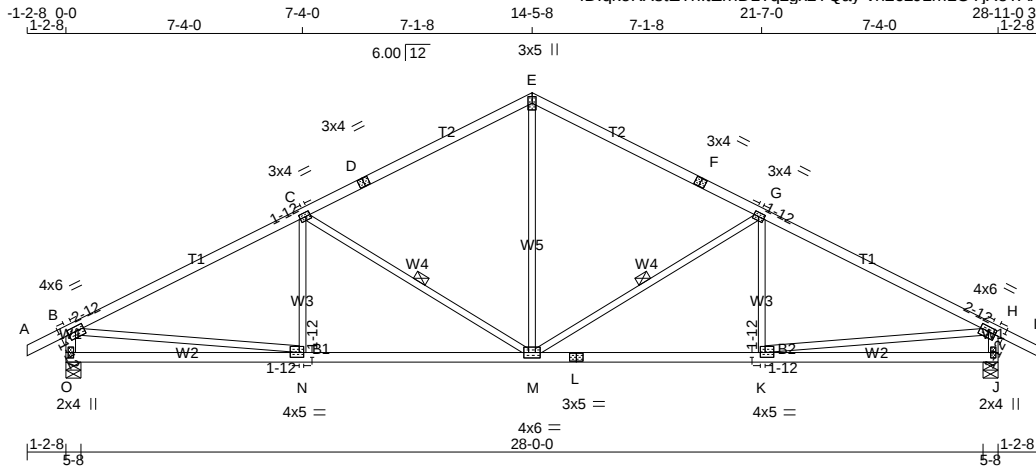**LUMBER**

N. L. G. A. RULES

| CHORDS | SIZE    | LUMBER | DESCR. |
|--------|---------|--------|--------|
| A - D  | 2x4 DRY | No.2   | SPF    |
| D - E  | 2x4 DRY | No.2   | SPF    |
| E - F  | 2x4 DRY | No.2   | SPF    |
| F - I  | 2x4 DRY | No.2   | SPF    |
| O - B  | 2x4 DRY | No.2   | SPF    |
| J - H  | 2x4 DRY | No.2   | SPF    |
| O - L  | 2x4 DRY | No.2   | SPF    |
| L - J  | 2x4 DRY | No.2   | SPF    |

|          |         |      |     |
|----------|---------|------|-----|
| ALL WEBS | 2x3 DRY | No.2 | SPF |
| EXCEPT   |         |      |     |

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMVW-t | MT20   | 4.0 | 6.0 | 1.75 | 2.75 |
| C  | TMWW-t | MT20   | 3.0 | 4.0 | 1.50 | 1.75 |
| D  | TS-t   | MT20   | 3.0 | 4.0 |      |      |
| E  | TTW+p  | MT20   | 3.0 | 5.0 |      |      |
| F  | TS-t   | MT20   | 3.0 | 4.0 |      |      |
| G  | TMWW-t | MT20   | 3.0 | 4.0 | 1.50 | 1.75 |
| H  | TMVW-t | MT20   | 4.0 | 6.0 | 1.75 | 2.75 |
| J  | BMV1+p | MT20   | 2.0 | 4.0 |      |      |
| K  | BMWW-t | MT20   | 4.0 | 5.0 | 1.75 | 1.75 |
| L  | BS-t   | MT20   | 3.0 | 5.0 |      |      |
| M  | BMWW-t | MT20   | 4.0 | 6.0 |      |      |
| N  | BMWW-t | MT20   | 4.0 | 5.0 | 1.75 | 1.75 |
| O  | BMV1+p | MT20   | 2.0 | 4.0 |      |      |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER****BEARINGS**

|    | FACTORED       | MAXIMUM FACTORED | INPUT | REQD |
|----|----------------|------------------|-------|------|
|    | GROSS REACTION | GROSS REACTION   | BRG   | BRG  |
| JT | VERT           | HORZ             | DOWN  | HORZ |
| O  | 1589           | 0                | 1589  | 0    |
| J  | 1589           | 0                | 1589  | 0    |

**UNFACTORED REACTIONS**

| JT | 1ST LCASE | MAX./MIN. | COMPONENT REACTIONS |
|----|-----------|-----------|---------------------|
|    | COMBINED  | SNOW      | LIVE                |
| O  | 1110      | 805 / 0   | 0 / 0               |
| J  | 1110      | 805 / 0   | 0 / 0               |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) O, J

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.82 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 - 1x4 LATERAL BRACE(S) AT 1/2 LENGTH OF G-M, C-M. DBS = 20-0-0. CBF = 89 LBS.

DBS = DIAGONAL BRACE SPACING (MAX). CBF = CUMULATIVE BRACING FORCE (PER BRACE). FASTEN LATERAL BRACE(S) USING (0.122"x3") SPIRAL NAILS: 1 NAIL FOR 2x3 BRACE(S), 2 FOR 1x4, 2x4, 2x5, 3 FOR 2x6, 4 FOR 2x8, 5 FOR 2x10, AND 6 FOR 2x12.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

**LOADING**

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |               | WEBS  |                           |               |          |
|--------|---------------------------|---------------------------|---------------|-------|---------------------------|---------------|----------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. CSI (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CSI (LC) |          |
| FR-TO  |                           | FROM TO                   | LENGTH        | FR-TO |                           |               |          |
| A-B    | 0 / 24                    | -84.3 -84.3               | 0.10 (1)      | 10.00 | M-E                       | 0 / 889       | 0.20 (1) |
| B-C    | -2143 / 0                 | -84.3 -84.3               | 0.73 (1)      | 3.82  | M-G                       | -715 / 0      | 0.35 (1) |
| C-D    | -1532 / 0                 | -84.3 -84.3               | 0.64 (1)      | 4.49  | K-G                       | -72 / 107     | 0.04 (4) |
| D-E    | -1532 / 0                 | -84.3 -84.3               | 0.64 (1)      | 4.49  | C-M                       | -715 / 0      | 0.35 (1) |
| E-F    | -1532 / 0                 | -84.3 -84.3               | 0.64 (1)      | 4.49  | N-C                       | -72 / 107     | 0.04 (4) |
| F-G    | -1532 / 0                 | -84.3 -84.3               | 0.64 (1)      | 4.49  | B-N                       | 0 / 1958      | 0.44 (1) |
| G-H    | -2143 / 0                 | -84.3 -84.3               | 0.73 (1)      | 3.82  | K-H                       | 0 / 1958      | 0.44 (1) |
| H-I    | 0 / 24                    | -84.3 -84.3               | 0.10 (1)      | 10.00 |                           |               |          |
| O-B    | -1533 / 0                 | 0.0 0.0                   | 0.15 (1)      | 6.64  |                           |               |          |
| J-H    | -1533 / 0                 | 0.0 0.0                   | 0.15 (1)      | 6.64  |                           |               |          |
| O-N    | 0 / 0                     | -18.2 -18.2               | 0.23 (4)      | 10.00 |                           |               |          |
| N-M    | 0 / 1946                  | -18.2 -18.2               | 0.42 (1)      | 10.00 |                           |               |          |
| M-L    | 0 / 1946                  | -18.2 -18.2               | 0.42 (1)      | 10.00 |                           |               |          |
| L-K    | 0 / 1946                  | -18.2 -18.2               | 0.42 (1)      | 10.00 |                           |               |          |
| K-J    | 0 / 0                     | -18.2 -18.2               | 0.23 (4)      | 10.00 |                           |               |          |

**DESIGN CRITERIA**

SPECIFIED LOADS:

|                       |               |
|-----------------------|---------------|
| TOP CH.               | LL = 25.6 PSF |
| DL = 3.0 PSF          |               |
| BOT CH.               | LL = 0.0 PSF  |
| DL = 7.3 PSF          |               |
| TOTAL LOAD = 35.9 PSF |               |

**SPACING = 24.0 IN. C/C**

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, NBC-2019AE
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.96")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.10")  
ALLOWABLE DEFL.(TL) = L/360 (0.96")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.19")

CSI: TC=0.73/1.00 (G-H:1), BC=0.42/1.00 (K-M:1)  
WB=0.44/1.00 (H-K:1), SSI=0.27/1.00 (G-H:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**

| PLATE | GRIP(DRY) | SHEAR | SECTION            |
|-------|-----------|-------|--------------------|
| (PSI) | (PLI)     | (PLI) |                    |
| MAX   | MIN       | MAX   | MIN                |
| MT20  | 650       | 371   | 1747 788 1987 1873 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.84 (N) (INPUT = 0.90)  
JSI METAL= 0.55 (H) (INPUT = 1.00)



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.


CITY OF RICHMOND HILL  
BUILDING DIVISION

05/24/2023  
KOTT  
RECEIVED

Per: joshua.nabua

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | T01B       | 2        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:48 2023 Page 1  
ID:qkoKX8tEThlErnD1?gzgxyYQay-vn26zJ1mLOYjXeTAXUs1yx4fQX\_9?adadnpEqEzOUJj

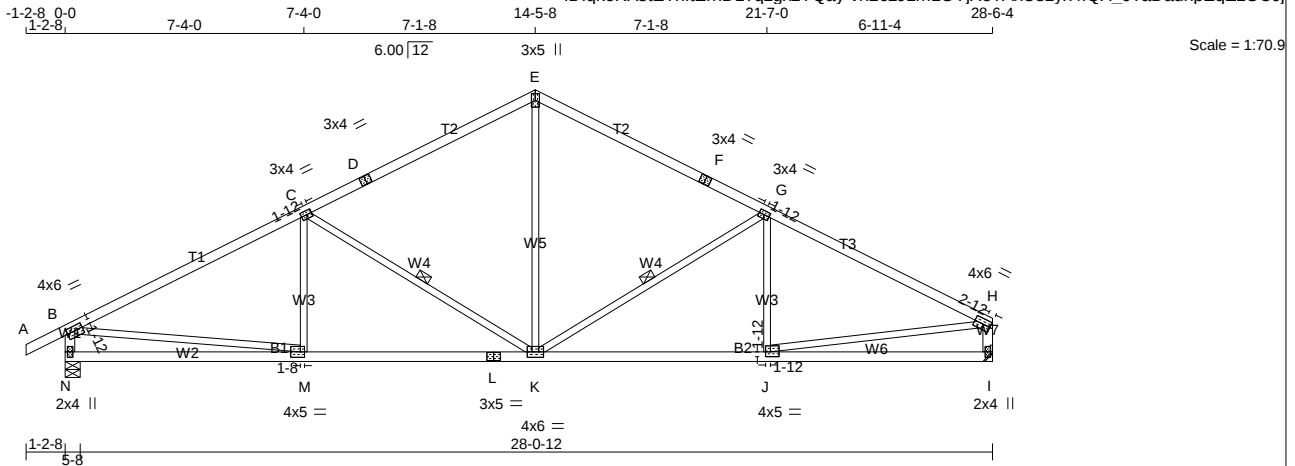

TOTAL WEIGHT = 2 X 110 = 220 lb

**LUMBER**

N. L. G. A. RULES

| CHORDS | SIZE    | LUMBER | DESCR. |
|--------|---------|--------|--------|
| A - D  | 2x4 DRY | No.2   | SPF    |
| D - E  | 2x4 DRY | No.2   | SPF    |
| E - F  | 2x4 DRY | No.2   | SPF    |
| F - H  | 2x4 DRY | No.2   | SPF    |
| N - B  | 2x4 DRY | No.2   | SPF    |
| I - H  | 2x4 DRY | No.2   | SPF    |
| N - L  | 2x4 DRY | No.2   | SPF    |
| L - I  | 2x4 DRY | No.2   | SPF    |

ALL WEBS 2x3 DRY No.2 SPF  
EXCEPT

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMVW-t | MT20   | 4.0 | 6.0 | 1.75 | 3.00 |
| C  | TMVW-t | MT20   | 3.0 | 4.0 | 1.50 | 1.75 |
| D  | TS-t   | MT20   | 3.0 | 4.0 |      |      |
| E  | TTW+p  | MT20   | 3.0 | 5.0 |      |      |
| F  | TS-t   | MT20   | 3.0 | 4.0 |      |      |
| G  | TMVW-t | MT20   | 3.0 | 4.0 | 1.50 | 1.75 |
| H  | TMVW-t | MT20   | 4.0 | 6.0 | 2.00 | 2.75 |
| I  | BMV1+p | MT20   | 2.0 | 4.0 |      |      |
| J  | BMVW-t | MT20   | 4.0 | 5.0 | 1.75 | 1.75 |
| K  | BMVW-t | MT20   | 4.0 | 6.0 |      |      |
| L  | BS-t   | MT20   | 3.0 | 5.0 |      |      |
| M  | BMVW-t | MT20   | 4.0 | 5.0 | 2.00 | 1.50 |
| N  | BMV1+p | MT20   | 2.0 | 4.0 |      |      |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER****BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | HORZ                            | DOWN      | UPLIFT   |
| N  | 1569                    | 0                               | 1569      | 0        |
| I  | 1462                    | 0                               | 1462      | 0        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT I. MINIMUM BEARING LENGTH AT JOINT I = 1-9.

**UNFACTORED REACTIONS**

| JT | 1ST LCASE COMBINED | MAX./MIN. SNOW | MIN. LIVE | PERM. LIVE | WIND  | DEAD    | SOIL  |
|----|--------------------|----------------|-----------|------------|-------|---------|-------|
| N  | 1096               | 795 / 0        | 0 / 0     | 0 / 0      | 0 / 0 | 301 / 0 | 0 / 0 |
| I  | 1023               | 730 / 0        | 0 / 0     | 0 / 0      | 0 / 0 | 294 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.85 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 - 1x4 LATERAL BRACE(S) AT 1/2 LENGTH OF C-K, G-K. DBS = 20-0.0. CBF = 90 LBS.

DBS = DIAGONAL BRACE SPACING (MAX). CBF = CUMULATIVE BRACING FORCE (PER BRACE). FASTEN LATERAL BRACE(S) USING (0.122"x3") SPIRAL NAILS: 1 NAIL FOR 2x3 BRACE(S), 2 FOR 1x4, 2x4, 2x5, 3 FOR 2x6, 4 FOR 2x8, 5 FOR 2x10, AND 6 FOR 2x12.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

**LOADING**

TOTAL LOAD CASES: (4)

| C H O R D S |                           |                           |               | W E B S |                           |               |          |
|-------------|---------------------------|---------------------------|---------------|---------|---------------------------|---------------|----------|
| MEMB.       | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. CSI (LC) | MEMB.   | MAX. FACTORED FORCE (LBS) | MAX. CSI (LC) |          |
| FR-TO       |                           | FROM TO                   | LENGTH FR-TO  |         |                           |               |          |
| A-B         | 0 / 24                    | -84.3 -84.3               | 0.10 (1)      | 10.00   | M-C                       | -69 / 108     | 0.04 (4) |
| B-C         | -2106 / 0                 | -84.3 -84.3               | 0.73 (1)      | 3.85    | C-K                       | -719 / 0      | 0.35 (1) |
| C-D         | -1492 / 0                 | -84.3 -84.3               | 0.63 (1)      | 4.54    | K-E                       | 0 / 849       | 0.19 (1) |
| D-E         | -1492 / 0                 | -84.3 -84.3               | 0.63 (1)      | 4.54    | K-G                       | -633 / 0      | 0.31 (1) |
| E-F         | -1490 / 0                 | -84.3 -84.3               | 0.61 (1)      | 4.59    | J-G                       | -130 / 87     | 0.04 (1) |
| F-G         | -1490 / 0                 | -84.3 -84.3               | 0.61 (1)      | 4.59    | B-M                       | 0 / 1925      | 0.43 (1) |
| G-H         | -2025 / 0                 | -84.3 -84.3               | 0.65 (1)      | 4.02    | J-H                       | 0 / 1860      | 0.42 (1) |
| N-B         | -1513 / 0                 | 0.0                       | 0.0           | 15.1    |                           |               |          |
| I-H         | -1409 / 0                 | 0.0                       | 0.0           | 14.1    |                           |               |          |
| N-M         | 0 / 0                     | -18.2 -18.2               | 0.23 (4)      | 10.00   |                           |               |          |
| M-L         | 0 / 1913                  | -18.2 -18.2               | 0.42 (1)      | 10.00   |                           |               |          |
| L-K         | 0 / 1913                  | -18.2 -18.2               | 0.42 (1)      | 10.00   |                           |               |          |
| K-J         | 0 / 1841                  | -18.2 -18.2               | 0.40 (1)      | 10.00   |                           |               |          |
| J-I         | 0 / 0                     | -18.2 -18.2               | 0.21 (4)      | 10.00   |                           |               |          |

**DESIGN CRITERIA****SPECIFIED LOADS:**

|            |    |      |      |     |
|------------|----|------|------|-----|
| TOP CH.    | LL | =    | 25.6 | PSF |
|            | DL | =    | 3.0  | PSF |
| BOT CH.    | LL | =    | 0.0  | PSF |
|            | DL | =    | 7.3  | PSF |
| TOTAL LOAD | =  | 35.9 | PSF  |     |

**SPACING = 24.0 IN. C/C**

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

**THIS DESIGN COMPLIES WITH:**

- PART 9 OF CBC 2018, NBC-2019AE
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.95")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.10")  
ALLOWABLE DEFL.(TL) = L/360 (0.95")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.18")

CSI: TC=0.73/1.00 (B-C:1), BC=0.42/1.00 (K-M:1)  
WB=0.43/1.00 (B-M:1), SSI=0.27/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**

| PLATE | GRIP(DRY) (PSI) | SHEAR (PLI) | SECTION (PLI) |
|-------|-----------------|-------------|---------------|
| MT20  | 650             | 371         | 1747          |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (M) (INPUT = 0.90)  
JSI METAL= 0.55 (L) (INPUT = 1.00)



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION

05/24/2023  
KOTT


RECEIVED

Per: joshua.nabua

|            |            |          |     |             |          |
|------------|------------|----------|-----|-------------|----------|
| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
| IM0423-072 | T02        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:49 2023 Page 1

ID:qkoKX8tEThltErnD1?zgxyzYQay-OzcUaf2O6iga8n2NVCNGV9cqAxKOK1TkrRZnMgzOUJi

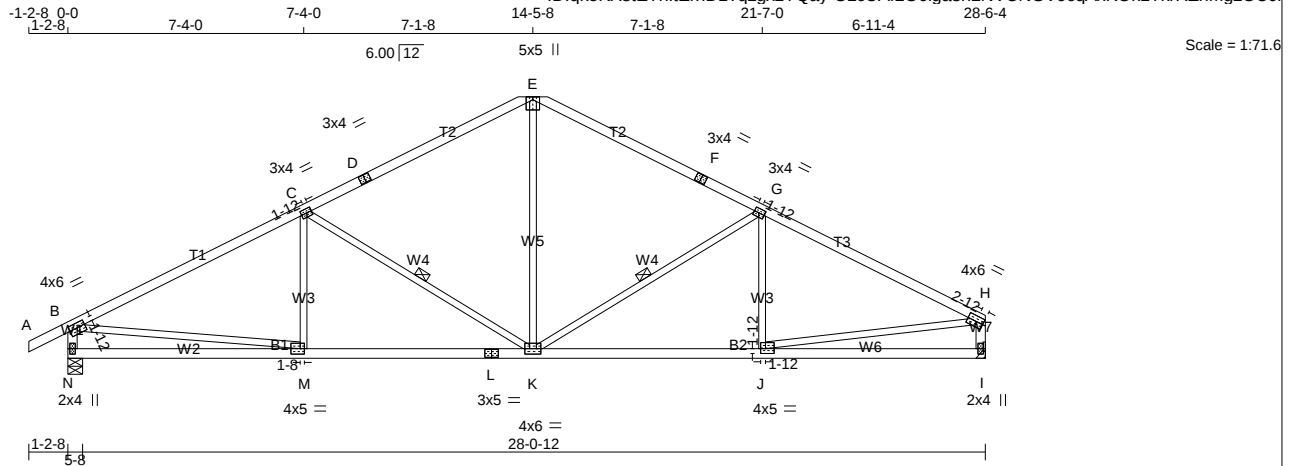**LUMBER**

| N. L. G. A. RULES | CHORDS | SIZE | LUMBER | DESCR. |
|-------------------|--------|------|--------|--------|
| A - D             | 2x4    | DRY  | No.2   | SPF    |
| D - E             | 2x4    | DRY  | No.2   | SPF    |
| E - F             | 2x4    | DRY  | No.2   | SPF    |
| F - H             | 2x4    | DRY  | No.2   | SPF    |
| N - B             | 2x4    | DRY  | No.2   | SPF    |
| I - H             | 2x4    | DRY  | No.2   | SPF    |
| N - L             | 2x4    | DRY  | No.2   | SPF    |
| L - I             | 2x4    | DRY  | No.2   | SPF    |

ALL WEBS 2x3 DRY No.2 SPF

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| B  | TMVW-t  | MT20   | 4.0 | 6.0 | 1.75 | 3.00 |
| C  | TMVW-t  | MT20   | 3.0 | 4.0 | 1.50 | 1.75 |
| D  | TS-t    | MT20   | 3.0 | 4.0 |      |      |
| E  | TMTMW+p | MT20   | 5.0 | 5.0 | Edge |      |
| F  | TS-t    | MT20   | 3.0 | 4.0 |      |      |
| G  | TMVW-t  | MT20   | 3.0 | 4.0 | 1.50 | 1.75 |
| H  | TMVW-t  | MT20   | 4.0 | 6.0 | 2.00 | 2.75 |
| I  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |
| J  | BMVW-t  | MT20   | 4.0 | 5.0 | 1.75 | 1.75 |
| K  | BMVW-t  | MT20   | 4.0 | 6.0 |      |      |
| L  | BS-t    | MT20   | 3.0 | 5.0 |      |      |
| M  | BMVW-t  | MT20   | 4.0 | 5.0 | 2.00 | 1.50 |
| N  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER****BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | HORZ                            | DOWN      | UPLIFT   |
| N  | 1569                    | 0                               | 1569      | 0        |
| I  | 1462                    | 0                               | 1462      | 0        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT I. MINIMUM BEARING LENGTH AT JOINT I = 1-9.

**UNFACTORED REACTIONS**

| JT | 1ST LCASE COMBINED | MAX./MIN. SNOW | MIN. LIVE | PERM. LIVE | WIND  | DEAD    | SOIL  |
|----|--------------------|----------------|-----------|------------|-------|---------|-------|
| N  | 1096               | 795 / 0        | 0 / 0     | 0 / 0      | 0 / 0 | 301 / 0 | 0 / 0 |
| I  | 1023               | 730 / 0        | 0 / 0     | 0 / 0      | 0 / 0 | 294 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.85 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 - 1x4 LATERAL BRACE(S) AT 1/2 LENGTH OF C-K, G-K. DBS = 20-0.0. CBF = 90 LBS.

DBS = DIAGONAL BRACE SPACING (MAX). CBF = CUMULATIVE BRACING FORCE (PER BRACE). FASTEN LATERAL BRACE(S) USING (0.122"x3") SPIRAL NAILS: 1 NAIL FOR 2x3 BRACE(S), 2 FOR 1x4, 2x4, 2x5, 3 FOR 2x6, 4 FOR 2x8, 5 FOR 2x10, AND 6 FOR 2x12.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

**LOADING**

TOTAL LOAD CASES: (4)

| C H O R D S |                           |                           |                           | W E B S |                           |                           |          |
|-------------|---------------------------|---------------------------|---------------------------|---------|---------------------------|---------------------------|----------|
| MEMB.       | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. UNBRACED LENGTH (LC) | MEMB.   | MAX. FACTORED FORCE (LBS) | MAX. UNBRACED LENGTH (LC) |          |
| FR-TO       |                           | FROM                      | TO                        | FR-TO   |                           |                           |          |
| A-B         | 0 / 24                    | -84.3                     | -84.3 0.10 (1)            | 10.00   | M-C                       | -69 / 108                 | 0.04 (4) |
| B-C         | -2106 / 0                 | -84.3                     | -84.3 0.73 (1)            | 3.85    | C-K                       | -719 / 0                  | 0.35 (1) |
| C-D         | -1492 / 0                 | -84.3                     | -84.3 0.63 (1)            | 4.54    | K-E                       | 0 / 849                   | 0.19 (1) |
| D-E         | -1492 / 0                 | -84.3                     | -84.3 0.63 (1)            | 4.54    | K-G                       | -633 / 0                  | 0.31 (1) |
| E-F         | -1490 / 0                 | -84.3                     | -84.3 0.61 (1)            | 4.59    | J-G                       | -130 / 87                 | 0.04 (1) |
| F-G         | -1490 / 0                 | -84.3                     | -84.3 0.61 (1)            | 4.59    | B-M                       | 0 / 1925                  | 0.43 (1) |
| G-H         | -2025 / 0                 | -84.3                     | -84.3 0.65 (1)            | 4.02    | J-H                       | 0 / 1860                  | 0.42 (1) |
| N-B         | -1513 / 0                 | 0.0                       | 0.0 0.15 (1)              | 6.68    |                           |                           |          |
| I-H         | -1409 / 0                 | 0.0                       | 0.0 0.14 (1)              | 6.87    |                           |                           |          |
| N-M         | 0 / 0                     | -18.2                     | -18.2 0.23 (4)            | 10.00   |                           |                           |          |
| M-L         | 0 / 1913                  | -18.2                     | -18.2 0.42 (1)            | 10.00   |                           |                           |          |
| L-K         | 0 / 1913                  | -18.2                     | -18.2 0.42 (1)            | 10.00   |                           |                           |          |
| K-J         | 0 / 1841                  | -18.2                     | -18.2 0.40 (1)            | 10.00   |                           |                           |          |
| J-I         | 0 / 0                     | -18.2                     | -18.2 0.21 (4)            | 10.00   |                           |                           |          |

**DESIGN CRITERIA****SPECIFIED LOADS:**

|            |    |      |      |     |
|------------|----|------|------|-----|
| TOP CH.    | LL | =    | 25.6 | PSF |
|            | DL | =    | 3.0  | PSF |
| BOT CH.    | LL | =    | 0.0  | PSF |
|            | DL | =    | 7.3  | PSF |
| TOTAL LOAD | =  | 35.9 | PSF  |     |

**SPACING = 24.0 IN. C/C**

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

**THIS DESIGN COMPLIES WITH:**

- PART 9 OF BCBC 2018, NBC-2019AE
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.95")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.10")  
ALLOWABLE DEFL.(TL) = L/360 (0.95")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.18")CSI: TC=0.73/1.00 (B-C:1), BC=0.42/1.00 (K-M:1)  
WB=0.43/1.00 (B-M:1), SSI=0.27/1.00 (B-C:1)DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**

| PLATE | GRIP(DRY) (PSI) | SHEAR (PLI) | SECTION (PLI) |
|-------|-----------------|-------------|---------------|
| MT20  | 650             | 371         | 1747          |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (M) (INPUT = 0.90)  
JSI METAL= 0.55 (L) (INPUT = 1.00)

APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.


CITY OF RICHMOND HILL  
BUILDING DIVISION05/24/2023  
KOTT

RECEIVED

Per: joshua.nabua

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | T03        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:50 2023 Page 1  
ID:qkoKX8TEhltErnD1?zqgzxYQay-sAAsN?30t0oRmxcZ3wV2M92KLftTP7t45lLu6zOUJh

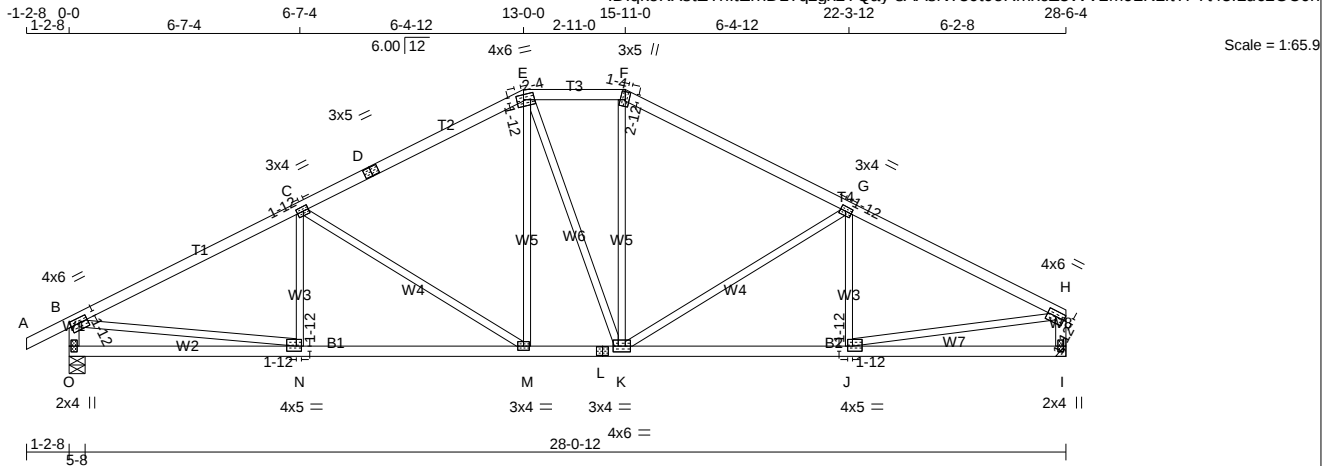

TOTAL WEIGHT = 118 lb

| LUMBER             |     |      |        |        |
|--------------------|-----|------|--------|--------|
| N. L. G. A. RULES  |     |      |        |        |
| CHORDS             |     | SIZE | LUMBER | DESCR. |
| A - D              | 2x4 | DRY  | No.2   | SPF    |
| D - E              | 2x4 | DRY  | No.2   | SPF    |
| E - F              | 2x4 | DRY  | No.2   | SPF    |
| F - H              | 2x4 | DRY  | No.2   | SPF    |
| O - B              | 2x4 | DRY  | No.2   | SPF    |
| I - H              | 2x4 | DRY  | No.2   | SPF    |
| O - L              | 2x4 | DRY  | No.2   | SPF    |
| L - I              | 2x4 | DRY  | No.2   | SPF    |
| ALL WEBS<br>EXCEPT | 2x3 | DRY  | No.2   | SPF    |

DRY: SEASONED LUMBER.

| PLATES (table is in inches) |          |        |     |     |      |      |
|-----------------------------|----------|--------|-----|-----|------|------|
| JT                          | TYPE     | PLATES | W   | LEN | Y    | X    |
| B                           | BMVW-t   | MT20   | 4.0 | 6.0 | 1.75 | 3.00 |
| C                           | TMVW-t   | MT20   | 3.0 | 4.0 | 1.50 | 1.75 |
| D                           | TS-t     | MT20   | 3.0 | 5.0 |      |      |
| E                           | TTWV-m   | MT20   | 4.0 | 6.0 | 1.75 | 2.25 |
| F                           | FTW+m    | MT20   | 3.0 | 5.0 | 2.75 | 1.25 |
| G                           | TMVW-t   | MT20   | 3.0 | 4.0 | 1.50 | 1.75 |
| H                           | TMVW-t   | MT20   | 4.0 | 6.0 | 1.75 | Edge |
| I                           | BMV1+p   | MT20   | 2.0 | 4.0 |      |      |
| J                           | BMVW-t   | MT20   | 4.0 | 5.0 | 1.75 | 1.75 |
| K                           | BMVWVW-t | MT20   | 4.0 | 6.0 |      |      |
| L                           | BS-t     | MT20   | 3.0 | 4.0 |      |      |
| M                           | BMVWVW-t | MT20   | 3.0 | 4.0 |      |      |
| N                           | BMVW-t   | MT20   | 4.0 | 5.0 | 1.75 | 1.75 |
| O                           | BMV1+p   | MT20   | 2.0 | 4.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE  
TOUCHES EDGE OF CHORD.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

## BEARINGS

| JT | FACTORED<br>GROSS REACTION |      | MAXIMUM FACTORED<br>GROSS REACTION |      |        | INPUT<br>BRG | REQ'D<br>BRG |
|----|----------------------------|------|------------------------------------|------|--------|--------------|--------------|
|    | VERT                       | HORZ | DOWN                               | HORZ | UPLIFT | IN-SX        | IN-SX        |
| O  | 1569                       | 0    | 1569                               | 0    | 0      | 5-8          | 1-11         |
| I  | 1462                       | 0    | 1462                               | 0    | 0      | MECHANICAL   |              |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT I. MINIMUM BEARING LENGTH AT JOINT I = 1-9.

### UNFACTORED REACTIONS

| 1ST LCASE |          | MAX./MIN. COMPONENT REACTIONS |       |           |       |         |       |
|-----------|----------|-------------------------------|-------|-----------|-------|---------|-------|
| JT        | COMBINED | SNOW                          | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
| O         | 1096     | 795 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 301 / 0 | 0 / 0 |
| I         | 1023     | 730 / 0                       | 0 / 0 | 0 / 0     | 0 / 0 | 294 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) O

## BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.08 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY  
APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

## LOADING

TOTAL LOAD CASES: (4)

| C H O R D S   |             |                  |               | W E B S       |       |             |               |          |
|---------------|-------------|------------------|---------------|---------------|-------|-------------|---------------|----------|
| MAX. FACTORED |             | FACTORED         |               | MAX. FACTORED |       |             |               |          |
| MEMB.         | FORCE (LBS) | VERT. LOAD (PLF) | LC1 MAX. (LC) | UNBRAC        | MEMB. | FORCE (LBS) | MAX. CSI (LC) |          |
| FR-TO         |             | FROM TO          |               | LENGTH        | FR-TO |             |               |          |
| A-B           | 0 / 24      | -84.3            | -84.3         | 0.10 (1)      | 10.00 | N-C         | -103 / 90     | 0.03 (4) |
| B-C           | -2119 / 0   | -84.3            | -84.3         | 0.57 (1)      | 4.08  | C-M         | -604 / 0      | 0.73 (1) |
| C-D           | -1608 / 0   | -84.3            | -84.3         | 0.51 (1)      | 4.63  | M-E         | 0 / 398       | 0.09 (1) |
| D-E           | -1608 / 0   | -84.3            | -84.3         | 0.51 (1)      | 4.63  | E-K         | -17 / 0       | 0.02 (1) |
| E-F           | -1411 / 0   | -84.3            | -84.3         | 0.11 (1)      | 5.39  | K-F         | 0 / 375       | 0.08 (1) |
| F-G           | -1600 / 0   | -84.3            | -84.3         | 0.49 (1)      | 4.67  | G-K         | -509 / 0      | 0.61 (1) |
| G-H           | -2023 / 0   | -84.3            | -84.3         | 0.51 (1)      | 4.23  | J-G         | -172 / 66     | 0.05 (1) |
| O-B           | -1519 / 0   | 0.0              | 0.0           | 0.15 (1)      | 6.67  | B-N         | 0 / 1936      | 0.44 (1) |
| I-H           | -1415 / 0   | 0.0              | 0.0           | 0.14 (1)      | 6.85  | J-H         | 0 / 1860      | 0.42 (1) |
| O-N           | 0 / 0       | -18.2            | -18.2         | 0.20 (4)      | 10.00 |             |               |          |
| N-M           | 0 / 1921    | -18.2            | -18.2         | 0.40 (1)      | 10.00 |             |               |          |
| M-L           | 0 / 1417    | -18.2            | -18.2         | 0.29 (1)      | 10.00 |             |               |          |
| L-K           | 0 / 1417    | -18.2            | -18.2         | 0.29 (1)      | 10.00 |             |               |          |
| K-J           | 0 / 1835    | -18.2            | -18.2         | 0.38 (1)      | 10.00 |             |               |          |
| J-I           | 0 / 0       | -18.2            | -18.2         | 0.18 (4)      | 10.00 |             |               |          |

## DESIGN CRITERIA

SPECIFIED LOADS:

|            |     |      |      |     |
|------------|-----|------|------|-----|
| TOP        | CH. | LL = | 25.6 | PSF |
|            |     | DL = | 3.0  | PSF |
| BOT        | CH. | LL = | 0.0  | PSF |
|            |     | DL = | 7.3  | PSF |
| TOTAL LOAD |     | =    | 35.9 | PSF |

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A  
SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL  
OR SMALL BUILDING REQUIREMENTS OF  
PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , NBC-2019AE
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.95")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.09")  
ALLOWABLE DEFL.(TL)= L/360 (0.95")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.18")

CSI: TC=0.57/1.00 (B-C:1) , BC=0.40/1.00 (M-N:1)  
 , WB=0.73/1.00 (C-M:1) , SSI=0.24/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

## NAIL VALUES

| PLATE | GRIP(DRY)<br>(PSI) |     | SHEAR<br>(PLI) |     | SECTION<br>(PLI) |      |
|-------|--------------------|-----|----------------|-----|------------------|------|
|       | MAX                | MIN | MAX            | MIN | MAX              | MIN  |
| MT20  | 650                | 371 | 1747           | 788 | 1987             | 1873 |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (F) (INPUT = 0.90 )  
JSI METAL= 0.55 (B) (INPUT = 1.00 )



APRIL 24. 2023

**READ ALL NOTES ON THIS PAGE AND ON THE  
ENGINEERING NOTES: TRUSSES. THE NOTE PAGE  
IS AN INTEGRAL PART OF THIS DRAWING AS IT  
CONTAINS SPECIFICATIONS AND CRITERIA USED  
IN THE DESIGN OF THIS COMPONENT.**

CITY OF RICHMOND HILL  
BUILDING DIVISION


05/24/2023

A red and blue stamp in the bottom right corner that reads "KUI RECEIVED".

Per: joshua.nabua

|            |            |          |     |             |          |
|------------|------------|----------|-----|-------------|----------|
| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
| IM0423-072 | T04        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:51 2023 Page 1  
ID:qkoKX8tEThitEmD17qzgxYQay-KMkEbl4eeJwIO5BldcQkaaiEYIOUCwv1Jl2uRYzOUJg

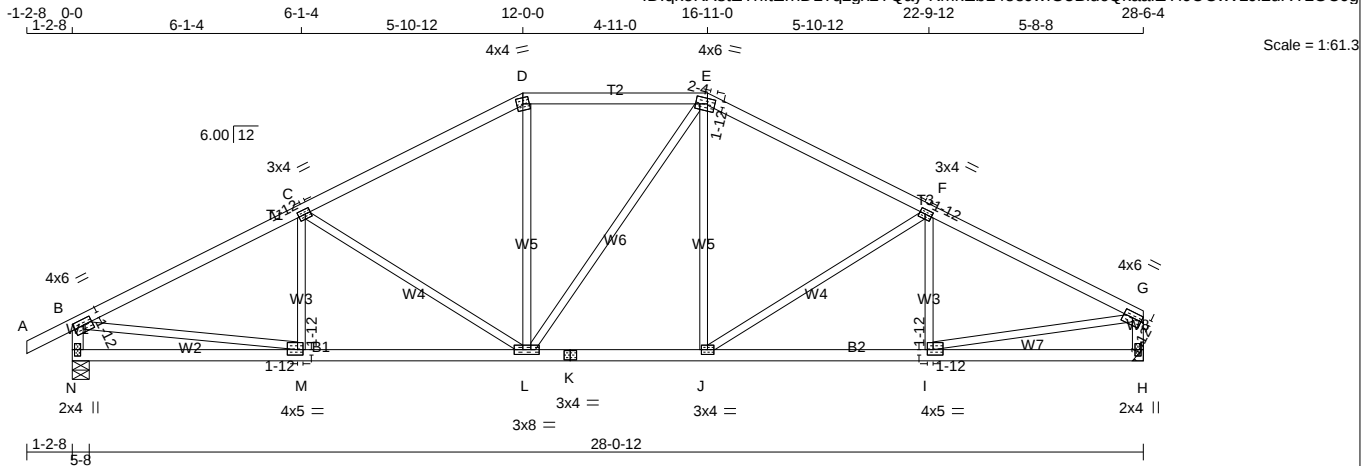

TOTAL WEIGHT = 115 lb

**LUMBER**

| N. L. G. A. RULES | CHORDS | SIZE | LUMBER | DESCR. |
|-------------------|--------|------|--------|--------|
| A - D             | 2x4    | DRY  | No.2   | SPF    |
| D - E             | 2x4    | DRY  | No.2   | SPF    |
| E - G             | 2x4    | DRY  | No.2   | SPF    |
| N - B             | 2x4    | DRY  | No.2   | SPF    |
| H - G             | 2x4    | DRY  | No.2   | SPF    |
| N - K             | 2x4    | DRY  | No.2   | SPF    |
| K - H             | 2x4    | DRY  | No.2   | SPF    |

ALL WEBS 2x3 DRY No.2 SPF  
EXCEPT

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMVW-t | MT20   | 4.0 | 6.0 | 1.75 | 3.00 |
| C  | TMWW-t | MT20   | 3.0 | 4.0 | 1.50 | 1.75 |
| D  | TTW-m  | MT20   | 4.0 | 4.0 |      |      |
| E  | TTWW-m | MT20   | 4.0 | 6.0 | 1.75 | 2.25 |
| F  | TMWW-t | MT20   | 3.0 | 4.0 | 1.50 | 1.75 |
| G  | TMVW-t | MT20   | 4.0 | 6.0 | 1.75 | Edge |
| H  | BMV1+p | MT20   | 2.0 | 4.0 |      |      |
| I  | BMWW-t | MT20   | 4.0 | 5.0 | 1.75 | 1.75 |
| J  | BMWW-t | MT20   | 3.0 | 4.0 |      |      |
| K  | BS-t   | MT20   | 3.0 | 4.0 |      |      |
| L  | BMWW-t | MT20   | 3.0 | 8.0 |      |      |
| M  | BMWW-t | MT20   | 4.0 | 5.0 | 1.75 | 1.75 |
| N  | BMV1+p | MT20   | 2.0 | 4.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER****BEARINGS**

|    | FACTORED       | MAXIMUM FACTORED | INPUT | REQD   |
|----|----------------|------------------|-------|--------|
|    | GROSS REACTION | GROSS REACTION   | BRG   | BRG    |
| JT | VERT           | HORZ             | DOWN  | UPLIFT |
| N  | 1569           | 0                | 1569  | 0      |
| H  | 1462           | 0                | 1462  | 0      |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H. MINIMUM BEARING LENGTH AT JOINT H = 1-9.

**UNFACTORED REACTIONS**

| JT | 1ST LCASE | SNOW    | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
|----|-----------|---------|-------|-----------|-------|---------|-------|
| N  | 1096      | 795 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 301 / 0 | 0 / 0 |
| H  | 1023      | 730 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 294 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.20 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| C H O R D S |                           |                           |                          | W E B S |                           |                          |          |
|-------------|---------------------------|---------------------------|--------------------------|---------|---------------------------|--------------------------|----------|
| MEMB.       | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. REACTION (CSI (LC)) | MEMB.   | MAX. FACTORED FORCE (LBS) | MAX. REACTION (CSI (LC)) |          |
| FR-TO       |                           | FROM TO                   | LENGTH                   | FR-TO   |                           |                          |          |
| A-B         | 0 / 24                    | -84.3 -84.3               | 0.10 (1)                 | 10.00   | M-C                       | -136 / 69                | 0.04 (1) |
| B-C         | -2119 / 0                 | -84.3 -84.3               | 0.48 (1)                 | 4.20    | C-L                       | -510 / 0                 | 0.50 (1) |
| C-D         | -1694 / 0                 | -84.3 -84.3               | 0.43 (1)                 | 4.64    | L-D                       | 0 / 352                  | 0.08 (1) |
| D-E         | -1495 / 0                 | -84.3 -84.3               | 0.29 (1)                 | 5.06    | L-E                       | 0 / 25                   | 0.01 (1) |
| E-F         | -1676 / 0                 | -84.3 -84.3               | 0.41 (1)                 | 4.69    | J-E                       | 0 / 321                  | 0.07 (1) |
| F-G         | -2013 / 0                 | -84.3 -84.3               | 0.43 (1)                 | 4.35    | J-F                       | -414 / 0                 | 0.41 (1) |
| N-B         | -1522 / 0                 | 0.0 0.0                   | 0.15 (1)                 | 6.66    | I-F                       | -208 / 45                | 0.05 (1) |
| H-G         | -1418 / 0                 | 0.0 0.0                   | 0.14 (1)                 | 6.85    | B-M                       | 0 / 1936                 | 0.44 (1) |
|             |                           |                           |                          |         | I-G                       | 0 / 1853                 | 0.42 (1) |
| N-M         | 0 / 0                     | -18.2 -18.2               | 0.16 (4)                 | 10.00   |                           |                          |          |
| M-L         | 0 / 1919                  | -18.2 -18.2               | 0.38 (1)                 | 10.00   |                           |                          |          |
| L-K         | 0 / 1481                  | -18.2 -18.2               | 0.30 (1)                 | 10.00   |                           |                          |          |
| K-J         | 0 / 1481                  | -18.2 -18.2               | 0.30 (1)                 | 10.00   |                           |                          |          |
| J-I         | 0 / 1824                  | -18.2 -18.2               | 0.36 (1)                 | 10.00   |                           |                          |          |
| I-H         | 0 / 0                     | -18.2 -18.2               | 0.15 (4)                 | 10.00   |                           |                          |          |

**DESIGN CRITERIA****SPECIFIED LOADS:**

|            |    |      |      |     |
|------------|----|------|------|-----|
| TOP CH.    | LL | =    | 25.6 | PSF |
|            | DL | =    | 3.0  | PSF |
| BOT CH.    | LL | =    | 0.0  | PSF |
|            | DL | =    | 7.3  | PSF |
| TOTAL LOAD | =  | 35.9 | PSF  |     |

**SPACING = 24.0 IN.CIC**

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, NBC-2019AE
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.95")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.09")  
ALLOWABLE DEFL.(TL)= L/360 (0.95")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.16")

CSI: TC=0.48/1.00 (B-C:1) , BC=0.38/1.00 (L-M:1) , WB=0.50/1.00 (C-L:1) , SSI=0.22/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

**NAIL VALUES**

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
|       | (PSI)     | (PLI) | (PLI)   |
| MT20  | 650       | 371   | 1747    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (B) (INPUT = 0.90 )  
JSI METAL= 0.54 (B) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION

05/24/2023

KOTT

RECEIVED


Per: joshua.nabua



| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | T06        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:52 2023 Page 1

ID:qkoKX8tEThltErnD1?zqzgxYQay-oYlcoh4GPd29?FmyAKxz7nERi9M6xODAXPnRz?zOUJf

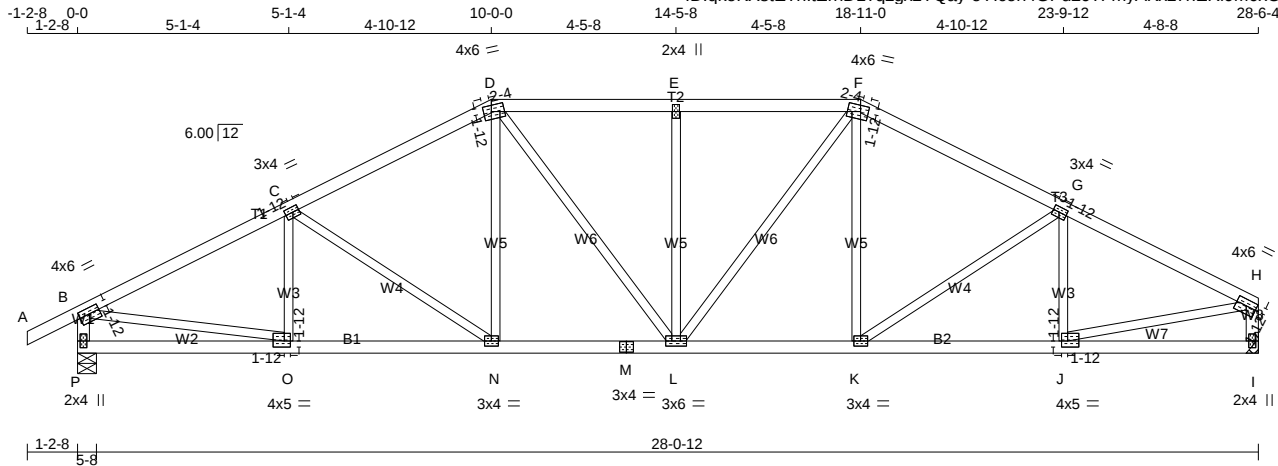

TOTAL WEIGHT = 118 lb

**LUMBER**

| N. L. G. A. RULES | CHORDS | SIZE | LUMBER | DESCR. |
|-------------------|--------|------|--------|--------|
| A - D             | 2x4    | DRY  | No.2   | SPF    |
| D - F             | 2x4    | DRY  | No.2   | SPF    |
| F - H             | 2x4    | DRY  | No.2   | SPF    |
| P - B             | 2x4    | DRY  | No.2   | SPF    |
| I - H             | 2x4    | DRY  | No.2   | SPF    |
| P - M             | 2x4    | DRY  | No.2   | SPF    |
| M - I             | 2x4    | DRY  | No.2   | SPF    |

ALL WEBS EXCEPT

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMVW-t | MT20   | 4.0 | 6.0 | 1.75 | 3.00 |
| C  | TMWW-t | MT20   | 3.0 | 4.0 | 1.50 | 1.75 |
| D  | TTWW-m | MT20   | 4.0 | 6.0 | 1.75 | 2.25 |
| E  | TMW+w  | MT20   | 2.0 | 4.0 |      |      |
| F  | TTWW-m | MT20   | 4.0 | 6.0 | 1.75 | 2.25 |
| G  | TMVW-t | MT20   | 3.0 | 4.0 | 1.50 | 1.75 |
| H  | TMVW-t | MT20   | 4.0 | 6.0 | 1.75 | Edge |
| I  | BMV1+p | MT20   | 2.0 | 4.0 |      |      |
| J  | BMWW-t | MT20   | 4.0 | 5.0 | 1.75 | 1.75 |
| K  | BMWW-t | MT20   | 3.0 | 4.0 |      |      |
| L  | BMWW-t | MT20   | 3.0 | 6.0 |      |      |
| M  | BS-t   | MT20   | 3.0 | 4.0 |      |      |
| N  | BMWW-t | MT20   | 3.0 | 4.0 |      |      |
| O  | BMWW-t | MT20   | 4.0 | 5.0 | 1.75 | 1.75 |
| P  | BMV1+p | MT20   | 2.0 | 4.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER****BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | HORZ                            | DOWN      | UPLIFT   |
| P  | 1569                    | 0                               | 1569      | 0        |
| I  | 1462                    | 0                               | 1462      | 0        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT I. MINIMUM BEARING LENGTH AT JOINT I = 1-9.

**UNFACTORED REACTIONS**

| JT | 1ST LCASE COMBINED | MAX./MIN. SNOW | MIN. LIVE | PERM. LIVE | WIND  | DEAD    | SOIL  |
|----|--------------------|----------------|-----------|------------|-------|---------|-------|
| P  | 1096               | 795 / 0        | 0 / 0     | 0 / 0      | 0 / 0 | 301 / 0 | 0 / 0 |
| I  | 1023               | 730 / 0        | 0 / 0     | 0 / 0      | 0 / 0 | 294 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) P

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.39 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| CHORDS        |             |                  |                | WEBS                 |       |               |               |
|---------------|-------------|------------------|----------------|----------------------|-------|---------------|---------------|
| MAX. FACTORED |             | FACTORED         |                | MAX. FACTORED        |       | MAX. FACTORED |               |
| MEMB.         | FORCE (LBS) | VERT. LOAD (PLF) | MAX. CSI (LC)  | MAX. UNBRACED LENGTH | MEMB. | FORCE (LBS)   | MAX. CSI (LC) |
| FR-TO         |             | FROM             | TO             |                      | FR-TO |               |               |
| A-B           | 0 / 24      | -84.3            | -84.3 0.10 (1) | 10.00                | O-C   | -208 / 31     | 0.05 (1)      |
| B-C           | -2100 / 0   | -84.3            | -84.3 0.32 (1) | 4.39                 | C-N   | -321 / 0      | 0.20 (1)      |
| C-D           | -1847 / 0   | -84.3            | -84.3 0.30 (1) | 4.64                 | N-D   | 0 / 270       | 0.06 (1)      |
| D-E           | -1822 / 0   | -84.3            | -84.3 0.25 (1) | 4.74                 | D-L   | 0 / 306       | 0.07 (1)      |
| E-F           | -1822 / 0   | -84.3            | -84.3 0.25 (1) | 4.74                 | L-E   | -456 / 0      | 0.27 (1)      |
| F-G           | -1812 / 0   | -84.3            | -84.3 0.28 (1) | 4.71                 | L-F   | 0 / 357       | 0.08 (1)      |
| G-H           | -1967 / 0   | -84.3            | -84.3 0.29 (1) | 4.55                 | K-F   | 0 / 211       | 0.05 (1)      |
| P-B           | -1527 / 0   | 0.0              | 0.0 0.15 (1)   | 6.65                 | K-G   | -213 / 0      | 0.14 (1)      |
| I-H           | -1424 / 0   | 0.0              | 0.0 0.15 (1)   | 6.84                 | J-G   | -292 / 3      | 0.06 (1)      |
|               |             |                  |                |                      | B-O   | 0 / 1922      | 0.43 (1)      |
|               |             |                  |                |                      | J-H   | 0 / 1819      | 0.41 (1)      |
| P-O           | 0 / 0       | -18.2            | -18.2 0.10 (4) | 10.00                |       |               |               |
| O-N           | 0 / 1897    | -18.2            | -18.2 0.35 (1) | 10.00                |       |               |               |
| N-M           | 0 / 1636    | -18.2            | -18.2 0.31 (1) | 10.00                |       |               |               |
| M-L           | 0 / 1636    | -18.2            | -18.2 0.31 (1) | 10.00                |       |               |               |
| L-K           | 0 / 1605    | -18.2            | -18.2 0.31 (1) | 10.00                |       |               |               |
| K-J           | 0 / 1779    | -18.2            | -18.2 0.33 (1) | 10.00                |       |               |               |
| J-I           | 0 / 0       | -18.2            | -18.2 0.09 (4) | 10.00                |       |               |               |

**DESIGN CRITERIA****SPECIFIED LOADS:**

|            |     |    |   |      |     |
|------------|-----|----|---|------|-----|
| TOP        | CH. | LL | = | 25.6 | PSF |
|            |     | DL | = | 3.0  | PSF |
| BOT        | CH. | LL | = | 0.0  | PSF |
|            |     | DL | = | 7.3  | PSF |
| TOTAL LOAD |     |    | = | 35.9 | PSF |

**SPACING = 24.0 IN. C/C**

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, NBC-2019AE
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.95")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.09")  
ALLOWABLE DEFL.(TL) = L/360 (0.95")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.15")

CSI: TC=0.32/1.00 (B-C:1), BC=0.35/1.00 (N-O:1), WB=0.43/1.00 (B-O:1), SSI=0.18/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**

| PLATE | GRIP(DRY) (PSI) | SHEAR (PLI) | SECTION (PLI) |
|-------|-----------------|-------------|---------------|
| MT20  | 650             | 371         | 1747          |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (B) (INPUT = 0.90)  
JSI METAL= 0.53 (B) (INPUT = 1.00)

APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION

05/24/2023


KOTT

RECEIVED

Per: joshua.nabua

|            |            |          |     |             |          |
|------------|------------|----------|-----|-------------|----------|
| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
| IM0423-072 | T07        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:53 2023 Page 1  
ID:qkoKX8tEThltErnD1?qzgxzYQay-Gkr?015uAxB0dPL8k1SCf?ncgYilgrXKm3X?VRzOUJe

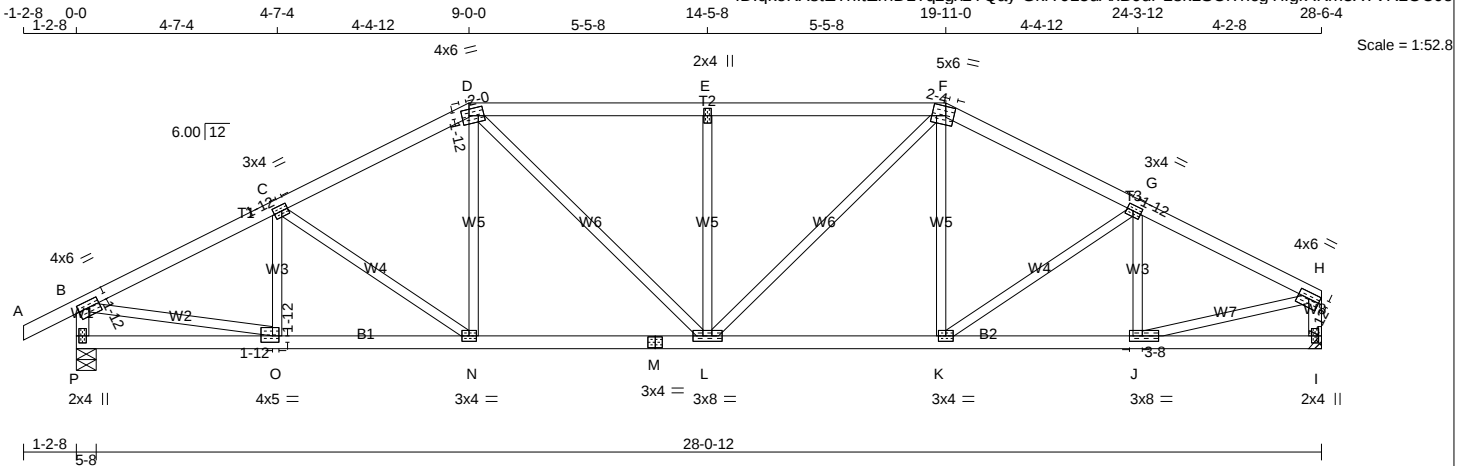**LUMBER**

| N. L. G. A. RULES | CHORDS | SIZE | LUMBER | DESCR. |
|-------------------|--------|------|--------|--------|
| A - D             | 2x4    | DRY  | No.2   | SPF    |
| D - F             | 2x4    | DRY  | No.2   | SPF    |
| F - H             | 2x4    | DRY  | No.2   | SPF    |
| P - B             | 2x4    | DRY  | No.2   | SPF    |
| I - H             | 2x4    | DRY  | No.2   | SPF    |
| P - M             | 2x4    | DRY  | No.2   | SPF    |
| M - I             | 2x4    | DRY  | No.2   | SPF    |

ALL WEBS EXCEPT 2x3 DRY No.2 SPF

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| B  | TMVW-t  | MT20   | 4.0 | 6.0 | 1.75 | 3.00 |
| C  | TMWW-t  | MT20   | 3.0 | 4.0 | 1.50 | 1.75 |
| D  | TTWW-m  | MT20   | 4.0 | 6.0 | 1.75 | 2.00 |
| E  | TMW+w   | MT20   | 2.0 | 4.0 |      |      |
| F  | TTWW-m  | MT20   | 5.0 | 6.0 | 2.50 | 2.25 |
| G  | TMWW-t  | MT20   | 3.0 | 4.0 | 1.50 | 1.75 |
| H  | TMVW-t  | MT20   | 4.0 | 6.0 | 1.75 | Edge |
| I  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |
| J  | BMWW-t  | MT20   | 3.0 | 8.0 | 1.50 | 3.50 |
| K  | BMWW-t  | MT20   | 3.0 | 4.0 |      |      |
| L  | BMWWW-t | MT20   | 3.0 | 8.0 |      |      |
| M  | BS-t    | MT20   | 3.0 | 4.0 |      |      |
| N  | BMWW-t  | MT20   | 3.0 | 4.0 |      |      |
| O  | BMWW-t  | MT20   | 4.0 | 5.0 | 1.75 | 1.75 |
| P  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER****BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQD BRG |
|----|-------------------------|---------------------------------|-----------|----------|
| JT | VERT                    | HORZ                            | DOWN      | UPLIFT   |
| P  | 1569                    | 0                               | 1569      | 0        |
| I  | 1462                    | 0                               | 1462      | 0        |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT I. MINIMUM BEARING LENGTH AT JOINT I = 1-9.

**UNFACTORED REACTIONS**

| JT | 1ST LCASE COMBINED | MAX./MIN. SNOW | MIN. LIVE | MAX. PERM. LIVE | WIND  | DEAD    | SOIL  |
|----|--------------------|----------------|-----------|-----------------|-------|---------|-------|
| P  | 1096               | 795 / 0        | 0 / 0     | 0 / 0           | 0 / 0 | 301 / 0 | 0 / 0 |
| I  | 1023               | 730 / 0        | 0 / 0     | 0 / 0           | 0 / 0 | 294 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) P

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.39 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| C H O R D S |                           |                           |                           | W E B S |                           |                           |  |
|-------------|---------------------------|---------------------------|---------------------------|---------|---------------------------|---------------------------|--|
| MEMB.       | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. UNBRACED LENGTH (LC) | MEMB.   | MAX. FACTORED FORCE (LBS) | MAX. UNBRACED LENGTH (LC) |  |
| FR-TO       |                           | FROM TO                   |                           | FR-TO   |                           |                           |  |
| A-B         | 0 / 24                    | -84.3 -84.3               | 0.10 (1)                  | 10.00   | O-C                       | -253 / 7 0.05 (1)         |  |
| B-C         | -2077 / 0                 | -84.3 -84.3               | 0.26 (1)                  | 4.48    | C-N                       | -218 / 0 0.11 (1)         |  |
| C-D         | -1916 / 0                 | -84.3 -84.3               | 0.25 (1)                  | 4.64    | N-D                       | 0 / 221 0.05 (1)          |  |
| D-E         | -2016 / 0                 | -84.3 -84.3               | 0.37 (1)                  | 4.39    | D-L                       | 0 / 442 0.10 (1)          |  |
| E-F         | -2016 / 0                 | -84.3 -84.3               | 0.37 (1)                  | 4.39    | L-E                       | -563 / 0 0.27 (1)         |  |
| F-G         | -1869 / 0                 | -84.3 -84.3               | 0.23 (1)                  | 4.71    | L-F                       | 0 / 500 0.11 (1)          |  |
| G-H         | -1928 / 0                 | -84.3 -84.3               | 0.23 (1)                  | 4.65    | K-F                       | 0 / 157 0.04 (4)          |  |
| P-B         | -1530 / 0                 | 0.0 0.0                   | 0.15 (1)                  | 6.65    | K-G                       | -104 / 0 0.05 (1)         |  |
| I-H         | -1426 / 0                 | 0.0 0.0                   | 0.15 (1)                  | 6.84    | J-G                       | -344 / 0 0.07 (1)         |  |
|             |                           |                           |                           |         | B-O                       | 0 / 1904 0.43 (1)         |  |
|             |                           |                           |                           |         | J-H                       | 0 / 1790 0.40 (1)         |  |
| P-O         | 0 / 0                     | -18.2 -18.2               | 0.08 (4)                  | 10.00   |                           |                           |  |
| O-N         | 0 / 1874                  | -18.2 -18.2               | 0.35 (1)                  | 10.00   |                           |                           |  |
| N-M         | 0 / 1699                  | -18.2 -18.2               | 0.33 (1)                  | 10.00   |                           |                           |  |
| M-L         | 0 / 1699                  | -18.2 -18.2               | 0.33 (1)                  | 10.00   |                           |                           |  |
| L-K         | 0 / 1658                  | -18.2 -18.2               | 0.32 (1)                  | 10.00   |                           |                           |  |
| K-J         | 0 / 1740                  | -18.2 -18.2               | 0.33 (1)                  | 10.00   |                           |                           |  |
| J-I         | 0 / 0                     | -18.2 -18.2               | 0.07 (4)                  | 10.00   |                           |                           |  |

**DESIGN CRITERIA**

SPECIFIED LOADS:  
TOP CH. LL = 25.6 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.3 PSF  
TOTAL LOAD = 35.9 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, NBC-2019AE
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.95")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.09")  
ALLOWABLE DEFL.(TL) = L/360 (0.95")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.17")

CSI: TC=0.37/1.00 (D-E:1), BC=0.35/1.00 (N-O:1), WB=0.43/1.00 (B-O:1), SSI=0.22/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**

| PLATE | GRIP(DRY) (PSI) | SHEAR (PLI) | SECTION (PLI) |
|-------|-----------------|-------------|---------------|
| MT20  | 650             | 371         | 1747          |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.88 (B) (INPUT = 0.90)  
JSI METAL= 0.53 (B) (INPUT = 1.00)



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION


05/24/2023  
KOTT  
RECEIVED

Per: joshua.nabua

|            |            |          |     |             |          |
|------------|------------|----------|-----|-------------|----------|
| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
| IM0423-072 | T08        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:54 2023 Page 1

ID:qkoKX8tEThlErnD1?qzgxzYQay-kxPNDM6WxEJtFZwKlZRCcJi9y1EPA0T?jGY1tzOUJd

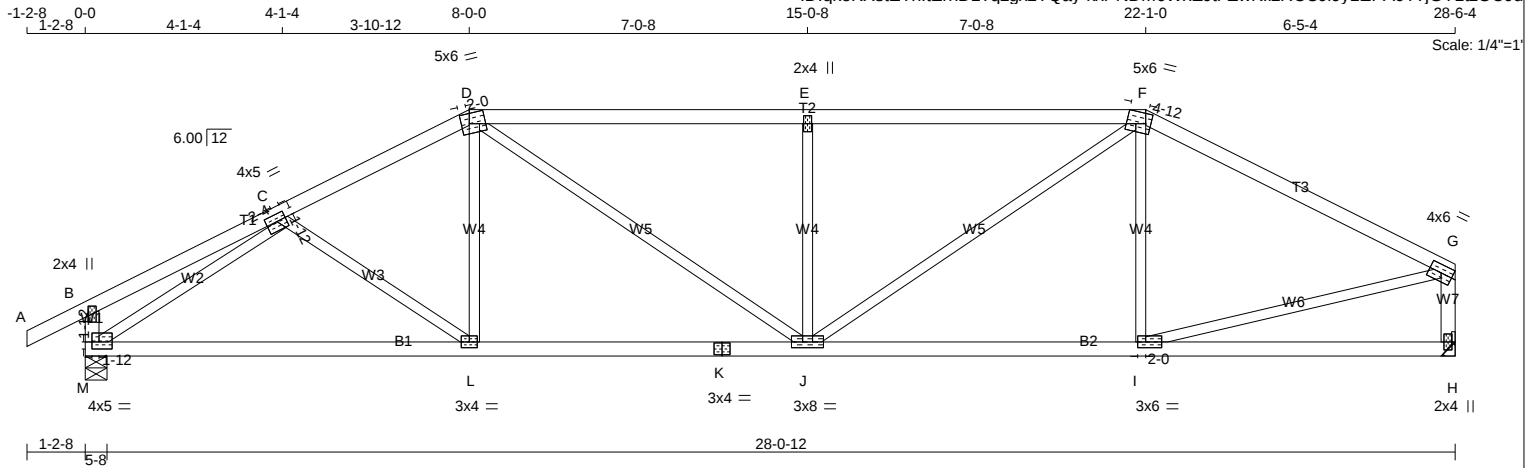

TOTAL WEIGHT = 108 lb

**LUMBER**

| N. L. G. A. RULES | CHORDS | SIZE | LUMBER     | DESCR. |
|-------------------|--------|------|------------|--------|
| A - D             | 2x4    | DRY  | No.2       | SPF    |
| D - F             | 2x4    | DRY  | No.2       | SPF    |
| F - G             | 2x4    | DRY  | 2100F 1.8E | SPF    |
| M - B             | 2x4    | DRY  | No.2       | SPF    |
| H - G             | 2x4    | DRY  | No.2       | SPF    |
| M - K             | 2x4    | DRY  | No.2       | SPF    |
| K - H             | 2x4    | DRY  | No.2       | SPF    |

ALL WEBS 2x3 DRY No.2 SPF  
EXCEPT

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| B  | TMV+p   | MT20   | 2.0 | 4.0 |      |      |
| C  | TMWW-t  | MT20   | 4.0 | 5.0 | 1.75 | 2.25 |
| D  | TTWW-m  | MT20   | 5.0 | 6.0 | 2.50 | 2.00 |
| E  | TMW+w   | MT20   | 2.0 | 4.0 |      |      |
| F  | TTWW-m  | MT20   | 5.0 | 6.0 | Edge | 4.75 |
| G  | TMVW-t  | MT20   | 4.0 | 6.0 | Edge |      |
| H  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |
| I  | BMVW-t  | MT20   | 3.0 | 6.0 | 1.50 | 2.00 |
| J  | BMVWW-t | MT20   | 3.0 | 8.0 |      |      |
| K  | BS-t    | MT20   | 3.0 | 4.0 |      |      |
| L  | BMVW-t  | MT20   | 3.0 | 4.0 |      |      |
| M  | BMVW1-t | MT20   | 4.0 | 5.0 | 1.75 | 1.75 |

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER****BEARINGS**

|    | FACTORED GROSS REACTION | MAXIMUM FACTORED GROSS REACTION | INPUT BRG | REQRD BRG |
|----|-------------------------|---------------------------------|-----------|-----------|
| JT | VERT                    | HORZ                            | UPLIFT    | IN-SX     |
| M  | 1569                    | 0                               | 1569      | 0         |
| H  | 1462                    | 0                               | 1462      | 0         |

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H. MINIMUM BEARING LENGTH AT JOINT H = 1-9.

**UNFACTORED REACTIONS**

| JT | 1ST LCASE COMBINED | SNOW    | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
|----|--------------------|---------|-------|-----------|-------|---------|-------|
| M  | 1096               | 795 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 301 / 0 | 0 / 0 |
| H  | 1023               | 730 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 294 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) M

**BRACING**TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.82 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| C H O R D S   |           |            |          | W E B S       |       |       |           |          |
|---------------|-----------|------------|----------|---------------|-------|-------|-----------|----------|
| MAX. FACTORED |           | FACTORED   |          | MAX. FACTORED |       |       |           |          |
| MEMB.         | FORCE     | VERT. LOAD | LC1 MAX. | MAX.          | MEMB. | FORCE | MAX       |          |
|               | (LBS)     | (PLF)      | CSI (LC) | UNBRAC        |       | (LBS) | CSI (LC)  |          |
| FR-TO         |           | FROM TO    |          | LENGTH        | FR-TO |       |           |          |
| A-B           | 0 / 24    | -84.3      | -84.3    | 0.10 (1)      | 10.00 | C-L   | -44 / 57  | 0.02 (4) |
| B-C           | 0 / 15    | -84.3      | -84.3    | 0.19 (1)      | 10.00 | L-D   | 0 / 185   | 0.05 (4) |
| C-D           | -1989 / 0 | -84.3      | -84.3    | 0.19 (1)      | 4.63  | D-J   | 0 / 600   | 0.14 (1) |
| D-E           | -2263 / 0 | -84.3      | -84.3    | 0.65 (1)      | 3.82  | J-E   | -731 / 0  | 0.28 (1) |
| E-F           | -2263 / 0 | -84.3      | -84.3    | 0.65 (1)      | 3.82  | J-F   | 0 / 890   | 0.20 (1) |
| F-G           | -1716 / 0 | -84.3      | -84.3    | 0.32 (1)      | 5.69  | I-F   | -233 / 49 | 0.09 (1) |
| M-B           | -242 / 0  | 0.0        | 0.0      | 0.02 (1)      | 7.81  | M-C   | -2201 / 0 | 0.86 (1) |
| H-G           | -1415 / 0 | 0.0        | 0.0      | 0.16 (1)      | 6.85  | I-G   | 0 / 1579  | 0.36 (1) |
|               |           |            |          |               |       |       |           |          |
| M-L           | 0 / 1800  | -18.2      | -18.2    | 0.44 (1)      | 10.00 |       |           |          |
| L-K           | 0 / 1768  | -18.2      | -18.2    | 0.43 (1)      | 10.00 |       |           |          |
| K-J           | 0 / 1768  | -18.2      | -18.2    | 0.43 (1)      | 10.00 |       |           |          |
| J-I           | 0 / 1529  | -18.2      | -18.2    | 0.36 (1)      | 10.00 |       |           |          |
| I-H           | 0 / 0     | -18.2      | -18.2    | 0.20 (4)      | 10.00 |       |           |          |

**DESIGN CRITERIA****SPECIFIED LOADS:**

|            |    |      |      |     |
|------------|----|------|------|-----|
| TOP CH.    | LL | =    | 25.6 | PSF |
|            | DL | =    | 3.0  | PSF |
| BOT CH.    | LL | =    | 0.0  | PSF |
|            | DL | =    | 7.3  | PSF |
| TOTAL LOAD | =  | 35.9 | PSF  |     |

**SPACING = 24.0 IN.C/C**

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, NBC-2019AE
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.95")  
CALCULATED VERT. DEFL.(LL) = L/999 (0.11")  
ALLOWABLE DEFL.(TL) = L/360 (0.95")  
CALCULATED VERT. DEFL.(TL) = L/999 (0.19")

CSI: TC=0.65/1.00 (E-F:1), BC=0.44/1.00 (L-M:1), WB=0.86/1.00 (C-M:1), SSI=0.29/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**

| PLATE | GRIP(DRY) (PSI) | SHEAR (PLI) | SECTION (PLI) |
|-------|-----------------|-------------|---------------|
|       | MAX             | MIN         | MAX           |
| MT20  | 650             | 371         | 1747          |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (M) (INPUT = 0.90)  
JSI METAL= 0.59 (C) (INPUT = 1.00)

APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION05/24/2023  
KOTT


RECEIVED

Per: joshua.nabua

|            |            |          |     |             |          |
|------------|------------|----------|-----|-------------|----------|
| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
| IM0423-072 | T09        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:54 2023 Page 1

ID:qkoKX8tEtHtErnD1?zqgzYQay-kxPNDM6WxEJtFZWkIlzRCCJm1y4lPlT?jGY1tzOUJd

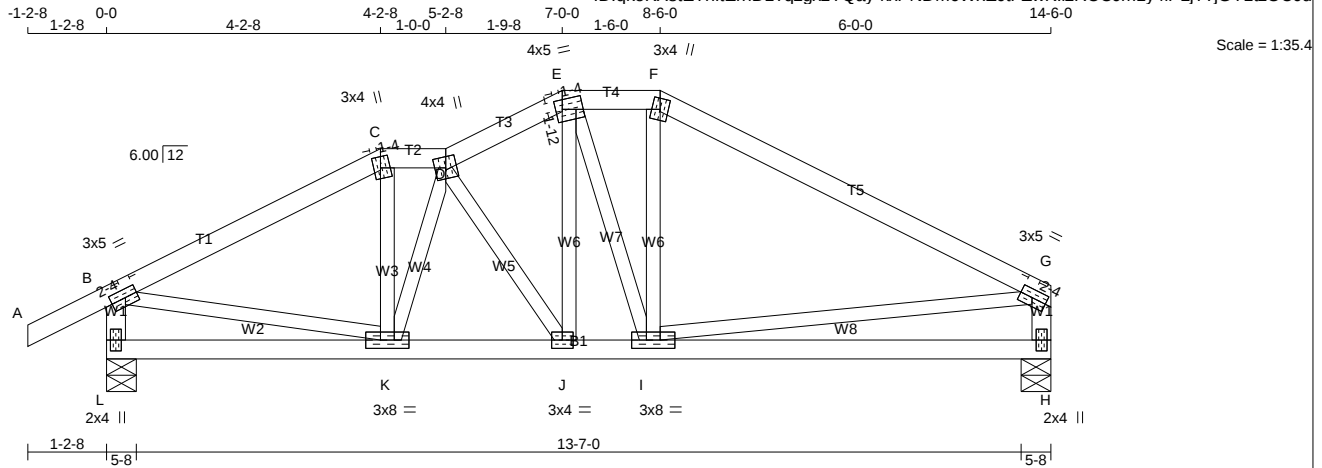

TOTAL WEIGHT = 62 lb

| LUMBER                |        |      |        | DESCR. |     |     |     |
|-----------------------|--------|------|--------|--------|-----|-----|-----|
| N. L. G. A. RULES     | CHORDS | SIZE | LUMBER | SPF    | SPF | SPF | SPF |
| A - C                 | 2x4    | DRY  | No.2   | SPF    | SPF | SPF | SPF |
| C - D                 | 2x4    | DRY  | No.2   | SPF    | SPF | SPF | SPF |
| D - E                 | 2x4    | DRY  | No.2   | SPF    | SPF | SPF | SPF |
| E - F                 | 2x4    | DRY  | No.2   | SPF    | SPF | SPF | SPF |
| F - G                 | 2x4    | DRY  | No.2   | SPF    | SPF | SPF | SPF |
| L - B                 | 2x4    | DRY  | No.2   | SPF    | SPF | SPF | SPF |
| H - G                 | 2x4    | DRY  | No.2   | SPF    | SPF | SPF | SPF |
| L - H                 | 2x4    | DRY  | No.2   | SPF    | SPF | SPF | SPF |
| ALL WEBS              | 2x3    | DRY  | No.2   | SPF    | SPF | SPF | SPF |
| EXCEPT                |        |      |        |        |     |     |     |
| DRY: SEASONED LUMBER. |        |      |        |        |     |     |     |

| PLATES (table is in inches) |         |        |     |     |      |      |
|-----------------------------|---------|--------|-----|-----|------|------|
| JT                          | TYPE    | PLATES | W   | LEN | Y    | X    |
| B                           | TMVW-t  | MT20   | 3.0 | 5.0 | 1.50 | 2.25 |
| C                           | TTW+m   | MT20   | 3.0 | 4.0 | 2.00 | 1.25 |
| D                           | TTWW+m  | MT20   | 4.0 | 4.0 |      |      |
| E                           | TTWW-m  | MT20   | 4.0 | 5.0 | 1.75 | 1.25 |
| F                           | TTW+m   | MT20   | 3.0 | 4.0 |      |      |
| G                           | TMVW-t  | MT20   | 3.0 | 5.0 | 1.50 | 2.25 |
| H                           | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |
| I                           | BMWWW-t | MT20   | 3.0 | 8.0 |      |      |
| J                           | BMWW-t  | MT20   | 3.0 | 4.0 |      |      |
| K                           | BMWWW-t | MT20   | 3.0 | 8.0 |      |      |
| L                           | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |

# DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

| BEARINGS |      | FACTORED |                | MAXIMUM FACTORED |      | INPUT  |     | REQRD |     |
|----------|------|----------|----------------|------------------|------|--------|-----|-------|-----|
| JT       | VERT | HORZ     | GROSS REACTION | DOWN             | HORZ | UPLIFT | BRG | IN-SX | BRG |
| L        | 850  | 0        | 850            | 0                | 0    | 5-8    | 1-8 |       |     |
| H        | 743  | 0        | 743            | 0                | 0    | 5-8    | 1-8 |       |     |

## UNFACTORED REACTIONS

| JT | 1ST LCASE | SNOW    | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
|----|-----------|---------|-------|-----------|-------|---------|-------|
| L  | 593       | 436 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 157 / 0 | 0 / 0 |
| H  | 520       | 371 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 149 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) L, H

## BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

## LOADING

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |                        | WEBS                          |       |                           |                        |
|--------|---------------------------|---------------------------|------------------------|-------------------------------|-------|---------------------------|------------------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. FACTORED CSI (LC) | MAX. FACTORED UNBRACED LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. FACTORED CSI (LC) |
| FR-TO  |                           | FROM TO                   |                        |                               | FR-TO |                           |                        |
| A-B    | 0 / 24                    | -84.3 -84.3               | 0.10 (1)               | 10.00                         | K-C   | 0 / 168                   | 0.04 (1)               |
| B-C    | -863 / 0                  | -84.3 -84.3               | 0.20 (1)               | 6.25                          | K-D   | -237 / 0                  | 0.05 (1)               |
| C-D    | -780 / 0                  | -84.3 -84.3               | 0.02 (1)               | 6.25                          | D-J   | -281 / 0                  | 0.06 (1)               |
| D-E    | -775 / 0                  | -84.3 -84.3               | 0.04 (1)               | 6.25                          | J-E   | 0 / 193                   | 0.04 (1)               |
| E-F    | -703 / 0                  | -84.3 -84.3               | 0.03 (1)               | 6.25                          | E-I   | 0 / 61                    | 0.02 (4)               |
| F-G    | -785 / 0                  | -84.3 -84.3               | 0.40 (1)               | 6.25                          | I-F   | 0 / 74                    | 0.03 (4)               |
| L-B    | -816 / 0                  | 0.0 0.0                   | 0.08 (1)               | 7.81                          | B-K   | 0 / 784                   | 0.18 (1)               |
| H-G    | -698 / 0                  | 0.0 0.0                   | 0.07 (1)               | 7.81                          | I-G   | 0 / 708                   | 0.16 (1)               |
| L-K    | 0 / 0                     | -18.2 -18.2               | 0.07 (4)               | 10.00                         |       |                           |                        |
| K-J    | 0 / 846                   | -18.2 -18.2               | 0.17 (1)               | 10.00                         |       |                           |                        |
| J-I    | 0 / 698                   | -18.2 -18.2               | 0.21 (4)               | 10.00                         |       |                           |                        |
| I-H    | 0 / 0                     | -18.2 -18.2               | 0.16 (4)               | 10.00                         |       |                           |                        |

## DESIGN CRITERIA

SPECIFIED LOADS:  
TOP CH. LL = 25.6 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.3 PSF  
TOTAL LOAD = 35.9 PSF

SPACING = 24.0 IN.C/C

LOADING IN ALL FLAT SECTIONS BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF CBC 2018, NBC-2019AE  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 086-14  
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.48")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.02")  
ALLOWABLE DEFL.(TL) = L/360 (0.48")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.05")

CSI: TC=0.40/1.00 (F-G:1), BC=0.21/1.00 (I-J:4), WB=0.18/1.00 (B-K:1), SSI=0.18/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
| (PSI) | (PLI)     | (PLI) | (PLI)   |
| MAX   | MIN       | MAX   | MIN     |
| MT20  | 650       | 371   | 1747    |
|       |           | 788   | 1987    |
|       |           |       | 1873    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.86 (K) (INPUT = 0.90 )  
JSI METAL= 0.28 (B) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION


05/24/2023  
KOTT  
RECEIVED

Per: joshua.nabua

| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
|------------|------------|----------|-----|-------------|----------|
| IM0423-072 | T10        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:55 2023 Page 1

ID:qkoKX8tEThltErnD1?zqgxzYQay-C7zIRi79iYRksiVWsuUglQsyuMQO8oxcEN05aKzOUJc

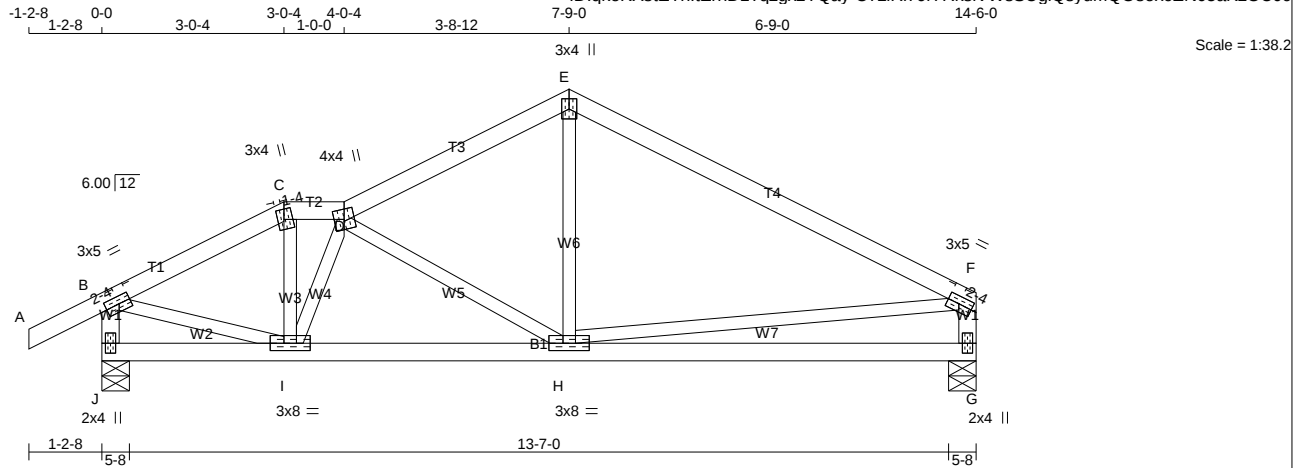

TOTAL WEIGHT = 56 lb

**LUMBER**

N. L. G. A. RULES

| CHORDS | SIZE    | LUMBER     | DESCR. |
|--------|---------|------------|--------|
| A - C  | 2x4 DRY | No.2       | SPF    |
| C - D  | 2x4 DRY | No.2       | SPF    |
| D - E  | 2x4 DRY | No.2       | SPF    |
| E - F  | 2x4 DRY | 2100F 1.8E | SPF    |
| J - B  | 2x4 DRY | No.2       | SPF    |
| G - F  | 2x4 DRY | No.2       | SPF    |
| J - G  | 2x4 DRY | No.2       | SPF    |

ALL WEBS 2x3 DRY No.2 SPF  
EXCEPT

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE   | PLATES | W   | LEN | Y    | X    |
|----|--------|--------|-----|-----|------|------|
| B  | TMVW-t | MT20   | 3.0 | 5.0 | 1.50 | 2.25 |
| C  | TTW+m  | MT20   | 3.0 | 4.0 | 2.00 | 1.25 |
| D  | TTWW+m | MT20   | 4.0 | 4.0 |      |      |
| E  | TTW+p  | MT20   | 3.0 | 4.0 |      |      |
| F  | TMVW-t | MT20   | 3.0 | 5.0 | 1.50 | 2.25 |
| G  | BMV1+p | MT20   | 2.0 | 4.0 |      |      |
| H  | BMWW-t | MT20   | 3.0 | 8.0 |      |      |
| I  | BMWW-t | MT20   | 3.0 | 8.0 |      |      |
| J  | BMV1+p | MT20   | 2.0 | 4.0 |      |      |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER****BEARINGS**

|    | FACTORED       | MAXIMUM FACTORED | INPUT | REQD   |
|----|----------------|------------------|-------|--------|
|    | GROSS REACTION | GROSS REACTION   | BRG   | BRG    |
| JT | VERT           | HORZ             | DOWN  | UPLIFT |
| J  | 850            | 0                | 850   | 0      |
| G  | 743            | 0                | 743   | 0      |

**UNFACTORED REACTIONS**

| JT | 1ST LCASE | MAX./MIN. | COMPONENT REACTIONS |
|----|-----------|-----------|---------------------|
| JT | COMBINED  | SNOW      | LIVE                |
| J  | 593       | 436 / 0   | 0 / 0               |
| G  | 520       | 371 / 0   | 0 / 0               |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) J, G

**BRACING**TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |               | WEBS  |                           |               |  |
|--------|---------------------------|---------------------------|---------------|-------|---------------------------|---------------|--|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. CSI (LC) | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CSI (LC) |  |
| FR-TO  |                           | FROM TO                   | LENGTH        | FR-TO |                           |               |  |
| A-B    | 0 / 24                    | -84.3 -84.3               | 0.10 (1)      | I-C   | 0 / 217                   | 0.05 (1)      |  |
| B-C    | -860 / 0                  | -84.3 -84.3               | 0.11 (1)      | I-D   | -391 / 0                  | 0.07 (1)      |  |
| C-D    | -778 / 0                  | -84.3 -84.3               | 0.02 (1)      | D-H   | -303 / 0                  | 0.10 (1)      |  |
| D-E    | -741 / 0                  | -84.3 -84.3               | 0.16 (1)      | H-E   | 0 / 218                   | 0.05 (4)      |  |
| E-F    | -736 / 0                  | -84.3 -84.3               | 0.33 (1)      | B-I   | 0 / 794                   | 0.18 (1)      |  |
| J-B    | -822 / 0                  | 0.0 0.0                   | 0.08 (1)      | H-F   | 0 / 663                   | 0.15 (1)      |  |
| G-F    | -692 / 0                  | 0.0 0.0                   | 0.07 (1)      |       |                           |               |  |
| J-I    | 0 / 0                     | -18.2 -18.2               | 0.04 (4)      |       |                           |               |  |
| I-H    | 0 / 918                   | -18.2 -18.2               | 0.25 (1)      |       |                           |               |  |
| H-G    | 0 / 0                     | -18.2 -18.2               | 0.19 (4)      |       |                           |               |  |

**DESIGN CRITERIA**

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.3 PSF  
TOTAL LOAD = 35.9 PSF

SPACING = 24.0 IN. C/C

LOADING IN ALL FLAT SECTIONS BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, NBC-2019AE  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 086-14  
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.48")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.02")  
ALLOWABLE DEFL.(TL) = L/360 (0.48")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.07")

CSI: TC=0.33/1.00 (E-F:1), BC=0.25/1.00 (H-I:1),  
WB=0.18/1.00 (B-I:1), SSI=0.20/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

**NAIL VALUES**

| PLATE | GRIP(DRY) | SHEAR | SECTION |
|-------|-----------|-------|---------|
| (PSI) | (PLI)     | (PLI) | (PLI)   |
| MAX   | MIN       | MAX   | MIN     |
| MT20  | 650       | 371   | 1747    |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.87 (B) (INPUT = 0.90 )  
JSI METAL= 0.28 (B) (INPUT = 1.00 )



APRIL 24, 2023


READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION05/24/2023  
KOTT

RECEIVED

Per: joshua.nabua

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:56 2023 Page 1




TOTAL WEIGHT = 61 lb

Per: joshua.nabua



Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:57 2023 Page 1

ID:qkoKX8tEThtErnD1?qzgxzYQay-9W5VrO8PE9hS60fvztX8qrxHHA60ch2vhhVCeCzOUJa




TOTAL WEIGHT = 52 lb

Per: joshua.nabua

|            |            |          |     |             |          |
|------------|------------|----------|-----|-------------|----------|
| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
| IM0423-072 | T14        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:58 2023 Page 1

ID:qkoKX8tEhltErnD1?zqgzxYQay-difu3k91?TpJjAE5Xa2NM2UT3ZSXL9w3wLEmAezOUJZ

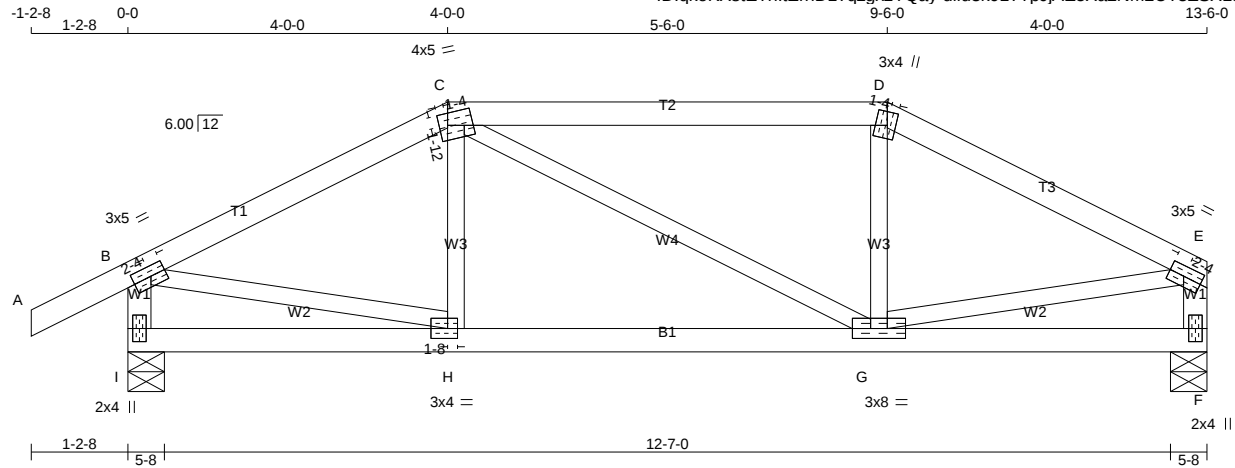

TOTAL WEIGHT = 50 lb

| LUMBER            |        |      |        | DESCR. |  |
|-------------------|--------|------|--------|--------|--|
| N. L. G. A. RULES | CHORDS | SIZE | LUMBER |        |  |
| A - C             | 2x4    | DRY  | No.2   | SPF    |  |
| C - D             | 2x4    | DRY  | No.2   | SPF    |  |
| D - E             | 2x4    | DRY  | No.2   | SPF    |  |
| I - B             | 2x4    | DRY  | No.2   | SPF    |  |
| F - E             | 2x4    | DRY  | No.2   | SPF    |  |
| I - F             | 2x4    | DRY  | No.2   | SPF    |  |

|          |     |     |      |     |
|----------|-----|-----|------|-----|
| ALL WEBS | 2x3 | DRY | No.2 | SPF |
| EXCEPT   |     |     |      |     |

DRY: SEASONED LUMBER.

**PLATES (table is in inches)**

| JT | TYPE    | PLATES | W   | LEN | Y    | X    |
|----|---------|--------|-----|-----|------|------|
| B  | TMVW-t  | MT20   | 3.0 | 5.0 | 1.50 | 2.25 |
| C  | TTWW-m  | MT20   | 4.0 | 5.0 | 1.75 | 1.25 |
| D  | TTW+m   | MT20   | 3.0 | 4.0 | 2.00 | 1.25 |
| E  | TMVW-t  | MT20   | 3.0 | 5.0 | 1.50 | 2.25 |
| F  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |
| G  | BMVWW-t | MT20   | 3.0 | 8.0 |      |      |
| H  | BMVWW-t | MT20   | 3.0 | 4.0 | 1.50 | 1.50 |
| I  | BMV1+p  | MT20   | 2.0 | 4.0 |      |      |

**DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER**

| BEARINGS       |      | FACTORED       |     | MAXIMUM FACTORED |      | INPUT |      | REQRD |    |
|----------------|------|----------------|-----|------------------|------|-------|------|-------|----|
| GROSS REACTION |      | GROSS REACTION |     | GROSS REACTION   |      | BRG   |      | BRG   |    |
| JT             | VERT | HORZ           | JT  | VERT             | HORZ | JT    | VERT | HORZ  | JT |
| I              | 799  | 0              | 799 | 0                | 0    | 5-8   | 1-8  |       |    |
| F              | 692  | 0              | 692 | 0                | 0    | 5-8   | 1-8  |       |    |

**UNFACTORED REACTIONS**

| JT | 1ST LCASE | SNOW    | LIVE  | PERM.LIVE | WIND  | DEAD    | SOIL  |
|----|-----------|---------|-------|-----------|-------|---------|-------|
| I  | 557       | 411 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 147 / 0 | 0 / 0 |
| F  | 484       | 345 / 0 | 0 / 0 | 0 / 0     | 0 / 0 | 139 / 0 | 0 / 0 |

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I, F

**BRACING**

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.  
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

**LOADING**

TOTAL LOAD CASES: (4)

| CHORDS |                           |                           |               | WEBS                 |       |                           |               |
|--------|---------------------------|---------------------------|---------------|----------------------|-------|---------------------------|---------------|
| MEMB.  | MAX. FACTORED FORCE (LBS) | FACTORED VERT. LOAD (PLF) | MAX. CSI (LC) | MAX. UNBRACED LENGTH | MEMB. | MAX. FACTORED FORCE (LBS) | MAX. CSI (LC) |
| FR-TO  |                           | FROM TO                   |               |                      | FR-TO |                           |               |
| A-B    | 0 / 24                    | -84.3 -84.3               | 0.10 (1)      | 10.00                | H-C   | -48 / 63                  | 0.02 (4)      |
| B-C    | -788 / 0                  | -84.3 -84.3               | 0.18 (1)      | 6.25                 | C-G   | 0 / 3                     | 0.00 (4)      |
| C-D    | -705 / 0                  | -84.3 -84.3               | 0.33 (1)      | 6.25                 | G-D   | -45 / 65                  | 0.02 (4)      |
| D-E    | -793 / 0                  | -84.3 -84.3               | 0.18 (1)      | 6.25                 | B-H   | 0 / 718                   | 0.16 (1)      |
| I-B    | -770 / 0                  | 0.0 0.0                   | 0.08 (1)      | 7.81                 | G-E   | 0 / 722                   | 0.16 (1)      |
| F-E    | -661 / 0                  | 0.0 0.0                   | 0.07 (1)      | 7.81                 |       |                           |               |
| I-H    | 0 / 0                     | -18.2 -18.2               | 0.09 (4)      | 10.00                |       |                           |               |
| H-G    | 0 / 703                   | -18.2 -18.2               | 0.16 (1)      | 10.00                |       |                           |               |
| G-F    | 0 / 0                     | -18.2 -18.2               | 0.09 (4)      | 10.00                |       |                           |               |

**DESIGN CRITERIA**

SPECIFIED LOADS:  
TOP CH. LL = 25.6 PSF  
DL = 3.0 PSF  
BOT CH. LL = 0.0 PSF  
DL = 7.3 PSF  
TOTAL LOAD = 35.9 PSF

SPACING = 24.0 IN.CIC

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:  
- PART 9 OF BCBC 2018, NBC-2019AE  
- PART 9 OF OBC 2012 (2019 AMENDMENT)  
- CSA 086-14  
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.45")  
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.02")  
ALLOWABLE DEFL.(TL) = L/360 (0.45")  
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.04")

CSI: TC=0.33/1.00 (C-D:1), BC=0.16/1.00 (G-H:1), WB=0.16/1.00 (E-G:1), SSI=0.18/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10  
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

| PLATE | GRIP(DRY) |       | SHEAR |       | SECTION |       |
|-------|-----------|-------|-------|-------|---------|-------|
|       | (PSI)     | (PLI) | (PSI) | (PLI) | (PSI)   | (PLI) |
| MT20  | 650       | 371   | 1747  | 788   | 1987    | 1873  |

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (H) (INPUT = 0.90 )  
JSI METAL= 0.26 (B) (INPUT = 1.00 )



APRIL 24, 2023

READ ALL NOTES ON THIS PAGE AND ON THE ENGINEERING NOTES: TRUSSES. THE NOTE PAGE IS AN INTEGRAL PART OF THIS DRAWING AS IT CONTAINS SPECIFICATIONS AND CRITERIA USED IN THE DESIGN OF THIS COMPONENT.

CITY OF RICHMOND HILL  
BUILDING DIVISION


05/24/2023

KOTT

RECEIVED

Per: joshua.nabua

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:59 2023 Page 1  
ID:qkoKX8tEThltErnD1?qzgxzYQay-5uDGG4AfmnxALKol5IZcvG1dvznz4dHC8?\_Jj5zOUJY



TOTAL WEIGHT = 54 lb


JSI GRIP= 0.84 (D) (INPUT = 0.90 )  
JSI METAL= 0.17 (B) (INPUT = 1.00 )




|            |            |          |     |             |          |
|------------|------------|----------|-----|-------------|----------|
| JOB NAME   | TRUSS NAME | QUANTITY | PLY | JOB DESC.   | DRWG NO. |
| IM0423-072 | T16        | 1        | 1   | TRUSS DESC. |          |

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:16:59 2023 Page 1

ID:qkoKX8tEThltErnD1?qzgxzYQay-5uDG4AfmnxALKol5IzcvG1duzoF4dCC8?\_Jj5zOUJY

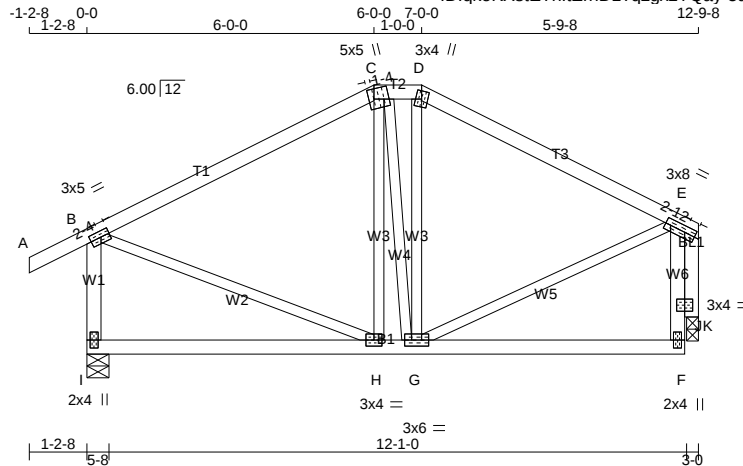

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:17:00 2023 Page 1  
ID:qkoKX8tEThltErnD1?zqgzxYQay-Z5neUQBHX430zUNUe?4rSTZqXN9gp4FLNfjsFXzOUJX



TOTAL WEIGHT = 57 lb

Per: joshua.nabua

Version 8.630 S Mar 22 2023 MiTek Industries, Inc. Fri Apr 21 14:17:00 2023 Page 1

ID:qkoKX8tEThltErnD1?qzgxzYQay-Z5neUQBHX430zUNUe?4rSTZqTN8Cp3TLNfjsFXzOUJX|



JSI GRIP= 0.90 (K) (INPUT = 0.90 )  
JSI METAL= 0.22 (F) (INPUT = 1.00 )

Per: joshua.nabua


### TOE-NAIL CAPACITY DETAILS

#### LATERAL AND WITHDRAWAL RESISTANCE OF BEARING ANCHORAGE BY TOE-NAILS

| NAIL TYPE      | Length<br>(in) | Diameter<br>(in) | LATERAL Resistance per nail<br>(Lbs.) |        | WITHDRAWAL Resistance per nail<br>(Lbs.) |        |
|----------------|----------------|------------------|---------------------------------------|--------|------------------------------------------|--------|
|                |                |                  | SPF                                   | D. FIR | SPF                                      | D. FIR |
| COMMON WIRE    | 3.00           | 0.144            | 122                                   | 139    | 30                                       | 42     |
|                | 3.25           | 0.144            | 127                                   | 144    | 32                                       | 45     |
|                | 3.50           | 0.160            | 152                                   | 173    | 38                                       | 52     |
| COMMON SPIRAL  | 3.00           | 0.122            | 96                                    | 108    | 26                                       | 36     |
|                | 3.25           | 0.122            | 97                                    | 108    | 28                                       | 40     |
|                | 3.50           | 0.152            | 142                                   | 161    | 36                                       | 50     |
| 3.25" Gun nail | 3.25           | 0.120            | 94                                    | 105    | 28                                       | 39     |

**Note:** If using truss with D. Fir lumber and SPF bearing plate, use tabulated SPF values in table.

| Nail type:     | Common wire                        | Common spiral | Common wire | Common spiral | Gun Nail |
|----------------|------------------------------------|---------------|-------------|---------------|----------|
| Diameter (in.) | 0.160                              | 0.152         | 0.144       | 0.122         | 0.120    |
| Length (in.)   | 3.50                               | 3.50          | 3.00        | 3.00          | 3.25     |
| <b>LUMBER</b>  | <b>MAXIMUM NUMBER OF TOE-NAILS</b> |               |             |               |          |
| 2x4 SPF        | 2                                  | 2             | 3           | 3             | 3        |
| 2x6 SPF        | 4                                  | 4             | 4           | 5             | 5        |
| 2x4 D. FIR     | 2                                  | 2             | 2           | 2             | 2        |
| 2x6 D. FIR     | 3                                  | 3             | 3           | 4             | 4        |

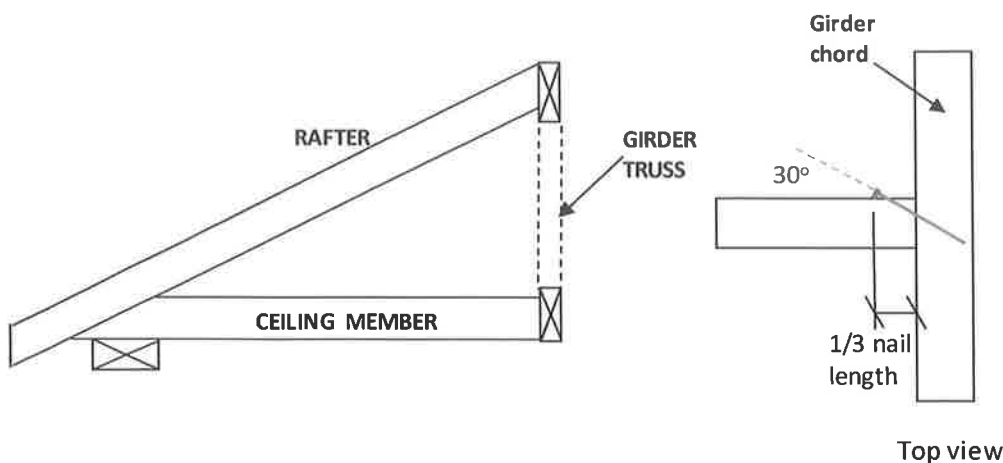


**Figure 1: Toe-Nailing Rafter / Ceiling Member to Girder Truss**



### TOE-NAIL CAPACITY DETAILS

Figure 2: Toe-Nail Anchorage to Bearing Plate for Uplift

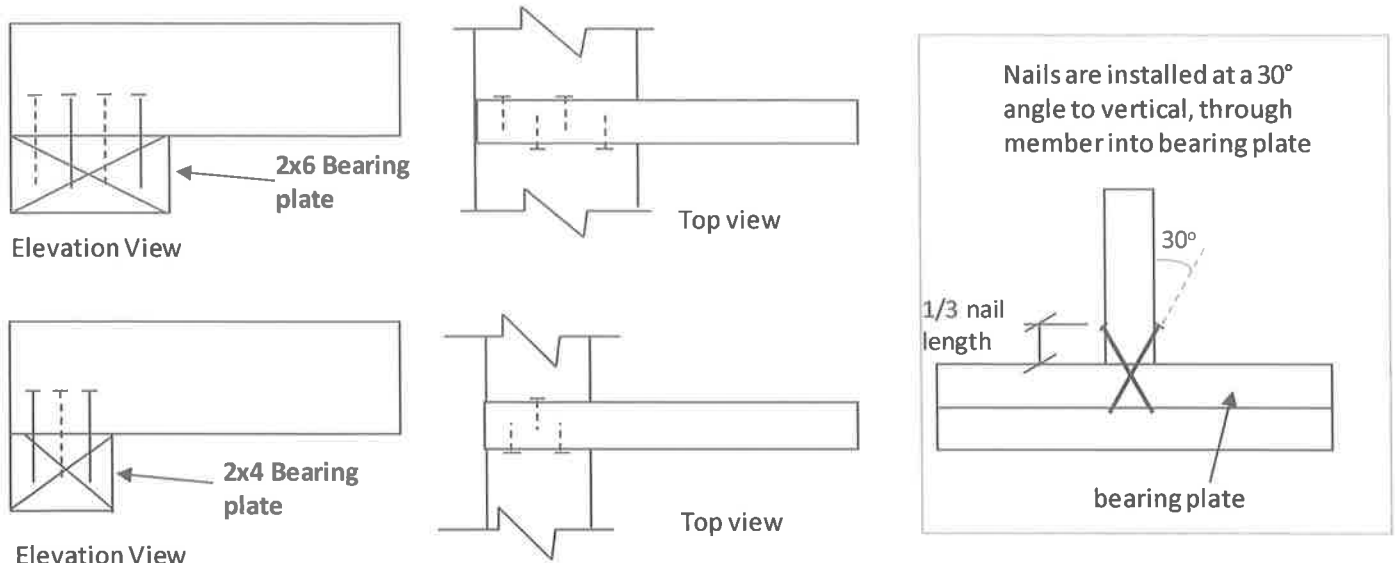

#### NOTES:

1. Rafter and ceiling members may be connected to top and bottom chords of girder truss by toe-nailing the members into the girder chords (see fig. 1), provided the factored vertical reactions of the supported members do not exceed the lateral resistance of the toe-nails. Mechanical connectors (hangers) are required if factored vertical reactions exceed the toe-nail capacity, or if the connection must resist horizontal loads (loads perpendicular to the face of girder or rafter).
2. Trusses, rafters or ceiling members may be anchored to the bearing plate with toe-nails (see fig. 2), provided that the factored uplift reactions due to **wind or earthquake loads** do not exceed the **withdrawal resistance of the toe-nails**. Mechanical anchors (tie-downs) are required for reactions that exceed the toe-nail withdrawal capacity. Toe-nail anchorage to bearing plates is **NOT** permitted if uplift reactions are generated from gravity loads (snow, floor live, dead).
3. Tabulated toe-nail resistances on page 1 are for **one** toe-nail. Multiply unit values by the number of nails used in the connection. Maximum number of nails in a connection shall not exceed the tabulated limits shown on page 1 for a given lumber size /species.
4. Nail values are based on specific gravity of  $G = 0.42$  (SPF) and  $G = 0.49$  (D. Fir).
5. Toe-nails shall be driven at approximately  $1/3$  the nail length from the edge of the joist/truss chord and driven at an angle of  $30^\circ$  to the grain of the member.
6. For wind / earthquake loads, tabulated lateral resistances may be multiplied by 1.15 ( $K_D$  factor). No increases are permitted for tabulated withdrawal resistances.
7. Lumber must be dry ( $< 19\%$  moisture content) at the time of nail installation.
8. Nail values in this table comply with CSA O86-19, Clause 12.9.








# STANDARD DETAIL MSD2015-J

Issued: MARCH 17, 2021

Expiry: APRIL 30, 2023




## STANDARD HIP END FRAMING

### PLAN VIEW

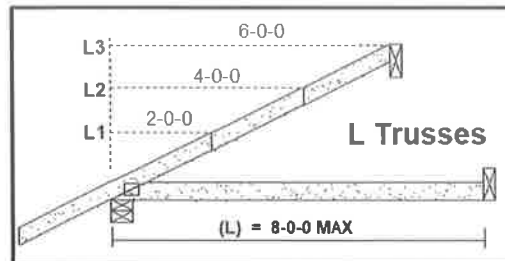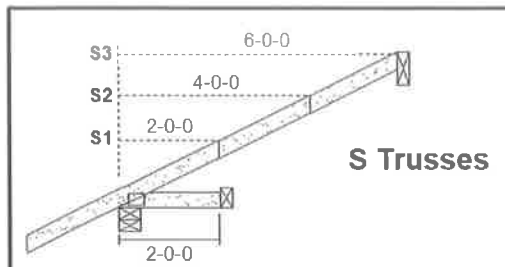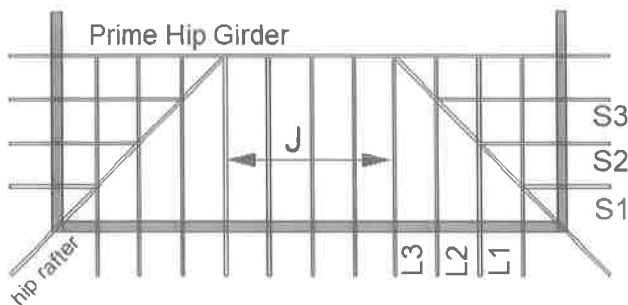

#### Specified Load Rating:


|                    |                  |
|--------------------|------------------|
| Top chord Live:    | 51.0 PSF or less |
| Top chord Dead:    | 6.0 PSF or less  |
| Bottom chord Live: | 0.0 PSF          |
| Bottom chord Dead: | 7.3 PSF or less  |



#### CANTILEVER DETAIL "C"

| SLOPE | MAX CANT. | WEDGE PLATE | WEDGE SIZE |
|-------|-----------|-------------|------------|
| 3/12  | 17"       | 3 X 5       | 2 X 3      |
| 4/12  | 14"       | 3 X 5       | 2 X 3      |
| 5/12  | 12"       | 3 X 5       | 2 X 4      |
| 6/12  | 10"       | 3 X 5       | 2 X 4      |
| 7/12  | 9"        | 3 X 5       | 2 X 6      |
| 8/12  | 8 5/8"    | 3 X 5       | 2 X 6      |
| 9/12  | 8"        | 3 X 5       | 2 X 6      |
| 10/12 | 7 5/8"    | 3 X 5       | 2 X 6      |

### J Trusses

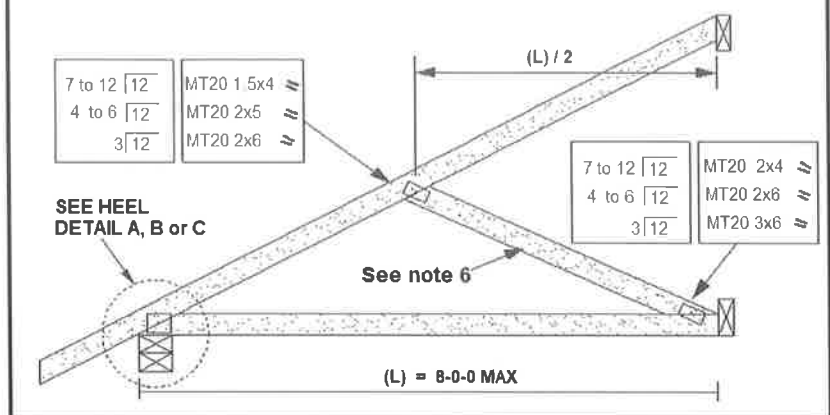

PEO

Certificate No. 10889485

#### NOTES:

1. This detail is valid only for projects conforming to **PART 9 NBCC 2015** that do not require a wind analysis to be incorporated into the design of the trusses.
2. Overhang length shall not exceed 24 inches.
3. All lumber shall be 2x4 SPF (or D-Fir) DRY No. 2 grade or better.
4. All plates specified are MITEK MT20, pressed into both faces of each truss. Heel plates of all trusses shall conform to heel details 'A', 'B' or 'C'.
5. Diagonal hip rafter design shall conform to section 9.23.14.6 of NBCC 2015.
6. For 6.0 ft. or less span, diagonal web on truss 'J' is optional. Girder design must reflect choice of partial jack ('J' with diagonal web) or open jack ('J' without diagonal web)
7. All truss-to-rafter and truss-to-truss connections shall be specified as per MITEK standard detail 'MSD2015-H: Toe-Nail Capacity Details'

CITY OF RICHMOND HILL  
BUILDING DIVISION

05/24/2023

RECEIVED

Per: joshua.nabua



## STANDARD DETAIL MSD2015-K

Issued: MARCH 1, 2022

Expiry: APRIL 30, 2024

## STANDARD GABLE END DETAIL



## Specified Load Rating:

|                    |          |
|--------------------|----------|
| Top chord Live:    | 51.0 PSF |
| Top chord Dead:    | 6.0 PSF  |
| Bottom chord Live: | 0.0 PSF  |
| Bottom chord Dead: | 7.3 PSF  |


See note 5 for bracing  
all web members 6.0 ft.  
in length or greater

## Lumber Sizes:


|               |            |
|---------------|------------|
| Top chord:    | 2x4        |
| Webs:         | 2x4 or 2x3 |
| Bottom chord: | 2x4 or 2x3 |

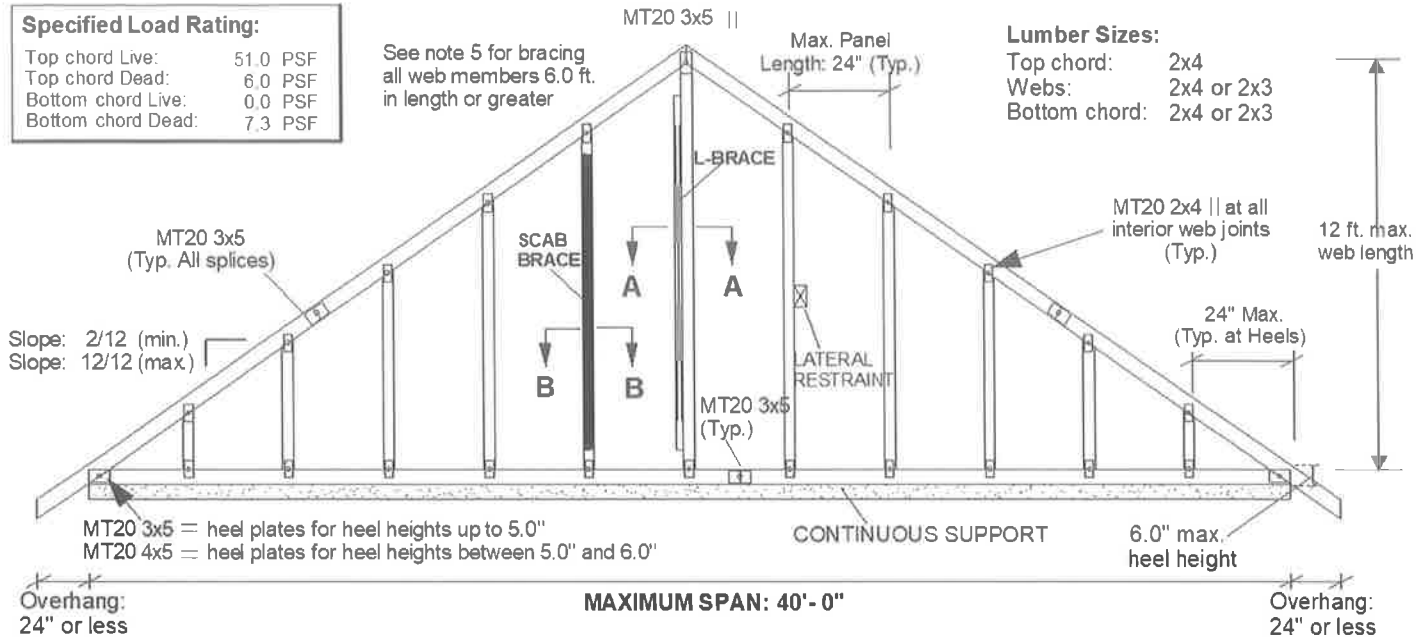SCAB BRACE DETAIL  
(Section B-B)

SPF No. 2 DRY Scab, same  
size as web. Scab brace  
must cover 90% of web length



- + 0.122"x3.0" nail driven from front face
- o 0.122"x3.0" nail driven from back face

2x4 SPF No. 2  
DRY L-BraceL BRACE DETAIL  
(Section A-A)

Fasten L-Brace to narrow edge of web with one row of 0.122" x 3.0" nails spaced at 6.0" c/c along entire length of web. Brace must cover 90% of the web length. Respect a 2.5" minimum end distance.

## Notes:

1. This detail is only valid for projects conforming to **Part 9, NBCC 2015** that do not require a wind analysis to be incorporated into the design of the truss.
2. This detail is for vertical (gravity) load rating of the truss only. Truss must be continuously supported over the entire length of bottom chord.
3. Maximum web length not to exceed 12.0 ft. Spacing of gable stud webs in the truss not to exceed 24 inches cc.
4. Splice joints shall not be located in the first panel adjacent to the heel joint or peak joint.
5. Lateral restraint required at half-length of all webs over 6.0 ft. long. Alternatively install an L-Brace or scab brace as shown above. Scab braces shall be limited to 10 ft. long webs or less.
6. All plates are MITTEK MT20 pressed into both faces of truss.
7. All lumber to be SPF (or D-Fir) DRY and of No.2 grade or better.
8. Additional building bracing is typically installed to brace the face of the end wall assembly. See BCSI Canada 'Building Designer Responsibilities for Gable End Frame Bracing' for additional information on building bracing for gable-end assemblies.

PEO  
Certificate No. 10889485



05/24/2023

RECEIVED

Per: joshua.nabua

# Engineering Notes: Trusses



PLEASE READ ALL NOTES PRIOR TO INSTALLATION OF THE COMPONENT

## RESPONSIBILITIES

THE UNDERSIGNED ENGINEER IS ONLY RESPONSIBLE FOR THE STRUCTURAL INTEGRITY OF THIS BUILDING COMPONENT FOR THE CONDITIONS AND LOADS SHOWN ON CALCULATION PAGE. THE STRUCTURAL INTEGRITY OF THE BUILDING AND THE VERIFICATION OF THE DIMENSIONS AND THE DESIGN LOADS USED ARE THE RESPONSIBILITY OF THE BUILDING DESIGNER. THE UNDERSIGNED ENGINEER DISCLAIMS ANY RESPONSIBILITY FOR DAMAGES AS A RESULT OF FAULTY OR INCORRECT INFORMATION, SPECIFICATION AND/OR DESIGNS FURNISHED TO THE ENGINEER.

IT IS THE RESPONSIBILITY OF KOTT Inc. TO ENSURE THAT TRUSSES ARE MANUFACTURED IN CONFORMANCE WITH THESE DESIGNS AND WITH THE SPECIFICATIONS OUTLINED BELOW. THE UNDERSIGNED ENGINEER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

## DESIGN INFORMATION

THIS DESIGN IS FOR AN INDIVIDUAL BUILDING COMPONENT AND HAS BEEN BASED ON INFORMATION PROVIDED BY KOTT DESIGN.

1. THE BUILDING USE AND OCCUPANCY TYPE IS AS INDICATED ON THE DRAWING.
2. GEOMETRY OF THE TRUSS AND DIMENSIONS INDICATED ON THE DRAWING ARE IDENTICAL TO THOSE OF THE INSTALLED TRUSS.
3. THE TRUSS LOADING INTENSITY AND DISTRIBUTION AS WELL AS LOAD TRANSFER MECHANISM IS THAT INDICATED ON THE DRAWING. NO BUILDINGS, TREES, PARAPETS OR OTHER PROJECTIONS HIGHER THAN THE ROOF FOR WHICH THE TRUSSES ARE USED ARE LOCATED WITHIN A DISTANCE LESS THAN TEN (10) TIMES THE DIFFERENCE IN HEIGHT, OR FIVE METERS (16 FT) WHICHEVER IS GREATER, UNLESS THE DRAWING INDICATES THAT THE SNOW DRIFTING HAS BEEN TAKEN INTO ACCOUNT.
4. THE TRUSSES ARE TO BE SUPPORTED AT THE BEARING POINTS INDICATED AND ANCHORED TO THE SUPPORTS WHERE CONSIDERED NECESSARY BY THE DESIGNER OF THE OVERALL STRUCTURE. BEARING SIZES SHOWN ARE THE MINIMUM REQUIRED TO PREVENT CRUSHING OF THE TRUSS MEMBERS AND DO NOT NECESSARILY TAKE INTO ACCOUNT STABILITY OF THE OVERALL BUILDING STRUCTURE. ELEVATION OF BEARINGS MUST BE CAREFULLY CHECKED AND SHIMMED TO ALIGNMENT FOR SOLID BEARINGS. ADEQUATE WOOD TRUSS BEARING IS THE RESPONSIBILITY OF THE BUILDING DESIGNER.

## CODE

TRUSSES ARE DESIGNED IN CONFORMANCE WITH THE RELEVANT SECTIONS OF THE NATIONAL BUILDING CODE OF CANADA OR THE CANADIAN CODE FOR FARM BUILDINGS, WHICHEVER APPLIES TO THE BUILDING TYPE INDICATED ON THE DRAWING, THE ONTARIO BUILDING CODE, TPIC AND CANADIAN STANDARDS ASSOCIATION GUIDELINES.

## HANDLING, INSTALLATION AND BRACING

1. THE TRUSSES MUST BE HANDLED AND INSTALLED BY A QUALIFIED PROFESSIONAL AS PER THE SUPPLIED DOCUMENT TITLED INFORMATION FOR TRUSS INSTALLERS AND THE BCSI-B1 AND BCSI-B3 SUMMARY SHEETS.
2. THE COMPRESSION CHORDS ARE Laterally Braced by Continuous Rigid Diaphragm Sheathing or as Specified on the Drawing.
3. TEMPORARY AND PERMANENT BRACING MUST BE INSTALLED AS INDICATED ON THE TRUSS DRAWING AND ACCORDING TO THE BCSI-B1 AND BCSI-B3 SUMMARY SHEETS. BRACING FOR THE LATERAL STABILITY OF THE TRUSS IS TO BE PROVIDED BY THE BUILDING DESIGNER.
4. IT IS RECOMMENDED THAT A PROFESSIONAL ENGINEER'S ADVICE BE OBTAINED FOR THE BRACING OF TRUSSES SPANNING MORE THAN 12.37M (40'-7").

CITY OF RICHMOND HILL  
BUILDING DIVISION

05/24/2023

RECEIVED  
Per: Joshua Nabua  
Last Revised January 13, 2023