

Customer Colours

inventory home_1_1/
Project: Wallaceton
Unit: 1, Phase: 1
Model: 28-2878 CRN B The Westwood

Created: 2/24/2021 11:35:25

Locked:

Closed:

14 of 58

Kitchen	
Cabinet Colour/Style	9189 Classic II-CAMDEN-MOONLIGHT-PAINT MDF ***UPG***
Countertop	8613 Group 6-Quartz-Caesarstone-WHITE ATTICA # 5143-3/4 inch with built-up edge ***6***
Countertop Edge	4005 DOUBLE MITRE 1 1/2 INCH ***UPG***
Cabinet Hardware	
Island Cabinet Colour/Style	9147 12817 BN NICKEL-HARDWARE ***2***
	9189 Classic II-CAMDEN-MOONLIGHT-PAINT MDF ***UPG***
Island Countertop	8613 Group 6-Quartz-Caesarstone-WHITE ATTICA # 5143-3/4 inch with built-up edge ***6***
Backsplash	8329 KV.CR.CG.Y.0212.GL-Cristallo Glass Mosaic-Charcoal Grey Glossy-02x12 ***5***
Backsplash Grout	7704 Grout-(19) Pearl Gray ***STD***
Backsplash Tile Pattern	3070 HORIZONTAL STACKED ***STD***

HoodFan	8894 SCB51430-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-STAINLESS STEEL *****
Comment	909

P 44

Servery Opt. Uppers	
Cabinet	9189 Classic II-CAMDEN-MOONLIGHT-PAINT MDF ***UPG***
Cabinet Hardware	9147 12817 BN NICKEL-HARDWARE ***2***
Comment	

Kitchen / Breakfast	
Flooring	9064 White Oak UVF-Vintage Northern Solid Sawn : White Oak : Sculpted UVF-APOLLO-3/4 inch x 5 inch ***10***
Floor Tile Grout	1111 N/A *****
Floor Tile Pattern	1111 N/A *****

Comment	
---------	--

Foyer	
Flooring	9057 OV.ET.IGY.1224.PL-Eterna-Imperial Grey Polished-12 x 24

S8P30

Customer Colours

inventory home_1_1/
Project: Wallaceton
Unit: 1, Phase: 1
Model: 28-2878 CRN B The Westwood

Created: 2/24/2021 11:35:25

Locked:

Closed:

15 of 58

Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3040	FRONT TO BACK ***STD***

Comment

Laundry Room		S9P31
Flooring	5695	NY.RG.DGR.1224.PL-Regal Polished-Dark Grey-12 x 24 See Tile Direction on Sketch 9 Page 31 ***4***
Floor Tile Grout	2221	Grout-(47) Charcoal ***UPG***
Floor Tile Pattern	3050	SIDE TO SIDE ***STD***

Comment

Laundry Room Opt.		
Cabinet - Uppers	9203	Classic I1-MANCHESTER-ORCHID-PAINT MDF ***UPG***
Cabinet Hardware	2076	181-HARDWARE ***STD***
Comment		

Mud Room		S8P30
Flooring	9057	OV.ET.IGY.1224.PL-Eterna-Imperial Grey Polished-12 x 24 See Tile Direction on Sketch 8 Page 30 ***5***
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3040	FRONT TO BACK ***STD***

Comment

Powder Room		S8P30
Flooring	9057	OV.ET.IGY.1224.PL-Eterna-Imperial Grey Polished-12 x 24 See Tile Direction on Sketch 8 Page 30 ***5***
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3040	FRONT TO BACK ***STD***

Customer Colours

inventory home_1_1/
Project: Wallaceton
Unit: 1, Phase: 1
Model: 28-2878 CRN B The Westwood

Created: 2/24/2021 11:35:25

Locked:

Closed:

16 of 58

Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		

Dining Room / Hall	9066	Vintage Red Oak : Solid Sawn Sculpted UVF-OPHILIA-3/4 inch x 5 inch ****5***
Flooring		
Comment		

Great Room	9066	Vintage Red Oak : Solid Sawn Sculpted UVF-OPHILIA-3/4 inch x 5 inch ****5***
Flooring		
Comment		

Upper Hall	9066	Vintage Red Oak : Solid Sawn Sculpted UVF-OPHILIA-3/4 inch x 5 inch ****5***
Flooring		
Comment		

Opt. Finished Basement (Rec) Room/Hall	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***
Flooring		
Comment		

Master Bedroom	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***
Flooring		
Comment		

Bedroom 2	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***
Flooring		
Comment		

Bedroom 3		
-----------	--	--

Customer Colours

inventory home_1_1/
Project: Wallaceton
Unit: 1, Phase: 1
Model: 28-2878 CRN B The Westwood

Created: 2/24/2021 11:35:25

Locked:

Closed:

17 of 58

Flooring	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***
Comment		

Bedroom 4	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***
Flooring	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***
Comment		

Ensuite 4	9203	Classic II-MANCHESTER-ORCHID-PAINT MDF ***1JPG***
Cabinet Colour/Style	9203	Classic II-MANCHESTER-ORCHID-PAINT MDF ***1JPG***
Countertop	8605	Group 3-Quartz-Caesarstone-CONCRETE # 2003-3/4 inch with built-up edge ***4***
Countertop Edge	4007	GROUP 2 TO 7 - DOUBLE MITRE 1 1/2 INCH ***3***

Cabinet Hardware	9135	117 BN NICKEL-HARDWARE ***1***
Floor Tile	5617	NY.RG.DGR.1212-Regal-Polished Dark Grey-12 x 12 ***3***
Floor Tile Grout	2221	Grout-(47) Charcoal ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***

Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Comment		

Customer Colours

295

inventory home_1_1/
Project: Wallaceton
Unit: 1, Phase: 1
Model: 28-2878 CRN B The Westwood

Created: 2/24/2021 11:35:25

Locked:

Closed:

18 of 58

Master Ensuite

Cabinet Colour/Style	9189	Classic II-CAMDEN-MOONLIGHT-PAINT MDF ***UPG***
Countertop	8897	Group 4-Quartz-Caesarstone-ORGANIC WHITE # 4600-3/4 inch with built-up edge ***4***
Countertop Edge	4007	GROUP 2 TO 7 - DOUBLE MITRE 1 1/2 INCH ***3***
Cabinet Hardware	9135	117 BN NICKEL-HARDWARE ***1***
Floor Tile	9057	OV.ET.IGY.1224.PL-Eterna-Imperial Grey Polished-12 x 24 See Tile Direction on Sketch 9 Page 31 ***5***
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3050	SIDE TO SIDE ***STD***

Shower Floor Tile	8642	WB.PR.TGR.1212.GL-Penny Rounds-Tender Grey Glossy-12 x 12 ***6***
Shower Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Shower Floor Tile Pattern	1111	N/A *****

Shower Wall Tile	9057	OV.ET.IGY.1224.PL-Eterna-Imperial Grey Polished-12 x 24 See Tile Direction on Sketch 9 Page 31 ***5***
Shower Wall Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***

Shower Jamb(s) and Sill(s)	8925	Shower Jamb / Sill-Sky Grey (Light Grey) ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		

Shared Ensuite

Cabinet Colour/Style	9203	Classic II-MANCHESTER-ORCHID-PAINT MDF ***UPG***
Countertop	8605	Group 3-Quartz-Caesarstone-CONCRETE # 2003-3/4 inch with built-up edge ***4***
Countertop Edge	4007	GROUP 2 TO 7 - DOUBLE MITRE 1 1/2 INCH ***3***
Cabinet Hardware	9135	117 BN NICKEL-HARDWARE ***1***
Flooring	5695	NY.RG.DGR.1224.PL-Regal Polished-Dark Grey-12 x 24 See Tile Direction on Sketch 9 Page 31 ***4***

Customer Colours

inventory home_1_1/
Project: Wallaceton
Unit: 1, Phase: 1
Model: 28-2878 CRN B The Westwood

Created: 2/24/2021 11:35:25

Locked:

Closed:

19 of 58

Floor Tile Grout	2221	Grout-(47) Charcoal ***UPG***
Floor Tile Pattern	3040	FRONT TO BACK ***STD***

Wall Tile	8978	QT.CD.STG.0416.BR.PT-Colour and Dimension Bright DECOR-Sterling Grey (PETAL)-4 x 16 ***4***
Wall Tile Grout	2221	Grout-(47) Charcoal ***UPG***
Shared Ensuite Floor Tile Pattern	3070	HORIZONTAL STACKED ***STD***

Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		

Opt. Finished Basement Bathroom

Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***

Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Cabinet Colour/Style	9203	Classic II-MANCHESTER-ORCHID-PAINT MDF ***UPG***
Countertop	8603	Group 3-Quartz-Caesarstone-STONE GREY#4030-3/4 inch with built-up edge ***3***
Countertop Edge	4007	GROUP 2 TO 7 - DOUBLE MITRE 1 1/2 INCH ***3***

Cabinet Hardware	9135	117 BN NICKEL-HARDWARE ***1***
Flooring	5617	NY.RG.DGR.1212-Regal-Polished Dark Grey-12 x 12 ***3***
Floor Tile Grout	2221	Grout-(47) Charcoal ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

Customer Colours

inventory home_1_1/
Project: Wallaceton
Unit: 1, Phase: 1
Model: 28-2878 CRN B The Westwood

Created: 2/24/2021 11:35:25

Locked:

Closed:

20 of 58

Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD**
Comment		

Great Room Fireplace		
Type	8869	Majestic MERC32 ***STD***
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***
Surround Opt.	1111	N/A *****
Comment		

P 32

Basement Stairs		
Type	1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***
Colour	7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***
Handrail/Pickets/Post Colours	1111	N/A *****
Carpet	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***
Custom Stain/Paint	1111	N/A *****
Comment		

Basement Stairs Landing(s)		
Flooring	1111	N/A *****
Comment		

Main Stairs		
Type	1712	Oak Stairs ***STD MAIN STAIRS***
Colour	7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Posts Type	8148	Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)-BLACK ***2***
Handrail/Pickets/Posts Colour	7761	Oak Grade-Stain handrail, stringers, treads, risers, nosing post

Customer Colours

295

inventory home_1_1/
Project: Wallaceton
Unit: 1, Phase: 1
Model: 28-2878 CRN B The Westwood

Created: 2/24/2021 11:35:25
Locked:
Closed:

21 of 58

Custom Stain/Paint	1111	N/A *****
Comment		

Main Stairs Landing(s)	1111	N/A *****
Flooring		
Comment		

Throughout	1717	22-Wall-WARM GREY ***STD***
Walls - Paint Colour	1079	500 Series-Underpad ***STD***
Underpad	2232	Metal Thresholds ***STD***
Thresholds	5796	Decora White Switches and Plugs ***STD***
Switches and Plug	8705	4 ¼ Baseboard and 2 ¾ Casings ***STD***
Trim Size	1716	Trim-WHITE ***STD***
Trim - Paint Colour	Comment	

Purchaser:	INVENTORY MODEL	MARCH 2/21	MARILYN ROSEN	MARCH 2/21
	inventory home_1_1	Date	Decor Consultant	Date
Purchaser:		Date	Wallaceton	Date Approved
			<i>m.rosen</i>	03-12-2021
			APPROVED -	



Sales Selection Sheet
Wallaceton

22 of 58

PURCHASER: inventory home_1_1

TEL:

LOT / UNIT 1	PHASE 1	MODEL 28-2878 CRN B The Westwood
-----------------	------------	-------------------------------------

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

APPLIANCES

1	- SEE APPLIANCE SPECS PAGES 45-58	Qty: 1
54,503	Note:	
2	- DELETE AND CREDIT CYCLONE 36" HOODFAN WALL MOUNT CHIMNEY SCB50036 AS PER PRE-SSS PAGE 2 OF 13	Qty: 1
54,504	Note:	
3	KITCHEN - SUPPLY AND INSTALL 30" CYCLONE STAINLESS CHIMNEY HOODFAN MODEL SCB51430	Qty: 1
54,988	Note: SPEC PAGE 44	

CABINETRY

4	- CABINETRY - 03G-CABINET HARDWARE UPGRADE II DISPLAY BOARD; PER KITCHEN ; PRICE ALL THE SAME FOR ALL	Qty: 1
189,300		
54,506	Note:	
*5	- CABINETRY - 12B-POTS AND PANS DRAWERS (WIDTH MIN. 60CM/MAX. 90CM) (SIZE SUBJECT TO FLOOR PLAN) - UPGRADE 3 ON EACH SIDE OF 36" STOVE	Qty: 2
189,007		
54,514	Note: SEE SKETCH # 8 PAGE 30	
*6	- CABINETRY - 04B-DUMMY DOOR FOR BASE FINISHED ENDS AND BACK PANELS (EACH) - UPGRADE 3 TWO ON EACH SIDE OF ISLAND AND 4 UNDER ISLAND BREAKFAST BAR	Qty: 8
188,983		
54,515	Note: SEE SKETCH # 8 PAGE 30	
7	- CABINETRY - 32H-BASE CABINET FOR UNDER-COUNTER MICROWAVE WITH DRAWER BELOW (FINISHED INTERIOR) (SUPPLY SPECS) - UPGRADE 3	Qty: 1
189,218		
54,516	Note: SEE SKETCH # 8 PAGE 30 24" MICRODRAWER SPECS PAGES 49 - 50	
*8	SHARED BATHROOM - CABINETRY - 09D-VANITY TOP DRAWER/LOWER DRAWER PRICE PER DRAWER (INCLUDES FALSE DRAWER) - UPGRADE 3 ON EACH SIDE OF SIDE IN SHARED BATHROOM	Qty: 2
189,118		
54,517	Note: SKETCH # 9 PAGE 31	
*9	- CABINETRY - 03G-CABINET HARDWARE UPGRADE II DISPLAY BOARD; PER VANITY ; PRICE ALL THE SAME FOR ALL LINES - MASTER ENSUITE, ENSUITE 4, SHARED BATH, FINISHED BASEMENT BATH	Qty: 4
189,301		
54,985	Note:	

CABINETRY / ELECTRICAL

10	SERVERY ONLY - OPTIONAL UPPER CABINETS IN SERVERY CLASSIC II	Qty: 1
54,508	Note: SKETCH # 8 PAGE 30	

TAX#:1

PREPARED BY: Bei Liu

PE 746-1

Invoice.rpt 28may19

Initials:



Sales Selection Sheet

Wallaceton

23 of 58

PURCHASER: inventory home_1_1

TEL:

LOT / UNIT 1	PHASE 1	MODEL 28-2878 CRN B The Westwood
-----------------	------------	-------------------------------------

CABINERY / ELECTRICAL

11	LAUNDRY ROOM - OPTIONAL - UPPER CABINET - CLASSIC II -LAUNDRY ROOM-UPGRADE 3	Qty: 1
54,509	Note: SKETCH # 9 PAGE 31	
12	MASTER ENSUITE - CABINERY- VANITY-CLASSIC II- ENSUITE MASTER - UPGRADE 3	Qty: 1
54,510	Note:	
13	SHARED BATHROOM - CABINERY- VANITY-CLASSIC II -SHARED BATHROOM -UPGRADE 3	Qty: 1
54,511	Note:	
14	FINISHED BASEMENT BATHROOM - CABINERY- VANITY- CLASSIC II- FINISHED BASEMENT BATHROOM - UPGRADE 3	Qty: 1
54,512	Note:	
15	KITCHEN/SERVERY - OPTIONAL- LOWER VALANCE TRIM WITH LIGHT INCLUDING SWITCH (LUMINIZ LED SLIMLINE STRIP LIGHT) - UPGRADE 1 TO INLCUDE VALANCE AND LIGHT FOR SERVERY AREA	Qty: 1
54,513	Note:	
16	ENSUITE 4 - CABINERY- VANITY- CLASSIC II -ENSUITE 4 UPGRADE 3	Qty: 1
54,981	Note:	

CERAMICS

17	KITCHEN/SERVERY - OPTIONAL- BACKSPASH- UPGRADE 5 FOR KITCHEN AND SERVERY	Qty: 1
54,518	Note:	
*18 189,383	- CERAMICS - ADDITIONAL BACKSPASH DUE TO INSTALL CHIMNEY HOODFAN IN KITCHEN - KITCHEN - UPGRADE 5	Qty: 1
54,519	Note:	
19	FOYER - CERAMICS- FLOOR TILE- UPGRADE 5- FOYER	Qty: 1
54,520	Note: SEE SKETCH # 8 PAGE 30 FOR 12 X 24" TILE INSTALL DIRECTION	
20	FOYER - CERAMICS- GROUT FOR FLOOR TILE UPGRADE GROUT- FOYER	Qty: 1
54,521	Note:	
21	POWDER ROOM - CERAMICS - FLOOR TILE- UPGRADE 5 - POWDER ROOM	Qty: 1
54,522	Note: SEE SKETCH # 8 PAGE 30 FOR 12 X 24" TILE INSTALL DIRECTION	

TAX#:1

PREPARED BY: Bei Liu

PE 746-2

Invoice.rpt 28may19

Initials:



Sales Selection Sheet
Wallaceton

24 of 58

PURCHASER: inventory home_1_1

TEL:

LOT / UNIT	PHASE	MODEL
1	1	28-2878 CRN B The Westwood

CERAMICS

22	POWDER ROOM - CERAMICS- GROUT FOR FLOOR TILE- UPGRADE GROUT - POWDER ROOM	Qty: 1
54,523	Note:	
23	MUD ROOM - CERAMICS- FLOOR TILE- UPGRADE 5- MUD ROOM	Qty: 1
54,524	Note: SEE SKETCH # 8 PAGE 30 FOR 12 X 24" TILE INSTALL DIRECTION	
24	MUD ROOM - CERAMICS- GROUT FOR FLOOR TILE- UPGRADE GROUT- MUDROOM	Qty: 1
54,525	Note:	
25	LAUNDRY ROOM - CERAMICS- FLOOR TILE- UPGRADE 4- LAUNDRY ROOM	Qty: 1
54,526	Note: SEE SKETCH # 9 PAGE 31 FOR 12 X 24" TILE INSTALL DIRECTION	
26	LAUNDRY ROOM - CERAMICS- GROUT FOR FLOOR TILE- UPGRADE GROUT- LAUNDRY ROOM	Qty: 1
54,527	Note:	
27	MASTER ENSUITE - CERAMICS- FLOOR TILE - UPGRADE 5 ENSUITE MASTER	Qty: 1
54,528	Note: SEE SKETCH # 9 PAGE 31 FOR 12 X 24" TILE INSTALL DIRECTION	
28	MASTER ENSUITE - CERAMICS- GROUT FOR FLOOR TILE- ENSUITE MASTER	Qty: 1
54,529	Note:	
29	SHARED BATHROOM - CERAMICS- FLOOR TILE- UPGRADE 4- SHARED BATH	Qty: 1
54,530	Note: SEE SKETCH # 9 PAGE 31 FOR 12 X 24" TILE INSTALL DIRECTION	
30	SHARED BATHROOM - CERAMICS- GROUT FOR FLOOR TILE- UPGRADE GROUT - SHARED BATHROOM	Qty: 1
54,531	Note:	
31	FINISHED BASEMENT BATHROOM - CERAMICS- FLOOR TILE- UPGRADE 3- BASEMENT BATHROOM	Qty: 1
54,532	Note:	
32	FINISHED BASEMENT BATHROOM - CERAMICS- GROUT FOR FLOOR TILE- UPGRADE GROUT- BASEMENT BATHROOM	Qty: 1
54,533	Note:	
33	MASTER ENSUITE - CERAMICS- UPGRADE WALL- INSTALL FLOOR TILE ON SHOWER WALL - UPGRADE 5- ENSUITE MASTER	Qty: 1
54,534	Note:	

TAX#:1

PREPARED BY: Bei Liu

PE 746-3

Slrvoice.rpt 28may19

Initials: ML



Sales Selection Sheet

Wallaceton

25 of 58

PURCHASER: inventory home_1_1

TEL:

LOT / UNIT 1	PHASE 1	MODEL 28-2878 CRN B The Westwood
-----------------	------------	-------------------------------------

CERAMICS

34	54,535	MASTER ENSUITE - CERAMIC - GROUT FOR SHOWER WALL (INSTALL WITH FLOOR TILE_ UPGRADE GROUT - ENSUITE MASTER Note:	Qty: 1
35	54,536	MASTER ENSUITE - CERAMICS- SHOWER FLOOR TILE- UPGRADE 6 - ENSUITE MASTER Note: SKETCH # 9 PAGE 31 FOR 12 X 24" TILE INSTALL DIRECTION	Qty: 1
36	54,537	MASTER ENSUITE - CERAMICS- GROUT FOR SHOWER FLOOR TILE- UPGRADE GROUT- ENSUITE MASTER Note:	Qty: 1
37	54,539	SHARED BATHROOM - CERAMICS- GROUT FOR WALL TILE - UPGRADE GROUT- SHARED BATHROOM Note:	Qty: 1
38	54,982	ENSUITE 4 - CERAMICS- FLOOR TILE- UPGRADE 3 -ENSUITE 4 Note:	Qty: 1
39	54,983	ENSUITE 4 - CERAMICS- GROUT FOR FLOOR TILE UPGRADE GROUT ENSUITE 4 Note:	Qty: 1

ELECTRICAL

*40	189,440	KITCHEN - ELECTRICAL - EXTRA WALL INTERIOR OUTLET (120V/15A) ON A SEPARATE CIRCUIT (ON ARCFULT) FOR BASE MICRODRAWER BESIDE POT AND PAN CABINETS TOWARD SERVERY SKETCH # 8 PAGE 30 MICRODRAWER SPECS PAGES 49 -50 Note:	Qty: 1
54,986			

GLASS PRODUCTS / MIRRORS

41	54,575	MASTER ENSUITE - SUPPLY AND INSTALL FRAMELESS GLASS SHOWER ENCLOSURE WITH D HANDLE IN MASTER ENSUITE BATHROOM Note:	Qty: 1
42	54,576	ENSUITE 4 - SUPPLY AND INSTALL FRAMELESS GLASS SHOWER ENCLOSURE WITH D RING IN ENSUITE 4 BATHROOM Note:	Qty: 1

HARDWOOD

43	54,548	DINING ROOM/HALL - HARDWOOD- VINTAGE- 5" WHITE OAK SCULPTED- DINING ROOM - UPGRADE 2 Note:	Qty: 1
----	--------	--	--------

TAX#:1

PREPARED BY: Bei Liu

PE 746-4

Invoice.rpt 28may19

Initials:



Sales Selection Sheet

Wallaceton

26 of 58

PURCHASER: inventory home_1_1

TEL:

LOT / UNIT	PHASE	MODEL
1	1	28-2878 CRN B The Westwood

HARDWOOD

44	GREAT ROOM - HARDWOOD- VINTAGE - 5" WHITE OAK SCULPTED- GREAT ROOM - UPGRADE 2	Qty: 1
54,549	Note:	
45	KITCHEN/SERVERY/BREAKFAST - HARDWOOD- VINTAGE 5" WHITE OAK SCULPTED-- UPGRADE 2	Qty: 1
54,550	Note:	
46	UPPER HALL - HARDWOOD- VINTAGE- 5" WHITE OAK SCULPTED- UPPER HALL- UPGRADE 2	Qty: 1
54,552	Note:	

INTERIOR RAILINGS

47	MAIN STAIRS - INTERIOR RAILINGS- UPGRADED METAL PICKETS- SINGLE SQUARE COLLAR ALT. PLAIN (COLOUR BLACK) UPGRADE 2	Qty: 1
54,553	Note:	

PLUMBING

*48 189,590	- PLUMBING - AMERICAN STANDARD - PEDESTAL SINK - OPT POWDER ROOM BOULEVARD- WHITE MODEL 0641-800 020 8 INCH CENTRES - SPEC PAGE 36	Qty: 1
54,555	Note:	
*49 189,546	- PLUMBING - AMERICAN STANDARD - SINK OPTIONS - UNDERMOUNT SINK - STUDIO - WHITE - MODEL 0614 000 020 2X MASTER ENSUITE BATHROOM, 1 X SHARED BATHROOM 1 X ENSUITE 4 BATHROOM 1 X FINISHED BASEMENT BATHROOM	Qty: 5
54,556	Note: SEE SPEC PAGE 38	
50 189,557	- PLUMBING - AMERICAN STANDARD - TOILET - BOULEVARD -ONE PIECE - RIGHT HEIGHT ELONGATED (MODEL 2891 12 8 020) WHITE (INCLUDES SLOW CLOSE SEAT) -	Qty: 1
54,557	Note: SPEC PAGE 37	
*51 189,591	- PLUMBING - AMERICAN STANDARD - TOILET OPTIONS - STUDIO - CONCEALED TRAPWAY RIGHT HEIGHT ELONGATED TOILET - FLOWISE (MODEL 2794 104 020) WHITE (INCLUDES SLOW CLOSE SEAT) - 1 X MASTER ENSUITE , 1 X SHARED 1 X ENSUITE 4, 1 X BASEMENT BATHROOMS	Qty: 4
54,558	Note: SEE SPEC PAGE 39	
52 189,683	- PLUMBING - KITCHEN SINK UPGRADE BLANCO PRECIS U SINGLE 27 UNDERMOUNT COLOR ANTHRACITE MODEL #401888	Qty: 1
54,559	Note: SPEC PAGE 34	
*53 189,632	MASTER ENSUITE - PLUMBING - MOEN -RIZON - POSI-TEMP WITH 3 FUNCTION DIVERTER VALVE, SLIDE BAR WITH HAND HELD AND SHOWERHEAD BRUSHED NICKEL (MODEL: 62320/3372/T4171/T2812EP/3669EP/A725) -	Qty: 1
54,560	Note: SEE SPEC PAGE 41	
*54 189,622	- PLUMBING - MOEN -RIZON - LAV - 8 INCH WIDESPREAD BRUSHED NICKEL (MODEL: 69000/T6920BN) - 1 X POWDER ROOM 2 X MASTER ENSUITE BATHROOM	Qty: 3
54,562	Note: SEE SPEC PAGE 40	

TAX#:1

PREPARED BY: Bei Liu

PE 746-5

Invoice.rpt 28may19

Initials:



Sales Selection Sheet
Wallaceton

27 of 58
TEL:

PURCHASER: inventory home_1_1

LOT / UNIT	PHASE	MODEL
1	1	28-2878 CRN B The Westwood

PLUMBING

*55 189,625 54,563	- PLUMBING - MOEN -RIZON - LAV - SINGLE HANDLE FAUCET BRUSHED NICKEL (MODEL: 6900BN) - 1 X SHARED BATH 1 X ENSUITE 4 BATH 1 X FINISHED BASEMENT BATH Note: SEE SPEC PAGE 40	Qty: 3
56 189,584 54,564	SERVERY ONLY - PLUMBING - MOEN -ALIGN - KITCHEN - SINGLE HANDLE BAR/PREP FAUCET SRS SPOT RESIST STAINLESS (MODEL: 5 965 SRS) - Note: SEE SPEC PAGE 33	Qty: 1
57 189,588 54,565	- PLUMBING - MOEN -ALIGN - KITCHEN - SINGLE HANDLE PULLDOWN KITCHEN FAUCET SRS SPOT RESIST STAINLESS (MODEL: 7565 SRS) - Note: SEE SPEC PAGE 33	Qty: 1
58 189,548 54,566	SERVERY ONLY - PLUMBING - SERVERY SINK UPGRADE - BLANCO UNDERMOUNT SERVERY SINK MODEL 401515 - Note: SEE SPEC PAGE 35	Qty: 1
*59 189,639 54,567	MASTER ENSUITE - PLUMBING - MOEN -RIZON - ROMAN TUB - 4 PIECE BRUSHED NICKEL (MODEL: 9796/T936) -FOR MASTER ENSUITE TUB Note: SEE SPEC PAGE 40	Qty: 1
*60 189,630 54,569	- PLUMBING - MOEN -RIZON - POSI-TEMP PRESSURE BALANCED TUB/SHOWER ECO-PERFORMANCE BRUSHED NICKEL (MODE L: 62320/T2813EP BN) - FOR SHARED BATH TUB , ENSUITE 4 BATH SHOWER AND FINISHED BASEMENT SHOWER Note: SEE SPEC PAGE 42	Qty: 3
61 54,989	- SUPPLY AND INSTALL 5 X METHOD-PIVOTING PAPER HOLDER IN EACH BATHROOM, 1 X 18" TOWEL BAR IN FINISHED BASEMENT BATH, 1 X 24" TOWEL BAR IN SHARED BATH AND 3 X 9" TOWEL BARS (ONE IN POWDER ROOM AND TWO IN MASTER ENSUITE BATH) SPECS PAGE 43 Note: LOCATIONS SKETCHES 7 , 8 AND 9 PAGES 29, 30 AND 31	Qty: 1

STRUCTURED WIRING

*62 189,790 54,570	- STRUCTURED WIRING - TELEPHONE/DATA LINE ROUGH-IN CAT 5E TO BE INSTALLED IN GARAGE FOR FUTURE OFFICE USE - ADD ADDITIONAL ONE TO THE 2 ALREADY IN ON PRE-SSS Note: SEE SKECH # 8 PAGE 30	Qty: 1
--------------------------	---	--------

Sub Total
HST
Total

TAX#:1

PREPARED BY: Bei Liu

PE 746-6

Invoice.rpt 28may19

Initials:



Sales Selection Sheet

Wallaceton

28 of 58

TEL:

PURCHASER: inventory home_1_1

LOT / UNIT	PHASE	MODEL
1	1	28-2878 CRN B The Westwood

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment Summary	Amount
Paid By	
Total Payment:	

PURCHASER:

INVENTORY MODEL

inventory home_1_1

02-Mar-21

DATE

Decor Consultant

02-Mar-21

DATE

APPROVED -

02-02-2021

APPROVED

Date Approved

Heathwood Homes (Huron) Limited

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

29 of 58


THE WESTWOOD

ELEVATION B - UPGRADE | 2,878 SQ.FT.
877 sq. ft. of opt. finished Lower Level

28-2878 CRN ELEV. B

WALLACETON
U.S.T. 1870

Sketch #7

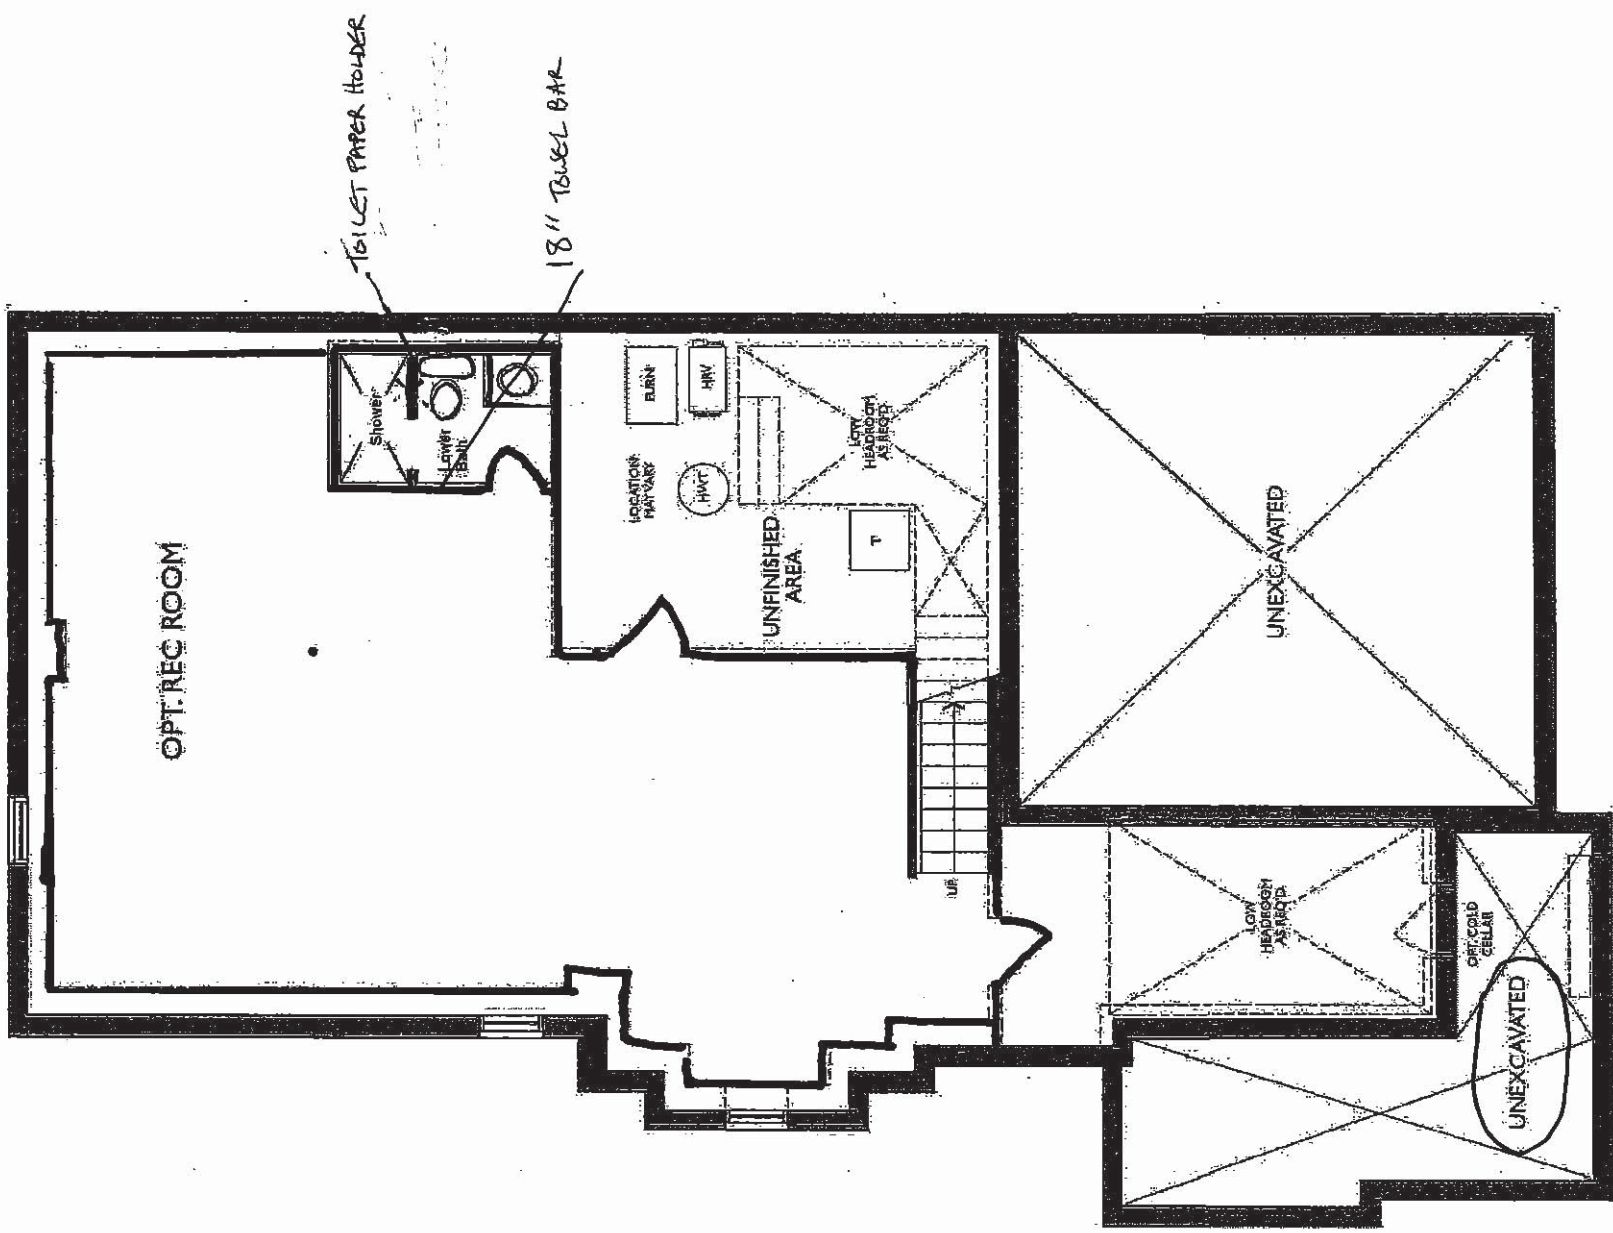

OPT. LOWER LEVEL
ELEVATION B - UPGRADE FLANKAGE

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

30 of 58


THE WESTWOOD

ELEVATION B - UPGRADE | 2,378 SQ.FT.
877 sq. ft. of opt. finished lower level

WALLACETON
EST. 1870

28-2878 CRN ELEV. B

Sketch #8

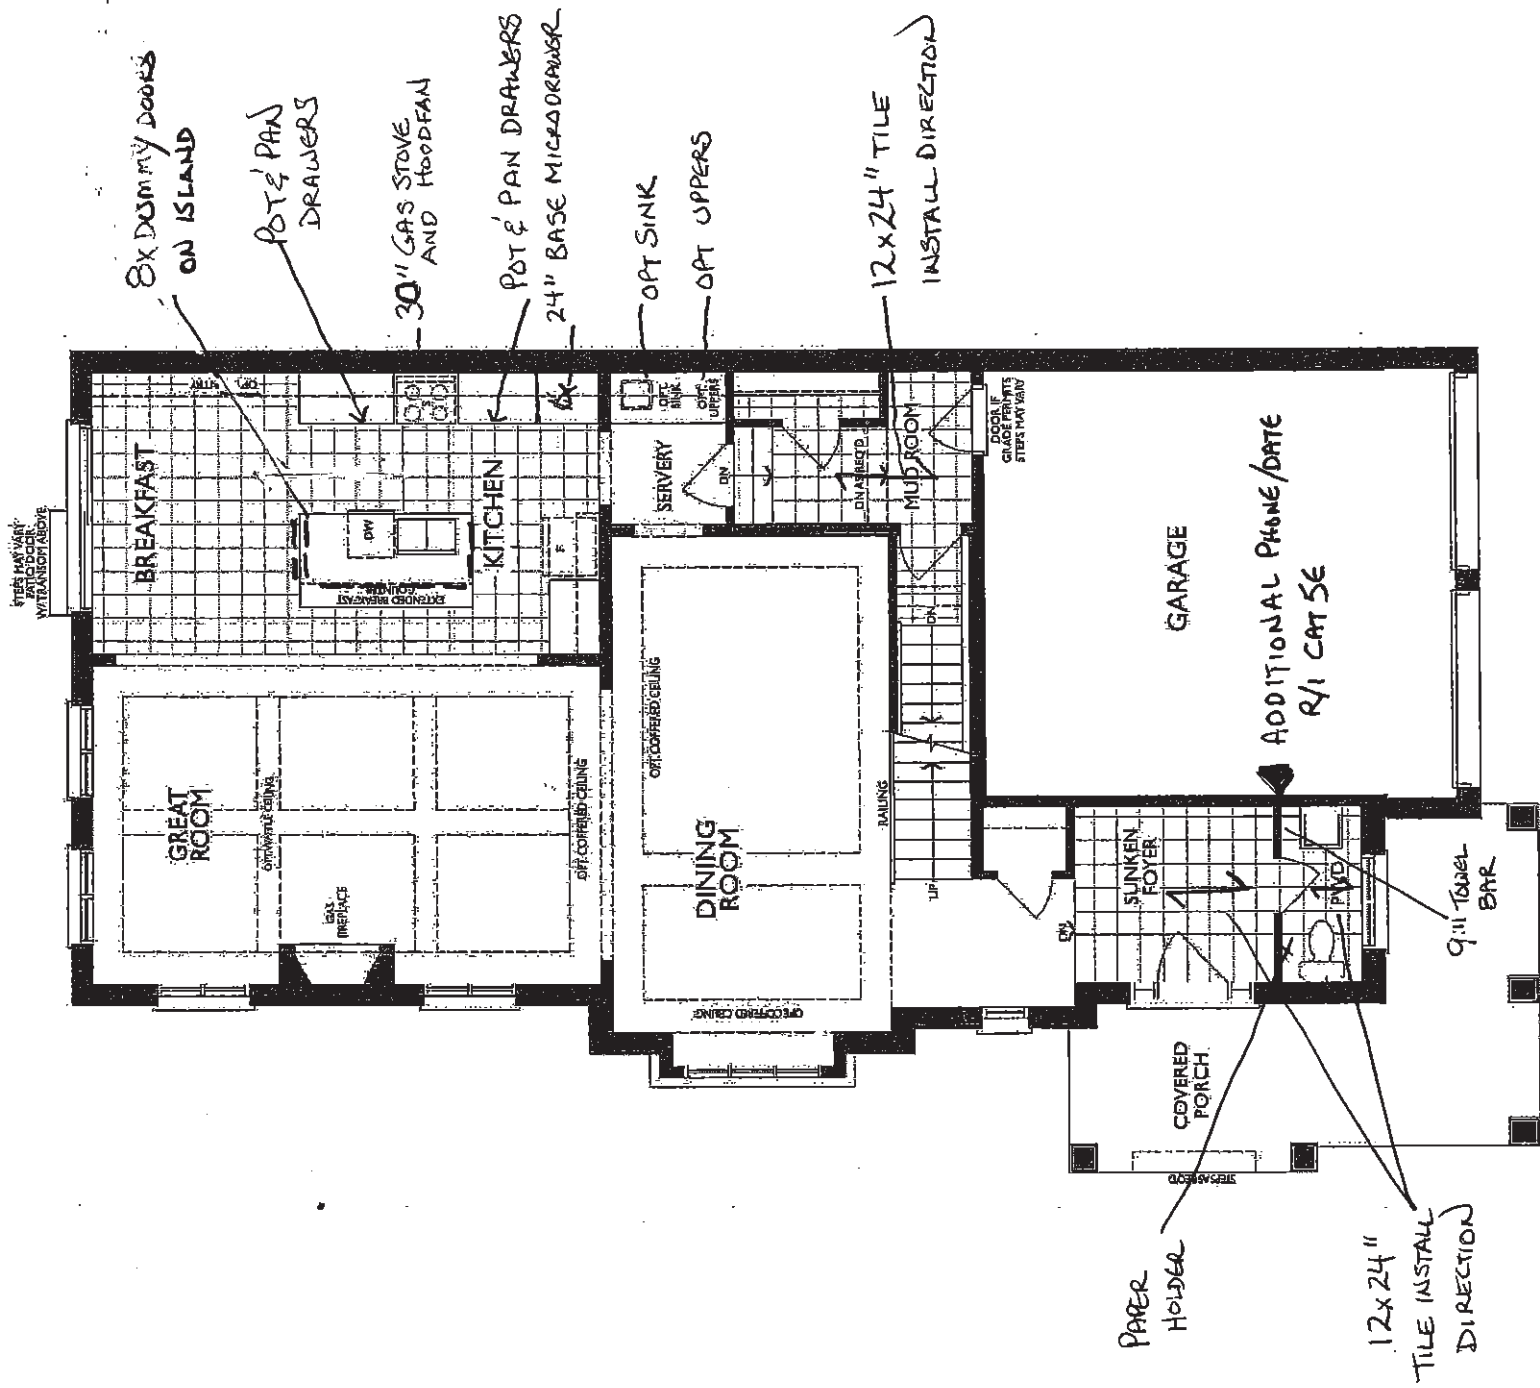

PARTIAL MAIN FLOOR
ELEVATION B - UPGRADE FLANKAGE

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD


31 of 58

THE WESTWOOD

ELEVATION B - UPGRADE | 2,878 SQ.FT.
877 sq. ft. of opt. finished lower level
WALLACETON
EST. 1870

28-2878 CRN ELEV. B


Sketch #9

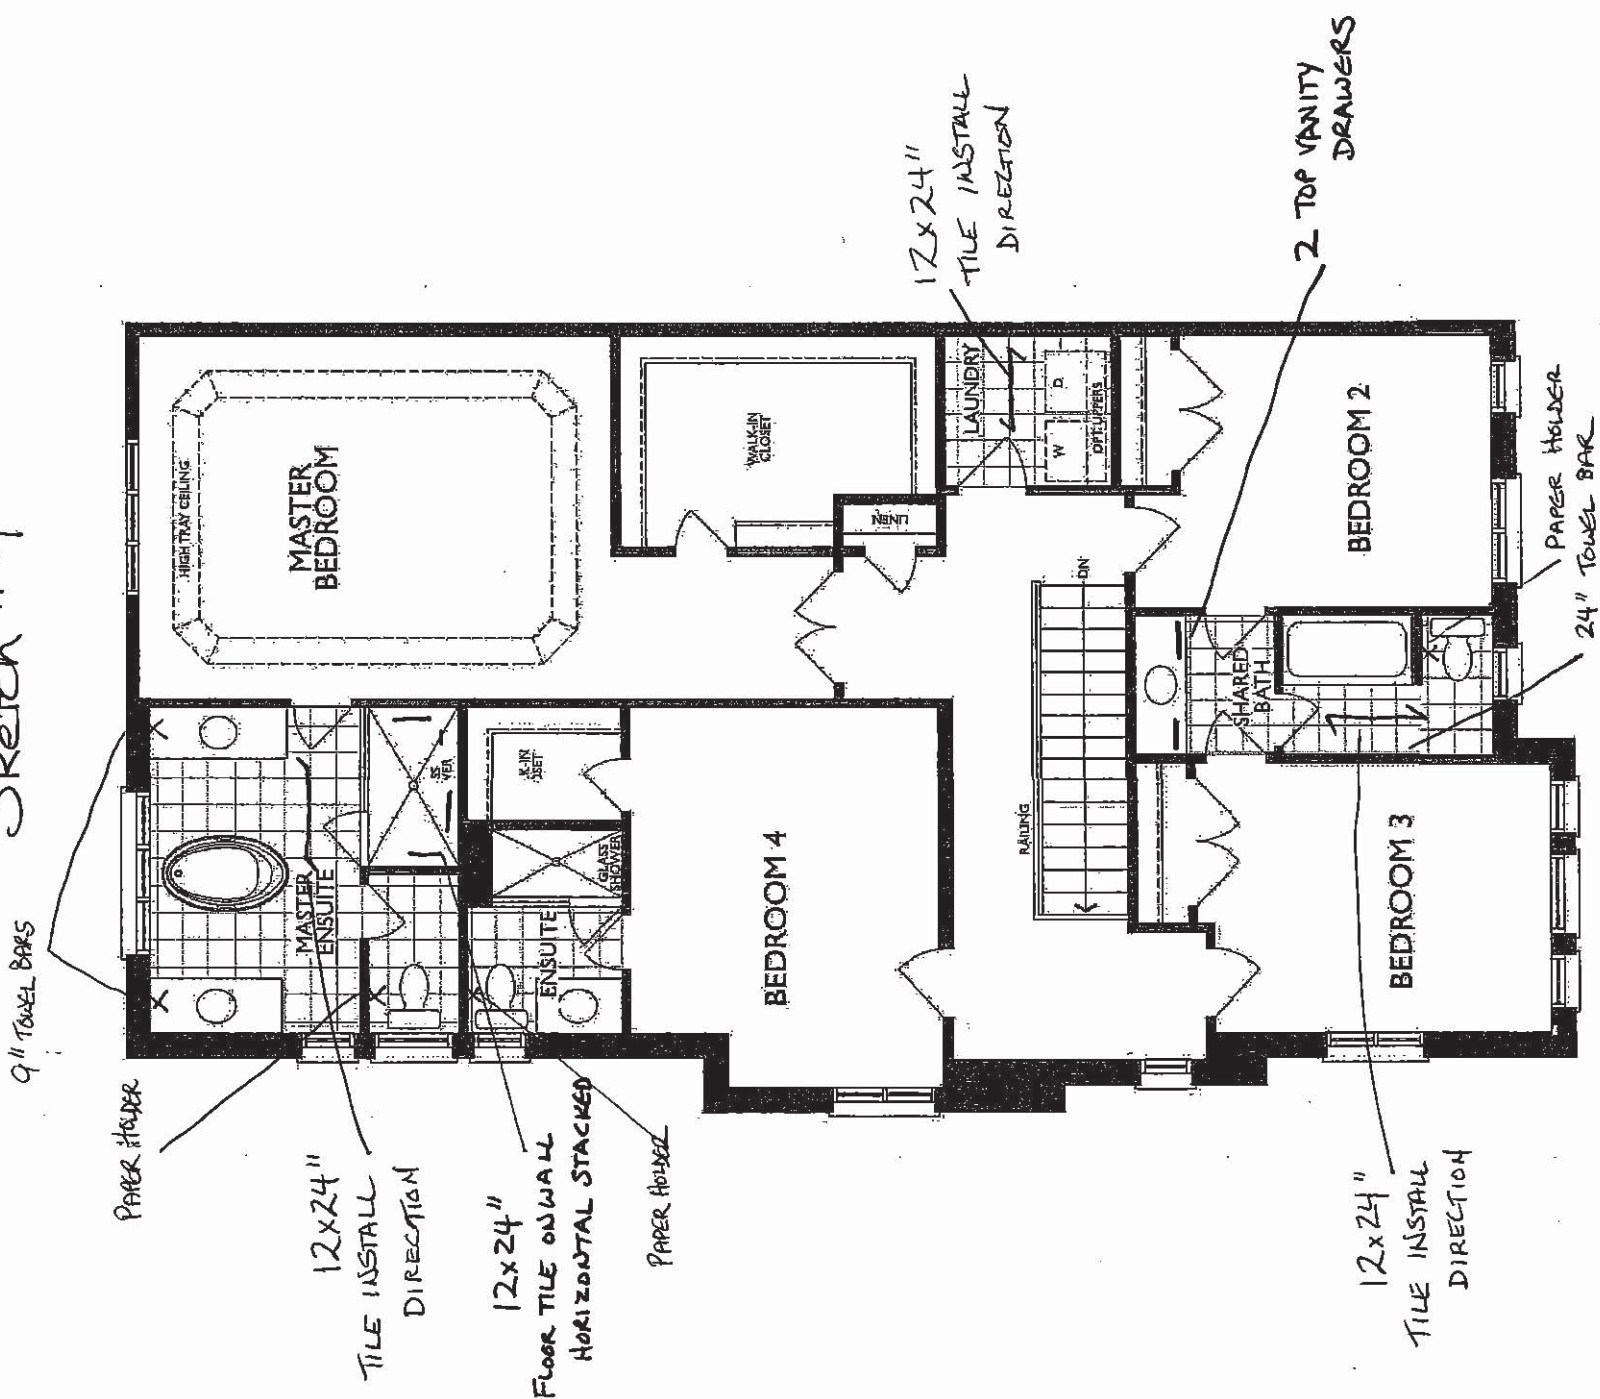

PARTIAL SECOND FLOOR
ELEVATION B - UPGRADE FLANKAGE

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

32 of 58

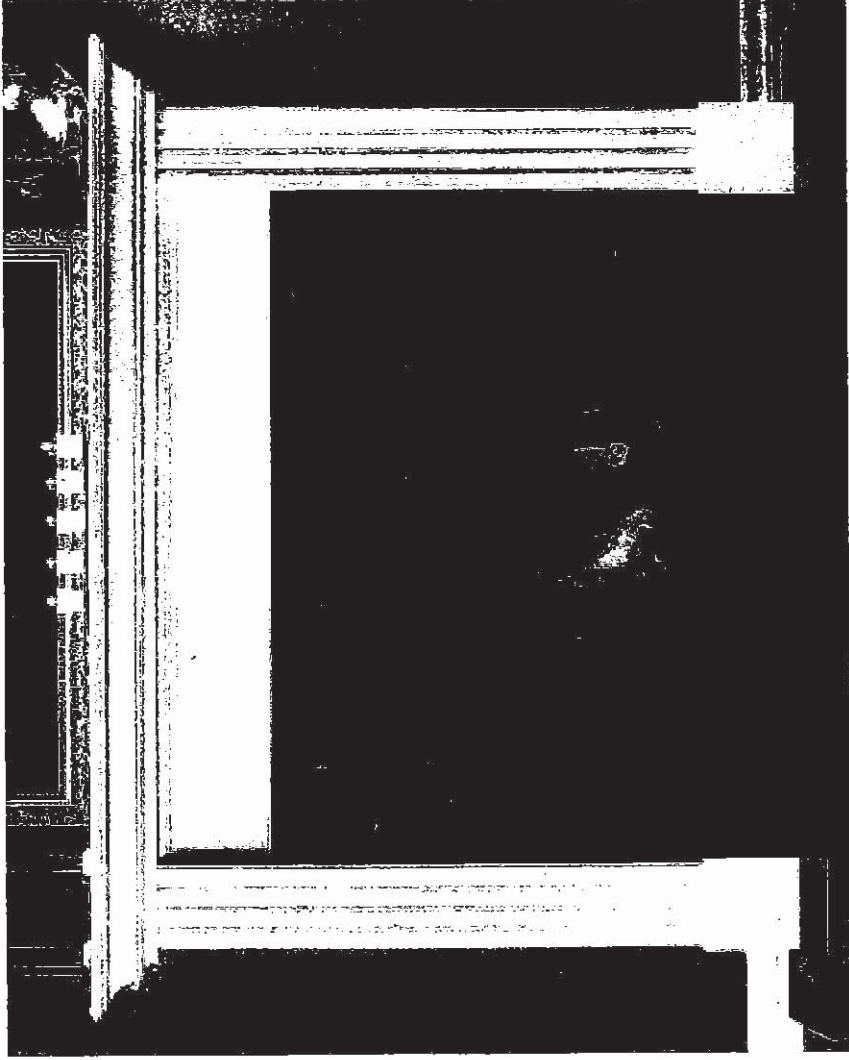

STANDARD NF 15 Mantel X

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)



'CABINET' ✓

STANDARD NF 17 Mantel

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

33 of 58

Align®


Traditional | Transitional | Modern

*From intimate galley kitchens to large gourmet workstations,
Align faucets bring a refreshed modern look to your home.*



**MotionSense™ Hands-Free Single
Handle Pulldown Kitchen Faucet ***
Not Available in BL or BG
Model 7565E

Chrome
Other

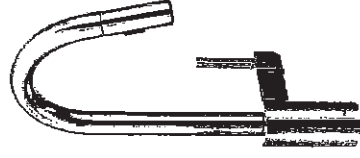

**Single Handle Pulldown
Kitchen Faucet ***
Available in BG
Model 7565

Chrome
Other

SRS



**Single Handle Kitchen Faucet
with Side Spray ***
Not Available in BL or BG
Model 7165

Chrome
Other



Single Handle Kitchen Faucet *
Not Available in BL or BG
Model 7365

Chrome
Other




**Single Handle Pulldown
Bar/Prep Faucet ***
Available in BG
Model 5965

Chrome
Other

SERVING
SINK

SRS

FINISH OPTIONS:



To order, combine the model number with one of these finish letter(s):
Spot Resist™ Stainless (SRS), Matte Black [BL] & Brushed Gold [BG]
To order Chrome (C) model, use model number only.
For Chrome MotionSense, order 7565EC.
* Deckplate sold separately - 141002 series

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

34 of 58


Product Specification Sheet

PRECIS U SINGLE 27

SILGRANIT®

KITCHEN SINK

PRODUCT DIMENSIONS

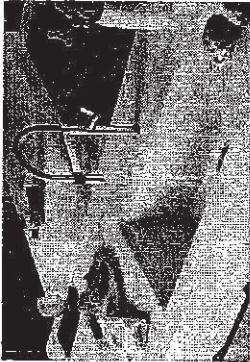

PRECIS U SINGLE	Colour Finish	Model No.	FEATURES / SPECIFICATIONS
	White	401894	• Precis kitchen sinks are made in Canada and Germany • Virtually flat sink bottom prevents glassware from tipping over • Available in a range of non-fading colours • Made of SILGRANIT®, a high-quality granite composite • Heat, scratch and stain resistant • Non-porous surface is anti-bacterial and easy to clean
	Truffle	401893	
	Metallic Gray	401892	
	Cinder	401891	
	Café	401890	
	Bliscuit	401889	DESIGN AND PLANNING TIPS Cabinet Size: 30" (760 mm) Bowl depth: 8 5/8" (220 mm) Depending on cabinet construction, a different cabinet size may be required. Consult the cabinet manufacturer.
	Anthracite	401888	
WARRANTY			

Code/Standards Compliance

BLANCO sinks and faucets are third-party tested and certified to CSA, cUPC, ANSI/ASME and NSF standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.

BLANCO CANADA
100 Corporation Drive
Brampton, ON L6S 6B5

Tel: 905 494 2400
Fax: 905 494 2425
www.blancocanada.com

Toll Free: 1 877 425 2626
Toll Free: 1 877 825 2626


© 2016 BLANCO CANADA

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

35 of 58

SERUERY BAR SINK


BLANCO

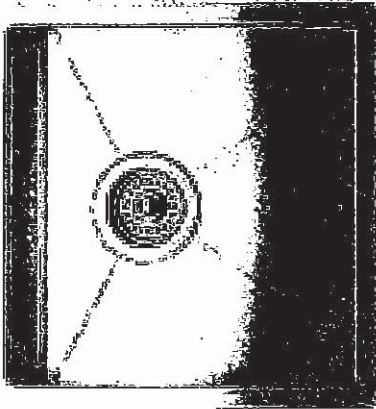

Model No.	Bowl Depth	
401515	Main	Secondary
	8" (205mm)	

Material
Durable 18 gauge stainless steel
Brushed finish

Specifications
Minimum Cabinet Size: 21" (535 mm)
Undermount installation

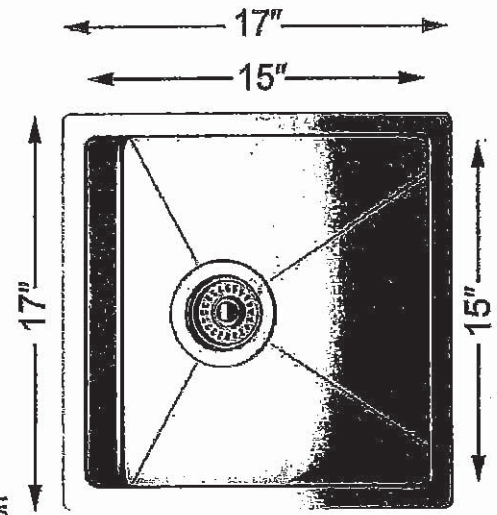

The perfect combination of style, price and function.

- German designed and engineered
- Premium 304 series, 18 gauge stainless steel
- 18/10 chrome-nickel content for exceptional lustre, durability and strength
- Rear-positioned drain hole for maximum usable bowl and cabinet storage space
- Compact size, X-pattern drain grooves
- 15 mm radius corners for easy cleaning
- 3 1/2" (90mm) stainless steel strainer included
- Clips, template included
- Limited Lifetime Warranty

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

36 of 58

*American
Standard*

Powder Room

**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☒ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)
☐ 0641.400 Faucet holes on 4" (102mm) centers
☐ 0641.100 Center hole only
- Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - **Design coordinates with Boulevard® Toilet**
 - Basin has flat bottom to also allow use as an **above counter sink** or a **drop-in sink** (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☒ 0641.008 Pedestal top-8" (203mm) centers
☐ 0641.004 Pedestal top-4" (102mm) centers
☐ 0641.001 Pedestal top-center hole only
☐ 0010.000 Pedestal only


Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2 - 2008/CSA B45.1-08

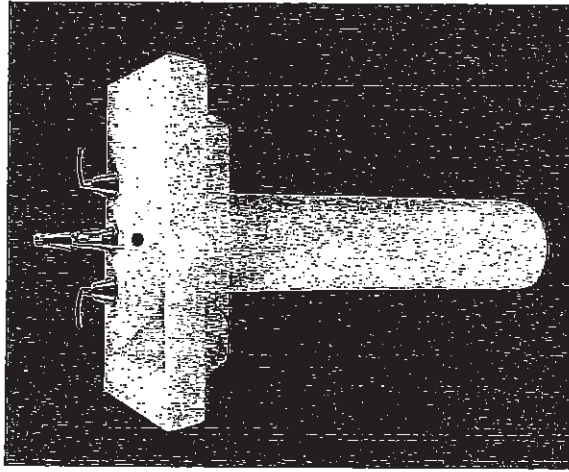

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:

* See faucet section for additional models available

Powder Room

American Standard

**BOULEVARD FloWise™ RIGHT HEIGHT™
ELONGATED ONE-PIECE TOILET**

Style That Works Better

VITREOUS CHINA

**BOULEVARD FloWise™ RIGHT HEIGHT™
ELONGATED ONE-PIECE TOILET**

☐ 2891 128

- Vitreous china
- LXP (Luxury Performance) Toilet
- Meets definition for HET (High Efficiency Toilet) 1.07 gpf/4.8 Lpf
- Meets EPA WaterSenseSM criteria
- Contributes to a LEED solution
- Elongated siphon action bowl with smooth-sided, concealed trapway
- PowerWash™ rim scrubs bowl with each flush
- 419mm (16-1/2") rim height for accessible applications
- Fully glazed 2" (51mm) trapway
- Oversized 3" (76mm) Flush Valve with Chemical Resistant Flapper
- Chrome trip lever
- 2 colour-matched bolt hole covers
- Includes colour-matched Duroplast Slow Close Toilet Seat and cover with easy lift-off feature for simple removal and reattachment for cleaning
- 100% factory flush tested
- Transitional design coordinates with Studio and Boulevard sinks
- 10 year warranty on entire toilet

Nominal Dimensions:

756 x 368 x 778mm
(29-3/4" x 14-1/2" x 30-1/2")

Fixture only, supply by others

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008/CSA B45.1-08
- Certified in EPA WaterSense HET program

To Be Specified

- ☐ Colour: ☐ White ☐ Bone ☐ Linen
- ☐ Supply with stop:





- When installed so top of seat is 432 to 483mm (17" to 19") from the finished floor, MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USEABLE BUILDING FACILITIES-CHECK LOCAL CODES.

01/10

© 2010 American Standard

TO-111

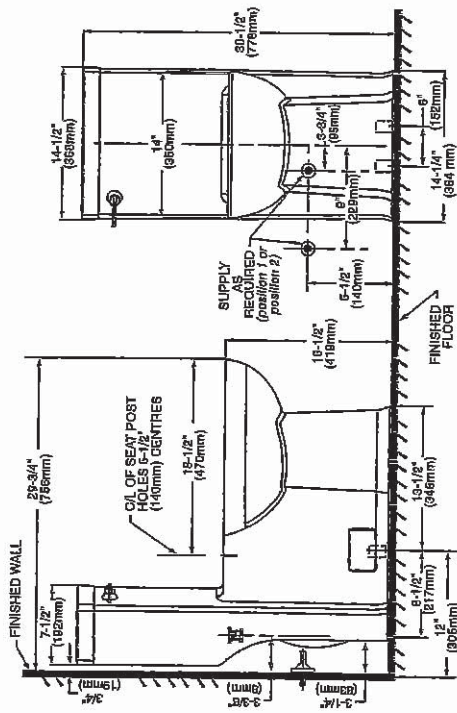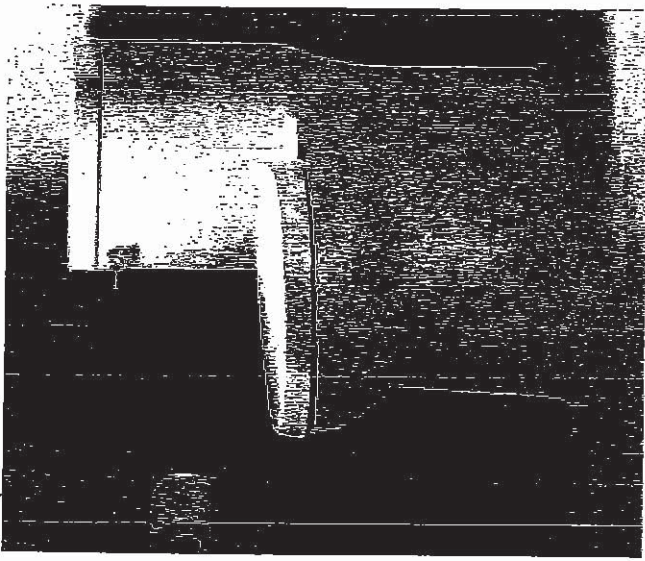

IMPORTANT: Water supply on the wall is required at 8-3/4" (95mm) or 9" (225mm) from centreline of the toilet (see rough-in). First suggested position is hidden behind the toilet. The geometry of the toilet gives space for this installation. The second suggested position is next to the toilet. Between these two positions, the space for the supply between wall and toilet is limited to 3-1/4" (85mm). In this case, check your supply and hose dimensions.

NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO CIL OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

38 of 58

X5

MASTER ENSUITE (2)

ENSUITE 4

SHARED BATHROOM

FINISHED BASEMENT BATHROOM

American Standard

Style That Works Better




STUDIO™ UNDERCOUNTER SINK

- Rectangular undercounter mount sink
- Made from vitreous china
- Front overflow
- Supplied with mounting kit (047194-0070A) and template

- ☐ 0614.000 Unglazed Rim
540 x 387mm
(21-1/4" x 15-1/4")
- ☐ 0614.300 Glazed underside

Bowl size:
464mm (18-1/4") wide
308mm (12-1/8") front to back
171mm (6-3/4") deep

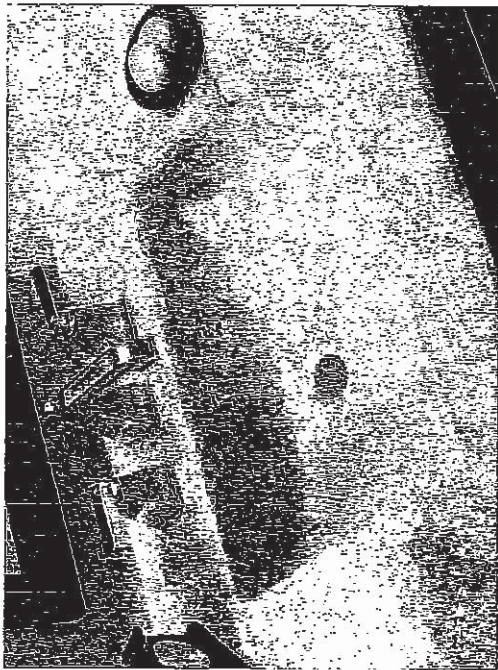



FITTING	A	B
CENTERSET	1-1/16 (27mm)	4 (102mm)
SINK-2	1-1/8 (32mm)	5 (127mm)

DETAIL OF MOUNTING CLIP

(KIT No. 047184.0079A)



REFER TO INSTRUCTIONS
PROVIDED WITH KIT FOR
ADDITIONAL INFORMATION

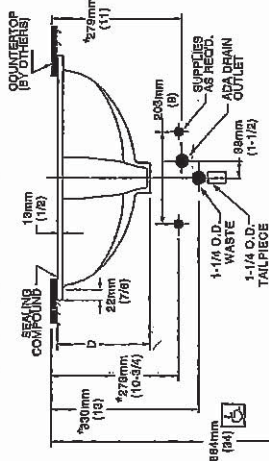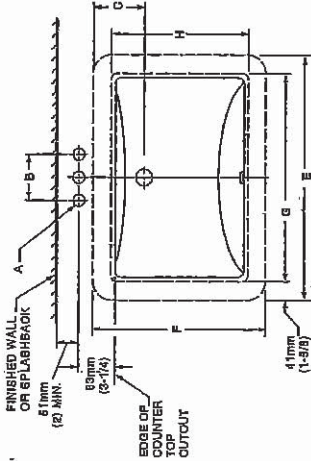

KIT NO.	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
0614.000	540mm	387mm	464mm	308mm	171mm	114mm	114mm	114mm	114mm	114mm	114mm	114mm	114mm	114mm	114mm	114mm
0614.300	540mm	387mm	464mm	308mm	171mm	114mm	114mm	114mm	114mm	114mm	114mm	114mm	114mm	114mm	114mm	114mm

To Be Specified:

- ☐ Color: ☐ White ☐ Bone ☐ Black
- ☐ Faucet*: ☐ Linen ☐ Black
- ☐ Faucet Finish: ☐ Linen ☐ Black
- ☐ Supplies: ☐ Linen ☐ Black
- ☐ 1-1/4" Trap:

* See faucet section for additional models available



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES
AND ANSI A117.1 ACCESSIBLE AND USABLE
BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

- Countertop 864mm (34") from finished floor. Lavatory installed 102mm (4") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.

NOTES:
WE RECOMMEND USING BASIN AS A TEMPLATE TO DETERMINE PROPER
CONTOUR. CUT COUNTERTOP 38MM (1-1/2") INSIDE BASIN CONTOUR.
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND 'P' TRAP ARE
SUGGESTED.

UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.
FITTINGS NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED
SEPARATELY.
SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range
of tolerances established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is
assumed for use of superseded or voided pages.

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

39 of 58

X4 MASTER ENSUITE, ENSUITE 4,
SHARED BATHROOM, FINISHED BASEMENT BATH

American Standard

STUDIO FloWise® CONCEALED TRAPWAY RIGHT HEIGHT™ ELONGATED TOILET

Style That Works Better



BARRIER FREE

VITREOUS CHINA

STUDIO FloWise® CONCEALED TRAPWAY RIGHT HEIGHT™ ELONGATED TOILET



2794 104

- Vitreous china
- Meets definition for HET (High Efficiency Toilet)
- High efficiency (4.8 Lpf/1.07 gpf)
- Meets EPA WaterSense® criteria (Pending)
- 12" (305mm) rough-in
- 16-1/2" (419mm) rim height for accessible applications
- EverClean® surface inhibits the growth of stain and odor-causing bacteria, mold, and mildew on the surface
- Features the **Cadet® 3 Flushing System**
- Elongated siphon action jetted bowl with smooth-sided, concealed trapway
- Generous 9" x 8" (229x203mm) water surface area
- PowerWash™ rim scrubs bowl with pressurized water every flush
- Oversized 3" (76mm) Flush Valve
- Design matched chrome metal trip lever
- Includes top mounting Duroplast Slow-Close seat and cover, with easy lift-off feature for simple removal and attachment for cleaning, packed with bowl. Telescoping cover conceals seat ring when closed
- 2 colour-matched bolt hole covers
- 100% factory flush tested
- Lifetime warranty on chinaware, 5 year warranty on all mechanical parts, and 1 year warranty on seat
- Design coordinated with Studio and Boulevard sinks

Separate Component Parts:

- ☐ 3075 100 Right Height™ Elongated Bowl with Seat
- ☐ 4000 104 Unlined Tank

Nominal Dimensions:

768 x 400 x 781mm
(30-1/4" x 15-3/4" x 30-3/4")

Fixture and toilet seat only, supply by others
Compliance Certifications -



- Meets or Exceeds the Following Specifications:
 - ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures
 - US EPA WaterSense® Specification for HET's

To Be Specified

- ☐ Colour: ☐ White
- ☐ Supply with stop:



- When installed so top of seat is 432 to 483mm (17" to 19") from the finished floor,
MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND
ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USEABLE
BUILDING FACILITIES-CHECK LOCAL CODES.

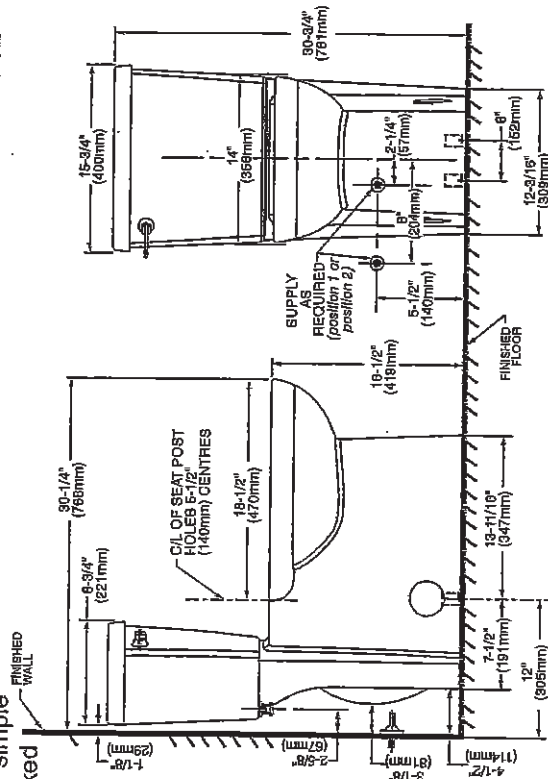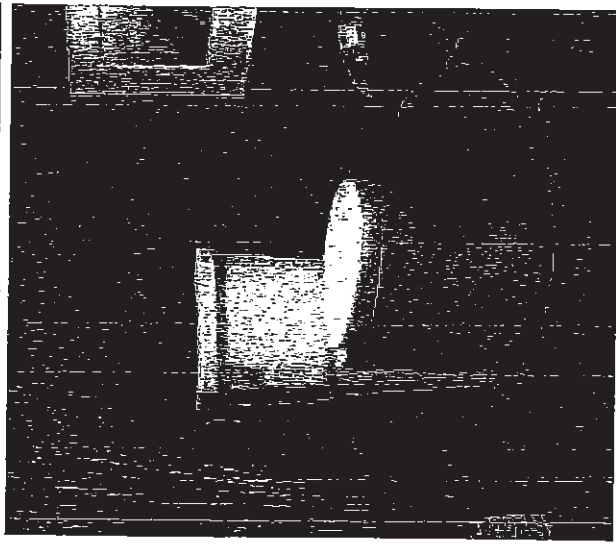

IMPORTANT: Water supply on the wall is required at 2-1/4" (57mm) or 8" (204mm) from centreline of the toilet (see rough-in). First suggested position is hidden behind the toilet. The geometry of the toilet gives space for this installation. The second suggested position is next to the toilet. Between these two positions, the space for the supply between wall and toilet is limited to 4-1/2" (114mm). In this case, check your supply and hose dimensions.

NOTES:

- THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.
- SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
- * DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
- IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2
- These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



CADET® 3
Flushing System

TO1-2XX

© 2011 American Standard

03/11

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

40 of 58

Rizon™


Traditional | Transitional | Modern

Polished smooth with clean, horizontal lines, the Rizon collection features a modern style with simple edges and soft curves.



Single Handle Vessel Lav Faucet with Push-Button Drain without Overflow ±
Not available in BL
Model 6911 / 140780

Chrome
Other



Single Handle Lav Faucet with Lift Rod Drain ±
Available in BL*
Model 6900

Chrome
Other



Two Handle Adjustable Widespread (8" - 16") Lav Faucet with Lift Rod Drain
Available in BL*
Model T6920 / 69000

Chrome
Other




1 X POWDER ROOM
2 X MASTER ENSUITE

Chrome
Other

3 X ENS. 4
SHARED BATHROOM

FINISHED BASEMENT BATHROOM



Two Handle Roman Tub Faucet
Available in BL*
Model T935 / 4796

Chrome
Other



Chrome
Other

Two Handle Roman Tub Faucet with Hand Shower
Not available in BL
Model T936 / 9796

Chrome
Other

One Handle Roman Tub Faucet with Hand Shower
Not available in BL
Model T937 / 4791

Chrome



Tub Drain Half Kits Available**



Chrome
Other

FINISH OPTIONS:



To order, combine the model number with one of these finish letter(s):
LifeShine® Brushed Nickel (BN) & Matte Black (BL)

To order Chrome (C) model, use model number only.

Deckplate sold separately - 165006 series ± Single hole installation only
** T90331 / 140680
* BL Finish Ships Q2


UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

41 of 58

Rizon™

Traditional | Transitional | Modern

Polished smooth with clean, horizontal lines, the Rizon collection features a modern style with simple edges and soft curves.

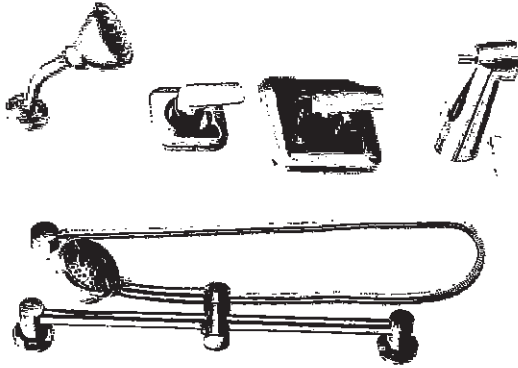

**Posi-Temp® Tub/Shower Faucet
with 3 Function Transfer Valve/Trim
and Slide Bar with Hand Shower ***


NEW

Available in BL *

Model T2813EP / 3372 / 128284 / 62320 /
T2081 / 3669EP / A725

Chrome

Other

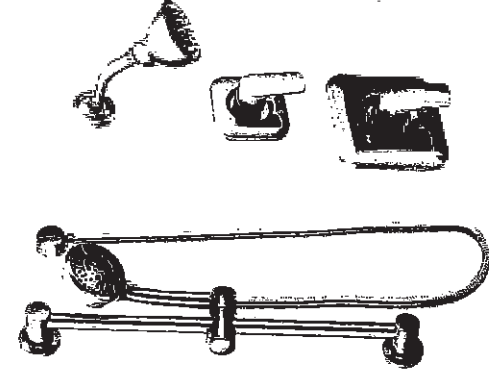

**Posi-Temp® Shower Only
with 3 Function Transfer Valve/Trim
and Slide Bar with Hand Shower ***

NEW

Available in BL *

Model T2812EP / 3372 / T2081 / 62320 /
3669EP / A725


Chrome

Other

BN

MASTER ENSUITE SHOWER

FINISH OPTIONS:



To order, combine the model number with one of these finish letter(s):
LifeShine® Brushed Nickel (BN) & Matte Black (BL)

To order Chrome (C) model, use model number only.

- Please see vertical spa guide for installation #700106
- * BL Finish Ships Q2


UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

42 of 58

Rizon™

Traditional | Transitional | Modern

Polished smooth with clean, horizontal lines, the Rizon collection features a modern style with simple edges and soft curves.



Eco-Performance Posi-Temp®
Tub/Shower Faucet
Available in BL*
Model T2813EP / 62320

NEW



Chrome

Other

BN

X 3

ENS 4

SHARED BATHROOM

FINISHED BASEMENT BATHROOM

Eco-Performance Posi-Temp®
Shower Only
Available in BL*
Model T2812EP / 62320

NEW




Chrome

Other

ROOM

FINISH OPTIONS:



To order, combine the model number with one of these finish letter(s):
LifeShine® Brushed Nickel (BN) & Matte Black (BL)
To order Chrome (C) model, use model number only.
* BL Finish Ships Q2

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

43 of 58

Method™

Traditional | Transitional | Modern



Toilet Tank Lever
Model YB2401

Chrome ☒ BN ☐
Other ☐

Double Robe Hook
Model YB2403

Chrome ☒ BN ☐
Other ☐

Pivoting Paper Holder
Model YB2408 BN

Chrome ☒ BN ☐
Other ☐


X5
POWDER ROOM
MASTER ENSUITE
ENS 4
SHARED BATH
FINISHED BASEMENT BATH



18" Towel Bar
Model YB2418 BJ

Chrome ☐ BN ☒
Other ☐

FINISHED BASEMENT BATH



24" Towel Bar
Model YB2424 BN

Chrome ☒ BN ☐
Other ☐

SHARED BATH




9" Towel Bar
Model YB2486 BN

Chrome ☐ BN ☒
Other ☐

1x POWDER ROOM
2x MASTER ENSUITE



FINISH OPTIONS:



To order, combine the model number with one of these finish letter(s):
Chrome (CH), LifeShine® Brushed Nickel (BN).

Cyclone[®]





SCB51430 Canopy Hood

Alto Collection

Makes a statement of strength and power as the stainless steel frame gleams under your kitchen lights. It features baffle filters, tow bright LED lights in each corner, a three speed control panel, and a quiet, powerful motor. The bold design and strong stainless steel frame encasing the fan will make this machine the focus of your kitchen. Fitted with time-delay "OFF" options up to nine minutes.

Specifications

Air Flow Volume: 550 CFM
Colours: Stainless Steel
Dimensions: W:30" H:44.5" D:19.5"
Electrical Connection: 120V/60Hz
Electrical Consumption: 200 watts
Fan Speed: 1254 RPM
Sones: Min. at 2 and Max at 6
Venting: 6" Round (Top Only)

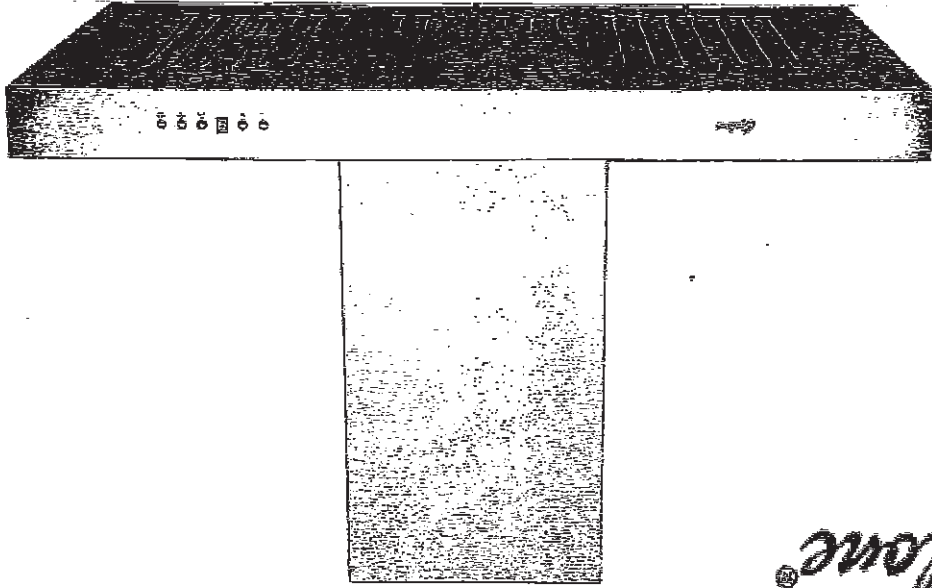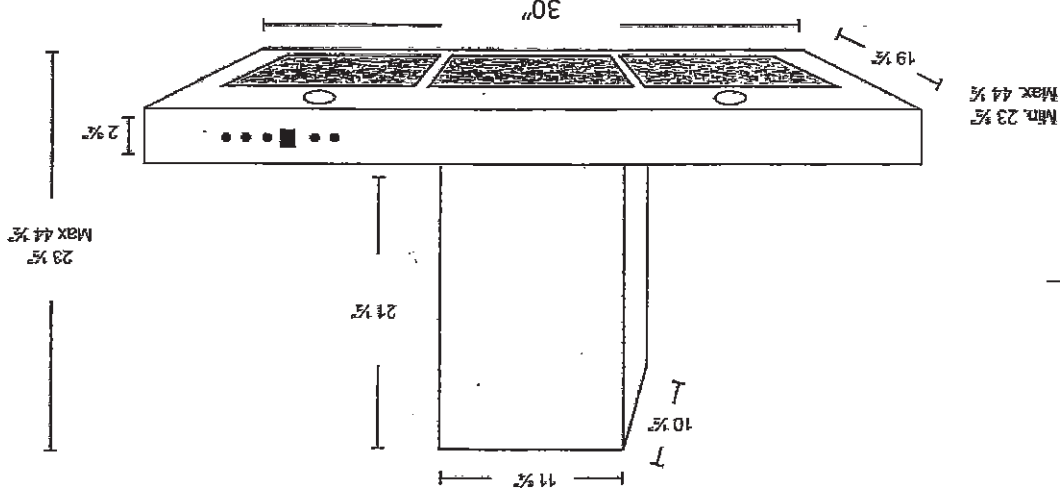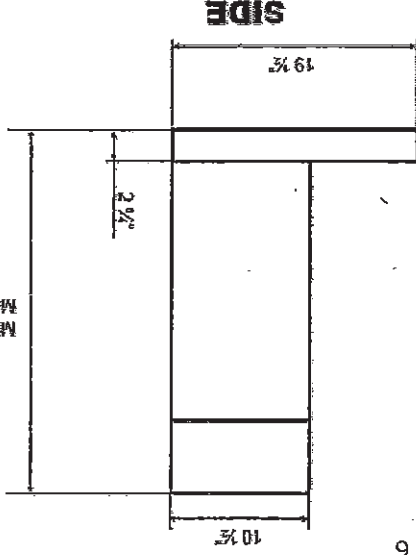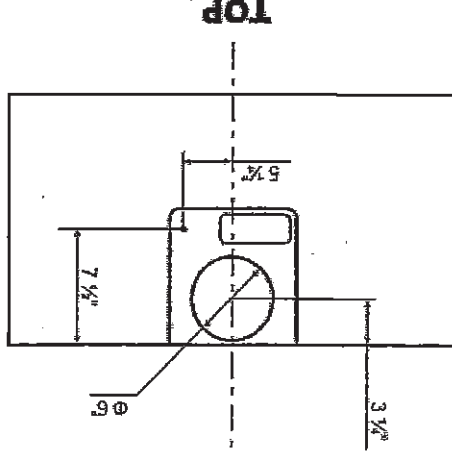

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

41 of 58

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

45^{1/2} 58

Whirlpool® Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

WRF532SMB WRF535SMB
WRF540CWB

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.



NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

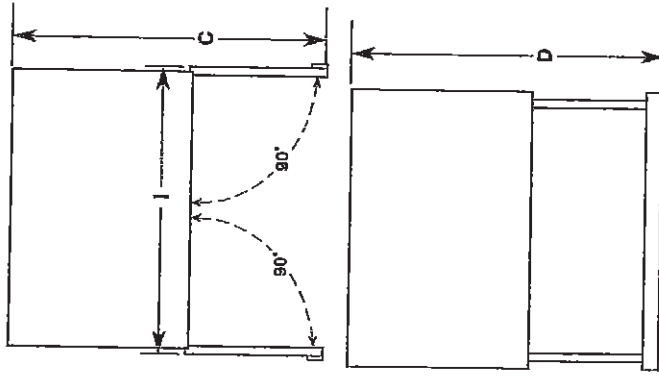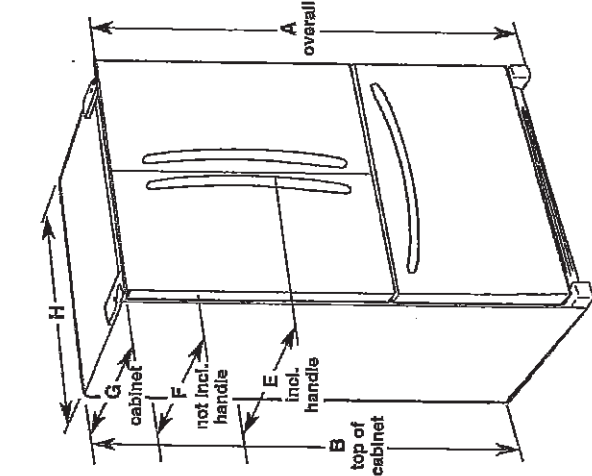

Model Number/Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
WRF535SMB 25.2 cu. ft.	70 1/8" (178.1 cm)	68 3/8" (174.8 cm)	48 1/4" (122.1 cm)	53 1/2" (135 cm)	35 1/4" (90 cm)	32 1/8" (83.7 cm)	29 1/8" (74 cm)	35 1/4" (90.5 cm)	43 3/4" (110.2 cm)
WRF535SMB 25.2 cu. ft.	70 1/8" (178.1 cm)	68 3/8" (174.8 cm)	48 1/4" (122.1 cm)	53 1/2" (135 cm)	35 1/4" (90 cm)	32 1/8" (83.7 cm)	29 1/8" (74 cm)	35 1/4" (90.5 cm)	43 3/4" (110.2 cm)
WRF532SMB 22.1 cu. ft.	70 1/8" (178.1 cm)	68 3/8" (174.8 cm)	47 1/8" (119.5 cm)	52 1/2" (133.0 cm)	34 1/4" (87.3 cm)	31 1/8" (81.1 cm)	28 1/8" (71.4 cm)	32 1/4" (82.9 cm)	42 1/4" (107.6 cm)
WRF540CWB 20 cu. ft.	70 1/8" (178.1 cm)	68 3/8" (174.8 cm)	48" (121.9 cm)	44 1/2" (113.0 cm)	29 1/8" (74.8 cm)	28" (71.1 cm)	24 1/8" (61.3 cm)	35 1/8" (90.5 cm)	39 3/8" (100.0 cm)

LOCATION REQUIREMENTS

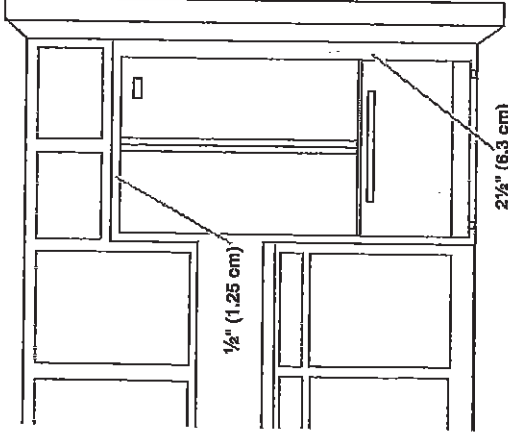

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2 1/2" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10597594B
10/1/14

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

46 of 58

FRONT CONTROL
GAS RANGES

Whirlpool



FEATURING



TimeSavor™ system

The TimeSavor™ system's Frozen Bake Technology allows you to skip preheating for favorites like pizza, lasagna, chicken nuggets, fries or pies so you can cook frozen foods faster.



HeatRight™ system

The HeatRight™ system's True convection helps you to cook food faster with a rear fan and third heating element to circulate hot air over, under, and around food.



CompleteClean™ system

The CompleteClean™ system's EZ-2-Lift™ hinged grates give you quick access to spills on the cooktop. The industry first hinged design allows you to wipe up under them without removing them entirely. For a more thorough clean, the grates are also dishwasher-safe.



Every day, care.

From the #1 Selling Appliance brand in the USA*

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

47 of 58

Front Control Gas Ranges

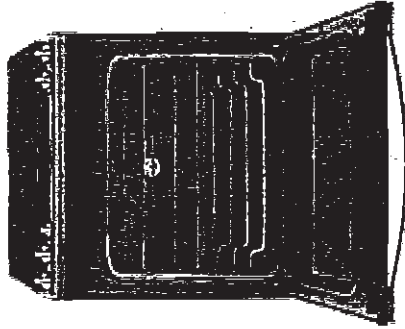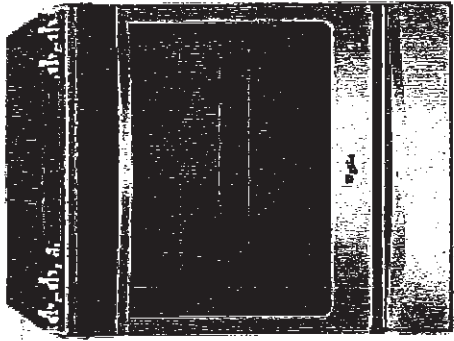

WEG7A5HOF

30" Freestanding Range - 5.8 cu. ft.



TimeSavor™ system
• Frozen Bake™ Technology



HeatRight™ system
• True Convection
• Convection Conversion
• AccuSimmer™ burner
• Circular Oval burner
• Temperature Sensor






CompleteClean System
• EZ-2-Lift™ Hinged Grates
• AquaLift® Self-cleaning Technology
• Dishwasher-safe knobs



ReadySet™ system
• (2) SpeedHeat™ burners
• Rapid Preheat
• Keep Warm
• Delay Cook

Available colors




H White
Ivory



E Black
Ivory

PRODUCT DIMENSIONS

The overall product height, depth, and width are shown. Please refer to the product literature for more information.



- A. 18 1/4" (463 mm) height from floor to top of hood
- B. 20 1/4" (518 mm) height from floor to top of oven
- C. 24 1/4" (619 mm) height from floor to top of broiler
- D. 24 1/4" (619 mm) height from floor to top of cooktop
- E. 24 1/4" (619 mm) height from floor to top of cooktop
- F. 24 1/4" (619 mm) height from floor to top of cooktop
- G. 24 1/4" (619 mm) height from floor to top of cooktop
- H. 24 1/4" (619 mm) height from floor to top of cooktop
- I. 24 1/4" (619 mm) height from floor to top of cooktop

IMPORTANT: Always use the proper installation technique. Refer to the literature for more information. Always use the proper installation technique. Refer to the literature for more information.

Always use the proper installation technique. Refer to the literature for more information.

Always use the proper installation technique. Refer to the literature for more information.


Always use the proper installation technique. Refer to the literature for more information.

Always use the proper installation technique. Refer to the literature for more information.

Always use the proper installation technique. Refer to the literature for more information.

Always use the proper installation technique. Refer to the literature for more information.

CABINET OPENING DIMENSIONS

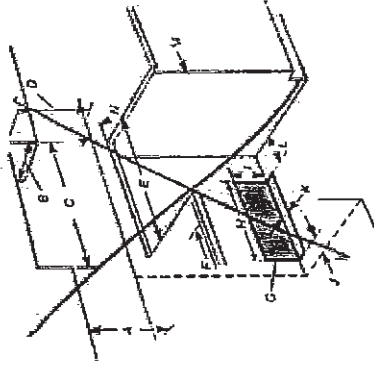

- A. 18 1/4" (463 mm) height from floor to top of hood
- B. 20 1/4" (518 mm) height from floor to top of oven
- C. 24 1/4" (619 mm) height from floor to top of broiler
- D. 24 1/4" (619 mm) height from floor to top of cooktop
- E. 24 1/4" (619 mm) height from floor to top of cooktop
- F. 24 1/4" (619 mm) height from floor to top of cooktop
- G. 24 1/4" (619 mm) height from floor to top of cooktop
- H. 24 1/4" (619 mm) height from floor to top of cooktop
- I. 24 1/4" (619 mm) height from floor to top of cooktop

IMPORTANT: Always use the proper installation technique. Refer to the literature for more information.

Always use the proper installation technique. Refer to the literature for more information.

Always use the proper installation technique. Refer to the literature for more information.

Always use the proper installation technique. Refer to the literature for more information.

Always use the proper installation technique. Refer to the literature for more information.

Always use the proper installation technique. Refer to the literature for more information.

Always use the proper installation technique. Refer to the literature for more information.



*Compared to a traditional preheat and bake cycle for pizza, mugbake/roast, pizza and lasagna. **Compared to thermal-bake cycle on the same model. †Based on 12-month average of unit sales, refrigeration, cooking, dishwashers, and laundry appliances, including 2014.

©2016 Whirlpool. All rights reserved. 576 Form No. WC15009B

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

48 of 58

Whirlpool® 30" (76.2 cm) Slide-in Gas Range C

PRODUCT MODEL NUMBERS

WEG76QH0D

WEG76QH0D

WEG745H0F

GAS SUPPLY REQUIREMENTS

Gas supply line:


- Provide a gas supply line of 3/4" (1.9 cm) rigid pipe to the range location. A smaller size pipe on longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be 1/2" (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.
- NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape.

Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 to 6 ft (122 to 182.4 cm) long, 1/2" (1.3 cm) or 3/4" (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.



- A 1/2" (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the appliance pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the range.
- Must include a shutoff valve:
The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



- A. Gas supply line
- B. Shutoff valve "open" position
- C. To range

Gas Pressure Regulator


The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

Natural gas:
Minimum pressure: 5" WCP
Maximum pressure: 14" WCP
LP gas:
Minimum pressure: 11" WCP
Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

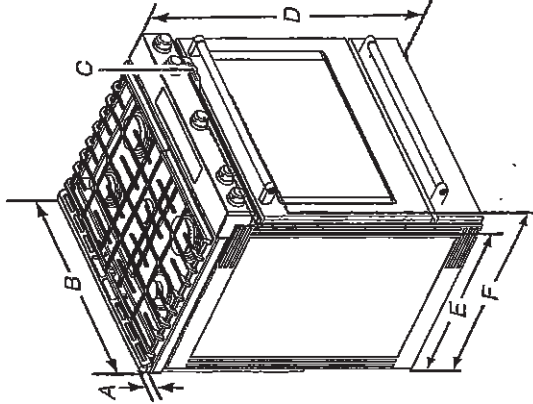

- A. 1 3/16" (3.0 cm) height from cooktop to top of vent
- B. 29 3/8" (75.9 cm)
- C. Model/serial number plate (located behind the oven door on the top right-hand side of the oven frame)
- D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*
- E. 28 1/8" (71.9 cm) max. depth from front of console to back of range.
- F. 28 7/8" (73.3 cm) max. depth from handle to back of range.

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

* Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Type of Gas

Natural gas:

- This range is factory set for use with Natural gas. See "Gas Conversions" section. The model/serial rating plate located behind the control panel has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP gas conversion:

Conversion must be done by a qualified service technician. No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.


®TEFLON is a registered trademark of Chemours.

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

49 of 58

SHARP

SMD2477ASC
24-INCH MICROWAVE DRAWER® OVEN

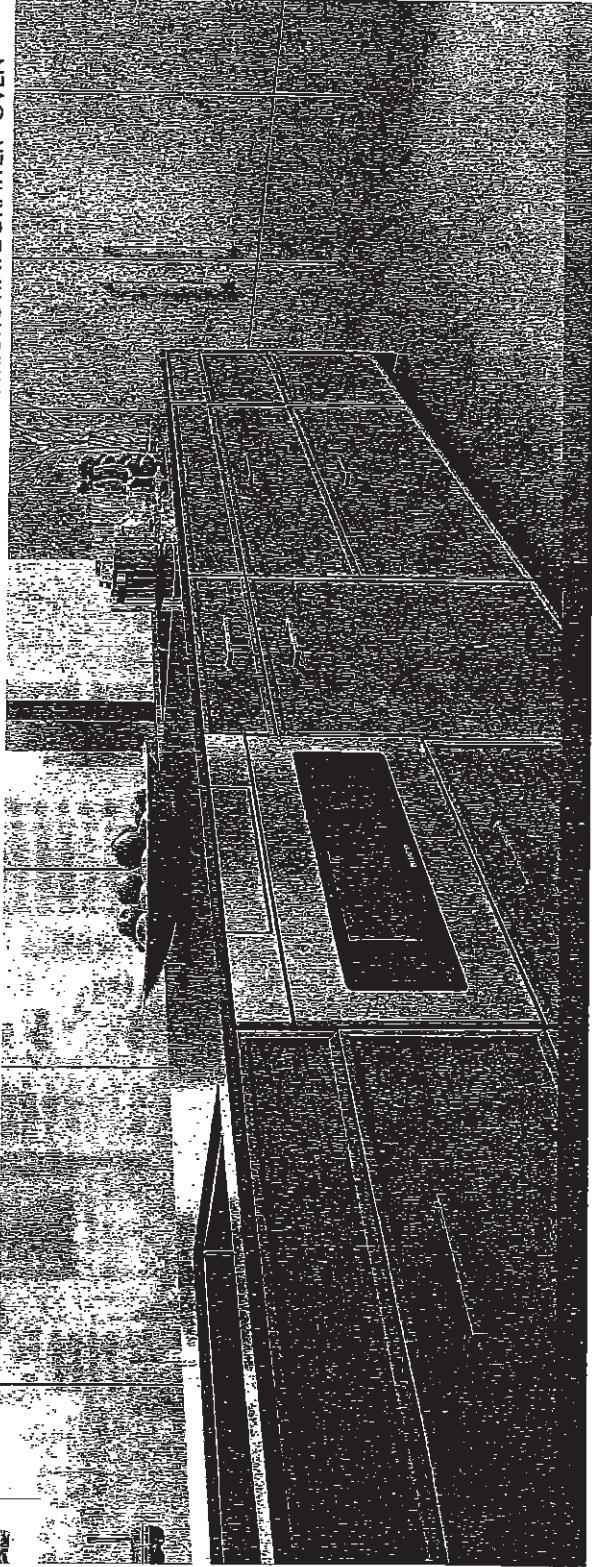

TAKE YOUR MICROWAVE TO A BETTER PLACE

It's your kitchen, your design and your lifestyle. Sharp's Microwave Drawer Oven allows you to focus on the design elements you prefer by removing the microwave from sightlines and enabling more design versatility. The Microwave Drawer offers flexible placement options below an island, peninsula, or standard cabinetry, and can also be installed adjacent to your wall oven. The Microwave Drawer allows you to showcase your design savvy and create a kitchen that flows with your lifestyle.

Sharp introduces the next generation of this successful appliance—model SMD2477ASC—a 24" microwave drawer with a simpler and sleeker design to match more built-in appliances.

Design Flexibility

Sharp's Microwave Drawer product expands the option for microwave placement in almost any kitchen plan—it's a perfect choice for open-plan kitchens, islands, peninsulas, and a great addition to wet bars, family rooms and home theatres.

Location and Counter Space Saving

You may place the drawer under a counter, cooktop or wall oven or above a warming drawer without a built-in kit, additional trim or venting. Sharp microwave drawer provides the best solution for a cleaner, uncluttered counter space.

SHARP's Exclusive AutoTouch™ System

Sharp's exclusive AutoTouch™ system allows you to open and close the drawer automatically at one-finger operation by pressing a button on the control panel.

New Hidden Control Panel

The new SMD2477ASC model features a hidden control panel which gives a more integrated look and feel within the kitchen. The new tall control panel, angled at 45° degrees, is easy to see, easy to access and easy to use.

Specifications

TECHNICAL SPECIFICATIONS	
Size	24" wide
Microwave Capacity	1.2 cu.ft
Microwave Power	950 watts
Control Panel	Digital LCD Display
Control Type	Hidden Control Panel
Drawer Opening	AutoTouch™ System
Power Level	11
Sensor Cook, Reheat, Popcorn Settings	13
Reheat Auto Settings	2
Defrost Auto Settings	6
Keep Warm Setting	Yes, up to 30 min.
Self / Soften / Settings	Yes
Beverage Setting	Yes
Programmable Stages	Yes, 4
Digital Clock	Yes
Kitchen Timer	Yes
Child Lock	Yes
+30 sec	Yes
Interior Oven Light	Yes


TECHNICAL SPECIFICATIONS CONTINUED	
Demonstration Mode	Yes
Built-In Ready	Yes
Available Colour	Stainless Steel
Accessory	SKMID24FQAS
DIMENSIONS/WEIGHT(inches/lbs.)	
Cut-out Dimension	22 1/8" x 15 9/16"
Product Dimension	23 7/8" x 23 1/64" x 15 7/8"
Box Dimension	29.8" w x 27.9" x 21.9"
Net Weight	74 lb.
Gross Weight	85.8 lb.
POWER/SAFETY	
Power / Ratings	120V, 60Hz
Ratings	1.67Kw, 14.5Amps
Safety Compliance	FCC, DHHS, cUL
WARRANTY/UPC	
Warranty	1 year parts & labour with in-home service; 4 additional years for magnetron tube only
UPC	074000619944

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

50 of 58

SHARP

SMD2477ASC

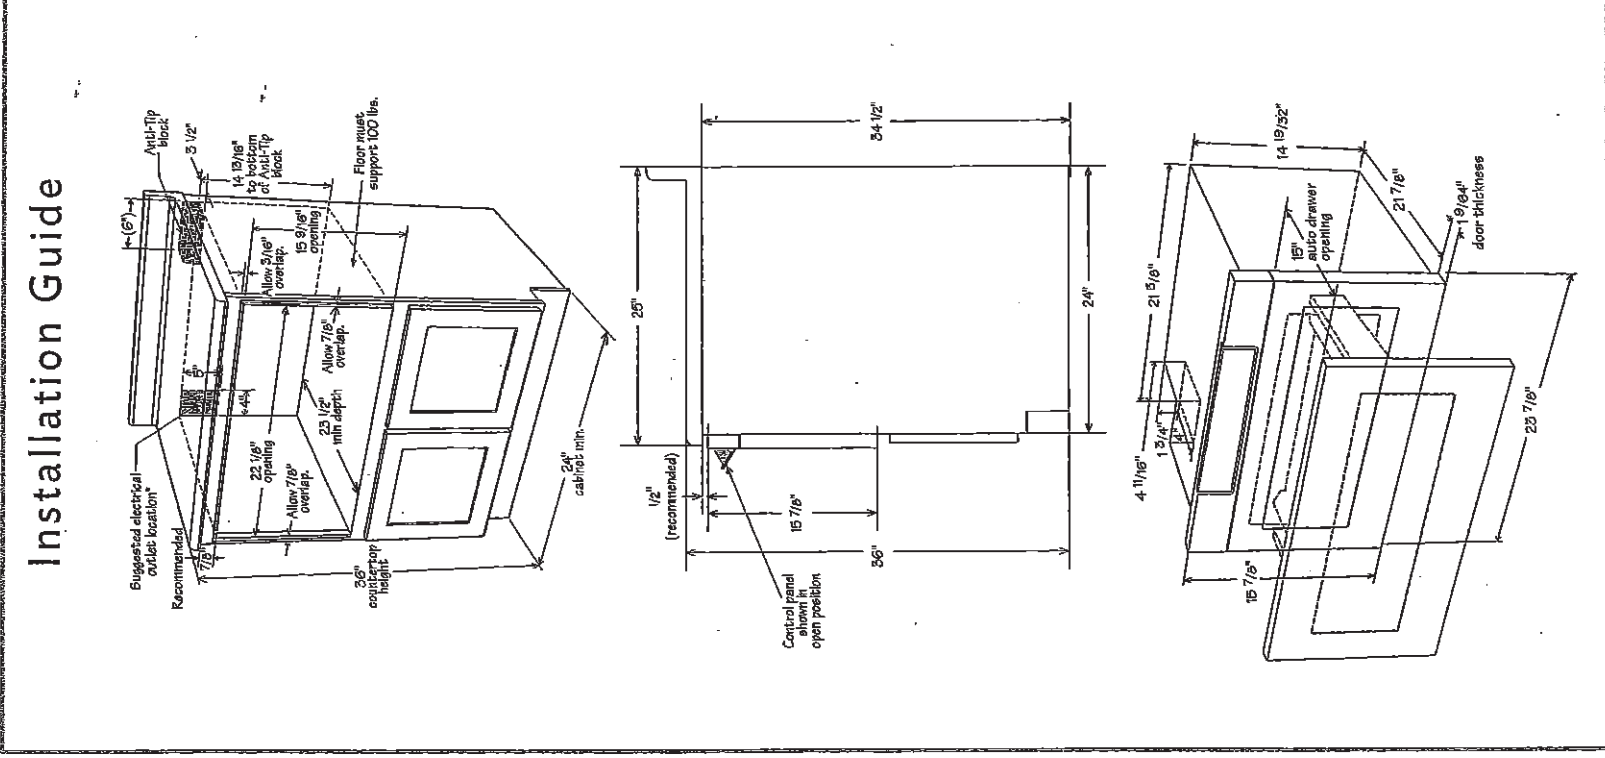

© 2016 Sharp Electronics Corporation. All rights reserved.
Product specification and design are subject to change without notice.

SHARP ELECTRONICS OF CANADA LTD.
335 Brimley Road East, Mississauga, Ontario, L4Z 1W7
www.sharp.ca

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF10PLA	WDE30PSX
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF10PAY	WDF730PAY
WDF121PAF	WDF20PAD	WDI710PAY
WDF310PAA	WDF30PAY	WDT720PAD
WDF310PCA	WDF30PLY	WDI770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord: Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.


Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 1/4" P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

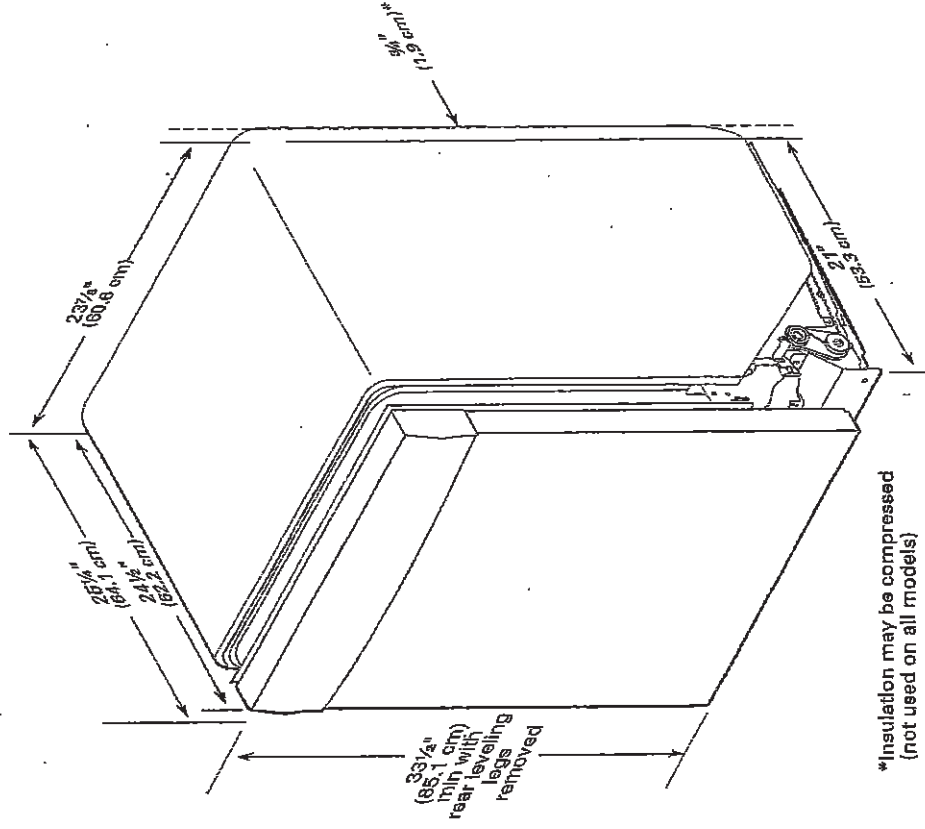


*Insulation may be compressed (not used on all models)

CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear levelling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

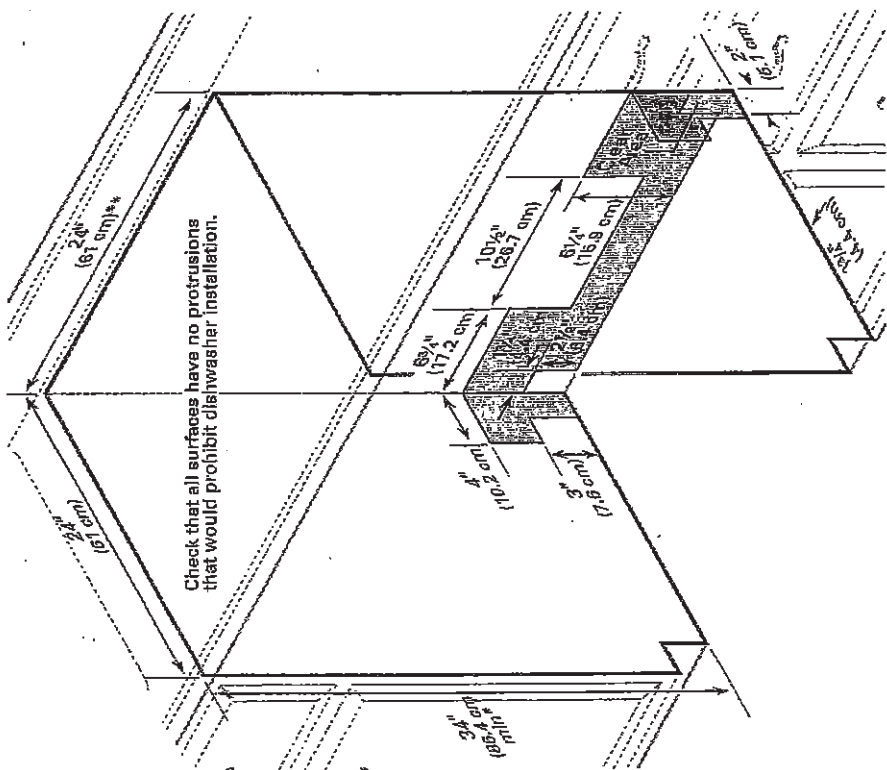


UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

53 of 58

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW

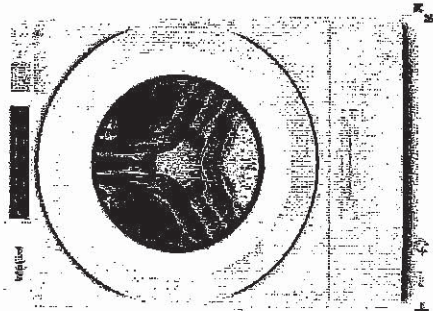

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool 5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser
Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	88.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).


IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

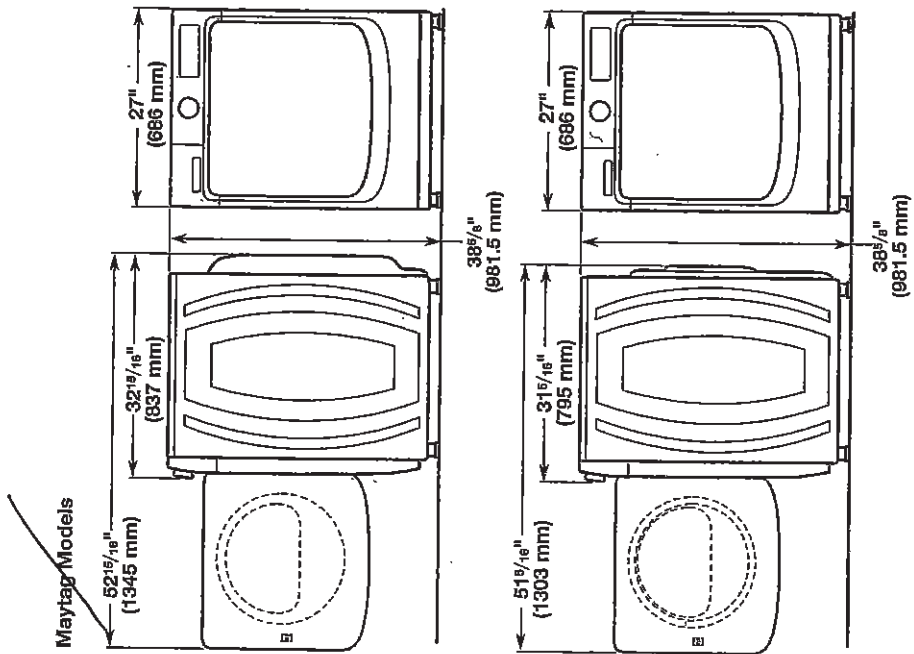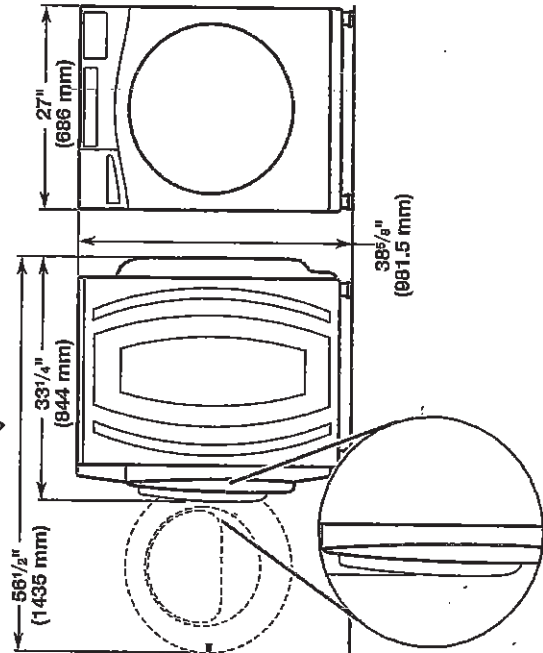

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

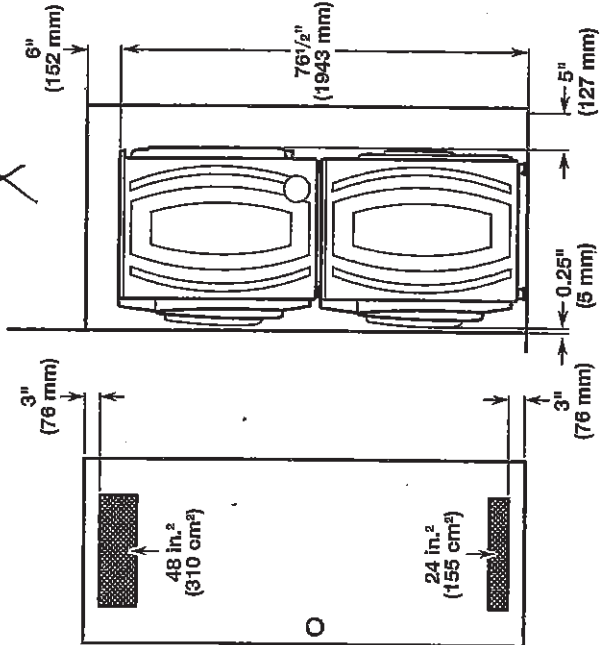


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD


55 of 58

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

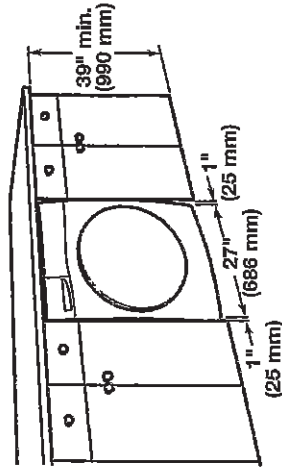

Recessed area or closet installation:

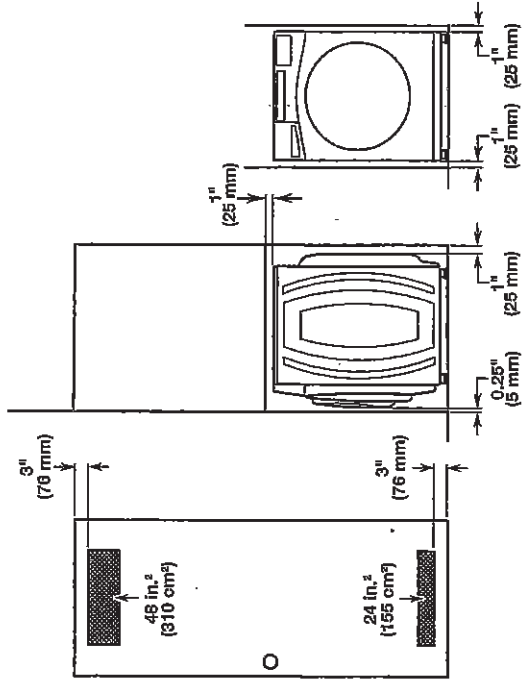

Custom cabinet installation:

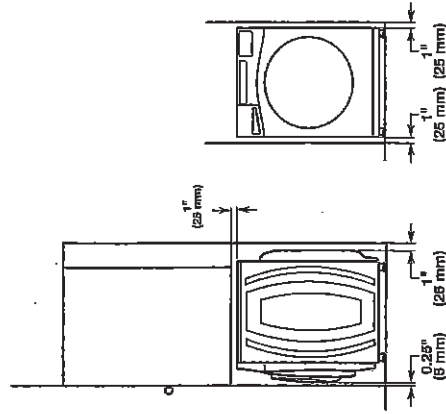


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

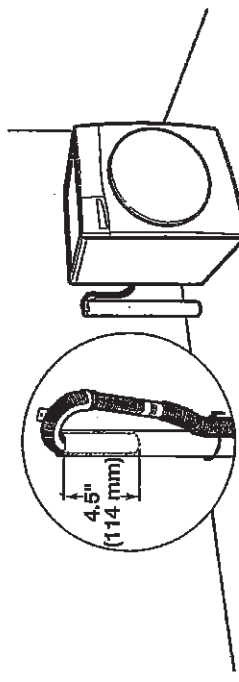


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

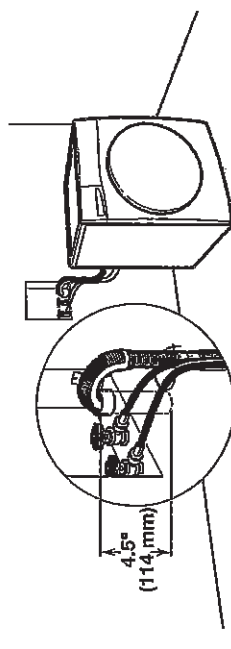

See requirements for floor standpipe drain system.

Laundry tub drain system

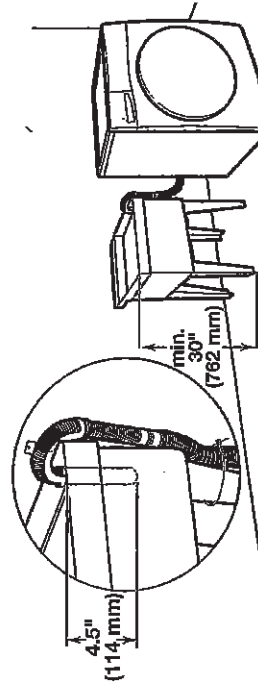


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

UK-75 WALLACETON
LOT 1
28-2878 CRN ELEV B
THE WESTWOOD

56058

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW

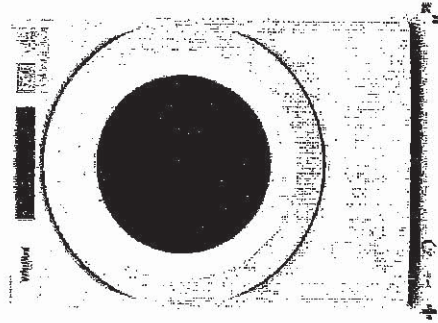

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	69.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical


Hz	60
----	----

Power Cord Included

Yes

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

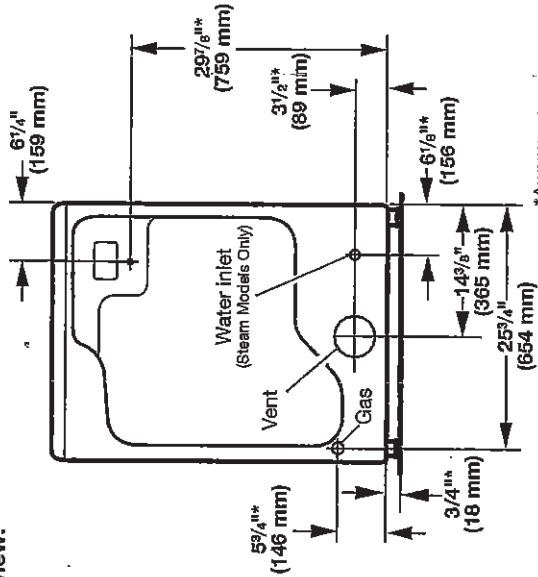

*Approx. measurement

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

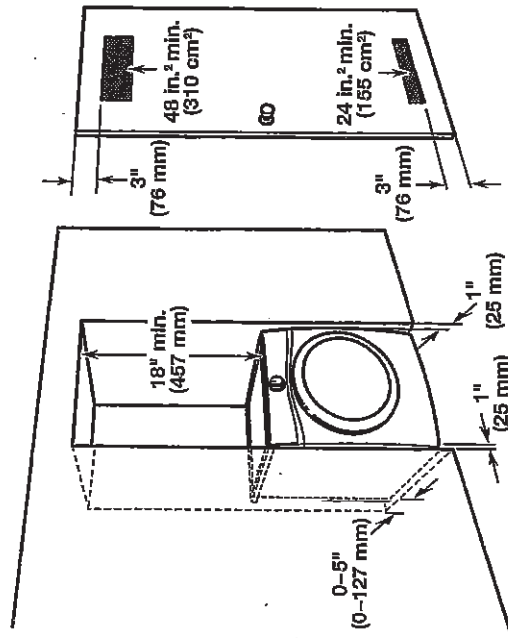

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

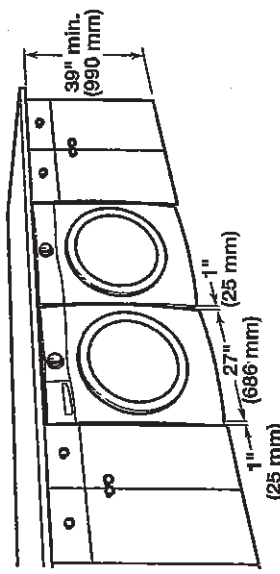

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

UK-75 WALLACETON
LOT 1

28-2878 CRN ELEV B
THE WESTWOOD

58 of 58

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING


Explosion Hazard
Keep flammable materials and vapors, such as gasoline, away from dryer.
Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
Failure to do so can result in death, explosion, or fire.

You will need:


- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS
Front view:

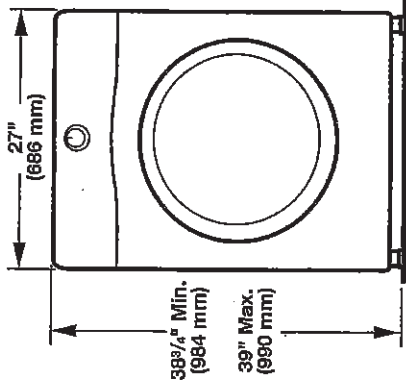

Side view:
Whirlpool Models

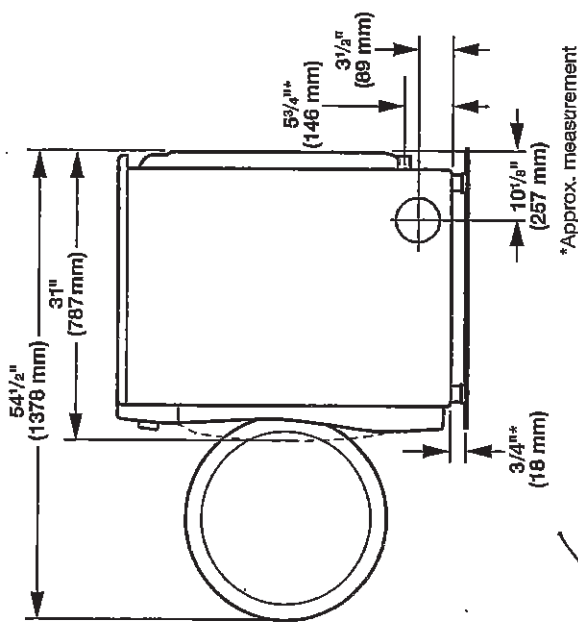

Maytag Models

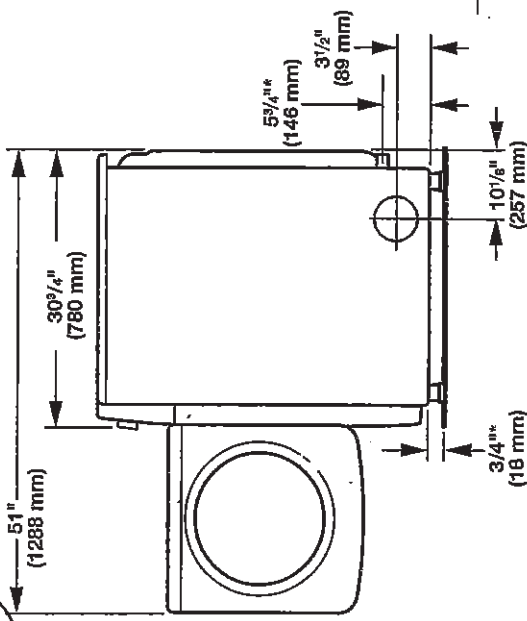

*Approx. measurement