



17-Jun-21

REVISED

PRE-Sales Selection Sheet
CHECKLIST

7 of 39
C2

LOT	053-3	20-1841 ELEV B THE ARLINGTON
PURCHASERS:	YANG LIU	CONTACT NO: 416-303-6099
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	

- ☐ FINISHED BASEMENT

☐ COLD CELLAR
- UPGRADED / MODIFIED ELEVATION
- ☐ CORNER UPGRADE

☐ SIDE UPGRADE

☐ REAR UPGRADE
- CEILING UPGRADE - SMOOTH
- ☐ MAIN FLOOR

☐ SECOND FLOOR
- ADDITIONAL ROUGH-INS
- ☒ 200 AMP SERVICE

☐ WET BAR ROUGH IN
- GAS ROUGH-IN
- ☐ STOVE

☐ BBQ
- HOODFAN VENTING

☐ WALK OUT DECK

☐ WALK OUT BASEMENT

☐ BASEMENT

☐ HUMIDIFIER

☒ AIRCON

☐ DRYER

☐ ADDITIONAL FIREPLACE

☐ 6" ROUND DUCT
☒ 7" ROUND DUCT
REVISED FROM 6" DUCT

FULL BASEMENT STAIRS: PAINT GRADE

UPPER BASEMENT STAIRS: N/A

LOWER BASEMENT STAIRS: N/A

STAIRS TO LOWER LEVEL: ALL OAK

STAIRS TO UPPER LEVEL: N/A

MAIN STAIRS: ALL OAK

MEDIA STAIRS (if applicable): N/A

Date	June 17/21	Signature on	June 17/21	Decor Consultant
		Purchaser	File	
Date		Purchaser		

Date Approved: HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



17-Jun-21

REVISED

SCHEDULE "E"

8 of 39

Addendum forms part of, and is to be read with the attached offer to Purchase for:

LOT	053-3	20-1841 ELEV B THE ARLINGTON
PURCHASERS:	YANG LIU	CONTACT NO: 416-303-6099
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	

The following items are included in the Agreement of Purchase and Sales, and are from Vendors standard samples:

Appliances	
2	- FIVE APPLIANCES: SS FRIDGE, STOVE, DISHWASHER, WHITE FRONT LOADER WASHER/DRYER- TOWNHOMES Qty: 1
Security	
28	- TOTAL HOME PACKAGE AS PER SCHEDULE A Qty: 1
X_Credits	
38	- TEN THOUSAND DOLLARS (\$10,000) AT DÉCOR (NO CASH VALUE) TOWNHOMES Qty: 1
* 38	- ONE THOUSAND DOLLARS (\$1,000.00) AT DÉCOR (NO CASH VALUE) AS A SECOND TIME HEATHWOOD PURCHASER AS PER AMENDMENT JUNE 14, 2021 Qty: 1
X_Notes	
39	- OPTIONAL LOWER LEVEL WITH BEDROOM 4 AND BATH (THE ARLINGTON- HEATHWOOD COLLECTION) AS PER AMENDMENT TO AGREEMENT DATED AUGUST 13, 2020 Qty: 1

June 14/21	Signature on file	June 14/21	Grit Salem
Date	Purchaser	Date	Décor Consultant
APPROVED		M. Loren	
Date	Purchaser		



14-Jun-21

Interior Finishing Selection Sheet

06-

LOT 053-3

20-1841 ELEV B THE ARLINGTON

PURCHASERS: YANG LIU

CONTACT NO: 416-303-6099

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Appliances

6-34 Kitchen HoodFan

Cabinetry

1-9203 Kitchen Cabinet Colour/Style

25-6265 Main Bathroom Cabinet Colour/Style

29-7676 Main Bathroom Cabinet Hardware

28-8796 Main Bathroom Countertop

20-6265 Master Ensuite Cabinet Colour/Style

22-7676 Master Ensuite Cabinet Hardware

21-8796 Master Ensuite Countertop

359-6265 Optional Lower Level Bath Cabinet Colour/Style

360-7676 Optional Lower Level Bath Cabinet Hardware

361-8796 Optional Lower Level Bath Countertop

Carpet

37-9246 Bedroom 2 Flooring

38-9246 Bedroom 3 Flooring

363-9246 Bedroom 4 (Optional Lower Level) Flooring

14-9246 Family Room Flooring

36-9246 Master Bedroom Flooring

366-9246 Optional Lower Level Hall Flooring

52-1079 Throughout Underpad

Ceramics

16-8916 Foyer Flooring

UPG

☐ Air King Under Cabinet Range Hood (Standard for Towns Only)
STAINLESS STEEL AV1308 STD 30"

NOTE: 7" DUCT

☐ MANCHESTER ORCHID Classic II UPG MDF PAINTED

☐ MANCHESTER SHALE GREY CL Viking III MAPLE

☐ HARDWARE 12843 STD

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

☐ MANCHESTER SHALE GREY CL Viking III MAPLE

☐ HARDWARE 12843 STD

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

☐ MANCHESTER SHALE GREY CL Viking III MAPLE

☐ HARDWARE 12843 STD

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

☐ Underpad 500 Series STD

☒ Chambray White OV.CH.WHT.1224 UPG_2 12 x 24 TO BE
INSTALL FROM FRONT TO BACK

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date June 14/21 3:14 PM

Purchaser

Date June 14/21

APPROVAL

Date

Décor Consultant

[Signature]

[Signature]

Date Purchaser

Date Approved HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



Interior Finishing Selection Sheet

14-Jun-21

LOT 053-3

20-1841 ELEV B THE ARLINGTON

PURCHASERS: YANG LIU

CONTACT NO: 416-303-6099

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Ceramics

UPG

- | | |
|--|--|
| 17-2222 Foyer Grout | ☐ Grout (105) Driftwood STD |
| 4-8639 Kitchen Backsplash | ☒ Penny Rounds Snow White Matte WB.PR.SWT.1212.MT UPG 4 12 x 12 |
| 5-2226 Kitchen Backsplash Grout | ☐ Grout (00) White STD |
| 338-8916 Kitchen Flooring | ☒ Chambray White OV.CH.WHT.1224 UPG_2 12 x 24 TO BE INSTALL FROM FRONT TO BACK |
| 339-2222 Kitchen Grout | ☐ Grout (105) Driftwood STD |
| 30-8916 Main Bathroom Flooring | ☒ Chambray White OV.CH.WHT.1224 UPG_2 12 x 24 TO BE INSTALL FROM SIDE TO SIDE |
| 31-2222 Main Bathroom Grout | ☐ Grout (105) Driftwood STD |
| 112-9022 Main Bathroom Tub Wall Tile | ☐ Weave Tender Grey QT.WV.TGR.0810 STD 8 x 10 TO BE INSTALL VERTICALLY |
| 113-2226 Main Bathroom Tub Wall Tile Grout | ☐ Grout (00) White STD |
| 23-8916 Master Ensuite Floor Tile | ☒ Chambray White OV.CH.WHT.1224 UPG_2 12 x 24 TO BE INSTALL FROM FRONT TO BACK |
| 24-2222 Master Ensuite Floor Tile Grout | ☐ Grout (105) Driftwood STD |
| 73-8661 Master Ensuite Shower Floor Tile | ☐ Ontario Series Mosaic Snow White Matte OD.ON.SWT.0202.MT.N STD 2 x 2 |
| 74-2226 Master Ensuite Shower Floor Tile Grout | ☐ Grout (00) White STD |
| 147-8925 Master Ensuite Shower Jamb(s) and Sill(s) | ☐ Shower Jamb / Sill Sky Grey (Light Grey) STD |
| 104-9022 Master Ensuite Shower Wall Tile | ☐ Weave Tender Grey QT.WV.TGR.0810 STD 8 x 10 TO BE INSTALL VERTICALLY |
| 105-2226 Master Ensuite Shower Wall Tile Grout | ☐ Grout (00) White STD |
| 365-8916 Mud Room (Optional Lower Level) Flooring | ☒ Chambray White OV.CH.WHT.1224 UPG_2 12 x 24 TO BE INSTALL FROM FRONT TO BACK |
| 364-2222 Mud Room (Optional Lower Level) Grout | ☐ Grout (105) Driftwood STD |
| 350-8916 Optional Lower Level Bath Flooring | ☒ Chambray White OV.CH.WHT.1224 UPG_2 12 x 24 TO BE INSTALL FROM FRONT TO BACK |
| 351-2222 Optional Lower Level Bath Grout | ☐ Grout (105) Driftwood STD |

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date	June 14/21	Date	June 14/21
Purchaser	<i>[Signature]</i>	Décor Consultant	<i>[Signature]</i>

Date		Date Approved	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4
------	--	---------------	--



14-Jun-21

Interior Finishing Selection Sheet

20-1841 ELEV B THE ARLINGTON

LOT 053-3

PURCHASERS: YANG LIU

CONTACT NO: 416-303-6099

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Ceramics

352-9022 Optional Lower Level Bath Tub Wall Tile

☐ Weave Tender Grey QT.WV.TGR.0810 STD 8 x 10 TO BE
INSTALL VERTICALLY

353-2226 Optional Lower Level Bath Tub Wall Tile Grout

☐ Grout (00) White STD

32-8916 Powder Room Flooring

☒ Chambray White OV.CH.WHT.1224 UPG_2 12 x 24 TO BE
INSTALL FROM FRONT TO BACK

33-2222 Powder Room Grout

☐ Grout (105) Driftwood STD

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-9114 Great Room Fireplace Mantle

☐ Paint Grade Mantel- Cabinet (Per Plan) WHITE NF 15 STD

~~132-8873 Great Room Fireplace Surround~~

~~☐ 3 pc 4" Marble Surround Nero Marquina STD DELETED~~

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-8595 Kitchen Countertop

☒ Quartz-Caesarstone OCEAN FOAM #6141 Group 2 UPG 3/4" with Mitered Edge

Hardwood

99-7498 Dining Room Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

11-7498 Great Room Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

35-7498 Upper Hall Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

Interior Railings

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

43-8148 Stairs to Upper Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

Interior Stairs

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date June 14/21 3:17 PM Purchaser

Date June 14/21 3:17 PM

J. J. Adams

Purchaser

Date

Décor Consultant

M. J. Adams

Date Purchaser

Date Approved HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4



14-Jun-21

Interior Finishing Selection Sheet

LOT 053-3

20-1841 ELEV B THE ARLINGTON

PURCHASERS: YANG LIU

CONTACT NO: 416-303-6099

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Interior Stairs

- 116-1713 Basement Stairs Type ☐ Paint Grade Stairs STD
- 46-1713 Stairs to Lower Level Colour ☐ Paint Grade Stairs STD
- 45-1712 Stairs to Lower Level Type ☐ Oak Stairs UPG_1
- 45-1713 Stairs to Lower Level Type ☐ Paint Grade Stairs STD
- 45-1712 Stairs to Lower Level Type ☐ Oak Stairs UPG_1
- 39-1712 Stairs to Upper Level Type ☐ Oak Stairs UPG_1

Interior Trim

- 91-9374 Throughout Trim Size ☐ 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings STD

Painting

- 46-7761 Stairs to Lower Level Colour ☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl GRYPHON SHADE WILL VARY

- 50-7761 Stairs to Lower Level Handrail/Pickets/Posts Colour ☒ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl GRYPHON SHADE WILL VARY

- 40-7761 Stairs to Upper Level Colour ☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl GRYPHON SHADE WILL VARY

- 44-7761 Stairs to Upper Level Handrail/Pickets/Posts Colour ☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl GRYPHON SHADE WILL VARY

- 240-1716 Throughout Trim - Paint Colour ☐ Trim WHITE STD

- 51-1717 Throughout Walls - Paint Colour ☐ Wall WARM GREY 22 STD

Plumbing

- 266-1737 Main Bathroom Plumbing Fixture (Colour) ☐ Plumbing Fixtures WHITE STD

- 149-1737 Master Ensuite Plumbing Fixture (colour) ☐ Plumbing Fixtures WHITE STD

- 362-1737 Optional Lower Level Bath Plumbing Fixture (Colour) ☐ Plumbing Fixtures WHITE STD

- 34-1737 Powder Room Plumbing Fixture (Colour) ☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

June 14/21 Yang Liu
Date Purchaser

June 14/21 Jia Sabana
Date **APPROVE!** Décor Consultant

Date Purchaser

Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



14-Jun-21

Sales Selection Sheet
of

LOT 053-3

20-1841 ELEV B THE ARLINGTON

PURCHASERS: YANG LIU

CONTACT NO: 416-303-6099

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein. It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Cabinetry

1363 Optional Extras
09J- Additional Crown moulding per piece

KITCHEN

Qty: 2

1422 Optional Upgrade
CLASSIC II

Kitchen

Qty: 1

1327 Optional Extras
01G- DO NOT drill for hardware (hardware will not be supplied, credited, or installed at a later date)

Kitchen

Qty: 1

DO NOT INSTALL HARDWARE IN THE KITCHEN

Ceramics

1692 Upgrade 2 Tile
SKETCH # 7 PAGE 17

Foyer Floor

Qty: 1

1694 Upgrade 2 Tile
SKETCH # 7 PAGE 17

Kit/Brk Floor

Qty: 1

1699 Kitchen Optional
Backsplash

Qty: 1

1695 Upgrade 2 Tile
SKETCH # 8 PAGE 18

M. Ensuite Floor

Qty: 1

1696 Upgrade 2 Tile
SKETCH # 8 PAGE 18

Main Bth Floor

Qty: 1

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

June 14/21 [Signature]

14 June 21

[Signature]

Date

Purchaser

DATE APPROVED

Décor Consultant

Date

Purchaser

[Signature]

Date Approved: HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



14-Jun-21

Sales Selection Sheet
OF 3

LOT	053-3	20-1841 ELEV B THE ARLINGTON
PURCHASERS:	YANG LIU	CONTACT NO: 416-303-6099
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	
		HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1698	Upgrade 2 Tile SKETCH # 6 PAGE 16	Qty: 1	Opt Bed4 Bth Floor
1697	Upgrade 2 Tile SKETCH # 6 PAGE 16	Qty: 1	Opt Bed4 Mud Floor
1693	Upgrade 2 Tile	Qty: 1	Powder Floor
Granite			
799	Optional Upgrade Countertop 3/4" GROUP 2 with double edge	Qty: 1	Kitchen

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

June 14/21		June 21	
Date	Purchaser	Date	Décor Consultant
Date	Purchaser		

Date Approved: HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4

C-2 COUNTRY LANE
LOT 53-3
20-1841 ELEV. B
THE ARLINGTON


15 of 39

The Arlington

20-1841 ELEV. B

ELEVATION A & B: 1,841 SQ FT
Sketch # 5

Opt. Lower Level with 4 Bedroom

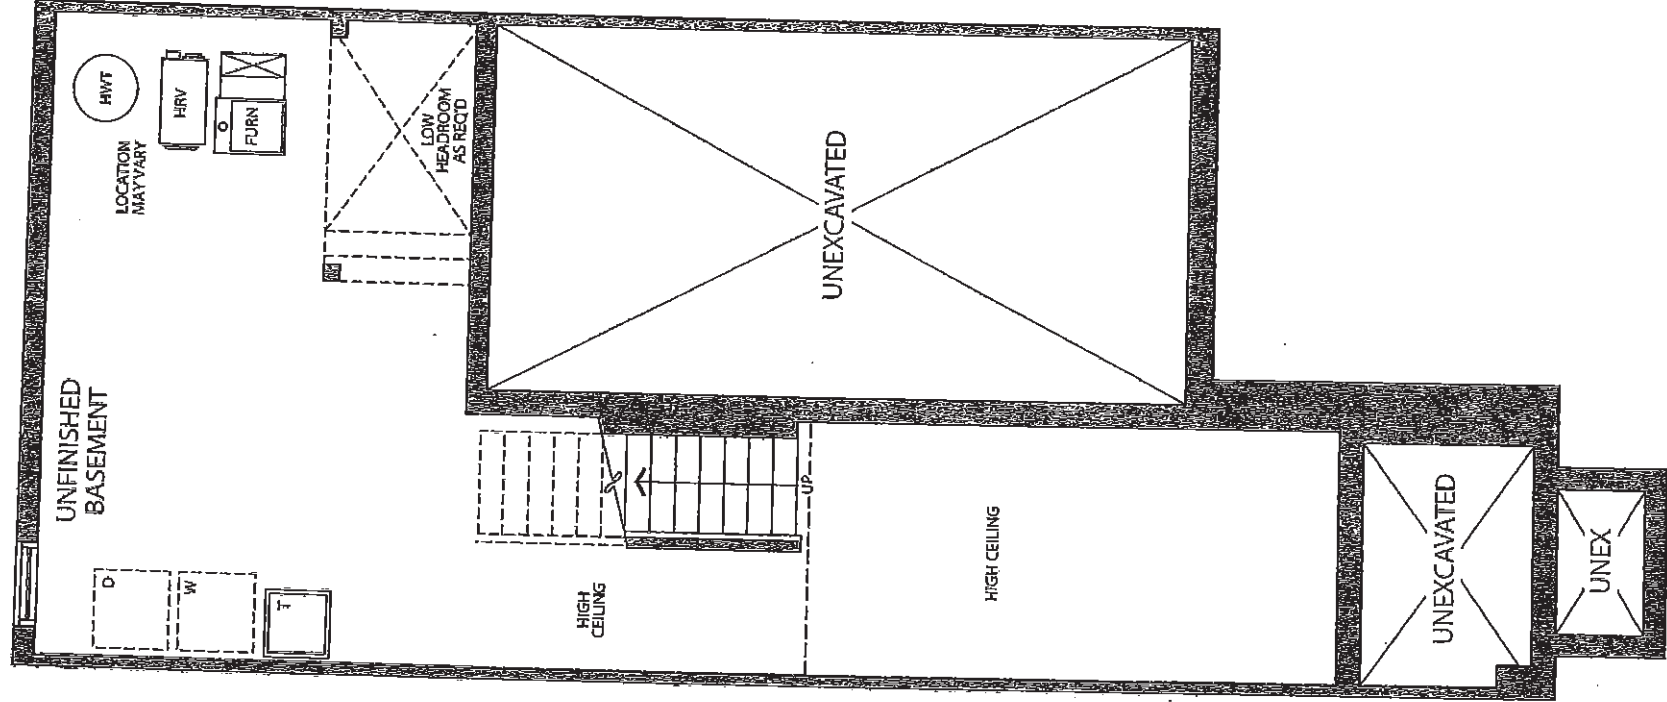

OPT. BASEMENT FOR
OPT. LOWER LEVEL WITH 4 BEDROOMS
ELEVATION A & B

7/2


C-2 COUNTRY LANE
LOT 53-3
20-1841 ELEV. B
THE ARLINGTON

16 of 39
The Arlington

20-1841 ELEV. B

ELEVATION A & B: 1,841 SQ FT
Sketch #6

Opt. Lower Level with 4 Bedroom

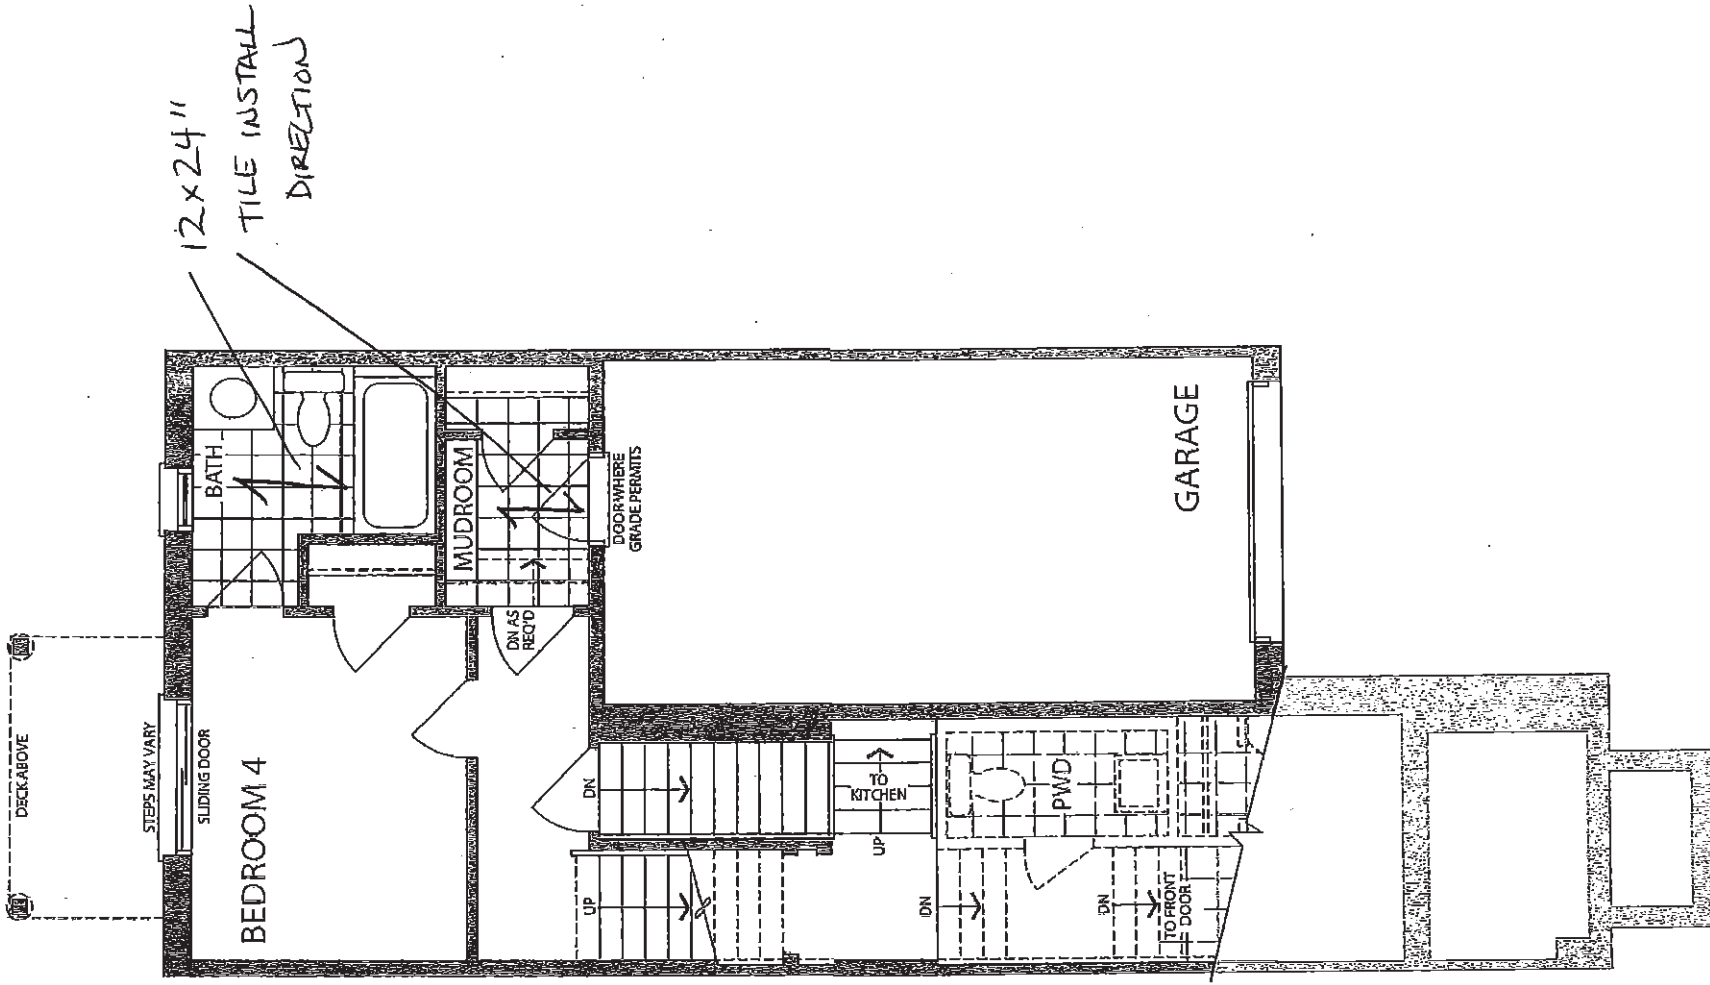

OPT. LOWER LEVEL
WITH 4 BEDROOM
ELEVATION A & B

C-2 COUNTRY LANE
LOT 53-3
20-1841 ELEV. B
THE ARLINGTON


17 of 39 The Arlington

20-1841 ELEV. B

ELEVATION A & B: 1,841 SQ FT

Sketch # 7

Opt. Lower Level with 4 Bedroom

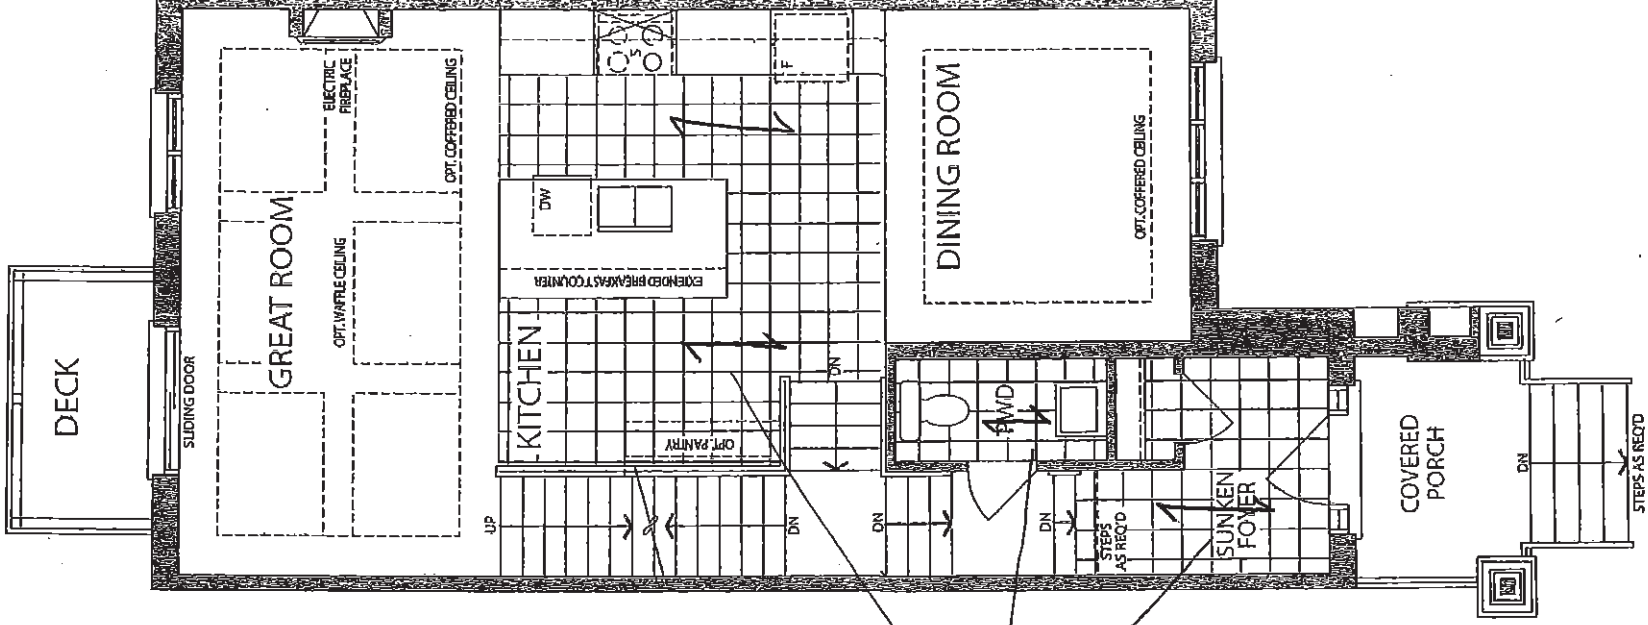

MAIN LEVEL
ELEVATION B


18 of 39 The Arlington

20-1841 ELEV. B

ELEVATION A & B: 1,841 SQ FT

Sketch #8

Opt. Lower Level with 4 Bedroom

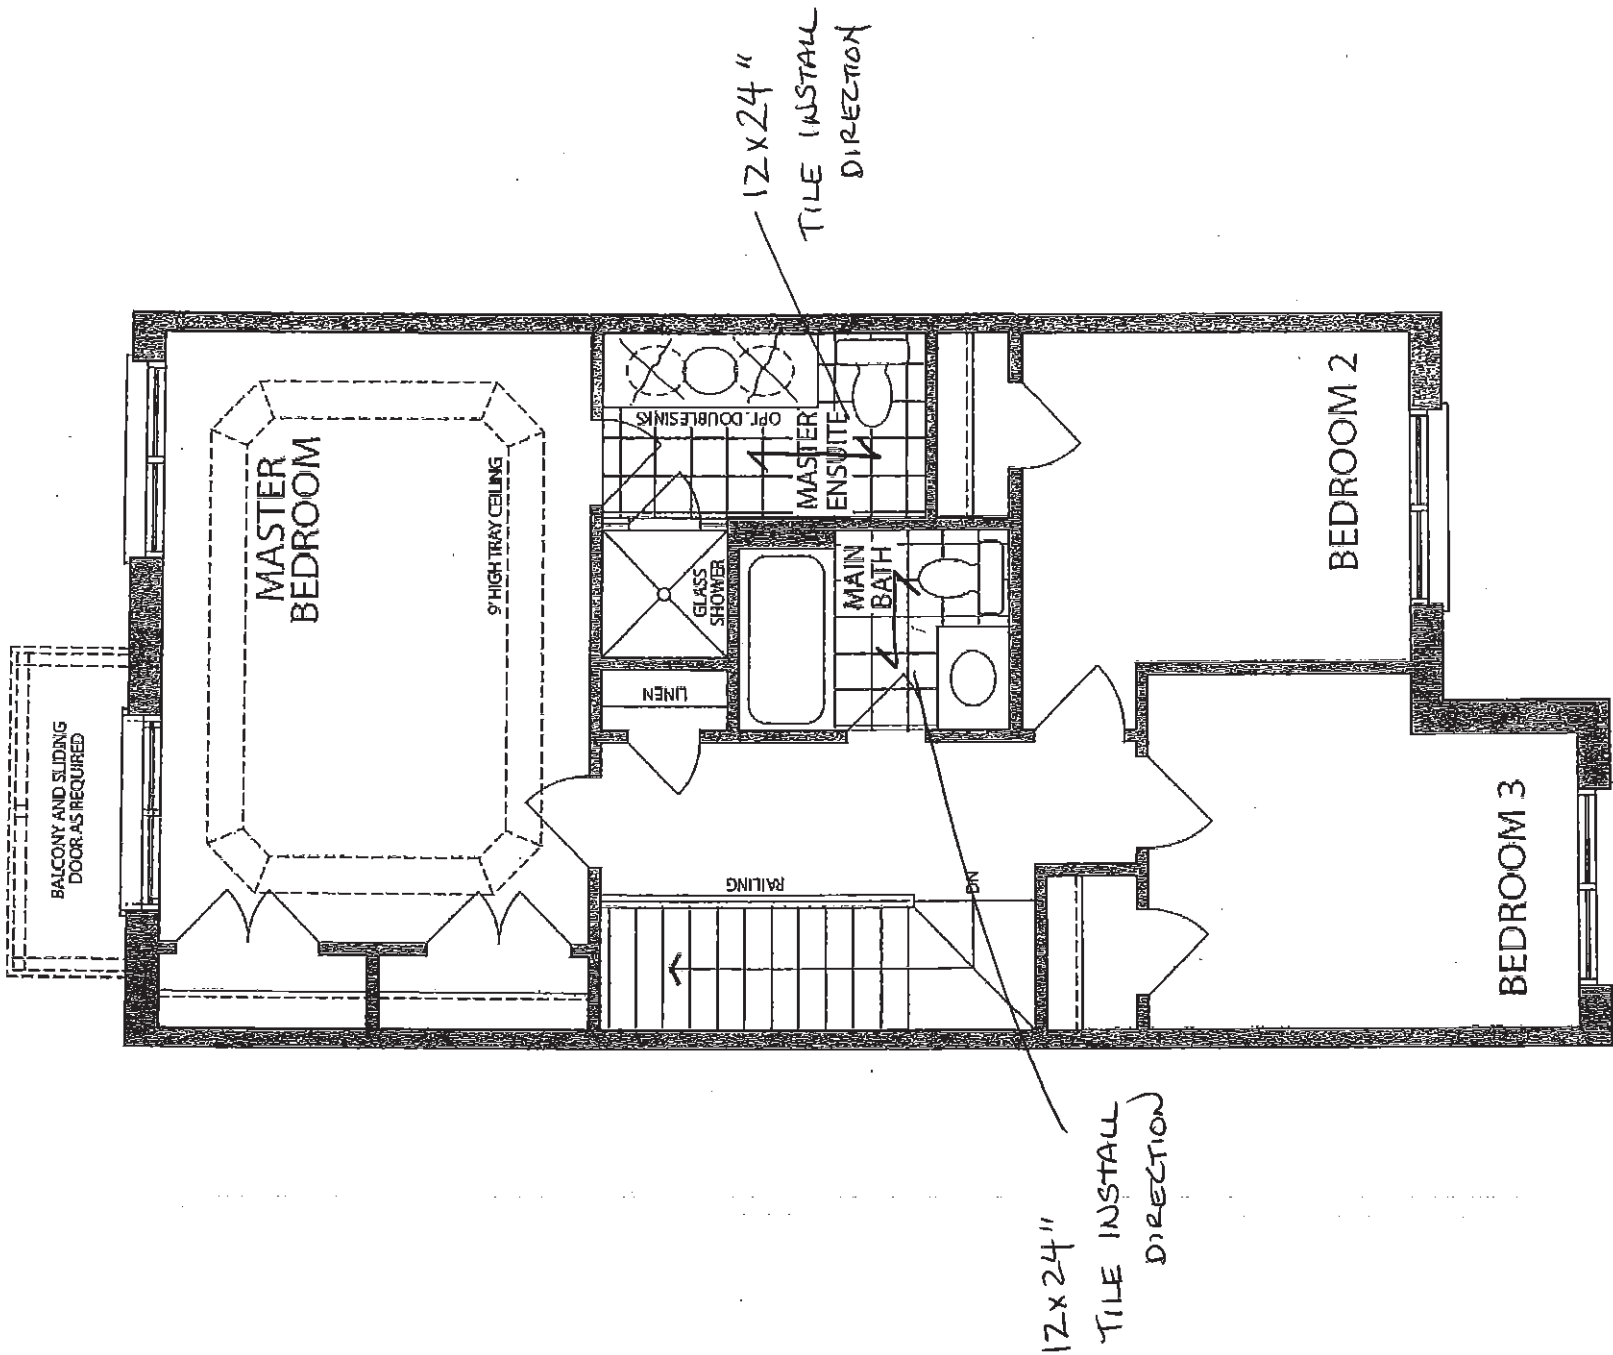


UPPER LEVEL
ELEVATION B

✓

C2 COUNTRY LANE
LOT 53-3
20-1841 ELEV B
THE ARLINGTON

19 of 39

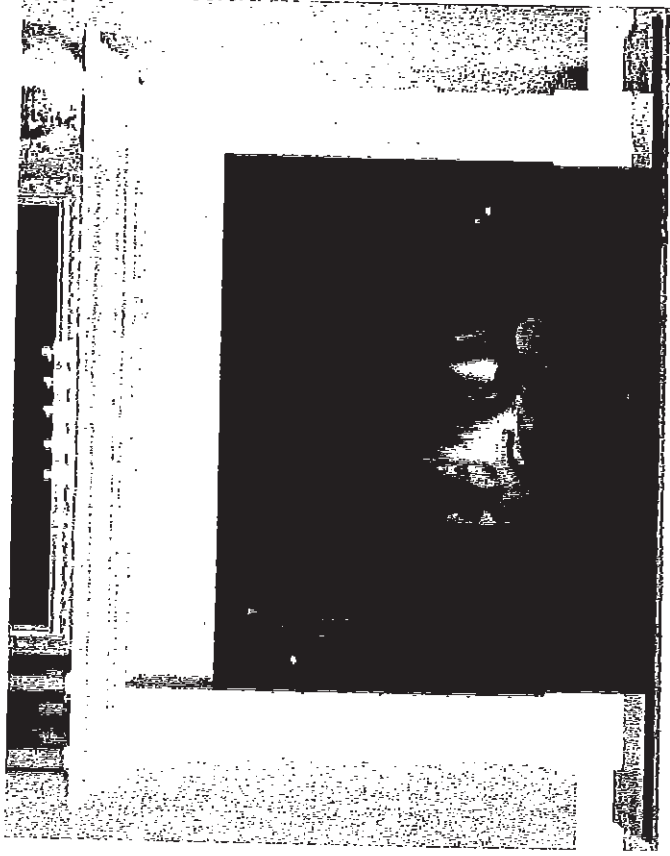

NFAS NF15 Mantel

Handwritten signature or initials.



C2 COUNTRY LANE
LOT 53-3
20-1841 ELEV B
THE ARLINGTON

20 of 39

Stainless Steel | 122.0264.716

FAMILY : Sinks | SERIES : Reginox | MODEL : NS1930U/9 | FINISH : Stainless Steel | INSTALLATION TYPE : Undermount

STANDARD KITCHEN SINK

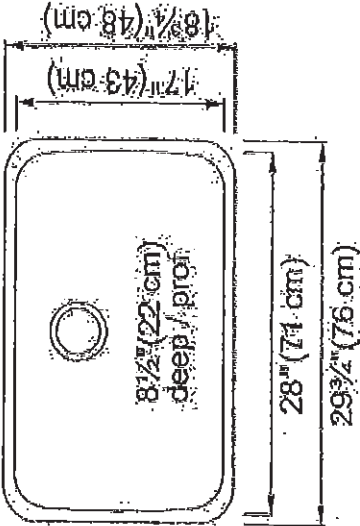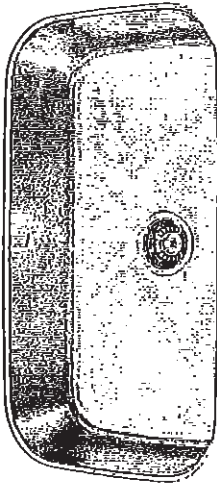

TECHNICAL DATA	
Width overall	18 3/4"
Length overall	29 3/4"
Width of large bowl	17"
Length of large bowl	28"
Depth of large bowl	8 1/2"
Cabinet Size	36"
Number of Bowls	1
Waste Outlet Diameter	3 1/2"
Cut-Out Template	Yes
Faucet Hole	None
Type of Material	18 Gauge Stainless Steel
Surface Finish	SILK
Special feature	Rear Drain Waste Hole Location
Waste Kit Included	YES

3/


C2 COUNTRY LANE
LOT 53-3
20-1841 ELEV B
THE ARLINGTON

21 of 39

STANDARD KITCHEN FAUCET

Align

Modern

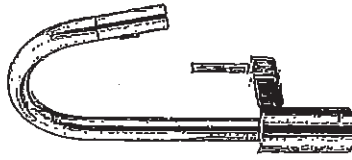

Single Handle Pull-Down Kitchen
Faucet*

Model 7565†

✓

22 of 39

C2 COUNTRY LANE
LOT 53-3
20-1841 ELEV B
THE ARLINGTON



BOULEVARD®
PEDESTAL SINK
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)
- * ☐ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with U-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -


Meets or Exceeds the Following Specifications:

- ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:

* See faucet section for additional models available

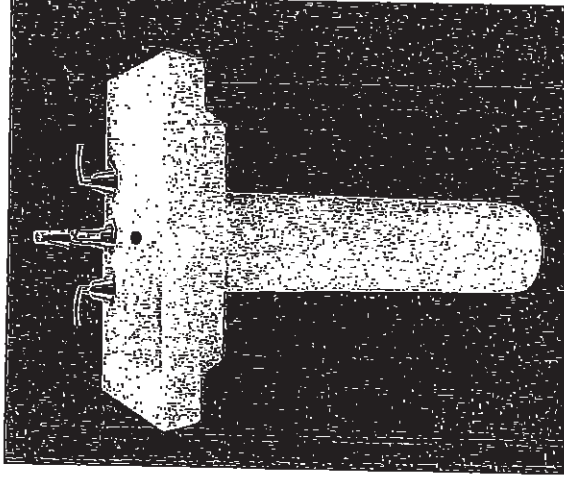

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

Handwritten signature/initials.

23 of 39

- | | | |
|-------------------------------------|-------------------------------|------------------------------------|
| ☒ | 0346 803 | Faucet holes on 203mm (8") centres |
| ☐ | 0346 403 (Illustrated) | Faucet holes on 102mm (4") centres |
| ☐ | 0346 001 | Centre hole only |

Technical drawing of a circular structure, likely a cross-section of a tunnel or pipe. The drawing includes the following dimensions and labels:

- Overall Diameter:** 1000 mm (indicated by a dimension line across the top).
- Internal Diameter:** 800 mm (indicated by a dimension line across the middle).
- Wall Thickness:** 100 mm (indicated by a dimension line on the right side).
- Center Mark:** A crosshair symbol in the center of the circle, labeled "P.O." (Point of Origin).
- Labels:**
 - "1000 mm Ø" (Overall Diameter)
 - "800 mm Ø" (Internal Diameter)
 - "100 mm" (Wall Thickness)
 - "P.O." (Point of Origin)
 - "100 mm Ø" (Small circular feature on the left)
 - "100 mm Ø" (Small circular feature on the right)
 - "100 mm Ø" (Small circular feature at the bottom)
 - "100 mm Ø" (Small circular feature at the top)
 - "100 mm Ø" (Small circular feature on the left side)
 - "100 mm Ø" (Small circular feature on the right side)
 - "100 mm Ø" (Small circular feature at the bottom left)
 - "100 mm Ø" (Small circular feature at the bottom right)
 - "100 mm Ø" (Small circular feature at the top left)
 - "100 mm Ø" (Small circular feature at the top right)

[illegible]

Meets or exceeds the following Specifications:

- ASME A12.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.

- NOTES:**
 * DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
 FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
 SUPPLIED WITH SINK.
 FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
 IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
 established by ANSI Standard A112.19.2.
 These measurements are subject to change or cancellation. No responsibility is assumed for use
 of superseded or voided pages.

BAS-198

01/07


[Handwritten signature]

24 of 39

C2 COUNTRY LANE
LOT 53-3
20-1841 ELEV B
THE ARLINGTON

Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621+

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183+

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL
Model 62320 / TL183EP+

(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990+

FREESTANDING TUB FAUCETS

[Handwritten signature]

C2 COUNTRY LANE
LOT 53-3
20-1841 ELEV B
THE ARLINGTON

25 of 39




SPECIFICATIONS
AV SERIES
RANGE HOODS


HVI 2100 **CERTIFIED** 180 CFM/7.0 Sones @ 0.10" SP. Horizontal
180 CFM/7.5 Sones @ 0.10" SP. Vertical

30"
7" DUCT

- Dimensions**
Overall bottom projection - 18 3/8"
Overall top projection - 12"
Height - 6"
Available widths: 21", 24", 30", 36" & 42"
- Hood Body**
Stainless Steel: 24 gauge, grade 430 stainless steel.
Painted: 23 gauge cold rolled commercial grade (CRCQ) steel, auto welded, coated with a baked enamel finish.
- Motor**
2 speed, single coil, thermally protected, permanently lubricated.
Rated 120 volts, 60 Hz. Complete with 200°C lead wires.
- Lighting**
Single 60 watt cook light capacity (bulb not included).
- Ducting Options**
Horizontal ducting: 3 1/4"x10" (duct adapter and damper included).
Vertical ducting: 3 1/4"x10" (duct adapter and damper included).
Vertical ducting: 7" round (duct adapter and damper not included).
Ductless: removable front vent (charcoal filter not included).
- Fan Blade**
One piece polymeric, electronically balanced blade. 6 5/8" diameter with 5 paddles.
- Electrical connection**
Hood top - 7/8" knockout hole for use with 1/2" cable clamp
Hood back - 7/8" knockout hole for use with 1/2" cable clamp

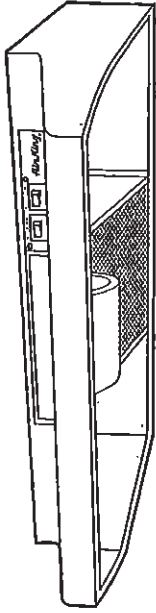

AV SERIES

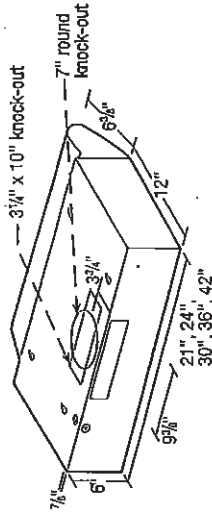

- Filters**
UL rated, class 2 filter.
Grease Filter: RF35 - 8 7/8"x10 3/8" (included).
Charcoal Filter: RF34 (not included).
Combo Grease/Charcoal: RF55 (not included).
- Available Finishes**
White, Biscuit, Almond, Black & Stainless Steel.

EXPANDED PERFORMANCE									
Air Flow - CFM	Static Pressure (inches of w.g.)					Sones		Fan Speed	Power
	0	0.05	0.1	0.15	0.2	0.25	@ .1 SP	RPM	Watts
Vertical Ducting High	246	232	218	203	181	147	7.5	2973	87.0
Horizontal Ducting High	225	210	180	175	155	120	7.0	3024	87.0
									2.1

PROJECT	ARCHITECT			DATE
LOCATION	ENGINEER			
CONTRACTOR	SUBMITTED BY			
FAN NUMBER	MODEL NUMBER	GFW	IN W.G.	RPM
		WATTS	AMPS	SONES
		QTY	OPTIONAL EQUIPMENT & REMARKS	



Air King: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada:
Brampton, Ontario
Tel: 905-456-2033
Fax: (905) 456-1015

Specifications subject to change without notice.

Updated 2-18

70

C-2 COUNTRY LANE
LOT 53-3
20-1841 ELEV. B
THE ARLINGTON

26 of 39

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

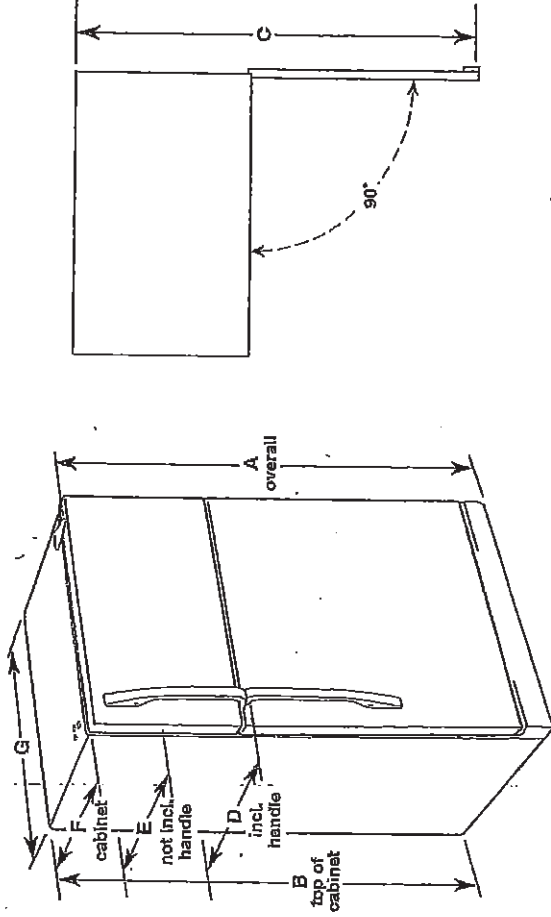

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	65 1/4" (166.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	32 1/4" (83.5 cm)	30 5/8" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT541SZD	25.3 cu. ft.	Yes	65 1/4" (166.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/2" (82.3 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

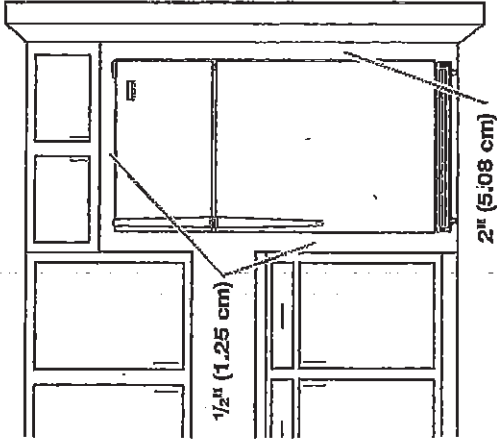

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10674106
10/29/14

39

C-2 COUNTRY LANE





LOT 53-3

20-1841 ELEV. B

THE ARLINGTON

27 of 39

Refrigerator Door Swing Verification

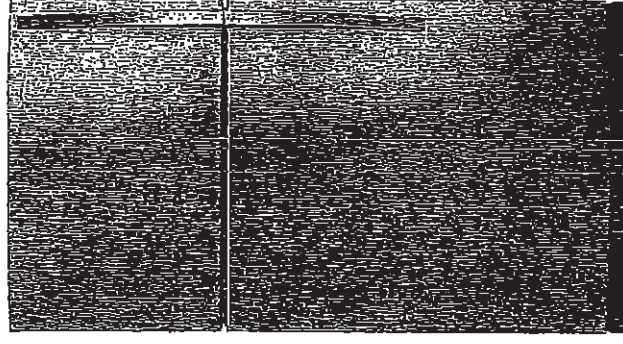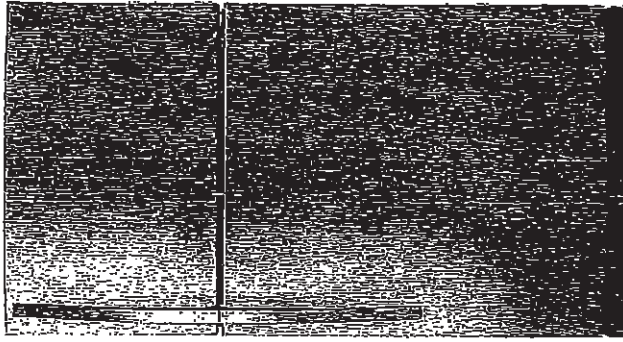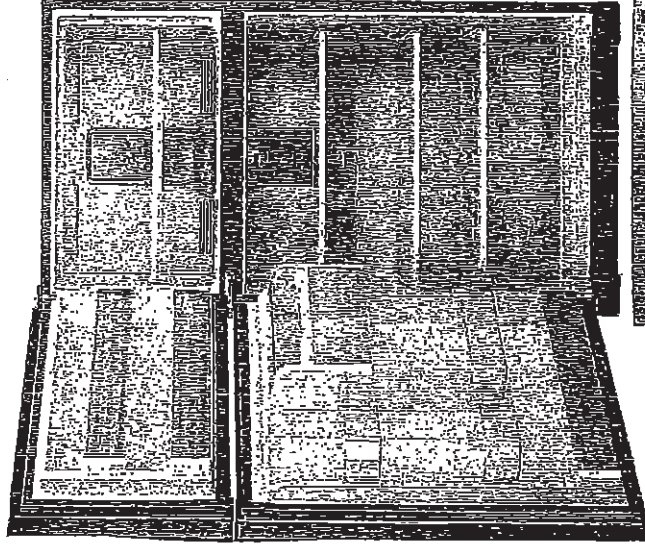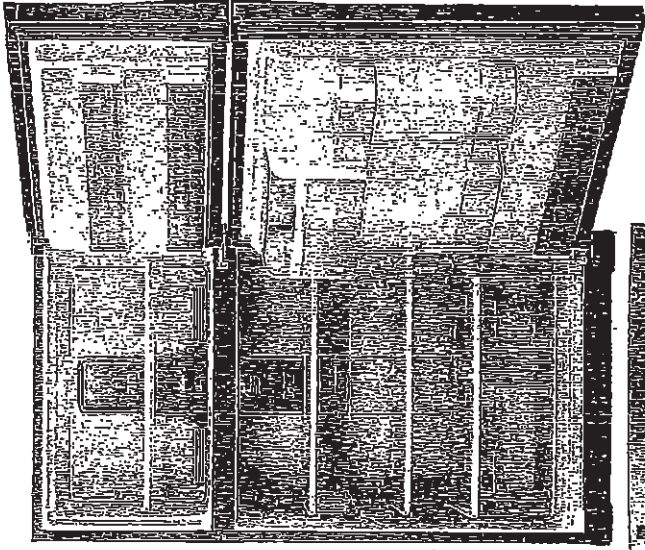

When facing the refrigerator



RIGHT HAND

DOOR OPENING

- Hinges on right
- Handle on left

- Hinges on left
- Handle on right

LEFT HAND

DOOR OPENING

INITIAL

INITIAL

Please check and INITIAL your door swing selection.

C-2 COUNTRY LANE
LOT 53-3
20-1841 ELEV. B
THE ARLINGTON


28th 39

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

5.3 cu. ft. Whirlpool® electric range with Frozen
Bake™ technology
YWFE515S0JS

Whirlpool

[Home](#) > [Kitchen Appliances](#) > [Cooking Appliances](#) > [Ranges](#) > [Single Oven Ranges](#) > [YWFE515S0JS](#)

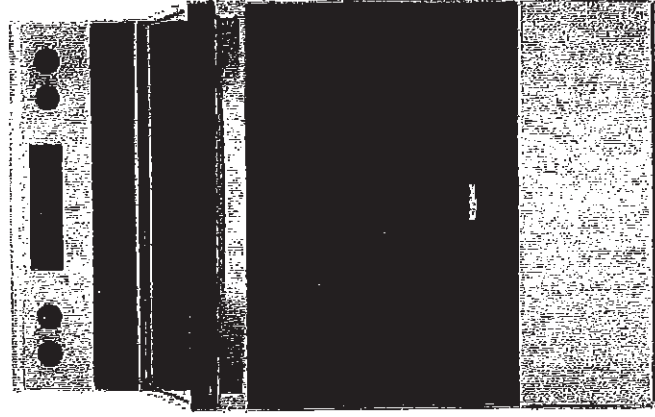


ya

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES

Model YWFE515S0JS

Product Dimensions

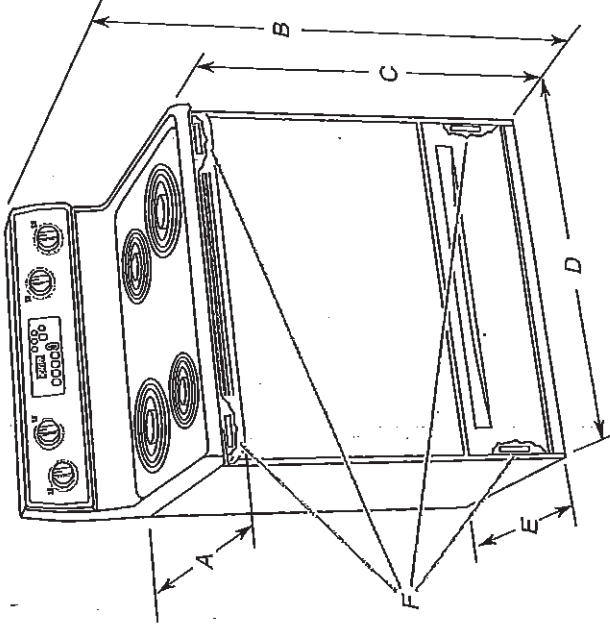

- A. 27¹/₄" (70.5 cm) max. depth with handle
- B. 46¹/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₈" (75.9 cm) width
- E. 25¹/₁₆" (64.3 cm) depth - back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

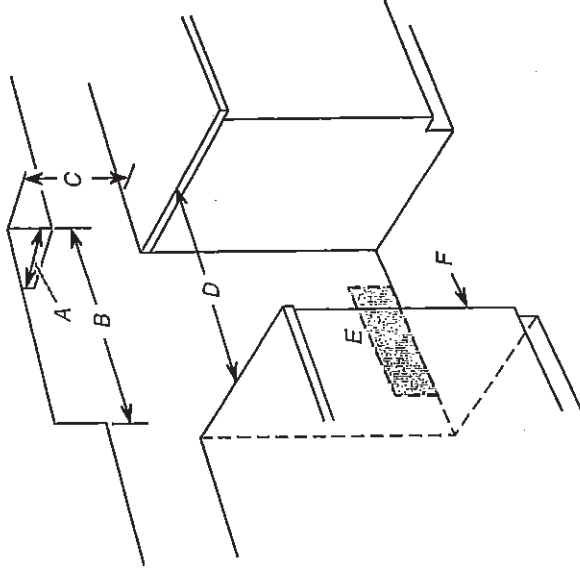

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

C2 COUNTRY LANE
LOT 53-3
20-1841 ELEV B
THE ARLINGTON

30 of 39

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Install Anti-Tip Bracket


⚠ WARNING



Tip Over Hazard

A child or adult can tip the range and be killed.
Install anti-tip bracket to floor or wall per installation instructions.
Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.
Re-engage anti-tip bracket if range is moved.
Do not operate range without anti-tip bracket installed and engaged.
Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warning drawer.
2. Determine which mounting method to use: floor or wall.
If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/₁₆" (31.9 cm) from centerline as shown.

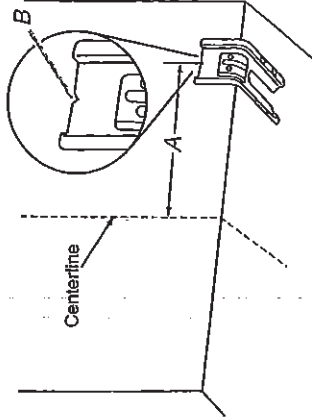


A. 12⁹/₁₆" (31.9 cm)
B. Bracket V-notch

4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.


Floor Mounting

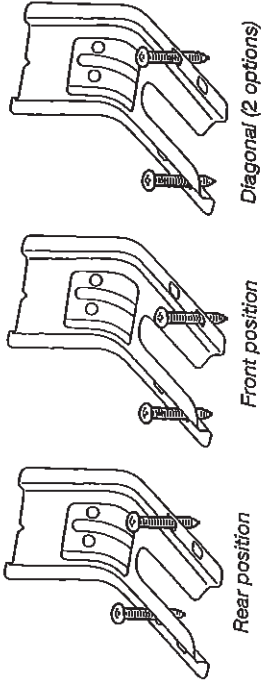

Wall Mounting




5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1⁵/₈" (4.1 cm) screws provided.
6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

ys

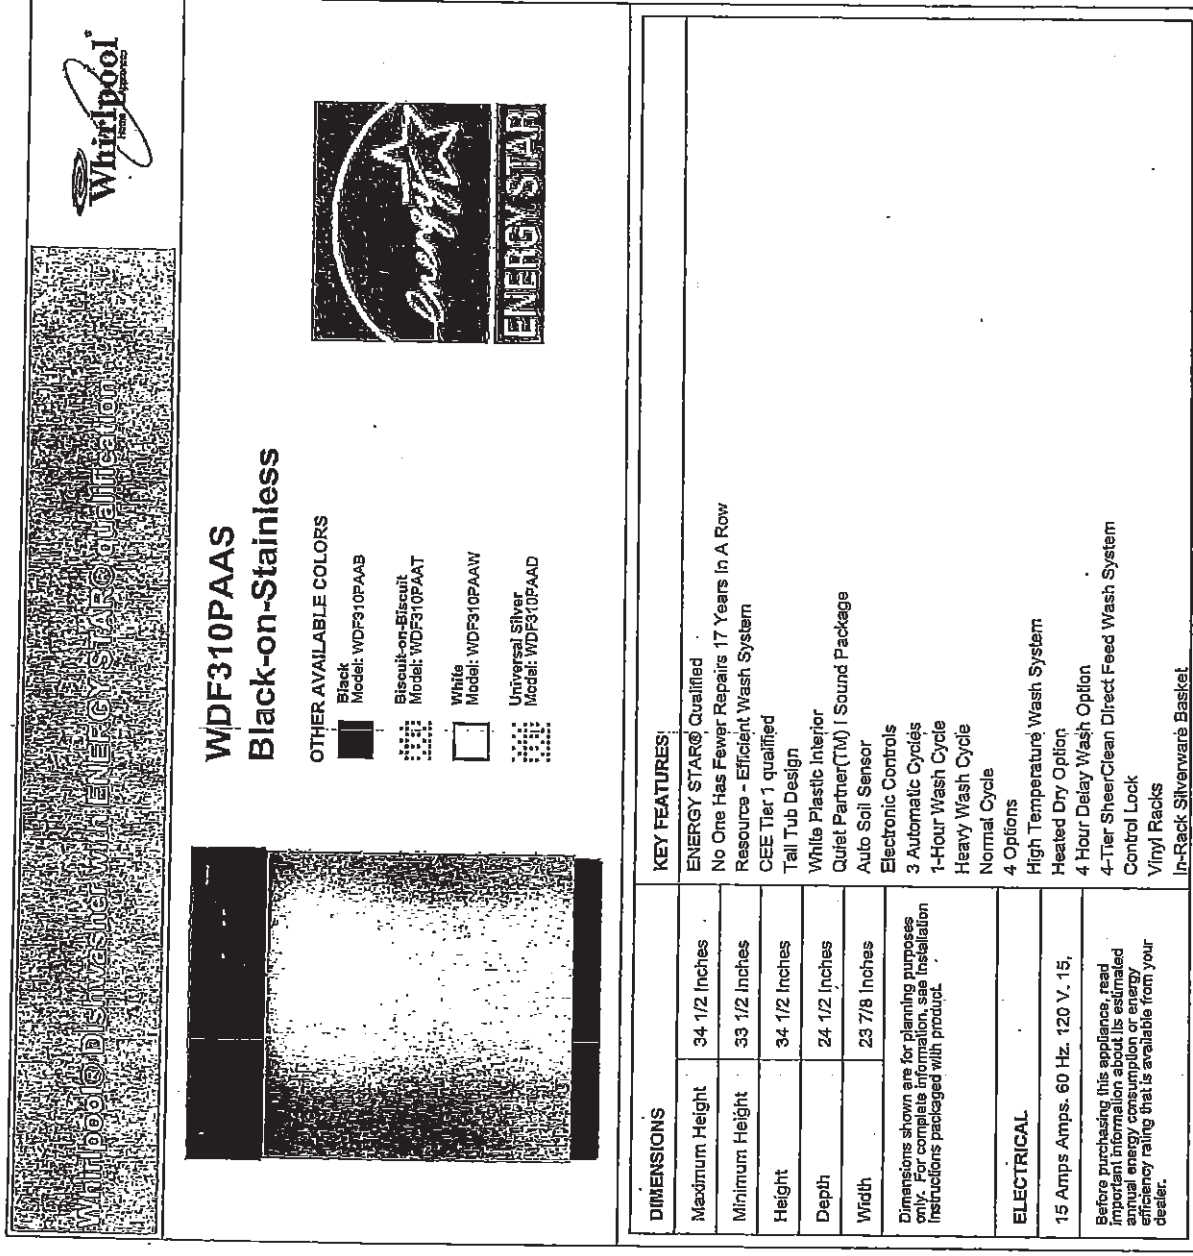

C2 COUNTRY LANE
LOT 53-3
20-1841 ELEV B
THE ARLINGTON

32 of 39

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDFI10PAB	WDE3102LA	WDFE30PSY
WDFI11PAB	WDF320PAD	WDF540PAD
WDFI20PAF	WDF510PAP	WDF730PAY
WDFI21PAF	WDF520PAD	WDF710PAY
WDF310PAA	WDF530PAY	WDF720PAD
WDF310PCA	WDF530PLY	WDF770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use



with dishwashers. Follow the kit

instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.




Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4" N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

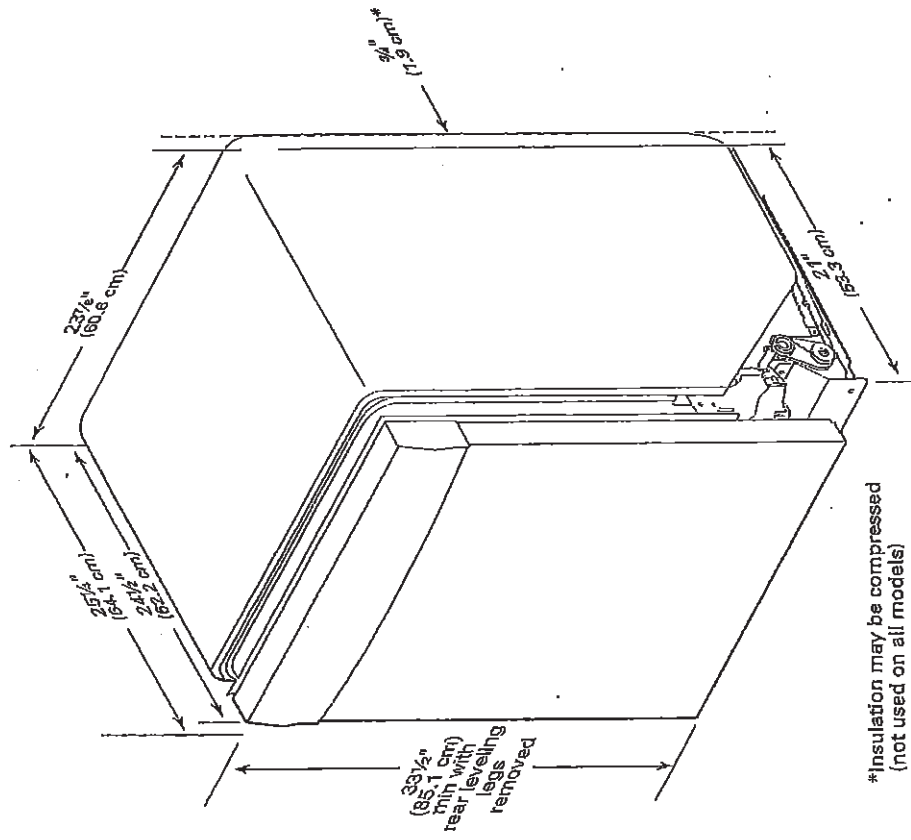

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

40

C2 COUNTRY LANE
LOT 53-3
20-1841 ELEV B
THE ARLINGTON

33 of 39


CABINET CUTOUT DIMENSIONS

WD-320-PAD

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

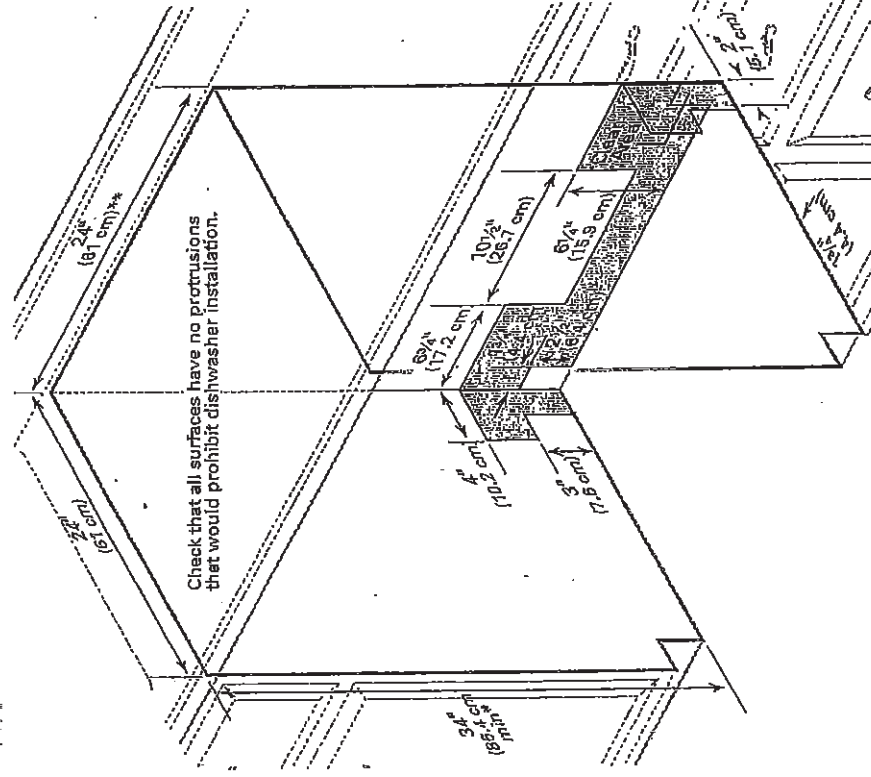

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


Handwritten signature or mark.

C2 COUNTRY LANE
LOT 53-3
20-1841 ELEV B
THE ARLINGTON

34 of 39

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW

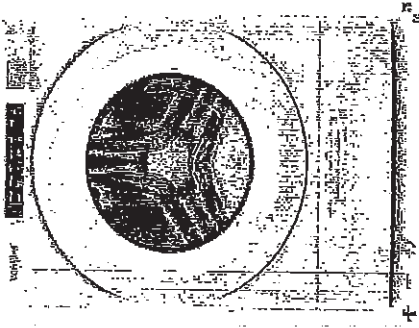

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool 5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser
Model #: WFW5620HW

Dimensions

Depth	30.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD/Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

ya

C2 COUNTRY LANE
LOT 53-3
20-1841 ELEV B
THE ARLINGTON

35 of 39

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).


IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models* ✓

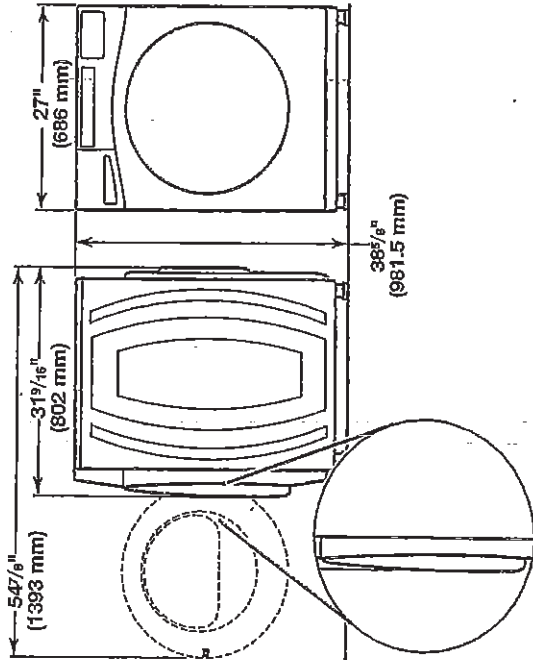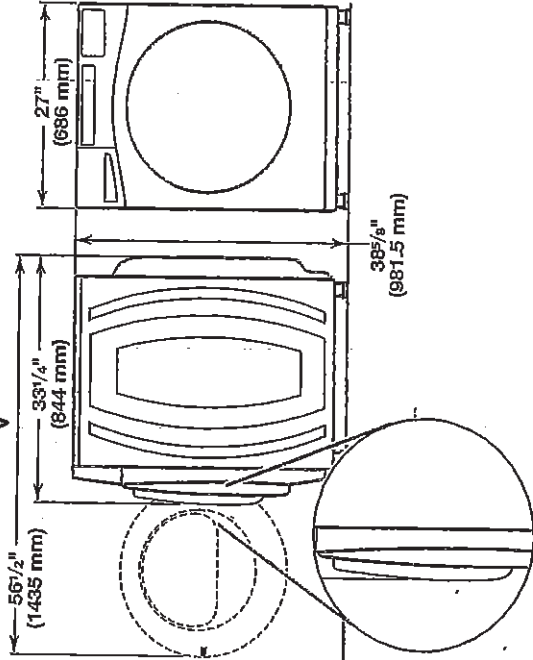

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.


Maytag Models X

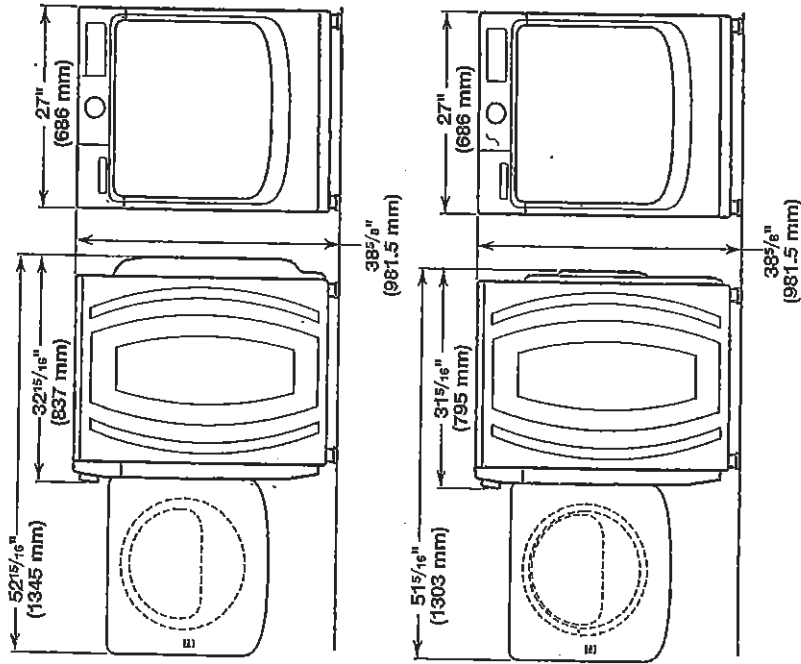

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer): X

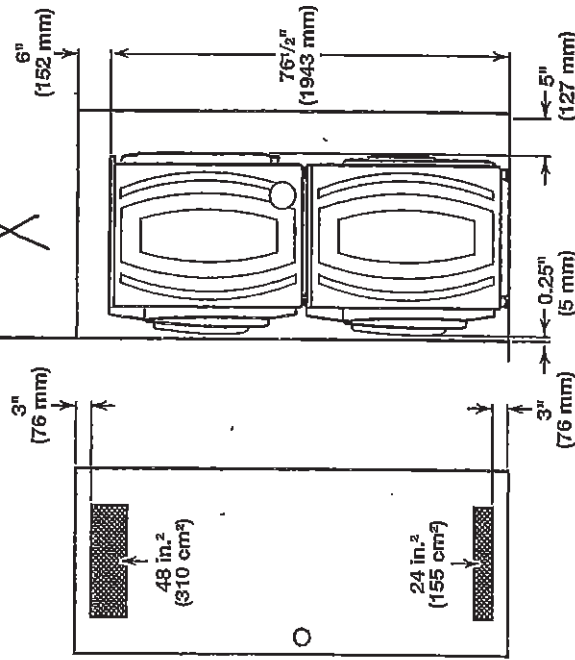


43

C2 COUNTRY LANE
LOT 53-3
20-1841 ELEV B
THE ARLINGTON


36 of 39

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

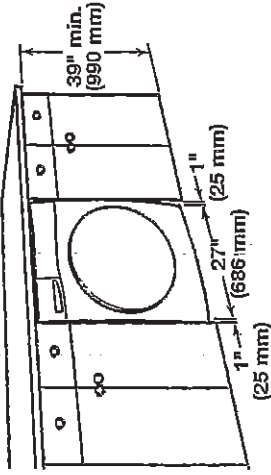

Recessed area or closet installation:

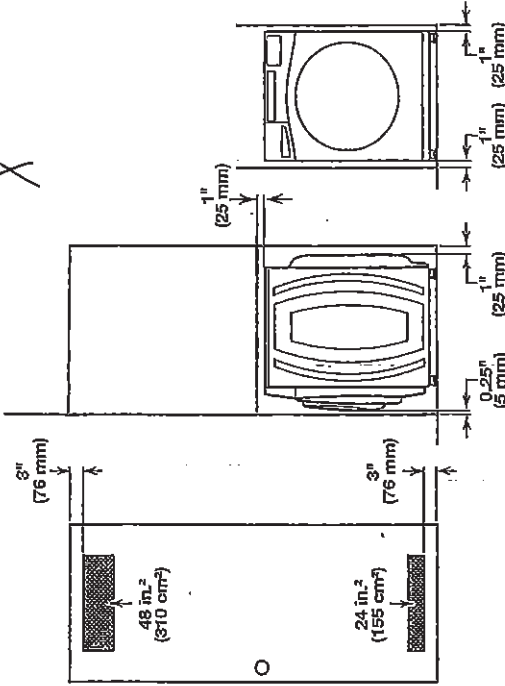

Custom cabinet installation:

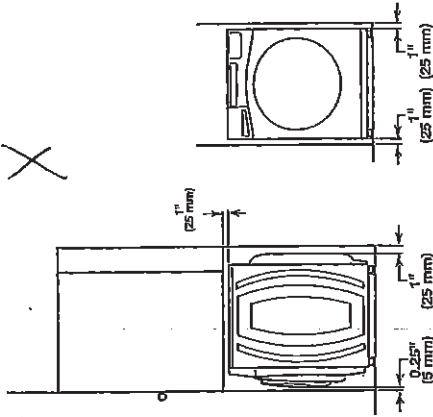


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

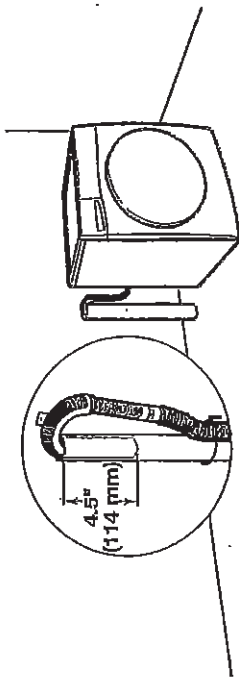


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

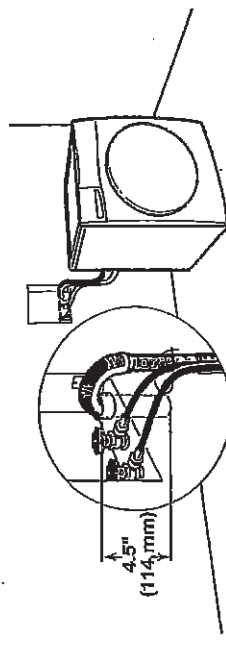

See requirements for floor standpipe drain system.

Laundry tub drain system

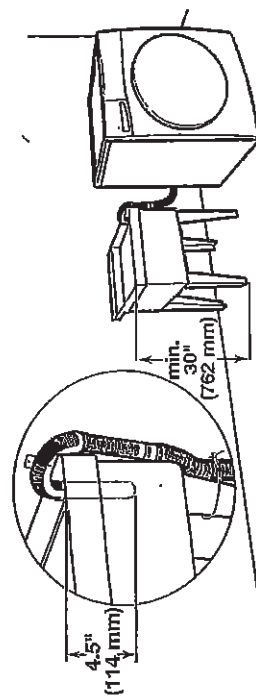

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


74

C2 COUNTRY LANE
LOT 53-3
20-1841 ELEV B
THE ARLINGTON

37 of 39

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryer | Dryers | Electric Dryers | YWED5620HW

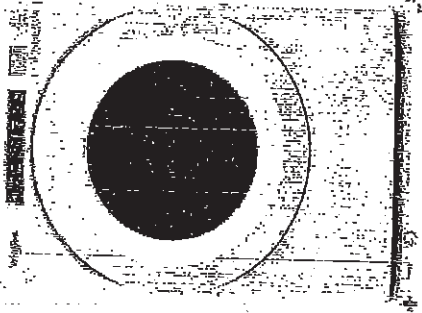

Building
Your Style
anytime

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60
Power Cord Included	Yes

Handwritten signature or mark.

C2 COUNTRY LANE
LOT 53-3
20-1841 ELEV B
THE ARLINGTON

38 OF 39

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.

- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

!WARNING

Explosion Hazard
Keep flammable materials and vapors, such as gasoline, away from dryer.
Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
Failure to do so can result in death, explosion, or fire.


You will need:

- A location allowing for proper exhaust installation.
- See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view:

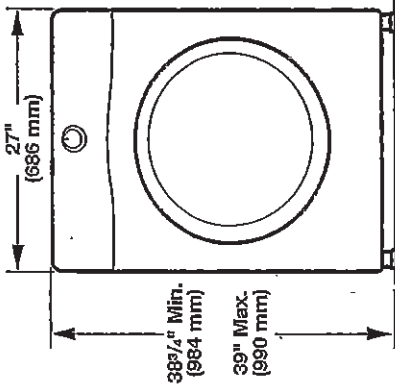


Side view:

Whirlpool Models

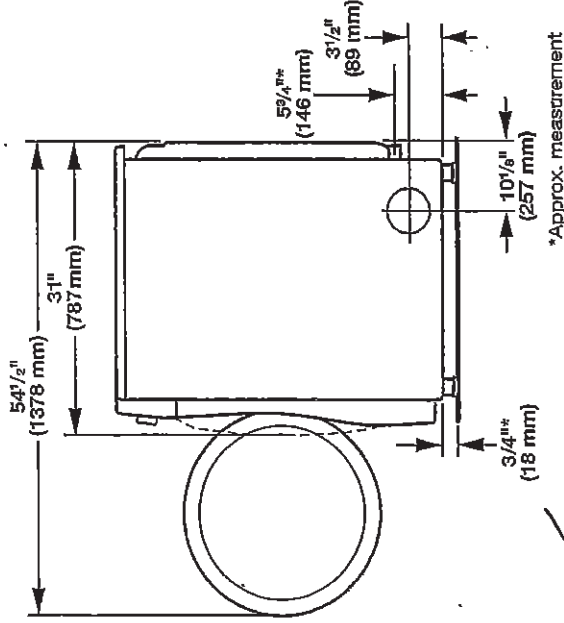

Maytag Models

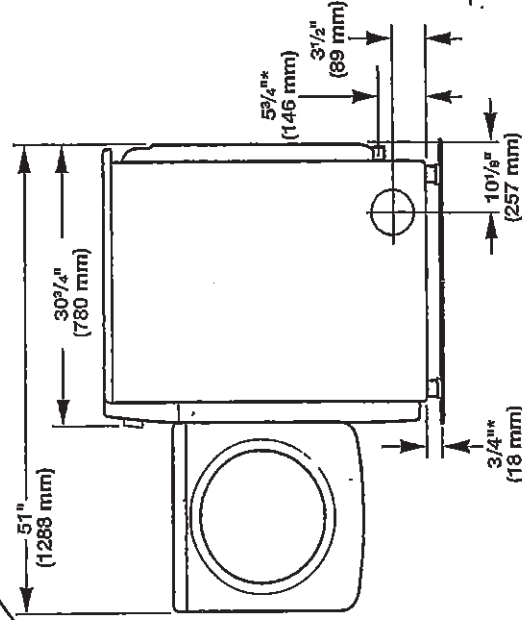

*Approx. measurement.


4/3

C2 COUNTRY LANE
LOT 53-3
20-1841 ELEV B
THE ARLINGTON

39 of 39

WHIRLPOOL DRYER Model #: YWED5620HW

Back view

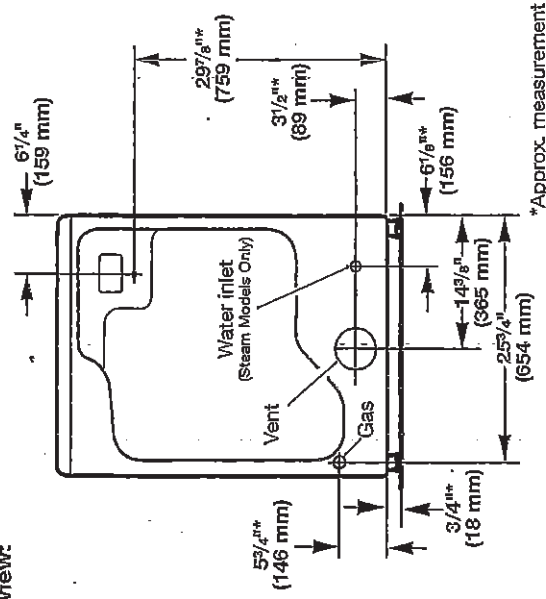

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

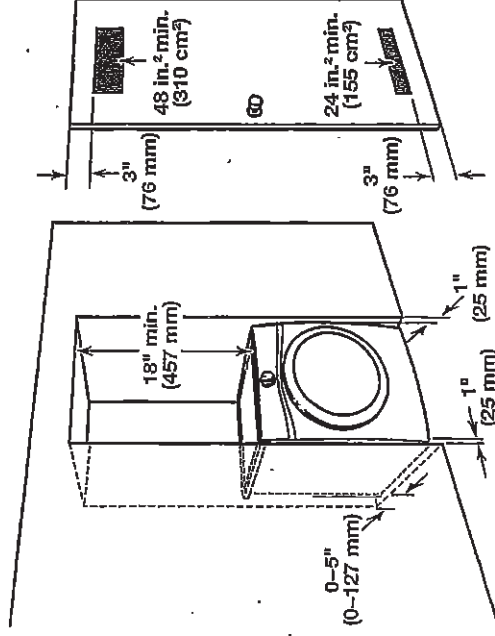

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

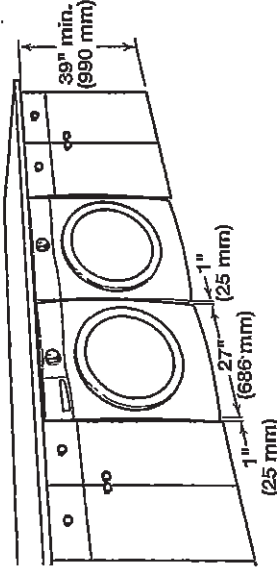

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

73