



25-Jun-21

Interior Finishing Selection Sheet

LOT 050-4

20-1841 ELEV A THE ARLINGTON

PURCHASERS: THUSHYANTHAN THIYAGARAJAH

CONTACT NO: 416-829-8887

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Appliances

6-8894 Kitchen HoodFan

☒ CYCLONE 30" CANOPY CHIMNEY HOODFAN (Standard for Singles Only) STAINLESS STEEL SCB51430 STD **PAGE 28**

Cabinetry

1-9157 Kitchen Cabinet Colour/Style

☐ SIMCOE MOONLIGHT Viking III STD 3DL

3-2086 Kitchen Cabinet Hardware

☐ HARDWARE 9677 STD

25-9163 Main Bathroom Cabinet Colour/Style

☐ GEORGIAN RAIN CLOUD VIKING II STD 3DL

29-2086 Main Bathroom Cabinet Hardware

☐ HARDWARE 9677 STD

28-8822 Main Bathroom Countertop

☐ Countertop WHITE CARRARA 4924-38 Wilsonart

20-9164 Master Ensuite Cabinet Colour/Style

☐ GEORGIAN MOONLIGHT VIKING II STD 3DL

22-2086 Master Ensuite Cabinet Hardware

☐ HARDWARE 9677 STD

21-8796 Master Ensuite Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46 Formica

359-9172 Optional Lower Level Bath Cabinet Colour/Style

☐ SILK TOUCH SLAB TWILIGHT GREY Viking III STD

360-2086 Optional Lower Level Bath Cabinet Hardware

☐ HARDWARE 9677 STD

361-8822 Optional Lower Level Bath Countertop

☐ Countertop WHITE CARRARA 4924-38 Wilsonart INSTALL STACKED HORIZONTALLY

Carpet

37-9248 Bedroom 2 Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

38-9248 Bedroom 3 Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

363-9248 Bedroom 4 (Optional Lower Level) Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

14-9248 Family Room Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

36-9248 Master Bedroom Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

366-9248 Optional Lower Level Hall Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

52-1079 Throughout Underpad

☐ Underpad 500 Series STD

Ceramics

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date June 15/21 Signature [Signature]
Purchaser on file

Date JUNE 15/21
Date APPROVED
Date -06-25-2021

Décor Consultant

Date Purchaser

Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

LOT 050-4

20-1841 ELEV A THE ARLINGTON

PURCHASERS: THUSHYANTHAN THIYAGARAJAH

CONTACT NO: 416-829-8887

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Ceramics

16-8913 Foyer Flooring

☒ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24 SEE SKETCH # 7 PAGE 19 FOR 12 X 24 TILE DIRECTION

17-2225 Foyer Grout

☐ Grout (27) Silver STD

4-5733 Kitchen Backsplash

☒ Colour and Dimension Matte Silver Grey QT.CD.SGR.0306.MT UPG_1 3 x 6 TO BE INSTALLED IN SUBWAY PATTERN

5-2226 Kitchen Backsplash Grout

☐ Grout (00) White STD

338-8913 Kitchen Flooring

☒ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24 SEE SKETCH # 7 PAGE 19 FOR 12 X 34 TILE DIRECTION

339-2225 Kitchen Grout

☐ Grout (27) Silver STD

30-9257 Main Bathroom Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

31-2225 Main Bathroom Grout

☐ Grout (27) Silver STD

112-8833 Main Bathroom Tub Wall Tile

☐ Uniwall White QT.UW.WHT.0810 STD 8 x 10 INSTALL STACKED HORIZONTALLY

113-2226 Main Bathroom Tub Wall Tile Grout

☐ Grout (00) White STD

23-9106 Master Ensuite Floor Tile

☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte

24-2225 Master Ensuite Floor Tile Grout

☐ Grout (27) Silver STD

73-8666 Master Ensuite Shower Floor Tile

☒ Ontario Series Mosaic Dark Grey OD.ON.DGR.0202.MT.N UPG 1 2 x 2

74-2226 Master Ensuite Shower Floor Tile Grout

☐ Grout (00) White STD

147-8923 Master Ensuite Shower Jamb(s) and Sill(s)

☐ Shower Jamb / Sill Thassos White STD

104-9020 Master Ensuite Shower Wall Tile

☐ Weave White QT.WV.WHT.0810 STD 8 x 10 INSTALL STACKED HORIZONTALLY

105-2226 Master Ensuite Shower Wall Tile Grout

☐ Grout (00) White STD

365-9257 Mud Room (Optional Lower Level) Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

364-2225 Mud Room (Optional Lower Level) Grout

☐ Grout (27) Silver STD

350-9257 Optional Lower Level Bath Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

June 15/2021

Signature of Purchaser

Signature of Decor Consultant

Date

Purchaser

Date

06-25-2021

Decor Consultant

Date

Purchaser

Date Approved: June 15/2021
HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

LOT 050-4

20-1841 ELEV A THE ARLINGTON

PURCHASERS: THUSHYANTHAN THIYAGARAJAH

CONTACT NO: 416-829-8887

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Ceramics

351-2225 Optional Lower Level Bath Grout

☐ Grout (27) Silver STD

352-8833 Optional Lower Level Bath Tub Wall Tile

☐ Uniwall White QT.UW.WHT.0810 STD 8 x 10 INSTALL STACKED HORIZONTALLY

353-2226 Optional Lower Level Bath Tub Wall Tile Grout

☐ Grout (00) White STD

32-8913 Powder Room Flooring

☒ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24 SEE SKETCH # 7 PAGE 19 PAGE FOR 12 X 24 TILE DIRECTION

33-2225 Powder Room Grout

☐ Grout (27) Silver STD

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-8891 Great Room Fireplace Mantle

☐ Paint Grade Mantle- Cabinet (Per Plan) WHITE NF-17 STD

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-9069 Kitchen Countertop

☐ MSI Quartz ICED WHITE Group 1 STD 3/4"

Hardwood

99-9358 Dining Room Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl TITANIUM Red Oak Pearl 3/4" X 3 1/4"

11-9358 Great Room Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl TITANIUM Red Oak Pearl 3/4" X 3 1/4"

78-9059 Stair Landing to Lower Level Flooring

☒ Red Oak-Vintage 3 1/4 inch Pre-Sanded Smooth Unfinished Red Oak-Unfinished-3/4 inch x 3 1/4inch Red Oak 3/4" x 3 1/4" STAIR LANDING AT POWDER ROOM AS WELL

35-9358 Upper Hall Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl TITANIUM Red Oak Pearl 3/4" X 3 1/4"

Interior Railings

49-8150 Stairs to Lower Level Handrail/Pickets/Posts Type

☒ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) GUN METAL COLOUR UPG

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

June 15/2021

June 15/21

Date

Purchaser

APPROVED -

Décor Consultant

Date

Purchaser

Date Approved

HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4



15-Jun-21

Interior Finishing Selection Sheet

LOT 050-4

20-1841 ELEV A THE ARLINGTON

PURCHASERS: THUSHYANTHAN THIYAGARAJAH

CONTACT NO: 416-829-8887

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Interior Railings

43-8150 Stairs to Upper Level Handrail/Pickets/Posts Type

☒ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)
GUN METAL COLOUR UPG

Interior Stairs

116-1713 Basement Stairs Type

☐ Paint Grade Stairs STD

45-1712 Stairs to Lower Level Type

☐ Oak Stairs UPG_1

39-1712 Stairs to Upper Level Type

☐ Oak Stairs UPG_1

Interior Trim

91-9374 Throughout Trim Size

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings
STD

Painting

46-7761 Stairs to Lower Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIRS TO BE STAINED SAMBUCCA

40-7761 Stairs to Upper Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIRS TO BE STAINED SAMBUCCA

240-1716 Throughout Trim - Paint Colour

☐ Trim WHITE STD

51-1717 Throughout Walls - Paint Colour

☐ Wall WARM GREY 22 STD

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

149-1737 Master Ensuite Plumbing Fixture (colour)

☐ Plumbing Fixtures WHITE STD

362-1737 Optional Lower Level Bath Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

June 15/2021

June 15/21

Date

Purchaser

Date Approved - Decor Consultant

MYRA

Date

Purchaser

Date Approved

HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



15-Jun-21

Sales Selection Sheet
OF

LOT 050-4

20-1841 ELEV A THE ARLINGTON

PURCHASERS: THUSHYANTHAN THIYAGARAJAH CONTACT NO: 416-829-8887

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances

2160 Cyclone 30" Wall Mount Chimney Hood SS KITCHEN Qty: 1
SCB51430 PAGE 28

Cabinetry

1295 Optional Extras KITCHEN Qty: 1
128" Pots and pans drawers (width min. 60cm/max. 90cm) (size subject to floor plan) Before June 1, 2021 VIKING
SEE SKETCH # 7 PAGE 19
FOR LOCATION

Ceramics

1679 Upgrade 2 Tile Foyer Floor Qty: 1
SEE SKETCH # 7 PAGE 19
24 TILE DIRECTION FOR 12 X

1681 Upgrade 2 Tile Kit/Brk Floor Qty: 1
SEE SKETCH # 7 PAGE 19
DIRECTION FOR 12 X 24 TILE

1966 Optional Extras Kitchen Qty: 1
Supply and install additional backsplash due to chimney hoodfan installation
Upgrade 1
INSTALL IN SUBWAY PATTERN

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

06/15/2021

[Signature]

June 15/21

[Signature]

Date

Purchaser

Date ~~APPROVED~~

Decor Consultant

Date Purchaser

-03-25-2021

[Signature]

Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

LOT 050-4

20-1841 ELEV A THE ARLINGTON

PURCHASERS: THUSHYANTHAN THIYAGARAJAH CONTACT NO: 416-829-8887

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1686 Kitchen Optional Backsplash Qty: 1

Upgrade 1 Tile
INSTALL IN SUBWAY PATTERN

1682 M. Ensuite Floor Qty: 1

1677 M. Ensuite Shower Floor Qty: 1

1680 Powder Floor Qty: 1

Upgrade 2 Tile
SEE SKETCH # 7
TILE DIRECTION
PAGE 19 FOR 12 X 24

Fireplace

81 Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle. Purchasers acknowledge: Heathwood Homes and its contractors will not be liable for any damage on items placed/installed above a FP after closing

Interior Railings

572 Optional Upgrade
Upgraded Pickets Single-Collar Alt. Plain (COLOUR: GUNMETAL) Qty: 1

Painting

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

06/15/2021 June 15/21

Date Purchaser

Date ~~APPROVED~~ Décor Consultant

06-25-2021

Date Purchaser

Date Approved ~~HEATHWOOD HOMES (WHITBY)~~
LIMITED - PHASE 4



15-Jun-21

Sales Selection Sheet

LOT 050-4

20-1841 ELEV A THE ARLINGTON

PURCHASERS: THUSHYANTHAN THIYAGARAJAH CONTACT NO: 416-829-8887

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

531 Optional Extras - PAINT / STAIN - Custom Qty: 2

Stain stair landing less than 25sq/ft in sambucca. For stair with metal pickets only.

5" (Unfinished Pre-sanded) smooth hardwood will be installed and to be stained in sambucca to match the stairs

Plumbing

276 STANDARD Kitchen Sink Option KITCHEN Qty: 1

KINDRED Kitchen Sink Collection - Reginox ND1831 UA/9 Stainless Kitchen Double (equal size) Bowl Undermount Sink (or equivalent) PAGE 22

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

06/07/2021

Date

Purchaser

June 15/21

Date

Décor Consultant

06-22-2021

Date

Purchaser

Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

17 of 140
The Arlington

ELEVATION A & B: 1,841 SQ FT

Opt. Lower Level with 4 Bedroom



C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON


18 of 40 The Arlington

20-1841 ELEV. A

ELEVATION A & B: 1,841 SQ FT

Sketch #6

Opt. Lower Level with 4 Bedroom

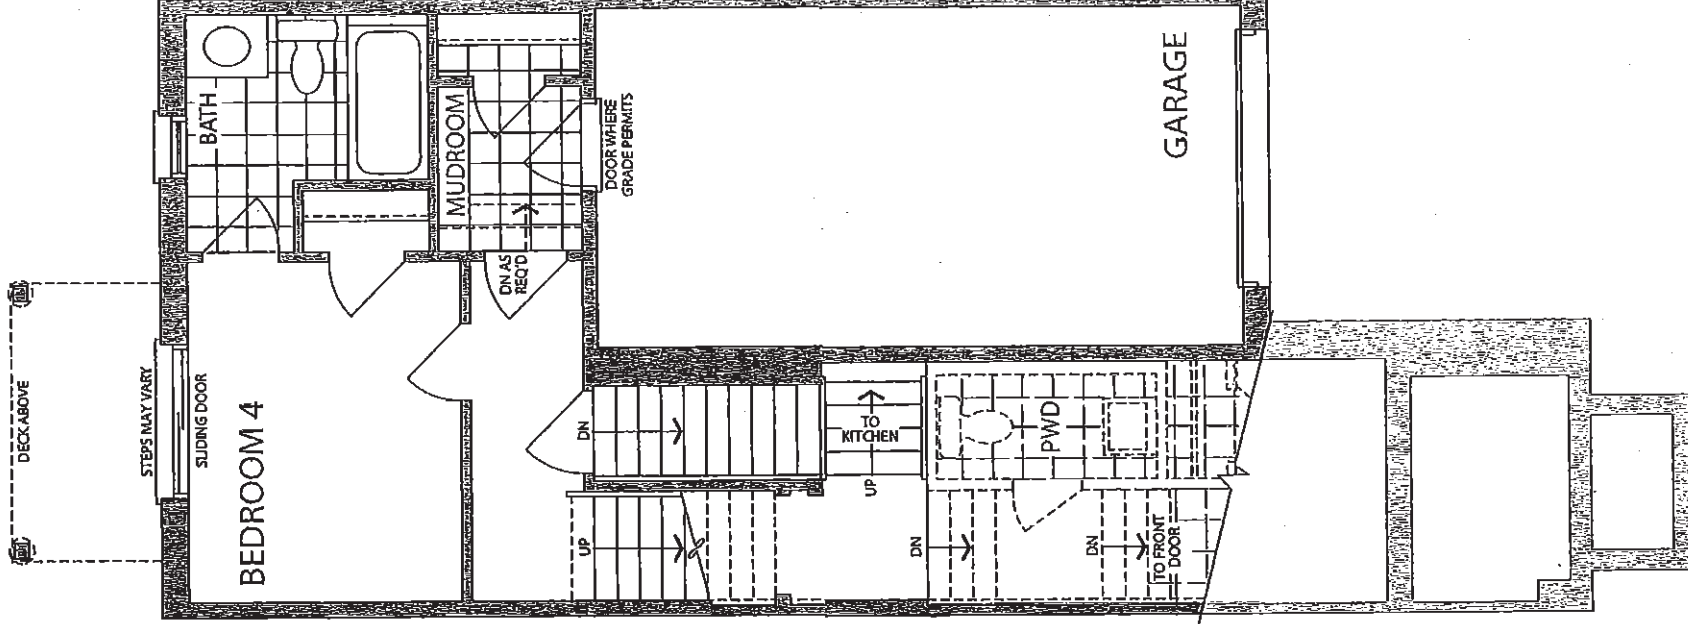

OPT. LOWER LEVEL
WITH 4 BEDROOM
ELEVATION A & B


C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

19 of 40
Sketch# 7 The Arlington

20-1841 ELEV. A

ELEVATION A & B: 1,841 SQ FT

Opt. Lower Level with 4 Bedroom

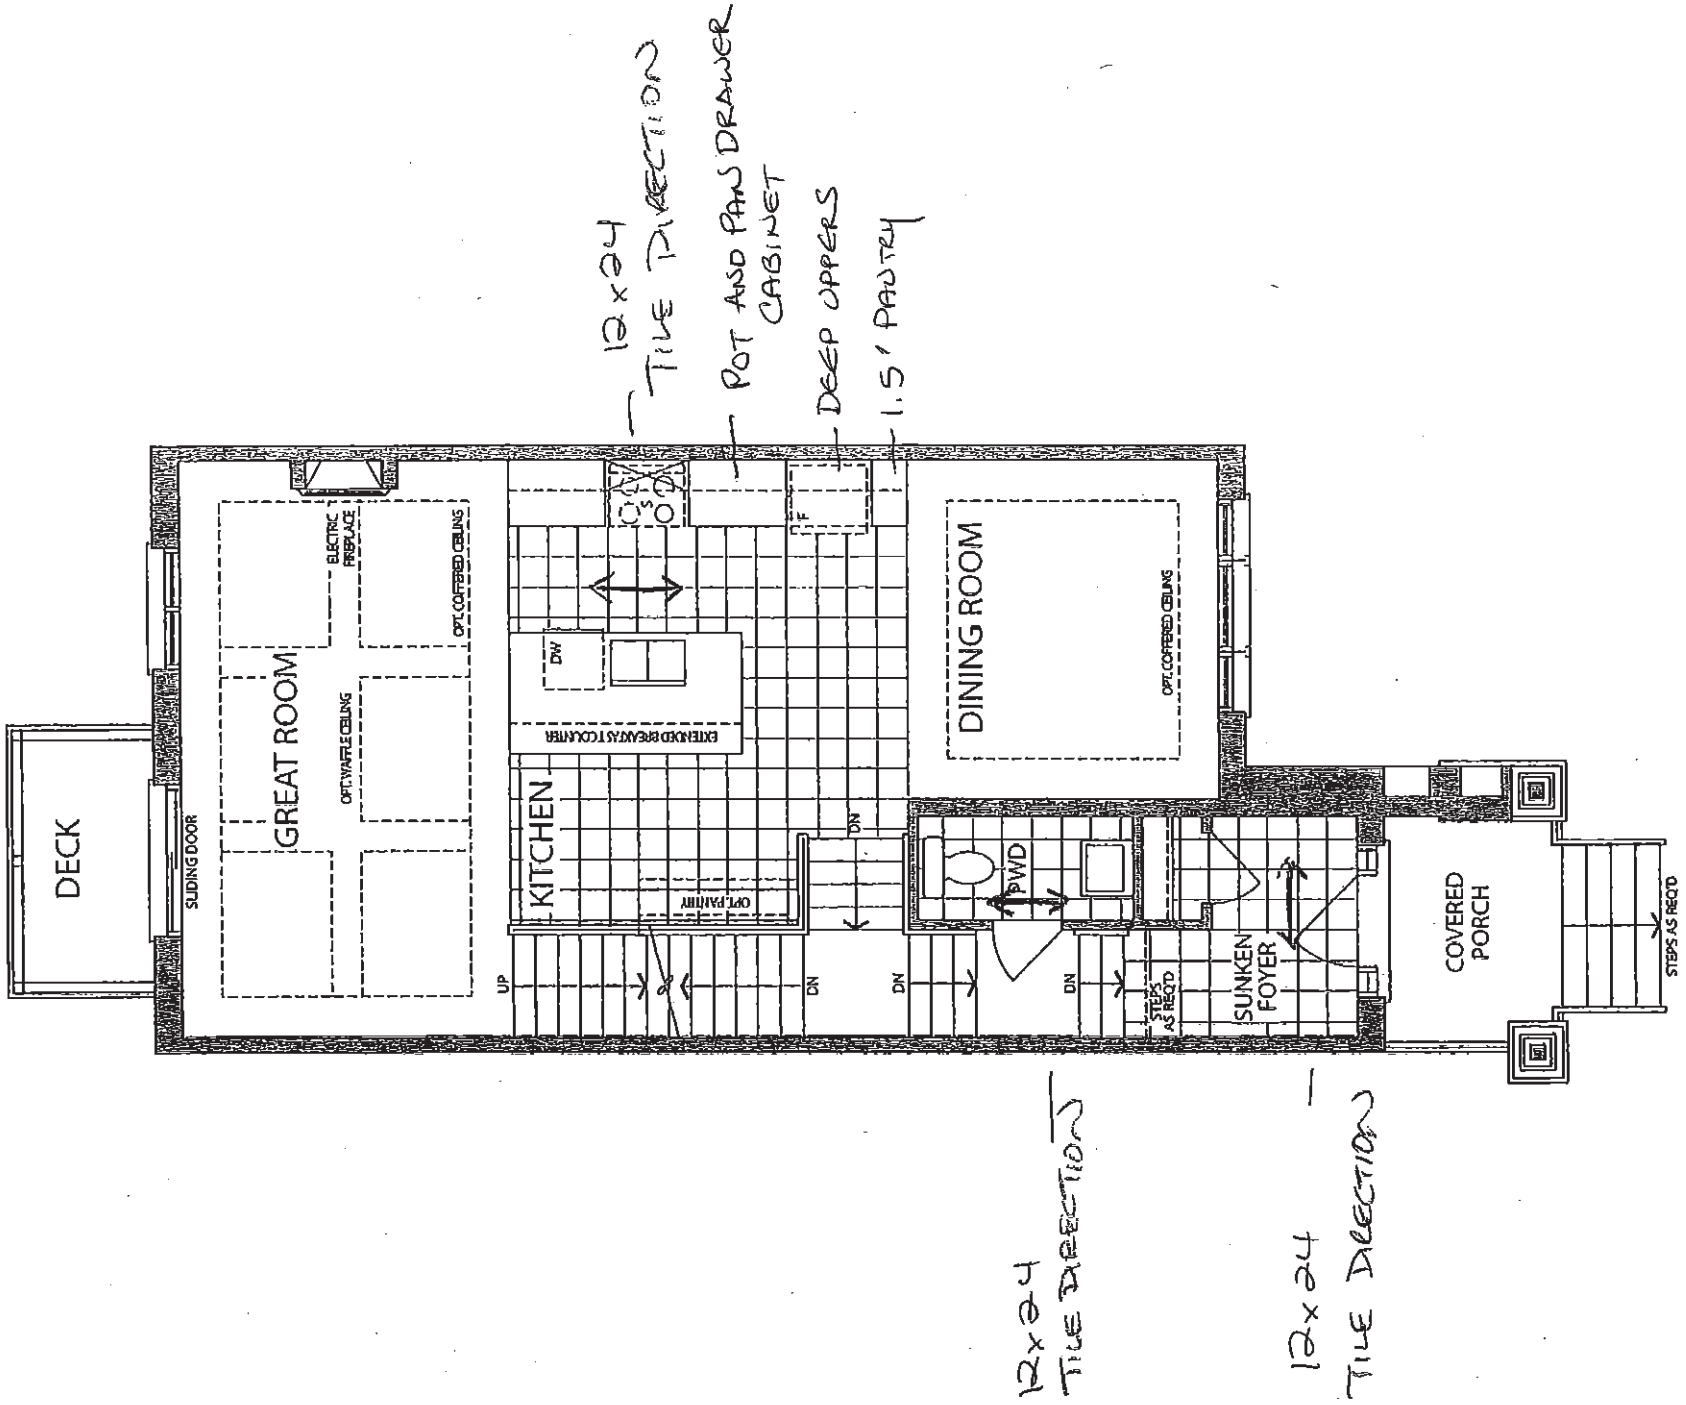

MAIN LEVEL
ELEVATION A

C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON


20 of 40

Sketch #8 The Arlington

ELEVATION A & B: 1,841 SQ FT

20-1841 ELEV. A


Opt. Lower Level with 4 Bedroom

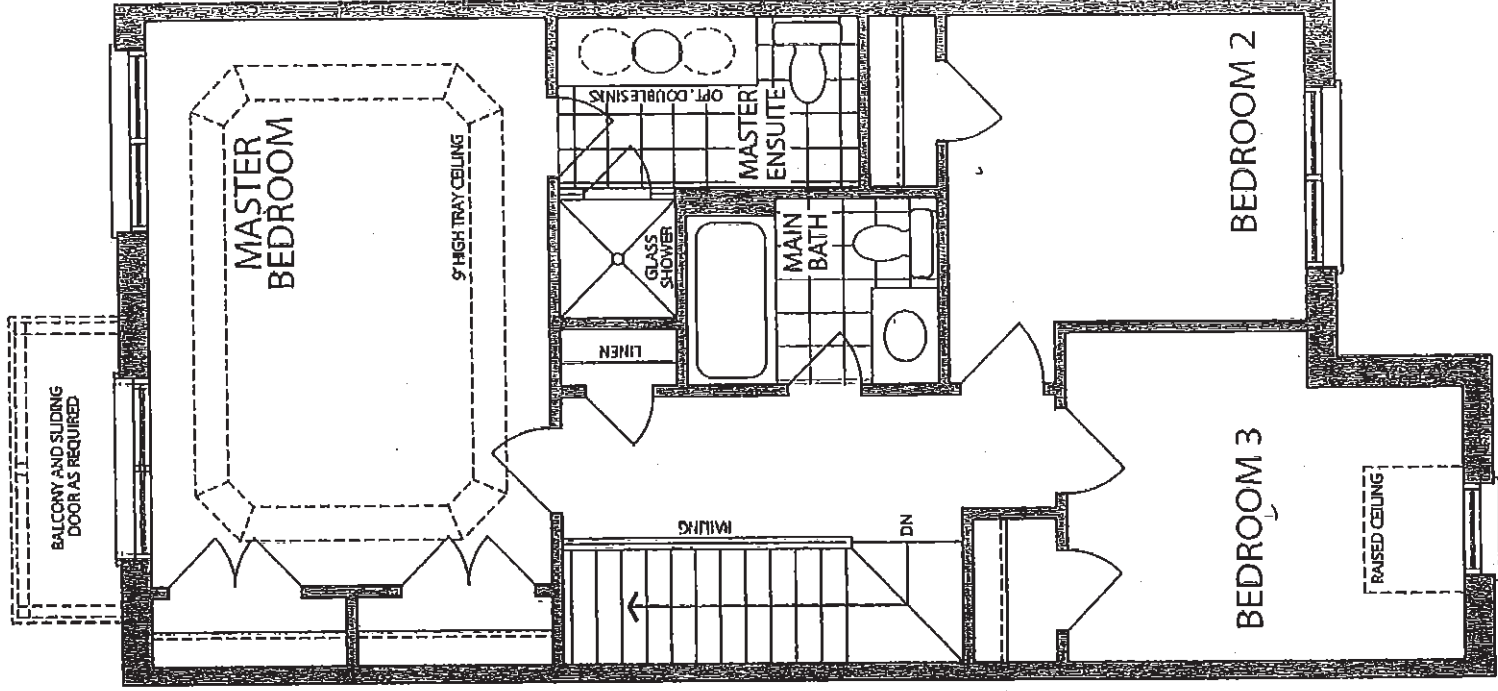

UPPER LEVEL
ELEVATION A

C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

21 of 40

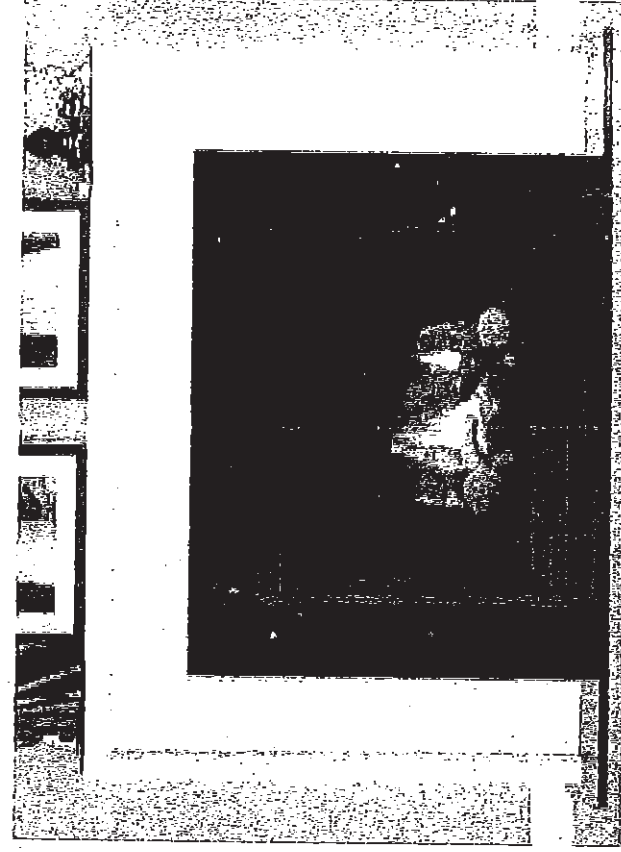

CABINET

NFAS NF17 Mantel

[Handwritten signature]


C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

22 of 40


Regency

STANDARD KITCHEN SINK

ND1831UA/9

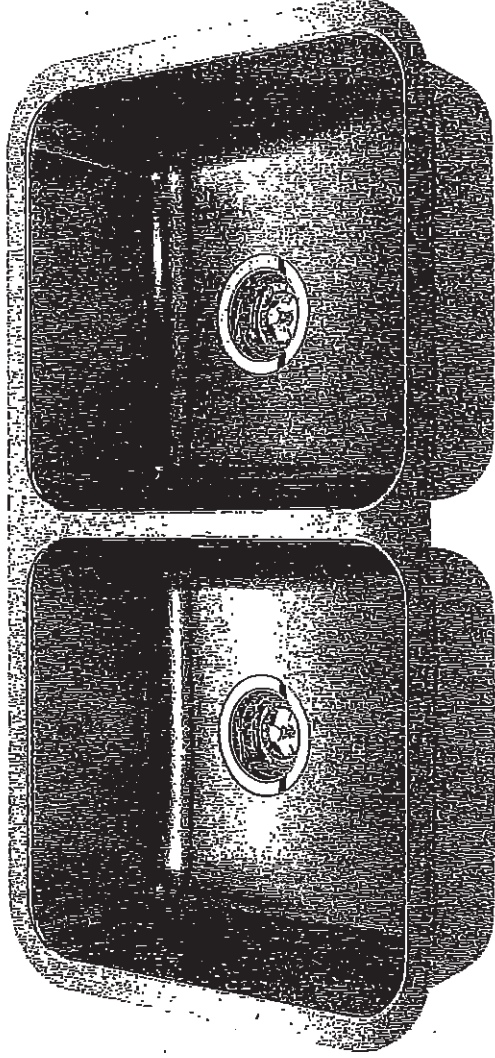

Optional Accessories

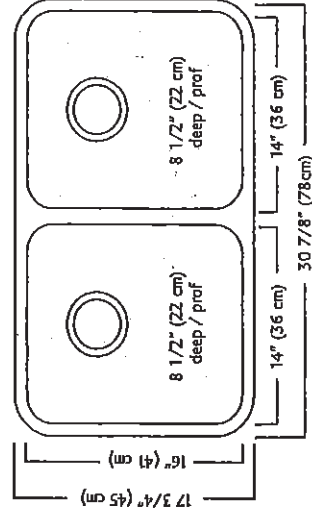

ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2\", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4\" x 30 7/8\" x 8 1/2\" (45 x 78 x 22 cm)
- Recommended for minimum 36\" cabinet

Franke Kindred Canada Limited
P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

[Signature]


C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

23 of 40

STANDARD KITCHEN FAUCET

Align

Modern

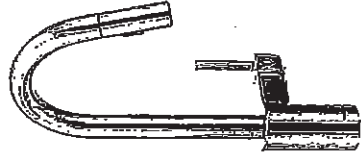

Single Handle Pull-Down Kitchen
Faucet#

Model 7565t

9

C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

24 of 10



BOULEVARD®
PEDESTAL SINK
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (illustrated)
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)


- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:
• ASME A112.19.2 - 2008/CSA B45.1-08

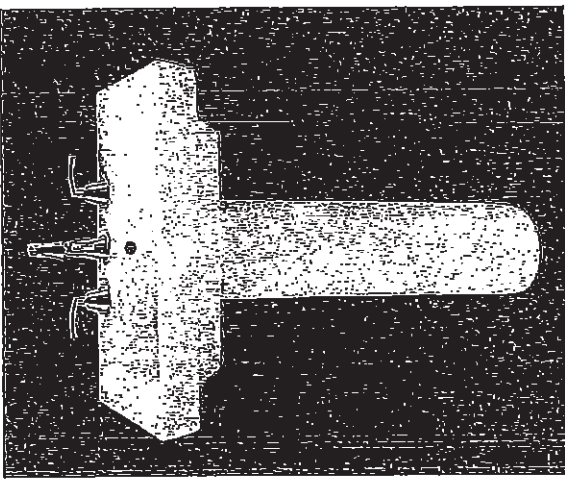

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

To Be Specified:	
☐ Color: ☐ White ☐ Linen	
☐ Faucet Finish:	
☐ Supplies:	
☐ 1-1/4" Trap:	
☐ Nipple:	

* See faucet section for additional models available

C2 COUNTRY LANE

LOT 50-4

20-841 ELEV A

THE ARLINGTON

COLONY™
COUNTERTOP SINK
VITREOUS CHINA

COLONY COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

☒ 0346 803

Faucet holes on 203mm (8") centres

☐ 0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

☐ 0346 001

Centre hole only

Nominal Dimensions:

521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS –

- Meets or exceeds the following Specifications:
- ASME A112.19.2M for Vitreous China Fixtures.
 - CAN/CSA B45 Series.

To Be Specified

☐ Colour: ☒ White ☐ Bone ☐ Silver Gray

☐ Linen

☐ Faucet*:

☐ Faucet Finish:

☐ Supplies & Stops:




☐ Trap 1-1/4" (32 mm):

* See faucet section for additional models available

BAS-198

© 2000 American Standard Inc.

01/07

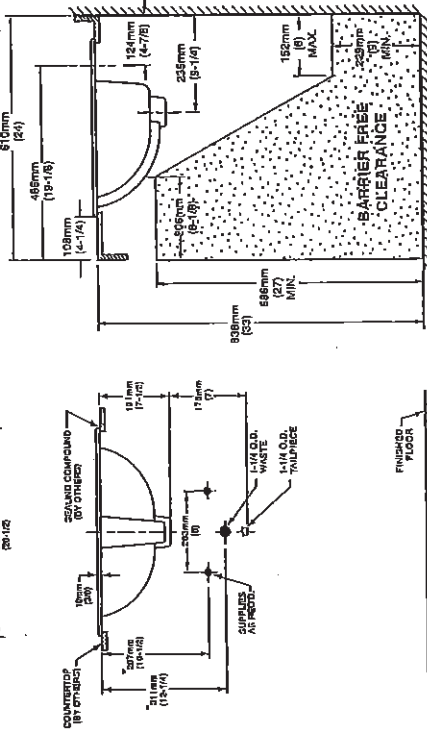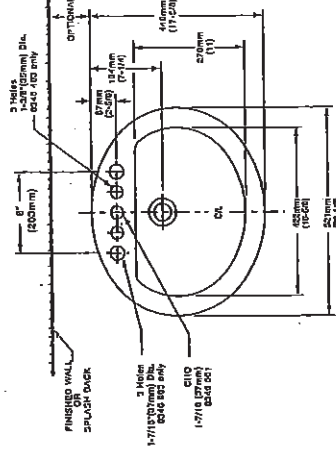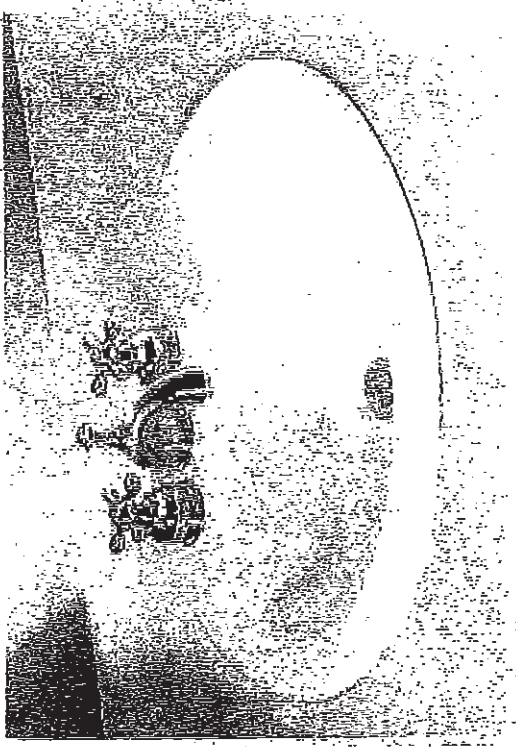

NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.


FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

2604-40

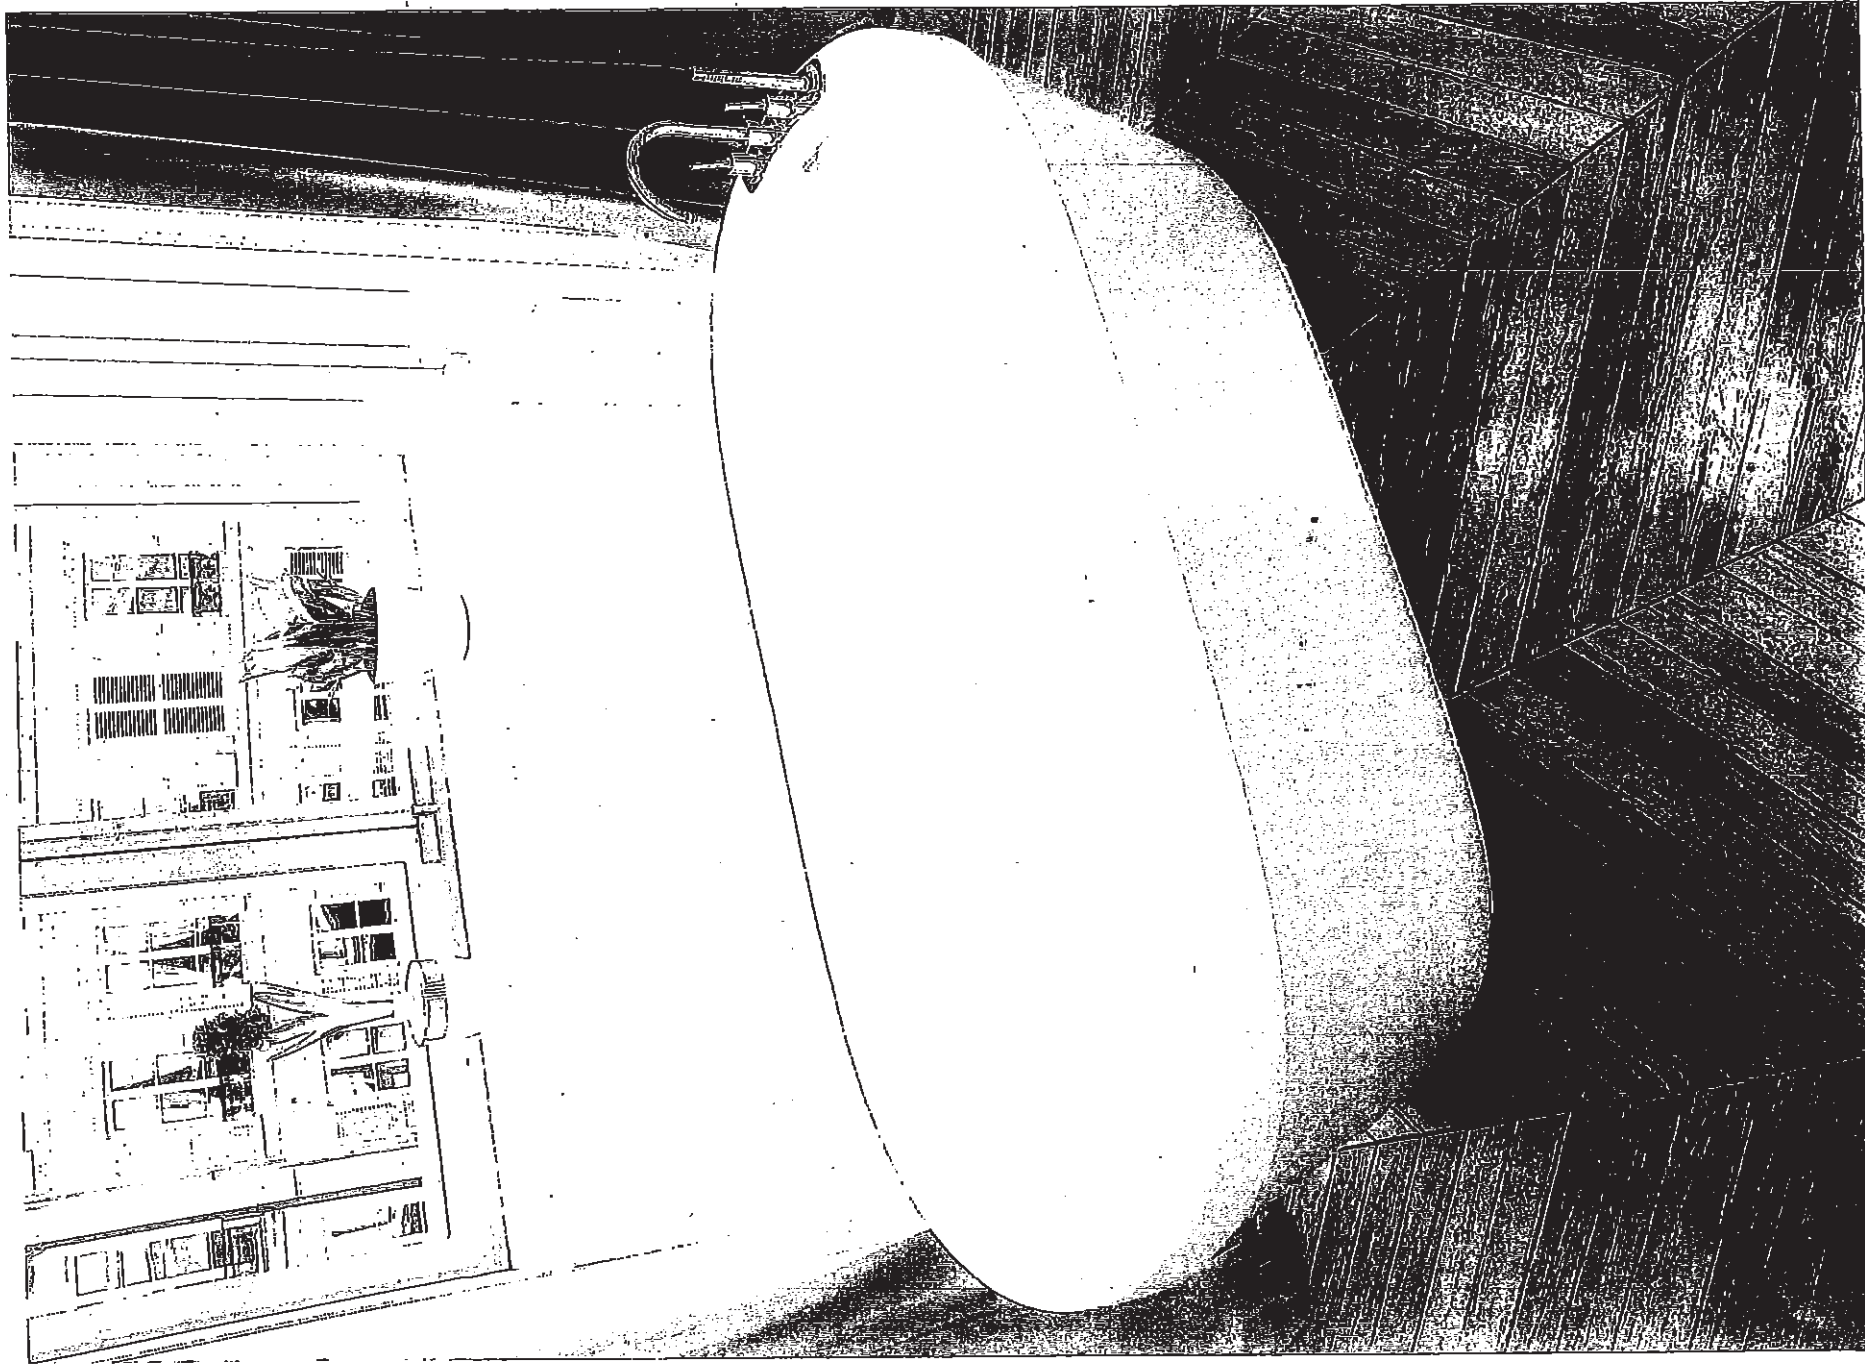


Deml CF2007

C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

27 of 40


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL
Model 62320 / TL183EP†
(TL183EP not available in BC)

SHOWER AND 5" TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

A handwritten signature or mark, possibly a stylized 'P' or 'R', located in the bottom right corner of the page.

C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON


28 of 40

Cyclone®

SCB51430 Canopy Hood


Alito Collection

Makes a statement of strength and power as the stainless steel frame gleams under your kitchen lights. It features baffle filters, tow bright LED lights in each corner, a three speed control panel, and a quiet, powerful motor. The bold design and strong stainless steel frame encasing the fan will make this machine the focus of your kitchen. Fitted with time-delay "OFF" options up to nine minutes.

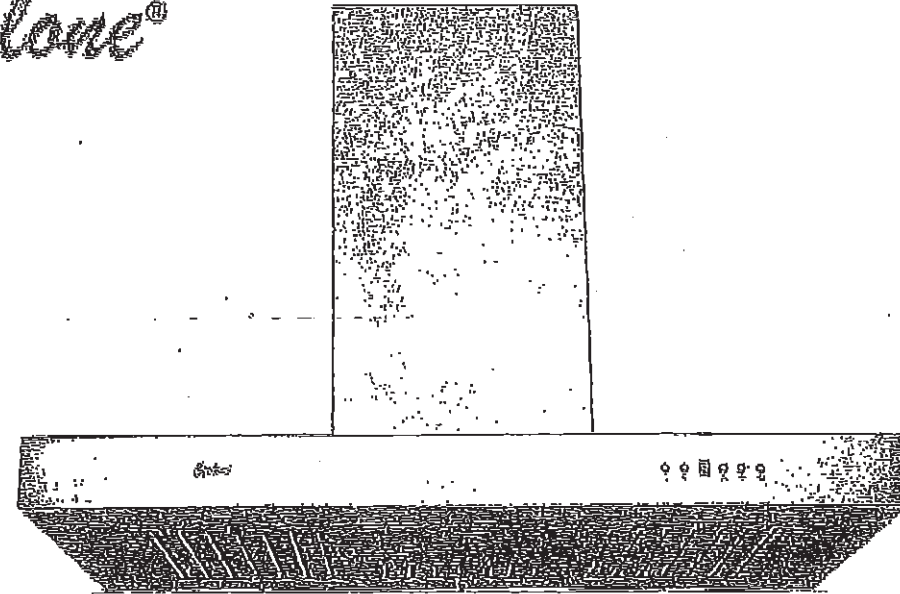


Specifications


Air Flow Volume:	550 CFM
Colours:	Stainless Steel
Dimensions:	W:30" H:44.5" D:19.5"
Electrical Connection:	120V/60Hz
Electrical Consumption:	200 watts
Fan Speed:	1254 RPM
Sones:	Min. at 2 and Max at 6
Venting:	6" Round (Top Only)

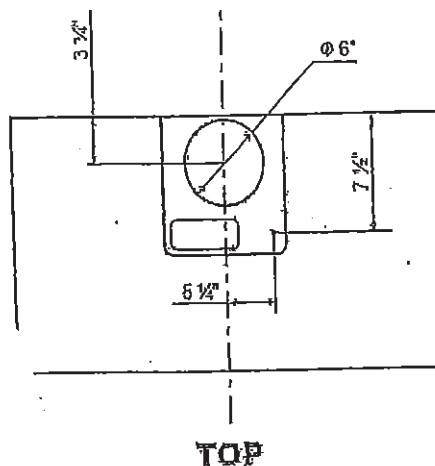

TOP

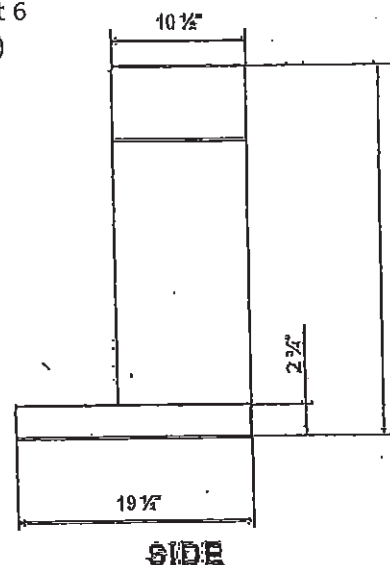

SIDE

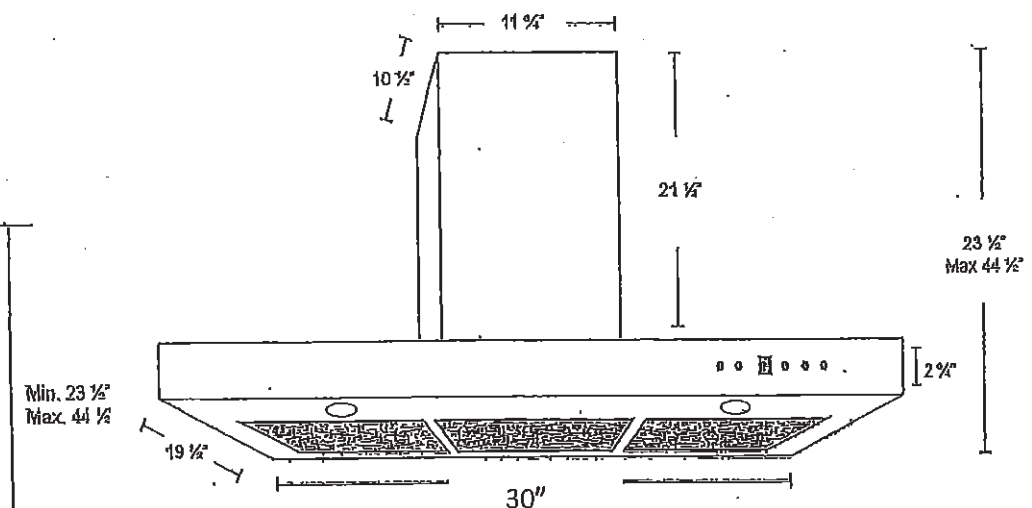

C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

29 of 47



Bottom Mount Refrigerator

WRF550CDH2
WATER/ICE ON
FLOAST

PRODUCT MODEL NUMBERS

WRF532SMB
WRF535SMB

WRF535SMB
WRF540CWB

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.



NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

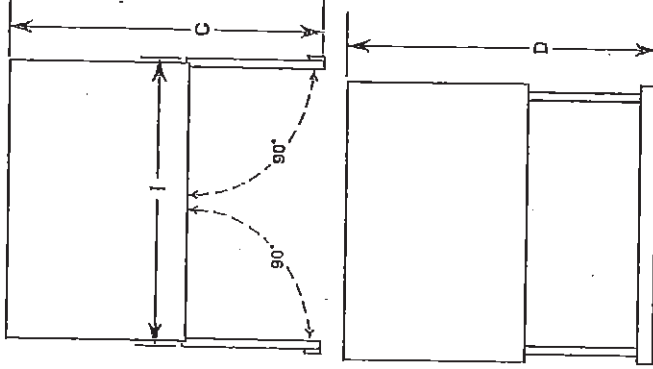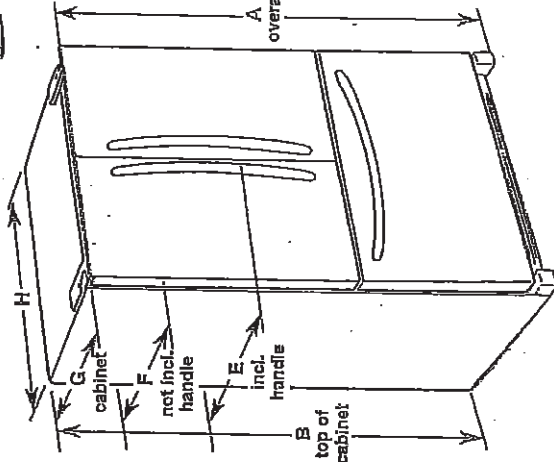

Model Number/Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
WRF535SMB 25.2 cu. ft.	70 1/4" (176.1 cm)	68 3/4" (174.9 cm)	48 1/4" (122.1 cm)	53 1/2" (135 cm)	35 1/4" (90 cm)	32 1/4" (83.7 cm)	29 1/2" (74 cm)	35 3/4" (90.5 cm)	49 3/4" (110.2 cm)
WRF535SMB 25.2 cu. ft.	70 1/4" (176.1 cm)	68 3/4" (174.8 cm)	48 1/4" (122.1 cm)	53 1/2" (135 cm)	35 3/4" (90 cm)	32 1/4" (83.7 cm)	29 1/2" (74 cm)	35 3/4" (90.5 cm)	49 3/4" (110.2 cm)
WRF532SMB 22.1 cu. ft.	70 1/4" (178.1 cm)	69 3/4" (174.8 cm)	47 1/4" (119.5 cm)	52 1/4" (132.1 cm)	34 1/4" (87.5 cm)	31 1/4" (81.1 cm)	28 3/4" (74.4 cm)	32 3/4" (82.9 cm)	42 3/4" (107.6 cm)
WRF540CWB 20 cu. ft.	70 3/4" (178.1 cm)	69 3/4" (174.8 cm)	48" (121.9 cm)	44 1/2" (113.0 cm)	29 1/4" (74.6 cm)	28" (71.1 cm)	24 1/2" (61.3 cm)	35 3/4" (90.5 cm)	39 3/4" (100.0 cm)

LOCATION REQUIREMENTS

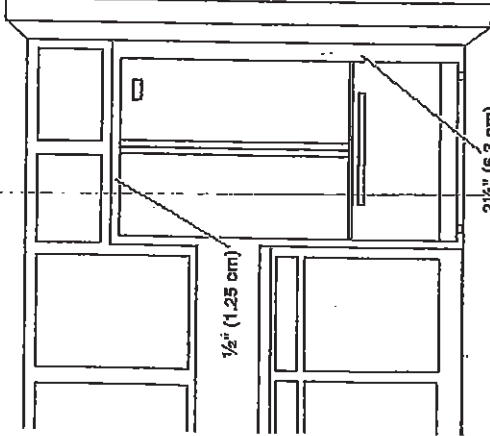

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2 1/2" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.


Ref. W70597594B
10/1714

C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

30 of 40



FRONT-CONTROL
GAS RANGES

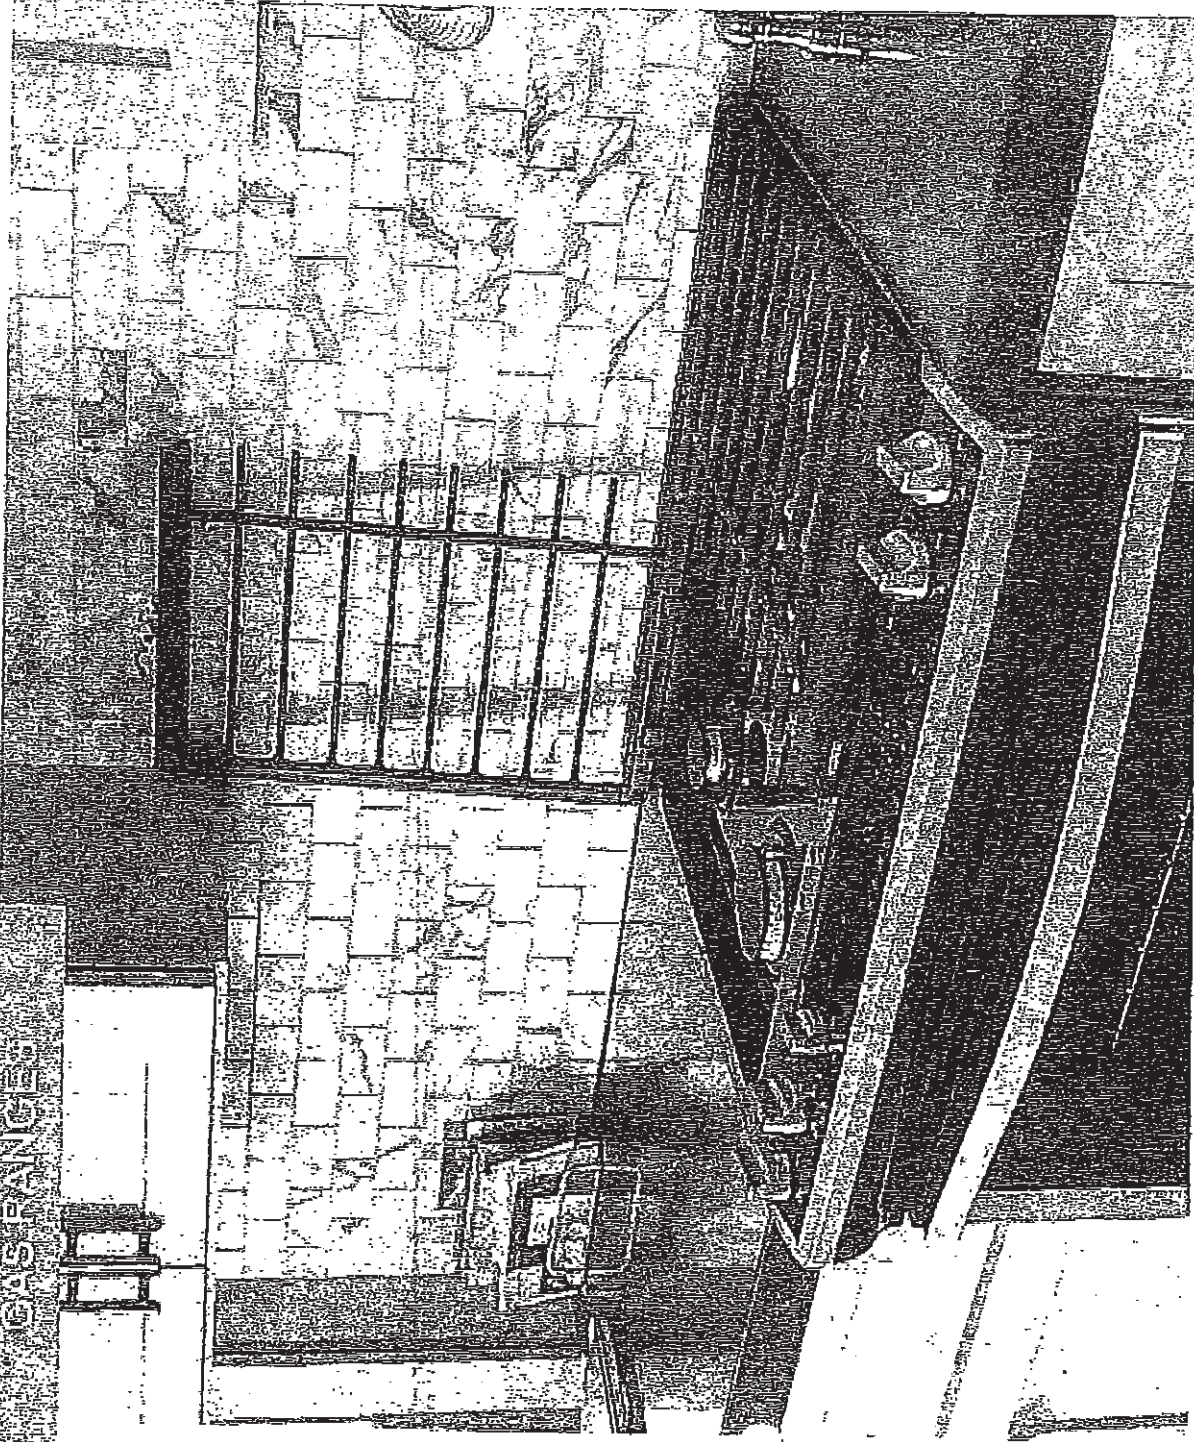

FEATURING



TimeSaver™ system

The TimeSaver™ system's Frozen Bake Technology allows you to skip preheating for favorites like pizza, lasagna, chicken nuggets, fries or pies so you can cook frozen foods faster.*



HeatRight™ system

The HeatRight™ system's True convection helps you to cook food faster* with a real fan and third heating element to circulate hot air over, under, and around food.



CompleteClean™ system

The CompleteClean™ system's EZ-2-Lift™ hinged grates give you quick access to spills on the cooktop. The industry first hinged design allows you to wipe up under them without removing them entirely. For a more thorough clean, the grates are also dishwasher-safe.

Every day, care.™



From the #1 Selling Appliance brand in the USA†



C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

31 of 40

Front Control Gas Ranges

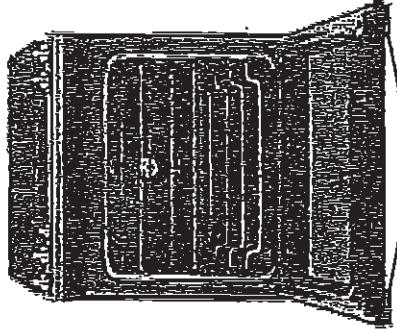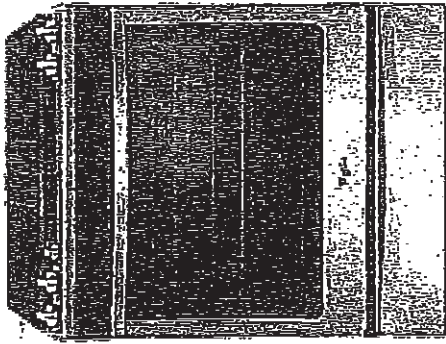

WEG745HOF

30" Freestanding Range - 5.8 cu. ft.



TimeSaver™ system

- Frozen Bake™ Technology



HeatRight™ system

- True Convection
- Convection Conversion
- AccuSimmer™ burner
- Center Oval burner
- Temperature Sensor



CompleteClean System

- EZ-2-Lit™ Hinged Grates
- AquaLift® Self-cleaning Technology
- Dishwasher-safe knobs




ReadySet™ system

- (2) Speed-Heat™ burners
- Rapid Preheat
- Keep Warm
- Delay Cook

Available colors



S
Stainless
Steel




H
White
fin



B
Black
fin

PRODUCT DIMENSIONS

For interior cabinet and wall space, the model may require additional space from the model's base. Dimensions given are for the finished product.




1. 24 1/2" (613 mm) height
2. 24 1/2" (613 mm) height
3. 24 1/2" (613 mm) height
4. 24 1/2" (613 mm) height
5. 24 1/2" (613 mm) height
6. 24 1/2" (613 mm) height
7. 24 1/2" (613 mm) height
8. 24 1/2" (613 mm) height
9. 24 1/2" (613 mm) height
10. 24 1/2" (613 mm) height
11. 24 1/2" (613 mm) height
12. 24 1/2" (613 mm) height
13. 24 1/2" (613 mm) height
14. 24 1/2" (613 mm) height
15. 24 1/2" (613 mm) height
16. 24 1/2" (613 mm) height
17. 24 1/2" (613 mm) height
18. 24 1/2" (613 mm) height
19. 24 1/2" (613 mm) height
20. 24 1/2" (613 mm) height
21. 24 1/2" (613 mm) height
22. 24 1/2" (613 mm) height
23. 24 1/2" (613 mm) height
24. 24 1/2" (613 mm) height
25. 24 1/2" (613 mm) height
26. 24 1/2" (613 mm) height
27. 24 1/2" (613 mm) height
28. 24 1/2" (613 mm) height
29. 24 1/2" (613 mm) height
30. 24 1/2" (613 mm) height
31. 24 1/2" (613 mm) height
32. 24 1/2" (613 mm) height
33. 24 1/2" (613 mm) height
34. 24 1/2" (613 mm) height
35. 24 1/2" (613 mm) height
36. 24 1/2" (613 mm) height
37. 24 1/2" (613 mm) height
38. 24 1/2" (613 mm) height
39. 24 1/2" (613 mm) height
40. 24 1/2" (613 mm) height
41. 24 1/2" (613 mm) height
42. 24 1/2" (613 mm) height
43. 24 1/2" (613 mm) height
44. 24 1/2" (613 mm) height
45. 24 1/2" (613 mm) height
46. 24 1/2" (613 mm) height
47. 24 1/2" (613 mm) height
48. 24 1/2" (613 mm) height
49. 24 1/2" (613 mm) height
50. 24 1/2" (613 mm) height
51. 24 1/2" (613 mm) height
52. 24 1/2" (613 mm) height
53. 24 1/2" (613 mm) height
54. 24 1/2" (613 mm) height
55. 24 1/2" (613 mm) height
56. 24 1/2" (613 mm) height
57. 24 1/2" (613 mm) height
58. 24 1/2" (613 mm) height
59. 24 1/2" (613 mm) height
60. 24 1/2" (613 mm) height
61. 24 1/2" (613 mm) height
62. 24 1/2" (613 mm) height
63. 24 1/2" (613 mm) height
64. 24 1/2" (613 mm) height
65. 24 1/2" (613 mm) height
66. 24 1/2" (613 mm) height
67. 24 1/2" (613 mm) height
68. 24 1/2" (613 mm) height
69. 24 1/2" (613 mm) height
70. 24 1/2" (613 mm) height
71. 24 1/2" (613 mm) height
72. 24 1/2" (613 mm) height
73. 24 1/2" (613 mm) height
74. 24 1/2" (613 mm) height
75. 24 1/2" (613 mm) height
76. 24 1/2" (613 mm) height
77. 24 1/2" (613 mm) height
78. 24 1/2" (613 mm) height
79. 24 1/2" (613 mm) height
80. 24 1/2" (613 mm) height
81. 24 1/2" (613 mm) height
82. 24 1/2" (613 mm) height
83. 24 1/2" (613 mm) height
84. 24 1/2" (613 mm) height
85. 24 1/2" (613 mm) height
86. 24 1/2" (613 mm) height
87. 24 1/2" (613 mm) height
88. 24 1/2" (613 mm) height
89. 24 1/2" (613 mm) height
90. 24 1/2" (613 mm) height
91. 24 1/2" (613 mm) height
92. 24 1/2" (613 mm) height
93. 24 1/2" (613 mm) height
94. 24 1/2" (613 mm) height
95. 24 1/2" (613 mm) height
96. 24 1/2" (613 mm) height
97. 24 1/2" (613 mm) height
98. 24 1/2" (613 mm) height
99. 24 1/2" (613 mm) height
100. 24 1/2" (613 mm) height

IMPORTANT: Always use the correct type of gas for your range. For information on the correct type of gas, see the "Gas Conversion" section. If you are unsure of the correct type of gas, contact your local gas supplier. Do not use any other type of gas, as it may cause damage to your range and void the warranty.

Always use the correct type of gas for your range. For information on the correct type of gas, see the "Gas Conversion" section. If you are unsure of the correct type of gas, contact your local gas supplier. Do not use any other type of gas, as it may cause damage to your range and void the warranty.

CABINET OPENING DIMENSIONS

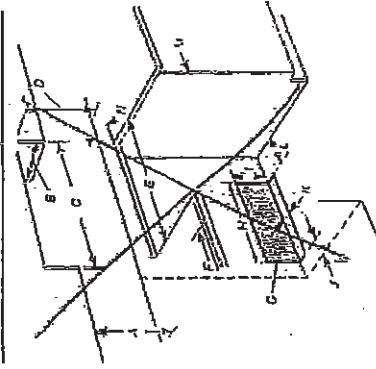

IMPORTANT: Always use the correct type of gas for your range. For information on the correct type of gas, see the "Gas Conversion" section. If you are unsure of the correct type of gas, contact your local gas supplier. Do not use any other type of gas, as it may cause damage to your range and void the warranty.

Always use the correct type of gas for your range. For information on the correct type of gas, see the "Gas Conversion" section. If you are unsure of the correct type of gas, contact your local gas supplier. Do not use any other type of gas, as it may cause damage to your range and void the warranty.



*Compared to a standard preheat and bake cycle for pizza, nuggets/fries, pies and lasagna. **Compared to thermal bake cycle on the same model. †Based on 12-month average of unit sales. Refrigeration, Cooking, Dishwashers, and Laundry appliances. Truedirect, 2014.

©2016 Whirlpool. All rights reserved. 5716 Part No. WCI00099

[Handwritten signature]

C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

32x40

Whirlpool®

30" (76.2 cm) Slide-in Gas Range

C

PRODUCT MODEL NUMBERS

WEG760HOD

WEG760HOD

WEG745HOF

GAS SUPPLY REQUIREMENTS

Gas supply line:

- Provide a gas supply line of $\frac{3}{4}$ " (1.9 cm) rigid pipe to the range location. A smaller size pipe on longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be $\frac{1}{2}$ " (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.

NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape.

Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 to 6 ft (122 to 182.4 cm) long, $\frac{1}{2}$ " (1.3 cm) or $\frac{3}{4}$ " (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.




- A $\frac{1}{2}$ " (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the appliance pressure regulator.

- Do not kink or damage the flexible metal tubing when moving the range.

- Must include a shutoff valve:

The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.

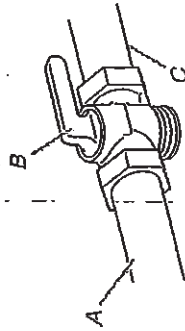

- A. Gas supply line
- B. Shutoff valve "open" position
- C. To range

Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

Natural gas:

Minimum pressure: 5" WCP
Maximum pressure: 14" WCP


LP gas:

Minimum pressure: 11" WCP
Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

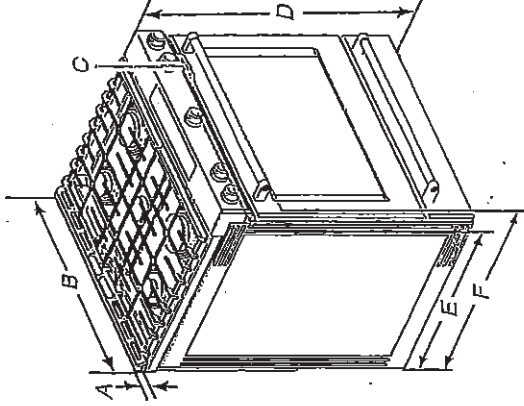

A. $1\frac{1}{8}$ " (3.0 cm) height from cooktop to top of vent

B. $29\frac{3}{4}$ " (75.9 cm)

C. Model/serial number plate (located behind the oven door on the top right-hand side of the oven frame)

D. $36\frac{1}{2}$ " (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in

E. $28\frac{1}{2}$ " (71.9 cm) max depth from front of console to back of range.

F. $25\frac{3}{4}$ " (73.3 cm) max depth from handle to back of range.

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

* Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Type of Gas

Natural gas:

- This range is factory set for use with Natural gas. See "Gas Conversions" section. The model/serial rating plate located behind the control panel has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP gas conversion:

Conversion must be done by a qualified service technician. No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

TEFLON is a registered trademark of Chemours.

C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

33 of 40



Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF310PLA	WDE530PSX
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF510PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT110PAY
WDF310PAA	WDF530PAY	WDT20PAD
WDF310PCA	WDF530PLY	WDT70PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.


If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.

Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use $\frac{3}{8}$ " O.D. copper tubing with compression fitting or flexible braided water supply line ($\frac{1}{2}$ " minimum plastic tubing is not recommended). Use a 90° elbow with $\frac{3}{4}$ " N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385566) that meets all current AHAM/API/ISO test standards. Is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

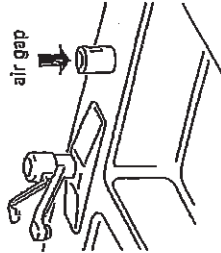


that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use $\frac{1}{2}$ " (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

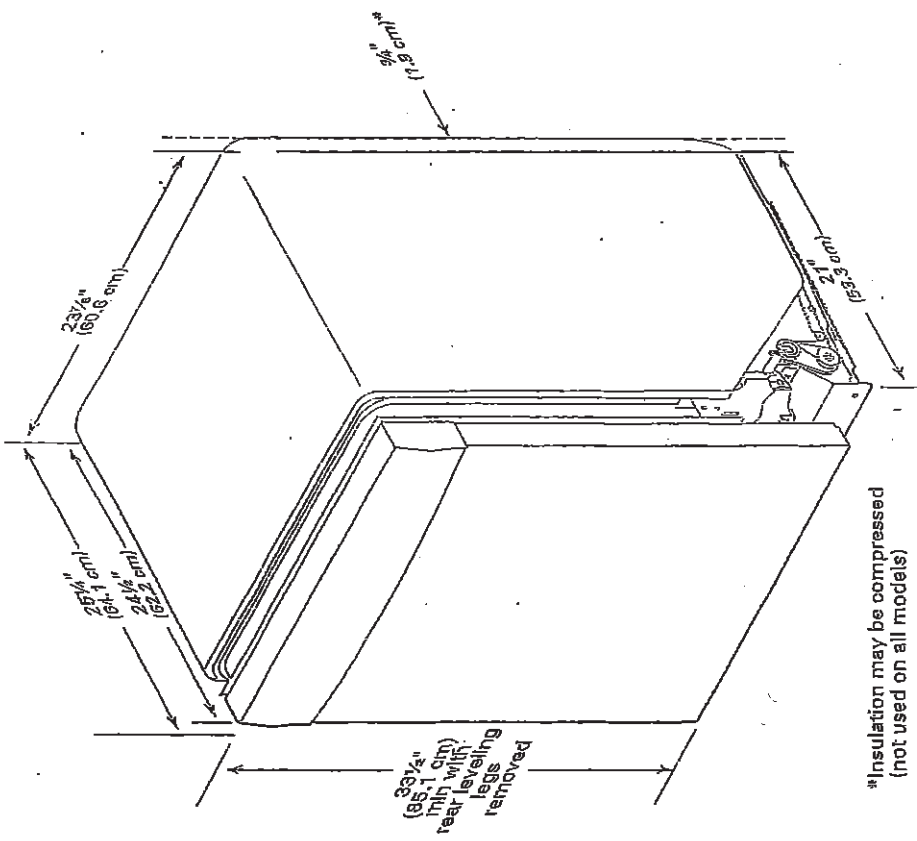

*Insulation may be compressed (not used on all models)

C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

1, 2


34 of 40

CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

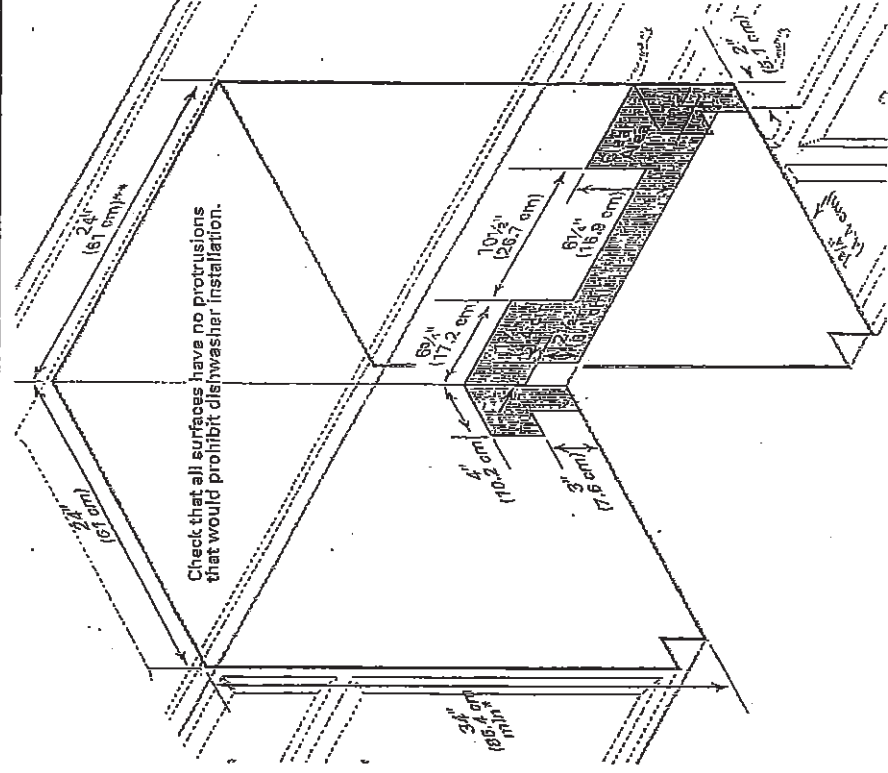


C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

35 of 40

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW

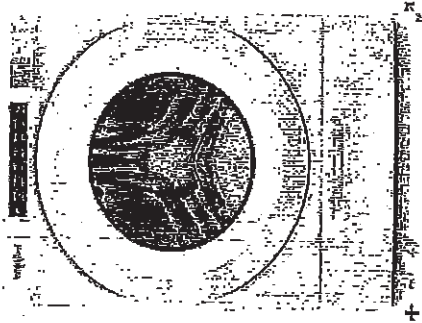

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	30.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes



C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

36 of 40

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kg).


IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer/Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

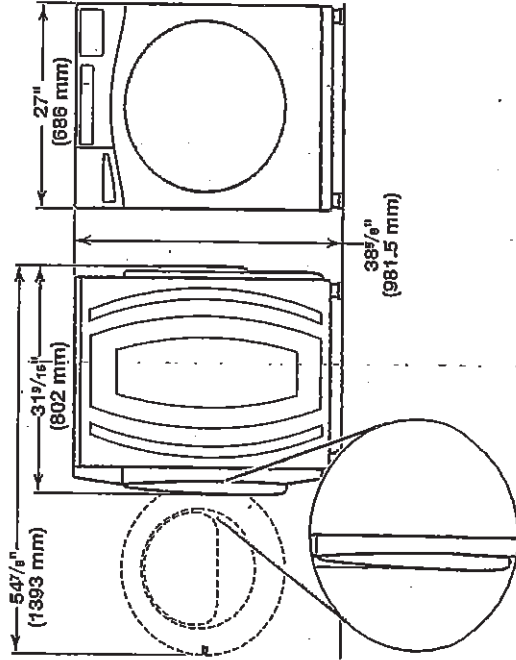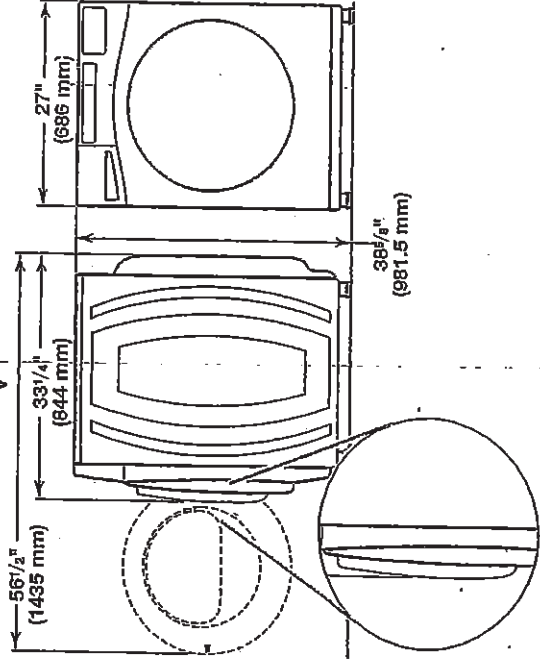


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

Maytag Models

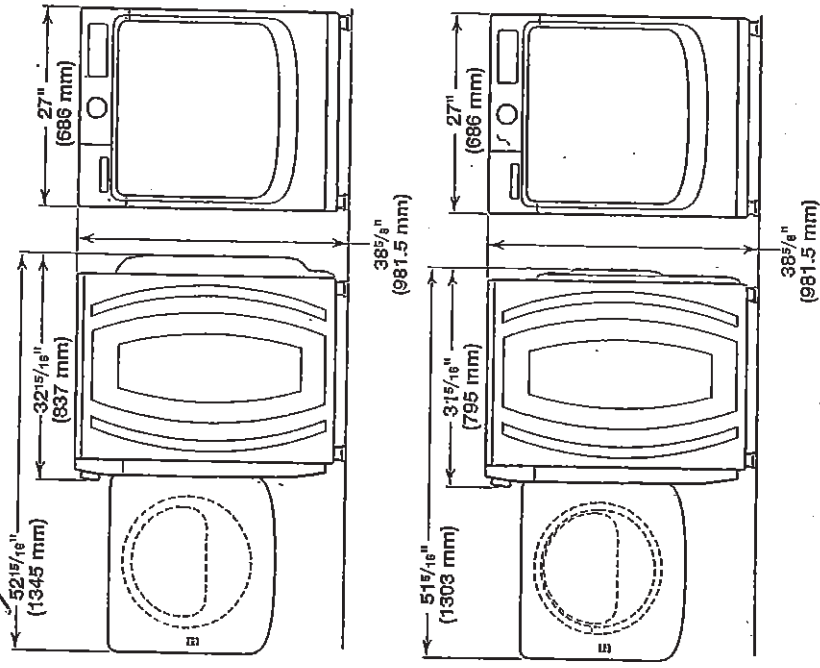

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

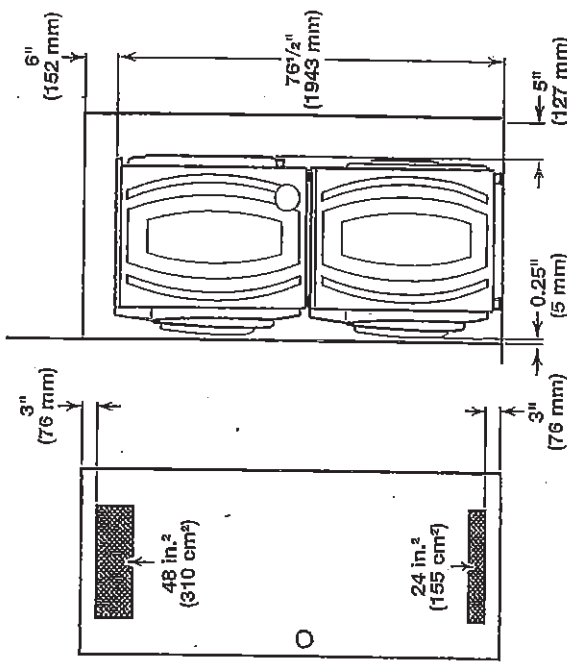


C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON


37 of 140

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

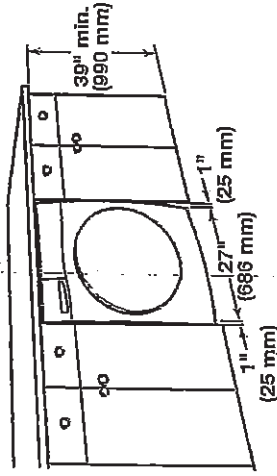

Recessed area or closet installation:

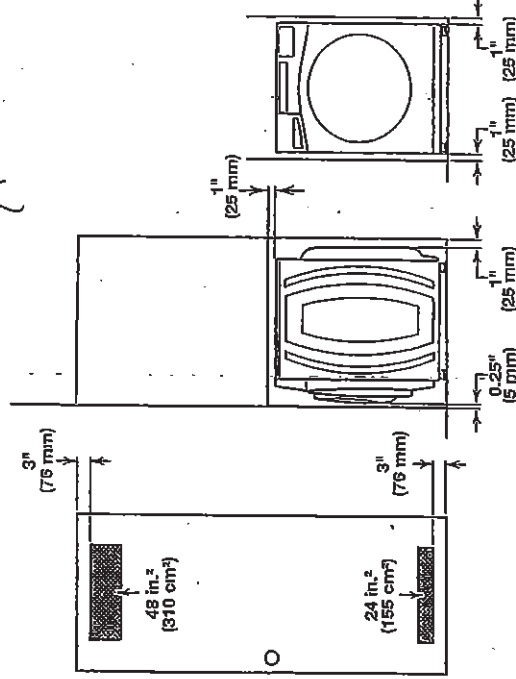

Custom cabinet installation:

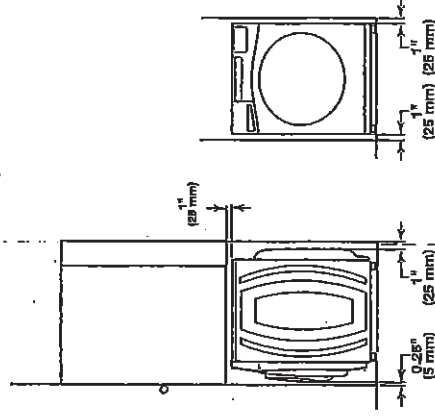


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

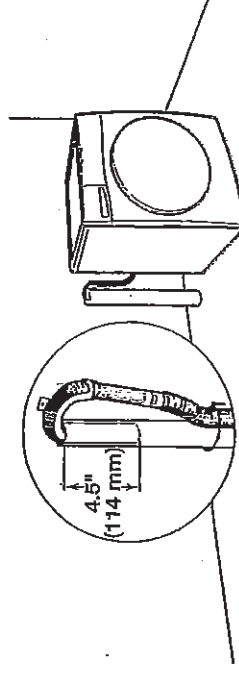


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

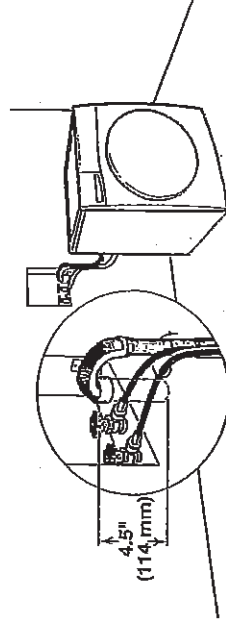

See requirements for floor standpipe drain system.

Laundry tub drain system

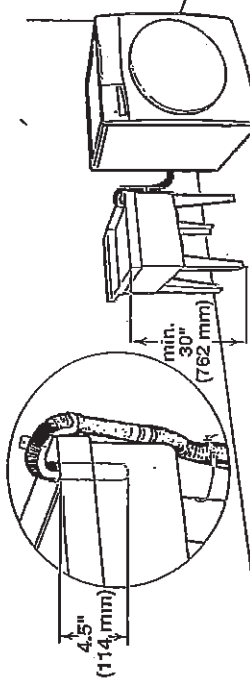

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


[Handwritten signature]

C2 COUNTRY LANE
LOT 50-4
20-841 ELEV A
THE ARLINGTON

38 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Controls English | Whirlpool and Dryer | Dryer | Electric Dryer | YWED5620HW

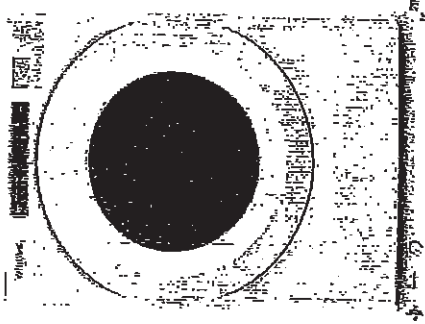

Define
your style
here

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool 7.4cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 39-3/4 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear


Electrical	
Hz	60
Power Cord Included	Yes

C2-COUNTRY LANE
LOT 50-4
20-1841 ELEV A
THE ARLINGTON

39 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

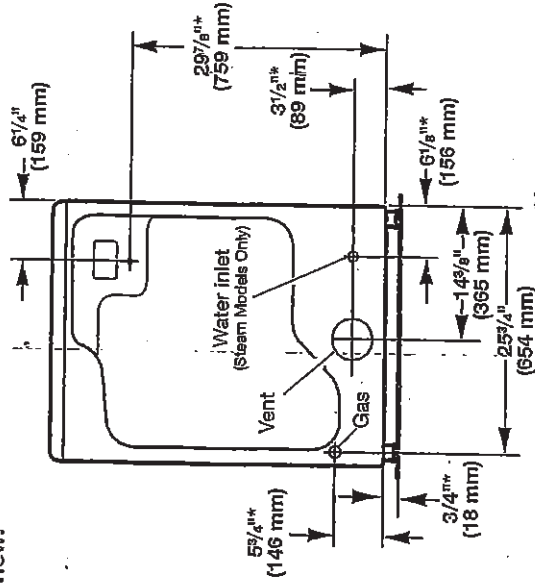

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

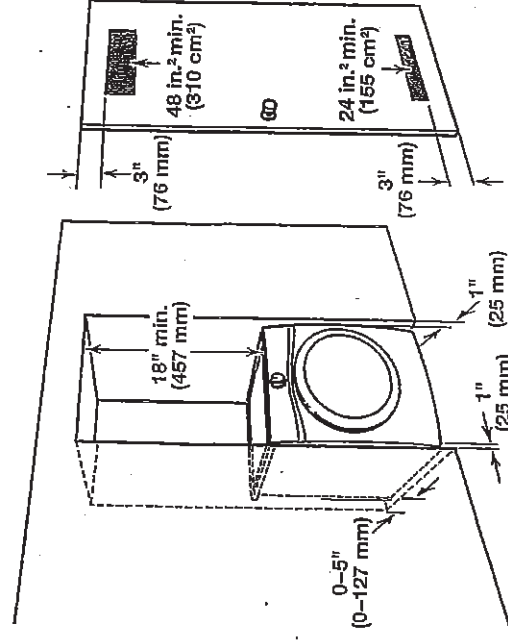

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

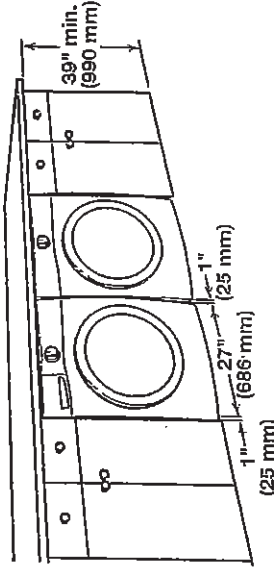

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations.

The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.



C2-COUNTRY LANE
LOT 50-4
20-1841 ELEV A
THE ARLINGTON

40 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

!WARNING



Explosion Hazard


Keep flammable materials and vapors, such as gasoline, away from dryer.
Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
Failure to do so can result in death, explosion, or fire.

You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
 - A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
 - If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
 - Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
 - Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
 - Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
 - For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
 - The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.
- IMPORTANT:** Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view:

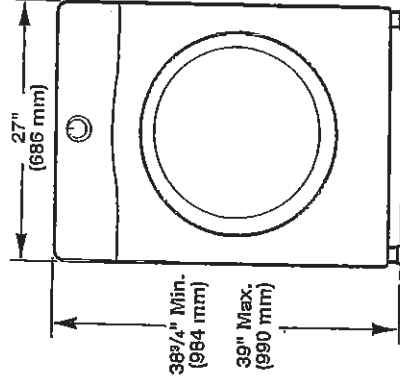

Side view:

Whirlpool Models

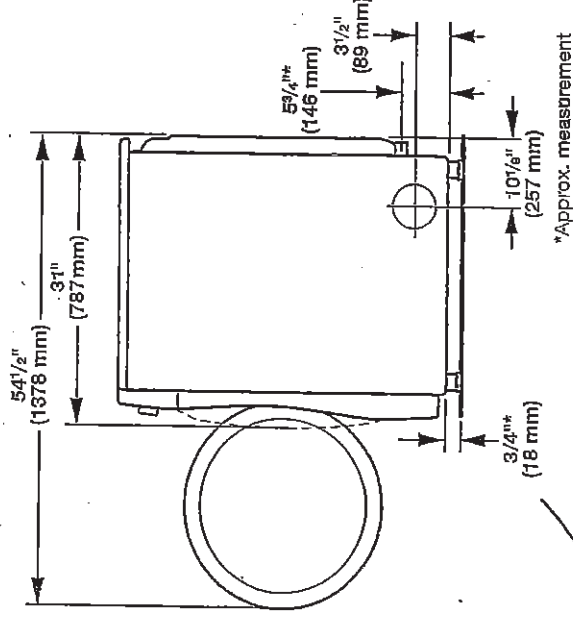

Maytag Models

