



27-Jul-21

Interior Finishing Selection Sheet

LOT 052-2 20-1841 ELEV A THE ARLINGTON

PURCHASERS: SVETLANA IPATOVA CONTACT NO: 416-989-8769

JOSE MANUEL SOARES

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Appliances

6-9378 Kitchen HoodFan

☒ ZEPHER CHIMNEY HOODFAN BLACK STAINLESS STEEL ZOM-E30BBS UPG 30" PAGES 25-26

Cabinetry

1-6191 Kitchen Cabinet Colour/Style

☐ SLAB PVC COFFEE BEAN Viking II LPL

3-2098 Kitchen Cabinet Hardware

☐ HARDWARE 12801 STD

25-9158 Main Bathroom Cabinet Colour/Style

☐ SIMCOE NAVY BLUE Viking III STD 3DL

29-7672 Main Bathroom Cabinet Hardware

☐ HARDWARE 135 STD

28-8796 Main Bathroom Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46 Formica

20-8385 Master Ensuite Cabinet Colour/Style

☐ SLAB LPL STAINLESS Viking II LPL

22-7672 Master Ensuite Cabinet Hardware

☐ HARDWARE 135 STD

Carpet

37-9248 Bedroom 2 Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

38-9248 Bedroom 3 Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

14-9248 Family Room Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

36-9248 Master Bedroom Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

366-9248 Optional Lower Level Hall Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

52-1079 Throughout Underpad

☐ Underpad 500 Series STD

Ceramics

16-8914 Foyer Flooring

☐ Biel Merengo (Grey) UN.BL.MRG.1224 UPG 2 12 x24 TO BE INSTALLED SIDE TO SIDE SKETCH # 7 PAGE 17

17-2225 Foyer Grout

☐ Grout (27) Silver STD

338-9255 Kitchen Flooring

☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13"

339-2225 Kitchen Grout

☐ Grout (27) Silver STD

348-9255 Laundry Mud Room Flooring

☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13"

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date Signature on File Purchaser

Date ~~Signature~~

Décor Consultant

Date ~~Signature~~

Date Purchaser

Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



27-Jul-21

Interior Finishing Selection Sheet

LOT 052-2

20-1841 ELEV A THE ARLINGTON

PURCHASERS: SVETLANA IPATOVA
JOSE MANUEL SOARES

CONTACT NO: 416-989-8769

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Ceramics

- | | |
|--|---|
| 349-2225 Laundry Mud Room Grout | ☐ Grout (27) Silver STD |
| 30-9255 Main Bathroom Flooring | ☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13" |
| 31-2225 Main Bathroom Grout | ☐ Grout (27) Silver STD |
| 112-9020 Main Bathroom Tub Wall Tile | ☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED VERTICALLY |
| 113-2226 Main Bathroom Tub Wall Tile Grout | ☐ Grout (00) White STD |
| 23-9255 Master Ensuite Floor Tile | ☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13" |
| 24-2225 Master Ensuite Floor Tile Grout | ☐ Grout (27) Silver STD |
| 73-8661 Master Ensuite Shower Floor Tile | ☐ Ontario Series Mosaic Snow White Matte OD.ON.SWT.0202.MT.N STD 2 x 2 |
| 74-2225 Master Ensuite Shower Floor Tile Grout | ☐ Grout (27) Silver STD |
| 147-8923 Master Ensuite Shower Jamb(s) and Sill(s) | ☐ Shower Jamb / Sill Thassos White STD |
| 104-8833 Master Ensuite Shower Wall Tile | ☐ Uniwall White QT.UW.WHT.0810 STD 8 x 10 TO BE INSTALLED VERTICALLY |
| 105-2226 Master Ensuite Shower Wall Tile Grout | ☐ Grout (00) White STD |
| 365-9255 Mud Room (Optional Lower Level) Flooring | ☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13" |
| 364-2225 Mud Room (Optional Lower Level) Grout | ☐ Grout (27) Silver STD |
| 32-9255 Powder Room Flooring | ☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13" |
| 33-2225 Powder Room Grout | ☐ Grout (27) Silver STD |
| 53-2232 Throughout Thresholds | ☐ Metal Thresholds STD |

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Granite

2-9221 Kitchen Countertop

☒ MSI Quartz ICED WHITE Group 1 UPG 3/4" with Mitered Edge

21-9069 Master Ensuite Countertop

☒ MSI Quartz ICED WHITE Group 1 STD 3/4"

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Signature on File

July 27, 21

Date

Purchaser

Décor Consultant

M. Rosen

Date

Purchaser

Date Approved

HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



LOT 052-2

**PURCHASERS: SVETLANA IPATOVA
JOSE MANUEL SOARES**

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak
Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

49-7654 Stairs to Lower Level Handrail/Pickets/Posts Type

☐ 1 3/4" Square pickets with 3 1/2" Square/Cap Post(s) ALL OAK STD

	1 3/4" Square pickets with 3 1/2" Square/Cap Post(s)	ALL
	OAK	STD
☐		

116-1713 Basement Stairs Type

☐ Oak Stairs

☐ **Oak Stairs** **UPG 1**

91-9374	Throughout	Trim Size
---------	------------	-----------

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings
STD-Towns

46-1729 Stairs to Lower Level Colour

☐ Stain handrail, pickets, stringers, nosing & post(s). STAIN TO COMPLEMENT Red Oak Pearl COCOA SHADE WILL VARY

~~50.1729 Stairs to Lower Level Handrail/Pickets/Posts Colour~~

☐ Stain handrail, pickets, stringers, nosing & post(s). STAIN TO COMPLEMENT Red Oak Pearl COCOA SHADE WILL VARY

~~44-1729 Stairs to Upper Level Handrail/Pickets/Posts Colour~~ **DUPLICATE**

☐ Trim WHITE STD

☐ Wall WARM GREY 22 STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

July 27, 21

Décor Consultant

Date Approved _____

HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4



Interior Finishing Selection Sheet
of 39

27-Jul-21

LOT 052-2

20-1841 ELEV A THE ARLINGTON

PURCHASERS: SVETLANA IPATOVA

CONTACT NO: 416-989-8769

JOSE MANUEL SOARES

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

149-1737 Master Ensuite Plumbing Fixture (colour)

☐ Plumbing Fixtures WHITE STD

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Signature on File

Date

Purchaser

Décor Consultant

27-20-2021

Date

Purchaser

Date Approved
HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



27-Jul-21

Sales Selection Sheet
3 of 3

LOT	052-2	20-1841 ELEV A THE ARLINGTON
PURCHASERS:	SVETLANA IPATOVA JOSE MANUEL SOARES	CONTACT NO: 416-989-8769
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein. It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances		
2484	Zephyr 30" Ombra Wall Chimney Hood Black SS ZOM-E30BBS PAGES 25-26	KITCHEN Qty: 1
Ceramics		
1679	Upgrade 2 Tile	Foyer Floor Qty: 1
Granite		
795	Optional Upgrade Countertop 3/4" GROUP 1 with double edge	Kitchen Qty: 1
763	Optional Extras Granite cutout w/ straight edge polish to accommodate under mount vanity sink SPEC PAGE 22	MASTER BATHROOM Qty: 1
796	Optional Upgrade Countertop upgrade with 4" backsplash 3/4" GROUP 1 with double edge	Master Ensuite Qty: 1
Plumbing		
278	STANDARD Kitchen Sink Option KINDRED Kitchen Sink Collection - Reginox ND1827RU/9 Stainless Kitchen Double (Large bowl/ Full Bowl) Undermount Sink (or equivalent) PAGE 19	KITCHEN Qty: 1
110	AMERICAN STANDARD - SINK OPTIONS - Undermount Sink BOXE - White - Model 0315 000 020 PAGE 22	MASTER BATHROOM Qty: 1

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Signature on file	July 27, 21	
Date	Date APPROVED	Décor Consultant
Purchaser		
Date	27-7-2021	mRoan
Purchaser		

Date Approved HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



27-Jul-21

Sales Selection Sheet
of

LOT	052-2	20-1841 ELEV A THE ARLINGTON
PURCHASERS: SVETLANA IPATOVA CONTACT NO: 416-989-8769		
JOSE MANUEL SOARES		
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Signature on File	July 27, 21	
Date	Date APPROVED	Décor Consultant
	-07-29-2021	Mr. Rosen
Date		

Date Approved HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4

C2-COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON


15 of 39

The Arlington

ELEVATION A & B: 1,841 SQ FT

20-1841 ELEV. A

Lot 52-2 Lot 52-3 Sketch #5

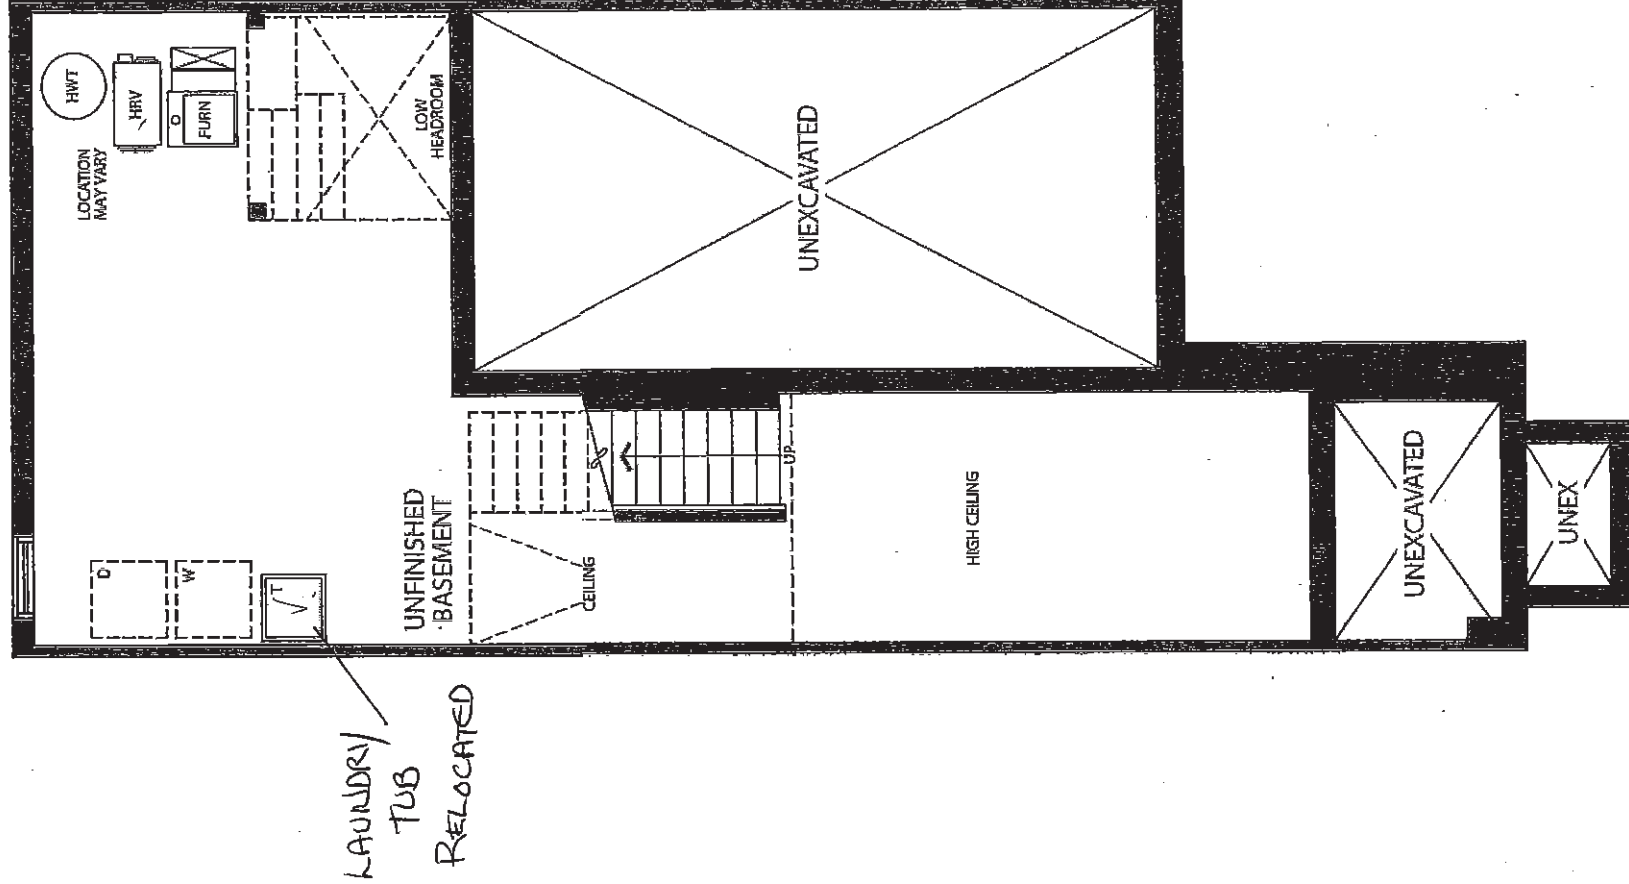

OPT. BASEMENT ELEV A
FOR 4 BEDROOM LAYOUT LAUNDRY RELOCATION
BLOCK 52 - UNIT 2 & 3 ONLY

ST. 1A

C2-COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON


16 of 39

The Arlington

20-1841 ELEV. A

ELEVATION A & B: 1,841 SQ FT

Lot 52-2 Lot 52-3 Sketch #6

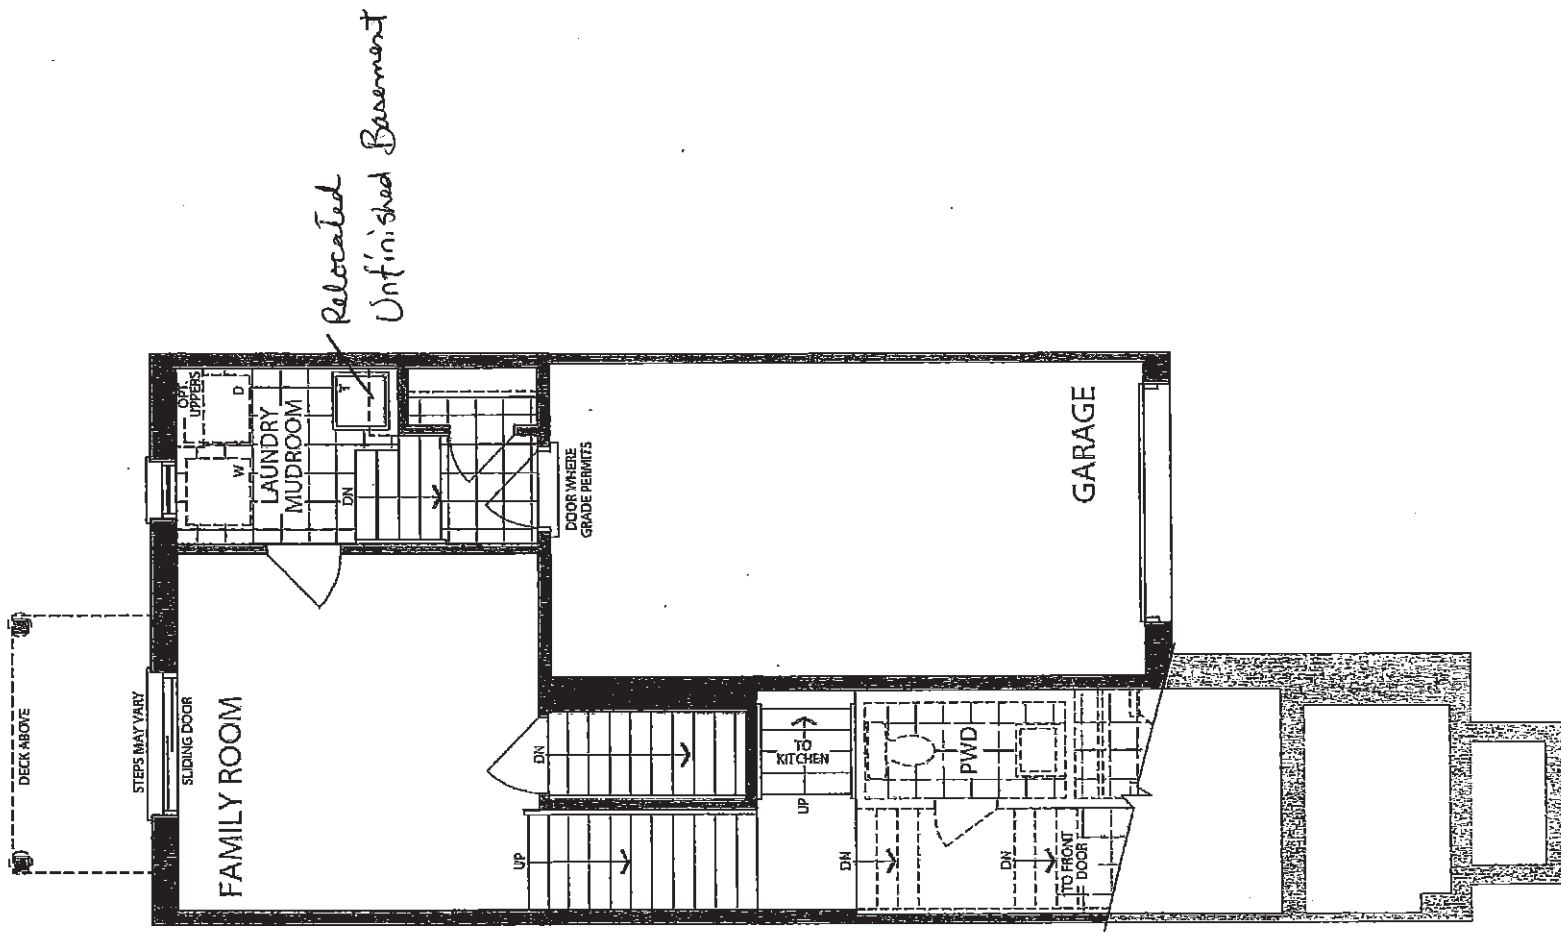

OPT. LOWER FLOOR ELEV A
ALTERNATE FAMILY ROOM AND LAUNDRY
BLOCK 52 - UNIT 2 & 3 ONLY

ST 7A

C2-COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON


17 of 39

The Arlington

20-1841 ELEV. A

ELEVATION A & B: 1,841 SQ FT

Lot 52-2 Lot 52-3 Sketch # 7

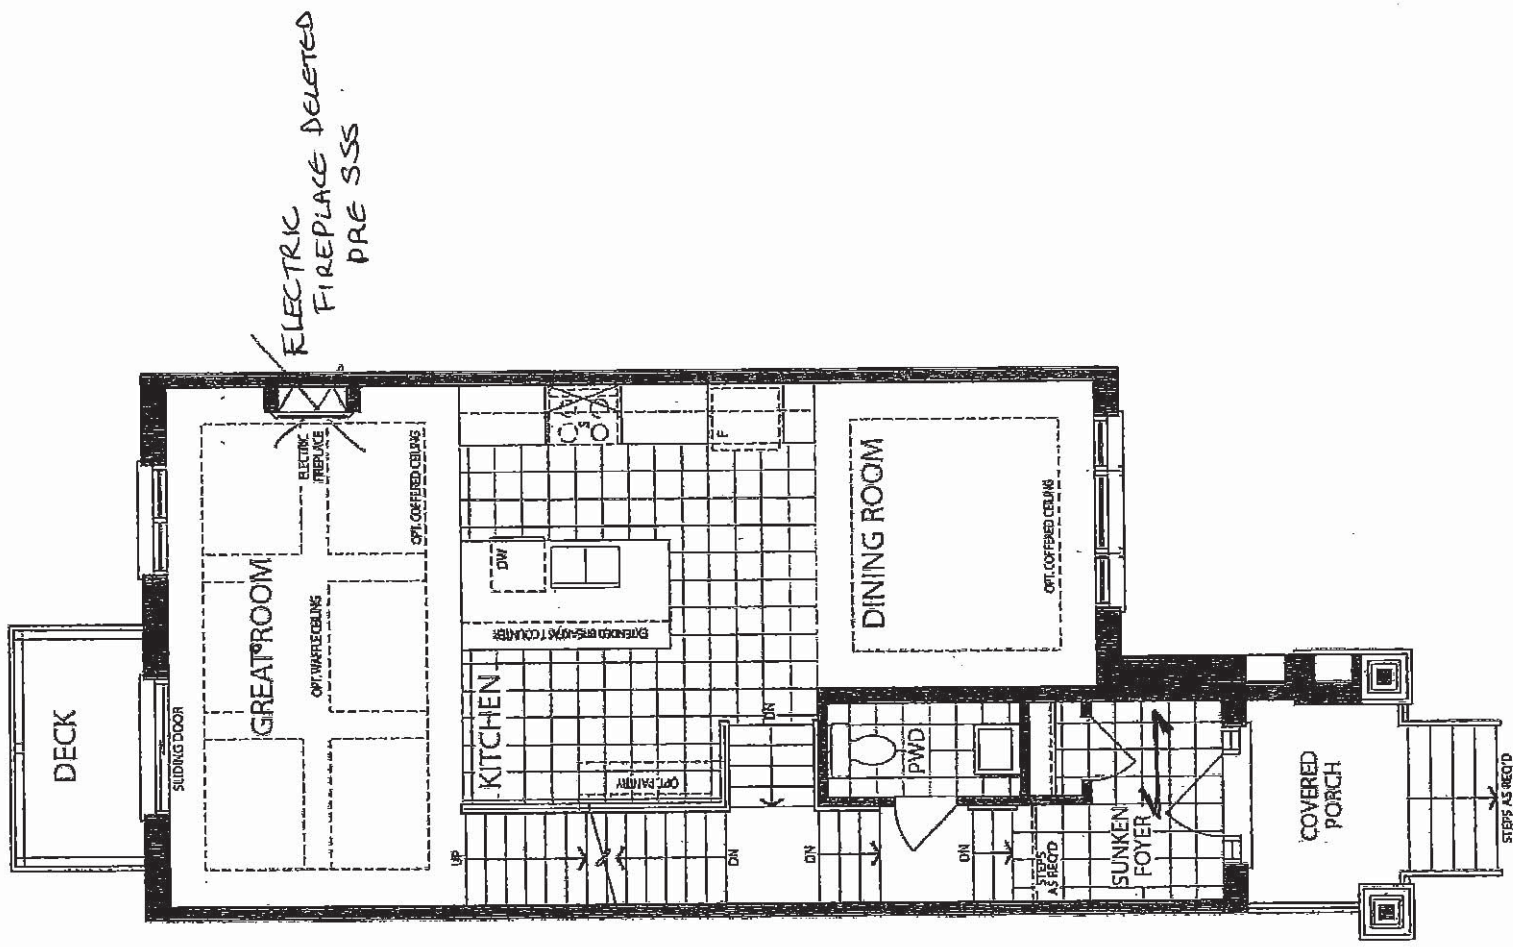

MAIN LEVEL
ELEVATION A

ST JA

C2- COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON


18^{of} 39

The Arlington

20-1841 ELEV. A

ELEVATION A & B: 1,841 SQ FT

Lot 52-2 Lot 52-3 Sketch #8

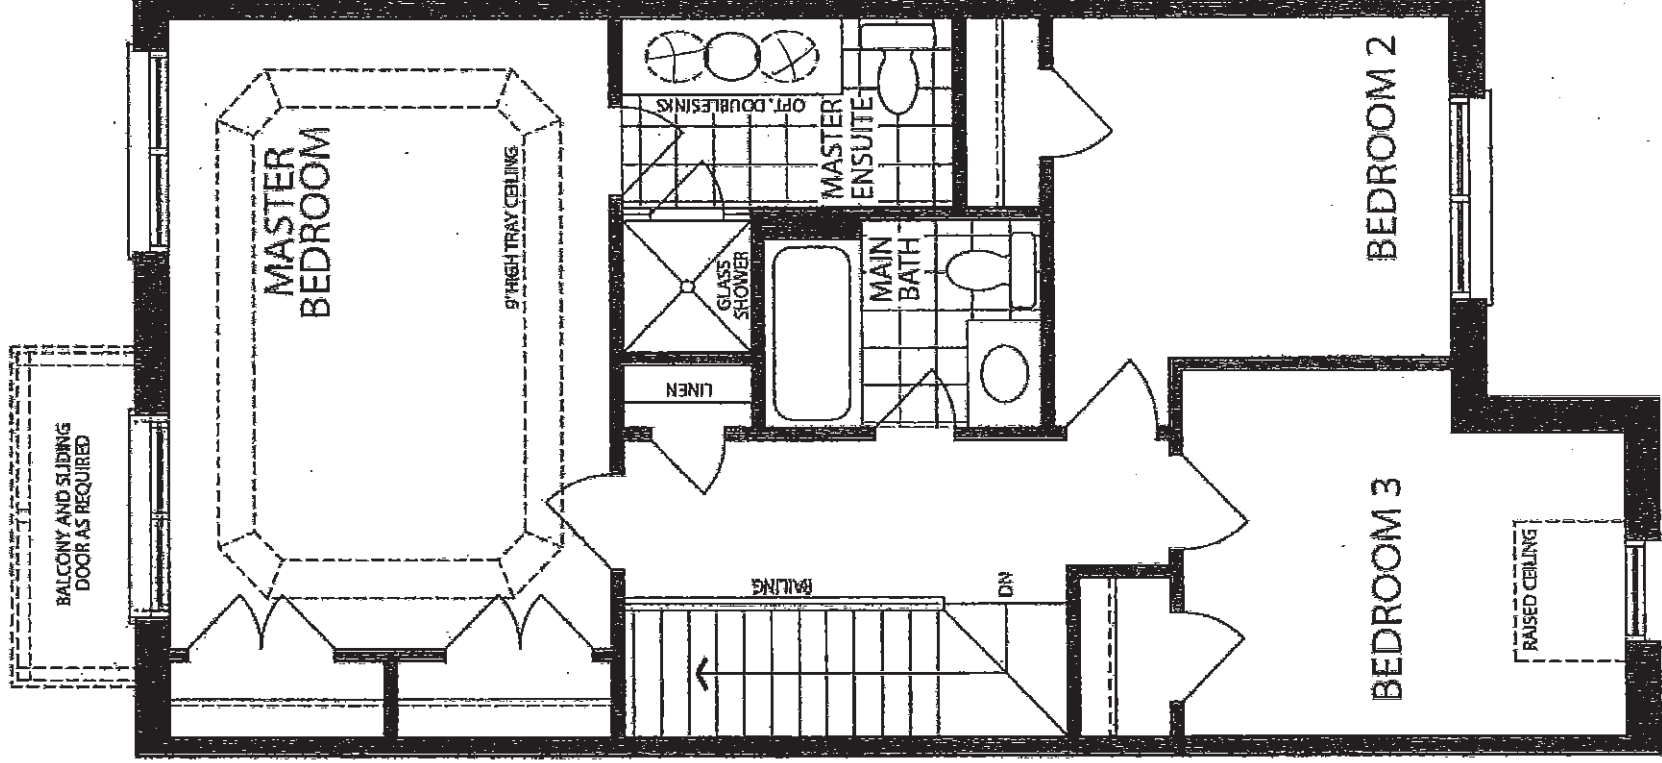

UPPER LEVEL
ELEVATION A



SI TA

C-2 COUNTRY LANE
LOT 52-2
20-1841 ELEV. A
THE ARLINGTON

19 of 39

Stainless Steel | 122.0264.711

FAMILY: Sinks | SERIES : Reginox | MODEL : NDC1932RUJ9 | FINISH : Stainless Steel | INSTALLATION TYPE : Undermount

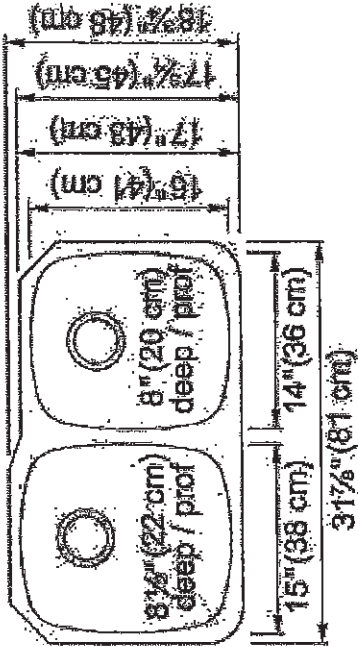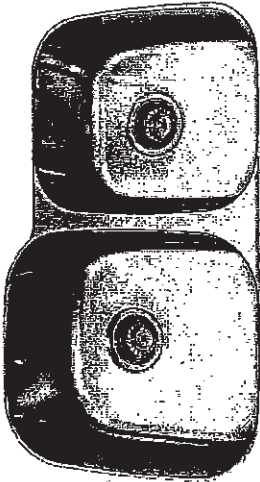

TECHNICAL DATA	
Width overall	18 3/4"
Length overall	37 13/16"
Width of large bowl	17"
Length of large bowl	15"
Depth of large bowl	8 1/2"
Width of small bowl	16"
Length of small bowl	14"
Depth of small bowl	8"
Cabinet Size	36"
Number of Bowls	2
Waste Outlet Diameter	3 1/2"
Cut-Out Template	Yes
Faucet Hole	None
Type of Material	18 Gauge Stainless Steel
Surface Finish	SILK


C2-COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

20 of 39

STANDARD KITCHEN FAUCET

Align

Modern

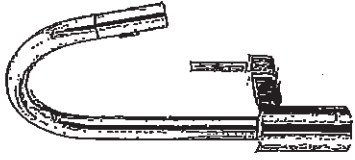

Single Handle Pull-Down Kitchen
Faucet*

Model 7565+

ST TA

C2- COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

21 of 39

*American
Standard*

**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (illustrated)
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a **drop-in** sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only


Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2 - 2008/CSA B45.1-08

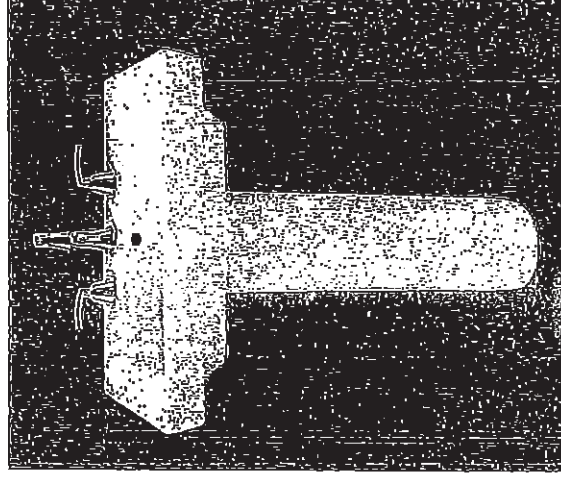

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:

* See faucet section for additional models available

ST JA

37 2

BOXE
UNDERCOUNTER SINK
VITREOUS CHINA

WASTE BATHROOM

- 0315 000 Unglazed Rim
508 x 406mm (20" x 16")

Meets or exceeds the following Specifications:

- ☐ Colour: ☐ White
- ☐ Faucet*:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

[illegible]

✓ UNDERCOUNTER MOUNTING KIT SUPPLIED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2010 AS Canada, ULC

08/10



COLONY COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

- ☒ 0346 803
Faucet holes on 203mm (8") centres
- ☐ 0346 403 (Illustrated)
Faucet holes on 102mm (4") centres
- ☐ 0346 001
Centre hole only

Nominal Dimensions:
521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:
422mm (16-5/8") wide, 279mm (11") front to
back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS –
Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.



To Be Specified	
☐ Colour:	☒ White ☐ Bone ☐ Silver Gray
	☐ Linen
☐ Faucet*:	
☐ Faucet Finish:	
☐ Supplies & Stops:	
☐ Trap 1-1/4" (32 mm):	

* See faucet section for additional models available

BAS-198

© 2000 American Standard Inc.

01/07

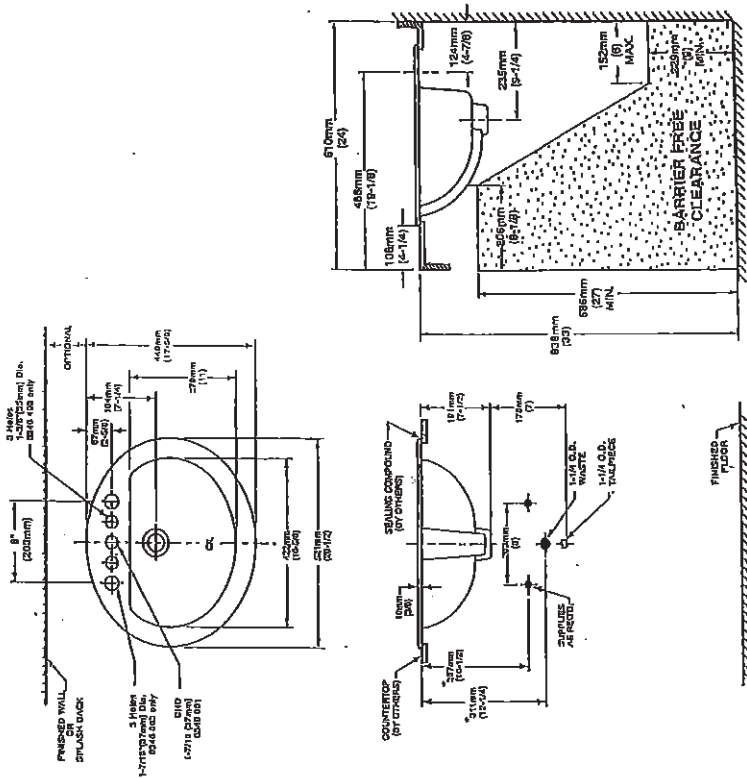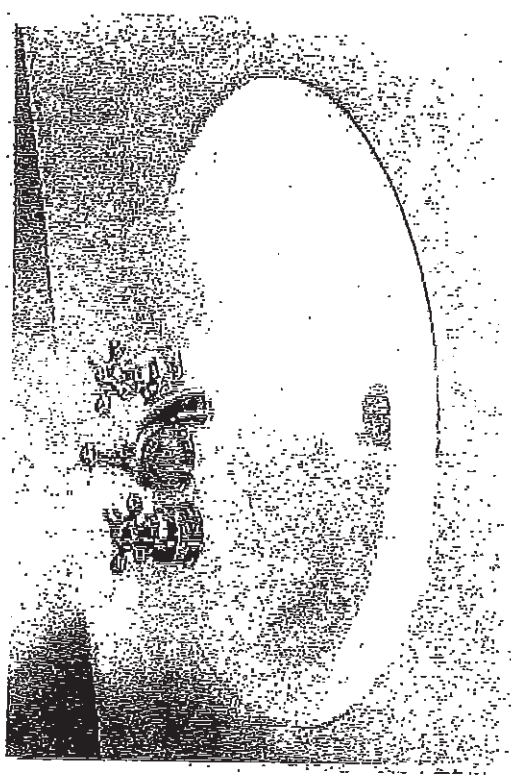

NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use
of superseded or voided pages.


57 7A

C2 COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

24 of 39


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP†
(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

C2- COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

25 of 39

CORE




WALL

ZEPHYR
ZEPHYRONLINE.COM


ACT[™] Model ZOM-E30BBS

Min. - Max. CFM	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT [™] AIRFLOW CONTROL TECHNOLOGY [™] **	
		200 - 390	200 - 290
Min. - Max. Sones	1 - 6	1 - 4	1 - 3


*AIRFLOW CONTROL TECHNOLOGY[™] (ACT[™])
is an exclusive feature built into specific Zephyr hoods which can
limit the maximum blower CFM to meet local code requirements.

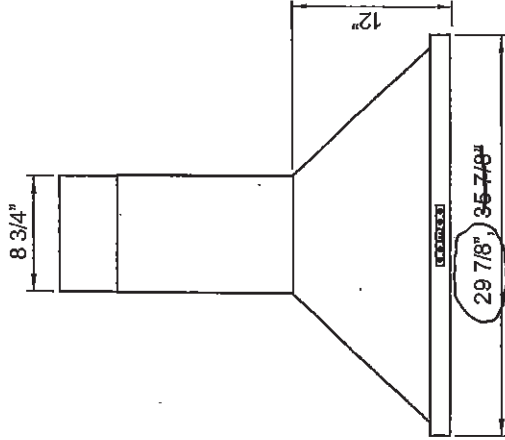


FRONT

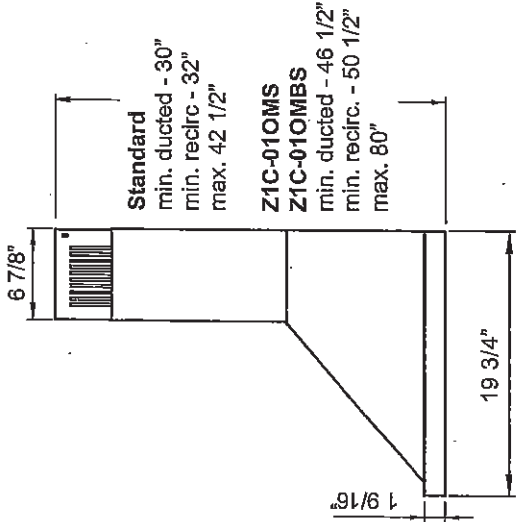

SIDE

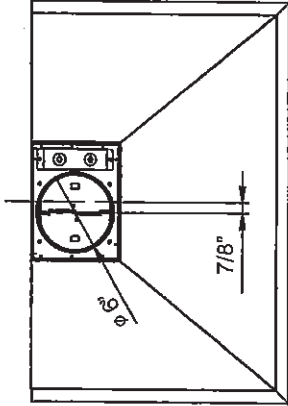

TOP

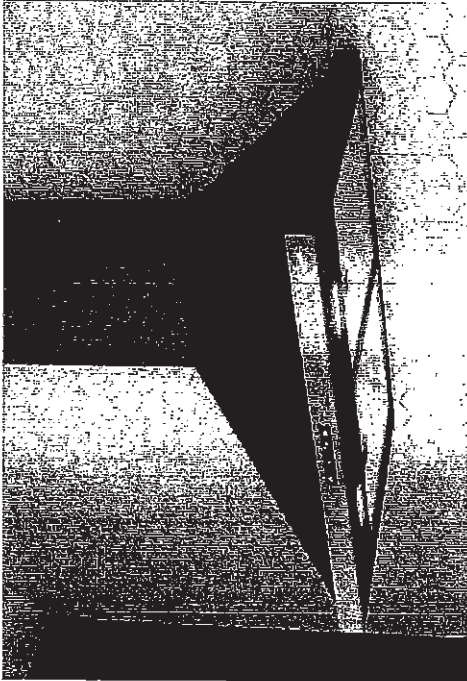

Black Stainless Steel

C2-COUNTRY LANE
LOT 52-2
20-1841 ELEVA
THE ARLINGTON

26 of 39

CORE



WALL

ZEPHYR
ZEPHYRONLINE.COM

MODEL

Black Stainless Steel

ZOM-E30BBS

Size
Blower CFM (Min. - Max.)
Sones (Min. - Max.)
ACT 390 CFM (Min. - Max.)
ACT 390 Sones (Min. - Max.)
ACT 290 CFM (Min. - Max.)
ACT 290 Sones (Min. - Max.)

200 - 600
1 - 6
200 - 390
1 - 4
200 - 290
1 - 3

FEATURES
ACT™ Technology
Controls
Speed Levels
Auto Delay-Off
Lighting
Dual-Level Lighting
Filters
Recirculating Option
Duct Cover Extension Option

Yes
Capacitive Touch
4*
Yes
LumiLight LED, 6W x2
Yes
Aluminum Mesh x2
Yes
Yes, Up to 12' Ceiling

DUCT SPECIFICATIONS

Vertical Internal Blower
Horizontal Internal Blower
AC POWER

6" Round
NA
120V, 60Hz at Max. 4A

OPTIONAL ACCESSORIES

Recirculating Kit
Duct Cover Extension
Hybrid Baffle Filter Kit
Make-Up Air Kit

ZRC-010M
Z1C-010MS (ss)
Z1C-010MBS (black ss)
ZOF-B002
MUA006A

MOUNTING HEIGHT RANGE** 24" - 34"

WARRANTY 3 years parts, 1 year labor

CEILING HEIGHT	8' 8.5' 9' 9.5' 10' 10.5' 11' 12'										
	Ducted Mounting Height**										
STANDARD DUCT COVER	26" - 30"										
	26" - 28"										
DUCT COVER EXTENSION	NA										
	NA										

*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.
**Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

ACT™

AIRFLOW CONTROL TECHNOLOGY™ (ACT™)
is an exclusive feature built into specific Zephyr hoods which can
limit the maximum blower CFM to meet local code requirements.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.680.VENT
FEB21.0101



C2-COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

27 of 39

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT641SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate icemaker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

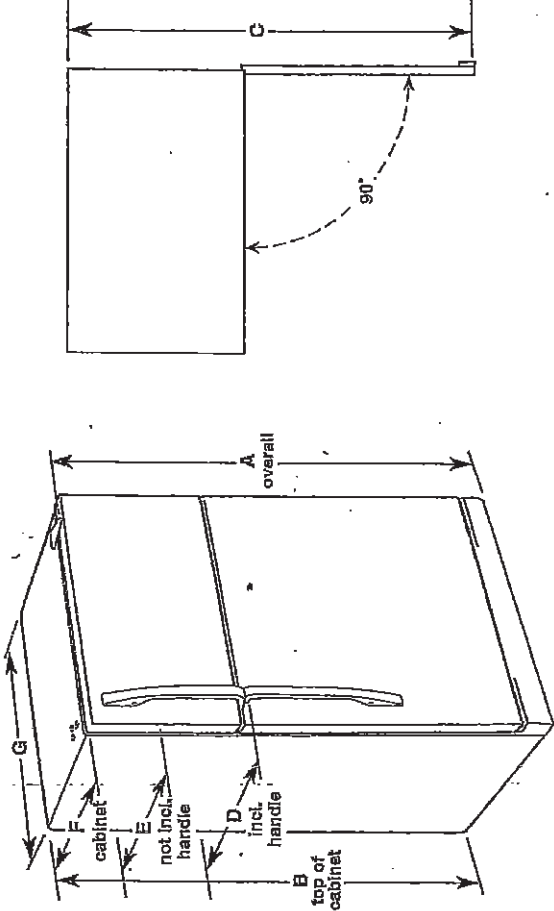

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	65 1/2" (168.3 cm)	65 1/2" (168.4 cm)	62 1/4" (158.1 cm)	32 1/4" (83.5 cm)	30 5/8" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT641SZD	21 1/3 cu. ft.	Yes	65 1/2" (168.3 cm)	65 1/2" (168.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/2" (82.3 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

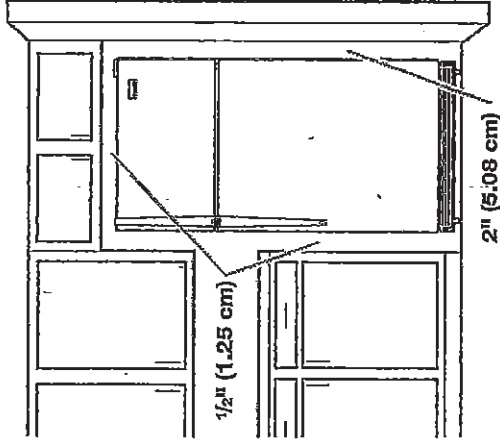

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.





Ref. W10674106
10/29/14

SI JA

C2-COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

28^{of} 39

Refrigerator Door Swing Verification

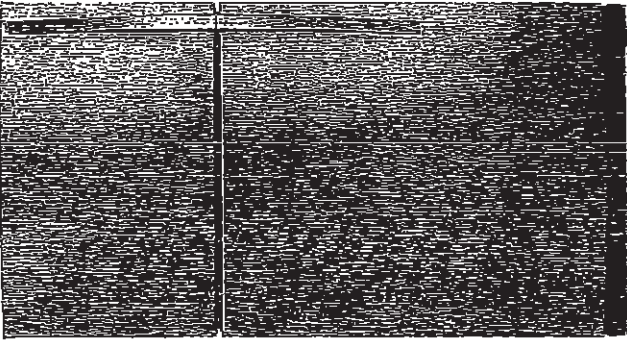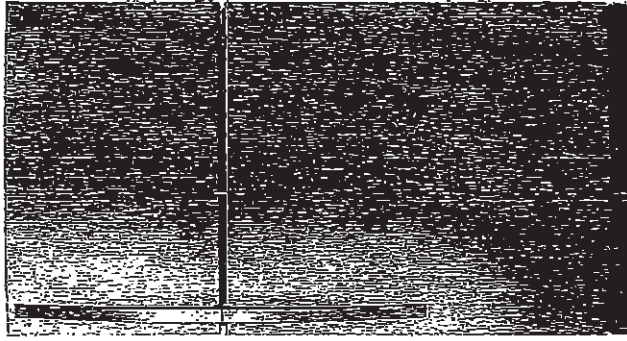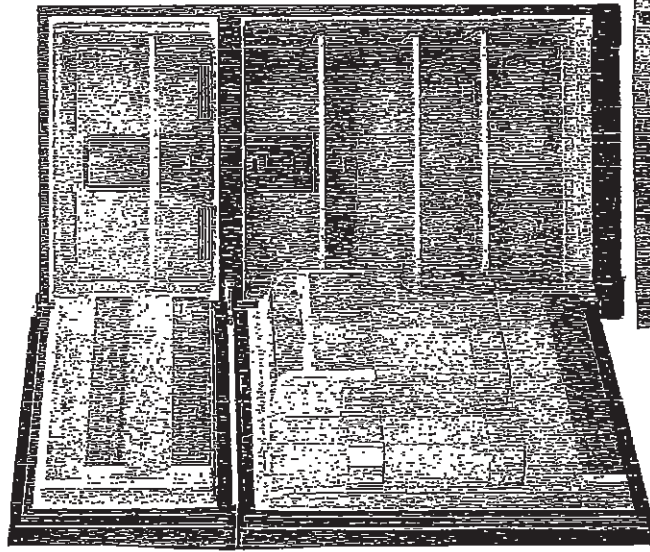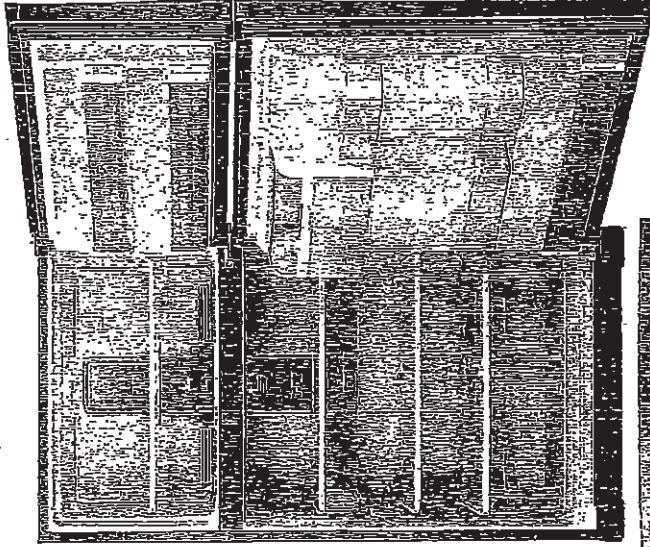

When facing the refrigerator

☐

RIGHT HAND
DOOR OPENING

- Hinges on right
- Handle on left

INITIAL

☒

LEFT HAND
DOOR OPENING

- Hinges on left
- Handle on right

INITIAL

ST JA

Please check and INITIAL your door swing selection.

C2- COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

29th 39



WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

5.3 cu. ft. Whirlpool® electric range with Frozen
Bake™ technology

YWFE515S0JS

Whirlpool®

Home > Kitchen Appliances > Cooking Appliances > Ranges > Single Oven Ranges > YWFE515S0JS

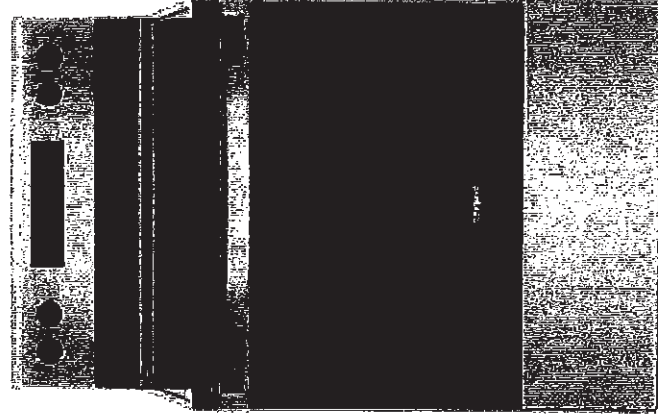


SI JA

C2-COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

30 or 39

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515SJS

Product Dimensions

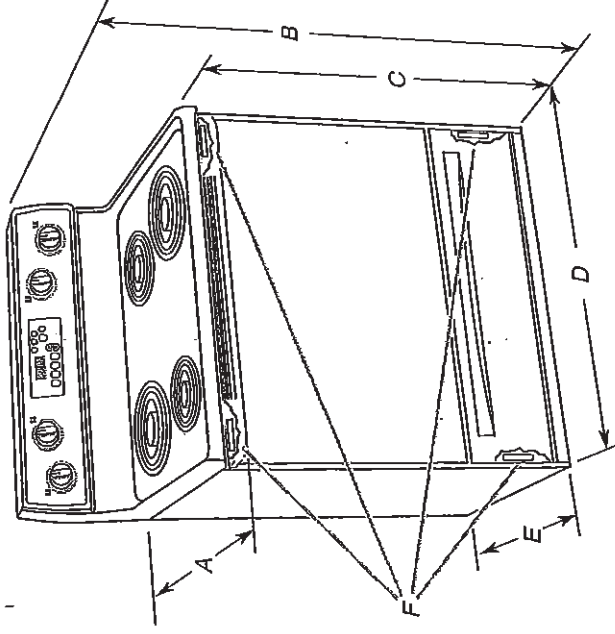

- A. 27³/₄" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₈" (75.9 cm) width
- E. 25⁵/₁₆" (64.3 cm) depth - back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

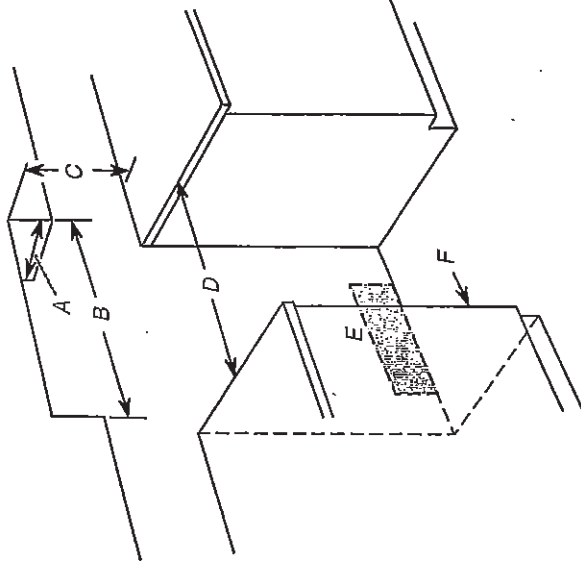

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

SI JA

JAN 28/20

C2-COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

31 of 39



Whirlpool®
DISHWASHER WITH ENERGY STAR® qualification





WDF310PAAS
Black-on-Stainless

OTHER AVAILABLE COLORS

 Black
Model: WDF310PAAB

 Black-on-Stainless
Model: WDF310PAAT

 White
Model: WDF310PAAW

 Universal Silver
Model: WDF310PAAD

DIMENSIONS	
Maximum Height	34 1/2 Inches
Minimum Height	33 1/2 Inches
Height	34 1/2 Inches
Depth	24 1/2 Inches
Width	23 7/8 Inches

Dimensions shown are for planning purposes only. For complete information, see installation instructions packaged with product.

ELECTRICAL	
15 Amps Amps, 60 Hz, 120 V, 15,	

Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.

KEY FEATURES

ENERGY STAR® Qualified
No One Has Fewer Repairs 17 Years In A Row
Resource - Efficient Wash System
CEE Tier 1 qualified
Tall Tub Design
White Plastic Interior
Quiet Partner(TM) / Sound Package
Auto Soil Sensor
Electronic Controls
3 Automatic Cycles
1-Hour Wash Cycle
Heavy Wash Cycle
Normal Cycle
4 Options
High Temperature Wash System
Heated Dry Option
4 Hour Delay Wash Option
4-Tier SheerClean Direct Feed Wash System
Control Lock
Vinyl Racks
In-Rack Silverware Basket

SI JA

C2- COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

32 of 39

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDFI10PAB WDE30LPLA
WDFI11PAB WDF320PAD
WDF120PAF WDF370PAY
WDF121PAF WDF520PAD
WDF310PAA WDF530PAY
WDF310PCA WDF530PLY

WDF530PSY
WDF540PAD
WDF730PAY
WDFI710PAY
WDFI720PAD
WDFI770PAY

Electrical Requirements: 120-volt, 60-Hz, AG only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.


Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 1/4" N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

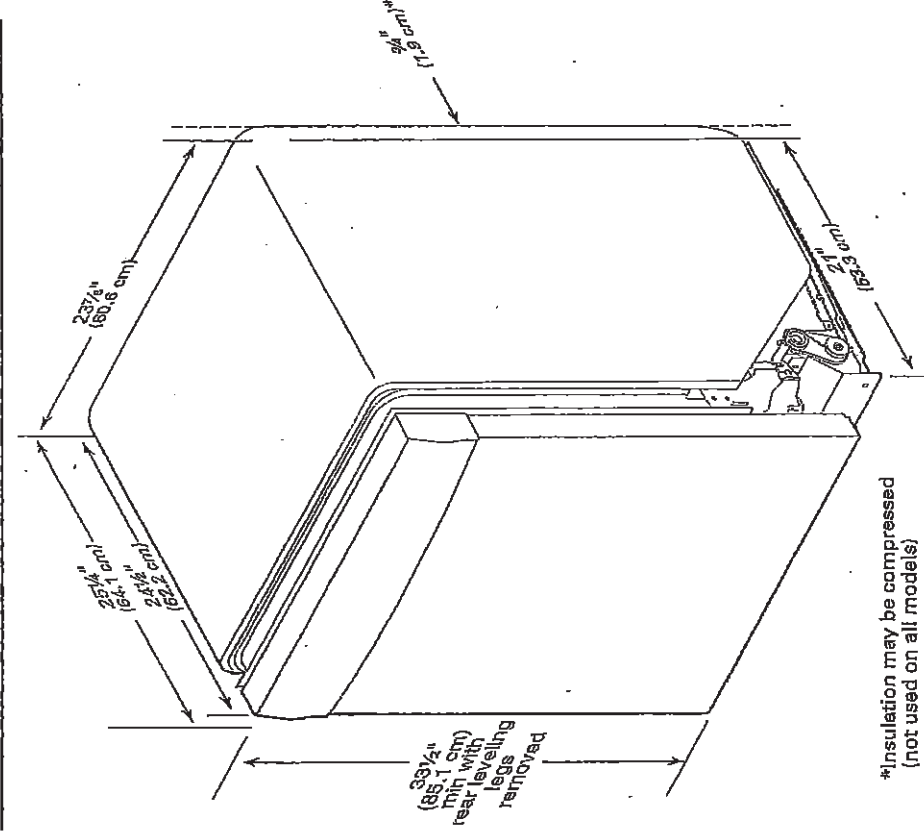

*Insulation may be compressed (not used on all models)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

SI JA

C2- COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

33 of 39


CABINET CUTOUT DIMENSIONS

WIDE 320 P60

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

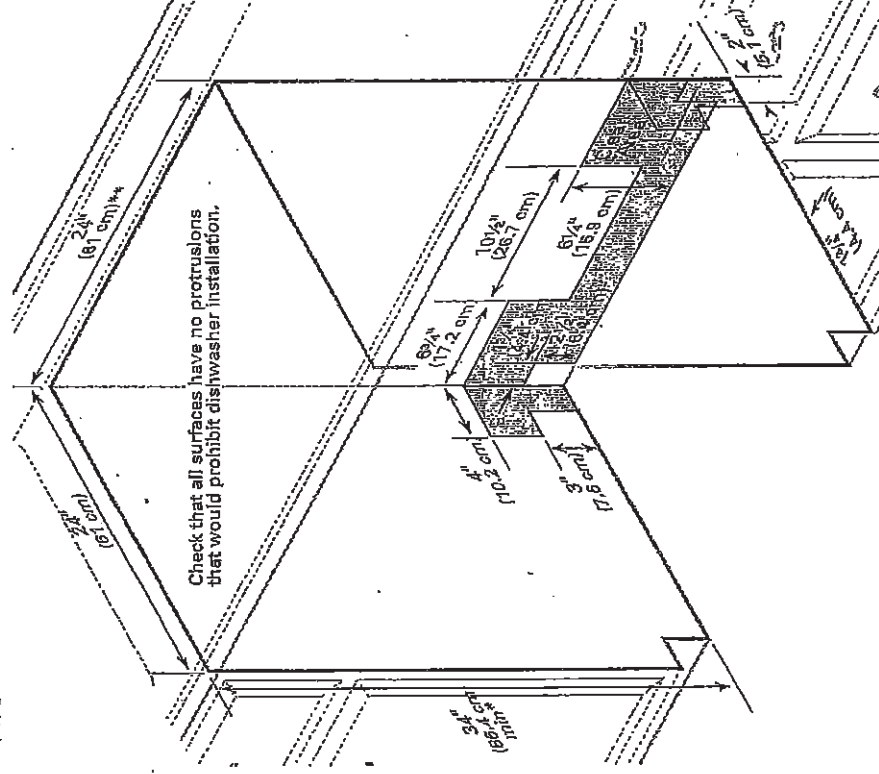

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


SI JA

C2-COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

34 of 39

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryer | Washers | Front Load Washers | WFW5620HW

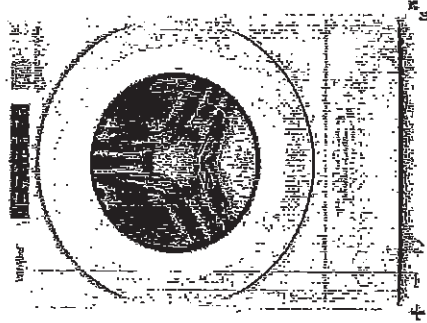

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool 5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	88.11 cm, 34-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

SI JA

35 of 39

C2-COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20-100 psi (137.9-689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).


IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

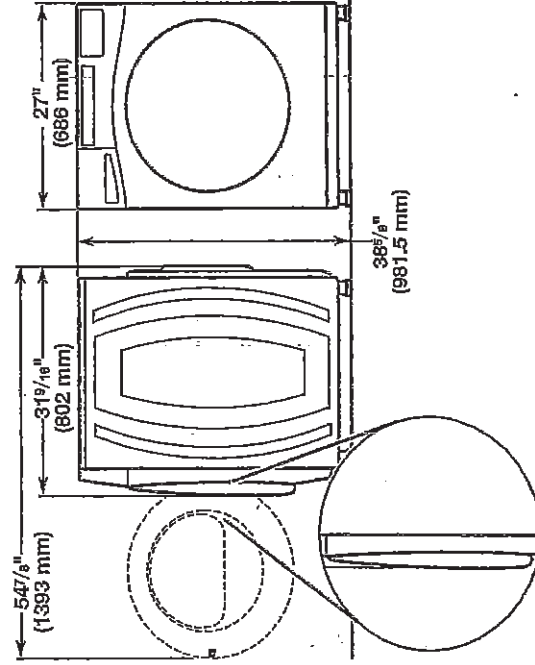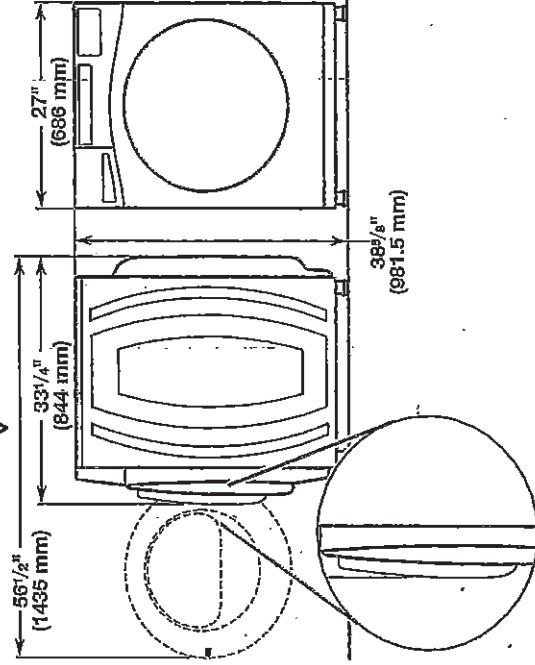

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.


Maytag Models

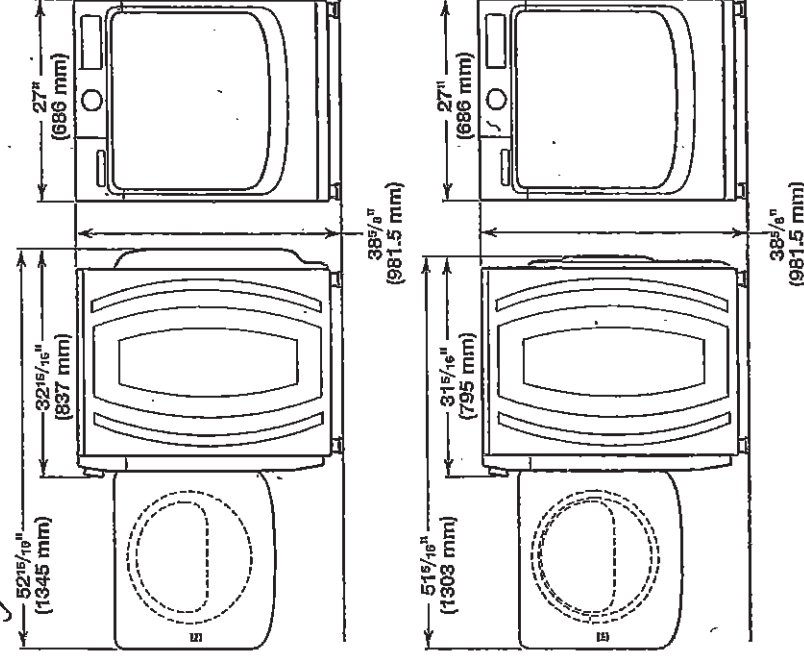

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

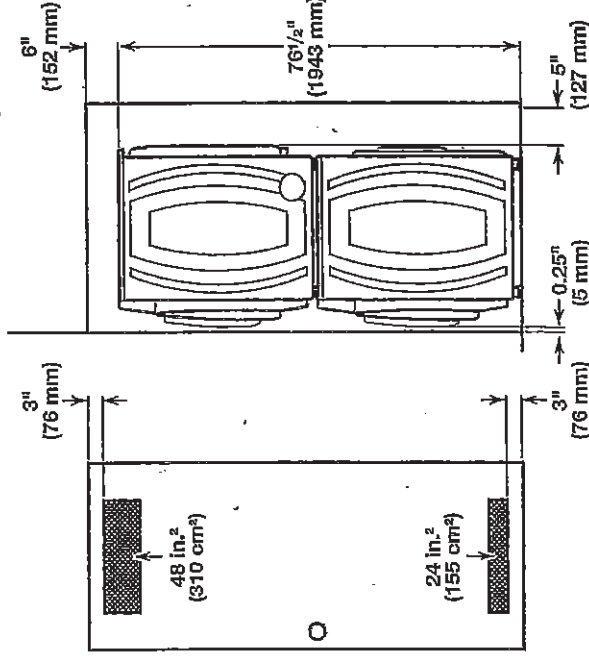


SI JA


C2- COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation: X

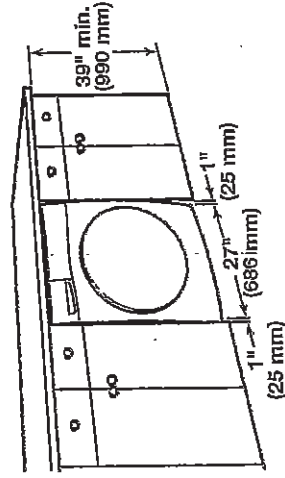

Recessed area or closet installation: X

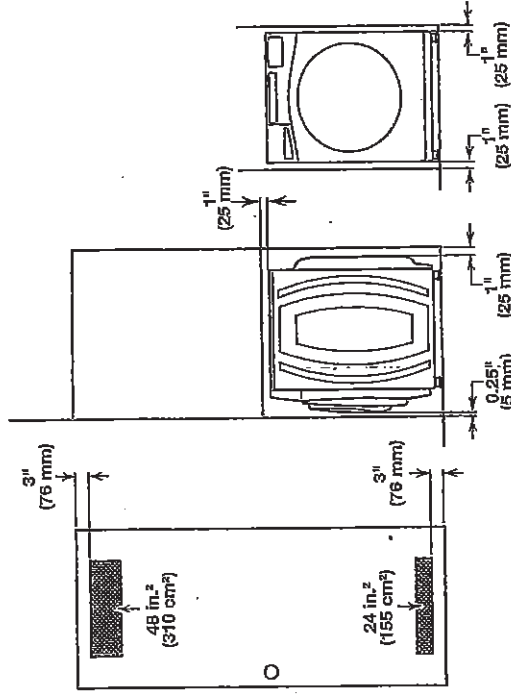

Custom cabinet installation: X

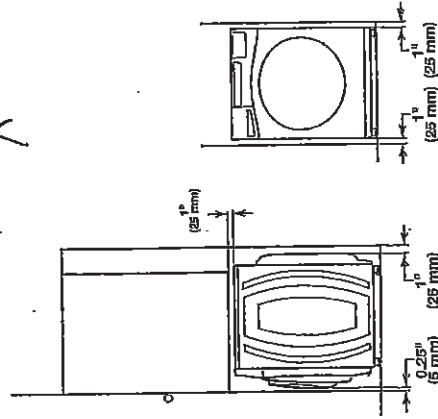


36 of 39

DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

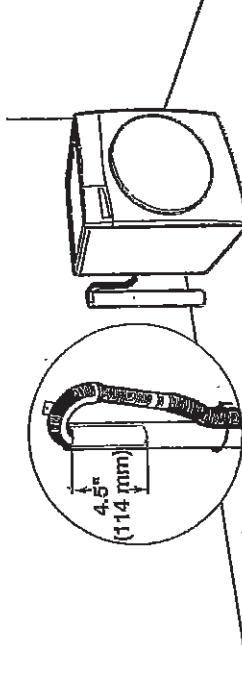


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

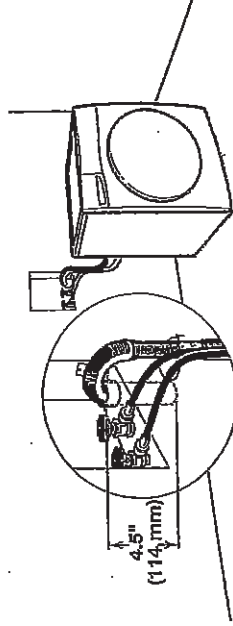

See requirements for floor standpipe drain system.

Laundry tub drain system

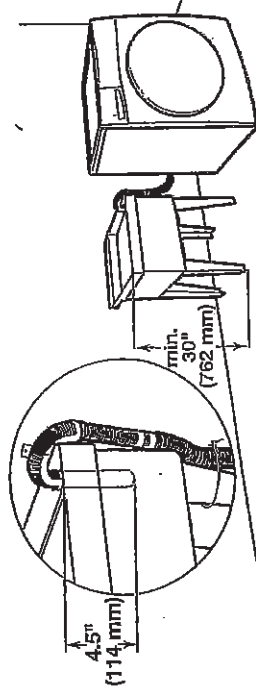

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


SI JA

C2-COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

37 of 39

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Whirlpool and Dryer | Dyers | Electric Dryer | YWED5620HW

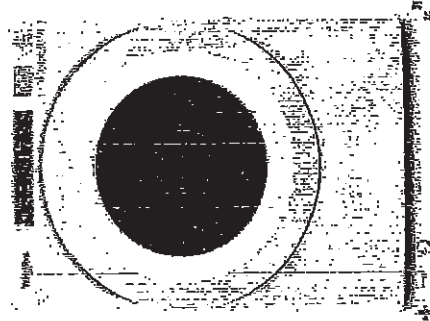

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool® 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degrees	138.43 cm, 54-1/2 in
Height	98.42 cm, 39-3/4 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60
----	----

Power Cord Included

Yes


SI JA

C2-COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

38 of 39

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

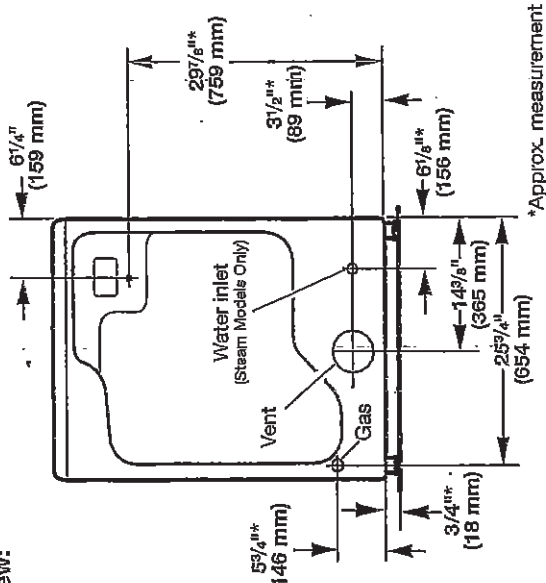

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

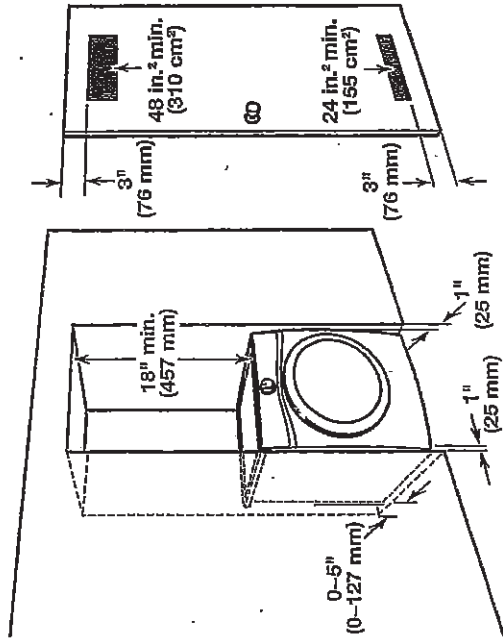

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

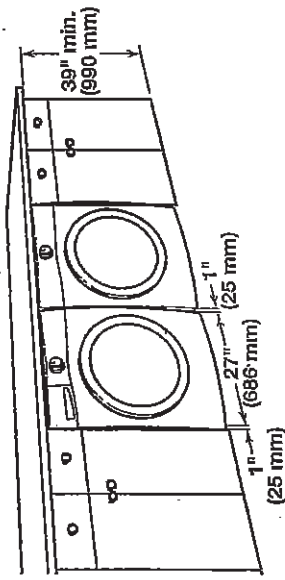

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

SI JA

C2-COUNTRY LANE
LOT 52-2
20-1841 ELEV A
THE ARLINGTON

39 of 39

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.

- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


⚠ WARNING

Explosion Hazard
Keep flammable materials and vapors, such as gasoline, away from dryer.
Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
Failure to do so can result in death, explosion, or fire.


You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
 - A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
 - If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
 - Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
 - Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
 - Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
 - For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
 - The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.
- IMPORTANT:** Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.

DRYER DIMENSIONS
Front view:

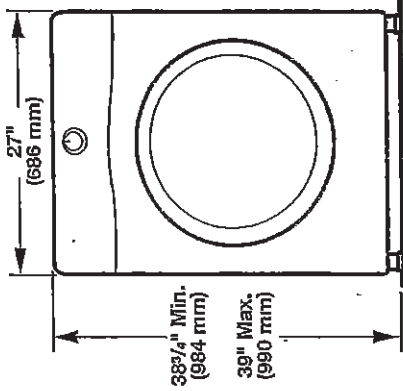


Side view:
Whirlpool Models

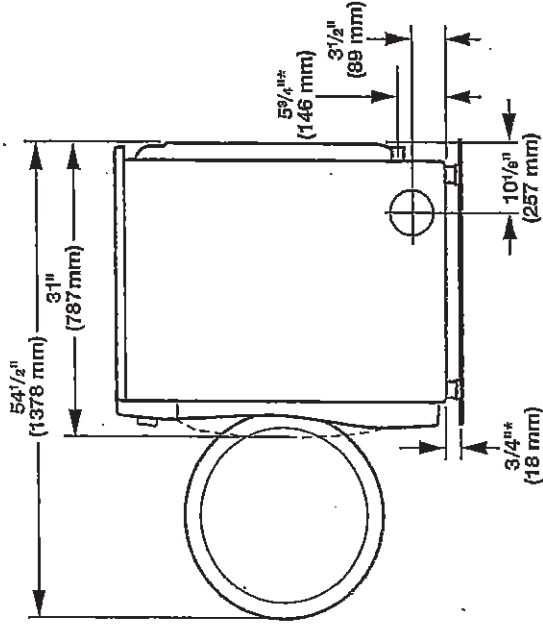

*Approx. measurement

Maytag Models

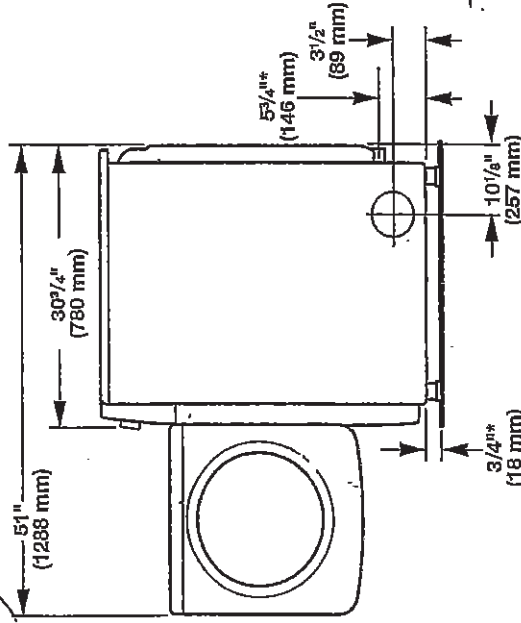

*Approx. measurement

SI JA