



29-Jul-21

PRE-Sales Selection Sheet
CHECKLIST

1 of 36^{C2}

LOT	055-8	20-2505-CR ELEV B THE WORTHINGTON
PURCHASERS:	DONALD VERO	CONTACT NO: 647-706-9241
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	

3RD FLOOR BALCONY

WAFFLE CEILING GREAT ROOM
COFFERED CEILING DINING ROOM

- ☒ FINISHED BASEMENT
- ☐ COLD CELLAR

UPGRADED / MODIFIED ELEVATION

- ☐ CORNER UPGRADE
 - ☐ SIDE UPGRADE
 - ☐ REAR UPGRADE
- ☐ WALK OUT DECK
☐ WALK OUT BASEMENT

CEILING UPGRADE - SMOOTH

- ☒ MAIN FLOOR
 - ☐ SECOND FLOOR
- ☐ BASEMENT

ADDITIONAL ROUGH-INS

- ☒ 200 AMP SERVICE
- ☐ WET BAR ROUGH IN

- ☐ HUMIDIFIER
- ☒ AIRCON

GAS ROUGH-IN

- ☒ STOVE
- ☐ BBQ

- ☐ DRYER
- ☐ ADDITIONAL FIREPLACE

HOODFAN VENTING

- ☒ 6" ROUND DUCT
- ☐ 7" ROUND DUCT

FULL BASEMENT STAIRS:

PAINT GRADE

UPPER BASEMENT STAIRS:

N/A

LOWER BASEMENT STAIRS:

N/A

STAIRS TO LOWER LEVEL:

ALL OAK

STAIRS TO UPPER LEVEL:

N/A

MAIN STAIRS:

ALL OAK

MEDIA STAIRS (if applicable):

N/A

Date	July 28/21	IRIT Salem
Purchaser	Signature	Décor Consultant
	or file	
Date	27-29-2021	mykosen

Date Approved _____ HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



15-Jul-21

SCHEDULE "E"

2 of 36

Addendum forms part of, and is to be read with the attached offer to Purchase for:

LOT	055-8	20-2505-CR ELEV B THE WORTHINGTON
PURCHASERS:	DONALD VERO	CONTACT NO: 647-706-9241
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	

The following items are included in the Agreement of Purchase and Sales, and are from Vendors standard samples:

Appliances			
2	- SCHEDULE E- FIVE APPLIANCES: SS FRIDGE, STOVE , DISHWASHER; WHITE FRONT LOADER WASHER/DRYER- TOWNHOMES	Qty:	1
X_Credits			
38	- SCHEDULE E- TEN THOUSAND DOLLARS (\$10,000) AT DÉCOR (NO CAHS VALUE)- TOWNHOMES	Qty:	1

Date	July 28/21	Signature on	July 28/21	IRIT SALEM
Date		Purchaser file		
Date		Purchaser		
		C APPROVER -		
				m. Rosen



Interior Finishing Selection Sheet

29-Jul-21

LOT 055-8

20-2505-CR ELEV B THE WORTHINGTON

PURCHASERS: DONALD VERO

CONTACT NO: 647-706-9241

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Appliances

6-9117 Kitchen HoodFan

☒ CYCLONE 30" STAINLESS CHIMNEY/CANOPY HOODFAN
STAINLESS STEEL SCB51930 UPG 30" PAGE 22

Cabinetry

1-6469 Kitchen Cabinet Colour/Style

☒ MANCHESTER WINTER WHITE Classic II PAINT

3-2098 Kitchen Cabinet Hardware

☐ HARDWARE 12801 STD

25-6265 Main Bathroom Cabinet Colour/Style

☐ MANCHESTER SHALE GREY CL Viking III MAPLE

29-2086 Main Bathroom Cabinet Hardware

☐ HARDWARE 9677 STD

28-8796 Main Bathroom Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

20-9157 Master Ensuite Cabinet Colour/Style

☐ SIMCOE MOONLIGHT Viking III STD 3DL

22-2086 Master Ensuite Cabinet Hardware

☐ HARDWARE 9677 STD

21-8796 Master Ensuite Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

Carpet

37-9249 Bedroom 2 Flooring

☐ Dynasty Tex 40 oz Poly PAMPA BEIGE DY 16320 STD

38-9249 Bedroom 3 Flooring

☐ Dynasty Tex 40 oz Poly PAMPA BEIGE DY 16320 STD

14-9249 Family Room Flooring

☐ Dynasty Tex 40 oz Poly PAMPA BEIGE DY 16320 STD

367-9249 Lower Level Hall Flooring

☐ Dynasty Tex 40 oz Poly PAMPA BEIGE DY 16320 STD

36-9249 Master Bedroom Flooring

☐ Dynasty Tex 40 oz Poly PAMPA BEIGE DY 16320 STD

52-1079 Throughout Underpad

☐ Underpad 500 Series STD

Ceramics

16-9057 Foyer Flooring

☒ Eterna Series Imperial Grey OV.ET.IGY.1224PL UPG 5 12" x
24" Polished TO BE INSTALLED FROM FRONT TO BACK SKETCH #
3 PAGE 13

17-7705 Foyer Grout

☒ Upgrade Grout (01) Alabaster U/G

348-9257 Laundry Mud Room Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

349-2225 Laundry Mud Room Grout

☐ Grout (27) Silver STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date July 28/21 Signature on file Purchaser

Date July 28/21 - APPROVED -

Décor Consultant Myra Rosen

1 RIT SALEM

Date Purchaser

Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

LOT 055-8

20-2505-CR ELEV B THE WORTHINGTON

PURCHASERS: DONALD VERO

CONTACT NO: 647-706-9241

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Ceramics

UPG

30-8913 Main Bathroom Flooring

☒ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24 TO BE INSTALLED FRONT TO BACK SKETCH # 4 PAGE 14

31-7705 Main Bathroom Grout

☒ Upgrade Grout (01) Alabaster U/G

112-5411 Main Bathroom Tub Wall Tile

☐ Splendour White QT.SP.WHT.0810 Std 8" x 10" TO BE INSTALLED VERTICALLY

113-2226 Main Bathroom Tub Wall Tile Grout

☐ Grout (00) White STD

23-8838 Master Ensuite Floor Tile

☒ Eterna Carrara White Polished OV.ET.WHT.1224.PL UPG 5 12 x 24 TO BE INSTALLED FRONT TO BACK SKETCH # 4 PAGE 14

24-7705 Master Ensuite Floor Tile Grout

☒ Upgrade Grout (01) Alabaster U/G

73-9089 Master Ensuite Shower Floor Tile

☒ Eterna Series Calacatta Grey OV.ET.CTG.02.HEX.PL UPG 7 2" HEX Polished

74-2226 Master Ensuite Shower Floor Tile Grout

☐ Grout (00) White STD

147-8923 Master Ensuite Shower Jamb(s) and Sill(s)

☐ Shower Jamb / Sill Thassos White STD

104-5411 Master Ensuite Shower Wall Tile

☐ Splendour White QT.SP.WHT.0810 Std 8" x 10" TO BE INSTALLED VERTICALLY

105-2226 Master Ensuite Shower Wall Tile Grout

☐ Grout (00) White STD

76-2226 Optional Bedroom 5 Flooring

☐ Grout (00) White STD

32-8913 Powder Room Flooring

☒ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24 TO BE INSTALLED FRONT TO BACK SKETCH # 3 PAGE 13

33-7705 Powder Room Grout

☒ Upgrade Grout (01) Alabaster U/G

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-9114 Great Room Fireplace Mantle

☐ Paint Grade Mantel- Cabinet (Per Plan) WHITE NF 15 STD PAGE 15

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

July 28/21

Signature

July 28/21

1RIT Salem

Date

Purchaser

on file

APPROVED
Date

Décor Consultant

myLoen

Date

Purchaser

Date Approved

HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



29-Jul-21

Interior Finishing Selection Sheet

LOT 055-8

20-2505-CR ELEV B THE WORTHINGTON

PURCHASERS: DONALD VERO

CONTACT NO: 647-706-9241

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Granite

2-9121 Kitchen Countertop

Hardwood

99-9058 Dining Room Flooring

11-9058 Great Room Flooring

338-9058 Kitchen Flooring

98-9058 Main Hall Flooring

368-9058 Study Niche Flooring

35-9058 Upper Hall Flooring

Interior Railings

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

43-8148 Stairs to Upper Level Handrail/Pickets/Posts Type

Interior Stairs

116-1713 Basement Stairs Type

45-1712 Stairs to Lower Level Type

39-1712 Stairs to Upper Level Type

Interior Trim

91-9374 Throughout Trim Size

Painting

46-7761 Stairs to Lower Level Colour

UPG

☒ MSI Quartz ICED WHITE Group 1 UPG 3/4" with Mitered Edge

☐ Red Oak Pearl-Vintage Engineered-SUSSEX-3/4 inch x 3 1/4 inch DOVER Red Oak PEARL 3/4" x 3 1/4"

☐ Red Oak Pearl-Vintage Engineered-SUSSEX-3/4 inch x 3 1/4 inch DOVER Red Oak PEARL 3/4" x 3 1/4"

☒ Red Oak Pearl-Vintage Engineered-SUSSEX-3/4 inch x 3 1/4 inch DOVER Red Oak PEARL 3/4" x 3 1/4"

☐ Red Oak Pearl-Vintage Engineered-SUSSEX-3/4 inch x 3 1/4 inch DOVER Red Oak PEARL 3/4" x 3 1/4"

☐ Red Oak Pearl-Vintage Engineered-SUSSEX-3/4 inch x 3 1/4 inch DOVER Red Oak PEARL 3/4" x 3 1/4"

☐ Red Oak Pearl-Vintage Engineered-SUSSEX-3/4 inch x 3 1/4 inch DOVER Red Oak PEARL 3/4" x 3 1/4"

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

☐ Paint Grade Stairs STD

☐ Oak Stairs UPG_1

☐ Oak Stairs UPG_1

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backband Casings STD-Towns

☐ Stain handrail, stringers, treads,risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT DOVER Red Oak SHADE WILL VARY

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

July 28/21 Signature on July 28/21 IRIT Salem
Date Purchaser Date APPROVED - Décor Consultant
file myLoren

Date Purchaser Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



29-Jul-21

Interior Finishing Selection Sheet

LOT 055-8

20-2505-CR ELEV B THE WORTHINGTON

PURCHASERS: DONALD VERO

CONTACT NO: 647-706-9241

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Painting

40-7761 Stairs to Upper Level Colour

240-1716 Throughout Trim - Paint Colour

51-1717 Throughout Walls - Paint Colour

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

149-1737 Master Ensuite Plumbing Fixture (colour)

34-1737 Powder Room Plumbing Fixture (Colour)

UPG

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT DOVER Red Oak SHADE WILL VARY

☐ Trim WHITE STD

☐ Wall WARM GREY 22 STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date	July 28/21	Signature	July 28/21	IRT SALEM
		Purchaser	Date	Décor Consultant
		on file		my Rosen

Date		Purchaser	Date Approved	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4
------	--	-----------	---------------	--



28-Jul-21

Sales Selection Sheet

For 36

LOT	055-8	20-2505-CR ELEV B THE WORTHINGTON	
PURCHASERS: DONALD VERO		CONTACT NO: 647-706-9241	
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4		HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances

2171	Cyclone 30" Wall Mount Chimney Hood SS	KITCHEN	Qty: 1
	SCB51930	PAGE 22	

Cabinetry

1569	Optional Upgrade	Kitchen	Qty: 1
	CLASSIC II		
1368	Optional Extras	KITCHEN	Qty: 1
	05H- 66cm deep fridge enclosure (counter depth)Includes [1] 66cm deep cabinet and [2] 66cm deep gables (note: this is not a zero clearance enclosure. Standard heights and widths will be used)	SKETCH # 3 PAGE 13	

1574	Optional Upgrade	Valance	Qty: 1
	Optional Valance (Trim Only) CLASSIC II		

Ceramics

1955	Upgrade 5 Tile	Foyer Floor	Qty: 1
1955	Upgrade Grout	Foyer Floor	Qty: 1
1959	Upgrade 5 Tile	M. Ensuite Floor	Qty: 1
1959	Upgrade Grout	M. Ensuite Floor	Qty: 1

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

07/28/21 Donald Vero

July 28, 21 HBL

Date	Purchaser	Date	Décor Consultant
		APPROVED -	
Date	Purchaser	07-20-2021	MRosen

Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



28-Jul-21

Sales Selection Sheet
OF

LOT	055-8	20-2505-CR ELEV B THE WORTHINGTON
PURCHASERS:	DONALD VERO	CONTACT NO: 647-706-9241
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein. It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1954		M. Ensuite Shower Floor	Qty: 1
	Upgrade 7 Tile		
1960		Main Bth Floor	Qty: 1
	Upgrade 2 Tile		
1960		Main Bth Floor	Qty: 1
	Upgrade Grout		
1956		Powder Floor	Qty: 1
	Upgrade 2 Tile		
1956		Powder Floor	Qty: 1
	Upgrade Grout		

Coffered Ceiling

71 Optional Upgrade
Sketch # 3 Page 13

Electrical

342	Optional Extras	GREAT ROOM	Qty: 1
	Extra wall interior outlet on Existing Circuit (does not include kitchen outlets)		
	ELECTRICAL OUT LET TO BE 70" FROM FLOOR ABOVE THE FIRE PLACE		
	SEE SKETCH # 3 PAGE# 13		
344	Optional Extras	GREAT ROOM	Qty: 1
	Ceiling rough-in (Capped)		
	TO BE INSTALLED IN GREAT ROOM- USE EXISTING SWITCH PLUG		
	SEE SKETCH # 3 PAGE# 13		

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

07/28/21	Donald Vero	July 22, 21	
Date	Purchaser	Date	Décor Consultant
Date	Purchaser		

Date Approved
HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



28-Jul-21

Heathwood Sales Selection Sheet

LOT	055-8	20-2505-CR ELEV B THE WORTHINGTON	
PURCHASERS: DONALD VERO		CONTACT NO: 647-706-9241	
VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4		HST #	

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

344 Optional Extras Qty: 1

Ceiling rough-in (Capped)
TO BE INSTALLED ABOVE THE BREAKFAST BAR - USE SEPARATE SWITCH
SEE SKETCH # 3 PAGE# 13

KITCHEN

347 Optional Extras Qty: 1

Additional switch
TO BE USED FOR THE R/I CAP LIGHT

KITCHEN

Granite

886 Optional Upgrade Qty: 1

Countertop 3/4" GROUP 1 with double edge

Kitchen

Hardwood

1209 Vintage Qty: 1

3-1/4" Red Oak Select-V

KITCHEN

Heating / Air

331 Optional Extras Qty: 1

ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (See specs) (Hook-up not included)(Leave standard 120 volt electrical outlet on a separate circuit.
SKETCH # 3 PAGE 13 SPECS PAGES 25-27

KITCHEN

Plumbing

276 STANDARD Kitchen Sink Option Qty: 1

KINDRED Kitchen Sink Collection - Reginox ND1831 UA/9 Stainless Kitchen Double (equal size) Bowl Undermount Sink (or equivalent) PAGE 16

KITCHEN

Waffle Ceiling

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

07/28/21 Donald Vero July 28, 21

Date	Purchaser	Date	Décor Consultant
Date	Purchaser		

Date-Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



28-Jul-21

Sales Selection Sheet

10 of 36

LOT	055-8	20-2505-CR ELEV B THE WORTHINGTON	
PURCHASERS: DONALD VERO		CONTACT NO: 647-706-9241	
VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4		HST #	

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

482	Optional Extra	GREAT ROOM	Qty: 1
	Install Waffle Ceiling in main floor great room	SKETCH # 3 PAGE 13	

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

07/28/21	Donald Vero	July 28, 21	
Date	Purchaser	Date	Décor Consultant
Date	Purchaser		

Date Approved: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON


11 of 36

The Worthington

20-2505 CRN ELEV. B

ELEVATION B: 2,546 SQ FT

Sketch #1

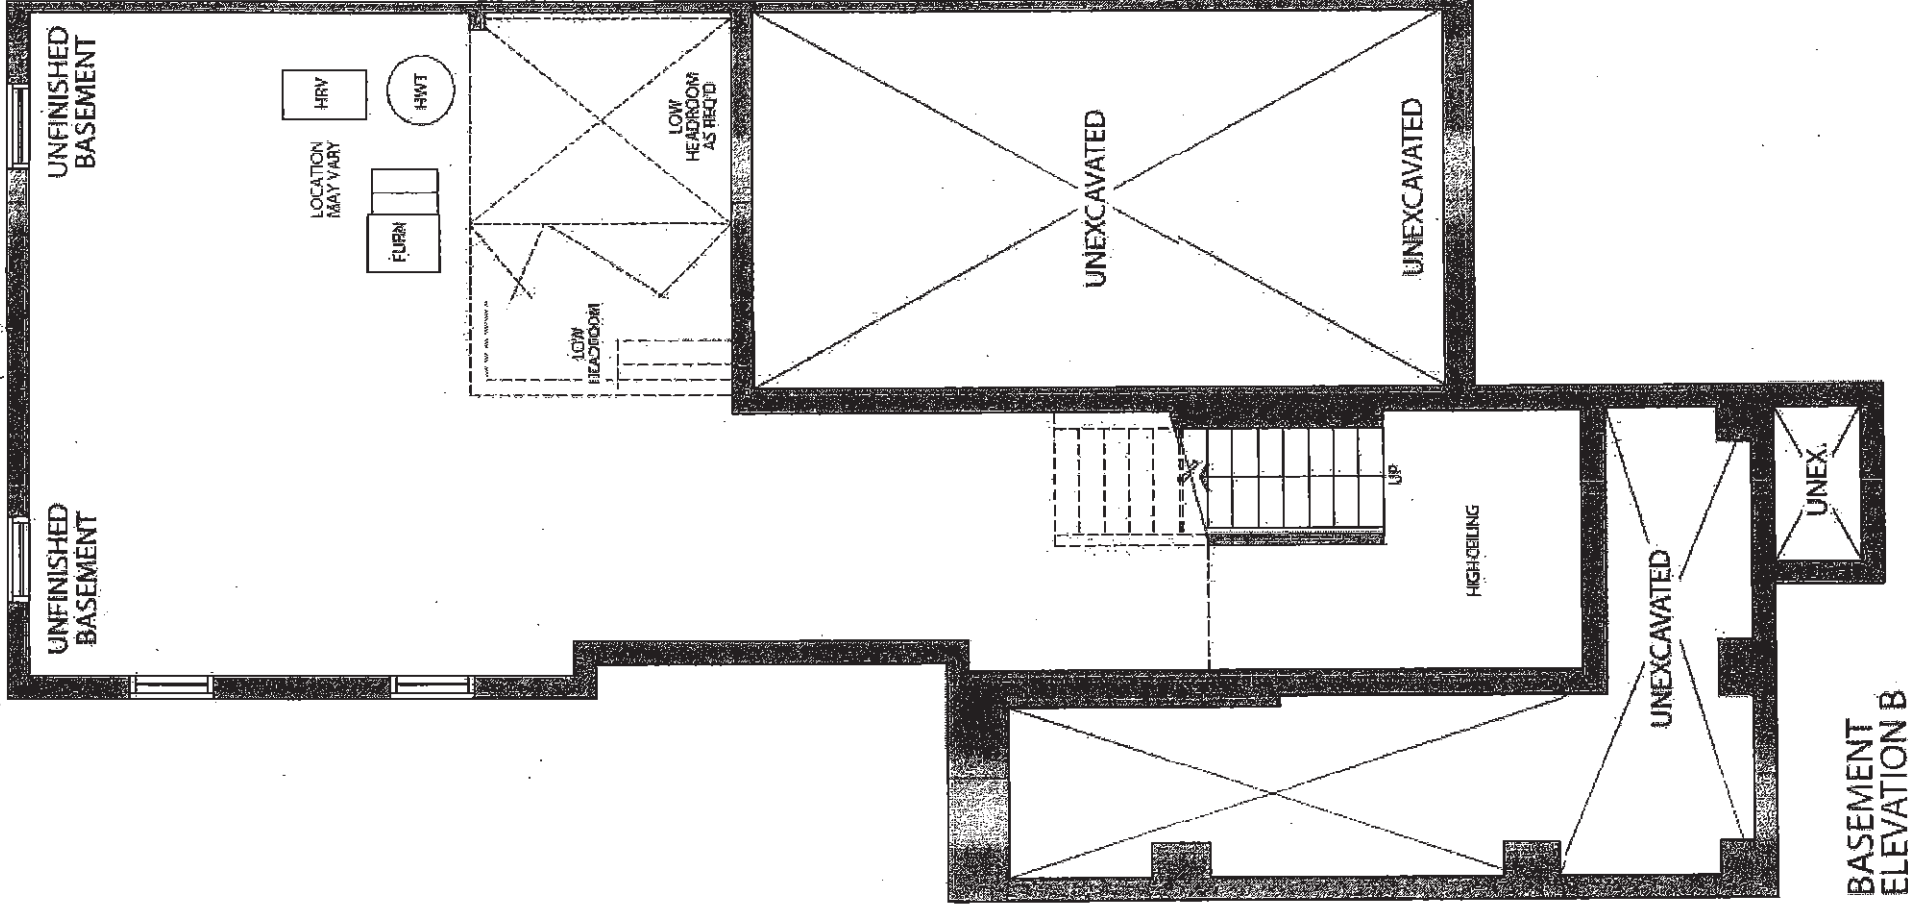

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON


12th 36

The Worthington

20-2505 CRN ELEV. B

ELEVATION B: 2,546 SQ FT

Sketch #2

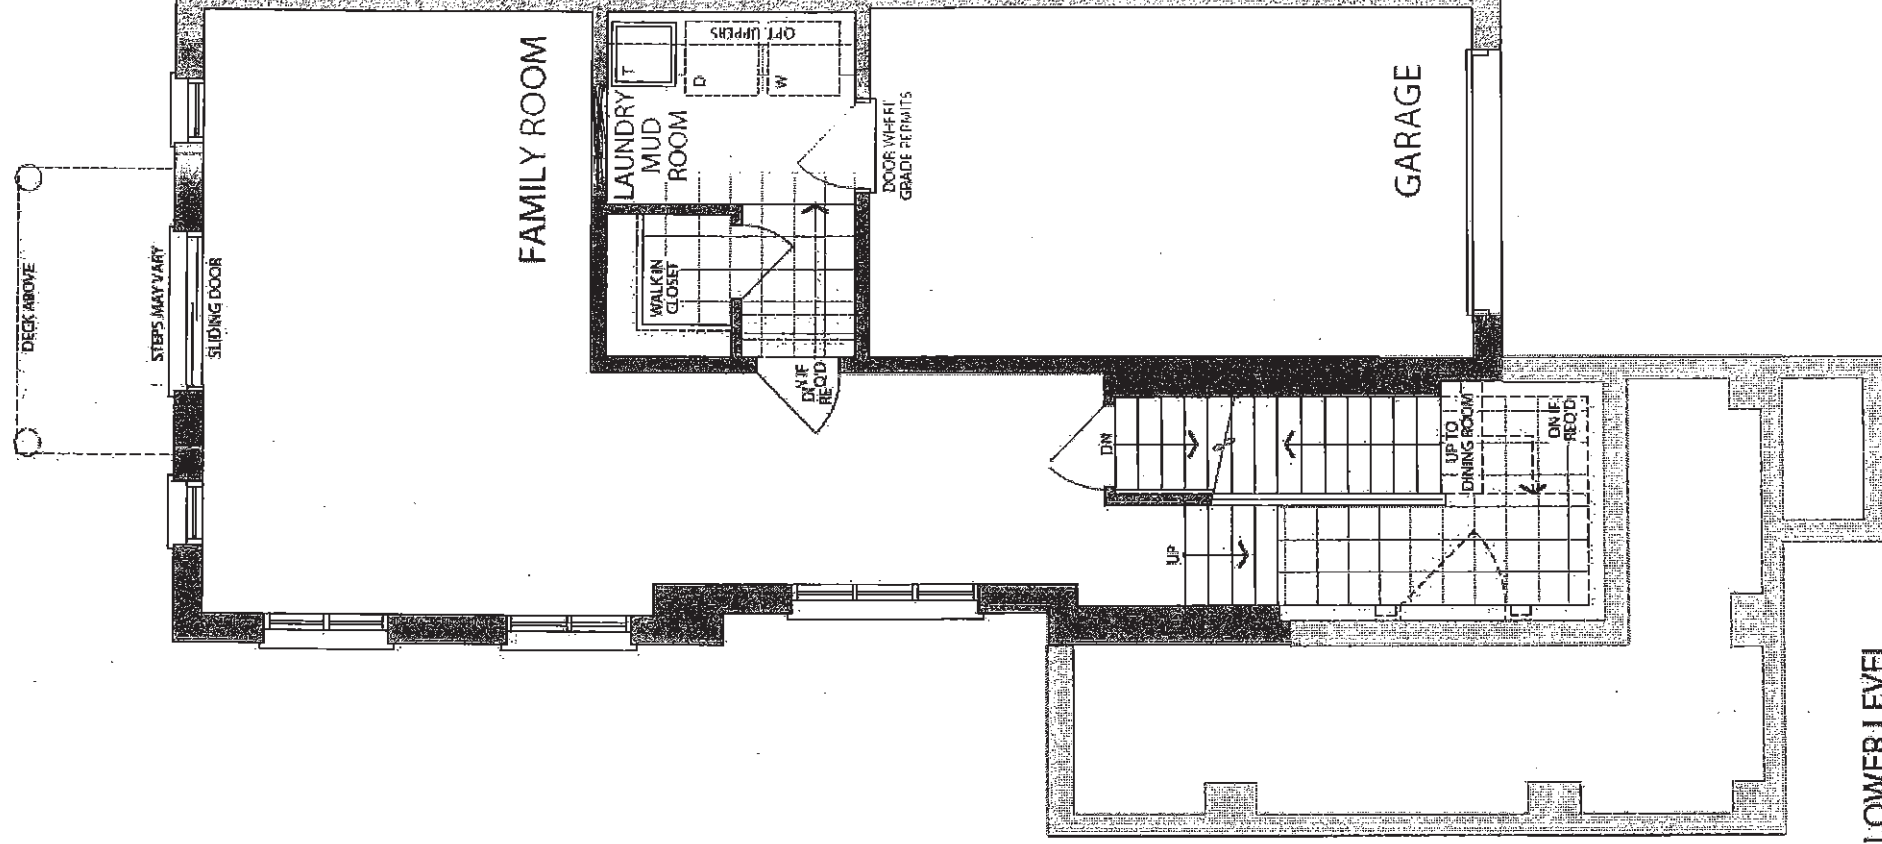

LOWER LEVEL
ELEVATION B


DV

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

13 of 36
The Worthington

20-2505 CRN ELEV. B

ELEVATION B: 2,546 SQ FT
Sketch #3

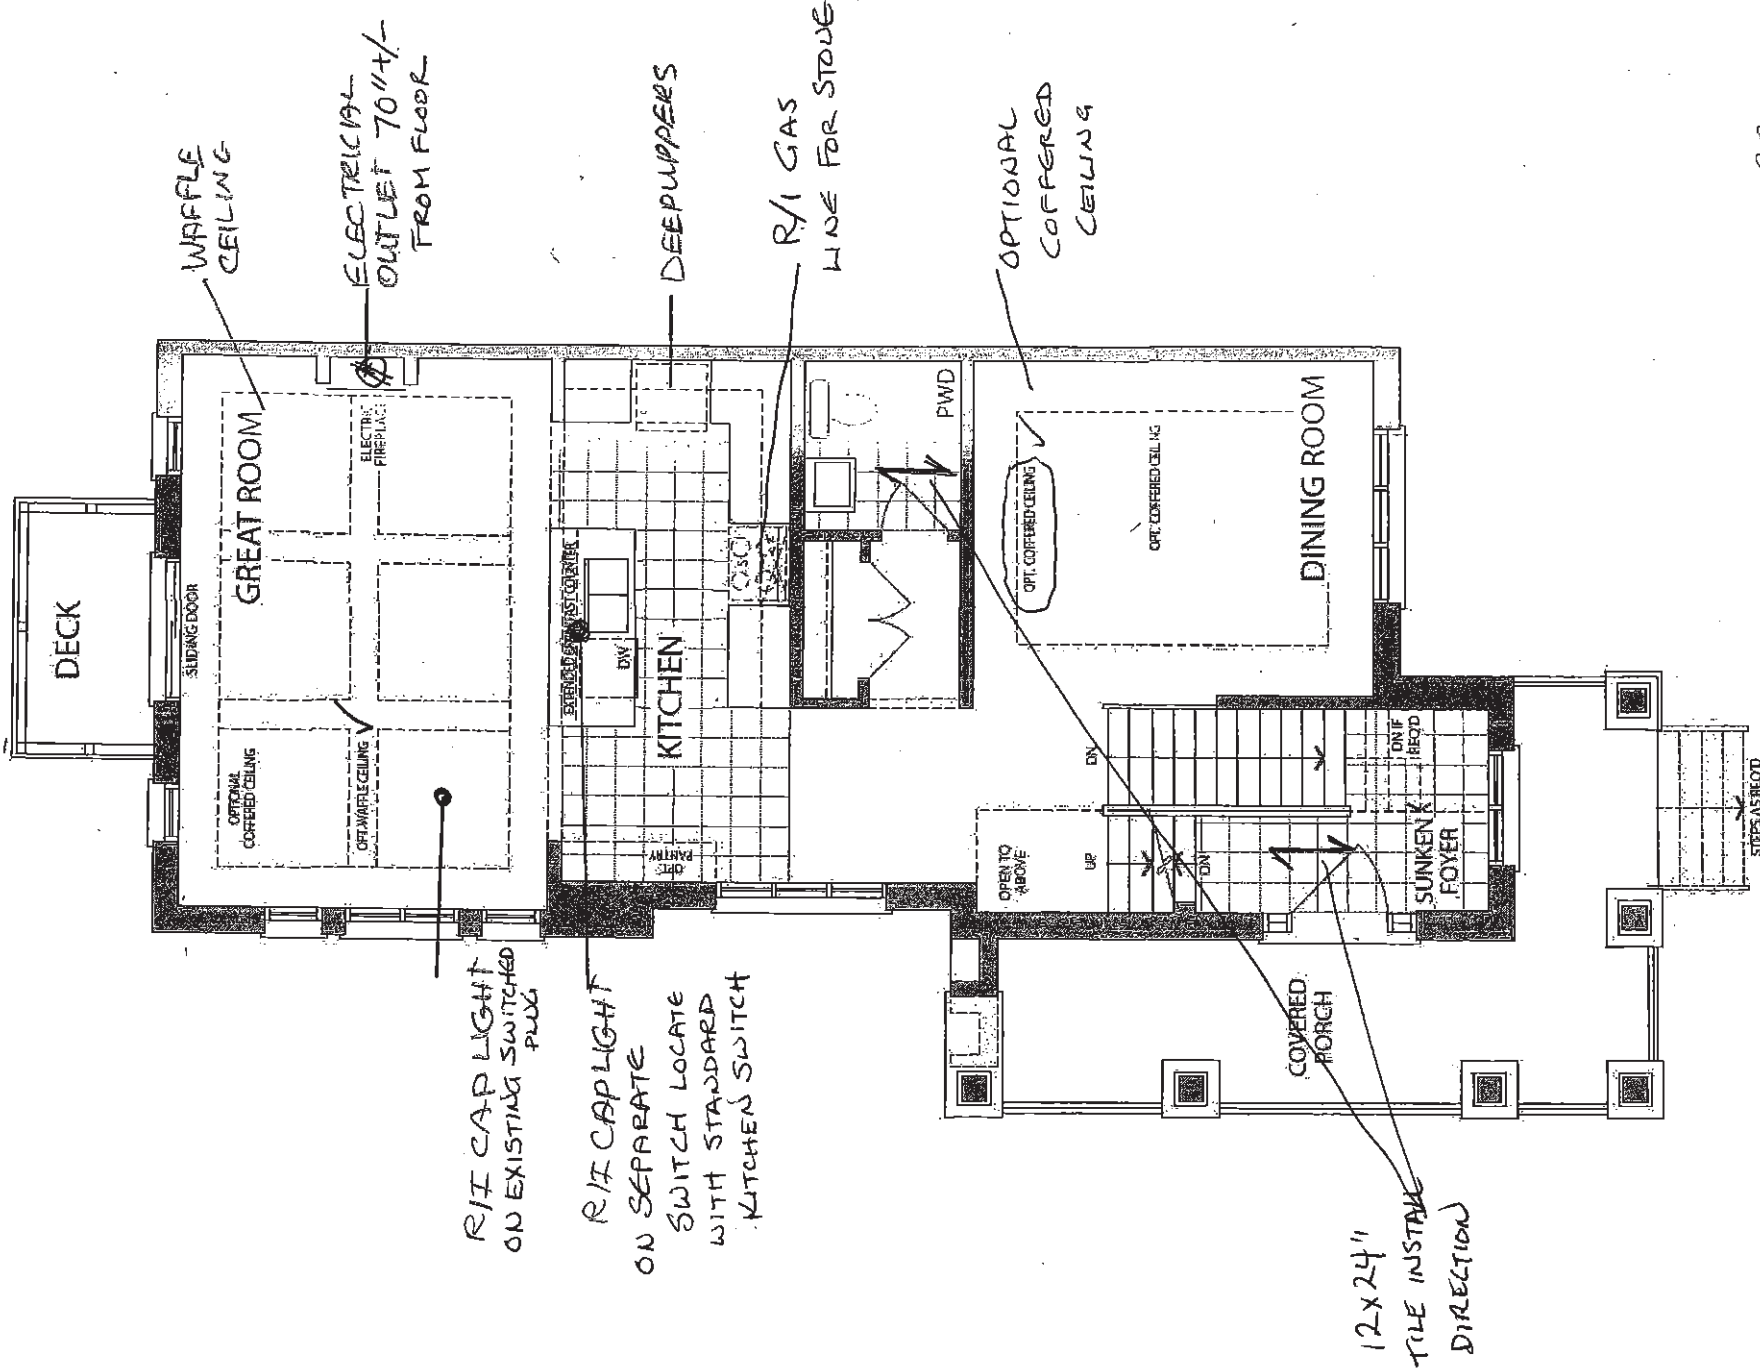

20

MAIN LEVEL
ELEVATION B

DV

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON


14 of 36

The Worthington

20-2505 CRN ELEV. B


ELEVATION B: 2,546 SQ FT

Sketch # 4

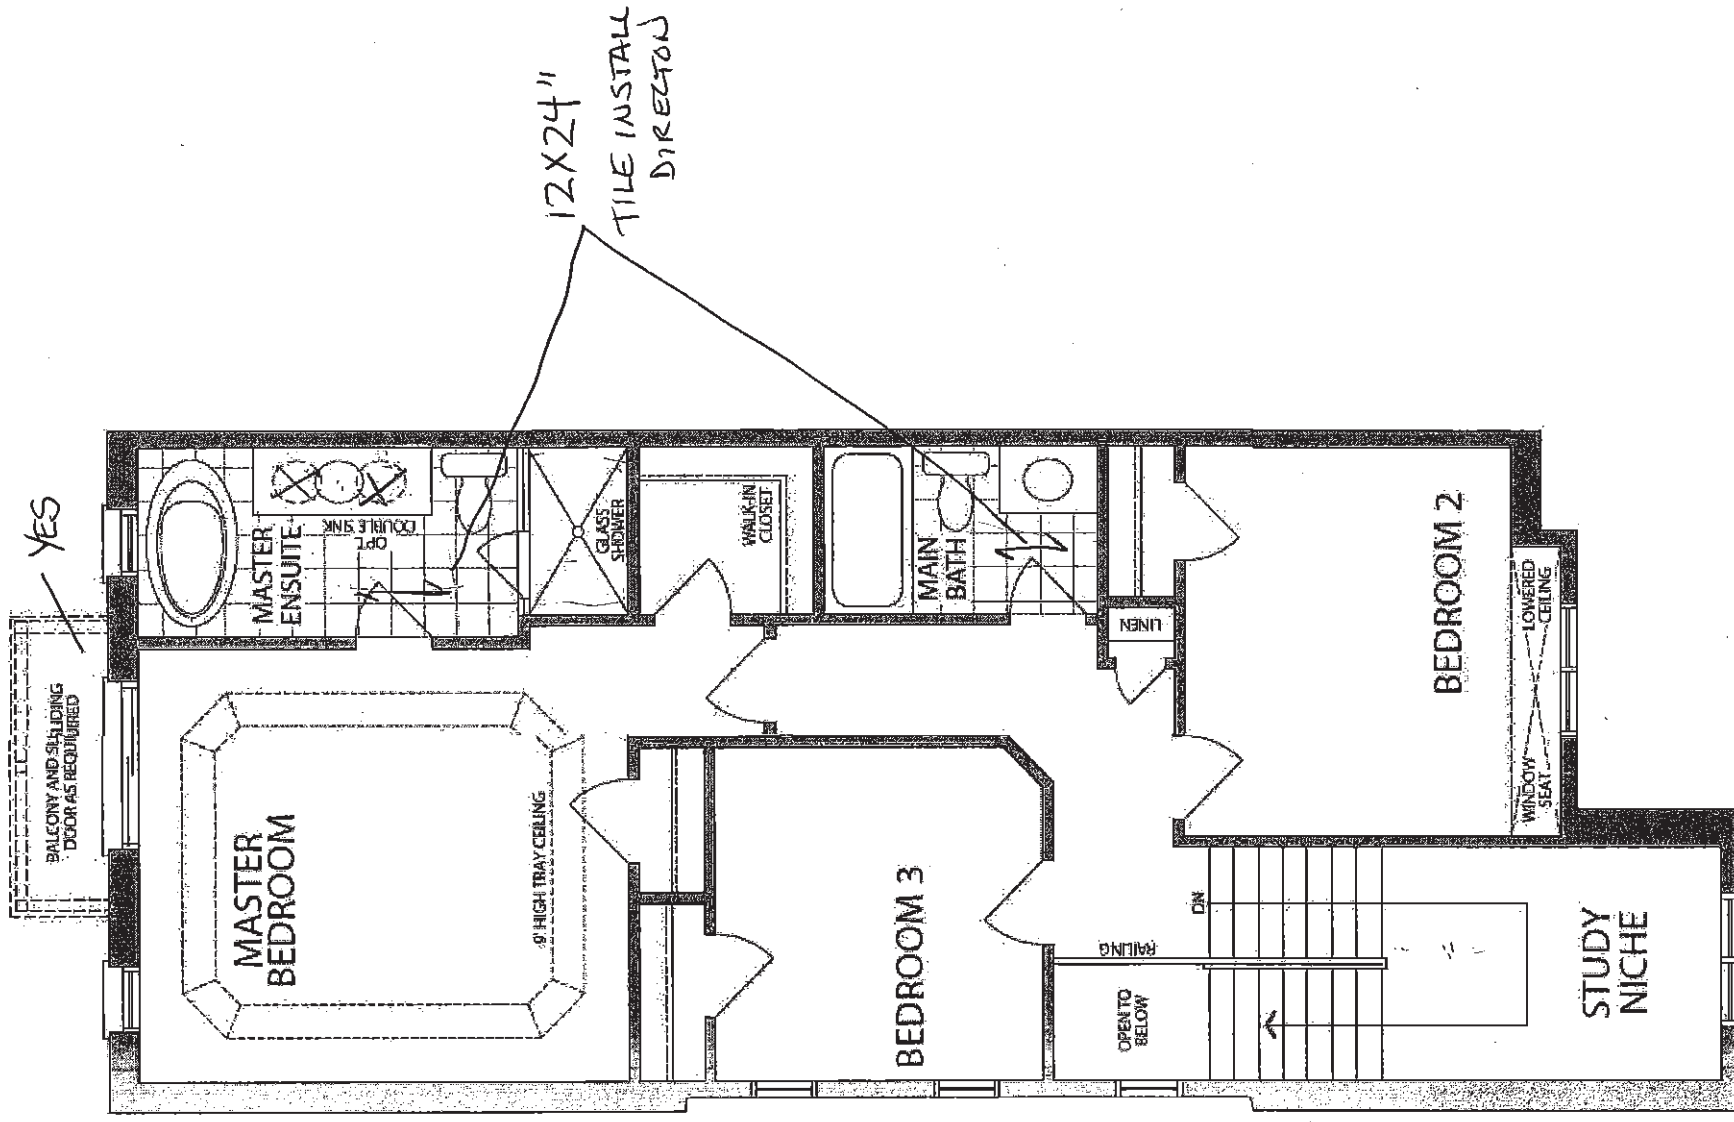

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

15 of 36

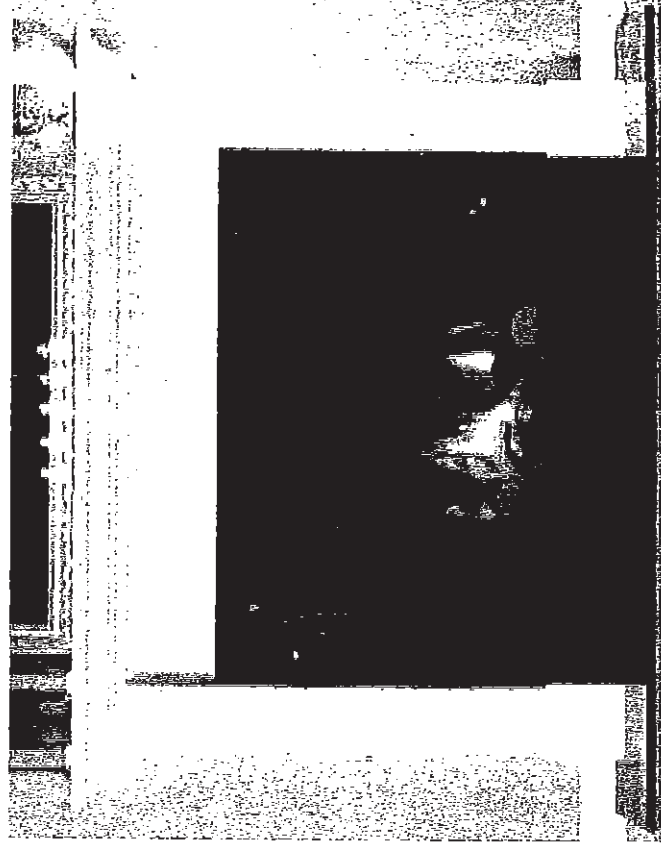

NEAS NF15 Mantel CABINET

DV


C2 COUNTRY LANE
 LOT 55-8
 20-2505 CRN ELEV B
 THE WORTHINGTON

16 of 36


Regence

STANDARD KITCHEN SINK

ND1831UA/9

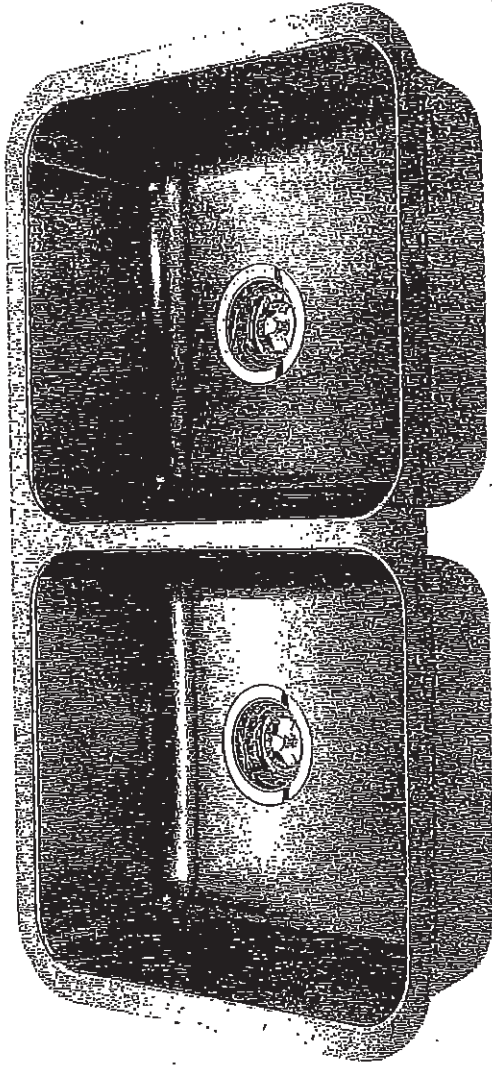

Optional Accessories

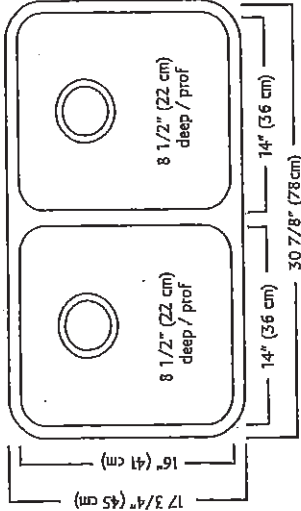

ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited
 P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

DV


C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

17 of 36

STANDARD KITCHEN FAUCET

Align

Modern



Single Handle Pull-Down Kitchen
Faucet#

Model 7565+

DU

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

18 of 36

*American
Standard*

**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated) -
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only


Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2 - 2008/CSA B45.1-08

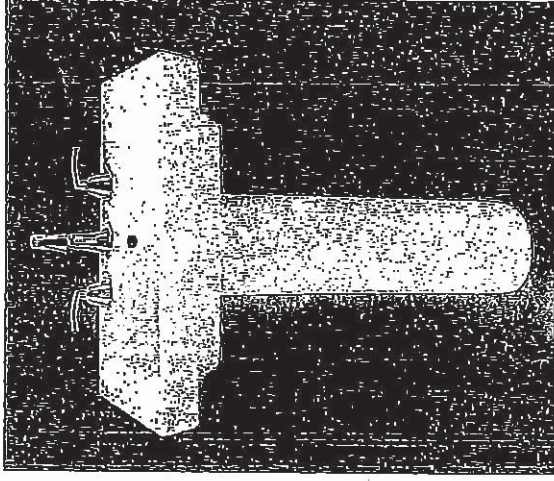

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:

* See faucet section for additional models available

OV

COLONY COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

- ☒ 0346 803
Faucet holes on 203mm (8") centres
- ☐ 0346 403 (Illustrated)
Faucet holes on 102mm (4") centres
- ☐ 0346 001
Centre hole only

Nominal Dimensions:
521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:
422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep





COMPLIANCE CERTIFICATIONS –
Meets or exceeds the following Specifications:
• ASME A112.19.2M for Vitreous China Fixtures.
• CAN/CSA B45 Series.

- To Be Specified
- ☐ Colour: ☒ White ☐ Bone ☐ Silver Gray
☐ Linen
- ☐ Faucet*:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

* See faucet section for additional models available
BAS-198

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

9 COLONY™
COUNTERTOP SINK
VITREOUS CHINA

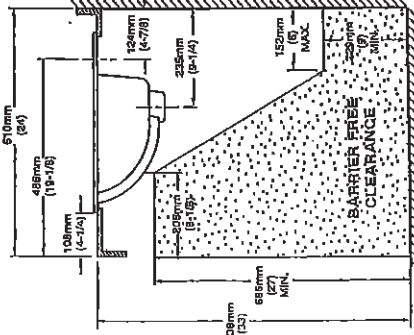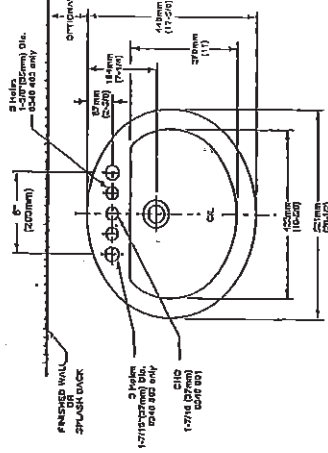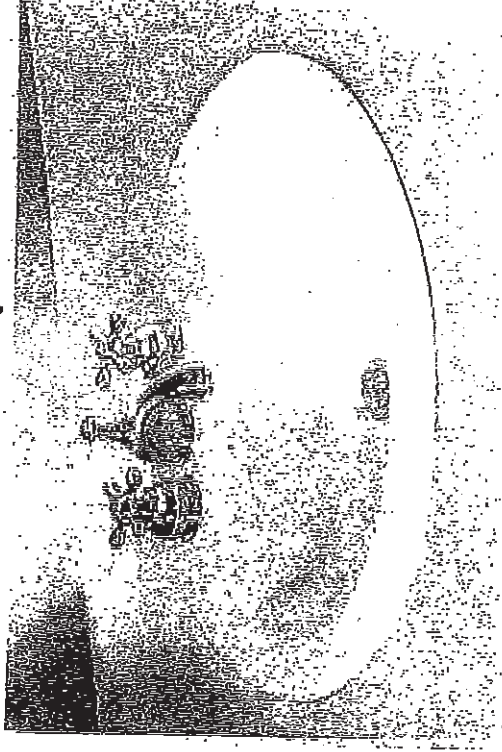


NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use
of superseded or voided pages.

2

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

20 of 36

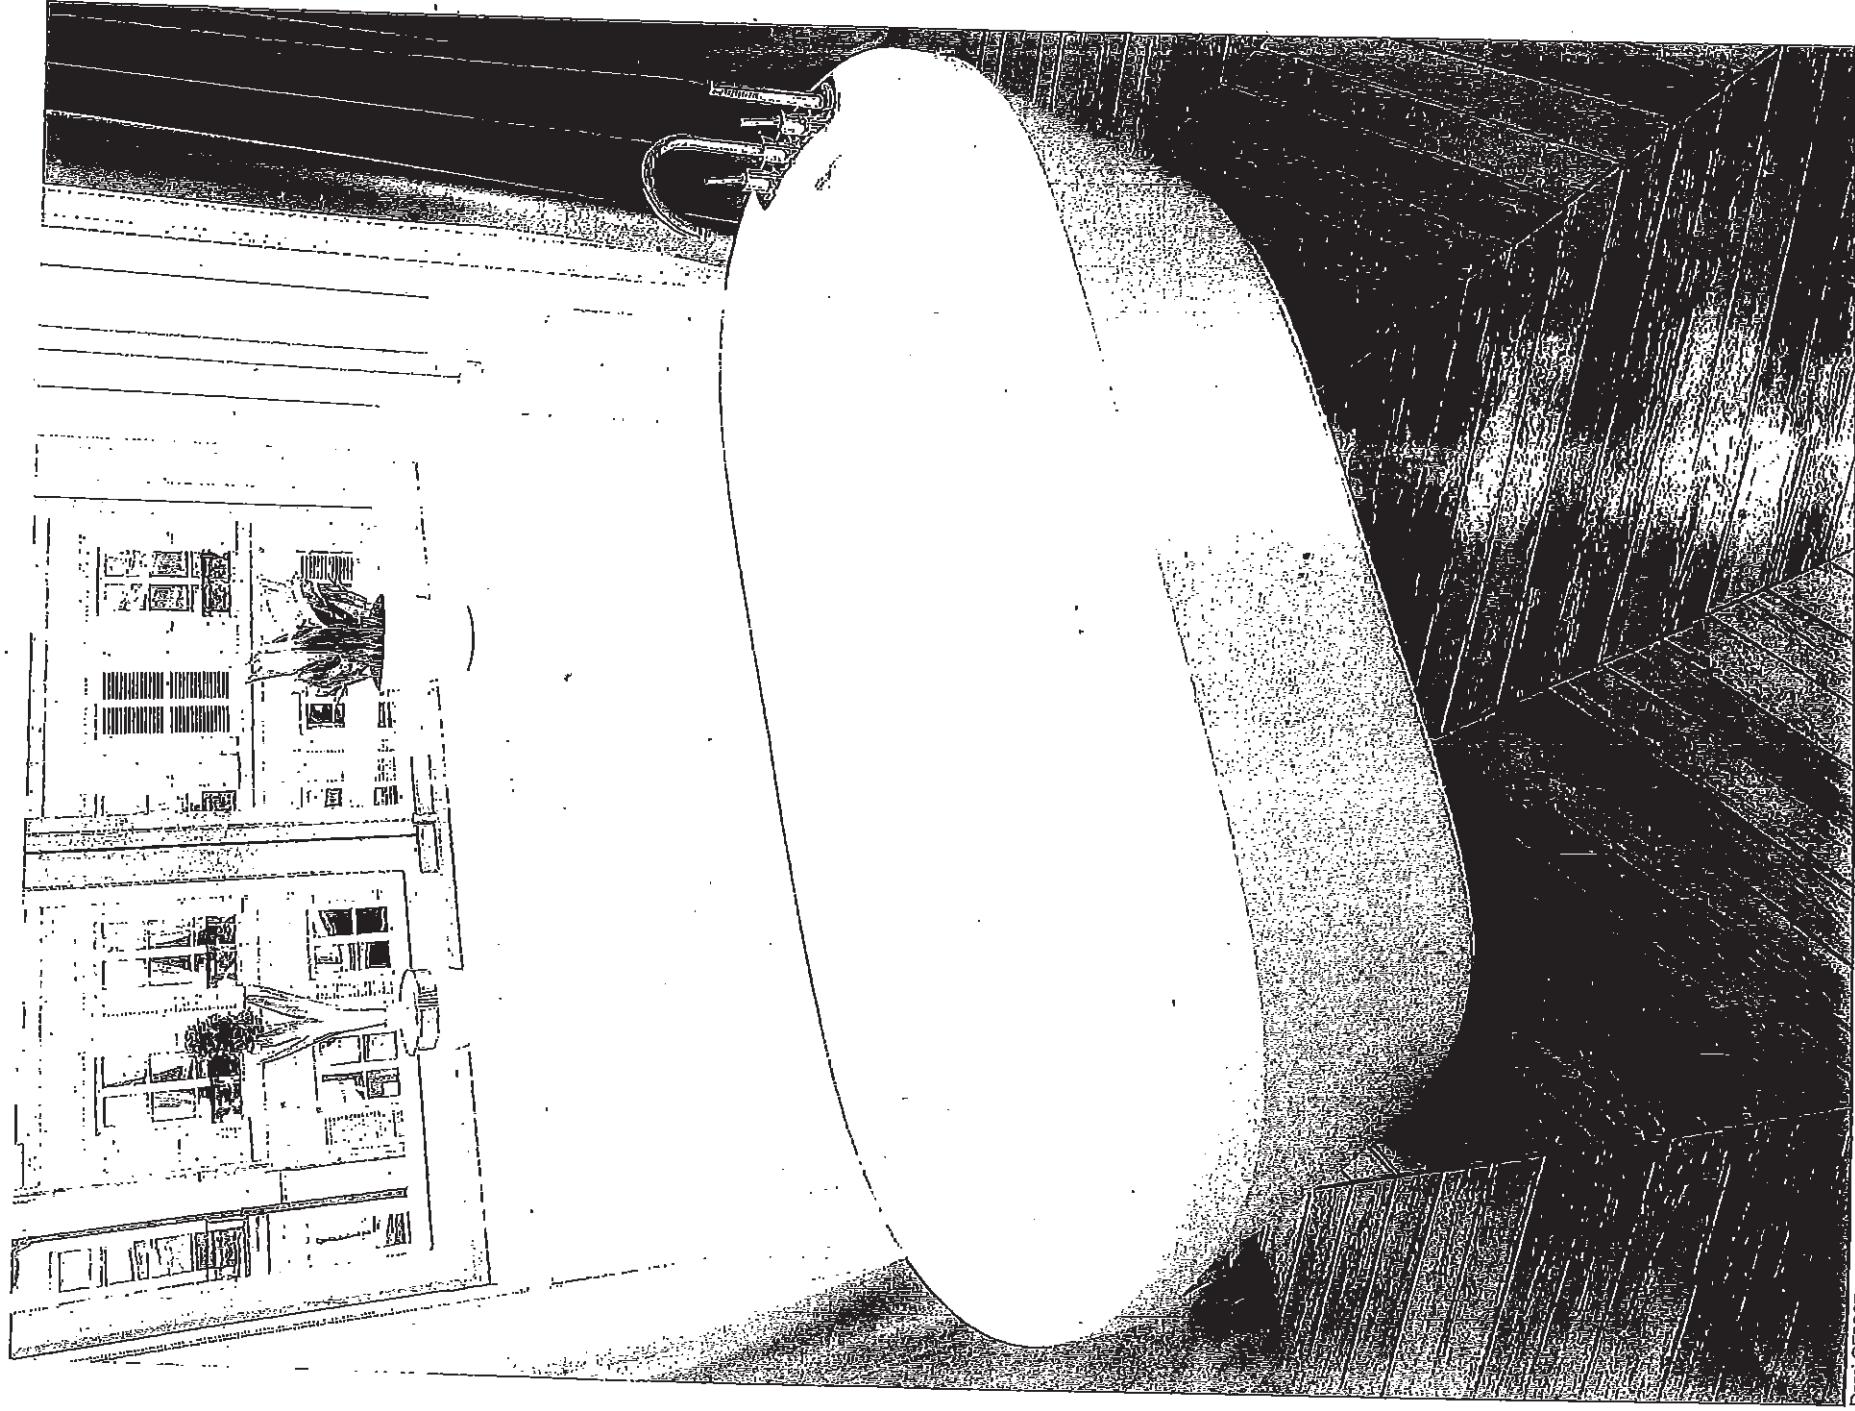

Deml CF2007


AD

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

21 of 36


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL

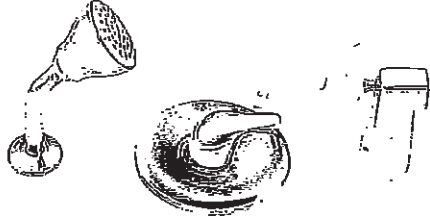

Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP†
(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

21

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

22 of 36


SC(B)519 | ALITO Collection

Cyclone[®]

Breathe Better


Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release aluminum mesh filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minutes time-delay OFF feature
- Plug-in connection

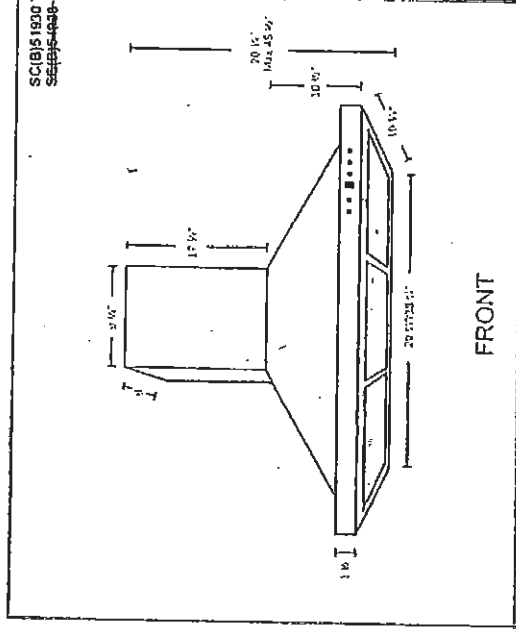

Options

- Filters:
 - SC519 - Quick Release Aluminum Mesh Filters
 - SCB519 - Quick Release Stainless Steel Baffle Filters**
- Chimney Flues:
 - A1.CH10 - short (7'-8' ceilings)
 - A1.CH18 - standard (8'-9' ceilings)
 - A1.CH30 - extended (9'-11' ceilings)
- Widths: 24" (30"), 36"

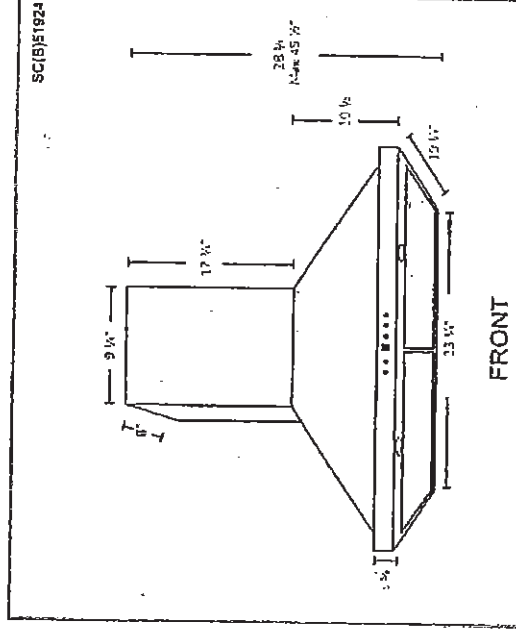

Specifications

- Air Flow Volume: 550 CFM
- Electrical Connection: 120 V/60 Hz
- Power Consumption: 300 Watts

- Current: 2.5 Amps
- Fan Speed: 1599 RPM
- Fan Type: Centrifugal Blower

- Finishes: Stainless Steel
- Ducting: 6" Round
- Noise Level: Min. 2 Sones
Max. 6 Sones



Toronto • Vancouver • Boston
www.CycloneRangeHoods.com

22

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

23 of 36

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

LOCATION REQUIREMENTS

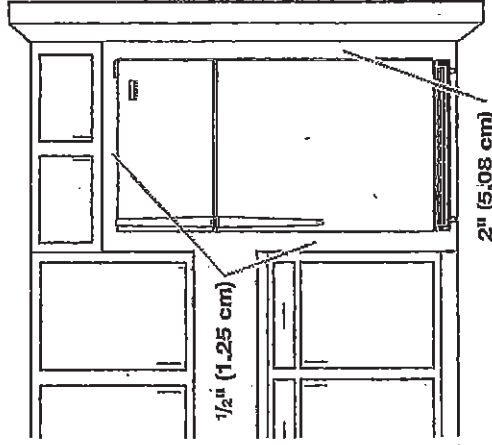


To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

PRODUCT DIMENSIONS

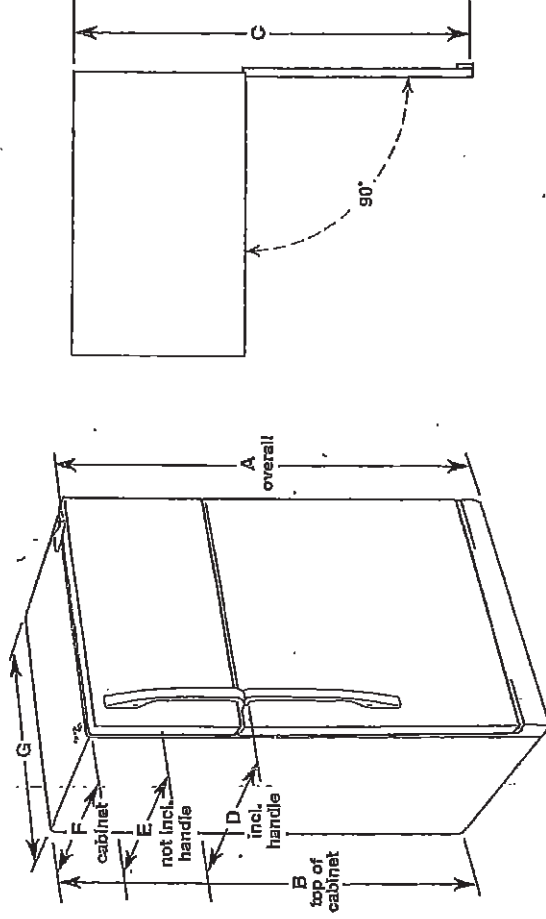

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	32 1/4" (83.5 cm)	30 3/4" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/2" (82.3 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.





Ref. W10674106
10/29/14

DV

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

24 of 36

Refrigerator Door Swing Verification

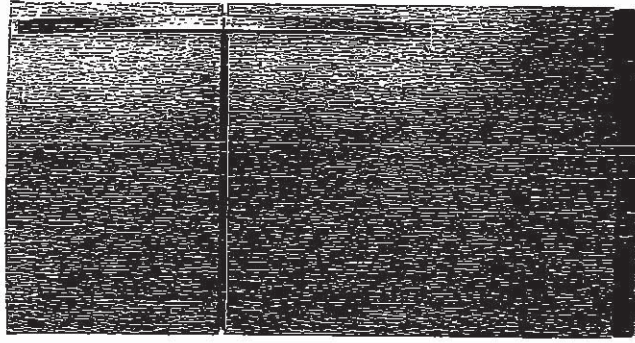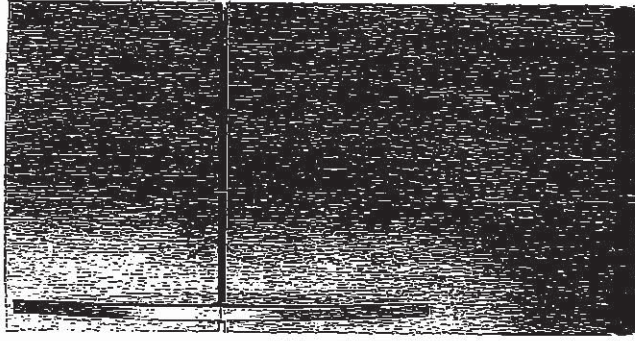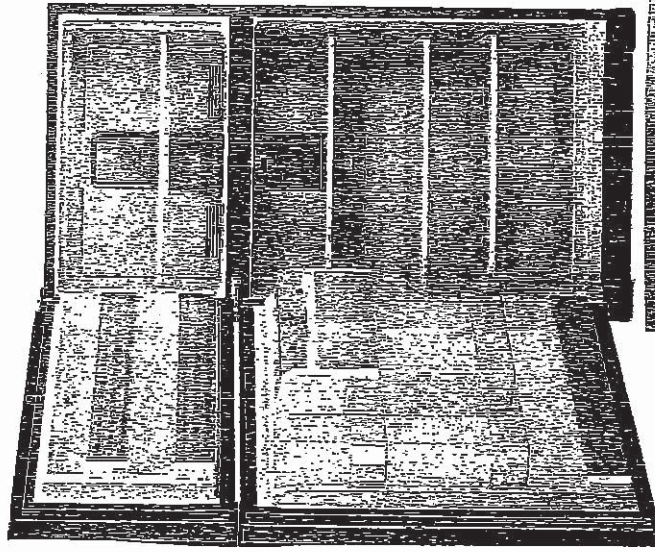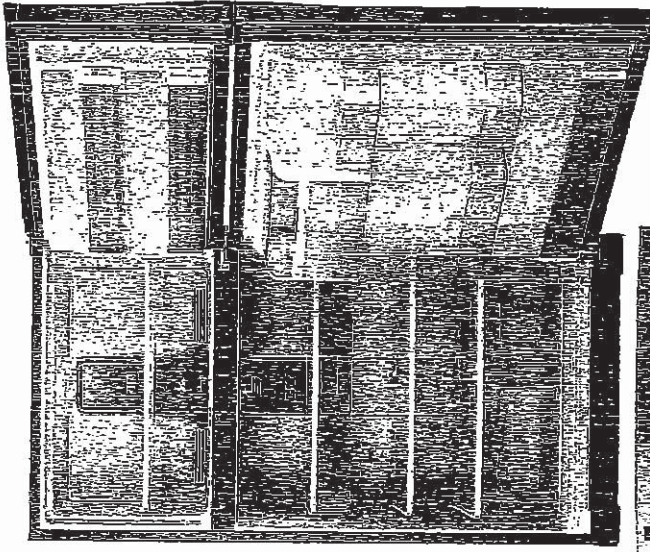

When facing the refrigerator

☒

RIGHT HAND
DOOR OPENING

- Hinges on right
- Handle on left

nd

INITIAL

☐

LEFT HAND
DOOR OPENING

- Hinges on left
- Handle on right

INITIAL

GARAGE LEFT


Please check and INITIAL your door swing selection.

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

25 of 36



FRONT CONTROL
GAS RANGES

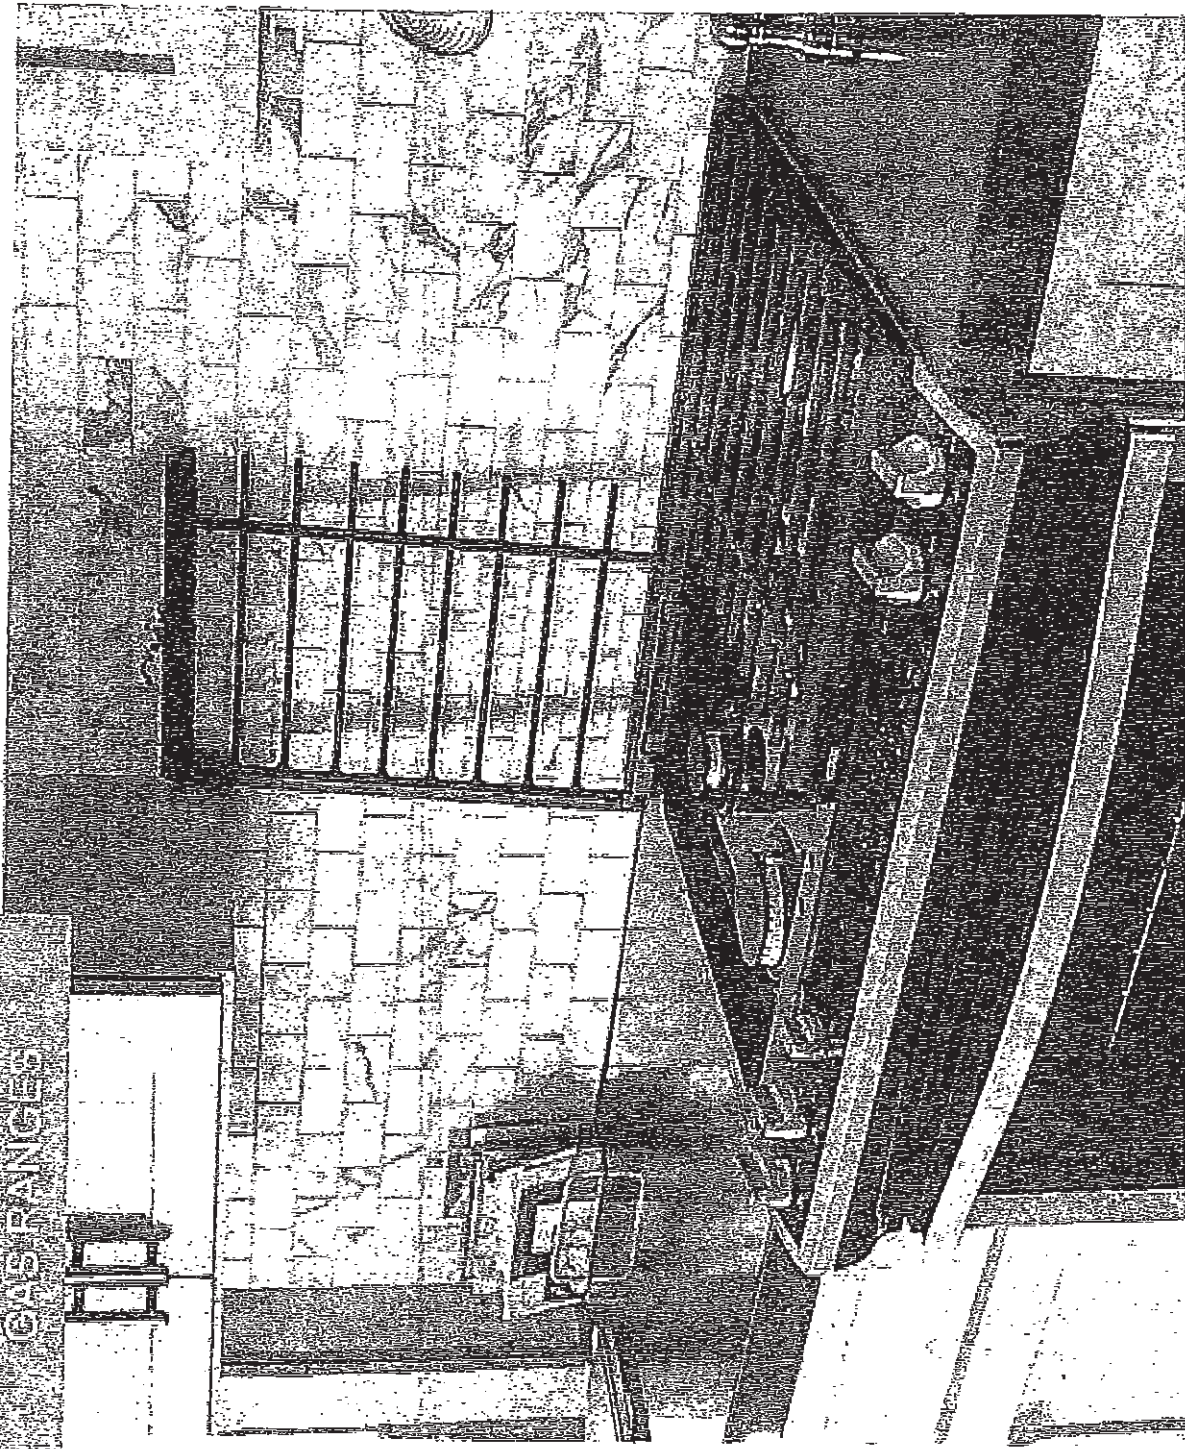

FEATURING



TimeSaver™ system

The TimeSaver™ system's Frozen Bake Technology allows you to skip preheating for favorites like pizza, lasagna, chicken nuggets, fries or pies so you can cook frozen foods faster.



HeatRight™ system

The HeatRight™ system's True convection helps you to cook food faster* with a rear fan and third heating element to circulate hot air over, under, and around food.



CompleteClean™ system

The CompleteClean™ system's EZ-2-Lift™ hinged grates give you quick access to spills on the cooktop. The industry first hinged design allows you to wipe up under them without removing them entirely. For a more thorough clean, the grates are also dishwasher safe.

Every day, care.™



From the #1 Selling Appliance brand in the USA†

22

C2 COUNTRY LANE
 LOT 55-8
 20-2505 CRN ELEV B
 THE WORTHINGTON

26 of 36

Front Control Gas Ranges

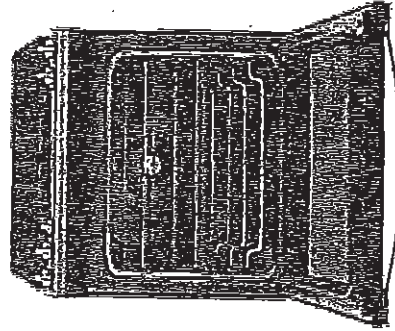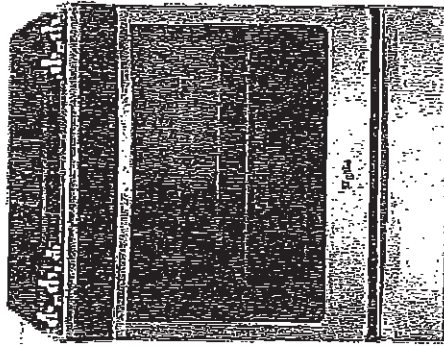

WEG745HOF

30" Freestanding Range - 5.8 cu. ft.



TimeSaver™ system

- Frozen Bake™ Technology



HeatRight™ system

- True Convection
- Convection Conversion
- AccuSimmer™ burner
- Center Oval burner
- Temperature Sensor



CompleteClean System


- EZ-2-Lift™ Hinged Grates
- AquaLift™ Self-cleaning Technology
- Dishwasher-safe knobs




ReadySet™ system

- (2) SpeedHeat™ burners
- Rapid Preheat
- Keep Warm
- Delay Cook


Available colors



S
Stainless
Steel




H
White



B
Black

PRODUCT DIMENSIONS

For more detailed product information, please refer to the product literature. Dimensions given are factory standard unless noted.



1. 11 1/2" (291 mm) height from floor to top of control panel.
2. 26 1/2" (673 mm) width of range.
3. 20 1/2" (518 mm) depth of range.
4. 20 1/2" (518 mm) depth of range.
5. 20 1/2" (518 mm) depth of range.
6. 20 1/2" (518 mm) depth of range.

IMPORTANT: Range must be installed in accordance with the instructions in the "User Manual" section. Using a service technician for installation is recommended.


Range can be installed in a 27" (686 mm) by 30" (762 mm) cutout.

Type of Gas

Natural gas: The range is designed for use with natural gas. See Gas Connections section. The range must be installed in accordance with the instructions in the "User Manual" section. The range must be installed in a 27" (686 mm) by 30" (762 mm) cutout.

LP Gas conversion: Consider only be done by a qualified service technician. An attempt to install the range on the appliance may be dangerous and may cause fire or explosion. See Gas Connections section.

CABINET OPENING DIMENSIONS

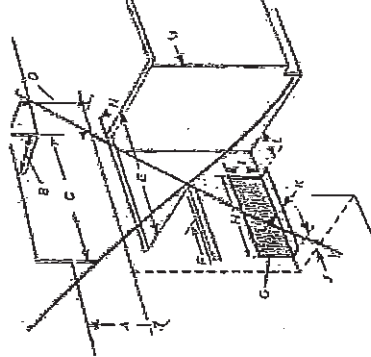

IMPORTANT: A minimum 1/4" (6 mm) gap is required between the range and the cabinet. The range must be installed in a 27" (686 mm) by 30" (762 mm) cutout. The range must be installed in a 27" (686 mm) by 30" (762 mm) cutout.

Range can be installed in a 27" (686 mm) by 30" (762 mm) cutout.

Range can be installed in a 27" (686 mm) by 30" (762 mm) cutout.

Range can be installed in a 27" (686 mm) by 30" (762 mm) cutout.

Range can be installed in a 27" (686 mm) by 30" (762 mm) cutout.

Range can be installed in a 27" (686 mm) by 30" (762 mm) cutout.

Range can be installed in a 27" (686 mm) by 30" (762 mm) cutout.

Range can be installed in a 27" (686 mm) by 30" (762 mm) cutout.

Range can be installed in a 27" (686 mm) by 30" (762 mm) cutout.



*Compared to a traditional preheat and bake cycle for pizza, nuggets/fries, and laundry appliances. Timeline, 2014.

©2016 Whirlpool. All rights reserved. S4S. Form No. WEG745HOF

DV


C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

27 of 36



Whirlpool® 30" (76.2 cm) Slide-in Gas Range

PRODUCT MODEL NUMBERS



GAS SUPPLY REQUIREMENTS

Gas supply line:

- Provide a gas supply line of $\frac{3}{4}$ " (1.9 cm) rigid pipe to the range location. A smaller size pipe on longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be $\frac{1}{2}$ " (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.
- NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape.

Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 to 6 ft (122 to 182.4 cm) long, $\frac{1}{2}$ " (1.3 cm) or $\frac{3}{4}$ " (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.




- A $\frac{1}{2}$ " (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the appliance pressure regulator.

- Do not kink or damage the flexible metal tubing when moving the range.

- Must include a shutoff valve:

The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



- A. Gas supply line
- B. Shutoff valve "open" position
- C. To range

Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

Natural gas:

Minimum pressure: 5" WCP
Maximum pressure: 14" WCP


LP gas:

Minimum pressure: 11" WCP
Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

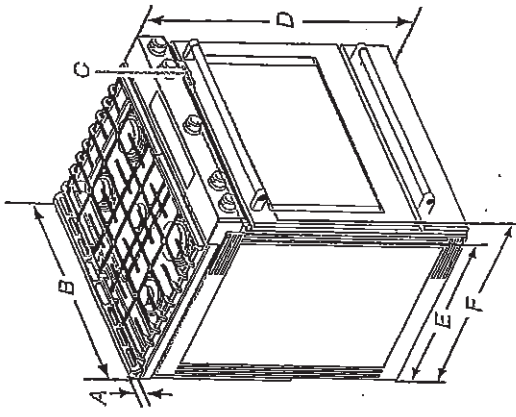

- A. $1\frac{1}{4}$ " (3.0 cm) height from cooktop to top of vent
- B. $25\frac{1}{2}$ " (75.8 cm)
- C. Model/serial number plate (located behind the oven door on the top right-hand side of the oven frame)
- D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*
- E. $28\frac{3}{4}$ " (71.9 cm) max. depth from front of console to back of range.
- F. $28\frac{1}{4}$ " (73.3 cm) max. depth from handle to back of range.

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

* Range can be raised approximately $1\frac{1}{2}$ " (2.5 cm) by adjusting the leveling legs.

Type of Gas

Natural gas:

- This range is factory set for use with Natural gas. See "Gas Conversions" section. The model/serial rating plate located behind the control panel has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.


LP gas conversion:

Conversion must be done by a qualified service technician. No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

TEFLON is a registered trademark of Chemours.

27

28.36

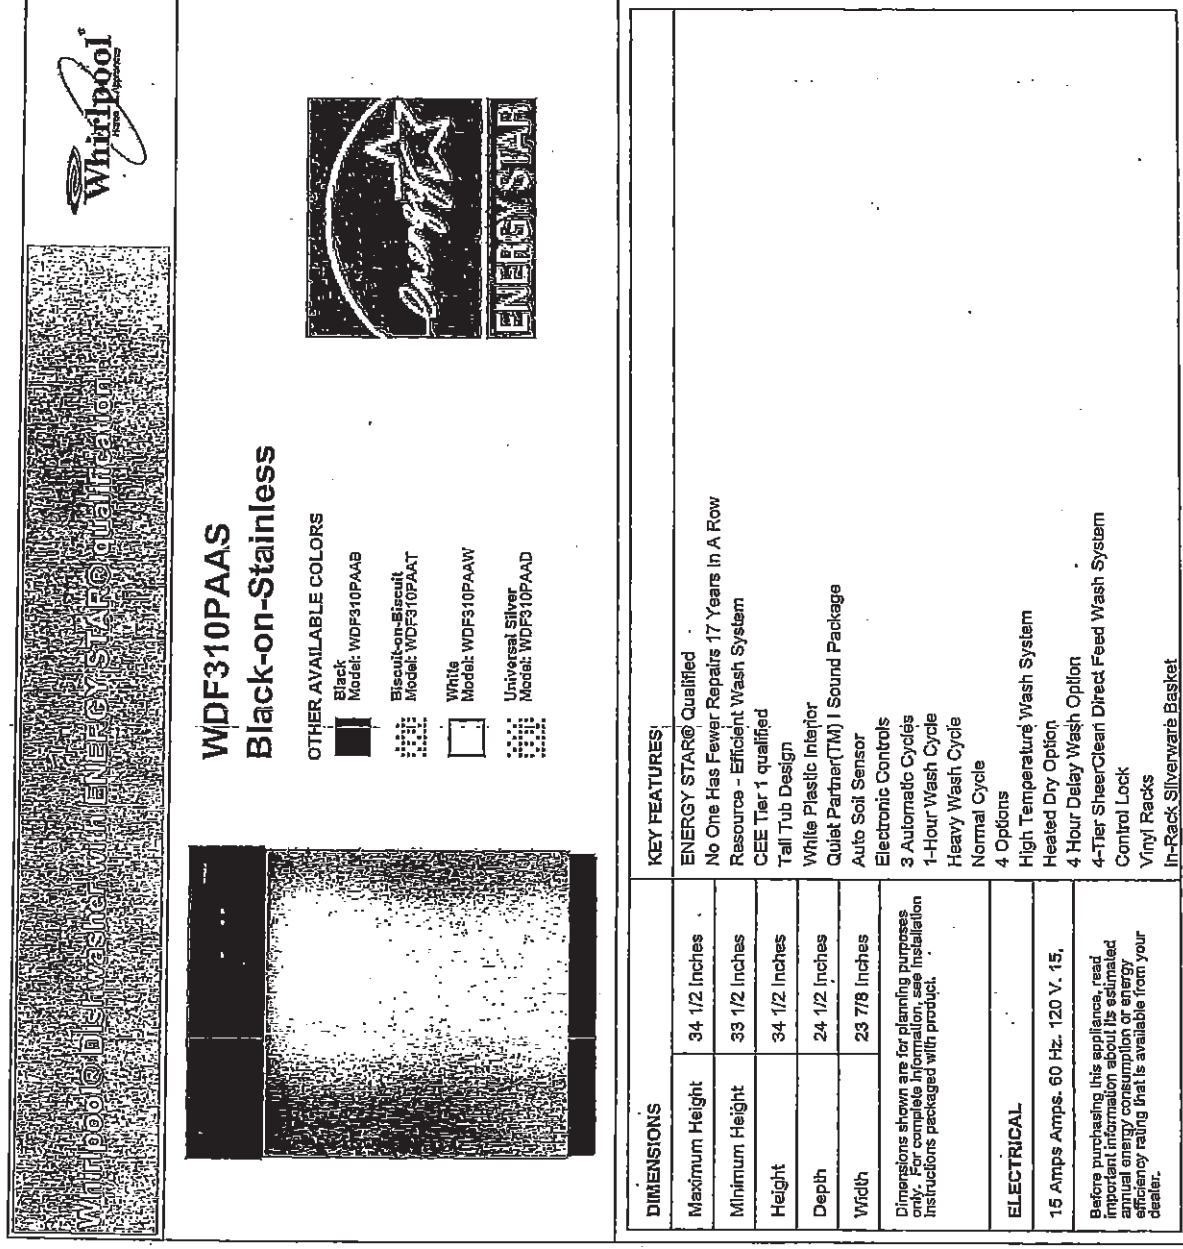

29 of 36

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF530PSY
WDF111PAB	WDF540PAD
WDF120PAF	WDF730PAY
WDF121PAF	WDT710PAY
WDF310PAA	WDT720PAD
WDF310PCA	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit-breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord: Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.

Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compressor fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4" N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.


Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended


that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.



PRODUCT DIMENSIONS

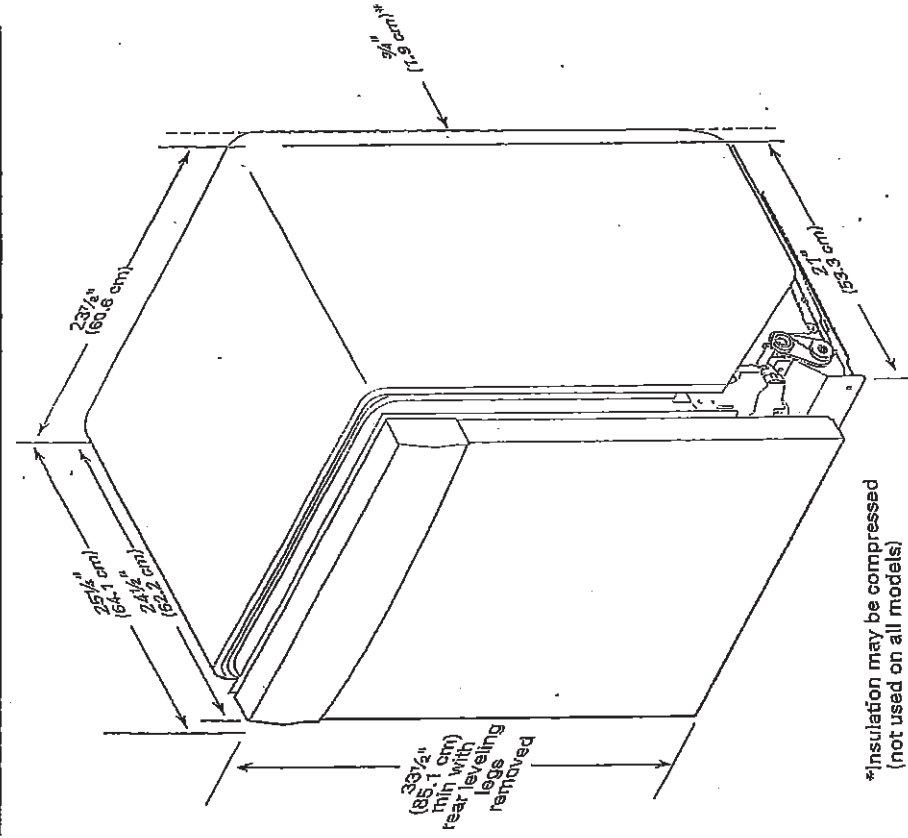

*Insulation may be compressed (not used on all models)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

DV

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

30 of 36


CABINET CUTOUT DIMENSIONS

WDF 320 Pkg

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

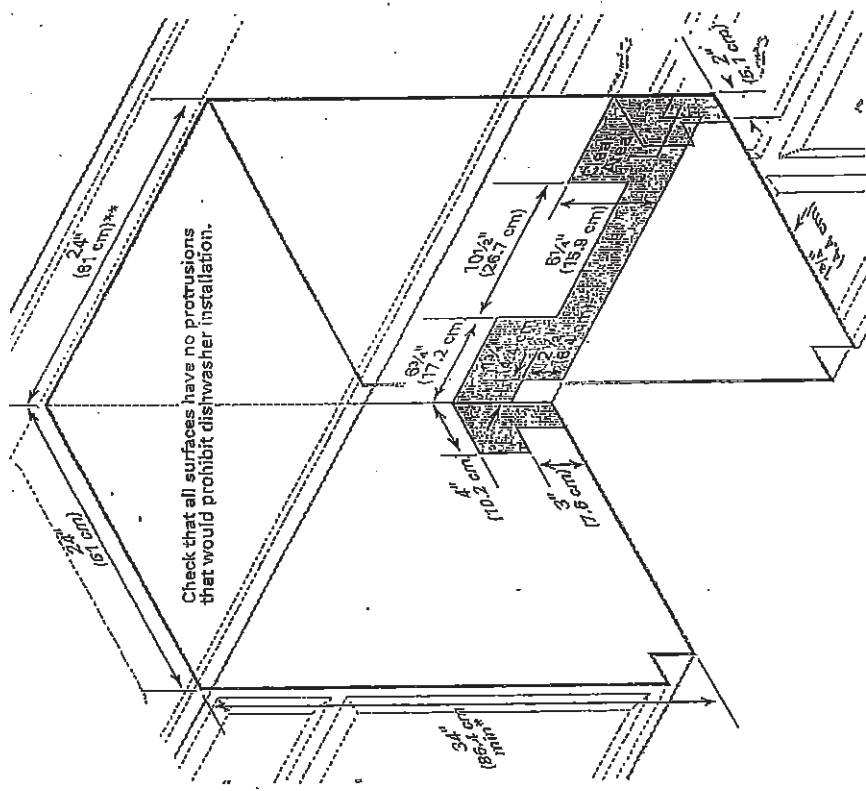

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


DV

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

31 of 36

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Whirlpool | Front Load Washers | WFW5620HW

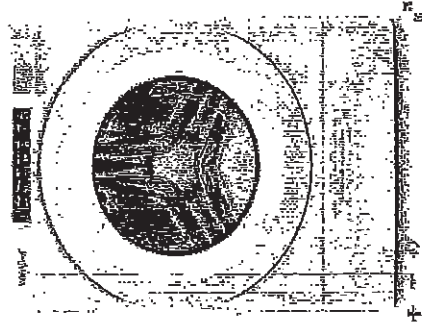

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	99.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	87
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

DV

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

32 of 36

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.



Whirlpool Models*

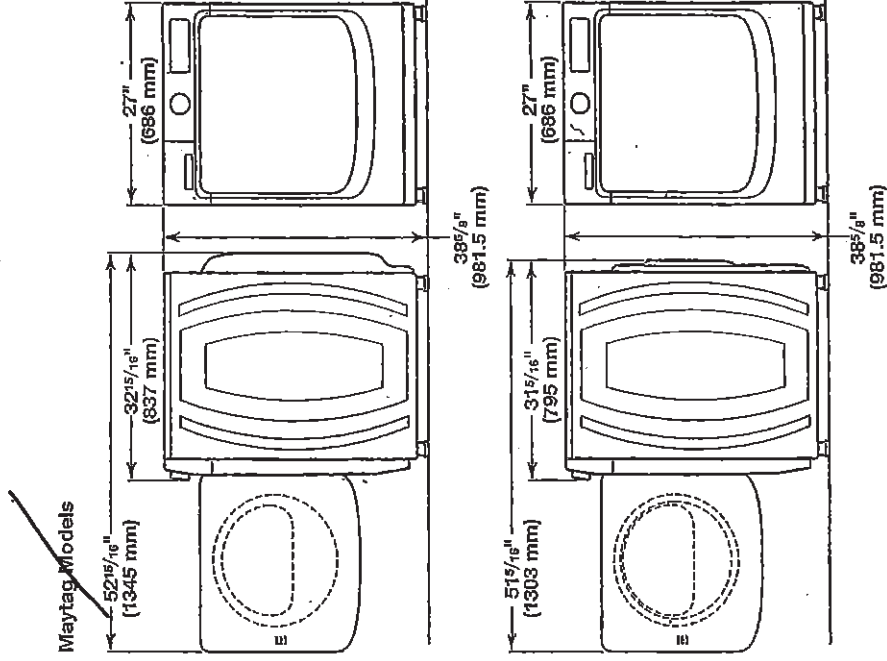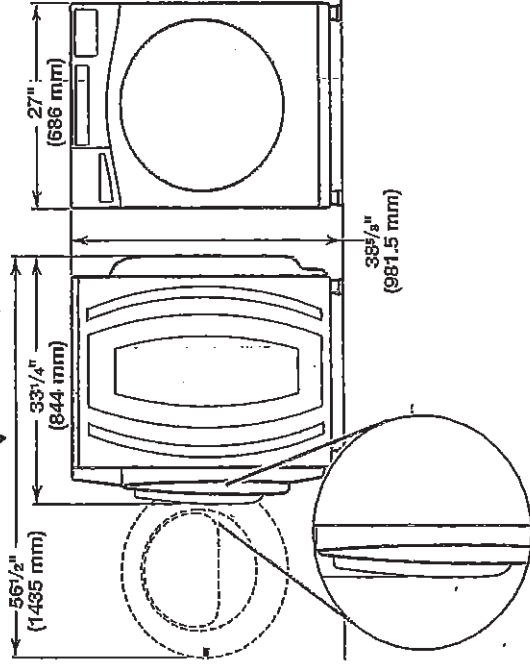

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

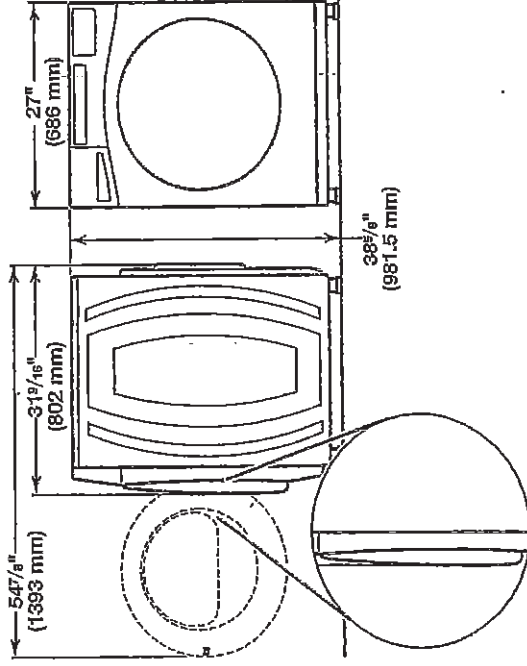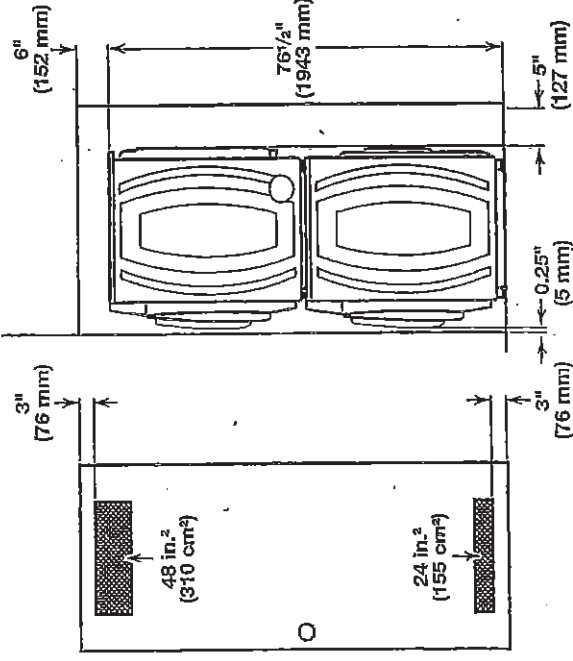

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.


DU

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON


33 of 36

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation: X

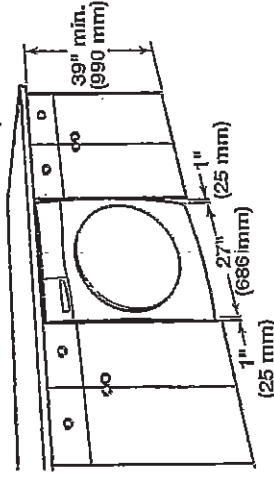

Recessed area or closet installation: X

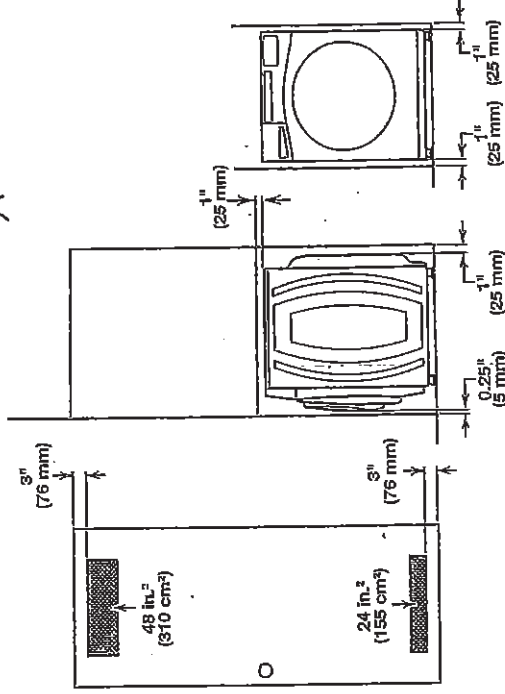

Custom cabinet installation: X

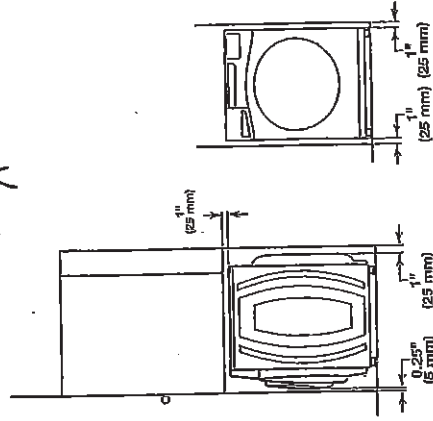


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

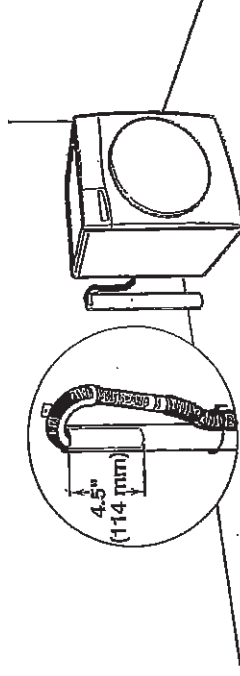


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

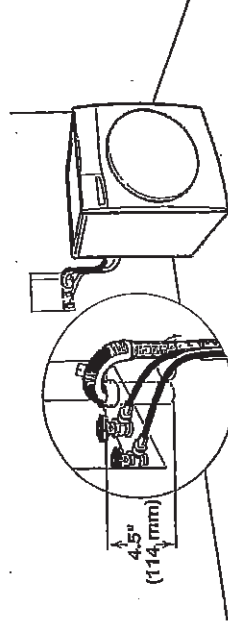

See requirements for floor standpipe drain system.

Laundry tub drain system

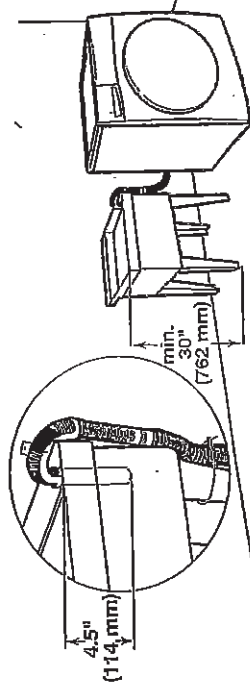

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


DV

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

34 of 36

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Certified English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW

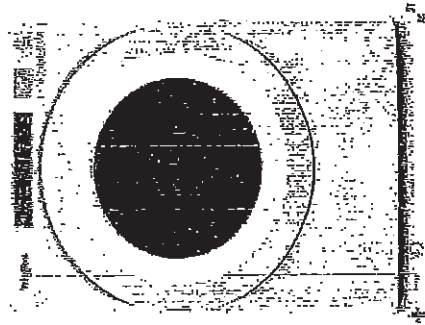

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	69.53 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	96
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60
Power Cord Included	Yes


DV

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

35 of 36

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

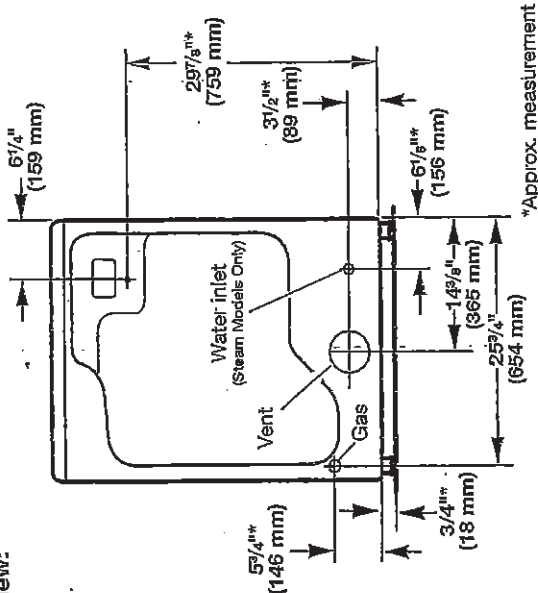

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

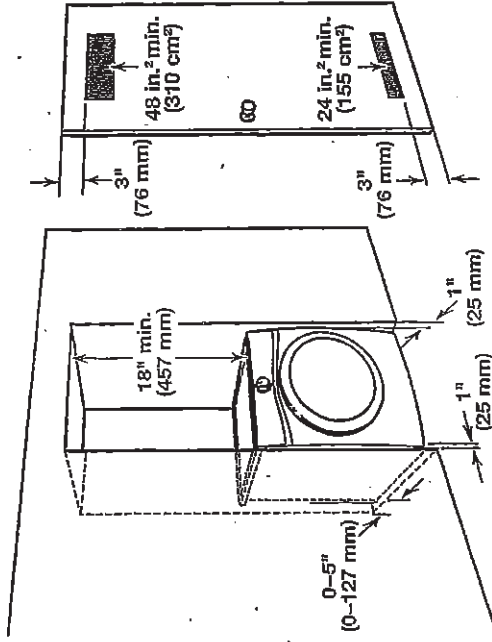

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation: X

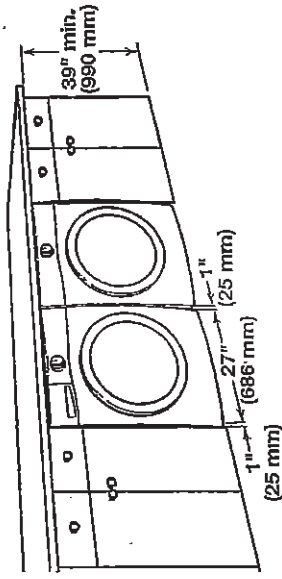

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations.

The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFP, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

2

C2 COUNTRY LANE
LOT 55-8
20-2505 CRN ELEV B
THE WORTHINGTON

36 of 36

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.


Failure to do so can result in death, explosion, or fire.

You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
 - A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
 - If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
 - Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
 - Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
 - Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
 - For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
 - The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.
- IMPORTANT:** Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view:

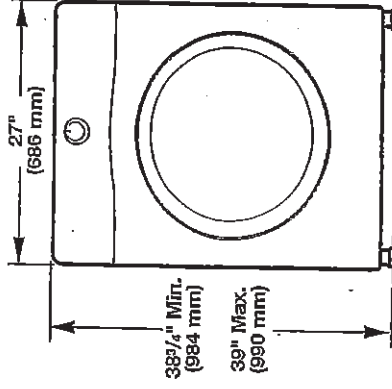


Side view:

Whirlpool Models

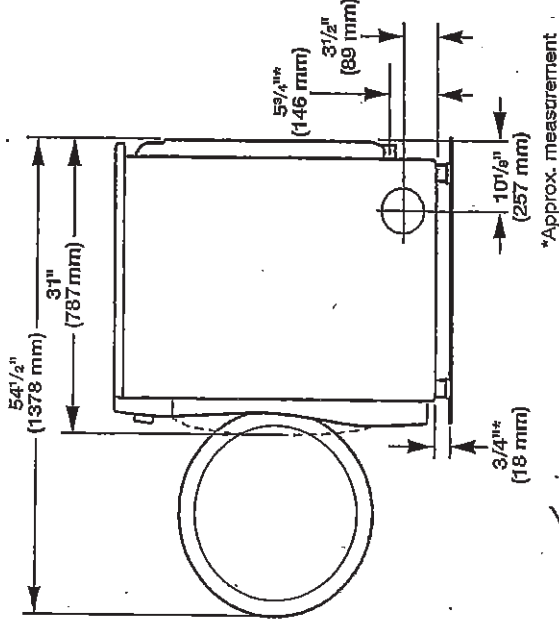

*Approx. measurement

Maytag Models

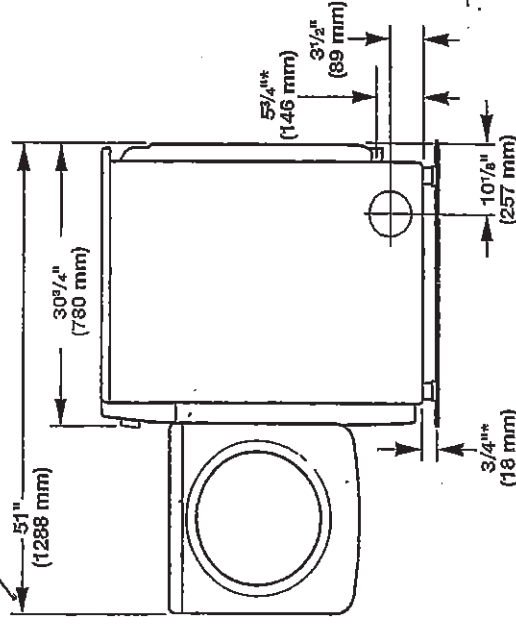

*Approx. measurement

D