HEATHWOOD

Interior Finishing Selection Sheet

12 OF 17

17-Jun-21

LOT 057-1

20-2505-CR ELEV A THE WORTHINGTON

PURCHASERS: GEORGIA PAPANIKOLAOU CONTACT NO: 905-550-7775
EVDOKIMOS PAPANIKOLAOU 905-995-1251

VENDOR: **HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4**

			UPG
Appliances			
6-9117	Kitchen	HoodFan	☑ CYCLONE 30" STAINLESS CHIMNEY/CANOPY HOODFAN STAINLESS STEEL (SCB50030) UPG 30" SCB 51930 PAGES 32-33
Cabinetry			
1-9184	Kitchen	Cabinet Colour/Style	☑ BOSTON RAIN CLOUD Classic Plus UPG MDF PAINTED
3-2086	Kitchen	Cabinet Hardware	☐ HARDWARE 9677 STD
25-9163	Main Bathroom	Cabinet Colour/Style	☐ GEORGIAN RAIN CLOUD VIKING II STD 3DL
29-2086	Main Bathroom	Cabinet Hardware	☐ HARDWARE 9677 STD
28-8796	Main Bathroom	Countertop	☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46 Formica
20-9164	Master Ensuite	Cabinet Colour/Style	☐ GEORGIAN MOONLIGHT VIKING II STD 3DL
22-2086	Master Ensuite	Cabinet Hardware	☐ HARDWARE 9677 STD
21-8796	Master Ensuite	Countertop	☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46 Formica
359-9164	Optional Lower Level Bath	Cabinet Colour/Style	☐ GEORGIAN MOONLIGHT VIKING II STD 3DL
360-2086	Optional Lower Level Bath	Cabinet Hardware	☐ HARDWARE 9677 STD
361-8796	Optional Lower Level Bath	Countertop	☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46 Formica
Carpet			
37-9248	Bedroom 2	Flooring	☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD
38-9248	Bedroom 3	Flooring	☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD
14-9248	Family Room	Flooring	☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD
367-9248	Lower Level Hall	Flooring	☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD
36-9248	Master Bedroom	Flooring	☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD
52-1079	Throughout	Underpad	☐ Underpad 500 Series STD
Ceramics			
16-9106	Foyer	Flooring	☑ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

June 17, 2021 — June 17 2021

Date Purchaser — APPROVED — Date Décor Consultant

Date Purchaser — Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HEATHWOOD

Interior Finishing Selection Sheet

17-Jun-21

LOT 057-1 — 20-2505-CR ELEV A THE WORTHINGTON

PURCHASERS: GEORGIA PAPANIKOLAOU CONTACT NO: 905-550-7775
EVDOKIMOS PAPANIKOLAOU 905-995-1251

VENDOR: **HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4**

Ceramics

		UPG
17-7705	Foyer Grout	☐ Upgrade Grout (01) Alabaster U/G
348-8262	Laundry Mud Room Flooring	☐ Serpantine Grey TR.ST.GRY.1313 STD 13x13 SEE SKETCH FOR TILE PATTERN DIRECTION
349-7704	Laundry Mud Room Grout	☐ Grout (19) Pearl Gray STD
30-9257	Main Bathroom Flooring	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13
31-2225	Main Bathroom Grout	☐ Grout (27) Silver STD
112-9020	Main Bathroom Tub Wall Tile	☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED VERTICALLY
113-2226	Main Bathroom Tub Wall Tile Grout	☐ Grout (00) White STD
23-9106	Master Ensuite Floor Tile	☑ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte
24-2225	Master Ensuite Floor Tile Grout	☐ Grout (27) Silver STD
73-8661	Master Ensuite Shower Floor Tile	☐ Ontario Series Mosaic Snow White Matte OD.ON.SWT.0202.MT.N STD 2 x 2
74-2226	Master Ensuite Shower Floor Tile Grout	☐ Grout (00) White STD
147-8923	Master Ensuite Shower Jamb(s) and Sill(s)	☐ Shower Jamb / Sill Thassos White STD
104-9106	Master Ensuite Shower Wall Tile	☑ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte
105-2225	Master Ensuite Shower Wall Tile Grout	☐ Grout (27) Silver STD
350-9257	Optional Lower Level Bath Flooring	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13
351-2225	Optional Lower Level Bath Grout	☐ Grout (27) Silver STD
352-9020	Optional Lower Level Bath Tub Wall Tile	☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED VERTICALLY
353-2226	Optional Lower Level Bath Tub Wall Tile Grout	☐ Grout (00) White STD
32-9104	Powder Room Flooring	☑ Madison Series Antracite Matte GE.MD.ANT.1818.MT UPG 1 18" X 18" Matte
33-7704	Powder Room Grout	☐ Grout (19) Pearl Gray STD
53-2232	Throughout Thresholds	☐ Metal Thresholds STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

June 17/21 — Date — Purchaser

June 17 21 — Date — Décor Consultant

APPROVED

June 17/21 — Date — Purchaser

-06- 22 2021 — Date Approved — HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HEATHWOOD

Interior Finishing Selection Sheet

22-Jun-21

LOT 057-1 — 20-2505-CR ELEV A THE WORTHINGTON

PURCHASERS: GEORGIA PAPANIKOLAOU — CONTACT NO: 905-550-7775
EVDOKIMOS PAPANIKOLAOU — 905-995-1251

VENDOR: **HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4**

		UPG
Electrical		
90-5796 Throughout Switches and Plug	☐ Decora White Switches and Plugs	STD
Fireplace		
136-8891 Great Room Fireplace Mantle	☐ Paint Grade Mantle- Cabinet (Per Plan) WHITE	NF-17 STD
135-8865 Great Room Fireplace Type	☐ Dimplex FP3033HL Electric Fireplace	
Granite		
2-9121 Kitchen Countertop	☑ MSI Quartz ICED WHITE	Group 1 UPG 3/4" with Mitered Edge
Hardwood		
99-9060 Dining Room Flooring	☑ White Oak PEARL-Vintage Northern Solid Sawn : White Oak : Sculpted Pearl-APOLLO-3/4 inch x 5 inch APOLLO White Oak PEARL	3/4" X 5"
11-9060 Great Room Flooring	☑ White Oak PEARL-Vintage Northern Solid Sawn : White Oak : Sculpted Pearl-APOLLO-3/4 inch x 5 inch APOLLO White Oak PEARL	3/4" X 5"
338-9060 Kitchen Flooring	☑ White Oak PEARL-Vintage Northern Solid Sawn : White Oak : Sculpted Pearl-APOLLO-3/4 inch x 5 inch APOLLO White Oak PEARL	3/4" X 5"
98-9060 Main Hall Flooring	☑ White Oak PEARL-Vintage Northern Solid Sawn : White Oak : Sculpted Pearl-APOLLO-3/4 inch x 5 inch APOLLO White Oak PEARL	3/4" X 5"
368-9060 Study Niche Flooring	☑ White Oak PEARL-Vintage Northern Solid Sawn : White Oak : Sculpted Pearl-APOLLO-3/4 inch x 5 inch APOLLO White Oak PEARL	3/4" X 5"
35-9060 Upper Hall Flooring	☑ White Oak PEARL-Vintage Northern Solid Sawn : White Oak : Sculpted Pearl-APOLLO-3/4 inch x 5 inch APOLLO White Oak PEARL	3/4" X 5"
Interior Stairs		
116-1713 Basement Stairs Type	☐ Paint Grade Stairs	STD
45-1712 Stairs to Lower Level Type	☐ Oak Stairs	UPG_1
45-1712 Stairs to Lower Level Type	☐ Oak Stairs	UPG_1
39-1712 Stairs to Upper Level Type	☐ Oak Stairs	UPG_1

Interior Trim

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

June 22/21 — Signatures on file — Purchaser — Date

June 22/21 — APPROVED — IRIT SALEM — Date — Décor Consultant

Date — Purchaser

~~Date Approved~~ — **HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4**

HEATHWOOD

Interior Finishing Selection Sheet 15 OF 17

17-Jun-21

LOT 057-1

20-2505-CR ELEV A THE WORTHINGTON

PURCHASERS: GEORGIA PAPANIKOLAOU CONTACT NO: 905-550-7775
EVDOKIMOS PAPANIKOLAOU 905-995-1251

VENDOR: **HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4**

		UPG
Interior Trim		
91-9374 Throughout Trim Size	☐ **4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings STD**	
Painting		
46-7761 Stairs to Lower Level Colour	☐ **Stain handrail, stringers, treads,risers, nosing & posts. (Metal pickets) STAIN SAMBUCA- COLOUR WILL BE DIRRENT FROM HARDWOOD FLOOR**	
49-7761 Stairs to Lower Level Handrail/Pickets/Posts Type	☐ **Stain handrail, stringers, treads,risers, nosing & posts. (Metal pickets) STAIN SAMBUCA- COLOUR WILL BE DIRRENT FROM HARDWOOD FLOOR**	
40-7761 Stairs to Upper Level Colour	☐ **Stain handrail, stringers, treads,risers, nosing & posts. (Metal pickets) STAIN SAMBUCA- COLOUR WILL BE DIRRENT FROM HARDWOOD FLOOR**	
44-7761 Stairs to Upper Level Handrail/Pickets/Posts Colour	☐ **Stain handrail, stringers, treads,risers, nosing & posts. (Metal pickets) STAIN SAMBUCA- COLOUR WILL BE DIRRENT FROM HARDWOOD FLOOR**	
240-1716 Throughout Trim - Paint Colour	☐ **Trim WHITE STD**	
51-1717 Throughout Walls - Paint Colour	☐ **Wall WARM GREY 22 STD**	
Plumbing		
266-1737 Main Bathroom Plumbing Fixture (Colour)	☐ **Plumbing Fixtures WHITE STD**	
149-1737 Master Ensuite Plumbing Fixture (colour)	☐ **Plumbing Fixtures WHITE STD**	
362-1737 Optional Lower Level Bath Plumbing Fixture (Colour)	☐ **Plumbing Fixtures WHITE STD**	
34-1737 Powder Room Plumbing Fixture (Colour)	☐ **Plumbing Fixtures WHITE STD**	

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

June 17, 2021 — Date — Purchaser

June 17, 2021 — Date — Purchaser

7-21 — Date

Date Approved

Décor Consultant

HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HEATHWOOD

17-Jun-21

Sales Selection Sheet 16 of 47

LOT 057-1 — 20-2505-CR ELEV A THE WORTHINGTON

PURCHASERS: GEORGIA PAPANIKOLAOU — CONTACT NO: 905-550-7775
EVDOKIMOS PAPANIKOLAOU — 905-995-1251

VENDOR: **HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4** — **HST #**

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances

2171 **Cyclone 30" Wall Mount Chimney Hood SS** **KITCHEN** Qty: 1
SCB51930 PAGES - 32-33

Cabinetry

1568 **Optional Upgrade** **Classic Kitchen** Qty: 1
Optional Classic Kitchen (Crown Moulding, Deep Fridge Uppers, Soft Close Drawers, Soft Close Doors and ~~2 Tone Island~~) CLASSIC PLUS

1562 **Optional Upgrade** **Kitchen** Qty: 1
CLASSIC PLUS

1296 **Optional Extras** **KITCHEN** Qty: 1
19B- 45cm wide pull-out door base cabinet waste/recycle centre with soft-close ([2] 35L bins) (available only with 45cm wide cabinet) Viking ADJUST SINK LOCATION WITH TOP DRAWER
SEE SKETCH # 9 PAGE# 22

1341 **Optional Extras** **KITCHEN** Qty: 1
33H- Base cabinet for under-counter microwave/small appliance with trim kit with drawer below (supply specs) Classic
SEE SKETCH # 9 PAGE 22 SPECS TO FOLLOW

1567 **Optional Upgrade** **KITCHEN Valance** Qty: 1
Optional Valance (Trim Only) VIKING IV

1321 **Optional Extras** **MASTER BATHROOM** Qty: 1
11D- Vanity bank of drawers (max. width 55cm) Viking SKETCH # 10 PAGE 23

Ceramics

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

June 17, 2021 — Date — Purchaser

June 17, 2021 — Date — APPROVED — Décor Consultant

June 17/21 — Date — Purchaser

Date Approved — HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HEATHWOOD

17-Jun-21

Sales Selection Sheet

OF

LOT 057-1

20-2505-CR ELEV A THE WORTHINGTON

PURCHASERS: GEORGIA PAPANIKOLAOU CONTACT NO: 905-550-7775
EVDOKIMOS PAPANIKOLAOU 905-995-1251

VENDOR: **HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4** **HST #**

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

				AMOUNT:
1945	Upgrade 1 Tile	**Foyer Floor**	Qty: 1	
1945	Upgrade Grout	**Foyer Floor**	Qty: 1	
1949	Upgrade 1 Tile	**M. Ensuite Floor**	Qty: 1	
2119	**Upgrade Wall: Install Floor tile on Wall** SEE Modifications FOR PRICE	**M. Ensuite Wall**	Qty: 1	
1946	Upgrade 1 Tile	**Powder Floor**	Qty: 1	

Granite

882	**Optional Upgrade** Countertop 3/4" GROUP 1 with double edge	**Kitchen**	Qty: 1	

Hardwood

1187	**Vintage** 5" WHITE OAK SCULPTED NSS UV-Oil or Pearl	**DINING**	Qty: 1	
1186	**Vintage** 5" WHITE OAK SCULPTED NSS UV-Oil or Pearl	**GREAT/BRK**	Qty: 1	
1197	**Vintage** 5" WHITE OAK SCULPTED NSS UV-Oil or Pearl	**KITCHEN**	Qty: 1	

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

June 17/21 — Date — Purchaser

June 17, 2021 — Date — Purchaser

June 17 21 — Date APPROVED — Décor Consultant

~~Date Approved~~ **HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4**

HEATHWOOD

17-Jun-21

Sales Selection Sheet 8 of 17

LOT	057-1	20-2505-CR ELEV A THE WORTHINGTON
PURCHASERS:	GEORGIA PAPANIKOLAOU	CONTACT NO: 905-550-7775
	EVDOKIMOS PAPANIKOLAOU	905-995-1251
VENDOR:	**HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4**	**HST #**

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

				AMOUNT:
1188	**Vintage** 5" WHITE OAK SCULPTED NSS UV-Oil or Pearl	**M. HALL**	Qty: 1	
1189	**Vintage** 5" WHITE OAK SCULPTED NSS UV-Oil or Pearl	**STUDY/NICHE**	Qty: 1	
1190	**Vintage** 5" WHITE OAK SCULPTED NSS UV-Oil or Pearl	**UPR HALL**	Qty: 1	

Mirrors/Glass Products

545	**Shower Upgrade** Upgrade to Frameless clear glass with D-Ring Handle in chrome	**Master Ensuite**	Qty: 1	

Modifications

40		**MASTER BATHROOM SHOWER**	Qty: 9.62	
	MASTER BATHROOM SHOWER WALL (FLOOR TILE ON WALL)			

Plumbing

267	**Kitchen Sink Upgrade** Blanco Kitchen Sink Quatrus U 1 Maxi #401248 (32" x 18") Undermount 1 Bowl 9" Deep in Stainless Steel PAGE 25	**KITCHEN**	Qty: 1	
159	**Moen -CHATEAU** Posi-Temp Shower with 3 Function Diverter Valve, Slide Bar with Handheld and Showerhead Chrome (Model: 62320/3372/T4171/TL182EP/3669EP/A725) PAGE 31	**MASTER BATHROOM SHOWER**	Qty: 1	

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

June 17, 2021 — Date — Purchaser

June 17/21 — Date — Purchaser

June 17. 21 — Date APPROVED — Décor Consultant

Date Approved — HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HEATHWOOD

17-Jun-21

Sales Selection Sheet

OF

LOT	**057-1**	20-2505-CR ELEV A THE WORTHINGTON
PURCHASERS:	GEORGIA PAPANIKOLAOU	CONTACT NO: 905-550-7775
	EVDOKIMOS PAPANIKOLAOU	905-995-1251
VENDOR:	**HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4**	**HST #**

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

June 17, 2021 — Date — Purchaser

June 17, 2021 — Purchaser

June 17, 21 — Date — Décor Consultant

Date Approved — HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

20 OF 47

The Worthington

20-2505 CRN ELEV. A

ELEVATION A: 2,505 SQ FT

Sketch # 7

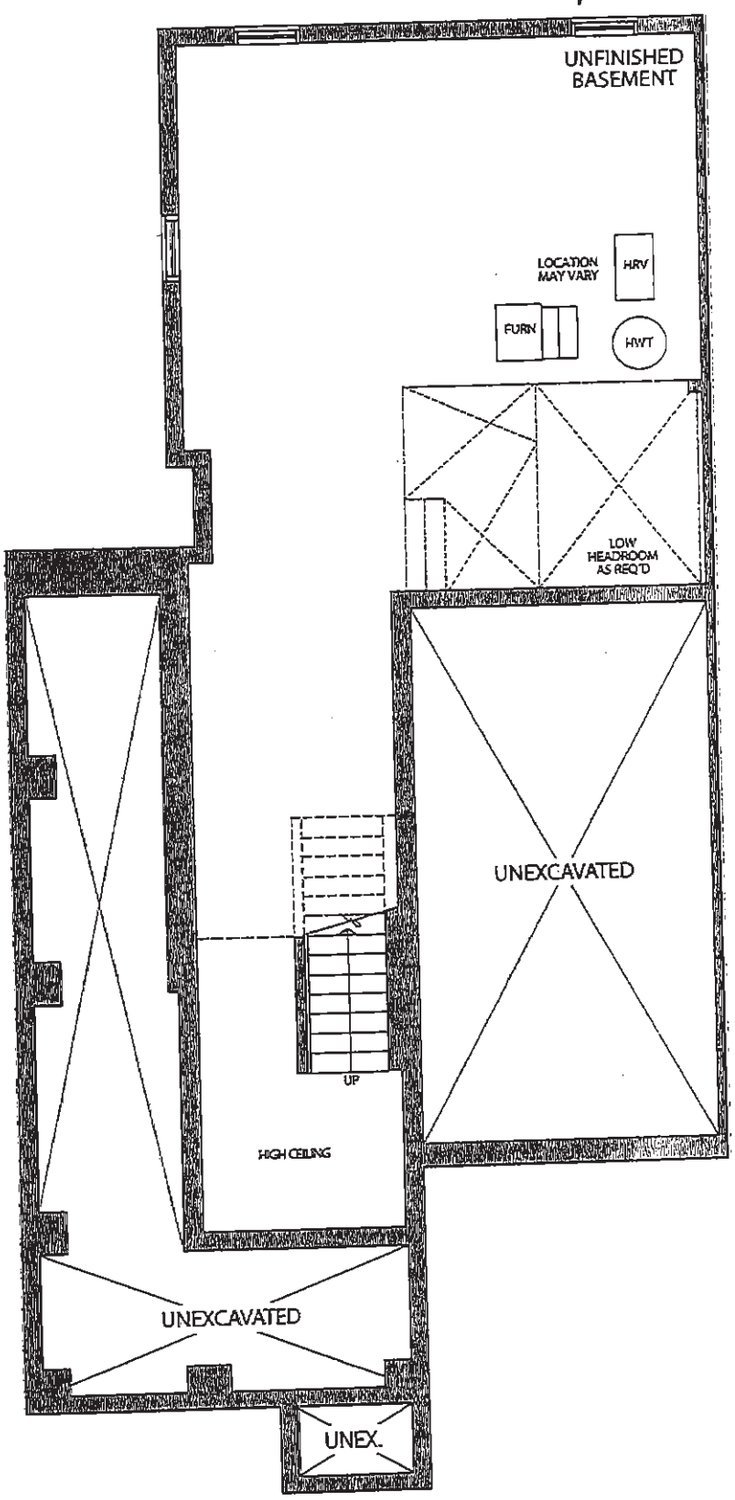

BASEMENT
ELEVATION A

Legal Plan July 22, 2020

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

21 OF 47

The Worthington

20-2505 CRN ELEV. A

ELEVATION A: 2,505 SQ FT

Sketch # 8

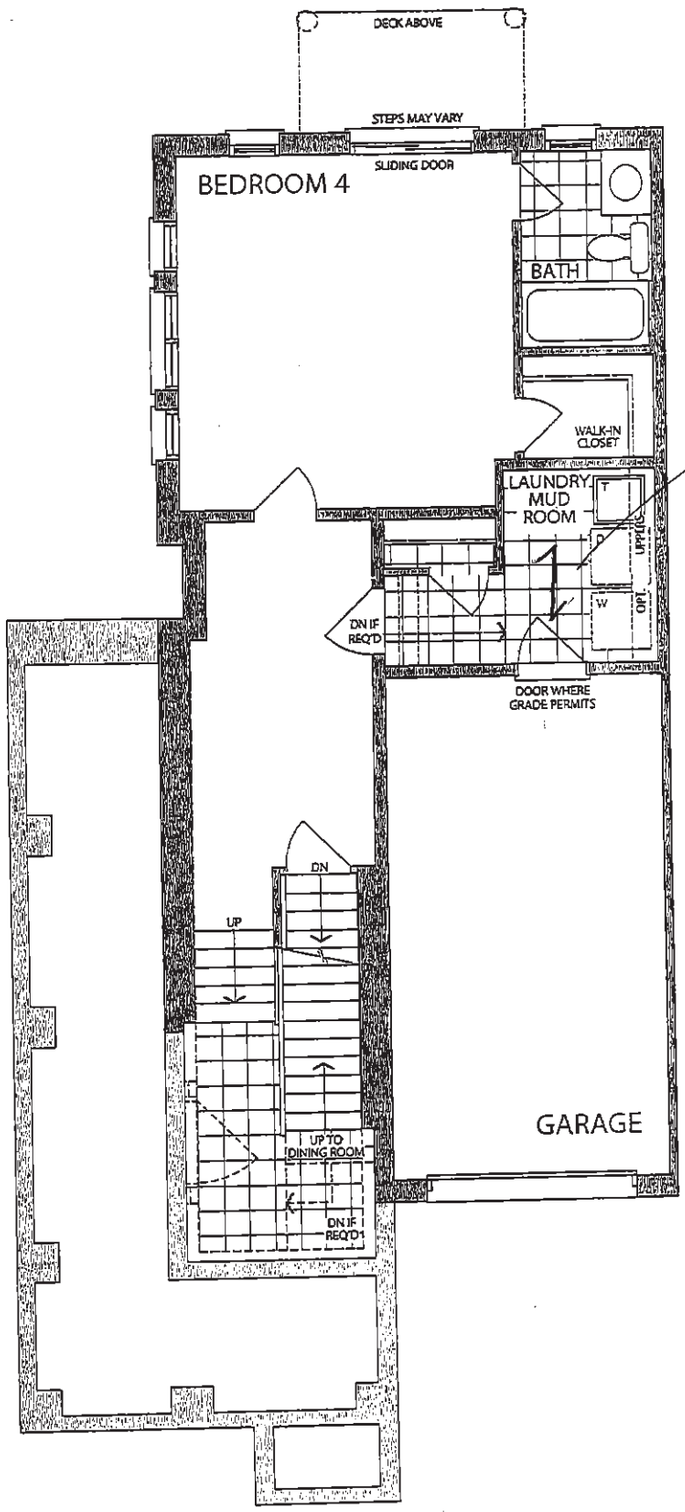

TILE PATTERN DIRECTION

LOWER LEVEL
ELEVATION A

Legal Plan July 22, 2020

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

22 OF 47

Sketch #9

The Worthington

20-2505 CRN ELEV. A

ELEVATION A: 2,505 SQ FT

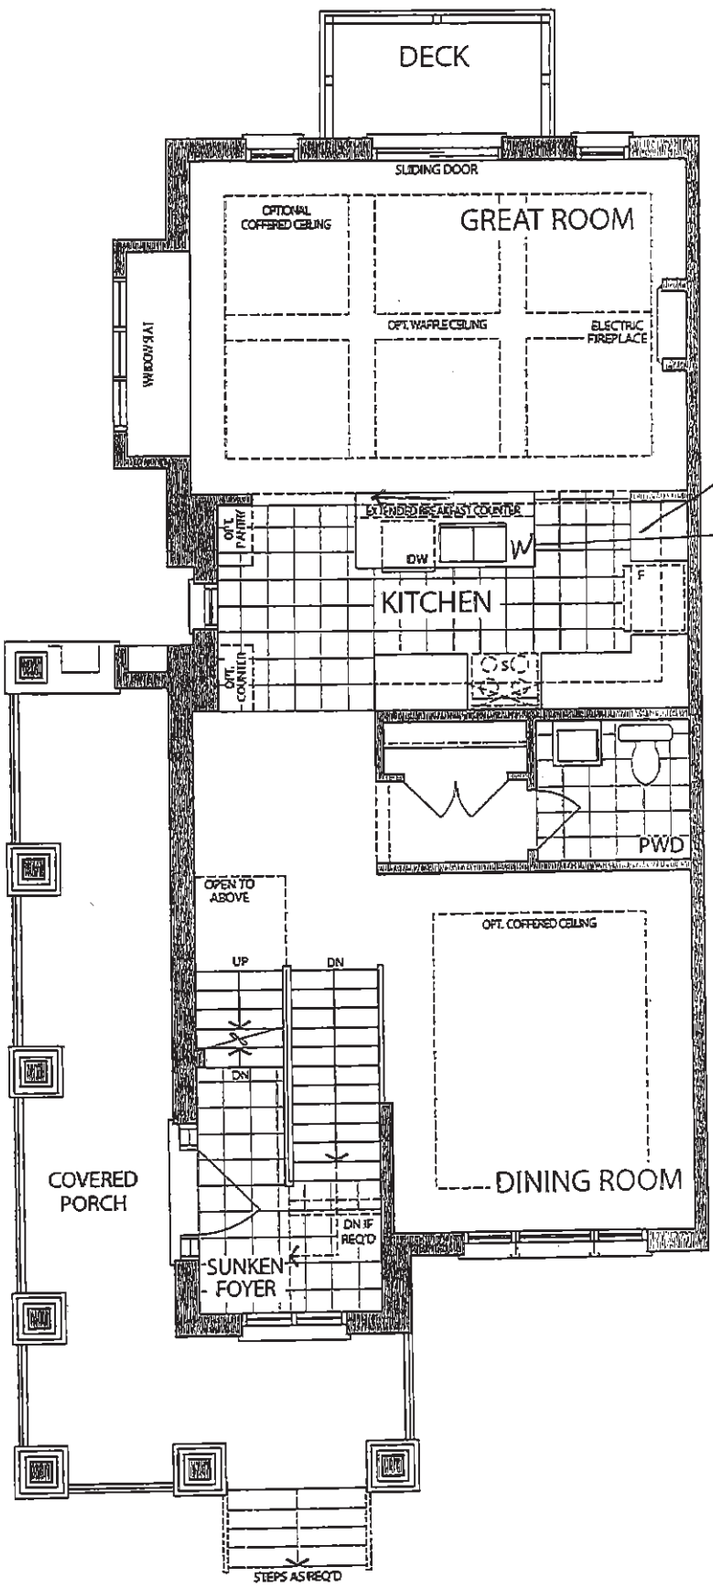

BASE MICROWAVE CABINET

WASTE/RECYCLE BINS

MAIN LEVEL
ELEVATION A

Legal Plan July 22, 2020

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

23 OF 47

Sketch #10 *The Worthington*

20-2505 CRN ELEV. A

ELEVATION A: 2,505 SQ FT

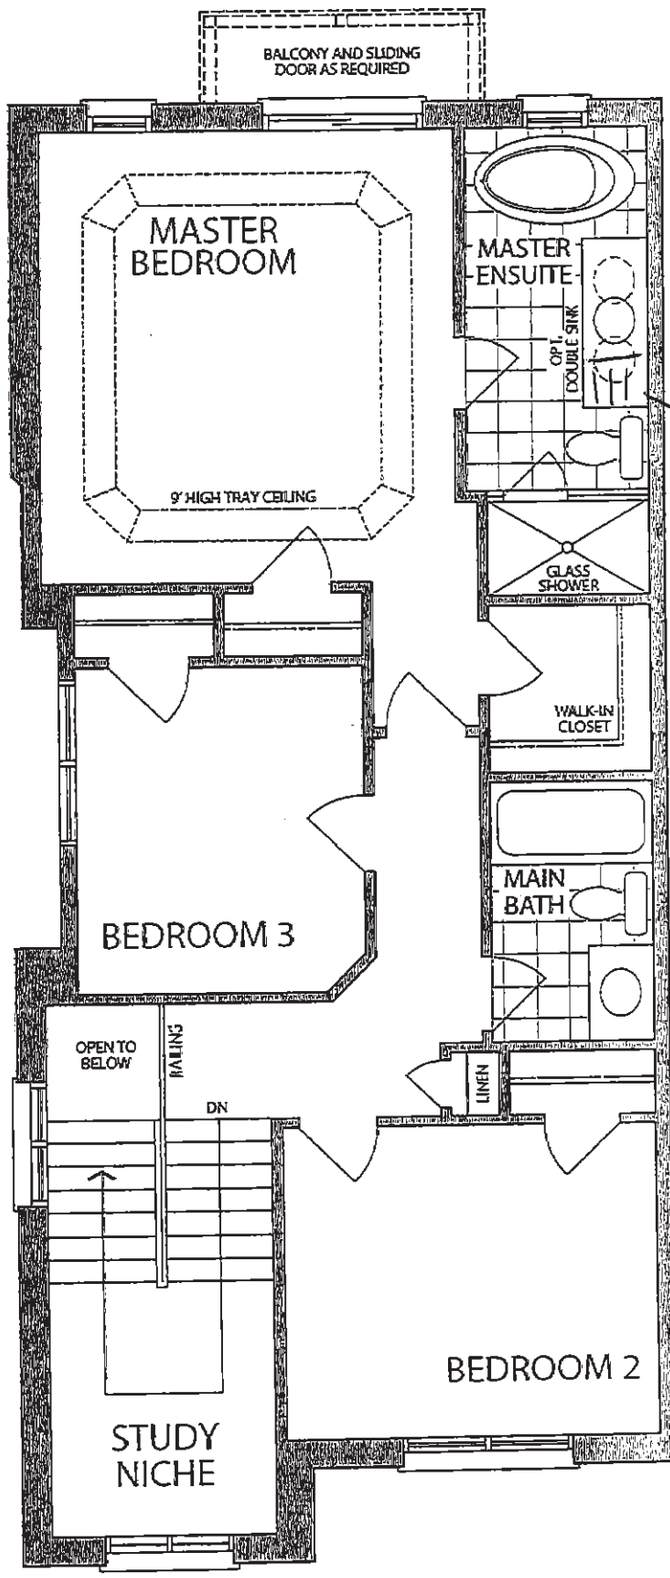

UPPER LEVEL
ELEVATION A

Legal Plan July 22, 2020

C2 COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

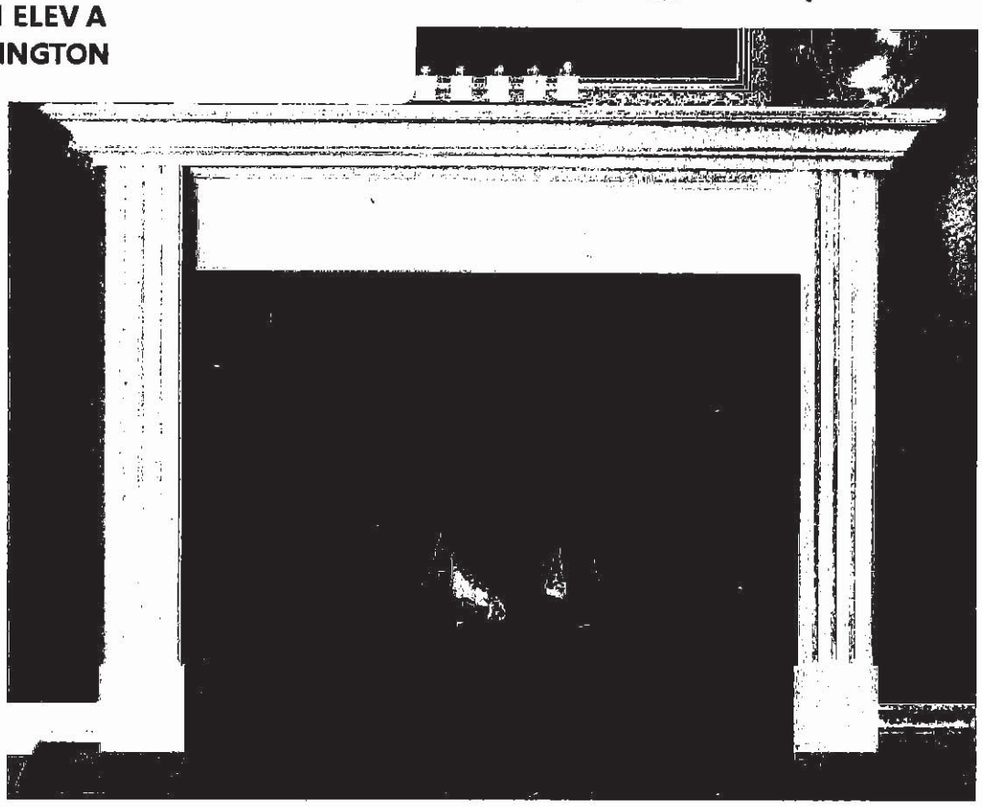

STANDARD NF 15 Mantel X

Clean apron finish with fluted legs

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH –PRICED SEPARATELY)

CABINET ✓

STANDARD NF 17 Mantel

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH –PRICED SEPARATELY)

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

25 OF 47

BLANCO

BLANCO QUATRUS U Maxi Stainless Steel Undermount Sink

This new German-engineered sink from BLANCO features a 9-inch bowl depth and zero-radius bowl corners. Made of durable 18 gauge stainless steel.

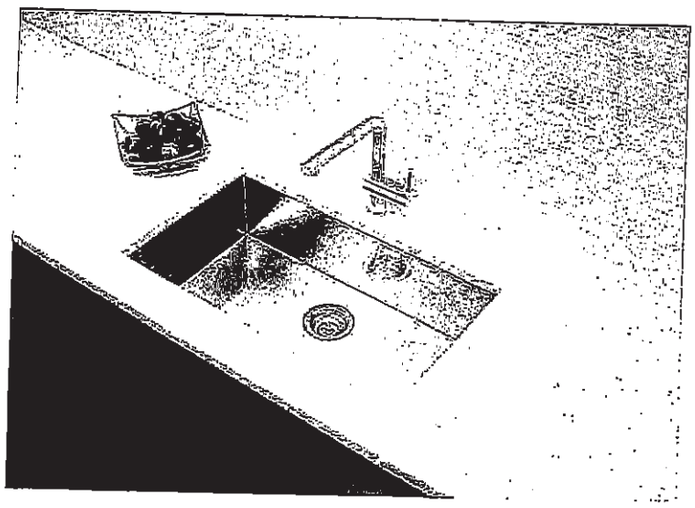

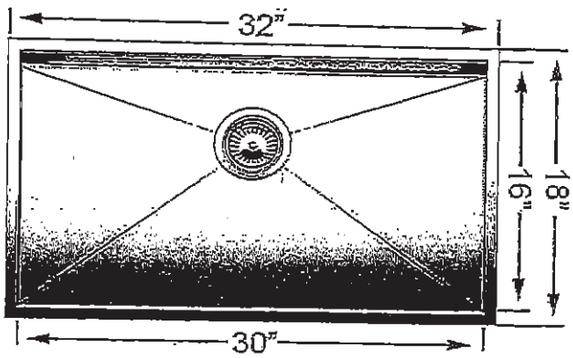

Model No.	Bowl Depth	
	Main	Secondary
401248	9" (230 mm)	

Material

Durable 18 gauge stainless steel

Brushed finish

Specifications

Minimum Cabinet Size: 33" (840 mm)

Undermount installation

Rear positioned drain hole for maximum usable bowl and cabinet storage space

Zero-radius corners and x-pattern drain grooves

Sound deadening system included

Template included

3 1/2" stainless steel strainer included

Limited Lifetime Warranty

Accessories	
Stainless Steel Grid	223192

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

26 OF 47

STANDARD KITCHEN FAUCET

Align

Modern



Single Handle Pull-Down Kitchen Faucet‡

Model 7565†

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

27 of 47

American Standard

BOULEVARD® PEDESTAL SINK
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

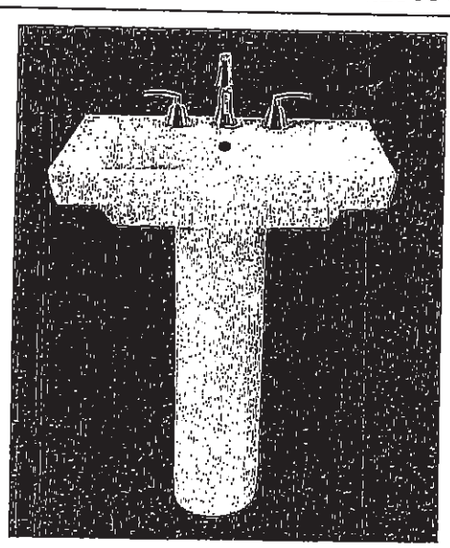

- ☐ **0641.800** Faucet holes on 8" (203mm) centers (Illustrated)
- ☐ **0641.400** Faucet holes on 4" (102mm) centers
- ☐ **0641.100** Center hole only
  - Classic styled rectangular pedestal lavatory
  - Vitreous china
  - Rear overflow
  - Supplied with mounting kit
  - Right Height® for greater comfort during use
  - Faucet ledge with large deck area (faucet not included)
  - **Design coordinates with Boulevard® Toilet**
  - Basin has flat bottom to also allow use as an **above counter** sink or a **drop-in** sink (with u-shaped cut out)

Nominal Dimensions:
24" x 19" x 35-1/2"
(610 x 483 x 902mm)

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

- ☐ **0641.008** Pedestal top-8" (203mm) centers
- ☐ **0641.004** Pedestal top-4" (102mm) centers
- ☐ **0641.001** Pedestal top-center hole only
- ☐ **0010.000** Pedestal only

Bowl sizes:
17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -
Meets or Exceeds the Following Specifications:
- ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:
- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:

* See faucet section for additional models available

© 2014 AS America Inc.

American Standard

BARRIER FREE

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

COLONY™ COUNTERTOP SINK

VITREOUS CHINA

28447

COLONY COUNTERTOP SINK

- Vitreous china
- Self-rimming
- Front overflow
- Supplied with template
- Faucet deck
  (Faucet shown not included)

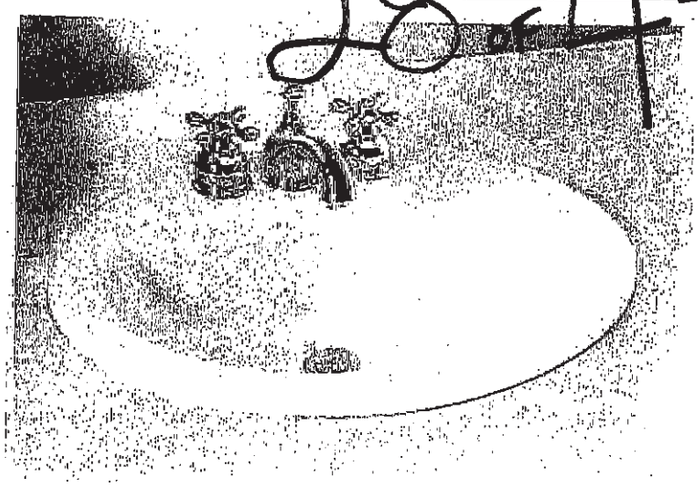

☑ **0346 803**
Faucet holes on 203mm (8") centres

☐ **0346 403** (Illustrated)
Faucet holes on 102mm (4") centres

☐ **0346 001**
Centre hole only

Nominal Dimensions:
521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:
422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

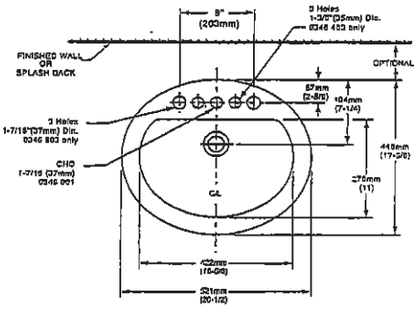



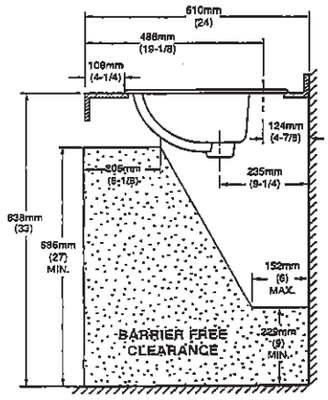

COMPLIANCE CERTIFICATIONS –
Meets or exceeds the following Specifications:
- ASME A112.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.

To Be Specified

- ☐ Colour: ☑ White ☐ Bone ☐ Silver Gray ☐ Linen
- ☐ Faucet*:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

* See faucet section for additional models available

© 2000 American Standard Inc.

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

Demi CF2007

C2 COUNTRY LANE
LOT 57-1
20-2505 CRB EKEV A
THE WORTHINGTON

30 OF 47

Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL

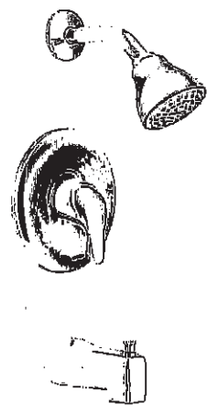

Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†
OR
Posi-Temp Valve and Tub/Shower Trim with Eco-Performance Easy Clean® XL
Model 62320 / TL183EP†
(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS

2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

31 of 47

MASTER ENSUITE SHOWER

Chateau

Transitional

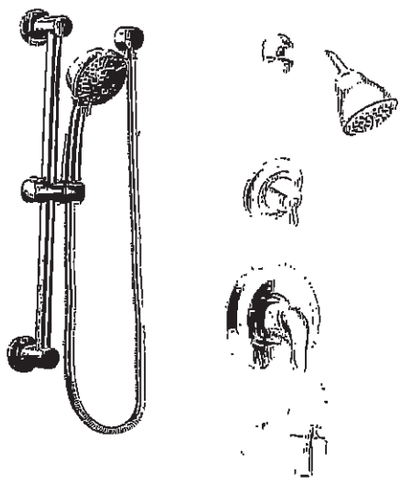

Posi-Temp® with 3 Function Diverter Valve, Slide Bar with Handheld, Showerhead and Tub Spout**
Model 62320 / 3372 / 128284 / T4171† / TL183EP † / 3669EP † / A725 †

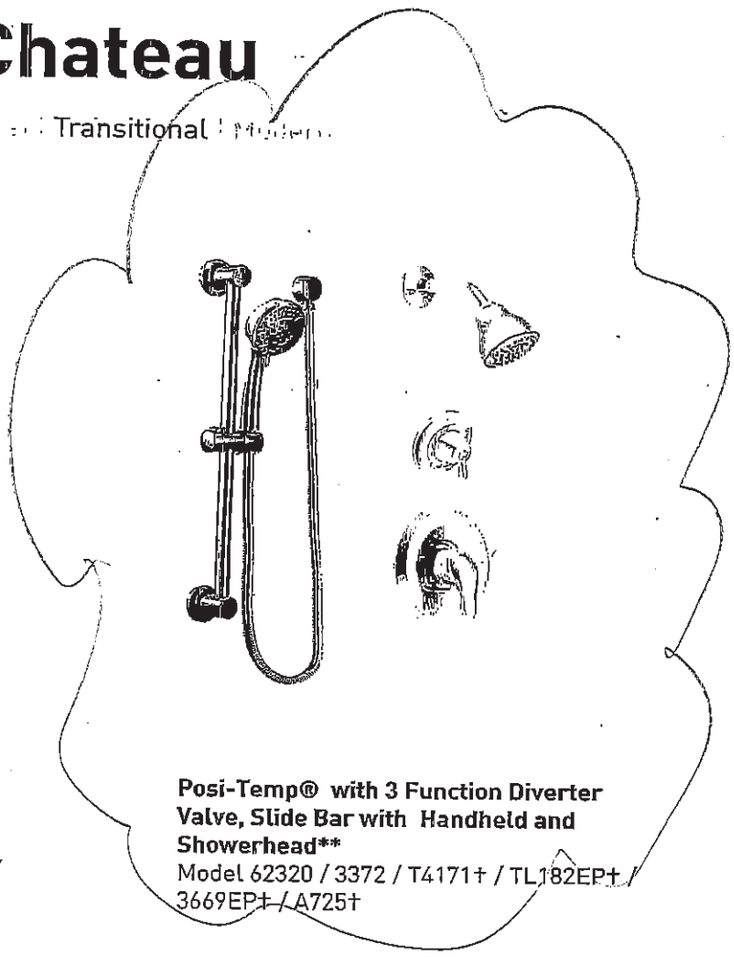

Posi-Temp® with 3 Function Diverter Valve, Slide Bar with Handheld and Showerhead**
Model 62320 / 3372 / T4171† / TL182EP† / 3669EP† / A725†

**Please refer to Vertical Spa Guide for installation #700106.
Matching tub drain assembly available. Please see *Bath Hardware and Home Care* Section.
† To order, combine the model number with one of these finish letters

Chrome
(use faucet number only)

MOEN
Buy it for looks. Buy it for life.®

C2 COUNTRY LANE
LOT 57-1
20-2505 CRB EKEV A
THE WORTHINGTON

32 OF 47

SC(B)519 | ALITO Collection

Cyclone®
Breathe Better

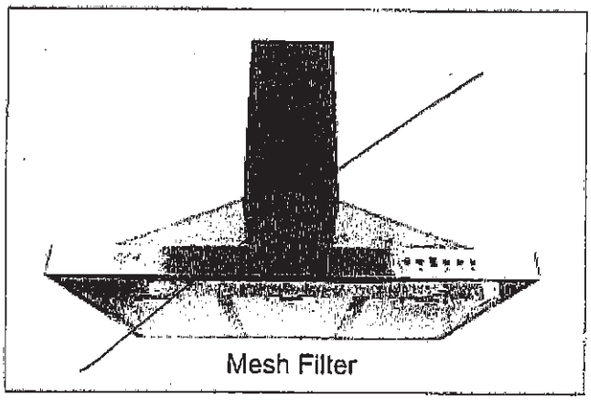
Mesh Filter

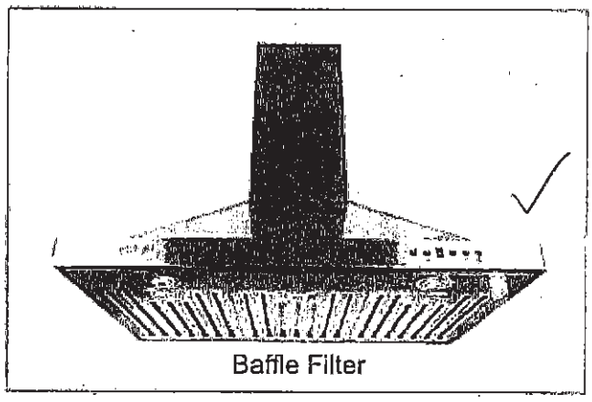
Baffle Filter

Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)519 is fitted with a time-delay OFF feature up to nine minutes, a 550 CFM fan, two bright front mounted LED lights and a digital three-speed push button control panel.

Green Features

3 Speed Push Button Control Panel

Long-Lasting LED Lights

Time-Delay OFF Feature

Grease Cup

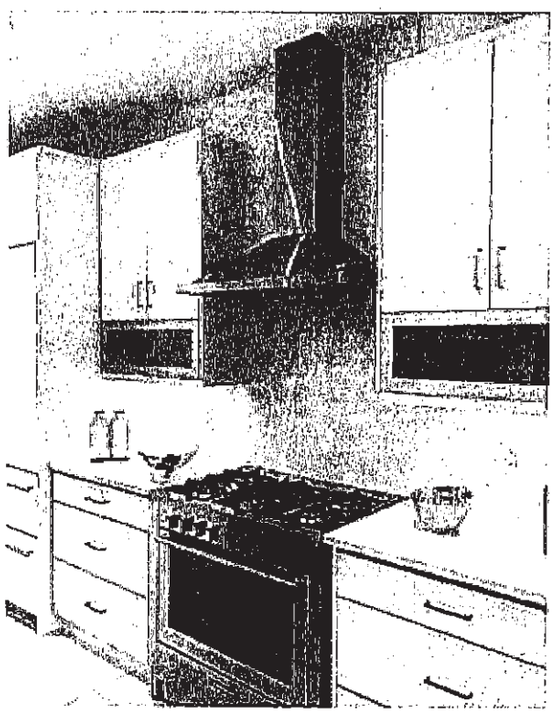

Model	Colour	Ducting	Filters	Size	CFM
~~SC51924~~	~~Stainless Steel~~	~~6"~~	~~Mesh~~	~~24"~~	~~550~~
~~SC51930~~	~~Stainless Steel~~	~~6"~~	~~Mesh~~	~~30"~~	~~550~~
~~SC51936~~	~~Stainless Steel~~	~~6"~~	~~Mesh~~	~~36"~~	~~550~~
~~SCB51924~~	~~Stainless Steel~~	~~6"~~	~~Baffle~~	~~24"~~	~~550~~
SCB51930	Stainless Steel	6"	Baffle	30"	550 ✓
~~SCB51936~~	~~Stainless Steel~~	~~6"~~	~~Baffle~~	~~36"~~	~~550~~

Cyclone Range Hoods Inc.
1361 Huntingwood Drive, Unit 16. Toronto, ON. M1S 3J1. Canada.
Toll Free. 1-888-293-5662 Tel: (416) 293-0933 Fax. (416) 293-4793 Website: www.CycloneRangeHoods.com

C2 COUNTRY LANE
LOT 57-1
20-2505 CRB EKEV A
THE WORTHINGTON

33 OF 47

SC(B)519 | ALITO Collection

Cyclone®
Breathe Better

Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release aluminum mesh filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minutes time-delay OFF feature
- Plug-in connection

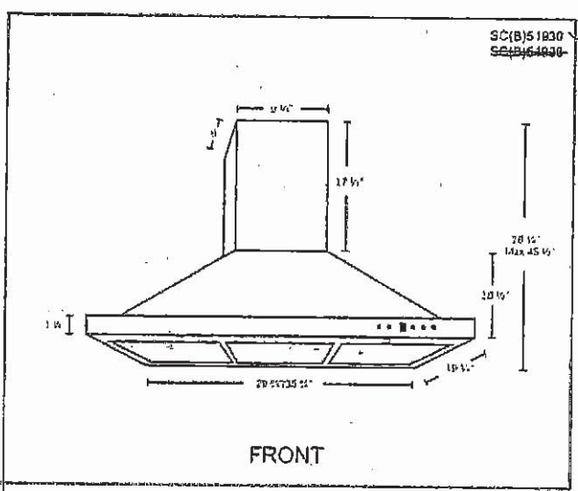

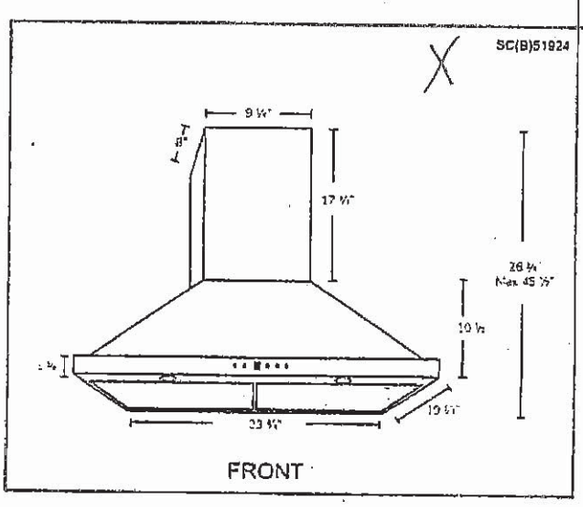

Options

- Filters:
  - SC519 - Quick Release Aluminum Mesh Filters
  - SCB519 - Quick Release Stainless Steel Baffle Filters
- Chimney Flues:
  - A1.CH10 - short (7'-8' ceilings)
  - A1.CH18 - standard (8'-9' ceilings)
  - A1.CH30 - extended (9'-11' ceilings)
- Widths: 24", 30", 36"

Specifications

- Air Flow Volume: 550 CFM
- Electrical Connection: 120 V/60 Hz
- Power Consumption: 300 Watts
- Current: 2.5 Amps
- Fan Speed: 1599 RPM
- Fan Type: Centrifugal Blower
- Finishes: Stainless Steel
- Ducting: 6" Round
- Noise Level: Min. 2 Sones
  Max. 6 Sones

C US

Toronto • Vancouver • Boston
www.CycloneRangeHoods.com

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

34 OF 47

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD
WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

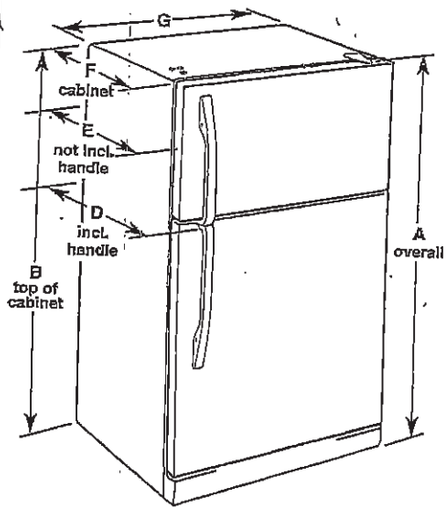

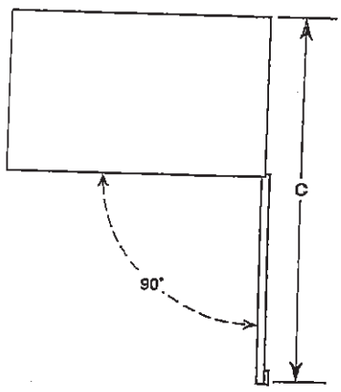

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66¼" (168.3 cm)	65½" (166.4 cm)	62¼" (158.1 cm)	32⅞" (83.5 cm)	30⅝" (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66¼" (168.3 cm)	65½" (166.4 cm)	62¼" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

LOCATION REQUIREMENTS

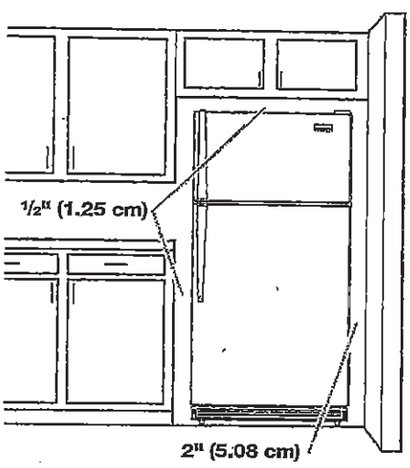

To ensure proper ventilation for your refrigerator, allow for a ½" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10674106
10/29/14

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

35 OF 47

Refrigerator Door Swing Verification

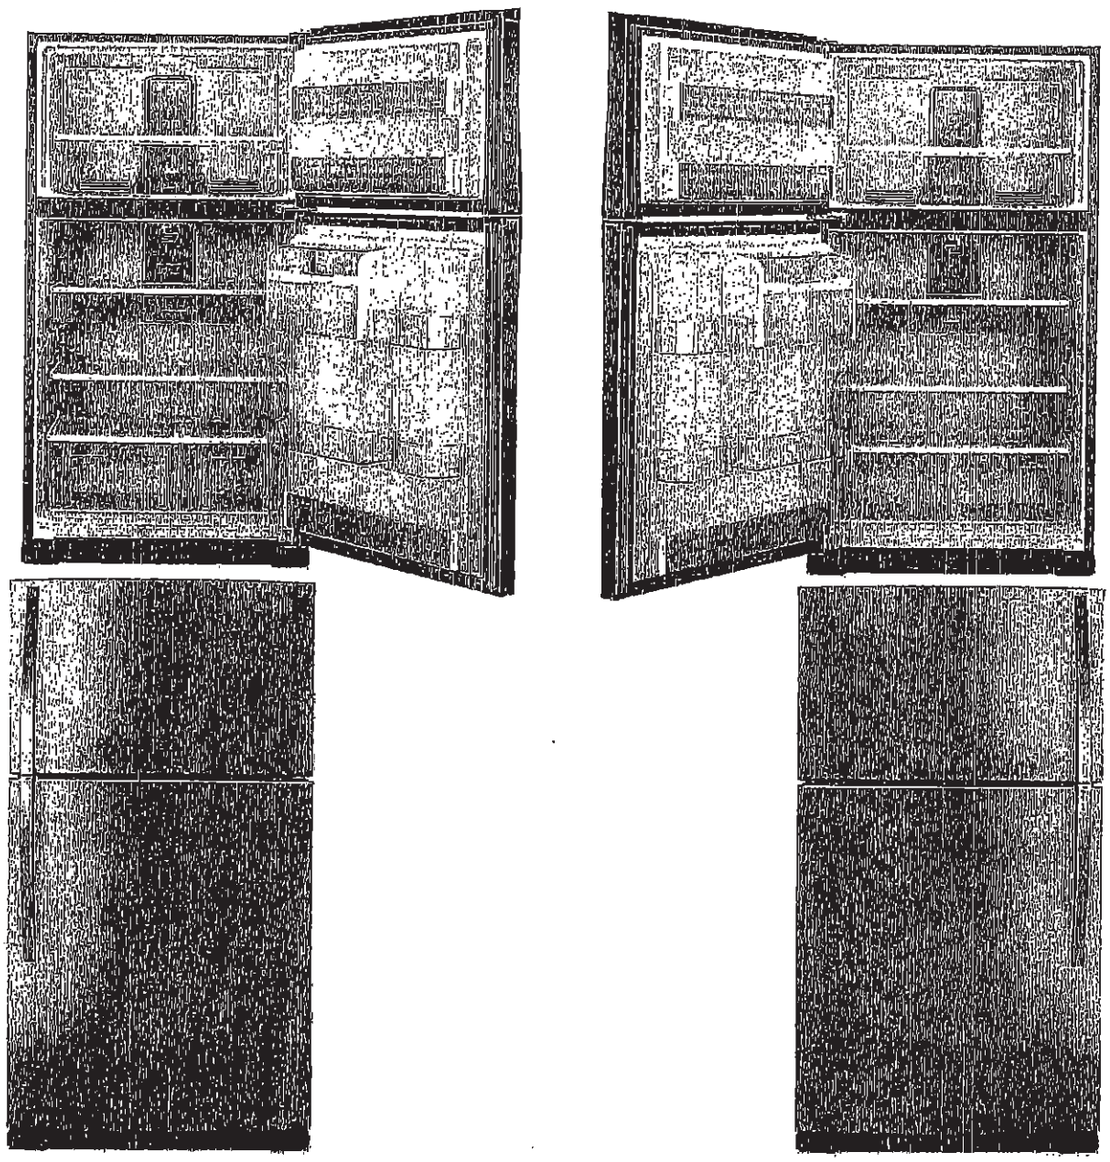

When facing the refrigerator

☐ *RIGHT HAND DOOR OPENING*
- *Hinges on right*
- *Handle on left*

_____ INITIAL

LEFT HAND DOOR OPENING ☑
- *Hinges on left*
- *Handle on right*

DJP
INITIAL

Please check and INITIAL your door swing selection.

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

36 OF 47

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

YWFE515S0JS

Whirlpool

Home > Kitchen Appliances > Cooking Appliances > Ranges > Single Oven Ranges > YWFE515S0JS

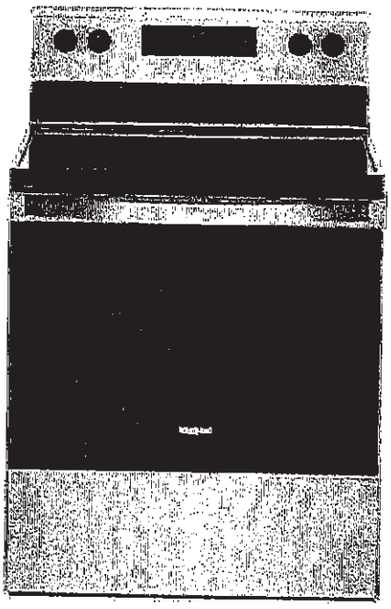

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

37 OF 47

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Product Dimensions

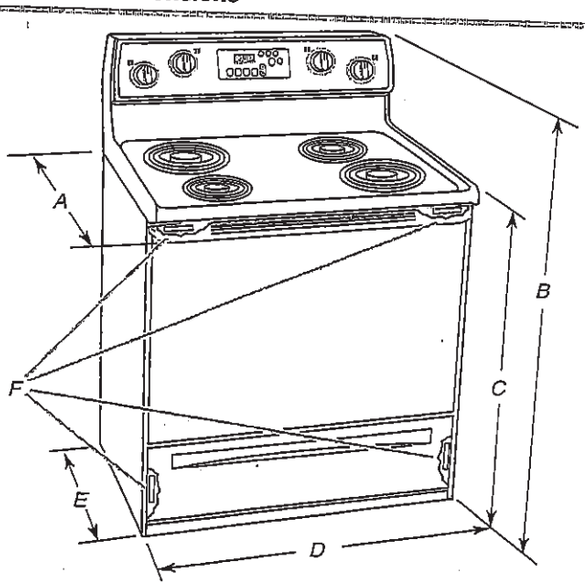

A. 27 3/4" (70.5 cm) max. depth with handle
*B. 46 7/8" (119.1 cm) overall height (max.) with leveling legs screwed all the way in**
*C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in**
D. 29 7/8" (75.9 cm) width
*E. 25 5/16" (64.3 cm) depth - back of range to front of cooktop***
F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

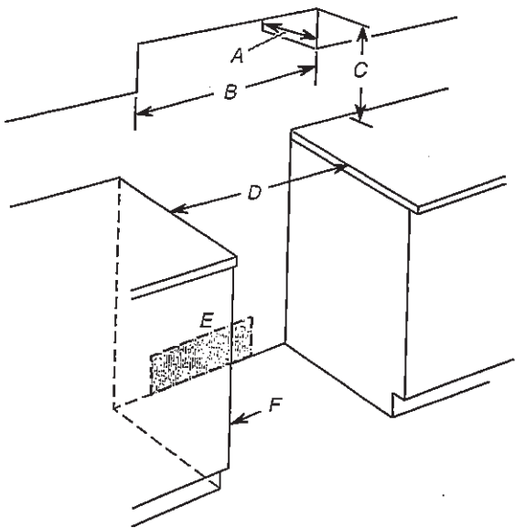

A. 13" (33.0 cm) max. upper cabinet depth
B. 30" (76.2 cm) min. opening width
*C. For minimum clearance to top of cooktop, see NOTE**
D. 30" (76.2 cm) min. opening width
E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
F. Cabinet door or hinges should not extend into the cutout.

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

JAN 28/20

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Install Anti-Tip Bracket

⚠WARNING

Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.

Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.

1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
2. Determine which mounting method to use: floor or wall.
   If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/₁₆" (31.9 cm) from centerline as shown.

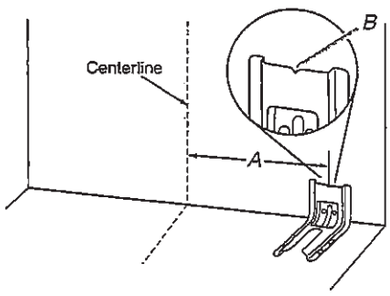

A. 12⁹/₁₆" (31.9 cm)
B. Bracket V-notch

4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting



Rear position



Front position



Diagonal (2 options)

Wall Mounting



5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1⁵/₈" (4.1 cm) screws provided.
6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

39 of 47

Whirlpool® Dishwasher with ENERGY STAR® qualification

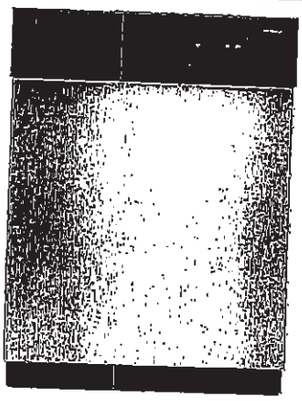

WDF310PAAS
Black-on-Stainless

OTHER AVAILABLE COLORS

- Black — Model: WDF310PAAB
- Biscuit-on-Biscuit — Model: WDF310PAAT
- White — Model: WDF310PAAW
- Universal Silver — Model: WDF310PAAD

ENERGY STAR

DIMENSIONS	
Maximum Height	34 1/2 Inches
Minimum Height	33 1/2 Inches
Height	34 1/2 Inches
Depth	24 1/2 Inches
Width	23 7/8 Inches

Dimensions shown are for planning purposes only. For complete information, see installation instructions packaged with product.

ELECTRICAL

15 Amps Amps. 60 Hz. 120 V. 15,

Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.

KEY FEATURES

- ENERGY STAR® Qualified
- No One Has Fewer Repairs 17 Years In A Row
- Resource - Efficient Wash System
- CEE Tier 1 qualified
- Tall Tub Design
- White Plastic Interior
- Quiet Partner(TM) I Sound Package
- Auto Soil Sensor
- Electronic Controls
- 3 Automatic Cycles
- 1-Hour Wash Cycle
- Heavy Wash Cycle
- Normal Cycle
- 4 Options
- High Temperature Wash System
- Heated Dry Option
- 4 Hour Delay Wash Option
- 4-Tier SheerClean Direct Feed Wash System
- Control Lock
- Vinyl Racks
- In-Rack Silverware Basket

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

40 OF 47

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	~~WDF310PLA~~	WDF530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	~~WDF510PAY~~	WDF730PAY
WDF121PAF	WDF520PAD	WDT710PAY
WDF310PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord: Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.



Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use ⅜" O.D. copper tubing with compression fitting or flexible braided water supply line (½" minimum plastic tubing is not recommended). Use a 90° elbow with ¾" N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.



Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use ½" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

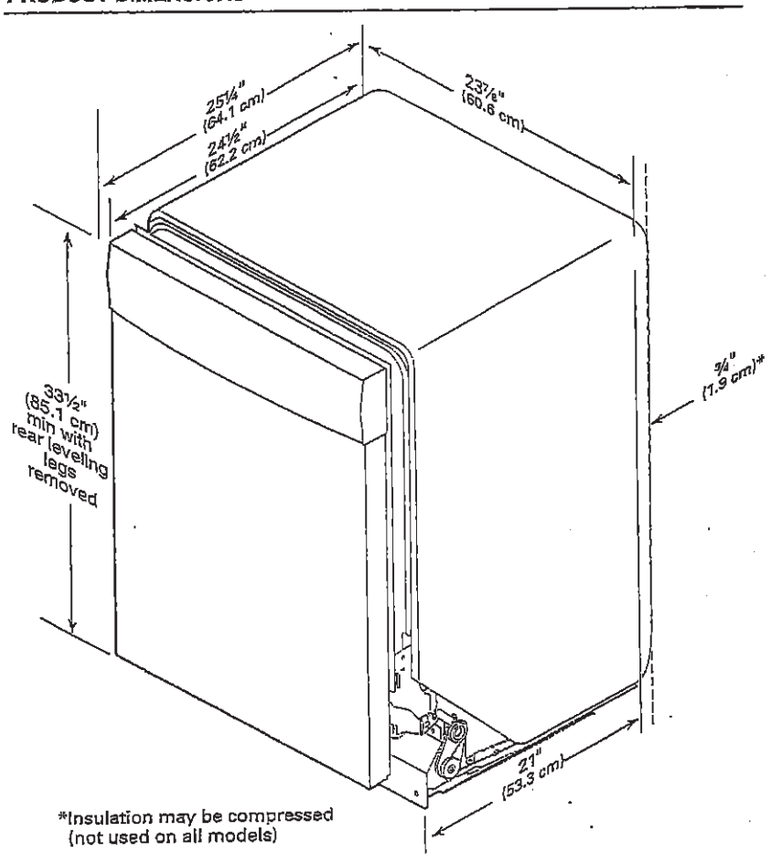

*Insulation may be compressed (not used on all models)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

W10435040C-D-WH
5/1/16

WC Ext

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

41 OF 47

CABINET CUTOUT DIMENSIONS

WDE320P0H

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

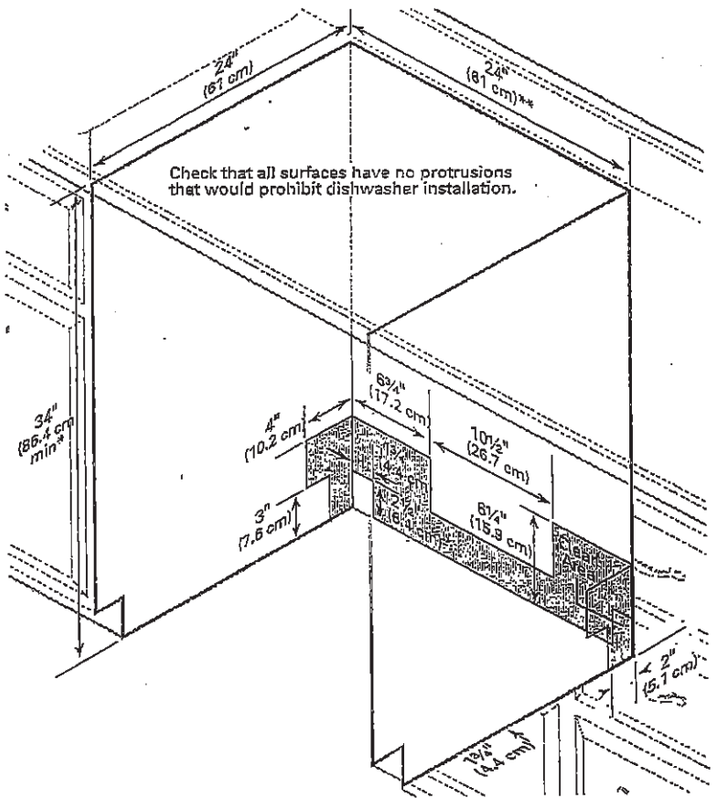

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

WHIRLPOOL WASHER Model #: WFW5620HW

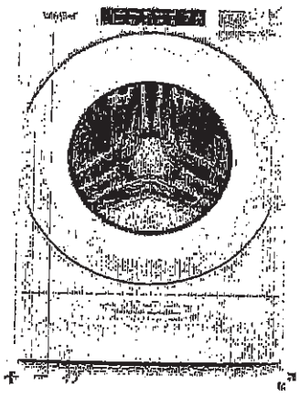

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser

Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel

Cycles and Options

Number of Wash Cycles	37

Electrical

Hz	60
Power Cord Included	Yes

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

43 OF 47

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS

Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

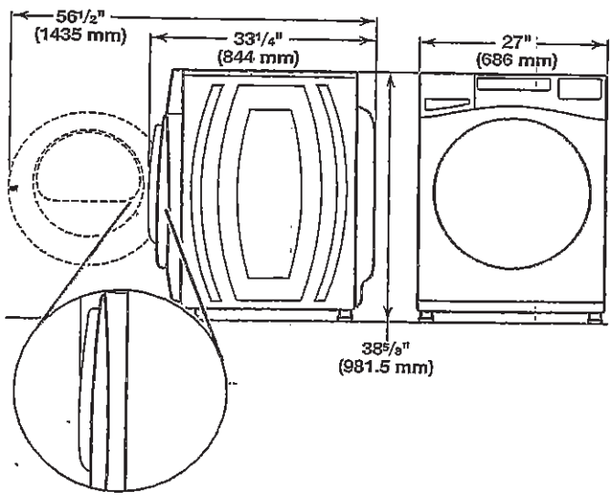

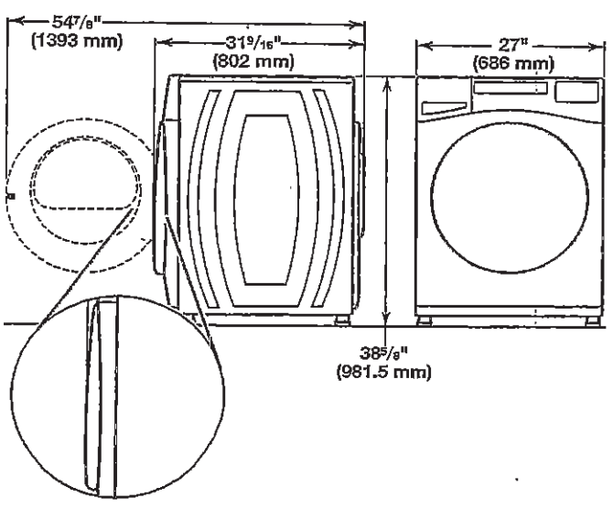

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

Maytag Models

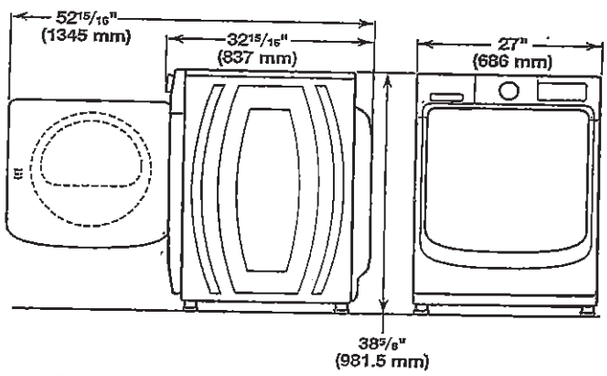

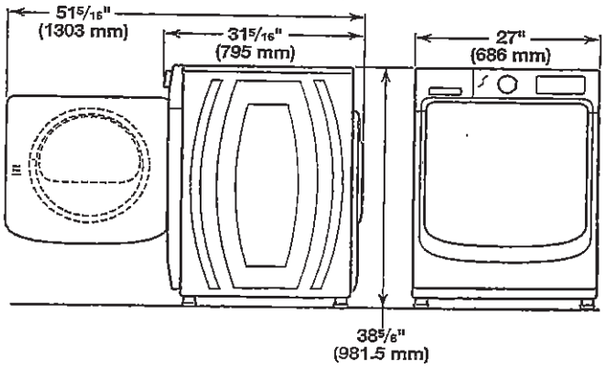

All dimensions show minimum spacing allowed.
For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

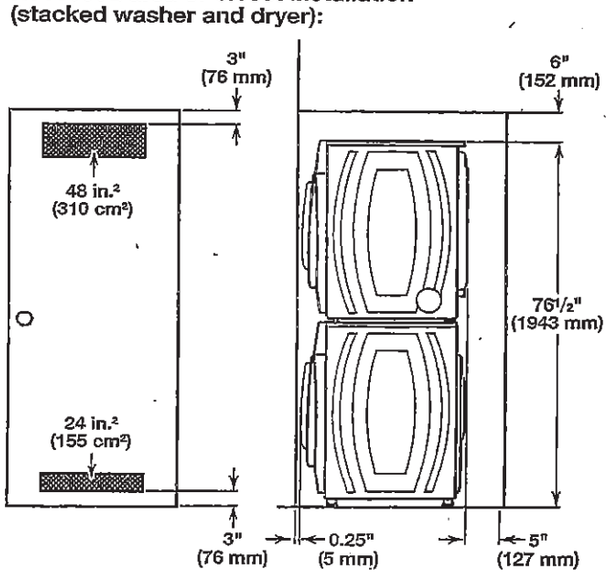

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

44 OF 47

WHIRLPOOL WASHER Model #: WFW5620HW

Custom under-counter installation:

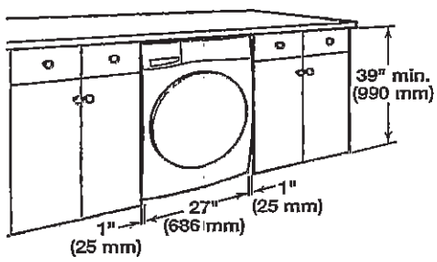

Recessed area or closet installation:

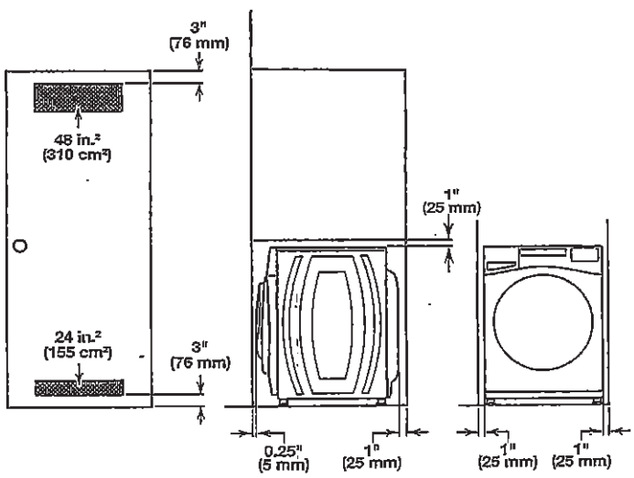

Custom cabinet installation:

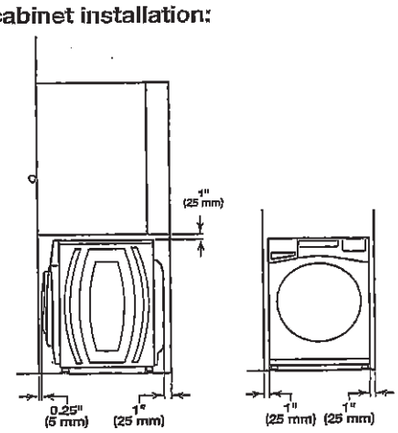

DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.

IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

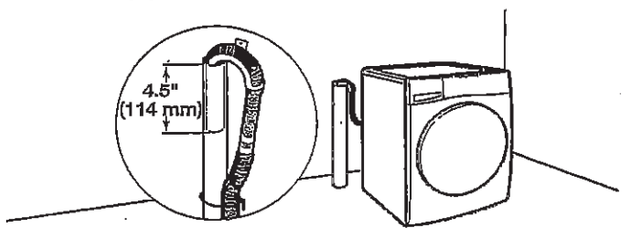

Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

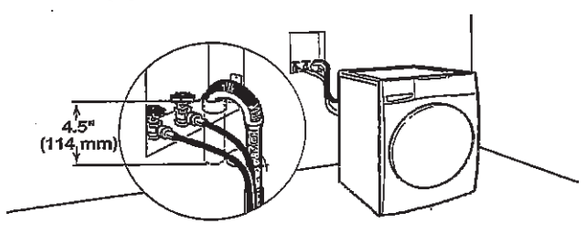

See requirements for floor standpipe drain system.

Laundry tub drain system

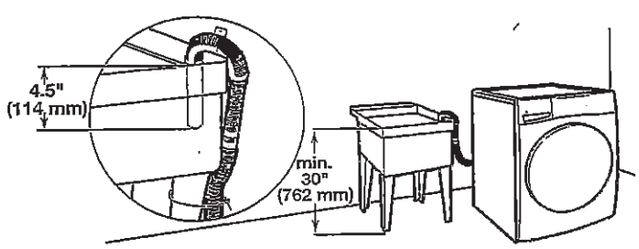

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

45 OF 47

WHIRLPOOL DRYER Model #: YWED5620HW

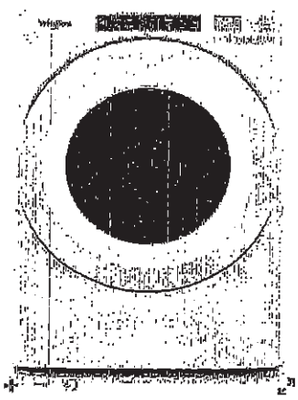

Define Your Style

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60
Power Cord Included	Yes

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

46 OF 47

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

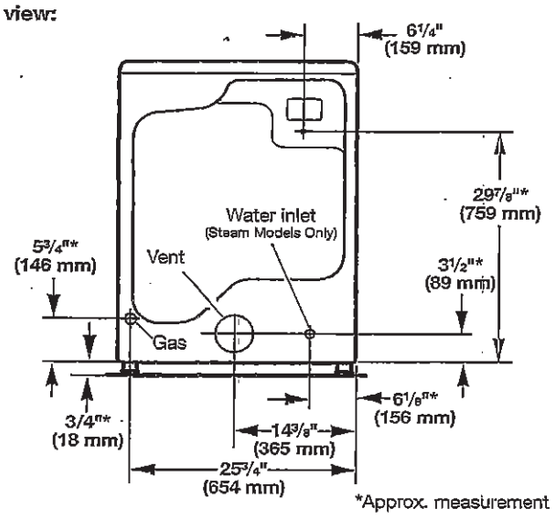

*Approx. measurement

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

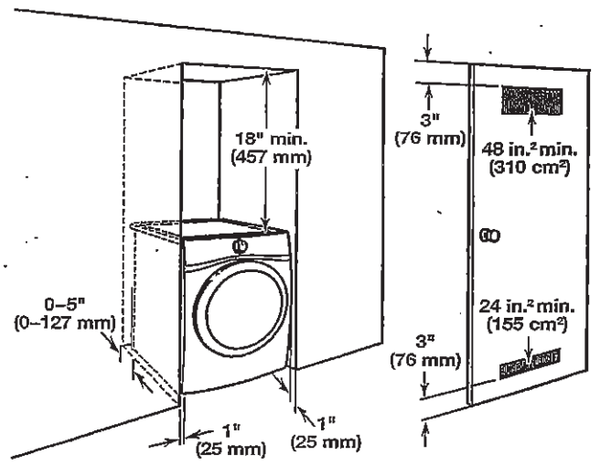

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

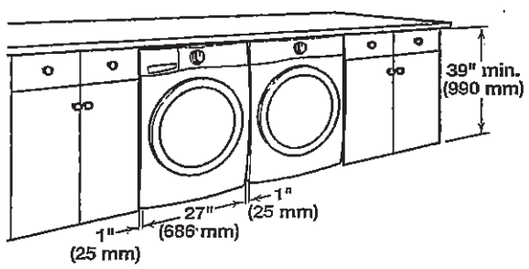

Mobile home – Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

C2- COUNTRY LANE
LOT 57-1
20-2505 CRN ELEV A
THE WORTHINGTON

47 OF 47

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠WARNING

Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.

Failure to do so can result in death, explosion, or fire.

You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.

DRYER DIMENSIONS

Front view:

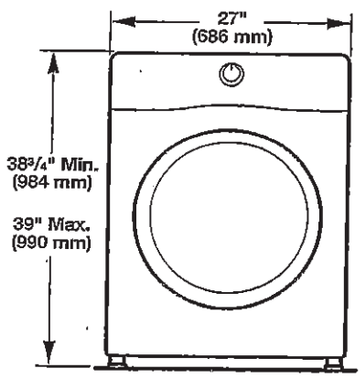

Side view:

Whirlpool Models

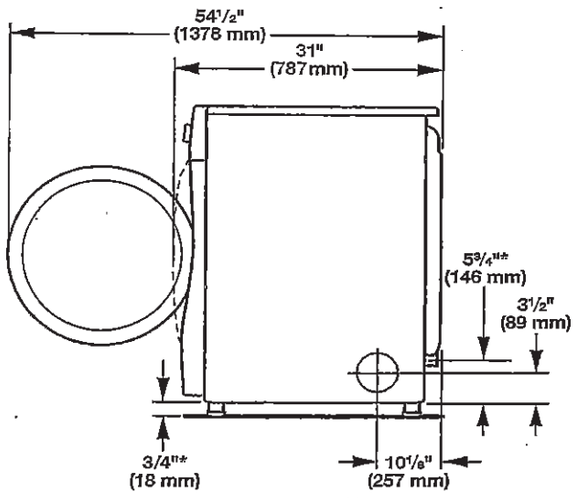

*Approx. measurement

Maytag Models

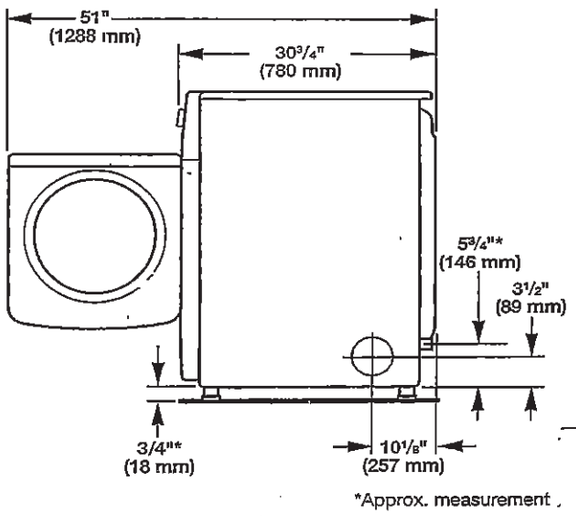

*Approx. measurement