



27-Jul-21

PRE-Sales Selection Sheet

CHECKLIST

7 of 41

CU

LOT	001-3	REVISED	20-2329 ELEV A THE HAMPTON
PURCHASERS: MOHAMED, SAJITH MOHAMED REY CONTACT NO: 647-573-8912			
VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED			

OPTIONAL LOWER LEVEL WITH BEDROOM 4 AND BATH

☒ FINISHED BASEMENT	
☐ COLD CELLAR	
UPGRADED / MODIFIED ELEVATION	
☐ CORNER UPGRADE	☐ WALK OUT DECK
☐ SIDE UPGRADE	☐ WALK OUT BASEMENT
☐ REAR UPGRADE	
CEILING UPGRADE - SMOOTH	
☒ MAIN FLOOR *	☐ BASEMENT
☐ SECOND FLOOR	
ADDITIONAL ROUGH-INS	
☒ 200 AMP SERVICE	☐ HUMIDIFIER
☐ WET BAR ROUGH IN	☒ AIRCON
GAS ROUGH-IN	
☒ STOVE *	☐ DRYER
☐ BBQ	☐ ADDITIONAL FIREPLACE
HOODFAN VENTING	
☒ 6" ROUND DUCT *	
☐ 7" ROUND DUCT	
FULL BASEMENT STAIRS: N/A	
UPPER BASEMENT STAIRS: N/A	
LOWER BASEMENT STAIRS: PAINT GRADE	
STAIRS TO LOWER LEVEL: ALL OAK	
STAIRS TO UPPER LEVEL: N/A	
MAIN STAIRS: ALL OAK	
MEDIA STAIRS (if applicable): N/A	

Date	July 27/21	Signature on	July 27/21	IRIT Salem
		Purchaser file	Date	Décor Consultant
		- APPROVED -		
Date		Purchaser	07-27-2021	mRosen
		Date Approved	HEATHWOOD HOMES (UPCOUNTRY) LIMITED	



Interior Finishing Selection Sheet

23-Jul-21

LOT 001-3

20-2329 ELEV A THE HAMPTON

PURCHASERS: MOHAMED, SAJITH MOHAMED REY CONTACT NO: 647-573-8912

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Appliances

6-9117 Kitchen HoodFan

- ☒ CYCLONE 30" STAINLESS CHIMNEY/CANOPY HOODFAN
STAINLESS STEEL SCB51930 UPG 30" **PAGE 26**

Cabinetry

1-9111 Kitchen Cabinet Colour/Style

- ☐ SIMCOE ORCHID VIKING III STD 3DL

3-2086 Kitchen Cabinet Hardware

- ☐ HARDWARE 9677 STD

~~213-2086 Laundry Room Cabinet Hardware~~

- ☐ ~~HARDWARE 9677 STD~~ **DELETED**

~~213-9111 Laundry Room Countertop~~

- ☐ ~~SIMCOE ORCHID VIKING III STD 3DL~~

25-6319 Main Bathroom Cabinet Colour/Style

- ☐ MANCHESTER CAVIAR CL VIKING III MAPLE

29-2086 Main Bathroom Cabinet Hardware

- ☐ HARDWARE 9677 STD

20-6319 Master Ensuite Cabinet Colour/Style

- ☐ MANCHESTER CAVIAR CL VIKING III MAPLE

22-2086 Master Ensuite Cabinet Hardware

- ☐ HARDWARE 9677 STD

359-9176 Optional Lower Level Bath Cabinet Colour/Style

- ☐ TRINITY VIVA WEEKEND GETAWAY Viking III STD

360-2098 Optional Lower Level Bath Cabinet Hardware

- ☐ HARDWARE 12801 STD

361-8800 Optional Lower Level Bath Countertop

- ☐ Countertop INUKSHUK TAUPE P-345 LM Arborite

Carpet

121-9247 Basement Stairs Landing(s) Flooring

- ☐ Dynasty Tex 40 oz Poly SANDY BEIGE DY 16611 STD

37-9247 Bedroom 2 Flooring

- ☐ Dynasty Tex 40 oz Poly SANDY BEIGE DY 16611 STD

38-9247 Bedroom 3 Flooring

- ☐ Dynasty Tex 40 oz Poly SANDY BEIGE DY 16611 STD

383-9247 Bedroom 4 (Optional Lower Level) Flooring

- ☐ Dynasty Tex 40 oz Poly SANDY BEIGE DY 16611 STD

36-9247 Master Bedroom Flooring

- ☐ Dynasty Tex 40 oz Poly SANDY BEIGE DY 16611 STD

366-9247 Optional Lower Level Hall Flooring

- ☐ Dynasty Tex 40 oz Poly SANDY BEIGE DY 16611 STD

52-1079 Throughout Underpad

- ☐ Underpad 500 Series STD

Ceramics

16-5494 Foyer Flooring

- ☐ New Albion Grey GE.NA.GRY.1313 Std 13 x 13

- The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
- The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
- The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- Selections will not be processed unless signed by Heathwood Homes Head Office.
- The colour selections made on the Colour Chart are final and cannot be changed once submitted.
- The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

July 23/21

July 23/21

Date

Purchaser

Décor Consultant

Myra

Date

Purchaser

HEATHWOOD HOMES (UPCOUNTRY)

Date Approved **LIMITED**



Interior Finishing Selection Sheet

23-Jul-21

LOT 001-3

20-2329 ELEV A THE HAMPTON

PURCHASERS: MOHAMED, SAJITH MOHAMED REY CONTACT NO: 647-573-8912

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Ceramics

17-2225 Foyer Grout	☐ Grout (27) Silver STD
4-8106 Kitchen Backsplash	☒ ONTARIO HEXAGON MATTE TENDER GREY OD.ON.TGR.02.HEX.MT UPG_2
5-2226 Kitchen Backsplash Grout	☐ Grout (00) White STD
338-5494 Kitchen Flooring	☐ New Albion Grey GE.NA.GRY.1313 Std 13 x 13
339-2225 Kitchen Grout	☐ Grout (27) Silver STD
66-8073 Laundry Room Flooring	☐ Reflex White GE.RF.WHT.1313 STD 13 x 13
67-2224 Laundry Room Grout	☐ Grout (44) Pale Umber STD
30-8073 Main Bathroom Flooring	☐ Reflex White GE.RF.WHT.1313 STD 13 x 13
31-2224 Main Bathroom Grout	☐ Grout (44) Pale Umber STD
112-9020 Main Bathroom Wall Tile	☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED VERTICALLY
113-2226 Main Bathroom Wall Tile Grout	☐ Grout (00) White STD
23-8073 Master Ensuite Floor Tile	☐ Reflex White GE.RF.WHT.1313 STD 13 x 13
24-2224 Master Ensuite Floor Tile Grout	☐ Grout (44) Pale Umber STD
73-8661 Master Ensuite Shower Floor Tile	☐ Ontario Series Mosaic Snow White Matte OD.ON.SWT.0202.MT.N STD 2 x 2
74-2226 Master Ensuite Shower Floor Tile Grout	☐ Grout (00) White STD
147-8923 Master Ensuite Shower Jamb(s) and Sill(s)	☐ Shower Jamb / Sill Thassos White STD
104-9020 Master Ensuite Shower Wall Tile	☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED VERTICALLY
105-2226 Master Ensuite Shower Wall Tile Grout	☐ Grout (00) White STD
330-9257 Optional Lower Level Bath Flooring	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13
331-2225 Optional Lower Level Bath Grout	☐ Grout (27) Silver STD
332-9020 Optional Lower Level Bath Tub Wall Tile	☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED VERTICALLY
333-2226 Optional Lower Level Bath Tub Wall Tile Grout	☐ Grout (00) White STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date July 23/21 Purchaser [Signature]

Date July 23 2021 Décor Consultant [Signature]

Date Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



Interior Finishing Selection Sheet

23-Jul-21

LOT 001-3

20-2329 ELEV A THE HAMPTON

PURCHASERS: MOHAMED, SAJITH MOHAMED REY CONTACT NO: 647-573-8912

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Ceramics

32-5494 Powder Room Flooring

☐ New Albion Grey GE.NA.GRY.1313 Std 13 x 13

33-2225 Powder Room Grout

☐ Grout (27) Silver STD

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Fireplace

136-9114 Great Room Fireplace Mantle

☐ Paint Grade Mantel- Cabinet (Per Plan) WHITE NF 15 STD
PAGE 19

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-9069 Kitchen Countertop

☐ MSI Quartz ICED WHITE Group 1 STD 3/4"

28-8595 Main Bathroom Countertop

☒ Quartz-Caesarstone OCEAN FOAM #6141 Group 2 UPG 3/4" with Mitred Edge

21-8595 Master Ensuite Countertop

☒ Quartz-Caesarstone OCEAN FOAM #6141 Group 2 UPG 3/4" with Mitred Edge

Hardwood

99-9359 Dining Room Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl BARISTA Red Oak Pearl 3/4" X 3 1/4"

419-9359 Foyer Landing Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl BARISTA Red Oak Pearl 3/4" X 3 1/4"

11-9359 Great Room Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl BARISTA Red Oak Pearl 3/4" X 3 1/4"

77-9059 Stair Landing to Upper Level Flooring

☐ Red Oak-Vintage 3 1/4 inch Pre-Sanded Smooth Unfinished Red Oak-Unfinished-3/4 inch x 3 1/4inch 3/4" x 3 1/4" STAIN TO COMPLEMENT SAMBUCCA - COLOUR IS DIFFERENT THEN HARDWOOD FLOOR

35-9359 Upper Hall Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl BARISTA Red Oak Pearl 3/4" X 3 1/4"

Interior Railings

49-7654 Stairs to Lower Level Handrail/Pickets/Posts Type

☐ 1 3/4" Square pickets with 3 1/2" Square/Cap Post(s) ALL OAK STD

43-7654 Stairs to Upper Level Handrail/Pickets/Posts Type

☐ 1 3/4" Square pickets with 3 1/2" Square/Cap Post(s) ALL OAK STD

Interior Stairs

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. The Vendor reserves the right to be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date July 23/21 Purchaser

Date APPROVED

Date Purchaser

Décor Consultant

Date Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



Interior Finishing Selection Sheet

23-Jul-21

LOT 001-3

20-2329 ELEV A THE HAMPTON

PURCHASERS: MOHAMED, SAJITH MOHAMED REY CONTACT NO: 647-573-8912

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Interior Stairs

116-1713 Basement Stairs Type

☐ Paint Grade Stairs STD

45-1712 Stairs to Lower Level Type

☐ Oak Stairs UPG_1

39-1712 Stairs to Upper Level Type

☐ Oak Stairs UPG_1

Interior Trim

91-9374 Throughout Trim Size

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings STD-Towns

Painting

46-1729 Stairs to Lower Level Colour

☐ Stain handrail, pickets, stringers, nosing & post(s). STAIN TO SAMBUCCA COLOUR IS DIFFERENT THEN HARDWOOD FLOOR

~~50-1729 Stairs to Lower Level Handrail/Pickets/Posts Colour~~

~~☐ Stain handrail, pickets, stringers, nosing & post(s). STAIN TO SAMBUCCA COLOUR IS DIFFERENT THEN HARDWOOD FLOOR~~

40-1729 Stairs to Upper Level Colour

☐ Stain handrail, pickets, stringers, nosing & post(s). STAIN TO SAMBUCCA COLOUR IS DIFFERENT THEN HARDWOOD FLOOR

~~44-1729 Stairs to Upper Level Handrail/Pickets/Posts Colour~~

~~☐ Stain handrail, pickets, stringers, nosing & post(s). STAIN TO SAMBUCCA COLOUR IS DIFFERENT THEN HARDWOOD FLOOR~~

240-1716 Throughout Trim - Paint Colour

☐ Trim WHITE STD

51-1717 Throughout Walls - Paint Colour

☐ Wall WARM GREY 22 STD

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

149-1737 Master Ensuite Plumbing Fixture (colour)

☐ Plumbing Fixtures WHITE STD

362-1737 Optional Lower Level Bath Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

July 23/21 *ES*

Date Purchaser

July 23/21 *ES*

Date

Décor Consultant

McKen

Date Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



23-Jul-21

Sales Selection Sheet
2 of 2

LOT	001-3	20-2329 ELEV A THE HAMPTON
PURCHASERS: MOHAMED, SAJITH MOHAMED REY CONTACT NO: 647-573-8912		
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED	
HST #		

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances			Qty: 1
792	Cyclone 30" Wall Mount Chimney Hood SS SCB51930	KITCHEN	
	PAGE 26		
Ceramics			
493	Optional Extras Supply and install additional backsplash due to chimney hoodfan installation Upgrade 2	Classic Kitchen	Qty: 1
608	Upgrade 2 Tile	Kitchen Optional Backsplash	Qty: 1
Drywall			
524	Ceiling Upgrades Smooth Ceilings Main Floor	MAIN FLOOR	Qty: 1
Electrical			
284	Optional Extras Extra wall interior outlet on Existing Circuit (does not include kitchen outlets) TO BE INSTALLED IN THE CENTRE OF THE FIRE PLACE 70" FROM FLOOR SEE SKETCH # 7	GREAT ROOM	Qty: 1
Fireplace			

- This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
- All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
- In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
- The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- Selections will not be processed unless signed by Heathwood Homes Head Office.
- The selections made on this schedule are final and cannot be changed once submitted.
- The Purchaser has checked and acknowledges the accuracy of this schedule.

Date	July 23/21	Purchaser	July 23/21	Décor Consultant
Date		Purchaser		
Date Approved		HEATHWOOD HOMES (UPCOUNTRY) LIMITED		



23-Jul-21

Sales Selection Sheet

LOT 001-3

20-2329 ELEV A THE HAMPTON

PURCHASERS: MOHAMED, SAUTH MOHAMED REY CONTACT NO: 647-573-8912

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

44 GREAT ROOM
Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle. Purchasers acknowledge: Heathwood Homes and its contractors will not be liable for any damage on items placed/installed above a FP after closing

Granite		
543	Optional Upgrade Countertop upgrade with 4" backsplash 3/4" GROUP 2 with double edge	Qty: 1
542	Optional Upgrade Countertop upgrade with 4" backsplash 3/4" GROUP 2 with double edge	Qty: 1

Heating / Air		
277	Optional Extras ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (See specs) (Hook-up not included) Leave standard 120 volt electrical outlet on a separate circuit. SPECS SKETCH # 7 PAGE 17	Qty: 1

Painting		
350	Optional Extras - PAINT / STAIN - Custom Stain stair landing less than 25sq/ft in sambucca. For stair with metal pickets only. 5" (Unfinished Pre-sanded) smooth hardwood will be installed and to be stained in sambucca to match the stairs	Qty: 1

Plumbing		
225	STANDARD Kitchen Sink Option KINDRED Kitchen Sink Collection - Reginox ND1831 UA/9 Stainless Kitchen Double (equal size) Bowl Undermount Sink (or equivalent) PAGE 20	Qty: 1

- This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
- All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
 - In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
 - The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
 - Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
 - The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
 - Selections will not be processed unless signed by Heathwood Homes Head Office.
 - The selections made on this schedule are final and cannot be changed once submitted.
 - The Purchaser has checked and acknowledges the accuracy of this schedule.

July 23/21

July 23 2021

Date Purchaser

Date APPROVED - Décor Consultant

Date Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



23-Jul-21

Sales Selection Sheet

LOT 001-3

20-2329 ELEV A THE HAMPTON

PURCHASERS: MOHAMED, SAJITH MOHAMED REY CONTACT NO: 647-573-8912

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date July 23/21 N.M.

Purchaser

Date July 23 2021 MR

Décor Consultant

Date Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY)

LIMITED

CU- COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON


15 of 41

The Hampton

20-2329 ELEV. B

ELEVATION B: 2,339 SQ FT

Sketch # 5

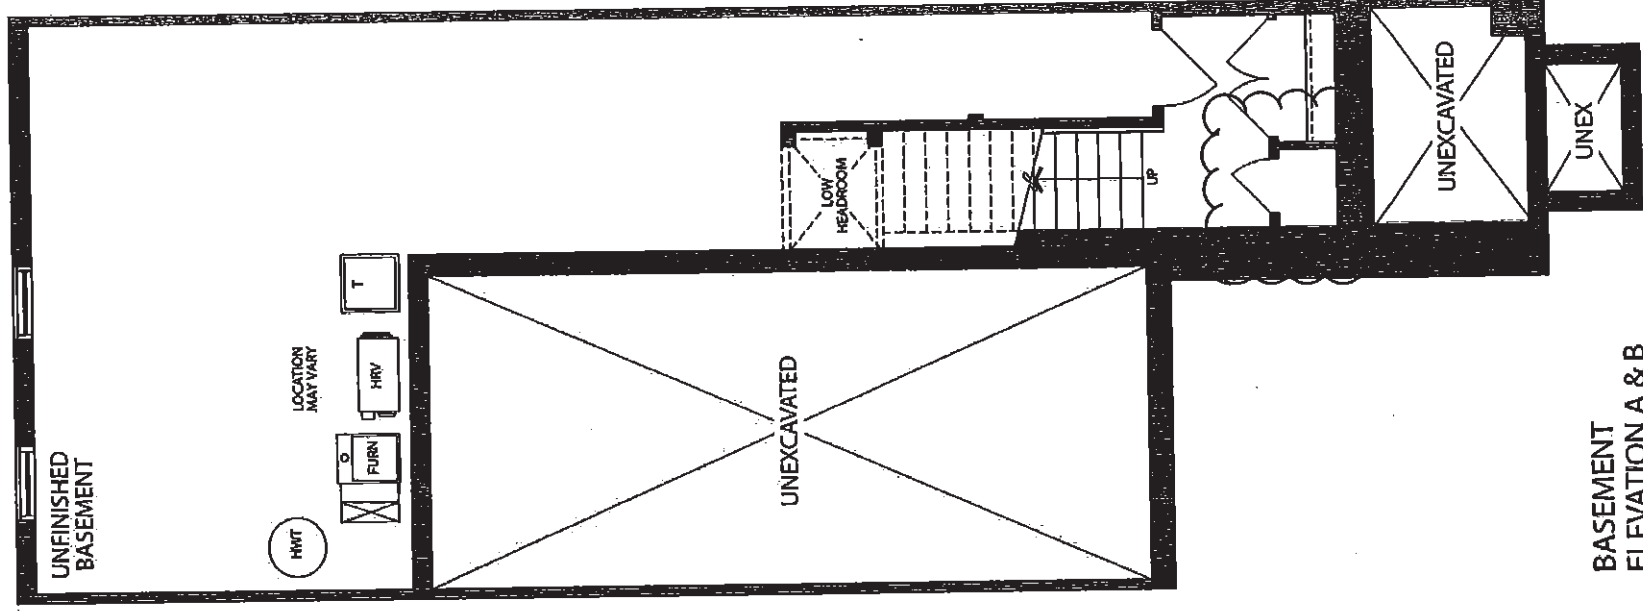

mm

CU-COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON


16 of 41

The Hampton

20-2329 ELEV. A

ELEVATION A: 2,329 SQ FT

Sketch #6

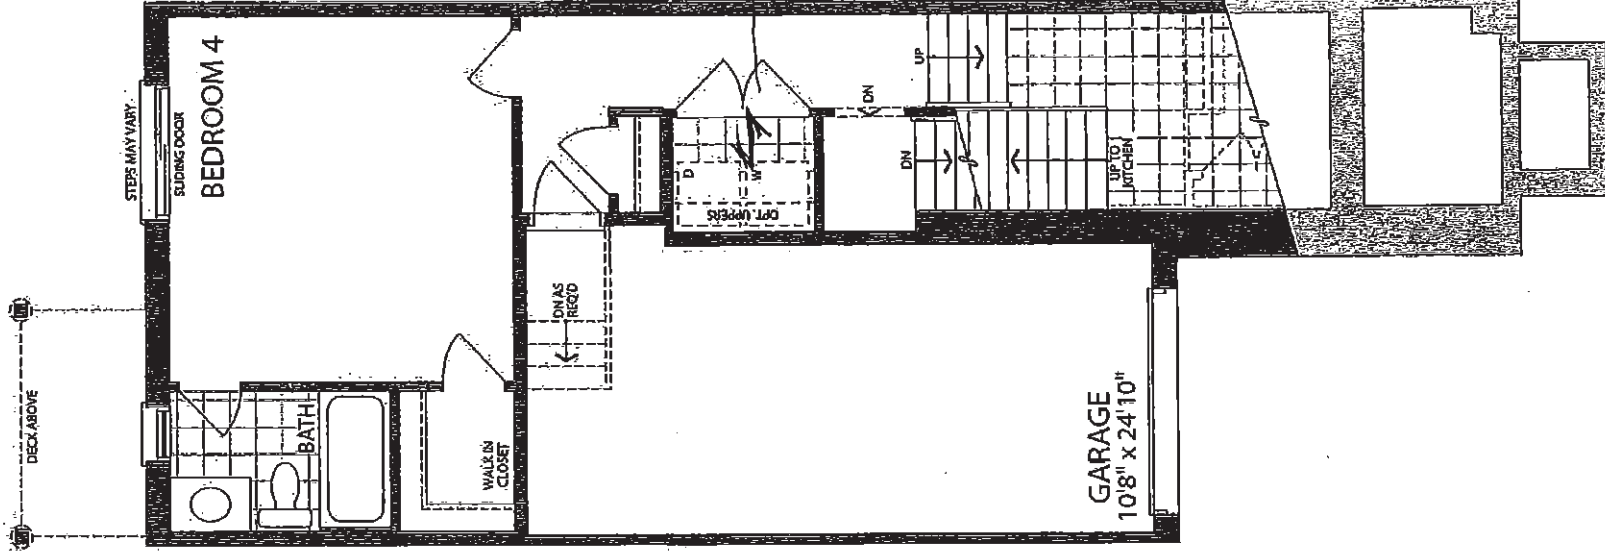

LOWER LEVEL WITH
OPTIONAL BEDROOM AND BATH
ELEVATION 'A&'B'

CU-COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON


17 of 41

The Hampton

20-2329 ELEV. A

ELEVATION A: 2,329 SQ FT

Sketch # 7

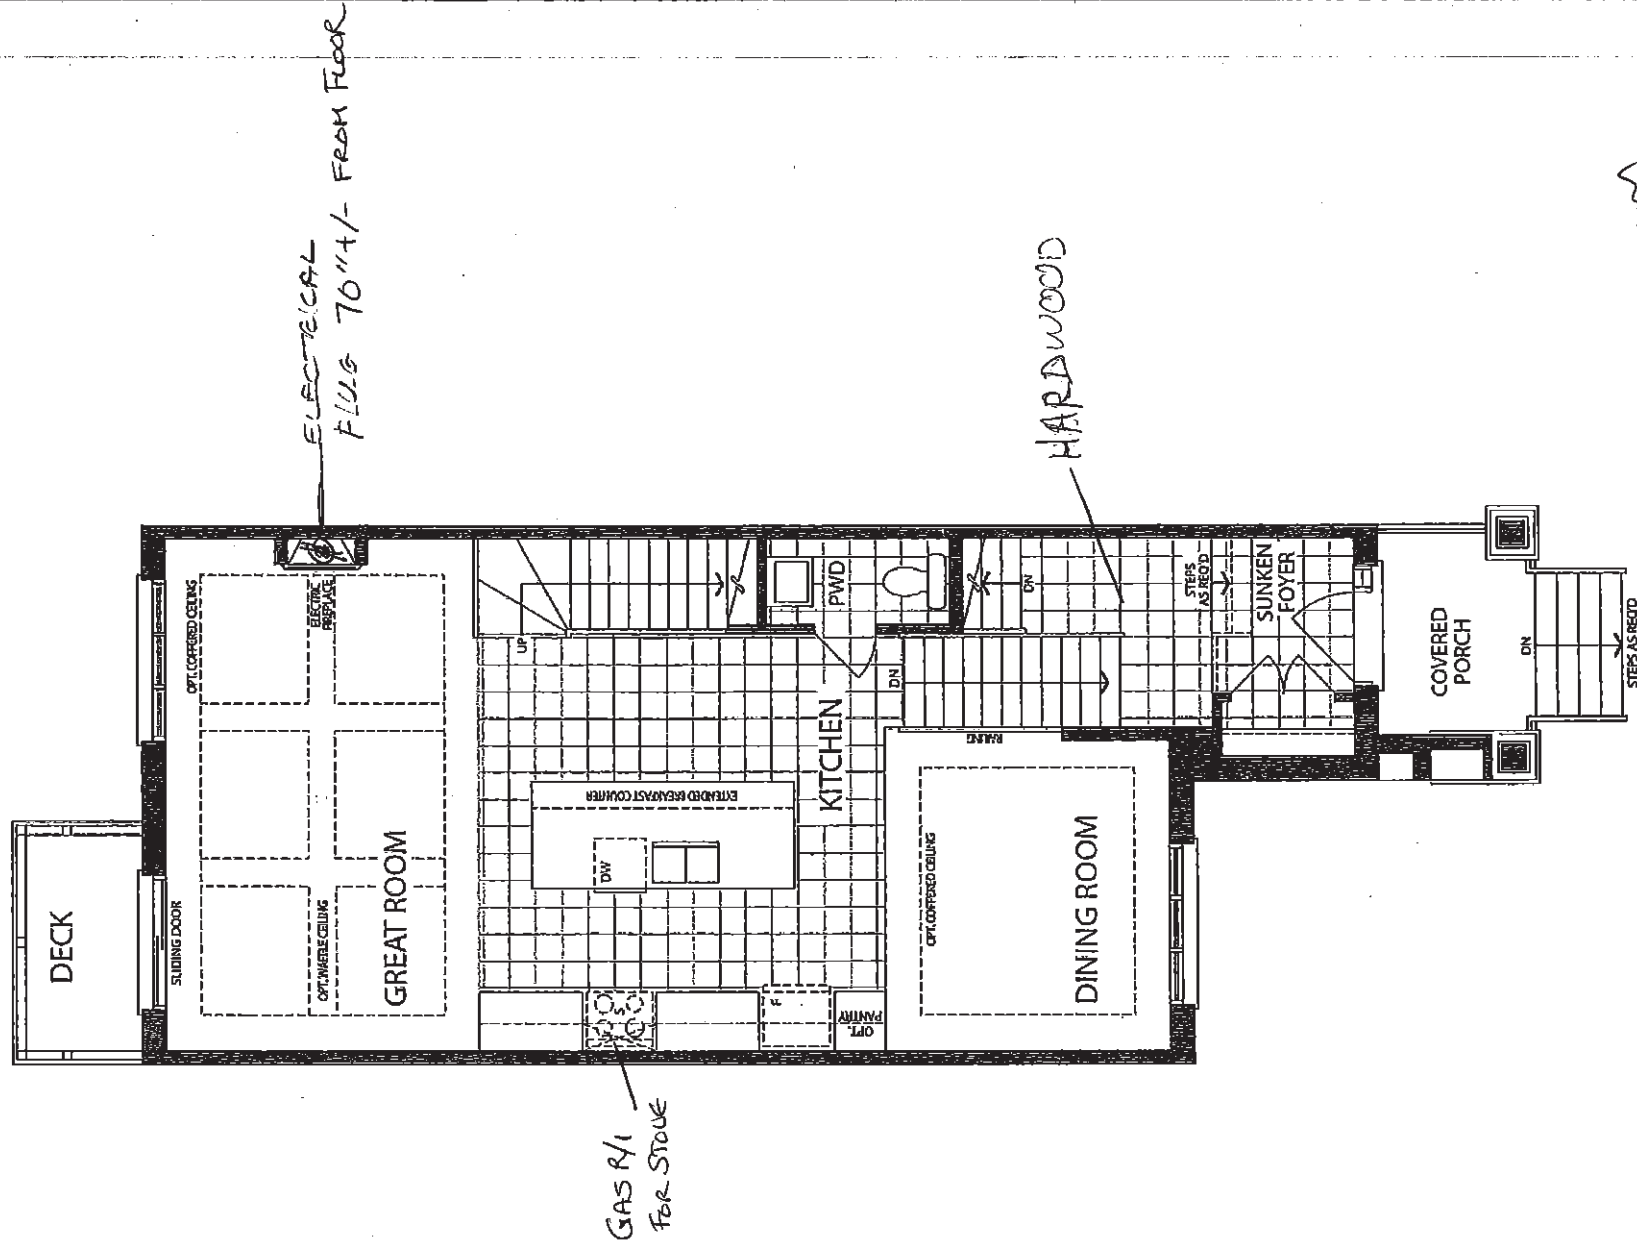

MAIN LEVEL
ELEVATION A

CU- COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON


18 of 41

The Hampton

20-2329 ELEV. A

ELEVATION A: 2,329 SQ FT

Sketch #8

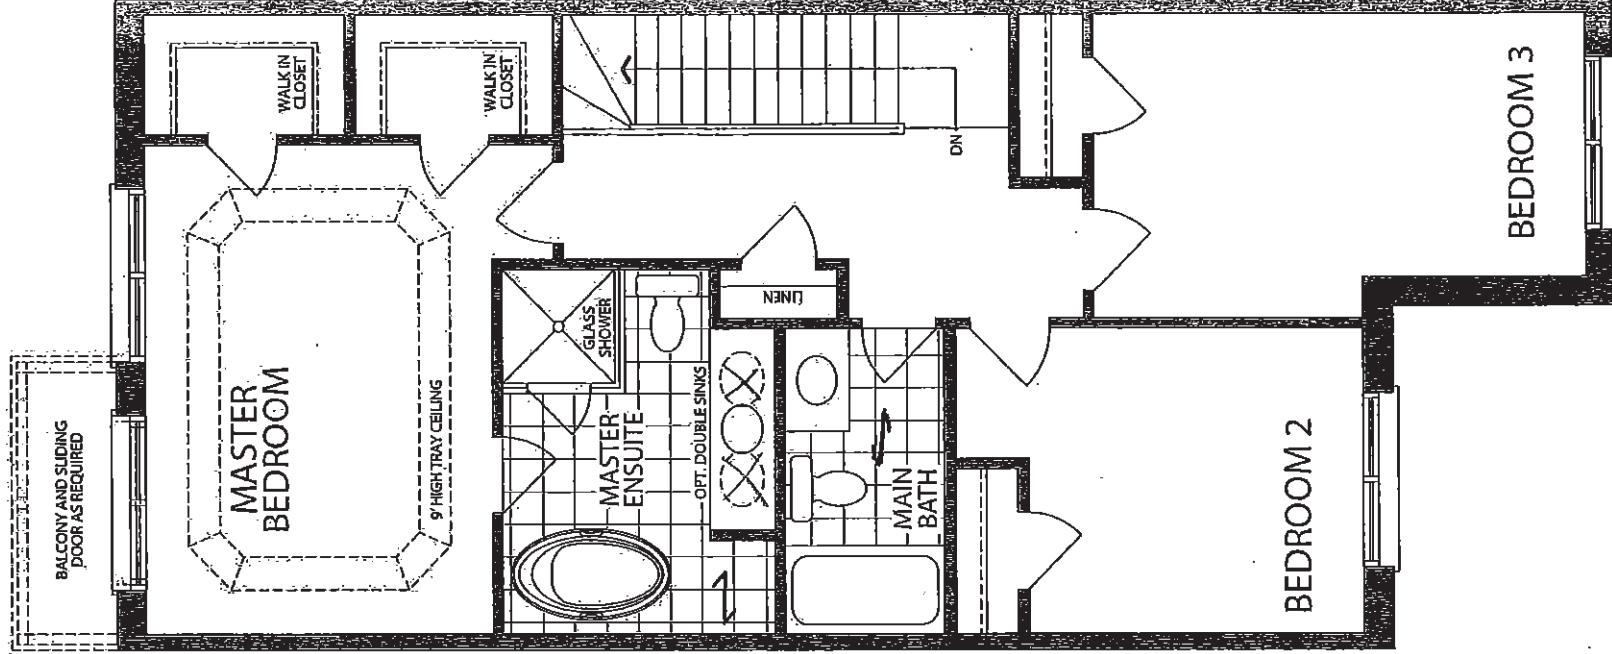

TILE PATTERN
DIRECTION

UPPER LEVEL
ELEVATION A

W


CU COUNTRY LANE

LOT 1-3

20-2329 ELEV A

THE HAMPTON

19th 41

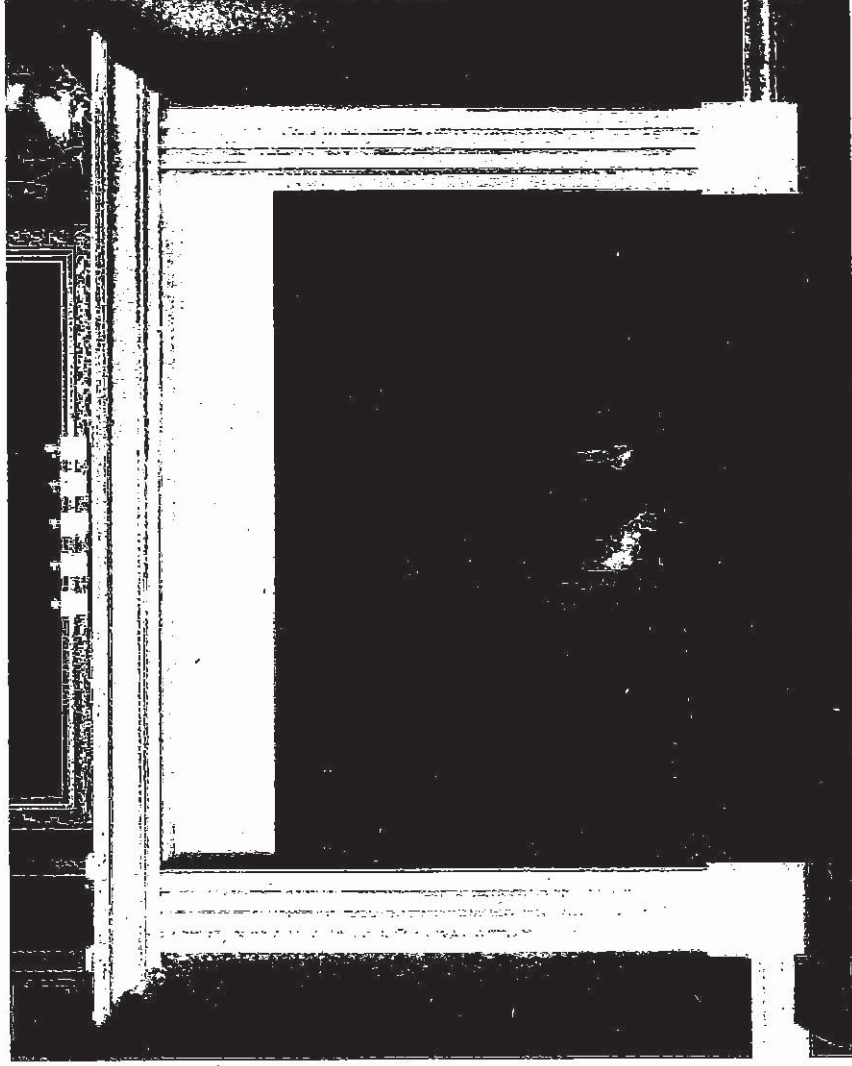


'CABINET'

STANDARD NF 15 Mantel

Clean apron finish with fluted legs

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

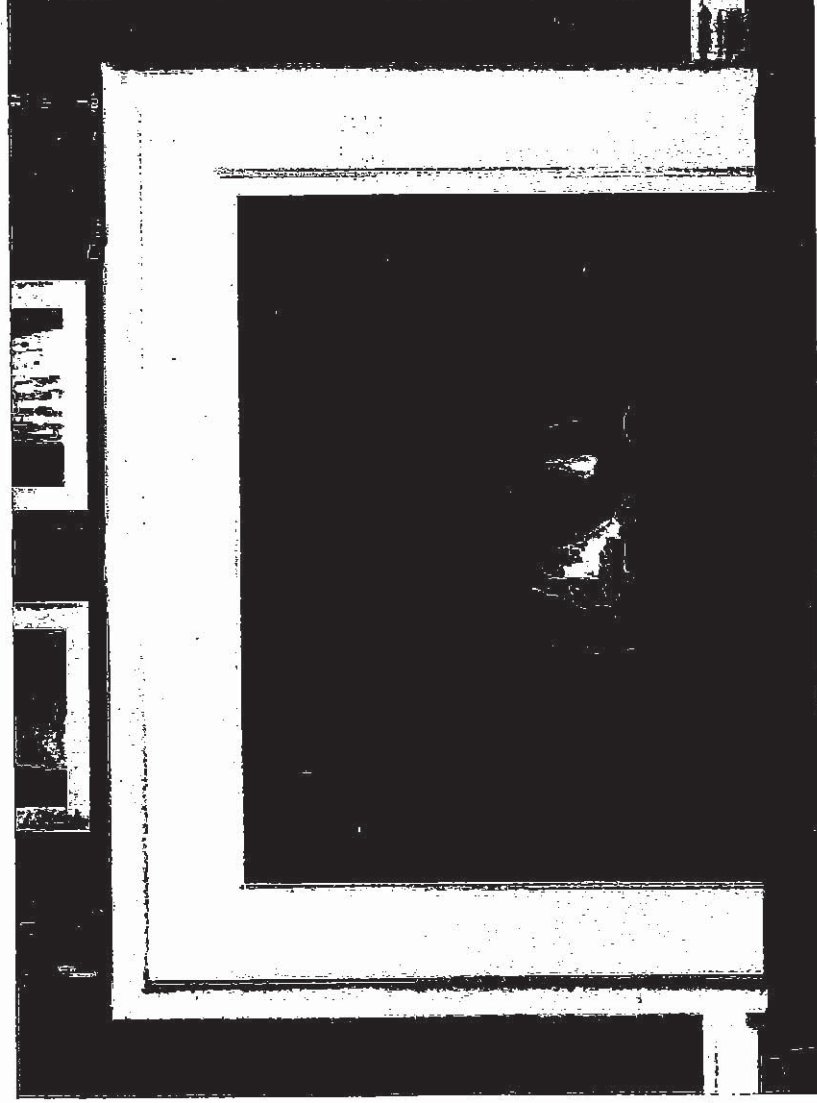

STANDARD NF 17 Mantel


CU-COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON

20 of 41

Regency

STANDARD KITCHEN SINK

ND1831UA/9

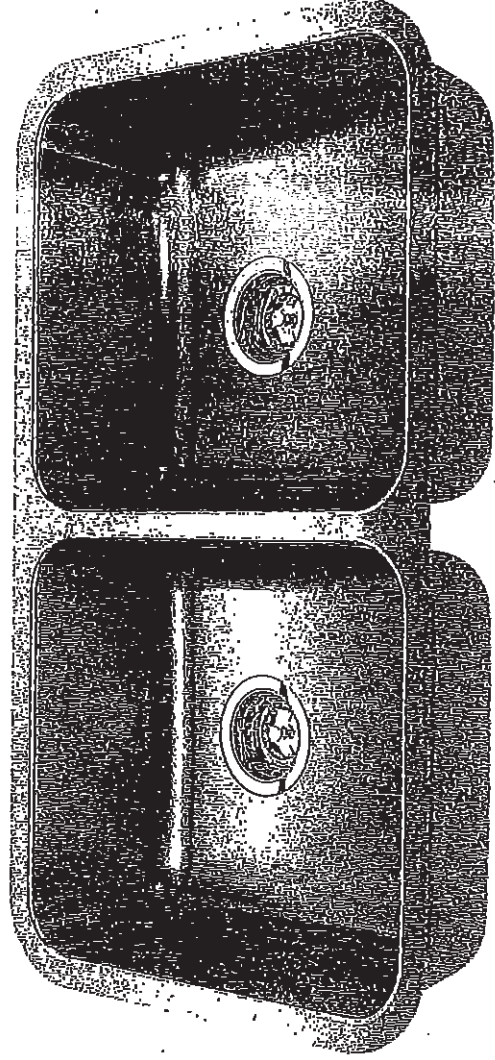

Optional Accessories




BG10S

BG10S


MB100

CATW

DBRT0S

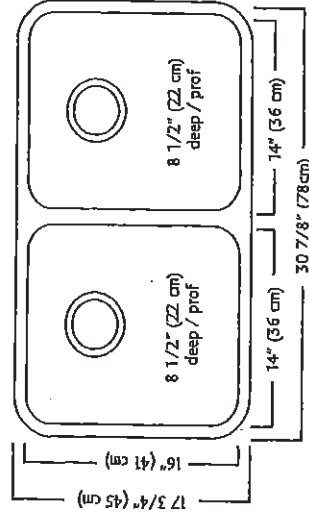

illustrations.



ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

~

Franke Kindred Canada Limited
P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408


CU-COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON

21 of 41

STANDARD KITCHEN FAUCET

Align

Modern

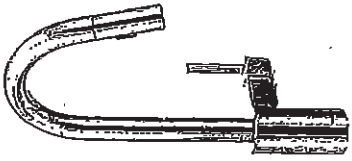

Single Handle Pull-Down Kitchen
Faucet†

Model 7565†

CU-COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON

2 of 41

*American
Standard*

**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (illustrated)
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:
24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:
17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -
Meets or Exceeds the Following Specifications:
• ASME A112.19.2 - 2008/CSA B45.1-08


To Be Specified:
☐ Color: ☐ White ☐ Linen
☐ Faucet Finish:
☐ Supplies:
☐ 1-1/4" Trap:
☐ Nipple:

* See faucet section for additional models available

© 2014 AS America Inc.

J7

Revised 6/12

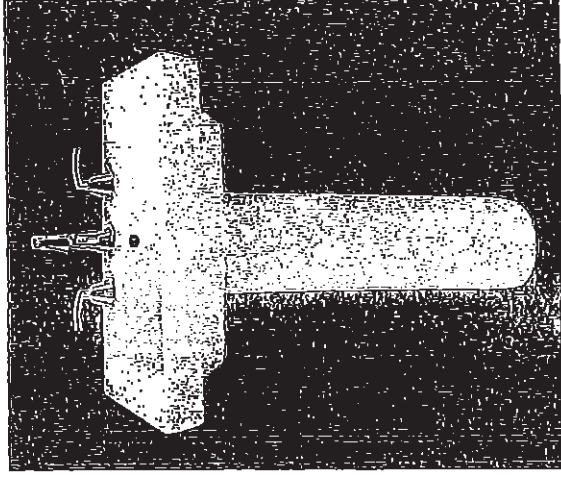

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

W
W

- Vitreous china
- Self-rimming
- Front overflow
- Supplied with template
- Faucet deck

(Faucet shown not included)



- 0346 803**
Faucet holes on 203mm (8") centres
- ☐ **0346 403** (Illustrated)
Faucet holes on 102mm (4") centres



0346 001
Centre hole only

Nominal Dimensions:
521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:
422mm (16-5/8") wide, 279mm (11") front to
back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS -
Meets or exceeds the following Specifications:
• ASME A112.19.2M for Vitreous China Fixtures.
• CAN/CSA B45 Series.

To Be Specified,
☐ Colour: ☒ White ☐ Bone ☐ Silver Gray
☐ Linen



☐ Faucet*:
☐ Faucet Finish:
☐ Supplies & Stops:
☐ Trap 1-1/4" (32 mm):

* See faucet section for additional models available

BAS-198

© 2000 American Standard Inc.

01/07

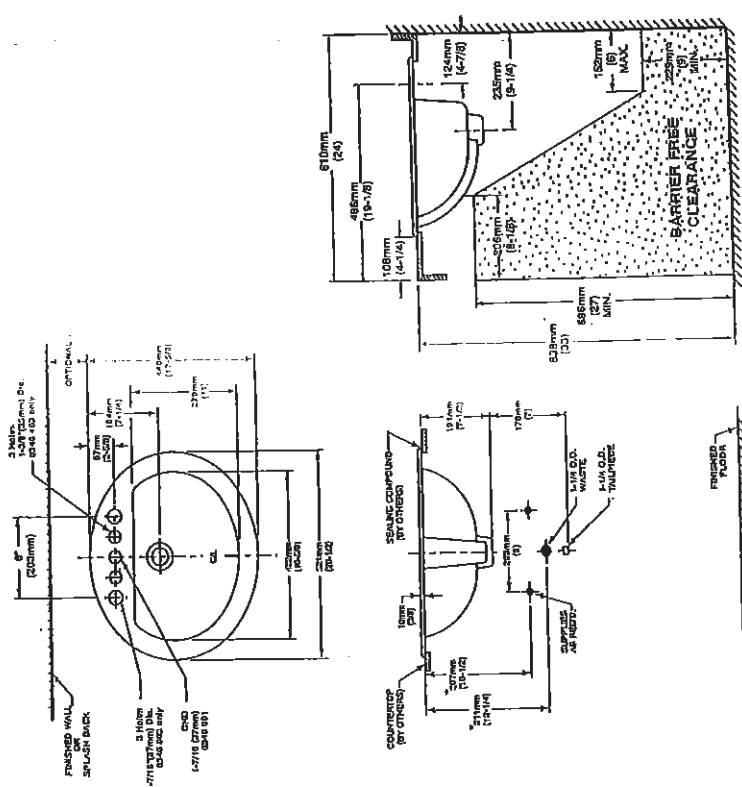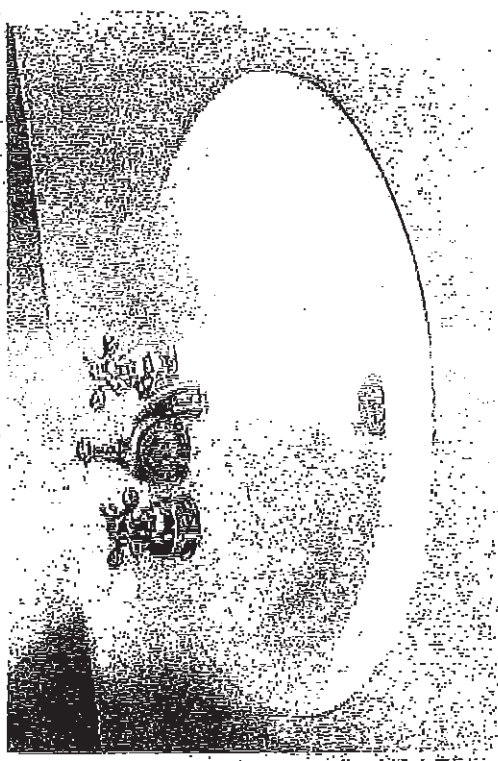


NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use
of superseded or voided pages.

WOW

CU-COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON

240641

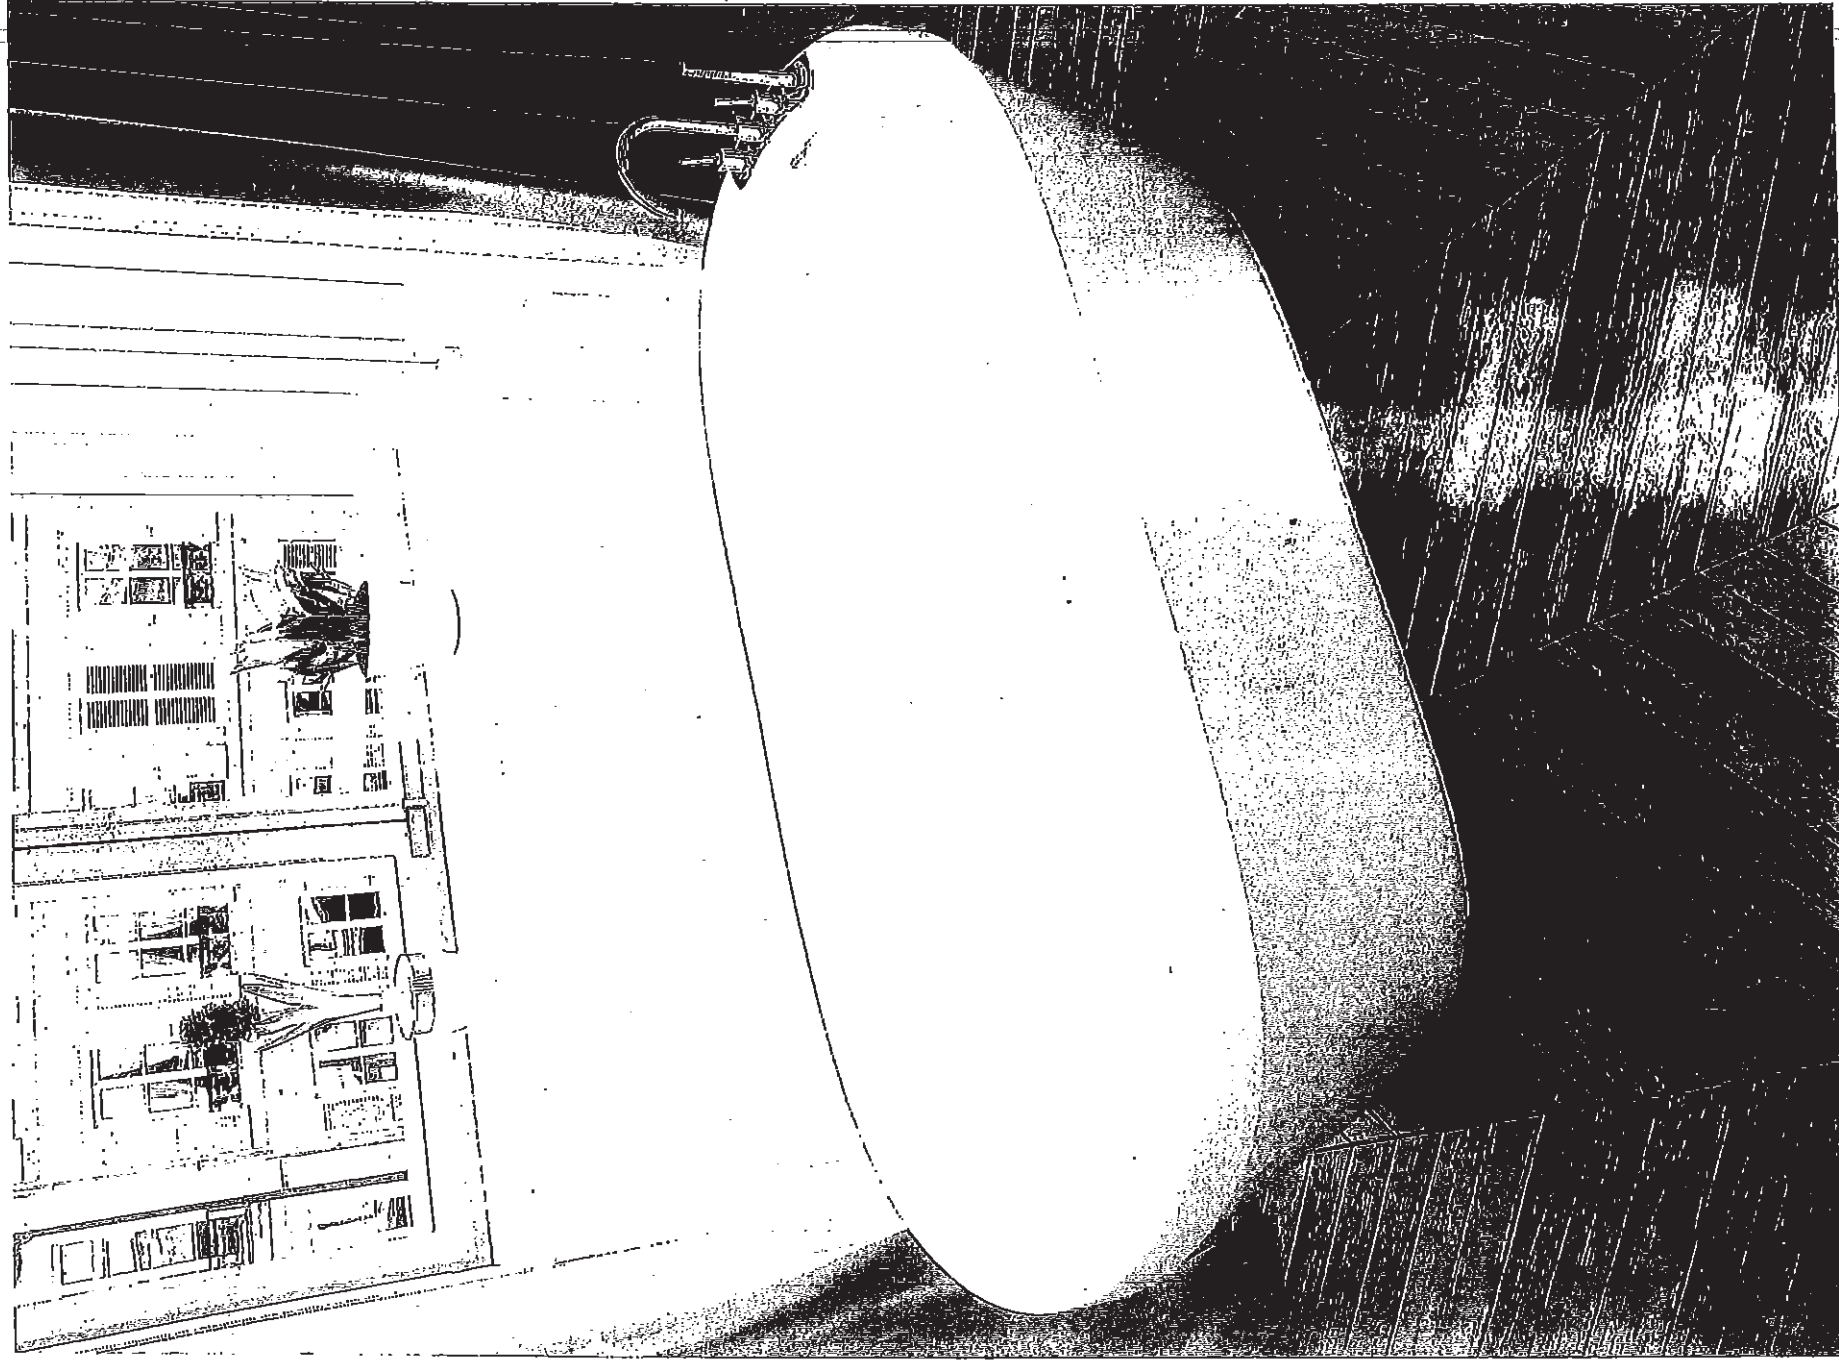


Demi CF2007

CU-COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON

25 or 41


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL

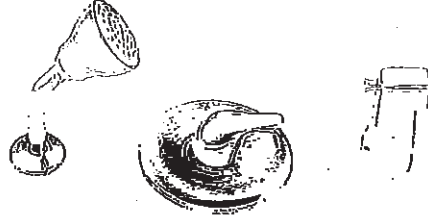

Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP†

(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

3

CU-COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON



26 of 41

SC(B)519 | ALITO Collection

Cyclone[®]
Breathe Better

Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release aluminum mesh filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minutes time-delay OFF feature
- Plug-in connection

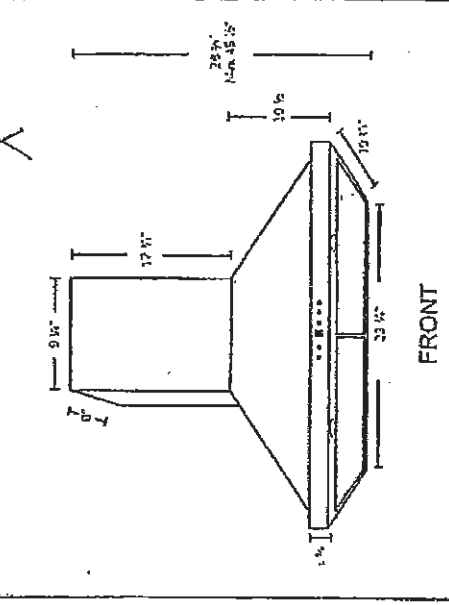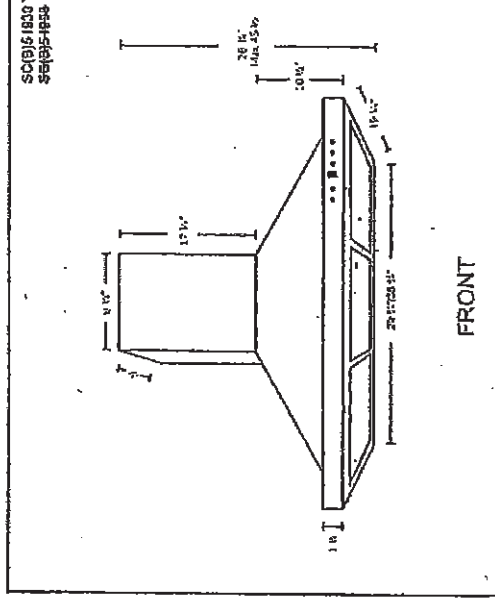

Options

- Filters:
 - SC519 - Quick Release Aluminum Mesh Filters
 - SCB519 - Quick Release Stainless Steel Baffle Filters**
- Chimney Flues:
 - A1.CH10 - short (7'-8' ceilings)
 - A1.CH18 - standard (8'-9' ceilings)
 - A1.CH30 - extended (9'-11' ceilings)
- Widths: 24", 30", 36"

Specifications

- Air Flow Volume: 550 CFM
- Electrical Connection: 120 V/60 Hz
- Power Consumption: 300 Watts

- Current: 2.5 Amps
- Fan Speed: 1599 RPM
- Fan Type: Centrifugal Blower

- Finishes: Stainless Steel
- Ducting: 6" Round
- Noise Level: Min. 2 Sones
Max. 6 Sones



Toronto • Vancouver • Boston
www.CycloneRangeHoods.com

CU- COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON

27³ 41

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT541SZD


Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.


IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

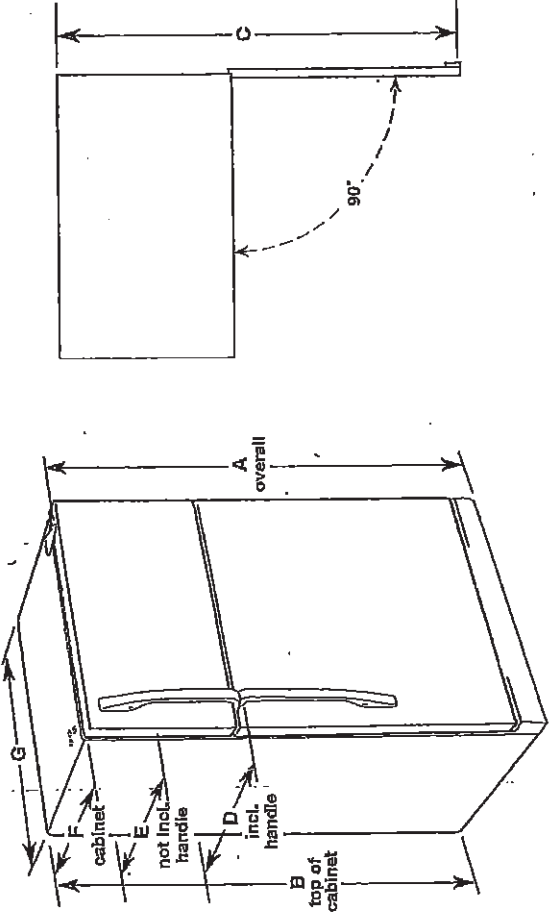

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	65 1/4" (168.3 cm)	65 1/2" (168.4 cm)	62 1/4" (159.1 cm)	32 1/4" (83.5 cm)	30 5/8" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT541SZD	27.3 cu. ft.	Yes	65 1/4" (168.3 cm)	65 1/2" (168.4 cm)	62 1/4" (159.1 cm)	34" (86.4 cm)	32 1/2" (82.3 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

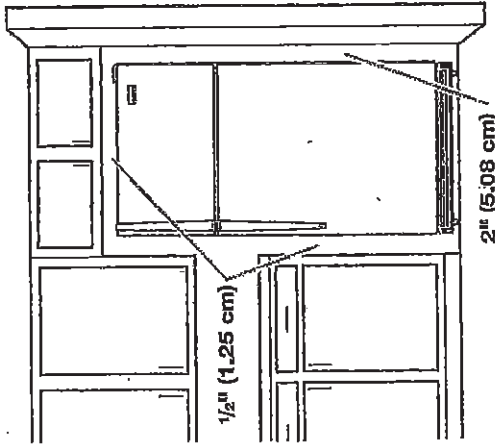

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.





Ref. W10674106
10/29/14

m m

CU- COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON

28 of 41

Refrigerator Door Swing Verification

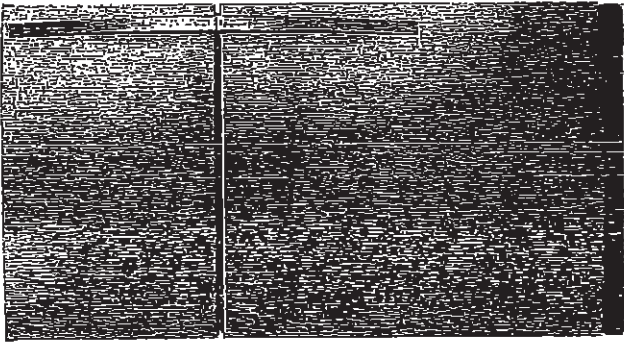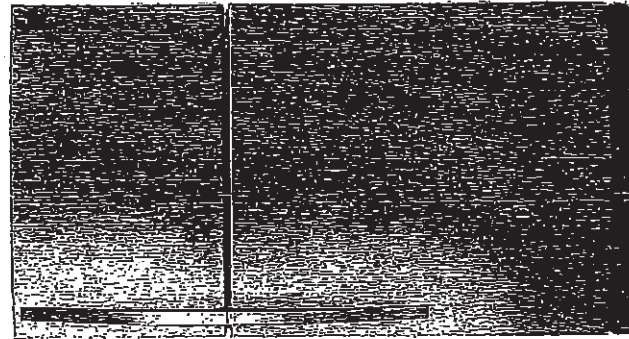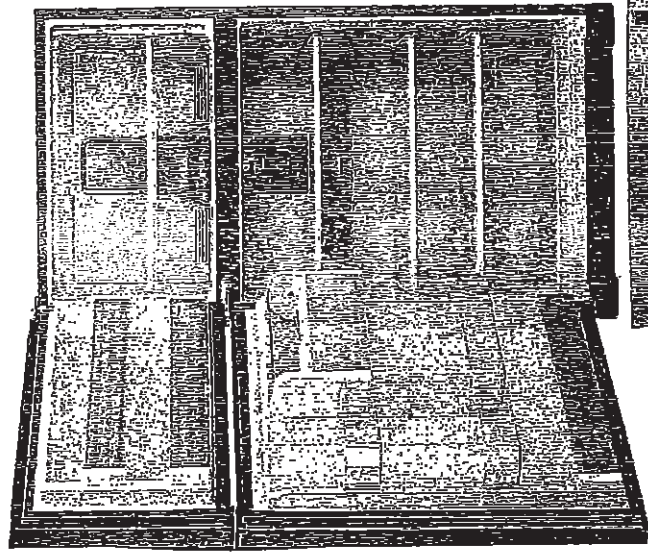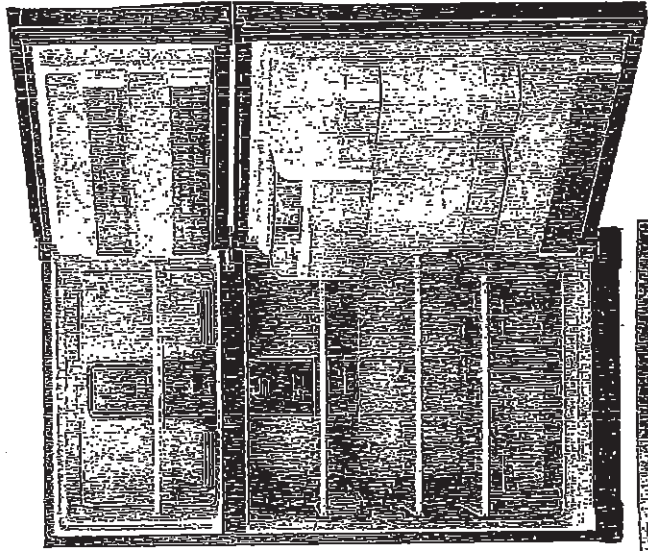

When facing the refrigerator

☐

RIGHT HAND
DOOR OPENING

- Hinges on right
- Handle on left

INITIAL

☒

LEFT HAND
DOOR OPENING

- Hinges on left
- Handle on right


INITIAL

Please check and INITIAL your door swing selection.

sm

CU-COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON

29 of 41

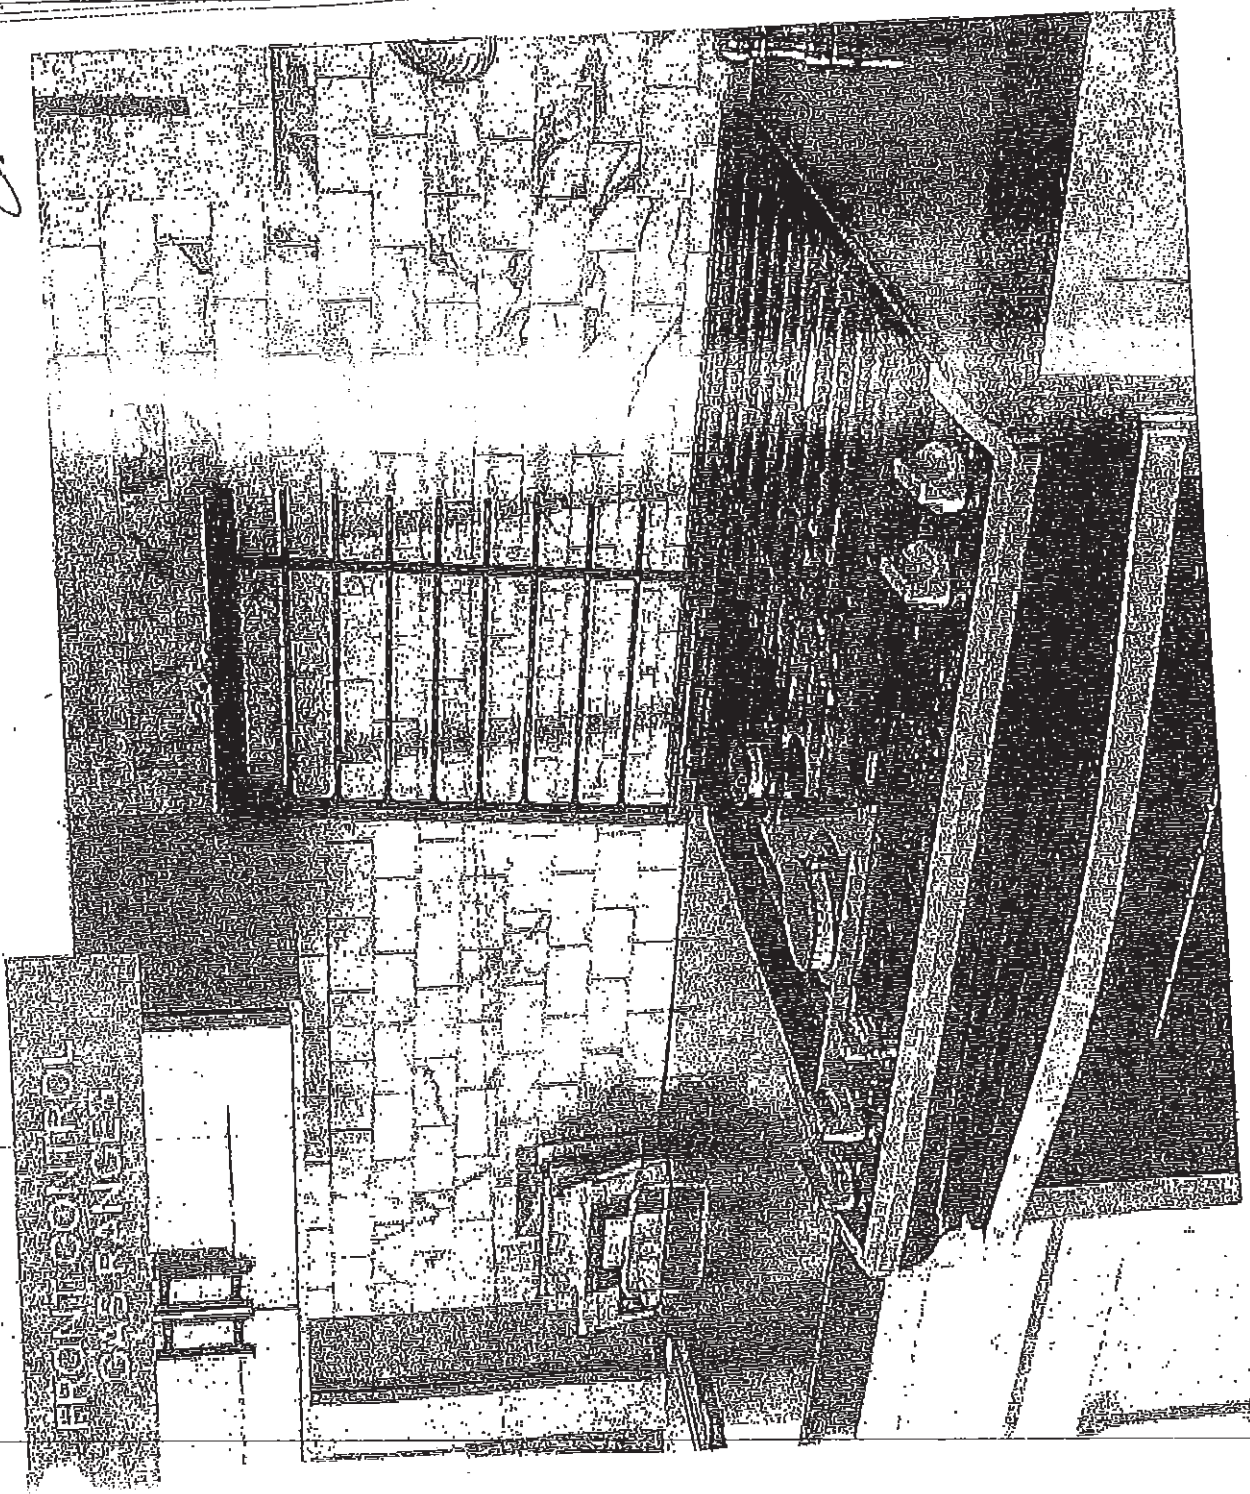

FEATURING



TimeSaver™ system
The TimeSaver™ system's Frozen Bake Technology allows you to skip preheating for favorites like pizza, lasagna, chicken nuggets, fries or pies so you can cook frozen foods faster.



HeatRight™ system
The HeatRight™ system's True convection helps you to cook food faster* with a real fan and third heating element to circulate hot air over, under, and around food.



CompleteClean™ system
The CompleteClean™ system's EZ-2-Lift™ hinged grates give you quick access to spills on the cooktop. The industry first hinged design allows you to wipe up under them without removing them entirely. For a more thorough clean, the grates are also dishwasher-safe.

Every day, care™

From the #1 Selling Appliance brand in the USA†

CU-COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON

30.41

Whirlpool® 30" (76.2 cm) Slide-in Gas Range C

PRODUCT MODEL NUMBERS


WEG760H0D WEG745H0F

GAS SUPPLY REQUIREMENTS

Gas supply line:
Provide a gas supply line of 3/4" (1.9 cm) rigid pipe to the range location. A smaller size pipe or longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be 1/2" (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.
NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape.
Flexible metal appliance connector:
If local codes permit, a new CSA design-certified, 4 to 5 ft (122 to 152.4 cm) long, 1/2" (1.3 cm) or 3/4" (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.



- A 1/2" (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the appliance pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the range.
- Must include a shutoff valve.
- The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



- A. Gas supply line
- B. Shutoff valve "open" position
- C. To range

Gas Pressure Regulator


The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

- Natural gas:
Minimum pressure: 5" WCP
Maximum pressure: 14" WCP
- LP gas:
Minimum pressure: 11" WCP
Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

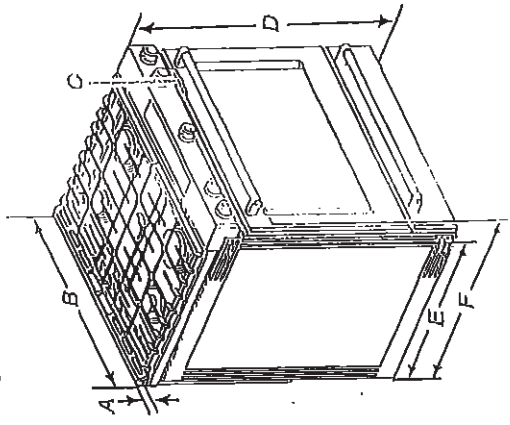

- A. 19 1/2" (49.5 cm) height from cooktop to top of vent
- B. 29 1/2" (75.3 cm) height from the top right-hand side of the oven frame to top of cooktop edge with leveling legs screwed all the way in
- C. 28 3/4" (71.9 cm) max depth from front of console to back of range
- D. 28 3/4" (71.9 cm) max depth from handle to back of range
- E. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in
- F. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.
* Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Type of Gas

- Natural gas:**
This range is factory set for use with Natural gas. See "Gas Conversions" section. The model/serial rating plate located behind the control panel has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.
- LP gas conversion:**
Conversion must be done by a qualified service technician. No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

TEFLON is a registered trademark of Chemco.



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

CU-COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON

31 of 41


Front Control Gas Ranges

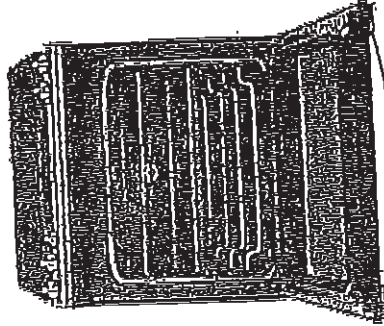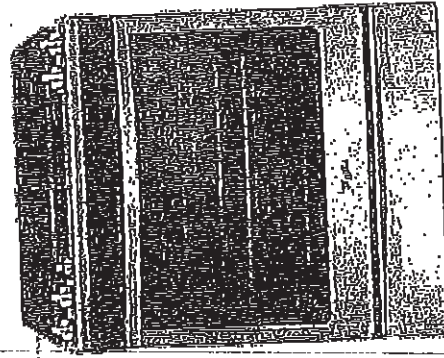

Available colors



S
Stainless
Steel



H
White
Enamel



E
Black
Enamel

WEG745H01

30" Freestanding Range - 5.8 cu. ft.



TimeSaver™ system
• Frozen Bake™ Technology



HeatRight™ system
• True Convection
• Convection Conversion
• AccuSimmer™ burner
• Ceramic Grid burner
• Temperature Sensor




CompleteClean System
• EZ-2-Lift™ Hinged Grates
• Advanced Self-cleaning Technology
• Dishwasher-safe knobs



ReadySet™ system
• (2) SpeedHeat™ burners
• Rapid Reheat
• Keep Warm
• Delay Cook

PRODUCT DIMENSIONS


Dimensions shown are for the standard model. Dimensions for other models may vary.



- Overall height
- Overall width
- Overall depth
- Overall width including handles
- Overall depth including handles
- Overall height including handles

IMPORTANT: Always use the correct gas valve and gas line for the installation. The gas line must be installed by a qualified professional. The gas line must be installed in accordance with the local code and the National Fuel Gas Code (ANSI Z223.1).

CRITICAL OPERATING DIMENSIONS

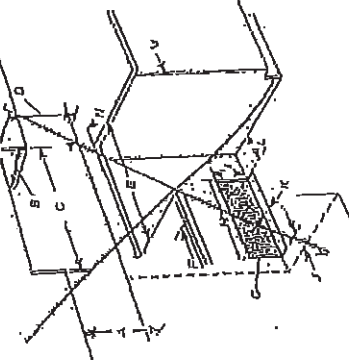

- Clearance to back wall
- Clearance to side wall
- Clearance to top of cabinet
- Clearance to bottom of cabinet
- Clearance to side of cabinet
- Clearance to top of cabinet

IMPORTANT: Always use the correct gas valve and gas line for the installation. The gas line must be installed by a qualified professional. The gas line must be installed in accordance with the local code and the National Fuel Gas Code (ANSI Z223.1).

ACCESSORIES & REPLACEMENT PARTS

- Part number 827383 - Anti-Tip Kit for Range
- Part number 41755 - Quick Baking Stone
- Part number 408500 - Porcelain Broiler Pan & Grid
- Part number W1013100 - Premium Broil Pan & Roast Rack
- Part number 8003 - Distance Light Bulb - 40 Watt



© 2011 Whirlpool. All rights reserved. 516. Part No. WEG745H01

*Compared to a standard model. Not to be used for pizza, roasting, etc. and broiling. *Compared to standard model on the same model. Based on 12-month average of unit sales. Refrigeration, Cooling, Dishwasher, and Laundry appliances. Traction, 2011.

CU- COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON

32 of 41

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Install Anti-Tip Bracket


⚠ WARNING



Tip Over Hazard

A child or adult can tip the range and be killed.
Install anti-tip bracket to floor or wall per installation instructions.
Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.
Re-engage anti-tip bracket if range is moved.
Do not operate range without anti-tip bracket installed and engaged.
Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warning drawer.
2. Determine which mounting method to use: floor or wall.
If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/₁₆" (31.9 cm) from centerline as shown.

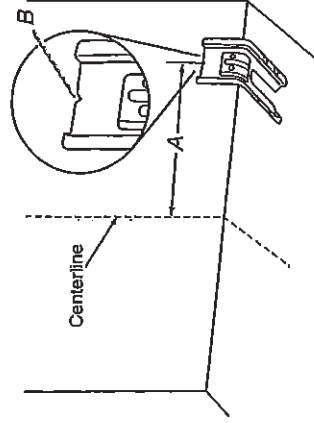


A. 12⁹/₁₆" (31.9 cm)
B. Bracket V-notch

4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.


Floor Mounting



Rear position




Front position




Diagonal (2 options)

Wall Mounting



5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1⁵/₈" (4.1 cm) screws provided.
6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

M

33 of 41



OTHER AVAILABLE COLORS

	Black Model: WDF310FAAB
	Biscuit-on-Biscuit Model: WDF310FAAT
	White Model: WDF310FAAW
	Universal Silver Model: WDF310FAAD



DIMENSIONS		KEY FEATURES!
Maximum Height	34 1/2 Inches	
Minimum Height	33 1/2 Inches	
Height	34 1/2 Inches	
Depth	24 1/2 Inches	
Width	23 7/8 Inches	
Dimensions shown are for planning purposes only. For complete information, see installation instructions packaged with product.		ENERGY STAR® Qualified No One Has Fewer Repairs 17 Years In A Row Resource - Efficient Wash System CEE Tier 1 qualified Tail Tub Design White Plastic Interior Quiet Partner(TM) Sound Package Auto Soil Sensor Electronic Controls 3 Automatic Cycles 1-Hour Wash Cycle Heavy Wash Cycle Normal Cycle 4 Options High Temperature Wash System Heated Dry Option 4 Hour Delay Wash Option 4-Tier SheerClean Direct Feed Wash System Control Lock Vinyl Racks In-Rack Silverware Basket
ELECTRICAL		
15 Amps Amps. 60 Hz. 120 V. 15,		
Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.		

CU-COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON


34.4



Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB
WDF111PAB
WDF120PAF
WDF121PAF
WDF310PAA
WDF310PFA



WDF310DPLA
WDF320PAD
WDF330PAY
WDF520PAD
WDF530PAY
WDF530PLY

WDF530PSY
WDF540PAD
WDF730PAY
WDT710PAY
WDT720PAD
WDT770PAY


Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.




Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4"N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3985556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

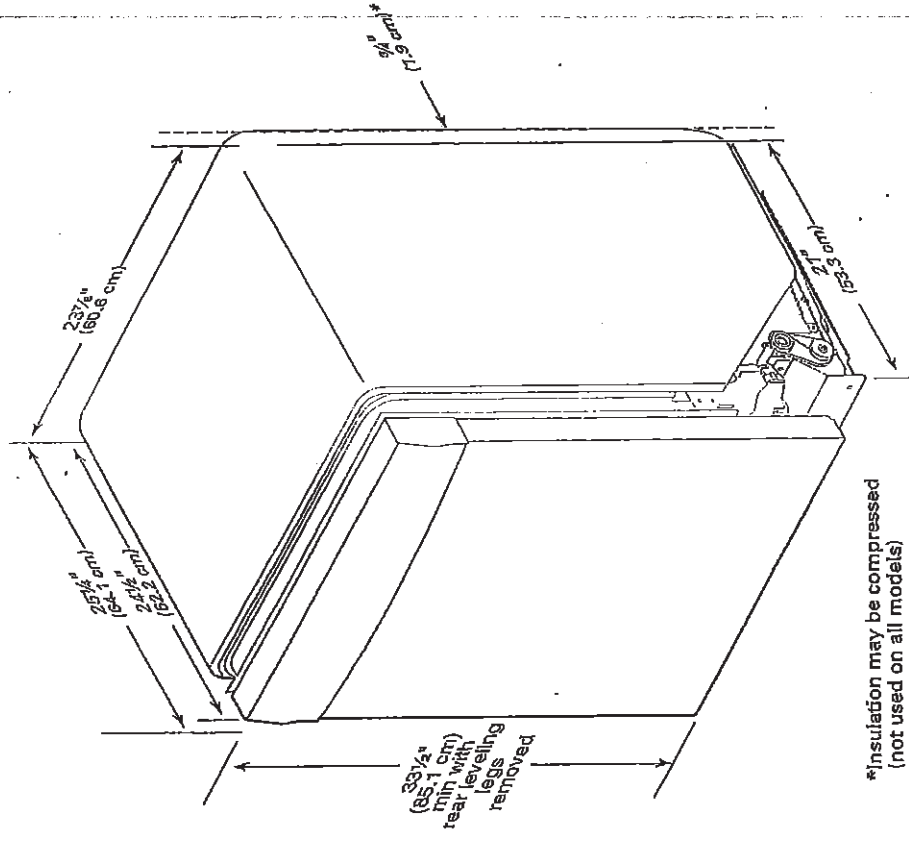

*Insulation may be compressed (not used on all models)


W

35411

WDE-328 P.44

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

Check that all surfaces have no protrusions that would prohibit dishwasher installation.

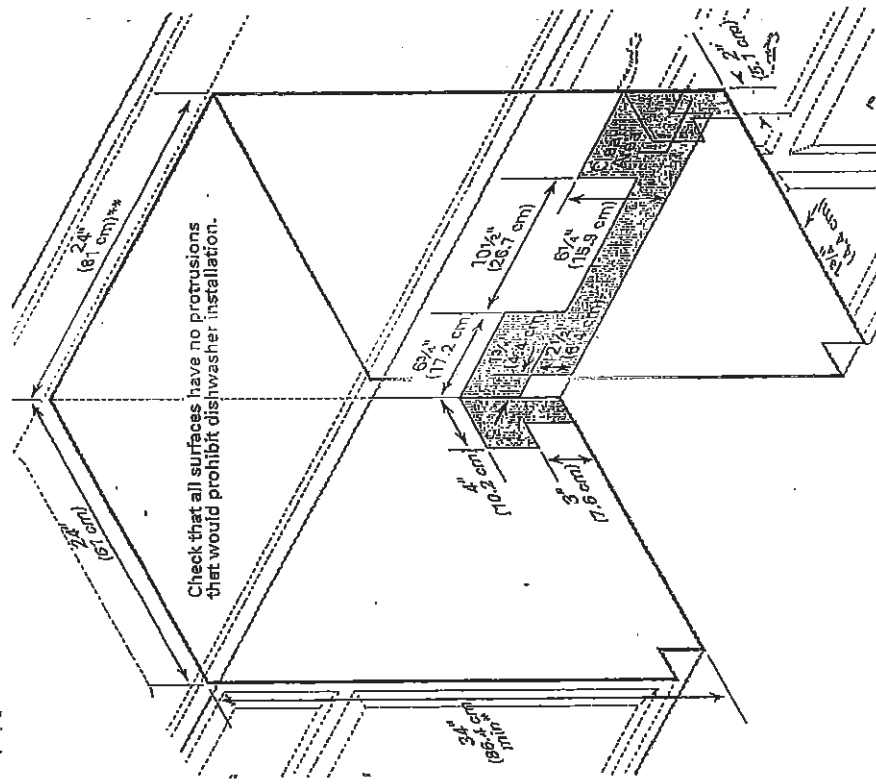


CU-COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON

36 of 41

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryer | Washers | Front Load Washers | WFW5620HW

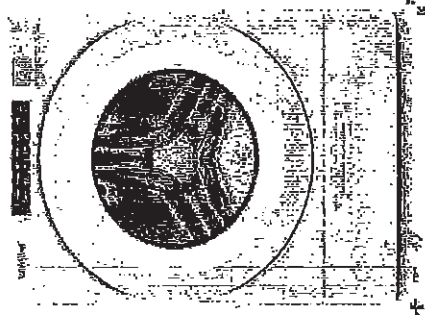

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm; 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm; 56-1/2 in
Minimum Height	98.11 cm; 38-5/8 in
Width	68.58 cm; 27.0 in

Appearance

LCD Touch Screen	No
------------------	----

Window

Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
----	----

Power Cord Included

Yes

mm

CU-COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON

37.4

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).


IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models* ✓

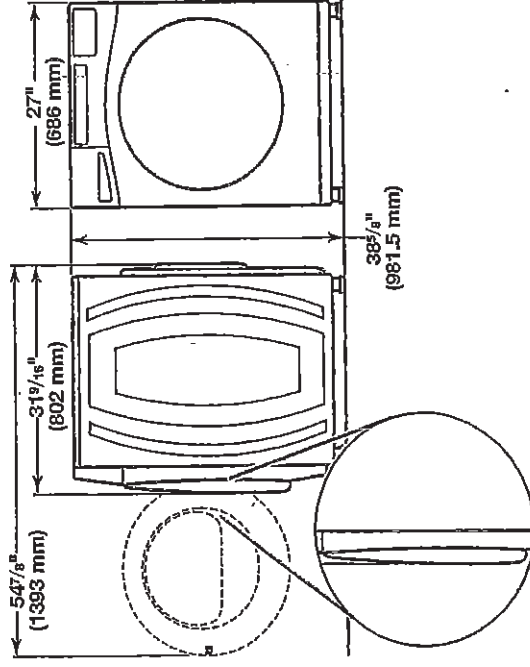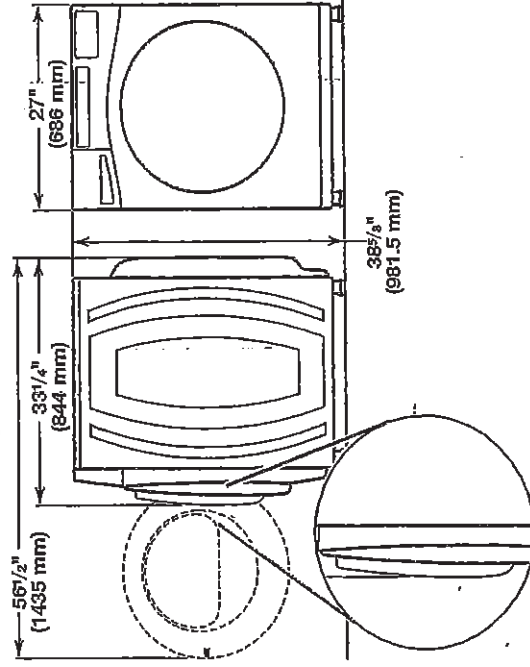


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

Maytag Models

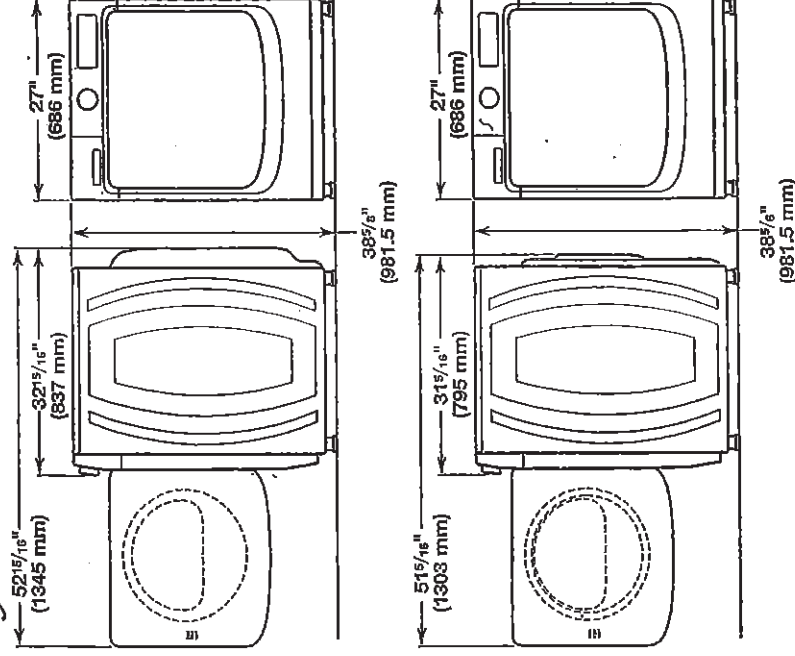

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

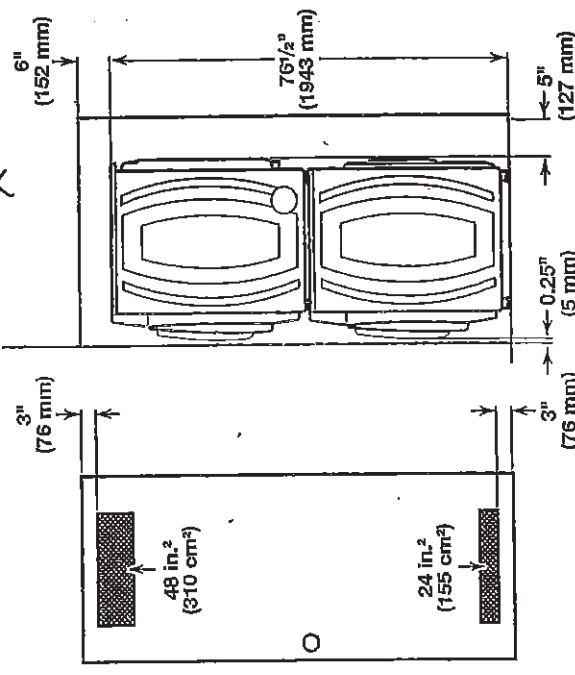


~~~~~

CU-COUNTRY LANE  
LOT 1-3  
20-2329 ELEV A  
THE HAMPTON


38 of 41

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation: X

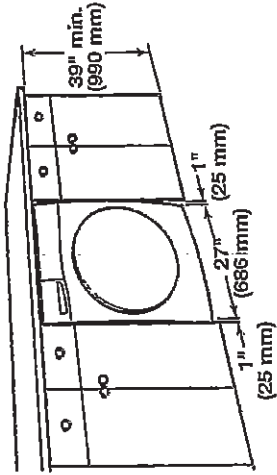

Recessed area or closet installation: X

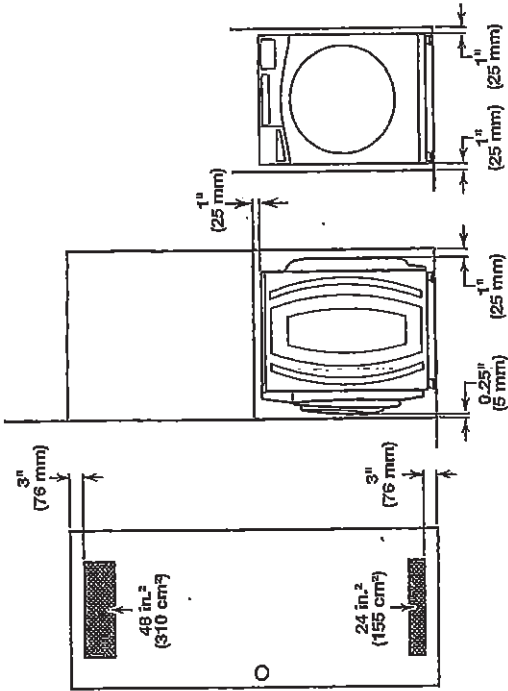

Custom cabinet installation: X

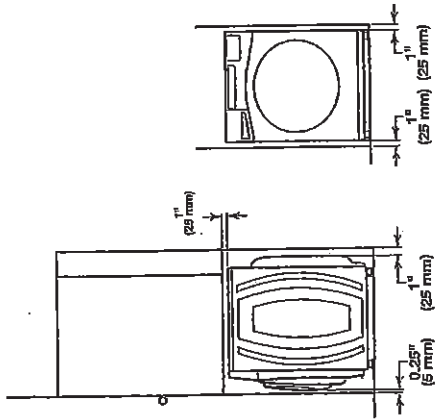


## DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


**IMPORTANT:** To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

### Floor standpipe drain system

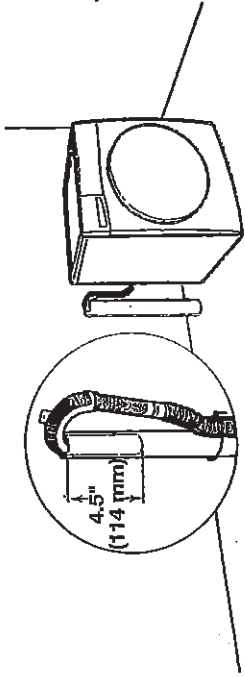


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

### Wall standpipe drain system

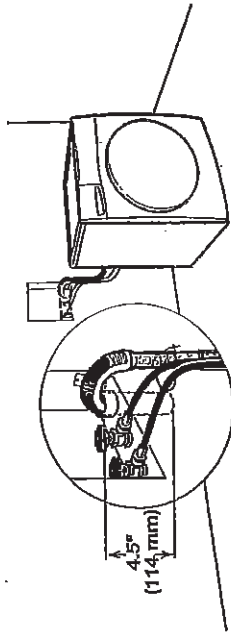

See requirements for floor standpipe drain system.

### Laundry tub drain system

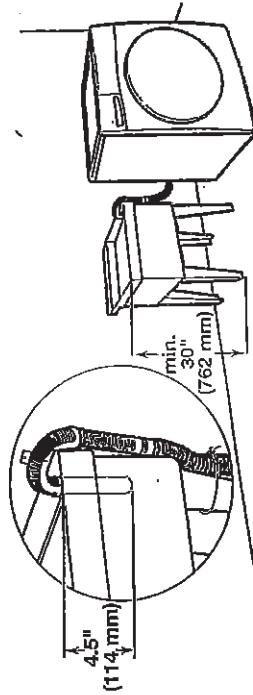


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

CU- COUNTRY LANE  
LOT 1-3  
20-2329 ELEV A  
THE HAMPTON

39 of 41

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada (English) | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW

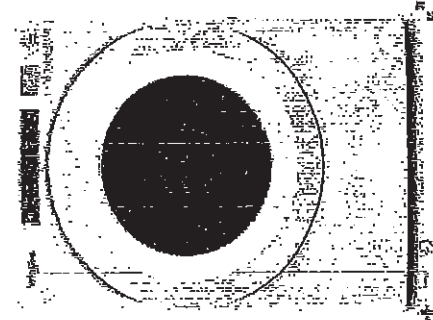

7.4 cu. ft. Front Load Electric  
Dryer with Intuitive Touch  
Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

|                                |                      |
|--------------------------------|----------------------|
| Depth                          | 78.74 cm, 31.0 in    |
| Depth With Door Open 90 Degree | 138.43 cm, 54-1/2 in |
| Height                         | 98.42 cm, 38-3/4 in  |
| Width                          | 68.58 cm, 27.0 in    |

Configuration and Overview

|           |          |
|-----------|----------|
| Fuel Type | Electric |
|-----------|----------|

Cycles and Options

|                          |     |
|--------------------------|-----|
| Cycle Time Remaining     | Yes |
| Lint Filter Indicator    | No  |
| Number of Drying Cycles  | 36  |
| Number of Dryness Levels | 3   |

Ventilation System

|                     |                           |
|---------------------|---------------------------|
| Long Vent           | No                        |
| Maximum Vent Length | 64                        |
| Venting Direction   | Left, Right, Bottom, Rear |

Electrical


|                     |     |
|---------------------|-----|
| Hz                  | 60  |
| Power Cord Included | Yes |

W

CU-COUNTRY LANE  
LOT 1-3  
20-2329 ELEV A  
THE HAMPTON

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

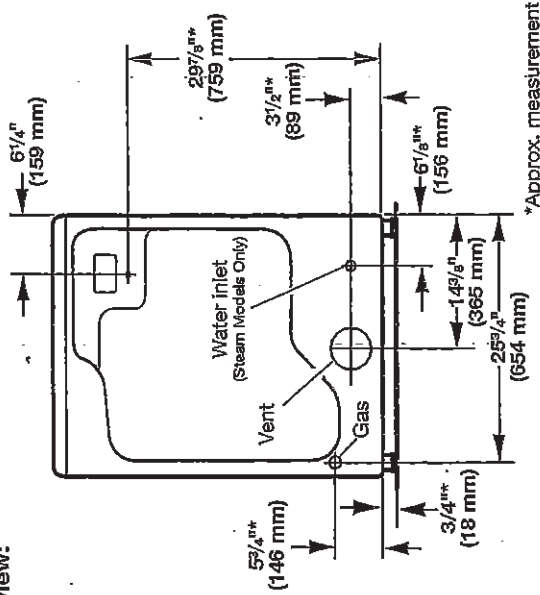

**NOTE:** Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

#### Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


**NOTE:** No other fuel-burning appliance can be installed in the same closet as a dryer.

#### Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

#### Recommended installation clearances (dryer only):

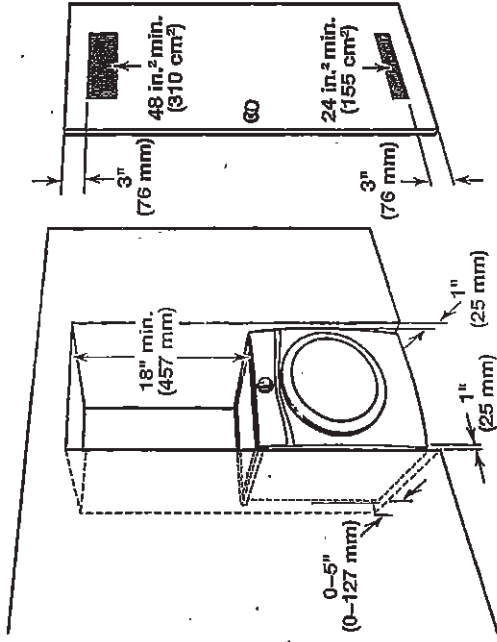

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be knicked.

#### Custom under-counter installation: X

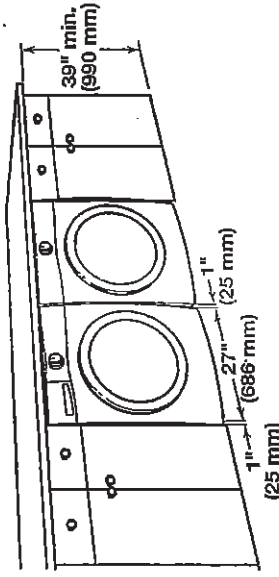

#### Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

#### Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

#### For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

~~~~~

CU-COUNTRY LANE
LOT 1-3
20-2329 ELEV A
THE HAMPTON

41 of 41

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.

- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING


Explosion Hazard
Keep flammable materials and vapors, such as gasoline, away from dryer.
Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
Failure to do so can result in death, explosion, or fire.

You will need:


- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.

DRYER DIMENSIONS
Front view:

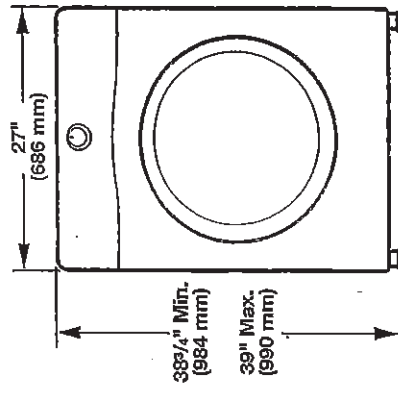


Side view:
Whirlpool Models ✓

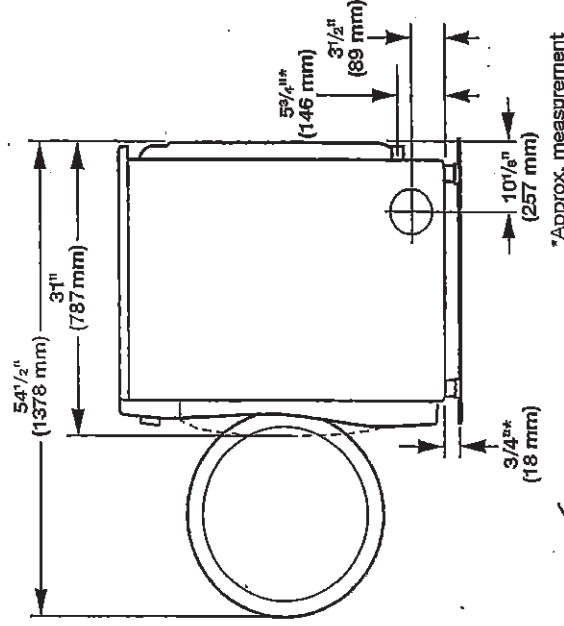

*Approx. measurement

Maytag Models

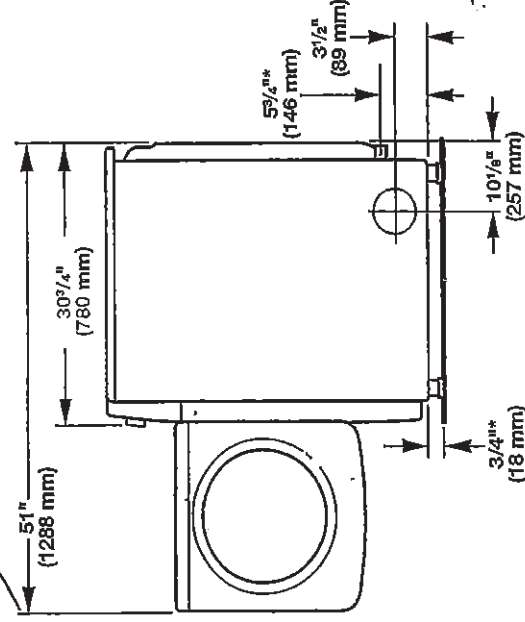

*Approx. measurement