



06-Aug-21

LOT	057-6	REVISED	20-1577 ELEV A THE ROYCROFT
PURCHASERS: SUTHAJINI THARMALINGAM		CONTACT NO: 647-986-5531	
VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4			

COFFERED CEILING IN GREAT ROOM *

3RD FLOOR BALCONY LOWER DECK

WAFFLE CEILING IN GREAT ROOM **DELETED** *

- ☒ FINISHED BASEMENT
- ☐ COLD CELLAR
- UPGRADED / MODIFIED ELEVATION
- ☐ CORNER UPGRADE
- ☐ SIDE UPGRADE
- ☐ REAR UPGRADE
- CEILING UPGRADE - SMOOTH
- ☒ MAIN FLOOR
- ☐ SECOND FLOOR
- ☐ WALK OUT DECK
- ☐ WALK OUT BASEMENT

- * * * * *
- ☒ MAIN FLOOR
- ☐ SECOND FLOOR
- ☐ BASEMENT

- ADDITIONAL ROUGH-INS
- ☒ 200 AMP SERVICE
- ☐ WET BAR ROUGH IN
- GAS ROUGH-IN
- ☒ STOVE
- ☒ BBQ
- HOODFAN VENTING
- ☒ 6" ROUND DUCT
- ☐ 7" ROUND DUCT
- ☐ HUMIDIFIER
- ☒ AIRCON
- ☐ DRYER
- ☐ ADDITIONAL FIREPLACE

- FULL BASEMENT STAIRS: PAINT GRADE
- UPPER BASEMENT STAIRS: N/A
- LOWER BASEMENT STAIRS: N/A
- STAIRS TO LOWER LEVEL: ALL OAK
- STAIRS TO UPPER LEVEL: N/A
- MAIN STAIRS: ALL OAK
- MEDIA STAIRS (if applicable): N/A

Date	July 20/21	Signature on	July 20/21	IRIT Salem
		Purchaser	file	
Date			APPROVED	
			03 03 2021	mylaseen

Date Approved: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



30-Jul-21

Interior Finishing Selection Sheet

LOT 057-6

20-1577 ELEV A THE ROYCROFT

PURCHASERS: SUTHAJINI THARMALINGAM

CONTACT NO: 647-986-5531

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Appliances

6-9117 Kitchen HoodFan

Cabinetry

1-6247 Kitchen Cabinet Colour/Style

3-7672 Kitchen Cabinet Hardware

25-8386 Main Bathroom Cabinet Colour/Style

29-2086 Main Bathroom Cabinet Hardware

28-8796 Main Bathroom Countertop

20-8385 Master Ensuite Cabinet Colour/Style

22-2086 Master Ensuite Cabinet Hardware

21-8822 Master Ensuite Countertop

Carpet

37-9248 Bedroom 2 Flooring

38-9248 Bedroom 3 Flooring

14-9248 Family Room Flooring

36-9248 Master Bedroom Flooring

32-1079 Throughout Underpad

Ceramics

16-9257 Foyer Flooring

17-2225 Foyer Grout

7-8914 Kitchen/Breakfast Flooring

8-2225 Kitchen/Breakfast Grout

46-5494 Laundry Room Flooring

☒ CYCLONE 30" STAINLESS CHIMNEY/CANOPY HOODFAN
STAINLESS STEEL SCBS1930 UPG 30" PAGE 28

☐ CAMDEN SHALE GREY CL Viking III MAPLE

☐ HARDWARE 135 STD

☐ SLAB LPL SPRING BLOSSOM Viking III LPL

☐ HARDWARE 9677 STD

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46 Formica

☐ SLAB LPL STAINLESS Viking II LPL

☐ HARDWARE 9677 STD

☐ Countertop WHITE CARRARA 4924-38 Wilsonart

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

☐ Underpad 500 Series STD

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

☐ Grout (27) Silver STD

☒ Biel Merengo (Grey) UN.BL.MRG.1224 UPG_2 12 x24 TO BE
INSTALLED FROM FRONT TO BACK SKETCH # 7 PAGE 20

☐ Grout (27) Silver STD

☐ New Albion Grey GE.NA.GRY.1313 Std 13 x 13 INCL MUD ROOM

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

SK

July 29, 21
Date

Date Purchaser

Décor Consultant

Date Purchaser

Date Approved HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



30-Jul-21

LOT 057-6

PURCHASERS: SUTHAJINI THARMALINGAM

CONTACT NO: 647-986-5531

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

20-1577 ELEV A THE ROYCROFT

Ceramics

UPG

- | | |
|--|--|
| 67-2225 Laundry Room Grout | ☐ Grout (27) Silver STD |
| 30-9257 Main Bathroom Flooring | ☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13 |
| 31-2225 Main Bathroom Grout | ☐ Grout (27) Silver STD |
| 112-9020 Main Bathroom Tub Wall Tile | ☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED VERTICALLY |
| 113-2226 Main Bathroom Tub Wall Tile Grout | ☐ Grout (00) White STD |
| 23-8913 Master Ensuite Floor Tile | ☐ Biel Bianco (White) UN.BL.BIA.1224 UPG 2 12 x 24 TO BE INSTALLED SIDE TO SIDE SKETCH #8 PAGE 24 |
| 24-2225 Master Ensuite Floor Tile Grout | ☐ Grout (27) Silver STD |
| 73-8661 Master Ensuite Shower Floor Tile | ☐ Ontario Series Mosaic Snow White Matte OD.ON.SWT.0202.MT.N STD 2 x 2 |
| 74-2226 Master Ensuite Shower Floor Tile Grout | ☐ Grout (00) White STD |
| 147-8923 Master Ensuite Shower Jamb(s) and Sill(s) | ☐ Shower Jamb / Sill Thassos White STD |
| 104-9020 Master Ensuite Shower Wall Tile | ☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED HORIZONTAL |
| 105-2226 Master Ensuite Shower Wall Tile Grout | ☐ Grout (00) White STD |
| 32-9257 Powder Room Flooring | ☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13 |
| 33-2225 Powder Room Grout | ☐ Grout (27) Silver STD |
| 53-2232 Throughout Thresholds | ☐ Metal Thresholds STD |
| Electrical | ☐ Decora White Switches and Plugs STD |
| 50-5796 Throughout Switches and Plug | |
| Fireplace | ☐ Paint Grade Mantel - Cabinet (Per Plan) WHITE NF 15 STD PAGE 22 |
| 136-9114 Great Room Fireplace Mantle | ☐ Dimplex FP3033HL Electric Fireplace |
| 135-8865 Great Room Fireplace Type | |
| Granite | ☐ MSI Quartz ICED WHITE Group 1 STD 3/4" |
| 2-9069 Kitchen Countertop | |

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Srk

July 30, 2021 12:17 PM

Date Purchaser

Date APPROVED -

Décor Consultant

Date Purchaser

Date Purchaser

Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



30-Jul-21

Interior Finishing Selection Sheet

LOT 057-6

20-1577 ELEV A THE ROYCROFT

PURCHASERS: SUTHAJINI THARMALINGAM

CONTACT NO: 647-986-5531

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Hardwood

UPG

11-7497 Great Room Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

78-7497 Stair Landing to Lower Level Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

77-7497 Stair Landing to Upper Level Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

35-7497 Upper Hall Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

Interior Railings

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

43-8148 Stairs to Upper Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

Interior Stairs

116-1713 Basement Stairs Type

☐ Paint Grade Stairs STD

45-1712 Stairs to Lower Level Type

☐ Oak Stairs UPG_1

39-1712 Stairs to Upper Level Type

☐ Oak Stairs UPG_1

Interior Trim

91-9374 Throughout Trim Size

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings STD-Towns

Painting

46-7761 Stairs to Lower Level Colour

☐ Stain handrail, stringers, treads,risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl AURORA (COCOA) SHADE WILL VARY

50-7761 Stairs to Lower Level Handrail/Pickets/Posts Colour

☐ Stain handrail, stringers, treads,risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl AURORA (COCOA) SHADE WILL VARY

40-7761 Stairs to Upper Level Colour

☐ Stain handrail, stringers, treads,risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl AURORA (COCOA) SHADE WILL VARY

44-7761 Stairs to Upper Level Handrail/Pickets/Posts Colour

☐ Stain handrail, stringers, treads,risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl AURORA (COCOA) SHADE WILL VARY

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date Purchaser

Date **APPROVED**

Purchaser

Décor Consultant

Date Purchaser

Date Approved **HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4**



30-Jul-21

HEATHWOOD

Interior Finishing Selection Sheet

of

LOT 057-6

20-1577 ELEV A THE ROYCROFT

PURCHASERS: SUTHAJINI THARMALINGAM

CONTACT NO: 647-986-5531

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Painting

240-1716 Throughout Trim - Paint Colour

51-1717 Throughout Walls - Paint Colour

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

149-1737 Master Ensuite Plumbing Fixture (colour)

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Trim WHITE STD

☐ Wall WARM GREY 22 STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date

Purchaser

Date

Décor Consultant

Date

Purchaser

Date Approved: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



30-Jul-21

Sales Selection Sheet
OF

LOT 057-6

20-1577 ELEV A THE ROYCROFT

PURCHASERS: SUTHAJINI THARMALINGAM

CONTACT NO: 647-986-5531

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances

2171	Cyclone 30" Wall Mount Chimney Hood SS SCB51930	Qty: 1	KITCHEN
------	--	--------	---------

PAGE 28

Cabinetry

1260	Optional Extras 11A- Upper angle corner per unit Before June 1, 2021 VIKING DELETE UPPER ANGLED CABINET FROM PRE SEE ORIGINAL PAGE PAGE 3 OF 9	Qty: -1	KITCHEN
------	--	---------	---------

1367	Optional Extras 04H- 66cm deep fridge enclosure (counter depth)includes [1] 66cm deep cabinet and [1] 66cm deep gable(1-wall beside fridge) (note: this is not a zero clearance enclosure. Standard heights and widths will be used) Before June 1, 2021 VIKING DELETE DEEP FRIDGE FROM PRE SEE ORIGINAL PAGE 3 OF 9	Qty: -1	KITCHEN
------	--	---------	---------

1338	Optional Extras 30H- Wall cabinet with shelf for microwave (finished interior) (opening 24"W x 13 3/4"H x 17"D) * electrical priced separately Viking SEE SKETCH # 7 PAGE 20	Qty: 1	KITCHEN
------	--	--------	---------

Ceramics

1614	Upgrade 2 Tile	Qty: 1	Kit/Brk Floor
------	----------------	--------	---------------

1615	Upgrade 2 Tile	Qty: 1	M. Ensuite Floor
------	----------------	--------	------------------

Coffered Ceiling

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date	Purchaser	Date	1817 SALEM
------	-----------	------	------------

Date **APPROVED** - Décor Consultant

Date	Purchaser
------	-----------

Date Approved **HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4**



30-Jul-21

Sales Selection Sheet
10 of

LOT 057-6

20-1577 ELEV A THE ROYCROFT

PURCHASERS: SUTHAJINI THARMALINGAM

CONTACT NO: 647-986-5531

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Qty: 1

GREAT ROOM

51 Optional Upgrade

Drywall

440

Ceiling Upgrades

Smooth Ceilings Main Floor

Qty: 1

MAIN FLOOR

Electrical

342

Optional Extras

Extra wall interior outlet on Existing Circuit (does not include kitchen outlets) Upg 1 Before June 1, 2021

DEETE FROM PRE SSS SEE ORIGINAL PAGE 3 OF 9 SKETCH # 3

Qty: -1

GREAT ROOM

352

Potlights (NON-INSULATED)

T477GR-W 4" line voltage trim with flush adjustable gimbal ring (with LED Bulb) Upg 1 Before June 1, 2021

DELETE POT LIGHT FROM PREE SSS SEE SPAGE 3 OF 9 SKETCH # 3

Qty: -6

GREAT ROOM

344

Optional Extras

Ceiling rough-in (Capped)

2X R/I CAP LIGHT

1- ON A SEPARATE SWITCH

1 ON EXISTING SWITHC PLUG

SEE SKETCH # 7 PAGE 20

Qty: 2

GREAT ROOM

Plumbing

277

STANDARD Kitchen Sink Option

KINDRED Kitchen Sink Collection - Reginox NS1930U/9 Stainless Kitchen Single

Bowl Undermount Sink (or equivalent) PAGE 23

Qty: 1

Plumbing

This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.

1. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
2. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. The Vendor acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date

Purchaser

Date APPROVED - Décor Consultant

Date

Purchaser

Date-Approved HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



PURCHASERS: SUTHAJINI THARMALINGAM

20-1577 ELEV A THE ROYCROFT

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

LSH

AMOUNT:

420 **Optional Extra**

Qty:	-1
------	----

DELETE CONDUIT PIPE FROM ABOVE FIRE PLACE SEE ORIGINAL PRE SSS PAGE 4 OF 9 SKETCH # 3

30

Qty: 1

TO NICHE-ORIGINAL PAGE 5 OF 9 SKETCH # PAGE 8 OF 9
SEE NEW SKETCH # 7 PAGE 20 70" +/- FROM FLOOR

471 **Optional Extra**

Optional Extra

Optional Extra
Install Waffle Ceiling in main floor great room Before June 1 2021

DELETE WAFFLE CEILING AS PERPRE ORIGINAL SSS PAGE 5 OF 9 SKETCH #3

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.
- 0.

5

July 30 21

Date _____ Purchaser _____

Décor Consultant

1K17 SAKSM

1.
 2.
 3.
 4.
 5.
 6.
 7.
 8.
 9.
 10.

Date _____ Purchaser _____

11/1/2011
Date Approved: HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4


C2- COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

18 of 44
The Roycroft

20-1577 ELEV. A

ELEVATION A & B: 1,577 SQ FT

Sketch #5

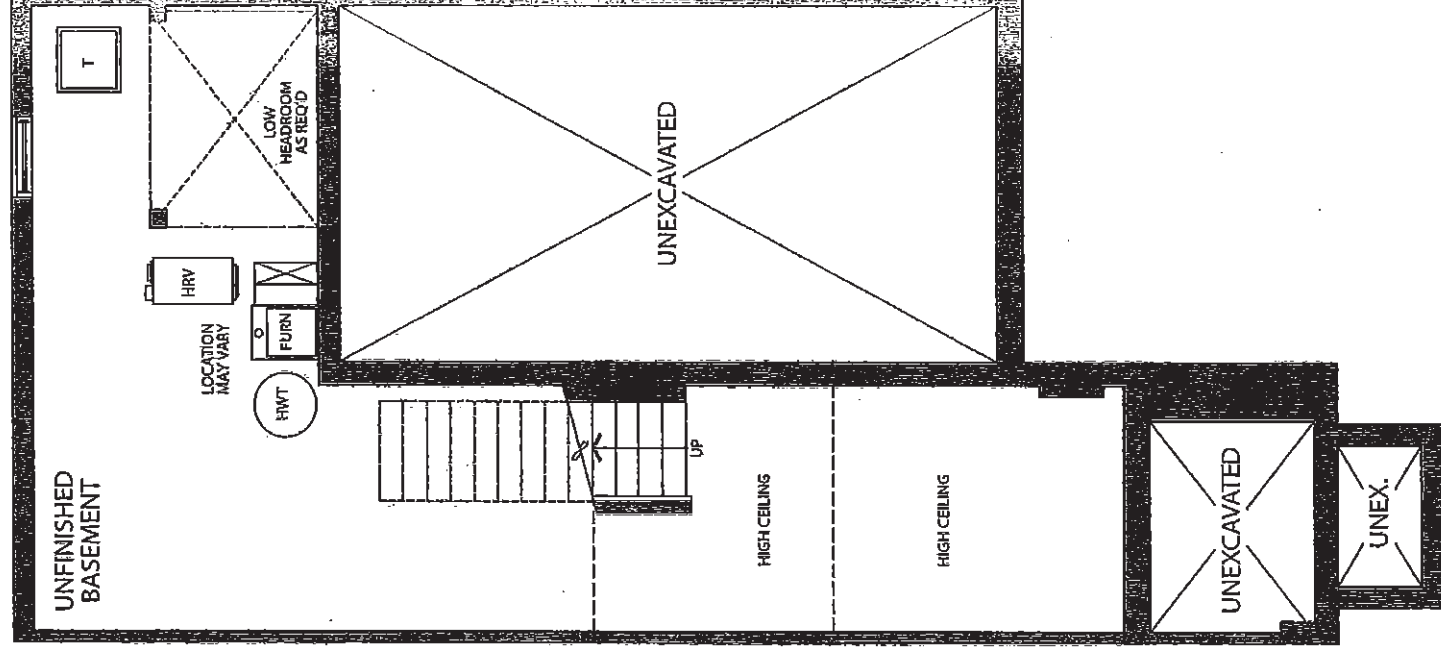

BASEMENT
ELEVATION A & B

S.T


C2- COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

19 of 44
The Roycroft

20-1577 ELEV. A

ELEVATION A & B: 1,577 SQ FT

Sketch #6

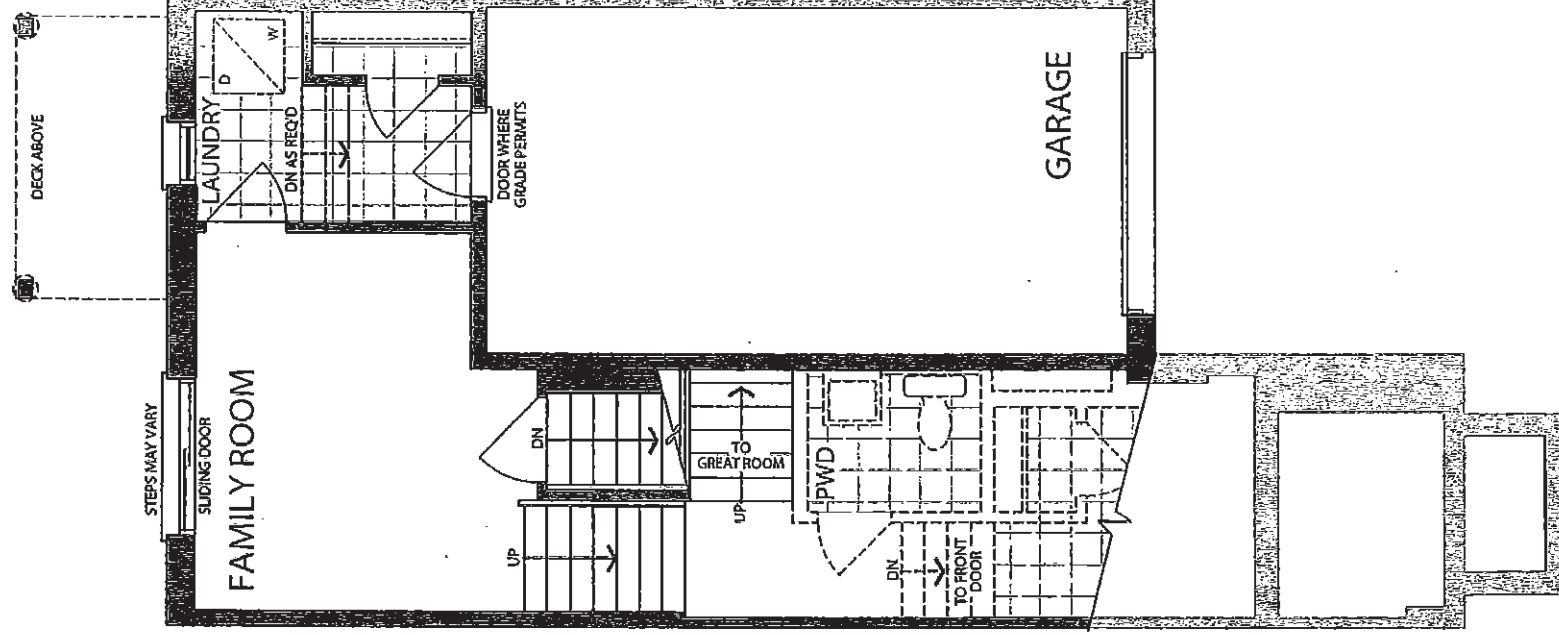

LOWER LEVEL
ELEVATION A & B

S-7

C2-COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT


20 of 144

The Roycroft

20-1577 ELEV. A

ELEVATION A & B: 1,577 SQ FT

Sketch # 7

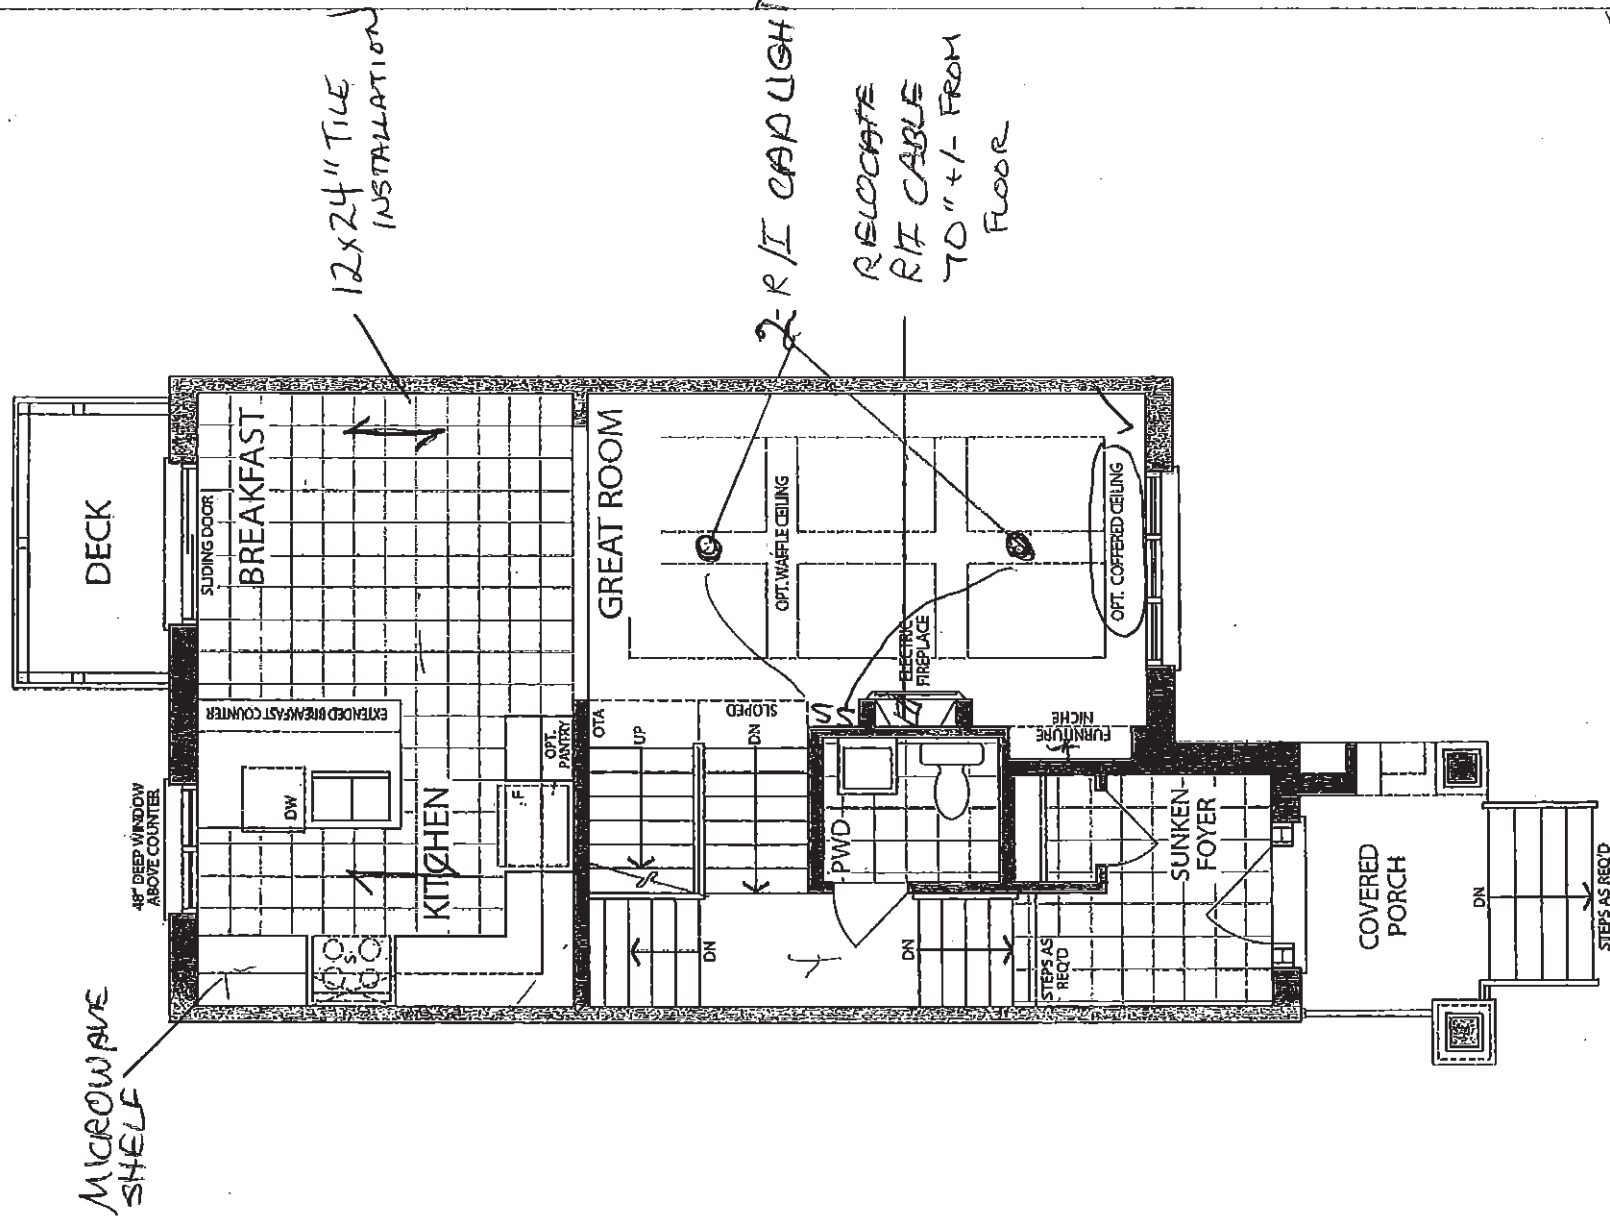

S-7

MAIN LEVEL
ELEVATION A & B


C2- COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

21 of 44
The Roycroft

20-1577 ELEV. A


ELEVATION A & B: 1,577 SQ FT

Sketch #8

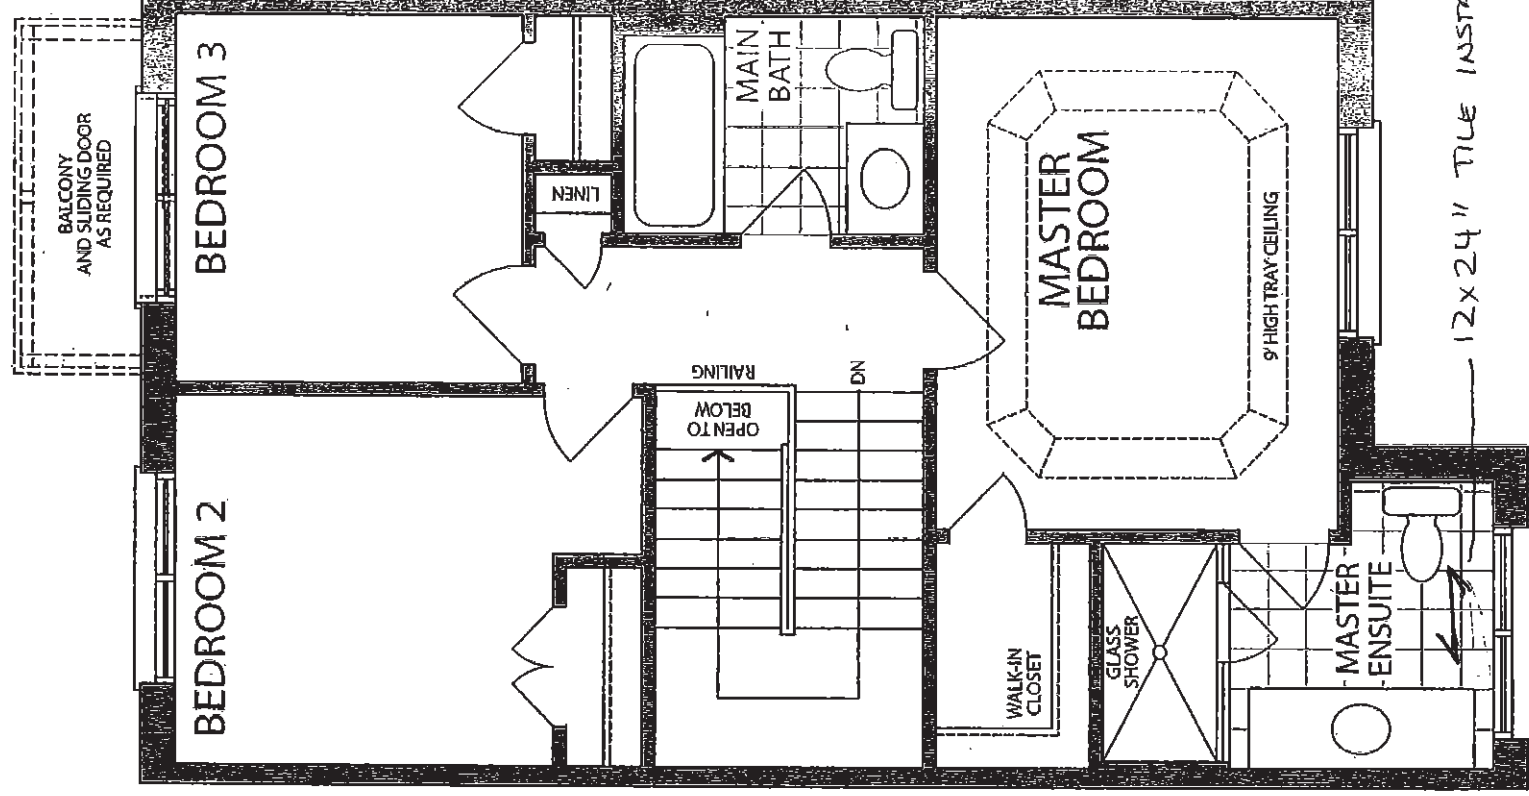

UPPER LEVEL
ELEVATION A

C2-COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

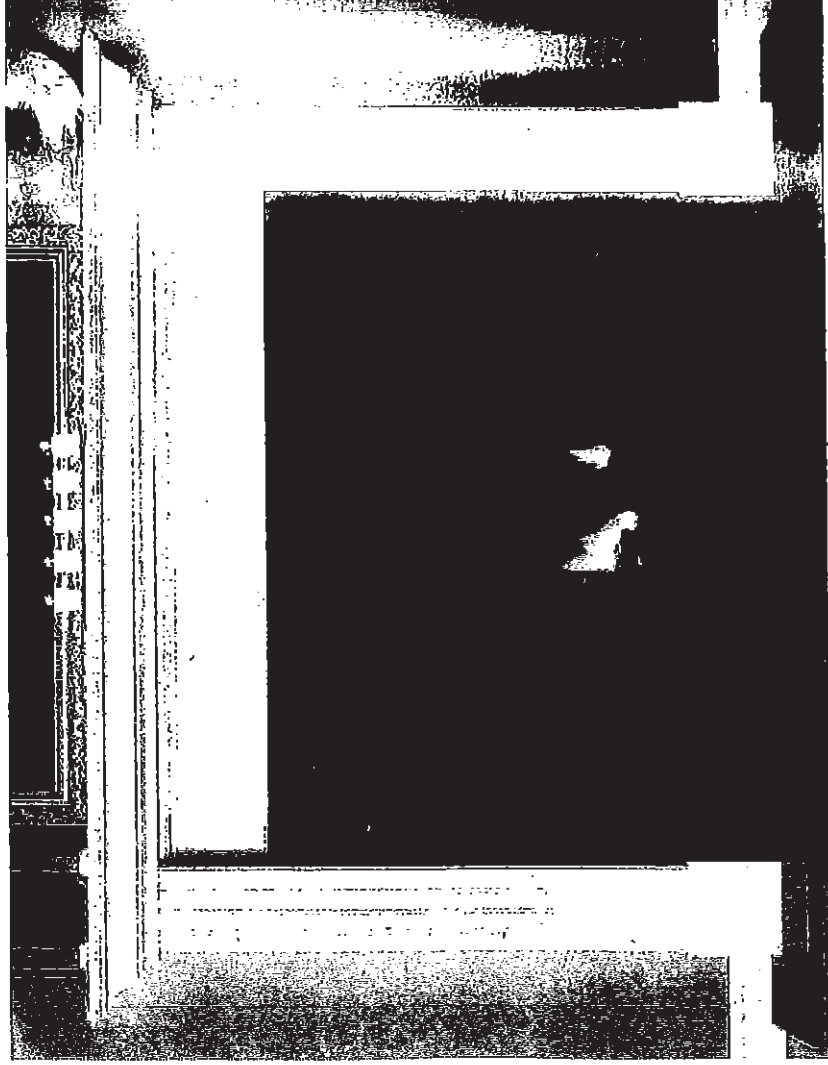

**'CABINET'
STANDARD NF 15 Mantel** ✓

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)





STANDARD NF 17 Mantel X

C2- COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

23 of 44

Stainless Steel | 122.0264.716

FAMILY : Sinks | SERIES : Reginox | MODEL : NS1930UJ9 | FINSH : Stainless Steel | INSTALLATION TYPE : Undermount

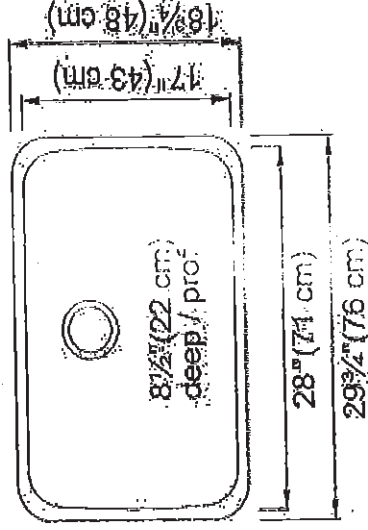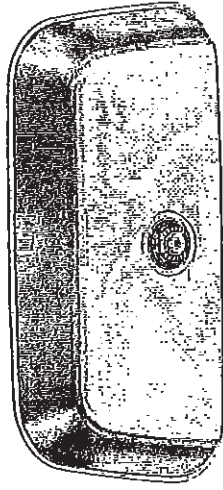

TECHNICAL DATA	
Width overall	18 3/4"
Length overall	29 3/4"
Width of large bowl	17"
Length of large bowl	28"
Depth of large bowl	8 1/2"
Cabinet Size	36"
Number of Bowls	1
Waste Outlet Diameter	3 1/2"
Cut-Out Template	Yes
Faucet Hole	None
Type of Material	18 Gauge Stainless Steel
Surface Finish	SILK
Special feature	Rear Drain Waste Hole Location
Waste Kit Included	YES

SK


C2-COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

24 of 44

STANDARD KITCHEN FAUCET

Align

Modern



Single Handle Pull-Down Kitchen
Faucet*

Model 7565†

S-7

C2-COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

25 of 144

*American
Standard*

**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with U-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:


17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:
• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:	
☐ Color:	☐ White ☐ Linen
☐ Faucet Finish:	
☐ Supplies:	
☐ 1-1/4" Trap:	
☐ Nipple:	

* See faucet section for additional models available

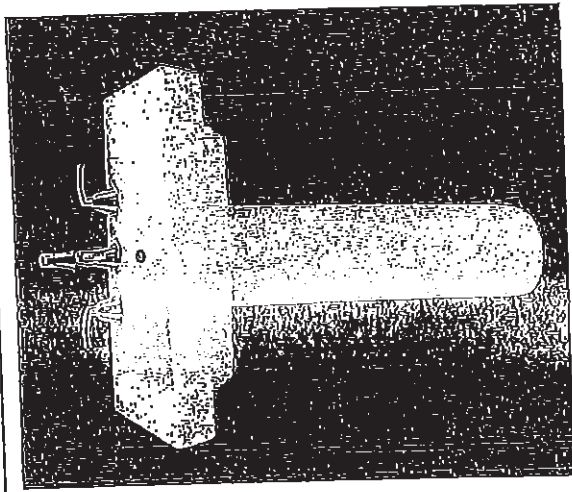

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

5.7

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

- ☒ 0346 803
Faucet holes on 203mm (8") centres
- ☐ 0346 403 (Illustrated)
Faucet holes on 102mm (4") centres
- ☐ 0346 001
Centre hole only

Nominal Dimensions:
521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:
422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS -
Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.

To Be Specified

☐ Colour: ☒ White

☐ Bone

☐ Silver Gray

☐ Linen

Faucet*:
☐ Faucet Finish:
☐ Supplies & Stops:
☐ Trap 1-1/4" (32 mm):


* See faucet section for additional models available

BAS-198

© 2000 American Standard Inc.

01/07

NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

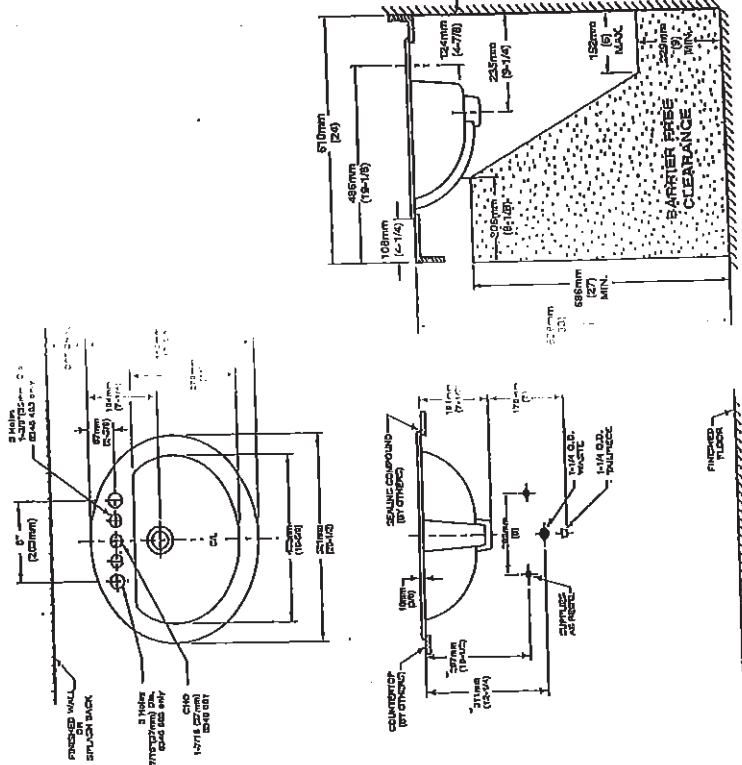


5.7

C2-COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

27 of 44


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL
Model 62320 / TL183EP†
(TL183EP not available in BC)

SHOWER AND 5" TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

5.7

C2- COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT



28 of 144

SC(B)519 | ALITO Collection

Cyclone[®]
Breathe Better

Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release aluminum mesh filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minutes time-delay OFF feature
- Plug-in connection

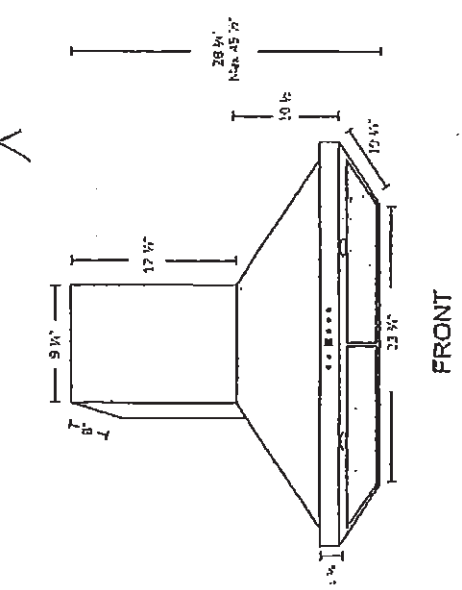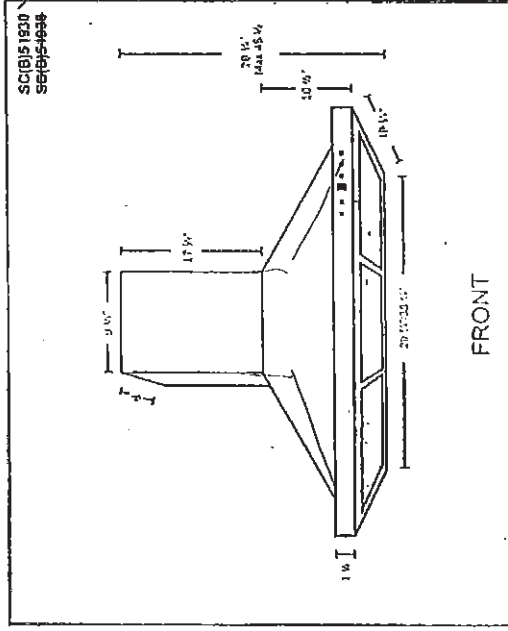

Options

- Filters:
 - SC519 - Quick Release Aluminum Mesh Filters
 - SCB519 - Quick Release Stainless Steel Baffle Filters**
- Chimney Flues:
 - A1.CH10 - short (7'-8' ceilings)
 - A1.CH18 - standard (8'-9' ceilings)
 - A1.CH30 - extended (9'-11' ceilings)
- Widths: 24", 30", 36"

Specifications

- | | |
|--------------------------------------|---|
| • Air Flow Volume: 550 CFM | • Finishes: Stainless Steel |
| • Electrical Connection: 120 V/60 Hz | • Ducting: 6" Round |
| • Power Consumption: 300 Watts | • Noise Level: Min. 2 Sones
Max. 6 Sones |



Toronto • Vancouver • Boston
www.CycloneRangeHoods.com

5.7

C2-COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT54H SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

LOCATION REQUIREMENTS

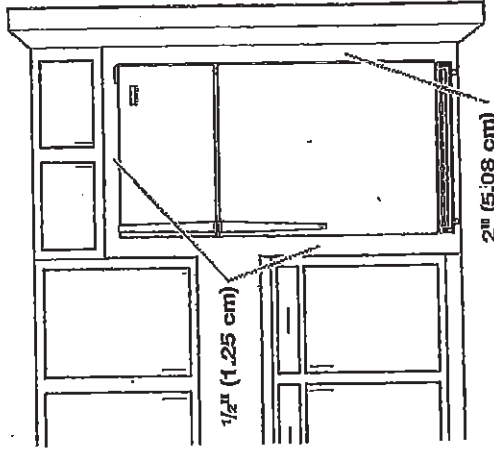

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.


NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Ref. W10674106
10/29/14

PRODUCT DIMENSIONS




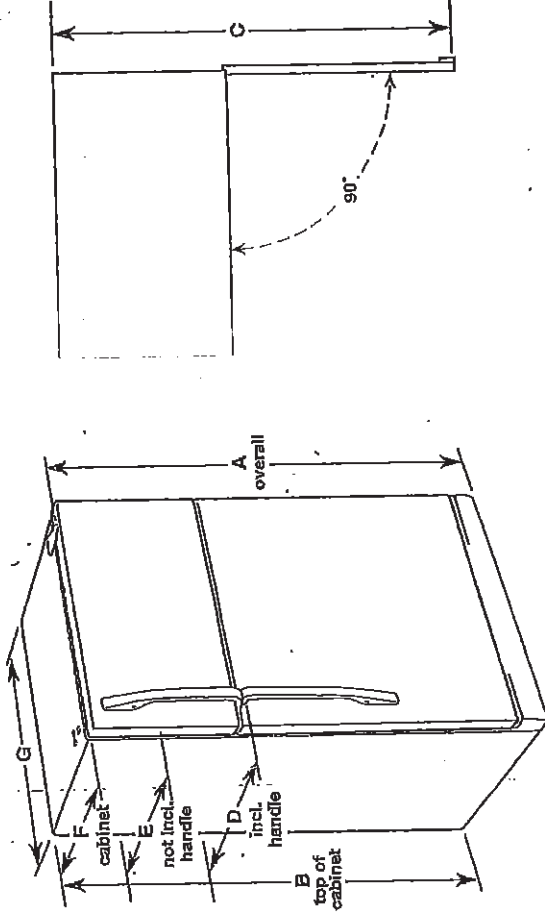


Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	32 3/8" (83.5 cm)	30 5/8" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT54H SZD	24 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/2" (82.3 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)

C2-COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

30 of 144

Refrigerator Door Swing Verification

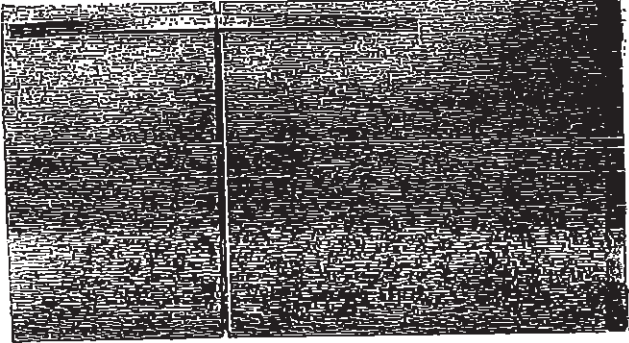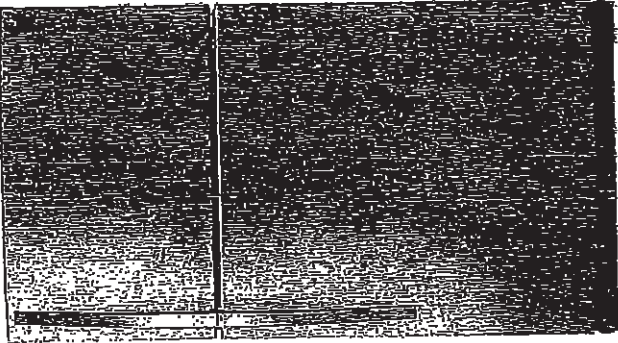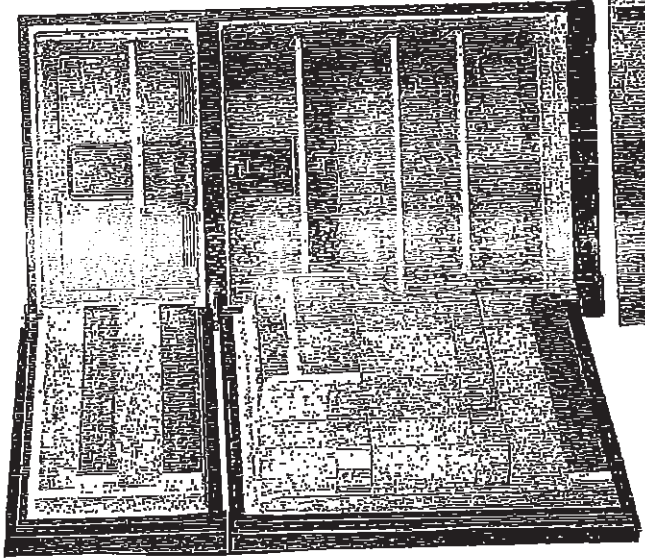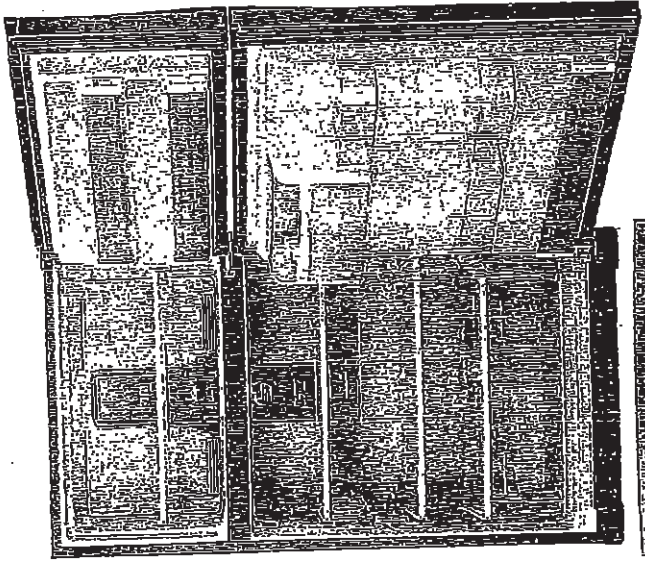

When facing the refrigerator

☒

RIGHT HAND
DOOR OPENING

- Hinges on right
- Handle on left

enf

INITIAL

☐

LEFT HAND
DOOR OPENING

- Hinges on left
- Handle on right

INITIAL

GARAGE LEFT

Please check and INITIAL your door swing selection.


T

C2- COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

31 of 144

Whirlpool

FRONT CONTROL
GAS RANGES

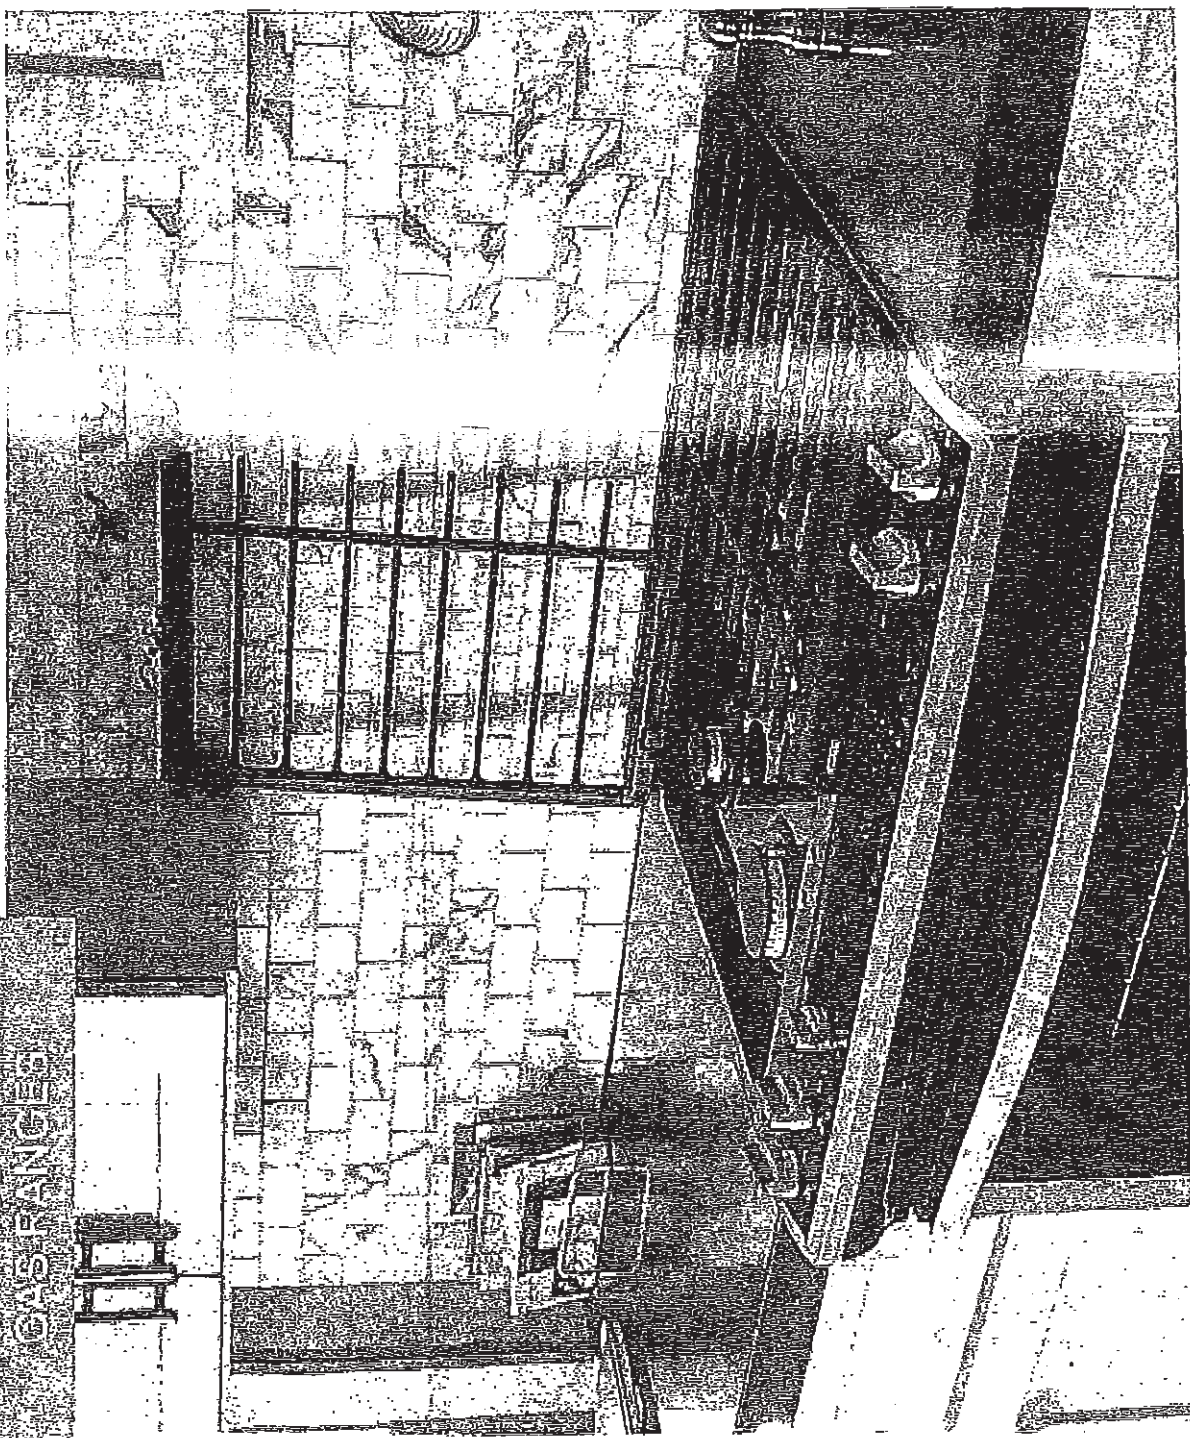

FEATURING



TimeSaver™ system
The TimeSaver™ system's Frozen Bake Technology allows you to skip preheating for favorites like pizza, lasagna, chicken nuggets, fries or plus so you can cook frozen foods faster.



HeatRight™ system
The HeatRight™ system's True convection helps you to cook food faster* with a real fan and third heating element to circulate hot air over, under, and around food.



CompleteClean™ system
The CompleteClean™ system's EZ-2-Lit™ hinged grates give you quick access to spills on the cooktop. The industry first hinged design allows you to wipe up under them without removing them entirely. For a more thorough clean, the grates are also dishwasher-safe.

Every day, care™

From the #1 Selling Appliance brand in the USA*

S-1

C2-COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

32 of 44



30" (76.2 cm) Slide-in Gas Range

PRODUCT MODEL NUMBERS

WEG760H0D

WEG745H0F

GAS SUPPLY REQUIREMENTS

Gas supply line:

- Provide a gas supply line of $\frac{3}{4}$ " (1.9 cm) rigid pipe to the range location. A smaller size pipe or longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be $\frac{1}{2}$ " (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.


NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON[®] tape.

Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 to 6 ft (122 to 152.4 cm) long, $\frac{1}{2}$ " (1.3 cm) or $\frac{3}{4}$ " (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.



- A $\frac{1}{4}$ " (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the appliance pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the range.
- Must include a shutoff valve:
 - The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but exterior to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



- A. Gas supply line
- B. Shutoff valve "open" position
- C. To range

Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

Natural gas:

Minimum pressure: 5" WCP

Maximum pressure: 14" WCP

LP gas:


Minimum pressure: 11" WCP

Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

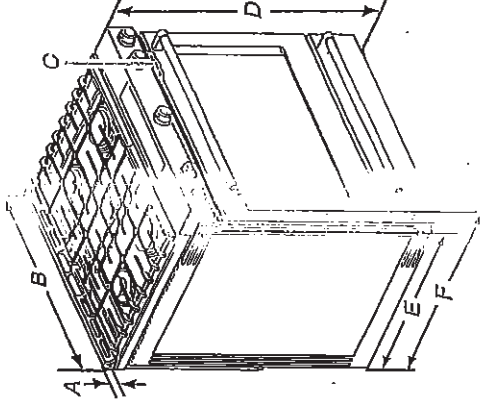

- A. $19\frac{1}{8}$ " (30 cm) height from cooktop to top of vent
 - B. $29\frac{3}{4}$ " (75.9 cm)
 - C. Model/serial number plate (located behind the oven door on the top right-hand side of the oven frame)
 - D. $36\frac{1}{2}$ " (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in
- 28 $\frac{1}{4}$ " (71.9 cm) max. depth from front of console to back of range.
28 $\frac{1}{4}$ " (73.3 cm) max. depth from handle to back of range.

IMPORTANT: Range must be level after leveling legs are adjusted. Follow the instructions in the "Level Flange" section. Using the cooktop as a reference for leveling the range is not recommended.
* Range can be raised approximately 1" by adjusting the leveling legs.

Type of Gas

Natural gas:

- This range is factory set for use with natural gas. The model/serial rating plate located on the back of the range lists the types of gas that can be used. If the type of gas available, check with the local gas supplier.

LP gas conversion:

Conversion must be done by a qualified technician. No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the supplier. See "Gas Conversions" section.

TEFLON is a registered trademark of DuPont.

33 of 44



A detailed technical drawing of a cabinet opening mechanism, likely a sliding door or shutter. The drawing shows a perspective view of the mechanism. Key components are labeled with letters: A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z. The mechanism consists of a main frame (A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z) and a sliding door (A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z). The door is shown in a partially open position, revealing the internal mechanism. The drawing is a black and white line drawing with various lines indicating the structure and movement of the components.

[illegible]

Nation's gains
 In this week's history lesson, students learn how the American Revolution changed the way Americans thought about government. The lesson includes a video, a reading, and a writing activity. The video shows a reenactment of the signing of the Declaration of Independence. The reading is a primary source document, the Declaration of Independence. The writing activity asks students to write a letter to the President of the United States, explaining how the American Revolution changed the way Americans thought about government.

*Compared to a traditional proposal and false cycle for pizza, suggested/true plan and savings. **Compared to the traditional cycle on the same

Form No. 7-1

0



C2-COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

34 of 44

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Install Anti-Tip Bracket




WARNING

Tip Over Hazard

A child or adult can tip the range and be killed.
Install anti-tip bracket to floor or wall per installation instructions.
Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.
Re-engage anti-tip bracket if range is moved.
Do not operate range without anti-tip bracket installed and engaged.
Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warning drawer.
2. Determine which mounting method to use: floor or wall.
If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/₁₆" (31.9 cm) from centerline as shown.

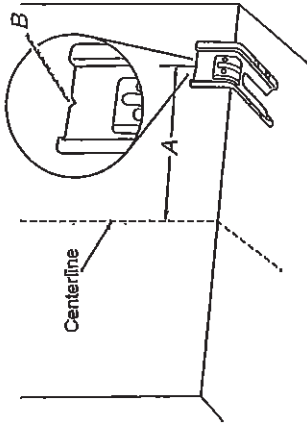

A. 12⁹/₁₆" (31.9 cm)
B. Bracket V-notch

4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting




Rear position


Front position

Diagonal (2 options)

Wall Mounting



5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1⁵/₈" (4.1 cm) screws provided.
6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.




8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

C2- COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

35 of 44

30" STAINLESS BACKSPLASH SHIELD
PURCHASED WITH
GAS STOVE

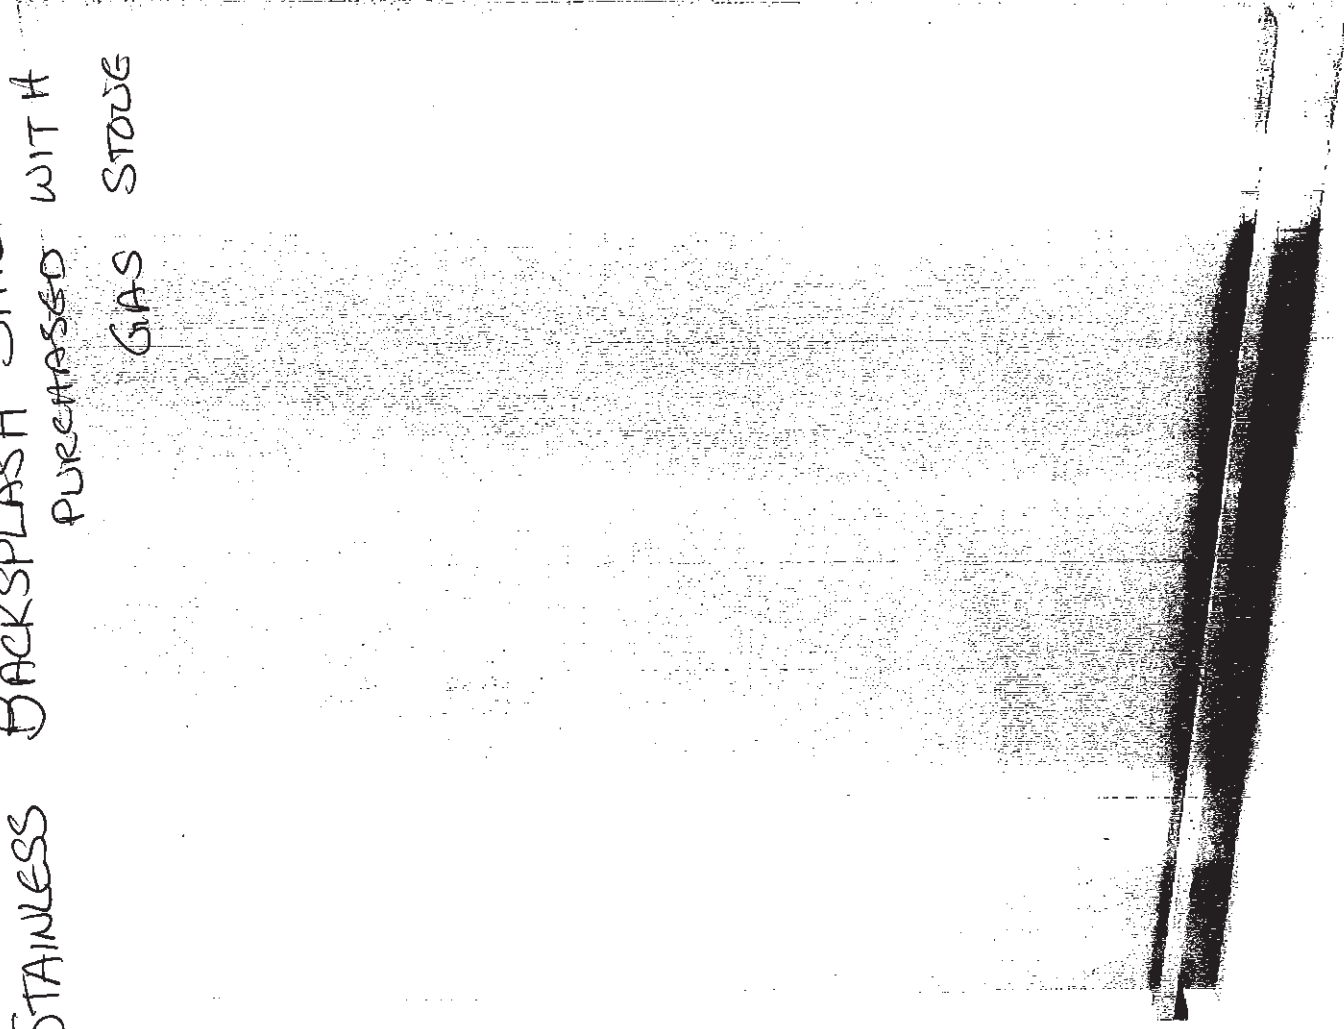

Whirlpool® Dishwasher with ENERGY STAR® qualification

WDF310PAAS Black-on-Stainless

OTHER AVAILABLE COLORS

Black
Model: WDF310PAAB

Biscuit-on-Biscuit
Model: WDF310PAAT

White
Model: WDF310PAAW

Universal Silver
Model: WDF310PAAD

DIMENSIONS

Maximum Height	34 1/2 Inches
Minimum Height	33 1/2 Inches
Height	34 1/2 Inches
Depth	24 1/2 Inches
Width	23 7/8 Inches

Dimensions shown are for planning purposes only. For complete information, see installation instructions packaged with product.

ELECTRICAL

15 Amps Amps. 60 Hz 120 V. 15,

Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.

KEY FEATURES:

ENERGY STAR® Qualified
No One Has Fewer Repairs 17 Years in A Row
Resource - Efficient Wash System
CEE Tier 1 qualified
Tail Tub Design
White Plastic Interior
Quiet Partner(TM) | Sound Package
Auto Soil Sensor
Electronic Controls
3 Automatic Cycles
1-Hour Wash Cycle
Heavy Wash Cycle
Normal Cycle
4 Options
High Temperature Wash System
Heated Dry Option
4 Hour Delay Wash Option
4-Tier SheerClean Direct Feed Wash System
Control Lock
Vinyl Racks
In-Rack Silverware Basket

C2-COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT


3706 421



Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB
WDF111PAB
WDF120PAF
WDF121PAF
WDF310PAA
WDF310PCA



WDF530PSY
WDF530PAD
WDF730PAY
WDT710PAY
WDT720PAD
WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit's instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.




Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4"N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/JAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

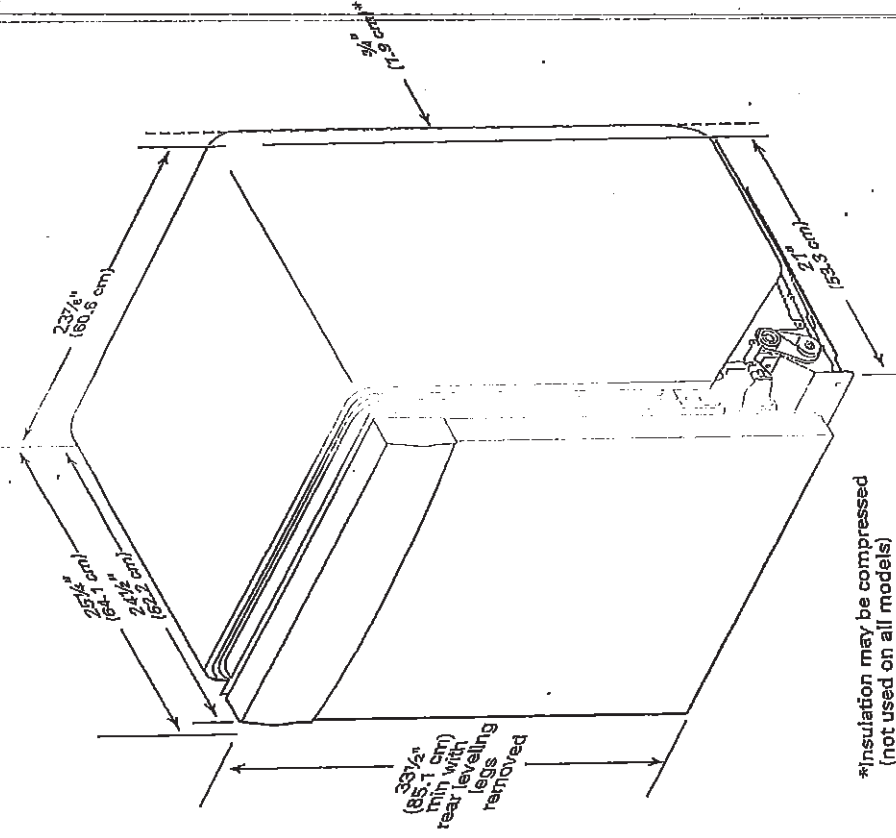

*Insulation may be compressed (not used on all models)

THE ROYCROFT

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


C2-COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

39 or 44

STACKED WASHER/DRYER
PER PLAN WITH
STACKING KIT

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryer | Washers | Front Load Washers | WFW5620HW

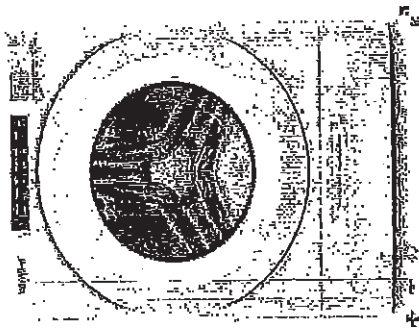

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	30.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD/Touch Screen	No
------------------	----

Windows

Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	87
-----------------------	----

Electrical

Hz	60
----	----

Power Cord Included

Yes

1

C2- COUNTRY LANE LOT 57-6 20-1577 ELEV A THE ROYCROFT

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20-100 psi (137.9-689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).



IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

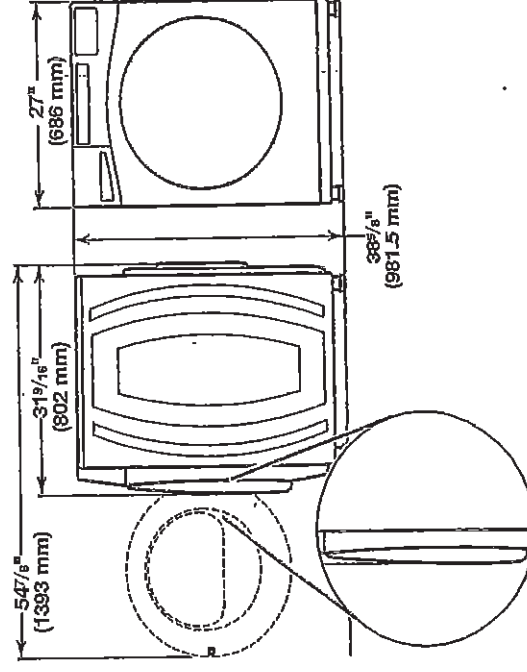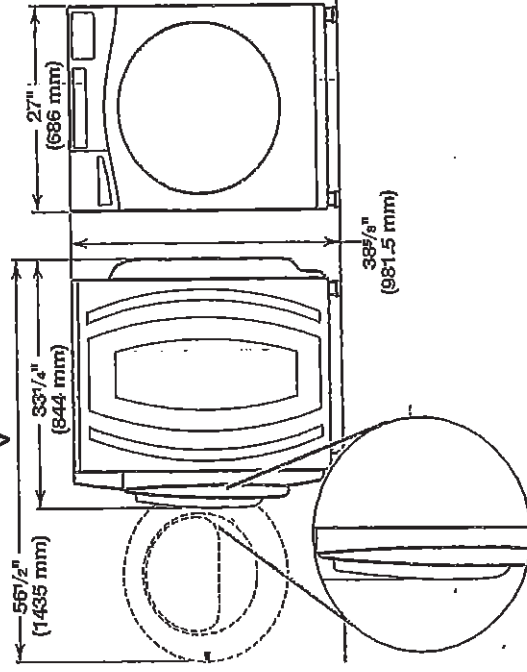


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

Maytag Models

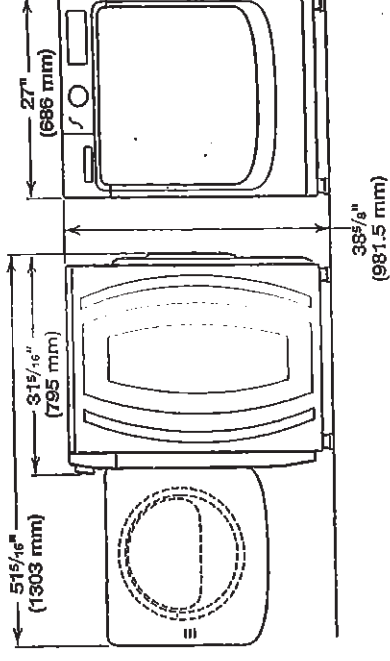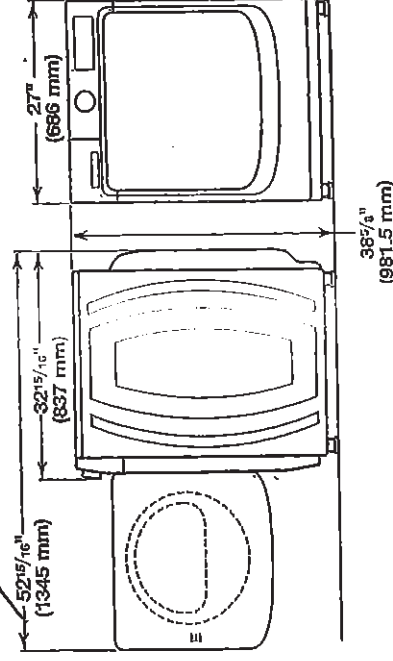

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

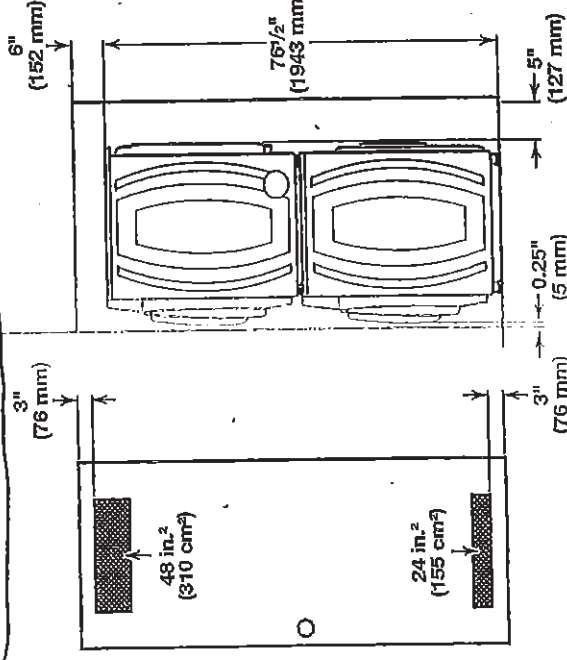


57

C2- COUNTRY LANE
 LOT 57-6
 20-1577 ELEV A
 THE ROYCROFT


410F 44

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation: X

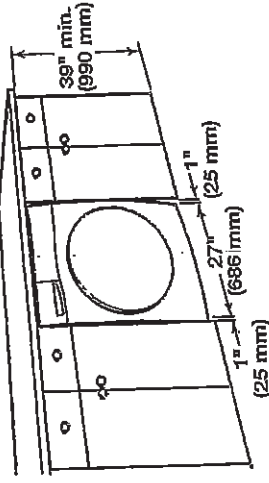

Recessed area or closet installation:

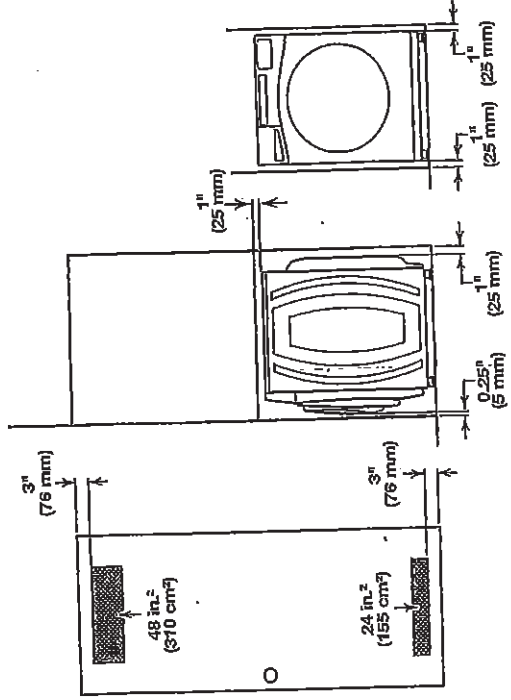

Custom cabinet installation: X

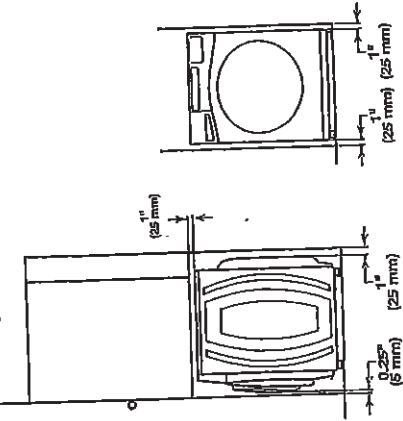


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

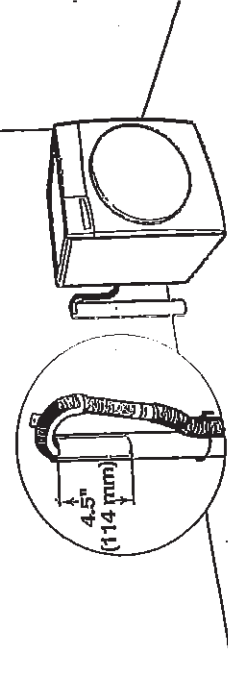


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

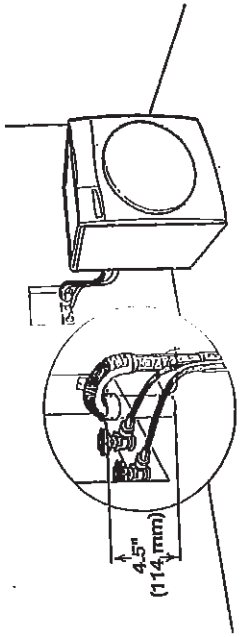

See requirements for floor standpipe drain system.

Laundry tub drain system

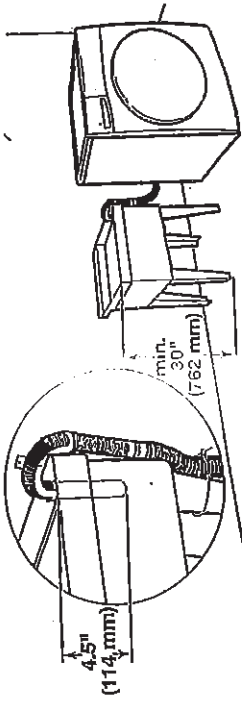

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


5.7

C2- COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

42 of 44

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryer | Dryer | Electric Dryer | YWED5620HW

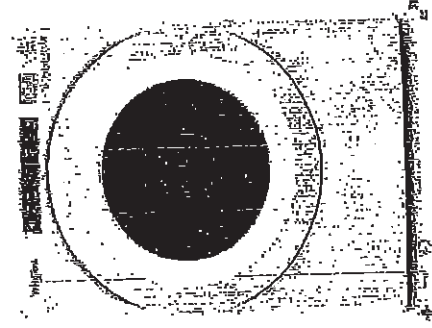

Whirlpool

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degrees	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	69.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	56
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60
Power Cord Included	Yes

S-1

C2-COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

43 of 44

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.

- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING



Explosion Hazard


Keep flammable materials and vapors, such as gasoline, away from dryer.
Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
Failure to do so can result in death, explosion, or fire.

You will need:


- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS
Front view:

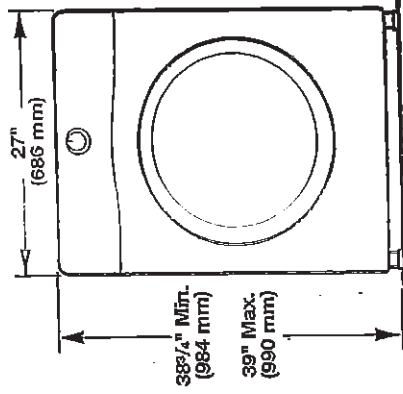

Side view: ✓
Whirlpool Models

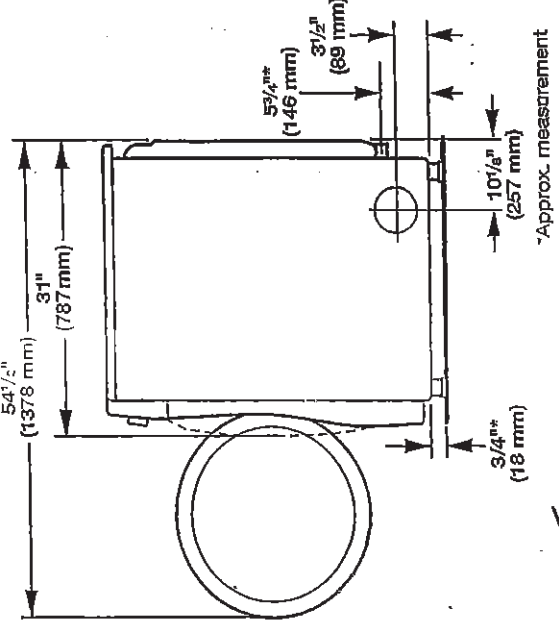

Maytag Models

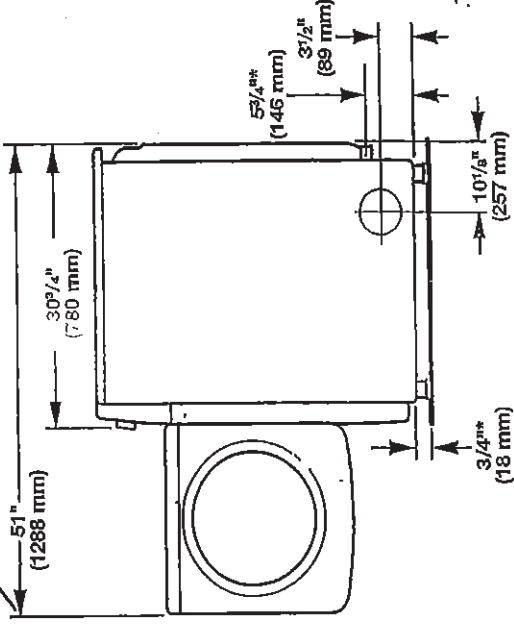

*Approx. measurement.


5.5

C2-COUNTRY LANE
LOT 57-6
20-1577 ELEV A
THE ROYCROFT

44 OF 44

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

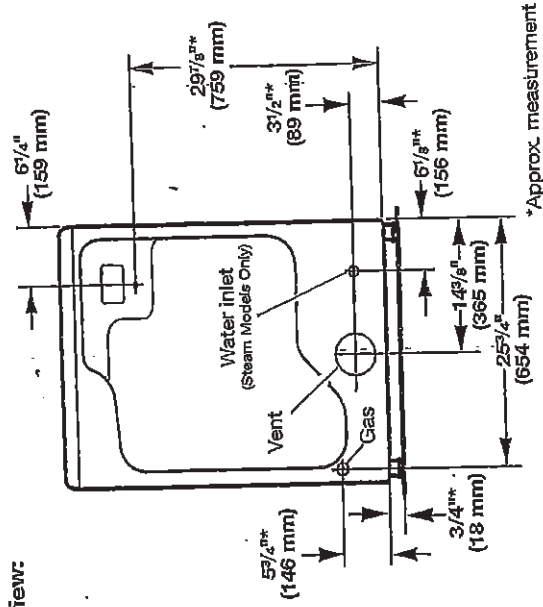

*Approx. measurement

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

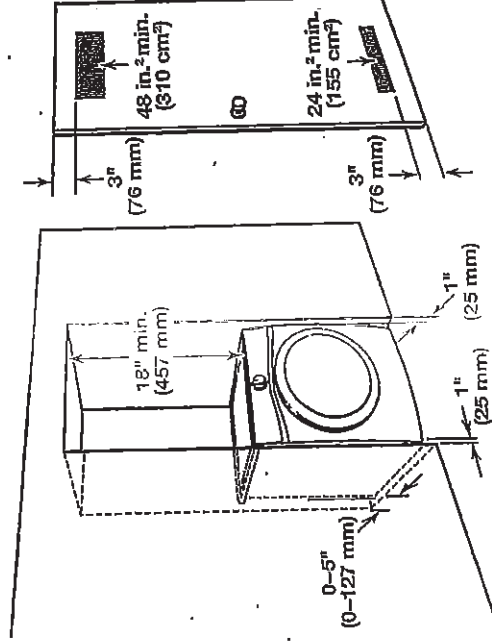

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation: X

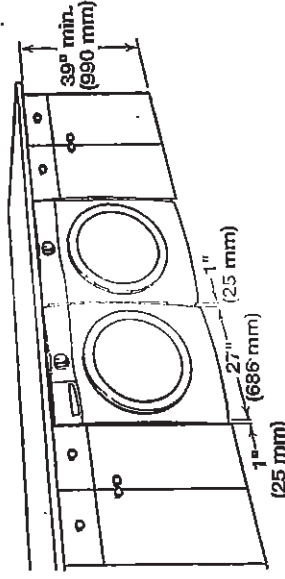

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

5.1