



20-Aug-21

PRE-Sales Selection Sheet
CHECKLIST

OF 40
C2

LOT	054-1	20-2447-EN ELEV A THE BARRINGTON
PURCHASERS: 2460309 ONTARIO INC. CONTACT NO: 416-720-4342		
JAMIE J. BRUNO 647-467-1599		
VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4		

OPTIONAL LOWER LEVEL WITH BEDROOM 4 AND BATH

OPTIONAL COFFERED CEILING IN GREAT ROOM

☐ FINISHED BASEMENT	
☐ COLD CELLAR	
UPGRADED / MODIFIED ELEVATION	
☐ CORNER UPGRADE	☐ WALK OUT DECK
☐ SIDE UPGRADE	☐ WALK OUT BASEMENT
☐ REAR UPGRADE	
CEILING UPGRADE - SMOOTH	
☒ MAIN FLOOR	☐ BASEMENT
☐ SECOND FLOOR	

ADDITIONAL ROUGH-INS

☒ 200 AMP SERVICE	☐ HUMIDIFIER
☐ WET BAR ROUGH IN	☒ AIRCON
GAS ROUGH-IN	
☐ STOVE	☐ DRYER
☐ BBQ	☐ ADDITIONAL FIREPLACE
HOODFAN VENTING	

☒ 6" ROUND DUCT
☐ 7" ROUND DUCT

FULL BASEMENT STAIRS:	PAINT GRADE
UPPER BASEMENT STAIRS:	N/A
LOWER BASEMENT STAIRS:	N/A
STAIRS TO LOWER LEVEL:	ALL OAK
STAIRS TO UPPER LEVEL:	N/A
MAIN STAIRS:	ALL OAK
MEDIA STAIRS (if applicable):	N/A

Aug 20/21 Signatures on		Aug 20/21 IRIT SALEM	
Date	Purchaser	Date	Décor Consultant
	file		
Date	Purchaser		

Date Approved: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



20-Aug-21

SCHEDULE "E"

2 of 40

Addendum forms part of, and is to be read with the attached offer to Purchase for:

LOT	054-1	20-2447-EN ELEV A THE BARRINGTON
PURCHASERS:	2460309 ONTARIO INC.	CONTACT NO: 416-720-4342
	JAMIE J. BRUNO	647-467-1599
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	

The following items are included in the Agreement of Purchase and Sales, and are from Vendors standard samples:

Appliances			
2	- FIVE APPLIANCES: SS FRIDGE, STOVE, DISHWASHER, WHITE FRONT LOADER WASHER/DRYER- TOWNHOMES	Qty:	1
Modifications			
40	- OPTIONAL LOWER LEVEL WITH BEDROOM 4 AND BATH (THE BARRINGTON- HEATHWOOD COLLECTION)	Qty:	1
X_Credits			
38	- TEN THOUSAND DOLLARS (\$10,000) AT DÉCOR (NO CASH VALUE)- TOWNHOMES	Qty:	1

Aug 20/21 Signatures on		Aug 20/21	IRIT SALEM
Date	Purchaser	Date	Décor Consultant
	<i>file</i>	- APPROVED -	
Date	Purchaser		<i>mRosen</i>

LOT 054-1

20-2447-EN ELEV A THE BARRINGTON

PURCHASERS: 2460309 ONTARIO INC.

CONTACT NO: 416-720-4342

JAMIE J. BRUNO

647-467-1599

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Appliances

6-4 Kitchen HoodFan

Cabinetry

1-9156 Kitchen Cabinet Colour/Style

3-2086 Kitchen Cabinet Hardware

25-9111 Main Bathroom Cabinet Colour/Style

29-7672 Main Bathroom Cabinet Hardware

28-8822 Main Bathroom Countertop

20-9157 Master Ensuite Cabinet Colour/Style

22-7672 Master Ensuite Cabinet Hardware

359-9157 Optional Lower Level Bath Cabinet Colour/Style

360-7672 Optional Lower Level Bath Cabinet Hardware

361-8796 Optional Lower Level Bath Countertop

Carpet

37-9246 Bedroom 2 Flooring

38-9246 Bedroom 3 Flooring

14-9246 Family Room Flooring

367-9246 Lower Level Hall Flooring

36-9246 Master Bedroom Flooring

52-1079 Throughout Underpad

Ceramics

16-9103 Foyer Flooring

17-2222 Foyer Grout

UPG

☒ Whirlpool Over-The-Range Microwave Hood Combination
STAINLESS STEEL YWMH31017AS 30" Pages 23-26

☐ SIMCOE RAIN CLOUD Viking III STD 3DL

☐ HARDWARE 9677 STD

☐ SIMCOE ORCHID VIKING III STD 3DL

☐ HARDWARE 135 STD

☐ Countertop WHITE CARRARA 4924-38 Wilsonart

☐ SIMCOE MOONLIGHT Viking III STD 3DL

☐ HARDWARE 135 STD

☐ SIMCOE MOONLIGHT Viking III STD 3DL

☐ HARDWARE 135 STD

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD


☐ Underpad 500 Series STD

☒ Madison Series Light Grey Matte GE.MD.LGR.1818.MT UPG
1 18" X 18" Matte

☐ Grout (105) Driftwood STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.


Aug 10/21



Date

Purchaser

Aug 10/21

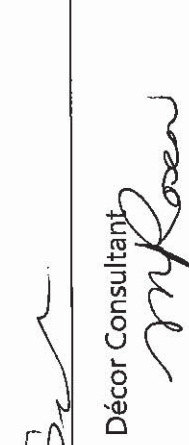

Date

Décor Consultant

Date

Purchaser

Date Approved ~~Aug 10/21~~ HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



10-Aug-21

Interior Finishing Selection Sheet

LOT 054-1

20-2447-EN ELEV A THE BARRINGTON

PURCHASERS: 2460309 ONTARIO INC.

CONTACT NO: 416-720-4342

JAMIE J. BRUNO

647-467-1599

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Ceramics

UPG

4-8103 Kitchen Backsplash

☒ ONTARIO HEXAGON MATTE SNOW WHITE
OD.ON.SWT.02.HEX.MT UPG_2

5-2225 Kitchen Backsplash Grout

☐ Grout (27) Silver STD

7-8913 Kitchen/Breakfast Flooring

☒ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24 INSTALL
FRONT TO BACK SKETCH #3 PAGE 13

8-2225 Kitchen/Breakfast Grout

☐ Grout (27) Silver STD

348-5480 Laundry Mud Room Flooring

☐ Corte Milla Silver GE.CM.SIL.1313 Std 13 x 13

349-2225 Laundry Mud Room Grout

☐ Grout (27) Silver STD

30-8264 Main Bathroom Flooring

☐ Serpentine Syrak/Charcoal TR.ST.SRK.1313 STD 13x13

31-7704 Main Bathroom Grout

☐ Grout (19) Pearl Gray STD

112-9020 Main Bathroom Tub Wall Tile

☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED
VERTICALLY

113-2226 Main Bathroom Tub Wall Tile Grout

☐ Grout (00) White STD

23-9106 Master Ensuite Floor Tile

☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1
18" X 18" Matte

24-2225 Master Ensuite Floor Tile Grout

☐ Grout (27) Silver STD

73-8661 Master Ensuite Shower Floor Tile

☐ Ontario Series Mosaic Snow White Matte
OD.ON.SWT.0202.MT.N STD 2 x 2

74-2225 Master Ensuite Shower Floor Tile Grout

☐ Grout (27) Silver STD

147-8923 Master Ensuite Shower Jamb(s) and Sill(s)

☐ Shower Jamb / Sill Thassos White STD

104-8833 Master Ensuite Shower Wall Tile

☐ Uniwall White QT.UW.WHT.0810 STD 8 x 10 TO BE INSTALLED
VERTICALLY

105-2226 Master Ensuite Shower Wall Tile Grout

☐ Grout (00) White STD

350-9257 Optional Lower Level Bath Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

351-2225 Optional Lower Level Bath Grout

☐ Grout (27) Silver STD

352-8833 Optional Lower Level Bath Tub Wall Tile

☐ Uniwall White QT.UW.WHT.0810 STD 8 x 10 TO BE
INSTALLED VERTICALLY

353-2226 Optional Lower Level Bath Tub Wall Tile Grout

☐ Grout (00) White STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug. 10/21

Aug 10, 21

Date

Purchaser

Décor Consultant

Date

Purchaser

Date Approved

HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4

LOT 054-1

20-2447-EN ELEV A THE BARRINGTON

PURCHASERS: 2460309 ONTARIO INC.

CONTACT NO: 416-720-4342

JAMIE J. BRUNO

647-467-1599

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Ceramics

32-8913 Powder Room Flooring

☒ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24 TO BE INSTALLED FRONT TO BACK SKETCH #3 PAGE 15

33-2225 Powder Room Grout

☐ Grout (27) Silver STD

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-9114 Great Room Fireplace Mantle

☐ Paint Grade Mantel- Cabinet (Per Plan) WHITE NF 15 STD PAGE 15

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-9069 Kitchen Countertop

☐ MSI Quartz ICED WHITE Group 1 STD 3/4"

21-9069 Master Ensuite Countertop

☒ MSI Quartz ICED WHITE Group 1 STD 3/4"

Hardwood

11-7498 Great Room Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

12-7498 Living Room Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

98-7498 Main Hall Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

78-7498 Stair Landing to Lower Level Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

77-7498 Stair Landing to Upper Level Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

35-7498 Upper Hall Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

Interior Railings

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

43-8148 Stairs to Upper Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 10/21

AJB

Date

Purchaser

Aug 10 21

APPROVED -

Décor Consultant

mKear

Date

Purchaser

Date Approved HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4



10-Aug-21

Interior Finishing Selection Sheet

LOT	054-1	20-2447-EN ELEV A THE BARRINGTON
PURCHASERS: 2460309 ONTARIO INC. CONTACT NO: 416-720-4342		
JAMIE J. BRUNO 647-467-1599		
VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4		

UPG

Interior Stairs

116-1713 Basement Stairs Type

☐ Paint Grade Stairs STD

45-1712 Stairs to Lower Level Type

☐ Oak Stairs UPG_1

39-1712 Stairs to Upper Level Type

☐ Oak Stairs UPG_1

Interior Trim

91-9374 Throughout Trim Size

☒ 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings STD-Towns

Painting

46-7761 Stairs to Lower Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl GRYPHON SAHDE WILL VARY

50-7761 Stairs to Lower Level Handrail/Pickets/Posts Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl GRYPHON SAHDE WILL VARY

40-7761 Stairs to Upper Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl GRYPHON SAHDE WILL VARY

44-7761 Stairs to Upper Level Handrail/Pickets/Posts Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl GRYPHON SAHDE WILL VARY

240-1716 Throughout Trim - Paint Colour

☐ Trim WHITE STD

51-1717 Throughout Walls - Paint Colour

☐ Wall WARM GREY 22 STD

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

149-1737 Master Ensuite Plumbing Fixture (colour)

☐ Plumbing Fixtures WHITE STD

362-1737 Optional Lower Level Bath Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug. 16/21	Aug 10, 21
Date	Date
Purchaser	Décor Consultant

Date	Date Approved	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4
------	---------------	--

LOT	054-1	20-2447-EN ELEV A THE BARRINGTON	
PURCHASERS:	2460309 ONTARIO INC.	CONTACT NO:	416-720-4342
	JAMIE J. BRUNO		647-467-1599
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4		HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances

2173	WHIRLPOOL OTR SS	KITCHEN	Qty: 1
	YWMH31017HZ	SPECS PAGES 23-26	

Cabinetry

1330	Optional Extras		Qty: 1
	03H- 66cm deep fridge cabinet (counter depth)(66cm fridge gable(s) sold separately)-Viking	SKETCH # 3 PAGE 13	
1363	Optional Extras	KITCHEN	Qty: 3
	09J- Additional Crown moulding per piece		
1536	Optional Upgrade	Valance	Qty: 1
	Optional Valance (Trim Only)	VIKING I/II/III	

Ceramics

1894	Upgrade 1 Tile	Foyer Floor	Qty: 1
1898	Upgrade 2 Tile	Kit/Brk Floor	Qty: 1
1902	Upgrade 2 Tile	Kitchen Optional Backsplash	Qty: 1
1899	Upgrade 1 Tile	M. Ensuite Floor	Qty: 1

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug. 10/21	Aug 10. 21
Purchaser	Décor Consultant
Purchaser	

Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

LOT	054-1	20-2447-EN ELEV A THE BARRINGTON	
PURCHASERS: 2460309 ONTARIO INC.		CONTACT NO: 416-720-4342	
JAMIE J. BRUNO		647-467-1599	
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4		HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein. It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1895	Upgrade 2 Tile	M. Flr. Pow Floor	Qty: 1
Coffered Ceiling			
62	Optional Upgrade Before June 1, 2021	GREAT ROOM	Qty: 1
Drywall			
453	Ceiling Upgrades Smooth Ceilings Main Floor		Qty: 1
Electrical			
340	Décor Package Potlight Bundle - 8 x T477GR-W 4" line voltage potlights installed on main floor includes 2 switches 6X GREAT ROOM- USE SEPARATE SWITCH 2X KITCHEN - UUSE SEPARATE SWITCH SEE SKETCH # 3 PAGE 13		Qty: 1
342	Optional Extras Extra wall interior outlet on Existing Circuit (does not include kitchen outlets) TO BE INSTALLED ABOVE THE FIRE PLACE 70" FROM FLOOR SEE SKETCH # 3 PAGE 13	GREAT ROOM	Qty: 1
352	Potlights (NON-INSULATED) T477GR-W 4" line voltage trim with flush adjustable gimbal ring (with LED Bulb) INSTALL IN THE KITCHEN - USE TOGETHER WITH OTHER POT LIGHT SWITCH SEE SKETCH # 3 PAGE 13	KITCHEN	Qty: 1

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug. 10/21	AP	Aug 10, 21	AE
Date	Purchaser	Date	Décor Consultant
			MRosen
Date	Purchaser		

Date Approved: ~~HEATHWOOD HOMES (WHITBY)~~
LIMITED - PHASE 4



10-Aug-21

Sales Selection Sheet
of 10

LOT	054-1	202447-EN ELEV A THE BARRINGTON
PURCHASERS: 2460309 ONTARIO INC. CONTACT NO: 416-720-4342		
JAMIE J. BRUNO 647-467-1599		
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	
HST #		

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

338 Qty: 1

KITCHEN

RELOCATE STD KITCHEN LIGHT TO BE ABOVE BREAKFAST-BAR-USE STD KITCHEN LIGHT SWITCH
SEE SKETCH # 3 PAGE 13

Granite

863 Qty: 1

Optional Upgrade
Countertop upgrade with 4" backsplash 3/4" GROUP 1 with single edge

Master Ensuite

763 Qty: 1

Optional Extras
Granite cutout w/ straight edge polish to accommodate under mount vanity sink
SINK SPEC PAGE 19

MATER BATHROOM

Mirrors/Glass Products

548 Qty: 1

Shower Upgrade
Upgrade to Frameless clear glass with D-Ring Handle in chrome

Master Ensuite

Plumbing

278 Qty: 1

STANDARD Kitchen Sink Option
KINDRED Kitchen Sink Collection - Reginox ND1827RU/9 Stainless Kitchen Double (Large bowl/ Full Bowl) Undermount Sink (or equivalent) PAGE 16

KITCHEN

110 Qty: 1

AMERICAN STANDARD - SINK OPTIONS -
Undermount Sink
BOXE - White - Model 0315 000 020 PAGE 19

MASTER BATHROOM

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug 10/21	A-R	Aug 21	HE
Date	Purchaser	Date	Décor Consultant
Date	Purchaser		

Date Approved
HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



10-Aug-21

Sales Selection Sheet
10 of 10

LOT	054-1	20-2447-EN ELEV A THE BARRINGTON
PURCHASERS: 2460309 ONTARIO INC.		CONTACT NO: 416-720-4342
JAMIE J. BRUNO		647-467-1599
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	
		HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.


Date	Aug 10/21	Purchaser	Aug 10 21	Décor Consultant
Date		Purchaser		

Date Approved
HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4

11 of 10

ELEVATION A & B END: 2,504 SQ FT

Sketch #1



7/13


C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

12 of 40
The Barrington

20-2447 END ELEV. A

Sketch #2

ELEVATION A & B END:
2,504 SQ FT

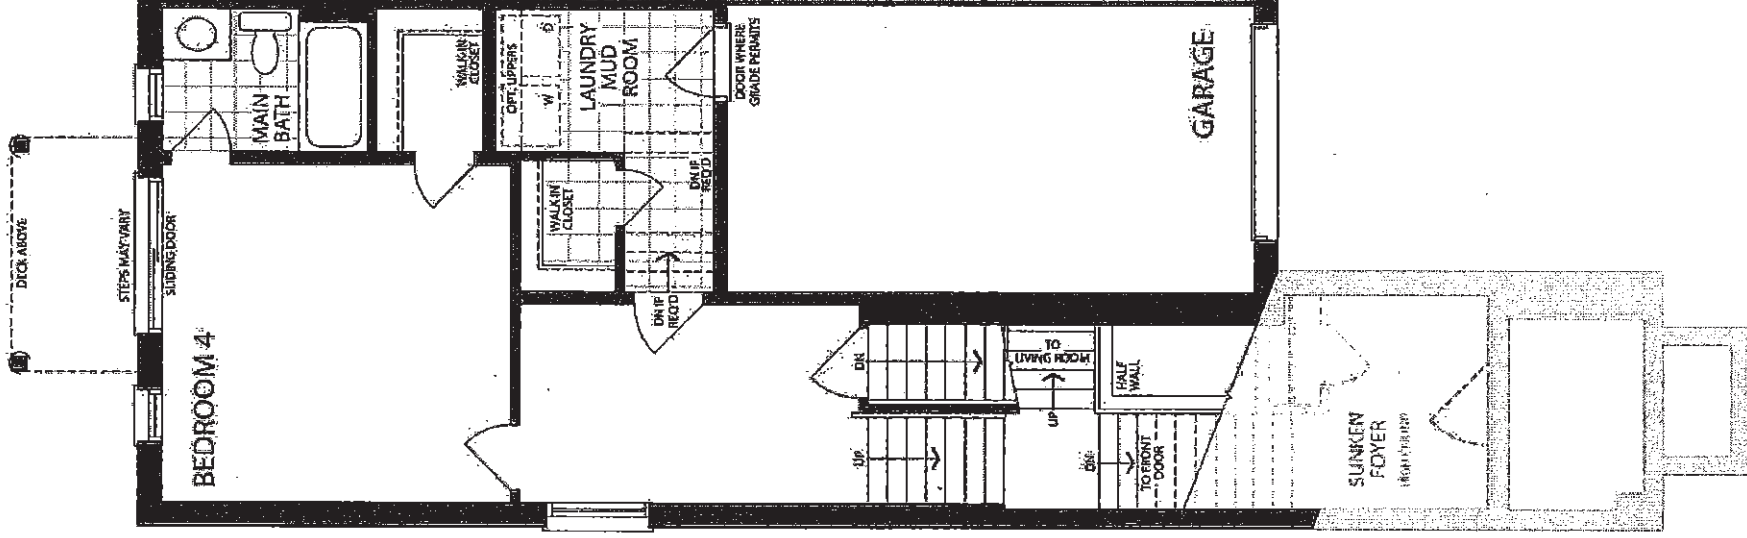


LOWER LEVEL
OPTIONAL 4 BEDROOM + BATH
ELEVATION A
END

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

13 of 40
The Barrington

20-2447 END ELEV. A

ELEVATION A & B END:
2,504 SQ FT
Sketch #3

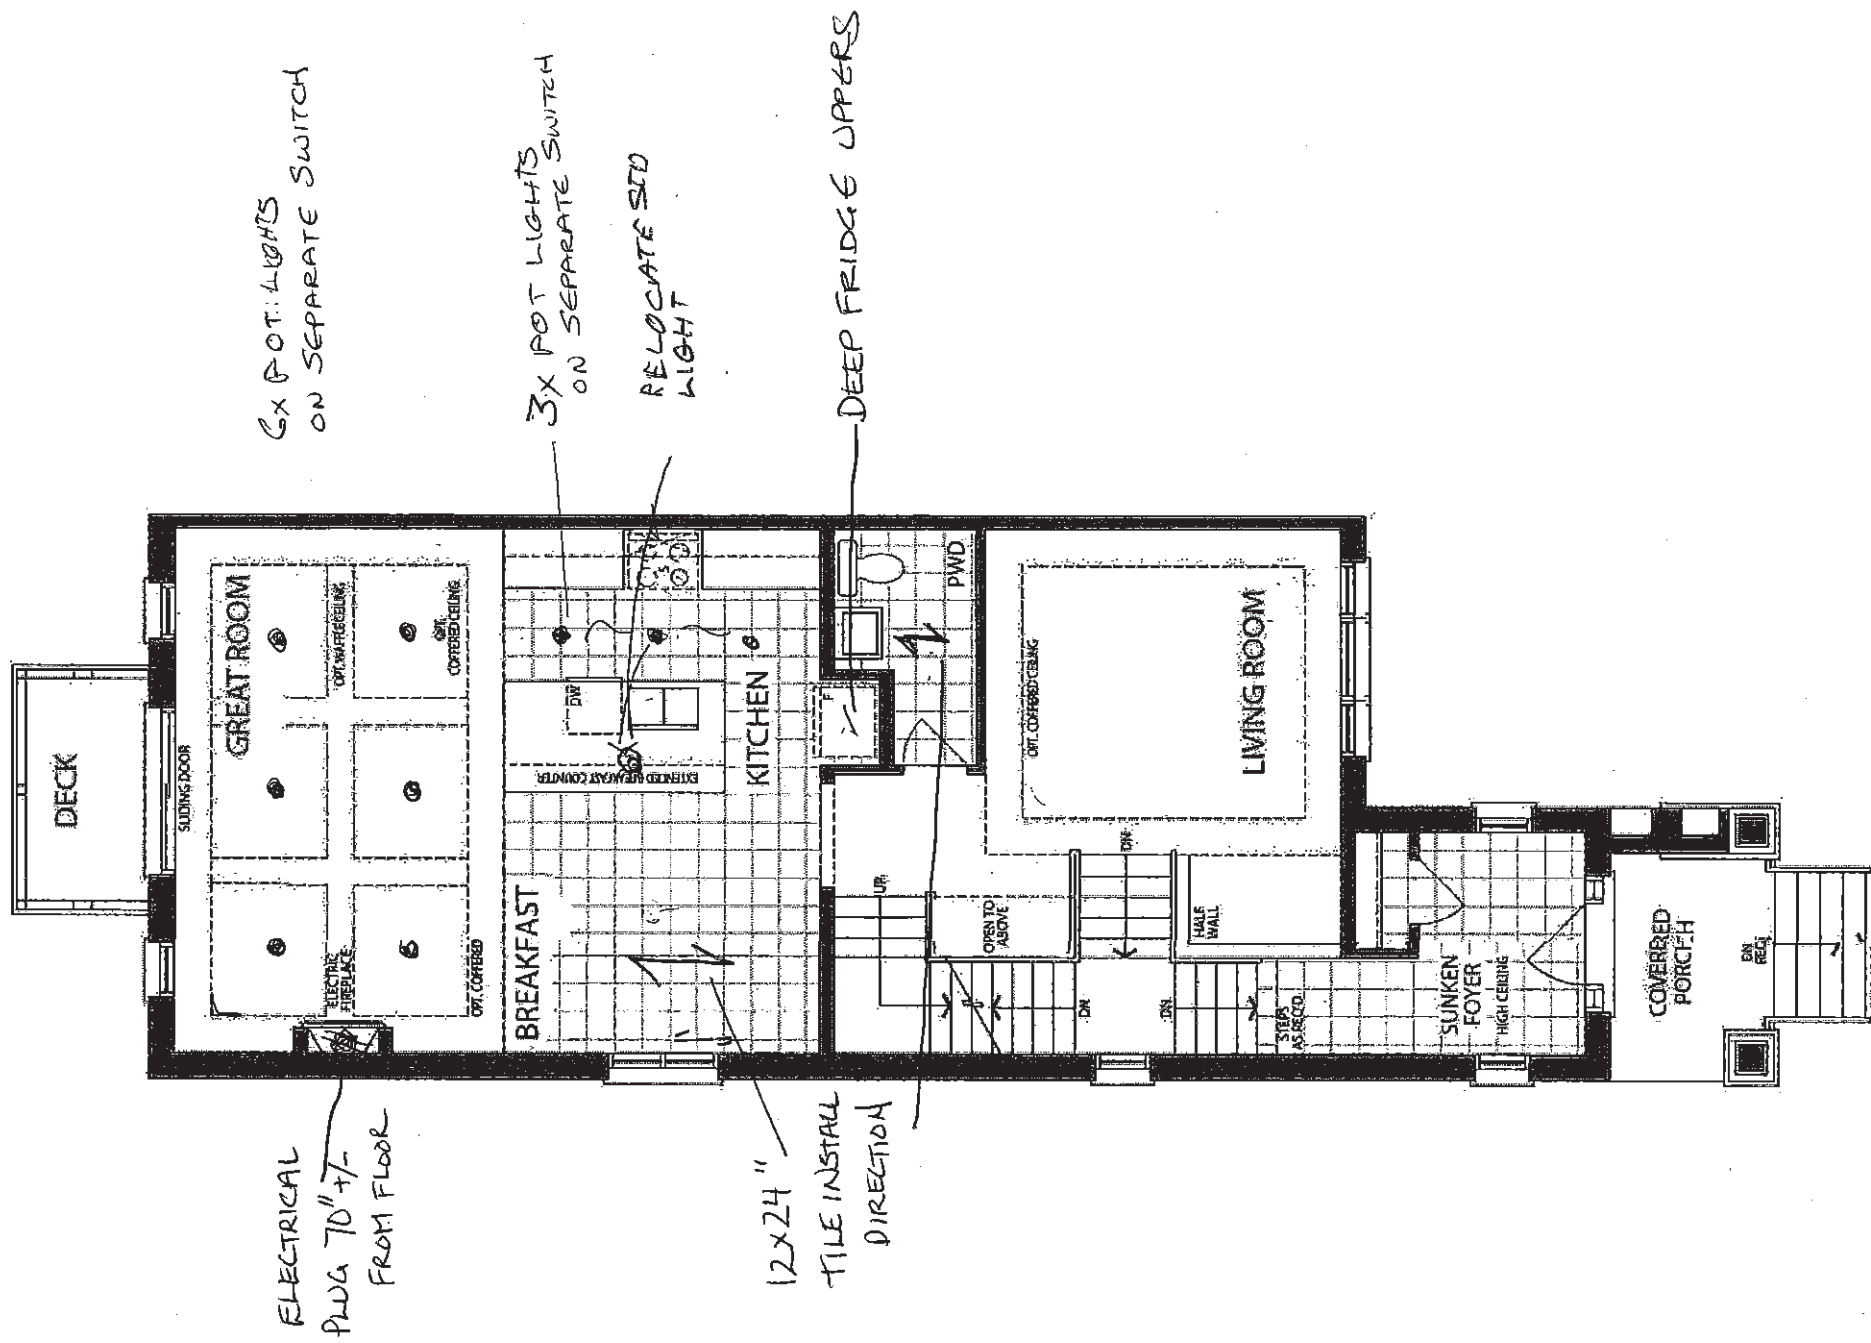


STEPS AS REQ. REQ'D:
MAIN LEVEL
INTERIOR END
ELEVATION A

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

14 of 40
The Barrington

20-2447 END ELEV. A Sketch #4


ELEVATION A & B END:
2,504 SQ FT

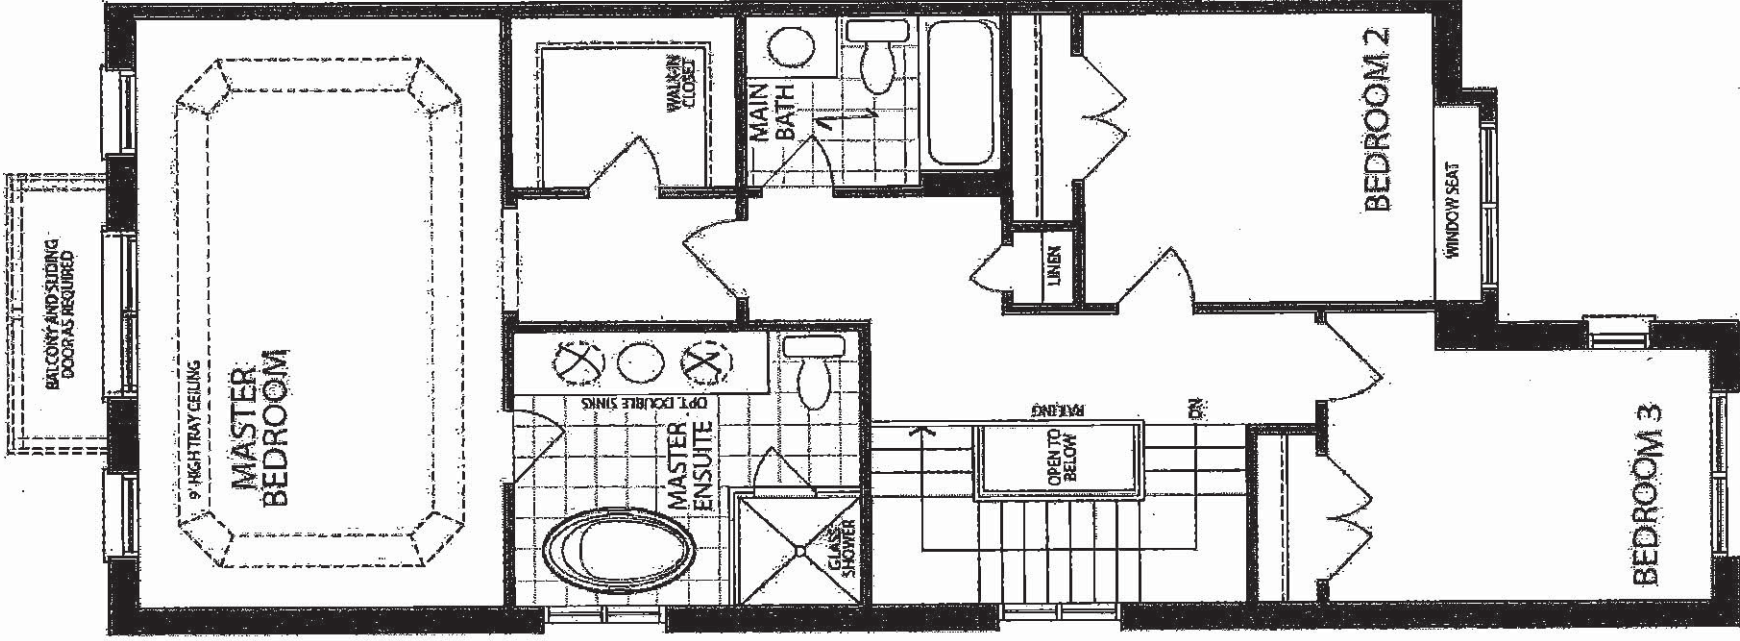

UPPER LEVEL
INTERIOR END
ELEVATION A

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

15 of 40

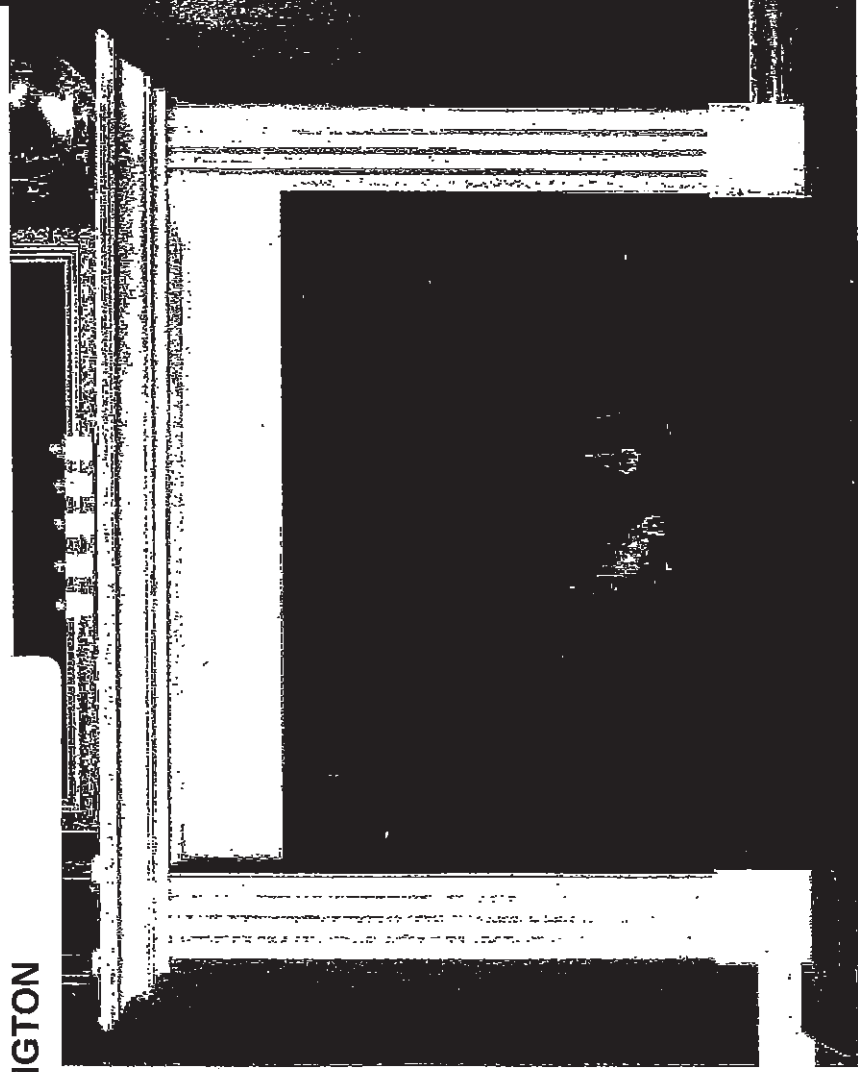


'CABINET'

STANDARD NF 15 Mantel ✓

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

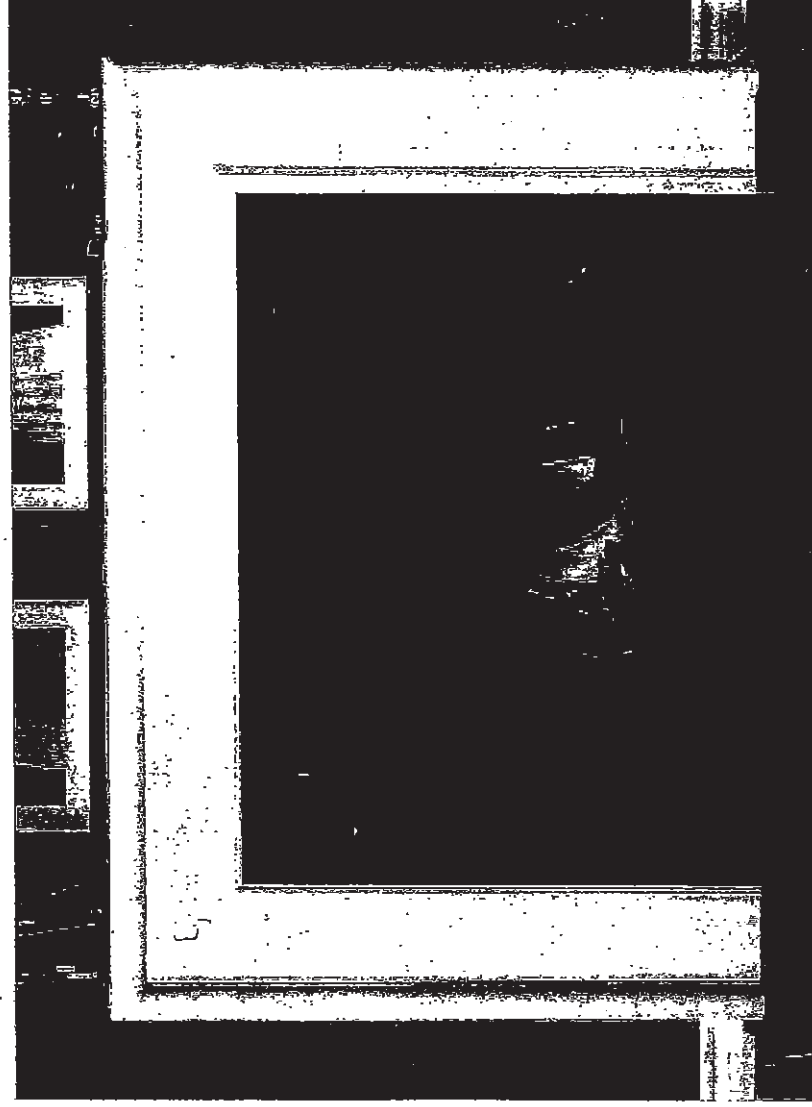

STANDARD NF 17 Mantel X

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)



AB

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

16 of 40

Stainless Steel | 122.0264.711

FAMILY : Sinks | SERIES : Reginox | MODEL : NDC1932RU/9 | FINISH : Stainless Steel | INSTALLATION TYPE : Undermount

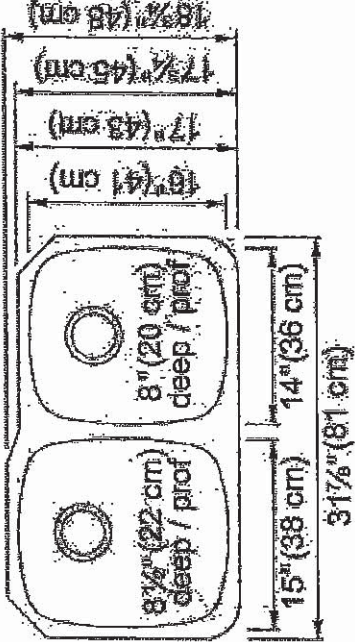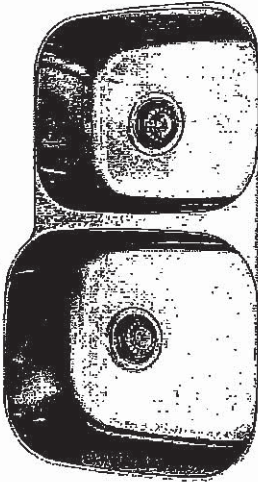

TECHNICAL DATA

Width overall	18 3/4"
Length overall	37 13/16"
Width of large bowl	17"
Length of large bowl	15"
Depth of large bowl	8 1/2"
Width of small bowl	16"
Length of small bowl	14"
Depth of small bowl	8"
Cabinet Size	36"
Number of Bowls	2
Waste Outlet Diameter	3 1/2"
Cut-Out Template	Yes
Faucet Hole	None
Type of Material	18 Gauge Stainless Steel
Surface Finish	SILK


C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

17 of 40

STANDARD KITCHEN FAUCET

Align

Modern

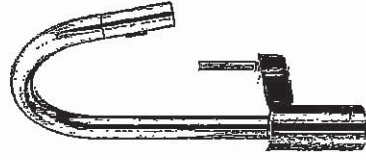

Single Handle Pull-Down Kitchen
Faucet†

Model 7565†

MS

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

18 of 40



**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (illustrated)
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - **Design coordinates with Boulevard® Toilet**
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -


Meets or Exceeds the Following Specifications:

- ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:

* See faucet section for additional models available

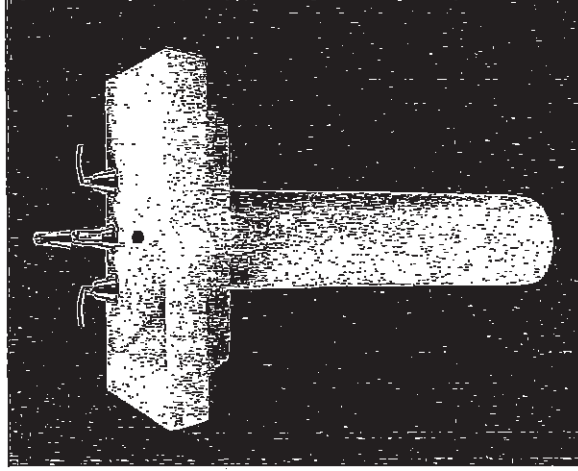

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

AP3

C2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV A
THE BARRINGTON

19 of 40

American Standard

Style That Works Better

 BARRIER FREE

MASTER ENSUIT BATHROOM


BOXE
UNDERCOUNTER SINK
VITREOUS CHINA

BOXE UNDERCOUNTER SINK

- Vitreous china
- Rectangular undercounter mount sink with rectangular interior and flat bottom design bowl
- Unglazed rim
- Front overflow
- Supplied with template
- Meets OBC requirement when sink is installed with overflow to the rear
- Mounting clips available separately (P031006000) (Faucet not included)

☐ 0315 000 Unglazed Rim
508 x 406mm (20" x 16")

Bowl size:
438mm (17-1/4") wide,
337mm (13-1/4") front to back,
127mm (5") deep

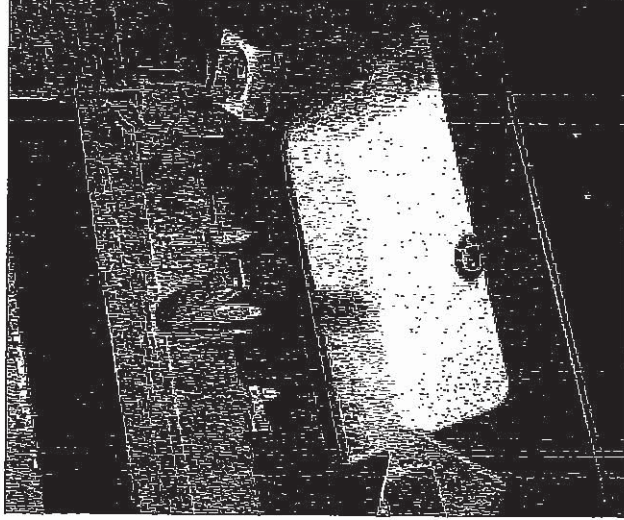

COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.

To Be Specified


- ☐ Colour: ☐ White
- ☐ Faucet*:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

* See faucet section for additional models available



- Countertop 864mm (34") from finished floor. Shit Installed 102mm (4") from front edge of countertop. Countertop thickness to be 25mm (1") maximum. MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

NOTES:
WE RECOMMEND USING SINK AS A TEMPLATE TO DETERMINE PROPER CONTOUR. CUT COUNTERTOP 38MM (1-1/2") INSIDE SINK CONTOUR. FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
▶ UNDERCOUNTER MOUNTING KIT SUPPLIED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

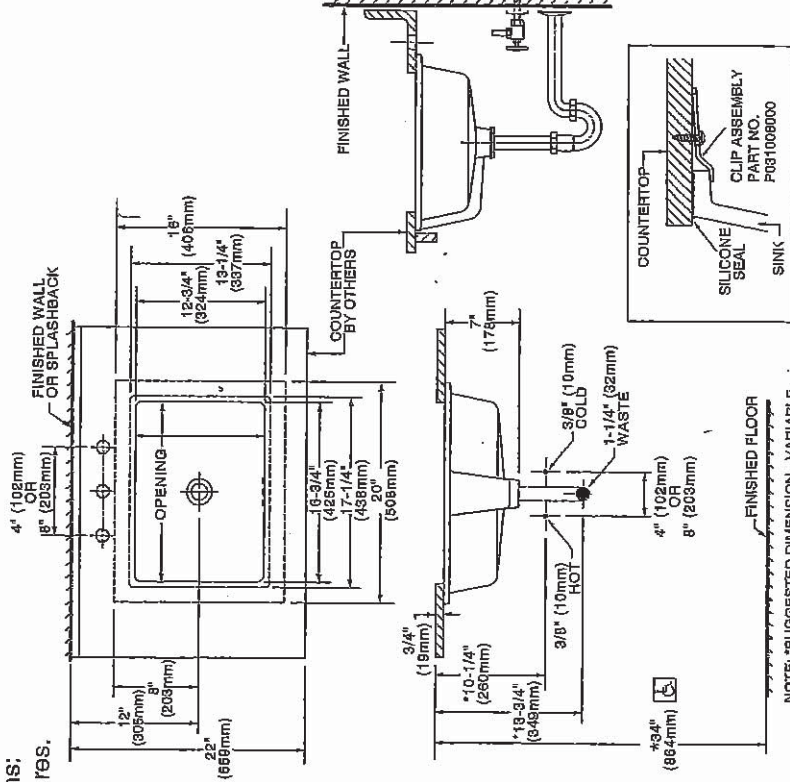

* To comply with ADA standards, overflow hole must face back.

BARRIER FREE

COLONY COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

☒ 0346 803

Faucet holes on 203mm (8") centres

☐ 0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

☐ 0346 001

Centre hole only

Nominal Dimensions:

521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS -





Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.

To Be Specified

- ☐ Colour: ☒ White ☐ Bone ☐ Silver Gray
- ☐ Linen
- ☐ Faucet*: ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):


* See faucet section for additional models available

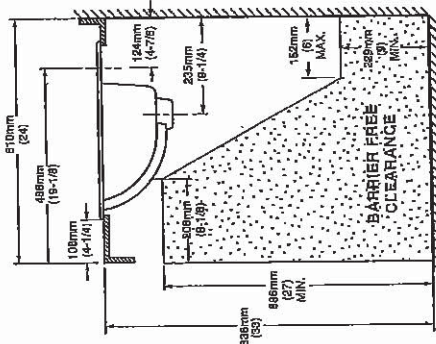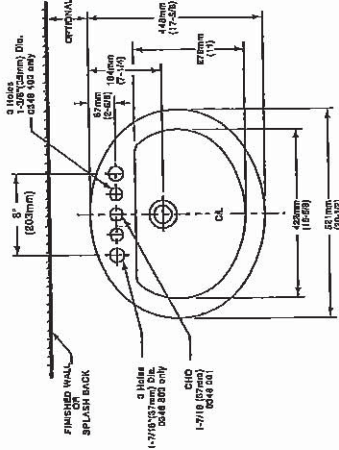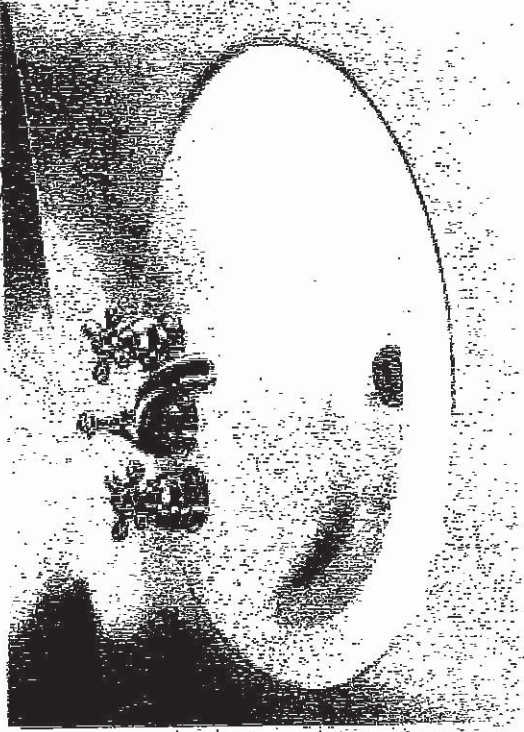

NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

21 of 40

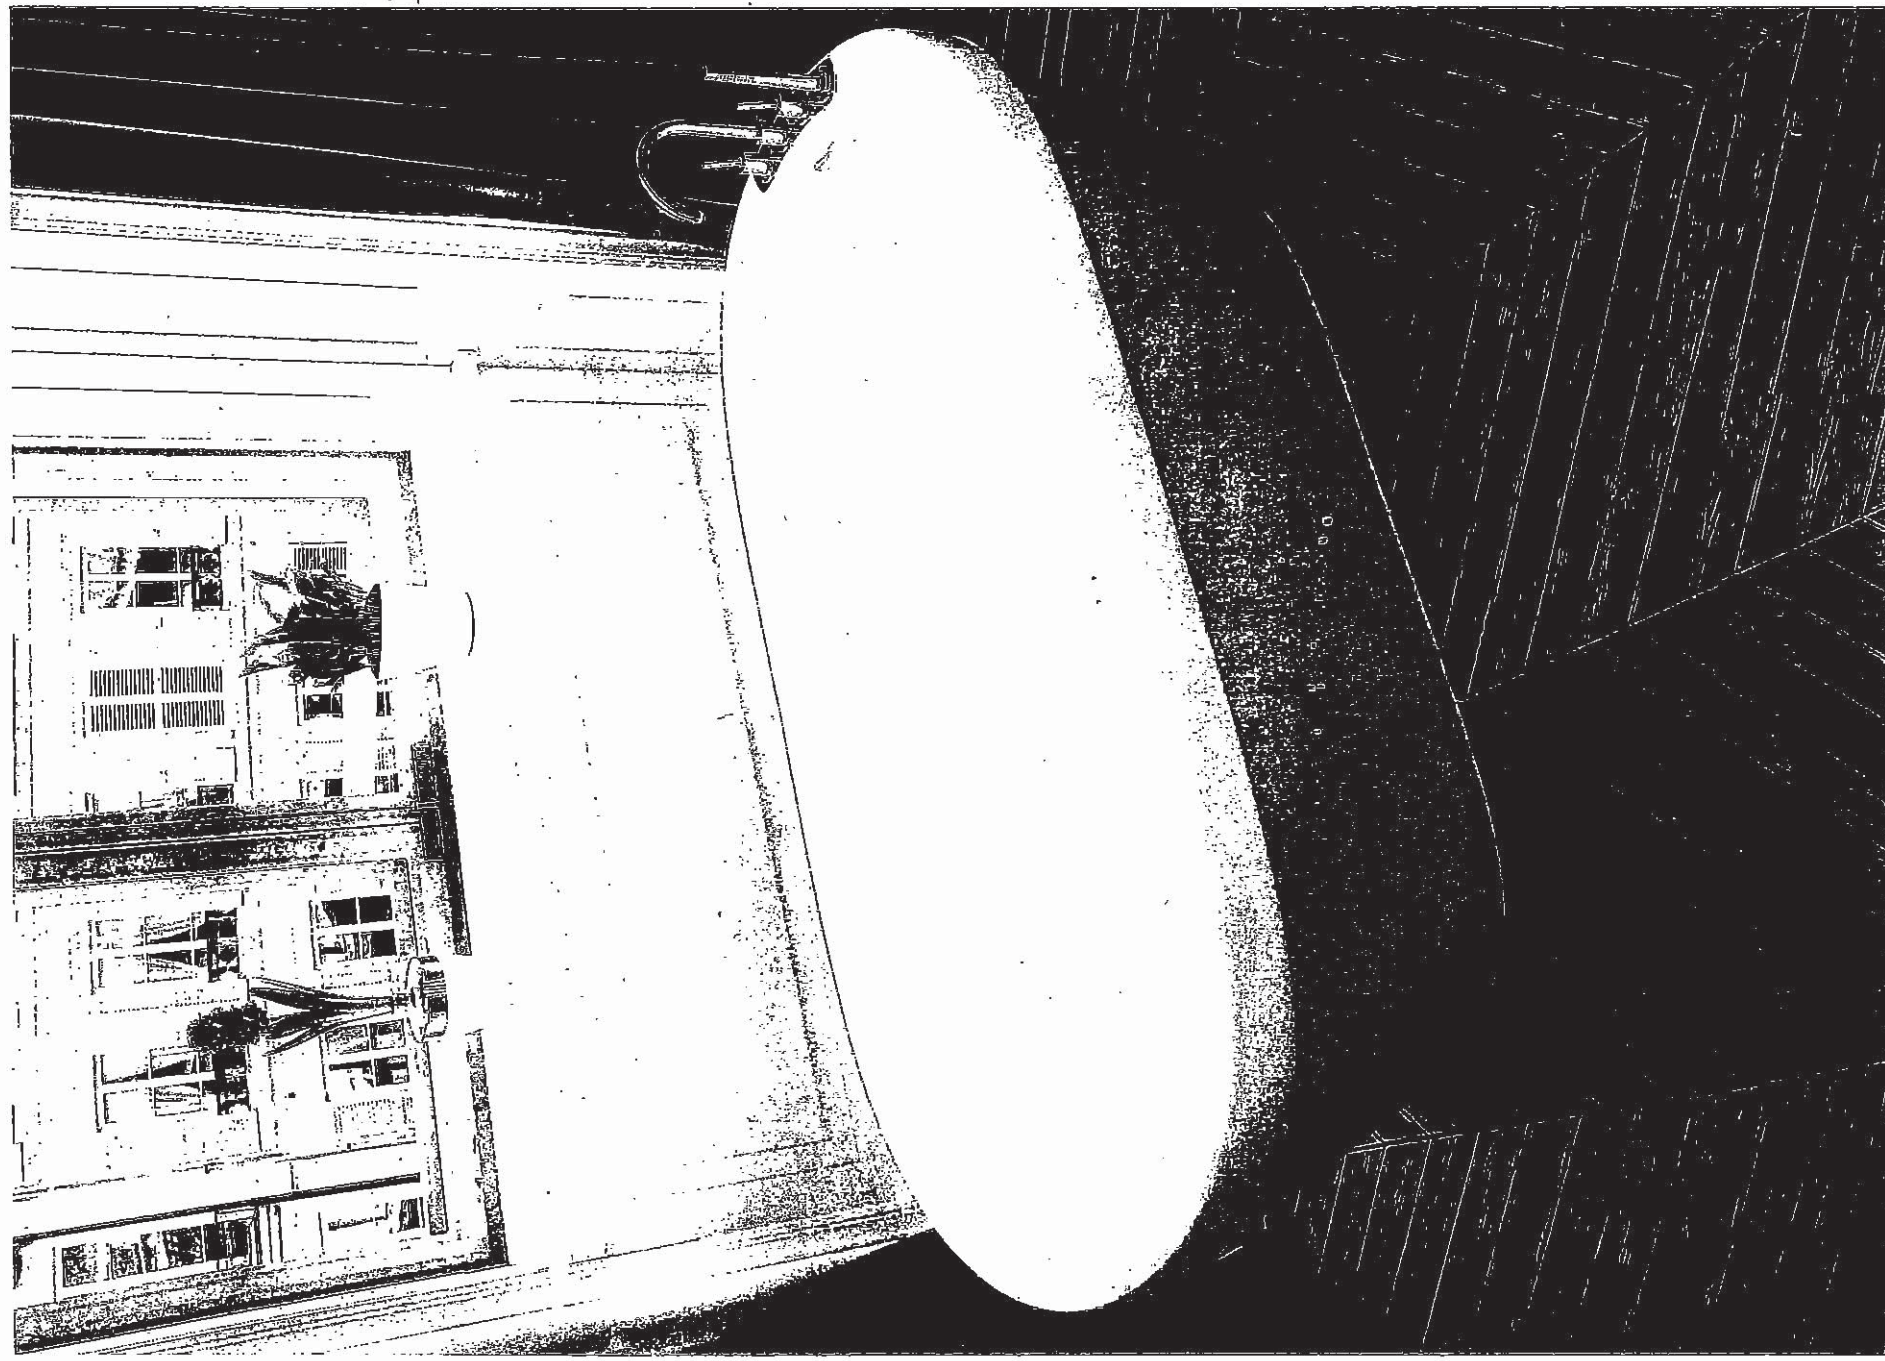

Demi CF-2007


AB

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

22 of 40


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621+

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183+

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP+

(TL183EP not available in BC)



SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990+

FREESTANDING TUB FAUCETS

AB

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

23 of 40

WMH31017H OVER-THE-RANGE MICROWAVE



DISHWASHER SAFE TURNTABLE PLATE

Clean up spills on the turntable by simply putting it in the dishwasher.

5 SPEED BLOWER FAN WITH 3 FAN SPEEDS



Match the right amount of ventilation to the dish being prepared and quickly get rid of cooking odors with two different fan speed settings.

20 MICROWAVE PRESETS



Get just the right amount of heat and time, whether you're cooking or defrosting, with specific preset options.

OTHER FEATURES

- Add 30 seconds option
- Electronic touch controls
- Adjustable cooktop lighting



White (W)



Black (B)



Fingerprint Resistant Stainless Steel (Z)



Silver (S)

Model: WMH31017W

WMH31017HB

WMH31017HZ

WMH31017HS

Max height (in) 17-1/8"

Width (in) 29-15/16"

Depth (in) 15-9/16"

17-1/8"

29-15/16"

15-9/16"

17-1/8"

29-15/16"

15-9/16"

17-1/8"

29-15/16"

15-9/16"

Whirlpool®

*Performance varies based on installation.
©/™ ©2018 Whirlpool. All rights reserved. 1/18. WCT70107A

AB

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

24 of 40

Whirlpool® MICROWAVE HOOD INSTALLATION INSTRUCTIONS


PRODUCT MODEL NUMBERS

WMH31017H

LOCATION REQUIREMENTS

Installation Dimensions


NOTE: The grounded 3 prong outlet must be inside the upper cabinet.
See the "Electrical Requirements" section.

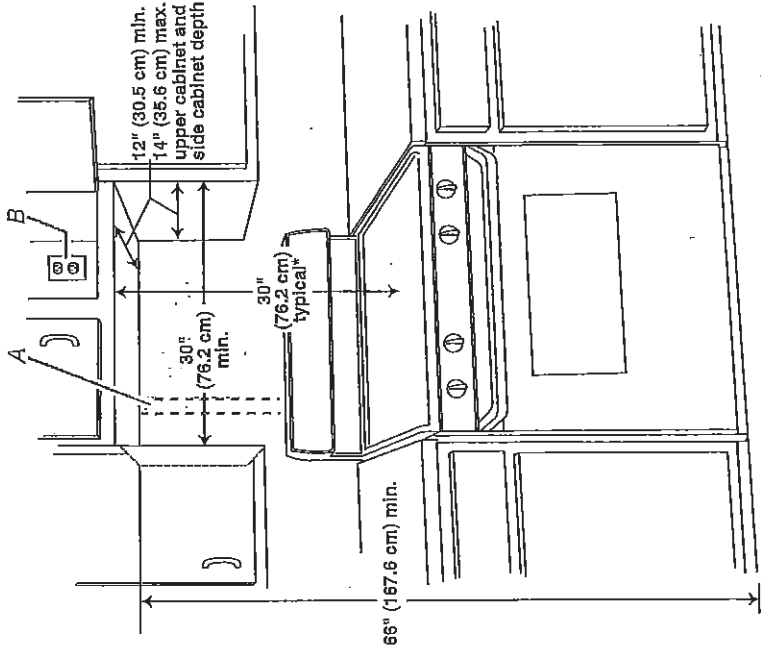

A. 2" x 4" wall stud
B. Grounded 3 prong outlet

*30" (76.2 cm) is typical for 66" (167.6 cm) installation height. Exact dimensions may vary depending on type of range/cooktop below.

PRODUCT DIMENSIONS

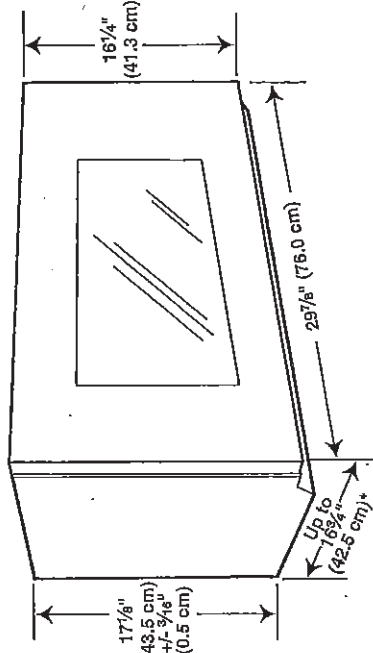

*Overall depth of product will vary slightly depending on door design.

Because Whirlpool Corporation includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

ABC

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

25 of 40

VENTING DESIGN SPECIFICATIONS

This section is intended for architectural designer and builder/ contractor reference only.

NOTES:


- Vent materials needed for installation are not provided with microwave hood combination.
- We do not recommend using a flexible metal vent.
- To avoid possible product damage, be sure to vent air outside, unless using recirculation installation. Do not vent exhaust air into concealed spaces, such as spaces within walls or ceilings, attics, crawl spaces, or garages.
- For optimal venting installation, we recommend:
 - Using roof or wall caps that have back draft dampers
 - Using a rigid metal vent
 - Using the most direct route by minimizing the length of the vent and number of elbows to provide efficient performance
 - Using uniformly sized vents
 - Using duct tape to seal all joints in the vent system
 - Using caulking compound to seal exterior wall or roof opening around cap

- Not installing 2 elbows together for optimal hood performance
- If venting through the wall, be sure that there is proper clearance within the wall for the damper to open fully.

If venting through the roof, and rectangular-to-round transition is used, be sure there are at least 3" (7.6 cm) of clearance between the top of the microwave oven and the transition piece. See "Rectangular-to-Round Transition" illustration.

Rectangular-to-Round Transition



NOTE: The minimum 3" (7.6 cm) clearance must exist between the top of the microwave oven and the rectangular to round transition piece so that the damper can open freely and fully.

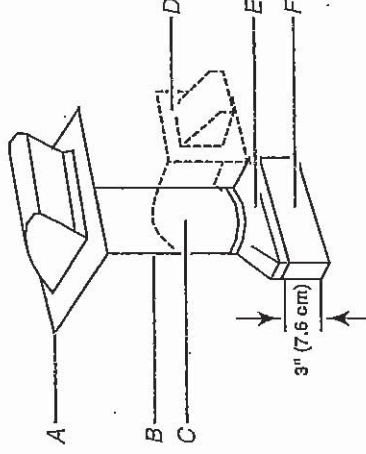

- A. Roof cap
- B. 6" (15.2 cm) min. diameter round vent
- C. Elbow (for wall venting only)
- D. Wall cap
- E. 3 1/4" x 10" to 6" (8.3 x 25.4 cm to 15.2 cm) rectangular to round transition piece
- F. Vent extension piece, at least 3" (7.6 cm) high

Recommended Standard Fittings

The following length equivalents are for use when figuring vent length. See the examples in "Recommended Vent Length."

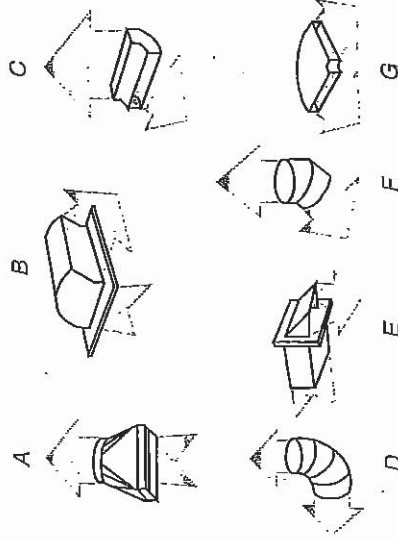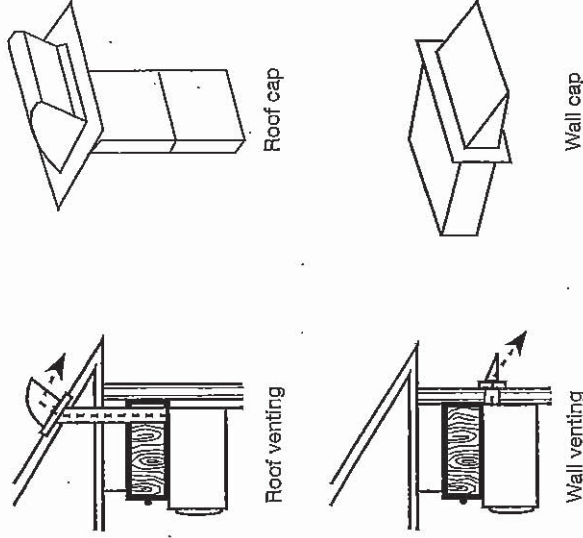

- A. Rectangular-to-round transition piece: 3 1/4" x 10" to 6" = 5 ft (8.3 x 25.4 cm to 15.2 cm = 1.5 m)
- B. Roof cap: 3 1/4" x 10" = 24 ft (8.3 x 25.4 cm = 7.3 m)
- C. 90° elbow: 3 1/4" x 10" = 25 ft (8.3 x 25.4 cm = 7.6 m)
- D. 90° elbow: 6" = 10 ft (15.2 cm = 3 m)
- E. Wall cap: 3 1/4" x 10" = 40 ft (8.3 x 25.4 cm = 12.2 m)
- F. 45° elbow: 6" = 5 ft (15.2 cm = 1.5 m)
- G. 90° flat elbow: 3 1/4" x 10" = 10 ft (8.3 x 25.4 cm = 3 m)

AB

26 of 40

Recommended Vent Length


A 3¼" x 10" (8.3 x 25.4 cm) rectangular or 6" (15.2 cm) round vent should be used.

The total length of the vent system, including straight vent, elbow(s), transitions, and wall or roof caps must not exceed the equivalent of 140 ft (42.7 m) for either type of vent. See the "Recommended Standard Fittings" section for equivalent lengths.

For best performance, use no more than three 90° elbows.


To calculate the length of the system you need, add the equivalent lengths of each vent piece used in the system.
See the following examples:

3¼" x 10" (8.3 x 25.4 cm) vent system = 73 ft (22.2 m) total

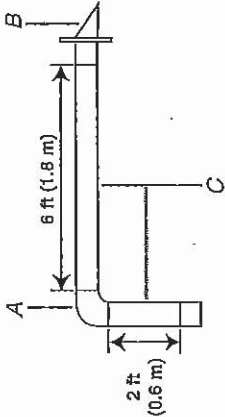

- A. One 3¼" x 10" (8.3 x 25.4 cm) 90° elbow = 25 ft (7.6 m)
- B. 1 wall cap = 40 ft (12.2 m)
- C. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

6" (15.2 cm) vent system = 73 ft (22.2 m) total

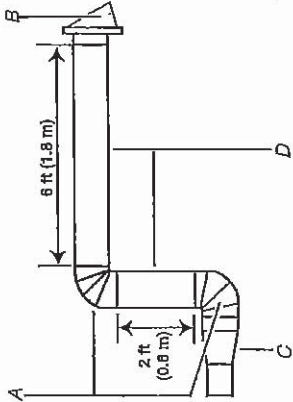

- A. Two 90° elbows = 20 ft (6.1 m)
- B. 1 wall cap = 40 ft (12.2 m)
- C. 1 rectangular-to-round transition piece = 5 ft (1.5 m)
- D. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

If the existing vent is round, a rectangular-to-round transition piece must be used. In addition, a rectangular 3" (7.6 cm) extension vent between the damper assembly and rectangular-to-round transition piece must be installed to keep the damper from sticking.

26

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

3rd
27th 40

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT641SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

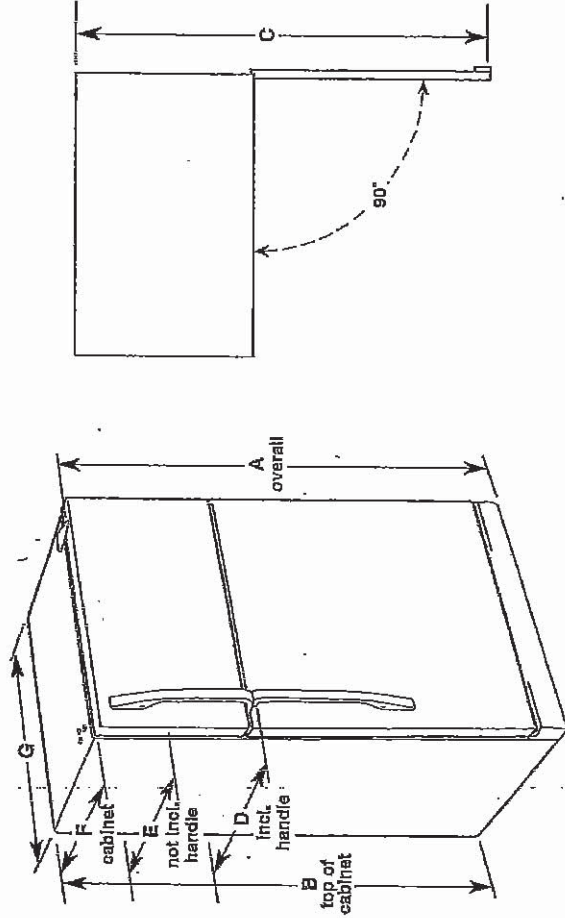

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	32 3/4" (83.5 cm)	30 5/8" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT641SZD	21 1/3 cu. ft.	Yes	66 1/2" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/2" (82.3 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

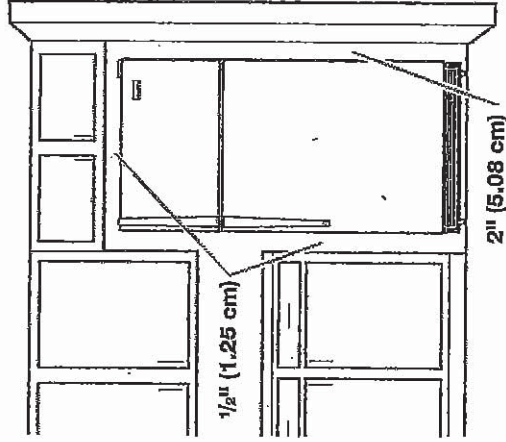

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open. **NOTE:** This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.





Ref. W106741D6
10/29/14

AB

C2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV A
THE BARRINGTON

28 of 40

Refrigerator Door Swing Verification

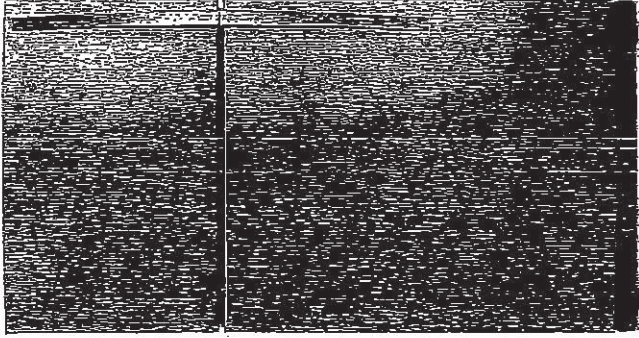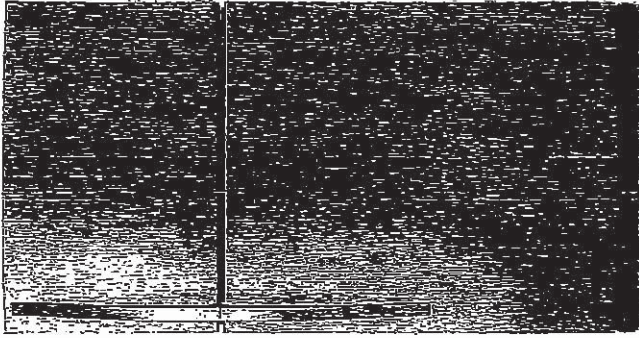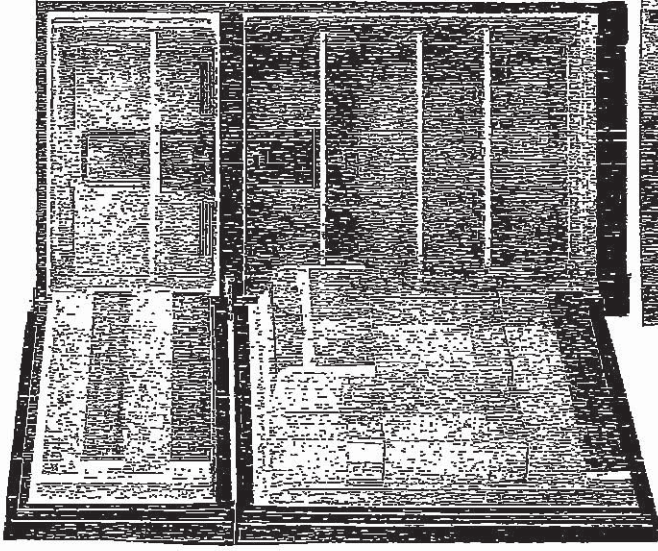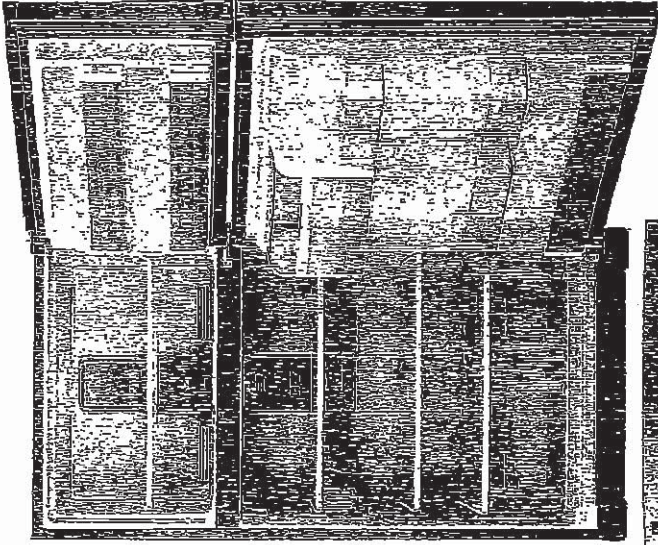

When facing the refrigerator



RIGHT HAND
DOOR OPENING

- Hinges on right
- Handle on left

mf
INITIAL



LEFT HAND
DOOR OPENING

- Hinges on left
- Handle on right

INITIAL

INITIAL

GARAGE RIGHT

Please check and INITIAL your door swing selection.

AB

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

29 of 40

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

5.3 cu. ft. Whirlpool® electric range with Frozen

Bake™ technology

YWFE515S0JS

Whirlpool®

[Home](#) > [Kitchen Appliances](#) > [Cooking Appliances](#) > [Ranges](#) > [Single Oven Ranges](#) > YWFE515S0JS



12"



AB


C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

30 of 40

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES

Model YWFE515S0JS

Product Dimensions

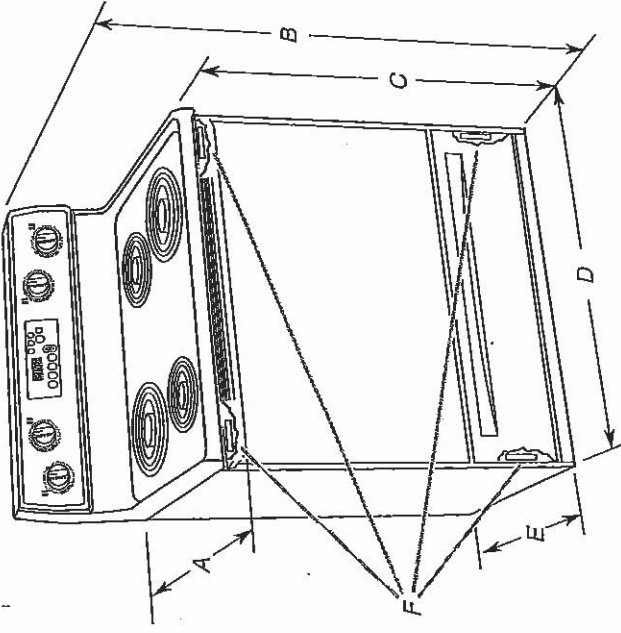

- A. 27¹/₄" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₈" (75.9 cm) width
- E. 26⁵/₈" (64.3 cm) depth - back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

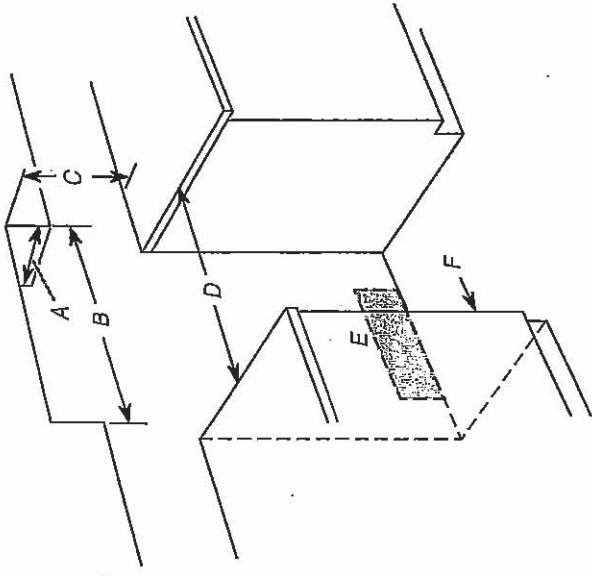

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

APB
Jan 28/20

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

31 of 40

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Install Anti-Tip Bracket


! WARNING



Tip Over Hazard

A child or adult can tip the range and be killed.
Install anti-tip bracket to floor or wall per installation instructions.
Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.
Re-engage anti-tip bracket if range is moved.
Do not operate range without anti-tip bracket installed and engaged.
Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warning drawer.
2. Determine which mounting method to use: floor or wall.
If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/₁₆" (31.9 cm) from centerline as shown.

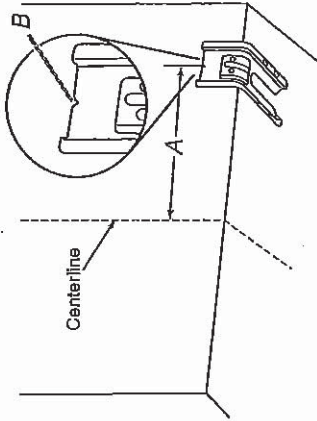


A. 12⁹/₁₆" (31.9 cm)
B. Bracket V-notch


4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting

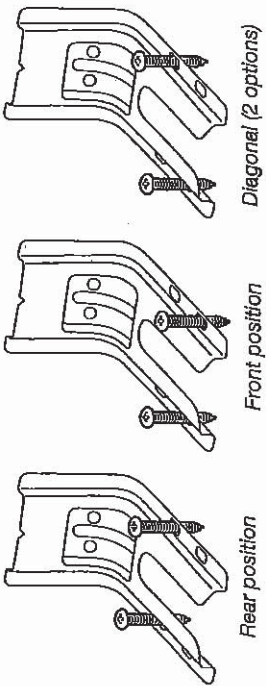

Wall Mounting



5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1⁵/₈" (4.1 cm) screws provided.
 6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
 7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.
- 
8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

32 of 40



Whirlpool
Home Appliances



OTHER AVAILABLE COLORS

	Black Model: WDF310PAAB
	Biscuit-on-Biscuit Model: WDF310PAAT
	White Model: WDF310PAAW
	Universal silver Model: WDF310PAAD



DIMENSIONS		KEY FEATURES: ENERGY STAR® Qualified No One Has Fewer Repairs 17 Years In A Row Resource - Efficient Wash System CEE Tier 1 qualified Tail Tub Design White Plastic Interior Quiet Partner(TM) Sound Package Auto Soil Sensor Electronic Controls 3 Automatic Cycles 1-Hour Wash Cycle Heavy Wash Cycle Normal Cycle 4 Options High Temperature Wash System Heated Dry Option 4 Hour Delay Wash Option 4-Tier SheerClean Direct Feed Wash System Control Lock Vinyl Racks In-Rack Silverware Basket
Maximum Height	34 1/2 Inches	
Minimum Height	33 1/2 Inches	
Height	34 1/2 Inches	
Depth	24 1/2 Inches	
Width	23 7/8 Inches	
Dimensions shown are for planning purposes only. For complete information, see installation instructions packaged with product.		
ELECTRICAL		
15 Amps Amps. 60 Hz. 120 V. 15,		
Before purchasing this appliance, read important information about its estimated energy consumption and energy efficiency rating that is available from your dealer.		



C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

33 of 34



Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB
WDF111PAB
WDF120PAF
WDF121PAF
WDF310PAA
WDF310PCA

WDE310BLA
WDF320PAD
WDF670PAY
WDF710PAY
WDF720PAD
WDF770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part

No. 4317824) marked for use

with dishwashers. Follow the kit

instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.

Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4" N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385566) that meets all current AHAM/JAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.


Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation Instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.



PRODUCT DIMENSIONS

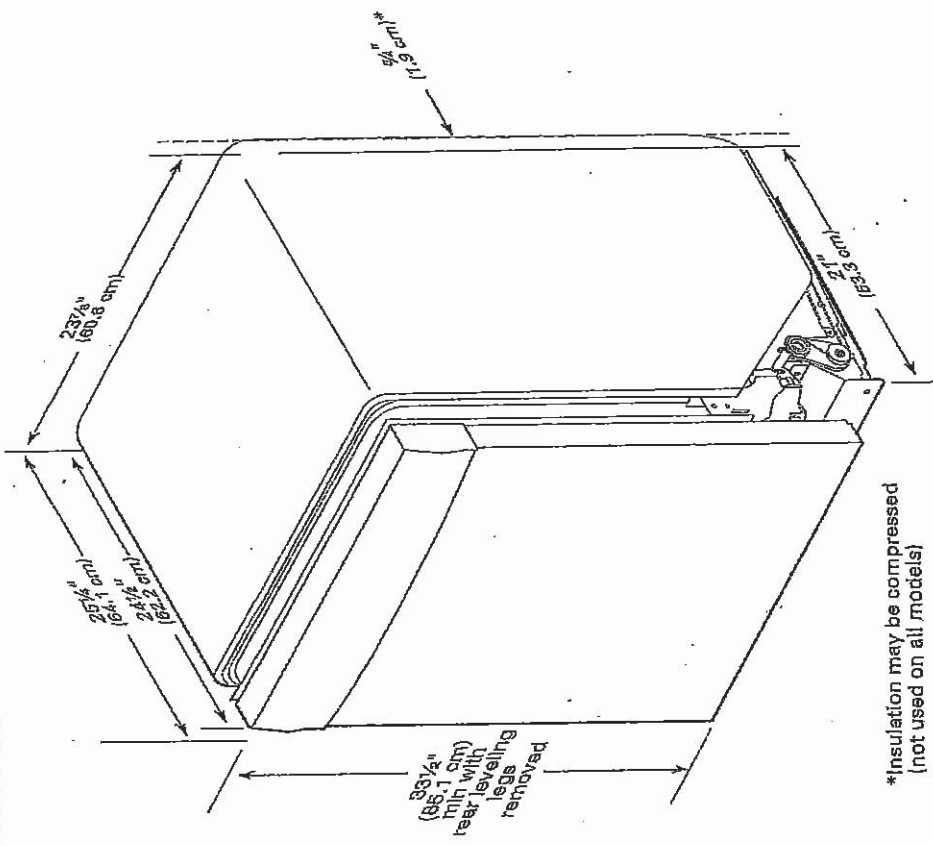

AS

34.40

WDF 320 DAB


*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

35 of 40

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryer | Washers | Front Load Washers | WFW5620HW

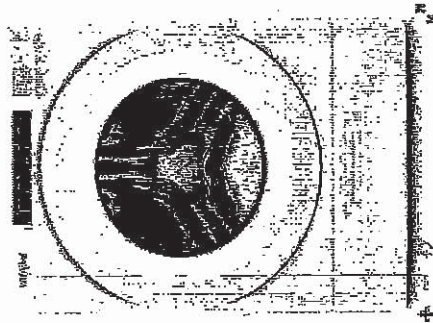

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	88.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

AB

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON

36 of 40

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS


Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).




IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models* ✓

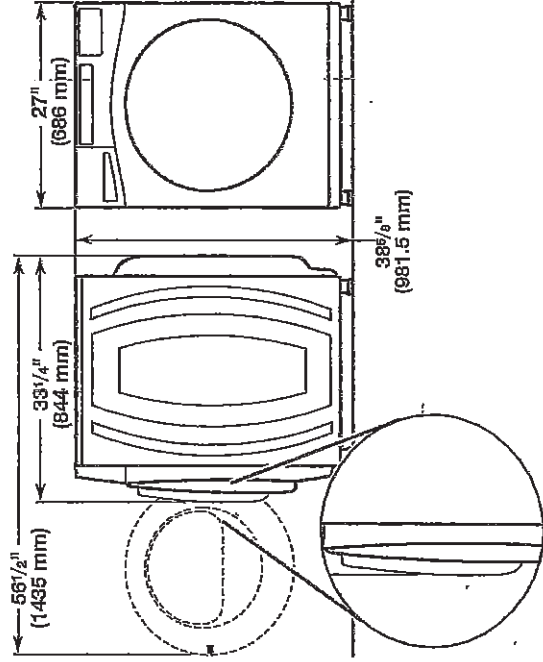

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer): X

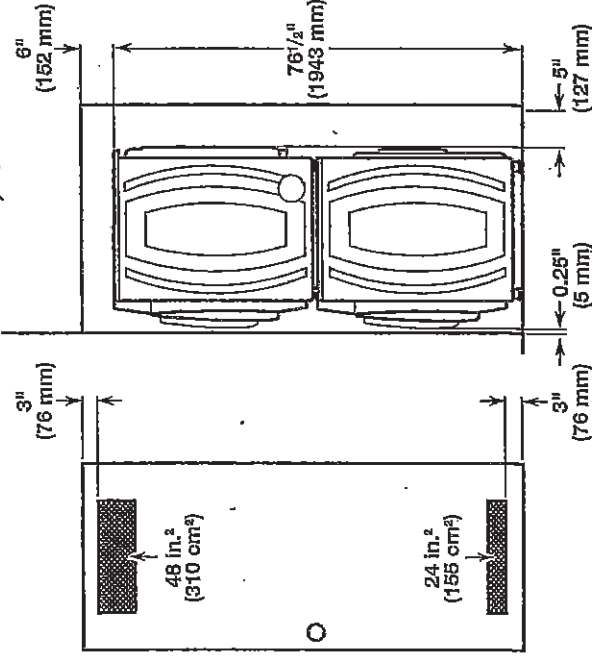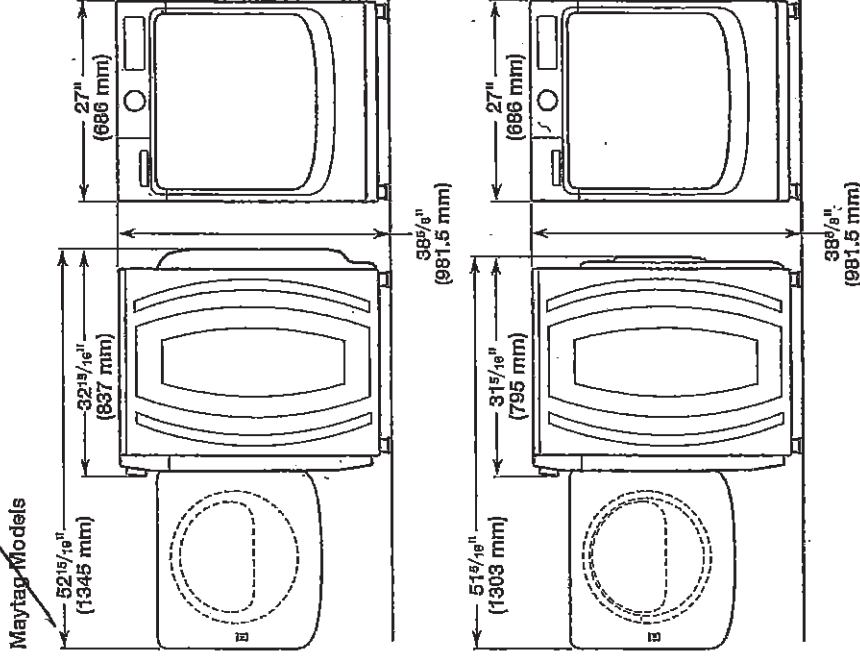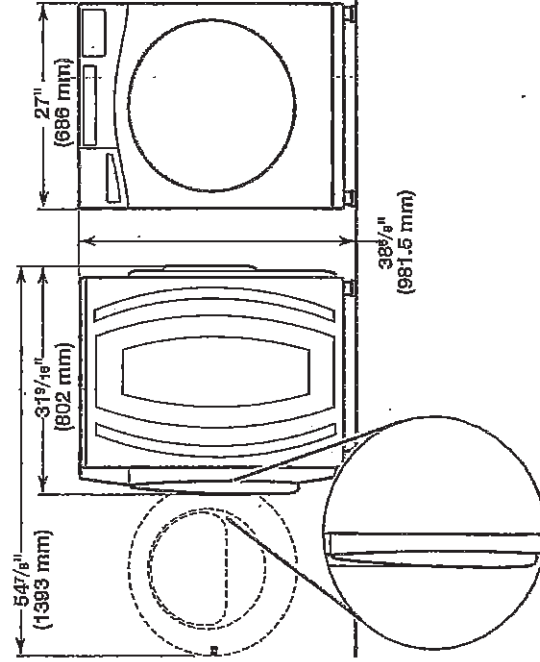

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.


AB

C-2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV. A
THE BARRINGTON


37 of 40

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation: X

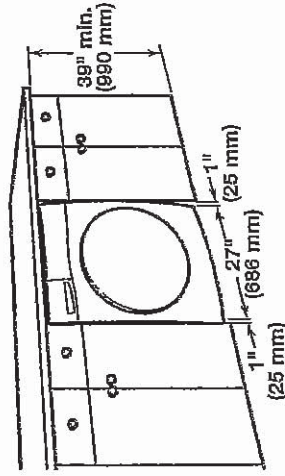

Recessed area or closet installation: X

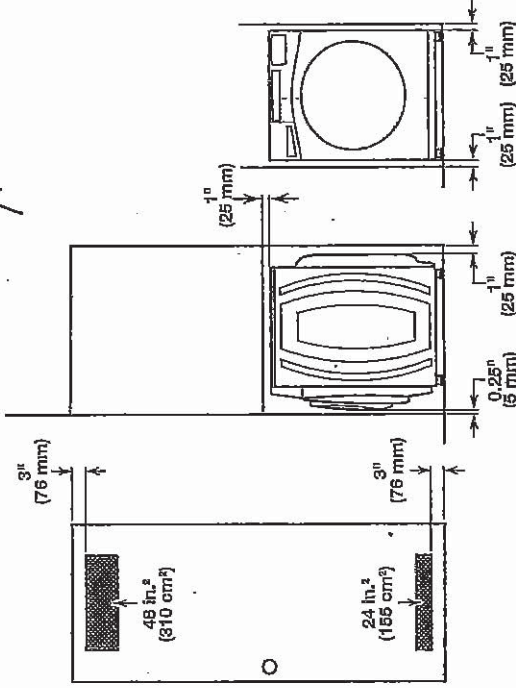

Custom cabinet installation: X

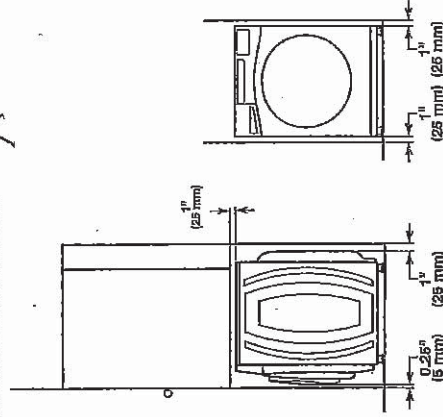


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

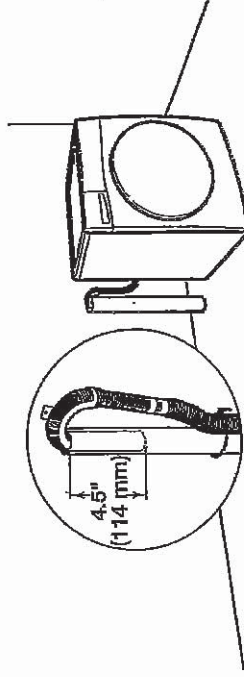


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3863920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

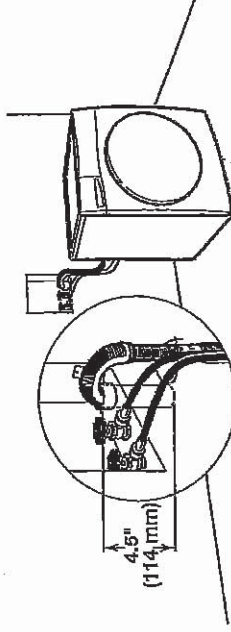

See requirements for floor standpipe drain system.

Laundry tub drain system

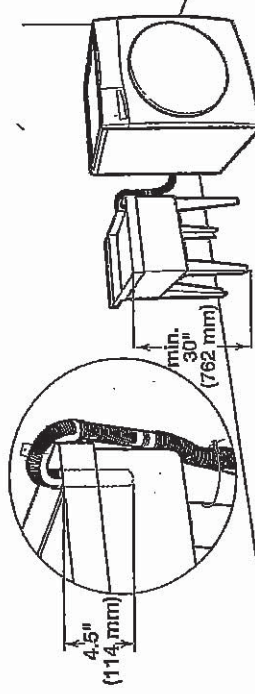

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


AS

C2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV A
THE BARRINGTON

38 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Gas/electric Dryers | Washers and Dryers | Dryers | Electric Dryers | YWED5620HW

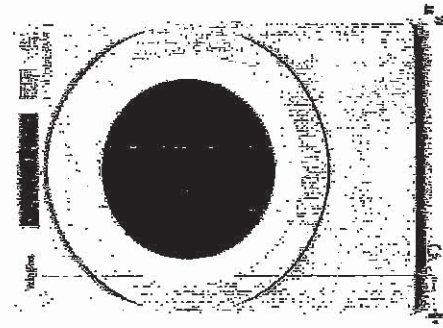

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls



Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	76.74 cm, 30.2 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-9/16 in
Width	69.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dymass Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hertz	60
Power Cord Included	Yes


AB

C2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV A
THE BARRINGTON

39 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

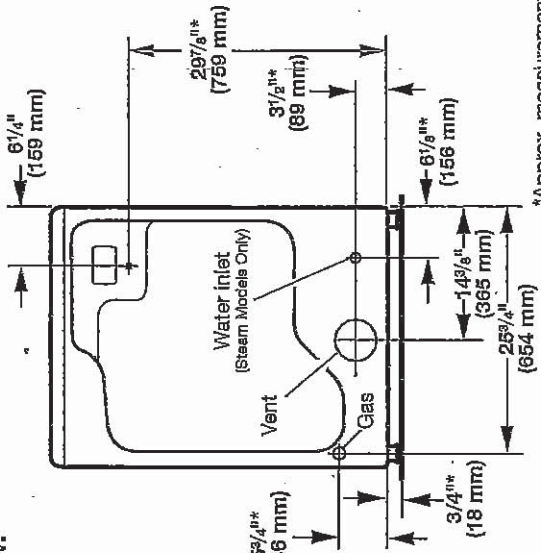

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

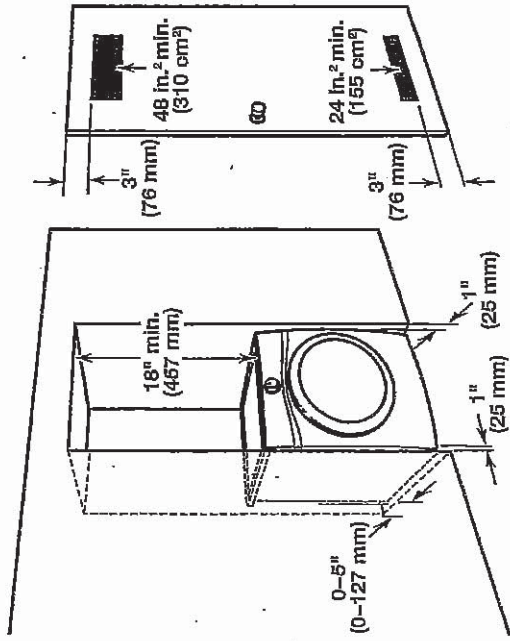

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

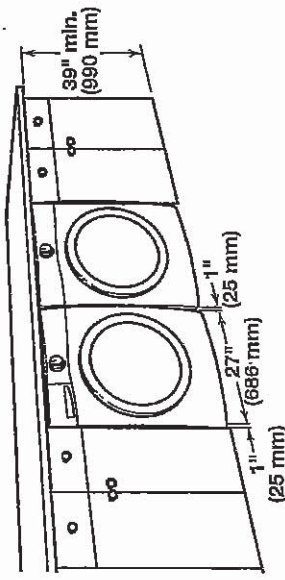

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

AB

C2 COUNTRY LANE
LOT 54-1
20-2447 EN ELEV A
THE BARRINGTON

4 of 10

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

! WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.

Failure to do so can result in death, explosion, or fire.


You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view:

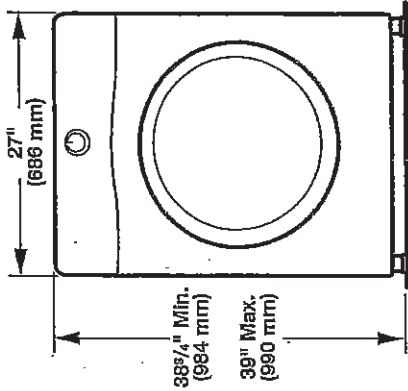


Side view:

Whirlpool Models

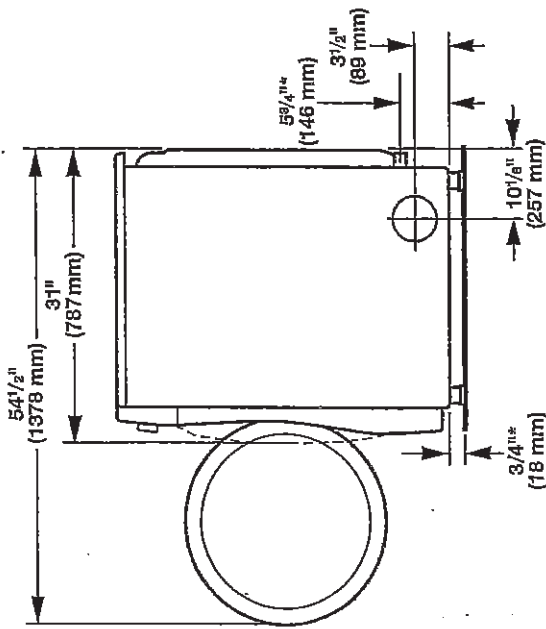

Maytag Models

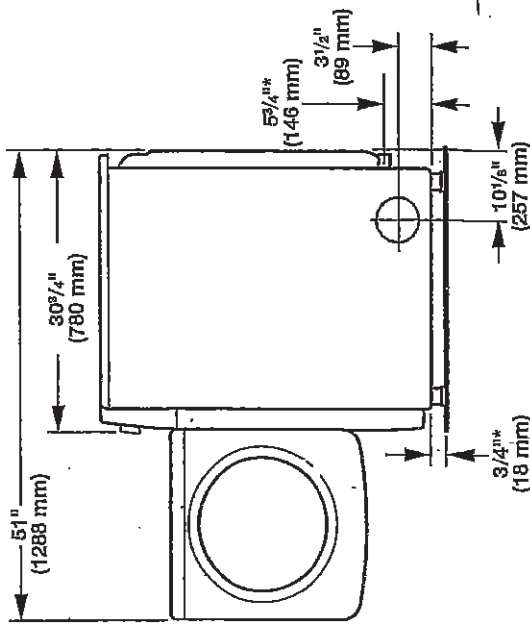

AB