



12-Aug-21

PRE-Sales Selection Sheet

CHECKLIST

of 37 ^{C2}

LOT	054-6	20-2505-CR ELEV A THE WORTHINGTON
PURCHASERS: PANAGIOTIS VELENTIS		CONTACT NO: 647-287-1509
VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4		

OPTIONAL LOWER LEVEL WITH BEDROOM 4 AND BATH
COFFERED CEILING IN GREAT ROOM

☒ FINISHED BASEMENT	
☐ COLD CELLAR	
UPGRADED / MODIFIED ELEVATION	
☐ CORNER UPGRADE	☐ WALK OUT DECK
☐ SIDE UPGRADE	☐ WALK OUT BASEMENT
☐ REAR UPGRADE	
CEILING UPGRADE - SMOOTH	
☒ MAIN FLOOR	☐ BASEMENT
☐ SECOND FLOOR	
ADDITIONAL ROUGH-INS	
☒ 200 AMP SERVICE	☐ HUMIDIFIER
☐ WET BAR ROUGH IN	☐ AIRCON
GAS ROUGH-IN	
☒ STOVE	☐ DRYER
☐ BBQ	☐ ADDITIONAL FIREPLACE
HOODFAN VENTING	
☒ 6" ROUND DUCT	
☐ 7" ROUND DUCT	

FULL BASEMENT STAIRS:	<u>PAIN</u> <u>GRADE</u>
UPPER BASEMENT STAIRS:	<u>N/A</u>
LOWER BASEMENT STAIRS:	<u>N/A</u>
STAIRS TO LOWER LEVEL:	<u>ALL OAK</u>
STAIRS TO UPPER LEVEL:	<u>N/A</u>
MAIN STAIRS:	<u>ALL OAK</u>
MEDIA STAIRS (if applicable):	<u>N/A</u>

Date	Aug 12/21	Date	Aug 12/21	SANIA SHARIF
Date		Date	APPROVED -	Décor Consultant
Date		Date	25 2021	myLozan

Date Approved HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



04-Aug-21

SCHEDULE "E"

2 of 37

Addendum forms part of, and is to be read with the attached offer to Purchase for:

LOT	054-6	20-2505-CR ELEV A THE WORTHINGTON
PURCHASERS: PANAGIOTIS VELENTIS		CONTACT NO: 647-287-1509
VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4		

The following items are included in the Agreement of Purchase and Sales, and are from Vendors standard samples:

Appliances			
2	- FIVE APPLIANCES: SS FRIDGE, STOVE, DISHWASHER; WHITE FRONT LOADER WASHER/DRYER-TOWNHOMES	Qty:	1

Modifications			
40	- OPTION/LA LOWER LEVEL WITH BEDROOM 4 AND BATH (THE WORTHINGTON) THE HEATHWOOD COLLECTION	Qty:	1

X_Credits			
38	- TEN THOUSAND DOLLARS (\$10,000) AT DÉCOR (NO CASH VALUE) - TOWNHOMES	Qty:	1
38	- REFERRAL - FIVE HUNDRED DOLLARS (\$500) BY CHEQUE ON CLOSING TO THE PURCHASER OF LOT 161 AND FIVE HUNDRED DOLLARS AT DÉCOR TO THE PURCHASER OF LOT 54-6 (NO CASH VALUE)	Qty:	1

8/10/21	Aug. 10, 21	2021
Date	Date	Date
Purchaser	Décor Consultant	
I APPROVE -		
Date	08-23-2021	
Purchaser		



Interior Finishing Selection Sheet

12-Aug-21

LOT 054-6

20-2505-CR ELEV A THE WORTHINGTON

PURCHASERS: PANAGIOTIS VELENTIS

CONTACT NO: 647-287-1509

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Appliances

6-9117 Kitchen HoodFan

- ☒ CYCLONE 30" STAINLESS CHIMNEY/CANOPY HOODFAN
☐ STAINLESS STEEL SCB51930 UPG 30" PAGES 22-23

Cabinetry

1-9111 Kitchen Cabinet Colour/Style

- ☐ SIMCOE ORCHID VIKING III STD 3DL

3-2093 Kitchen Cabinet Hardware

- ☐ HARDWARE 9671 STD

25-9156 Main Bathroom Cabinet Colour/Style

- ☐ SIMCOE RAIN CLOUD VIKING III STD 3DL

29-7672 Main Bathroom Cabinet Hardware

- ☐ HARDWARE 135 STD

28-8806 Main Bathroom Countertop

- ☐ Countertop LECHE VESTA 4987K-07 Wilsonart

20-9156 Master Ensuite Cabinet Colour/Style

- ☐ SIMCOE RAIN CLOUD VIKING III STD 3DL

22-7672 Master Ensuite Cabinet Hardware

- ☐ HARDWARE 135 STD

21-8806 Master Ensuite Countertop

- ☐ Countertop LECHE VESTA 4987K-07 Wilsonart

359-9168 Optional Lower Level Bath Cabinet Colour/Style

- ☐ CHARLESTON MOONLIGHT VIKING III STD 3DL

360-7672 Optional Lower Level Bath Cabinet Hardware

- ☐ HARDWARE 135 STD

361-8806 Optional Lower Level Bath Countertop

- ☐ Countertop LECHE VESTA 4987K-07 Wilsonart

Carpet

37-9248 Bedroom 2 Flooring

- ☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

38-9248 Bedroom 3 Flooring

- ☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

363-9248 Bedroom 4 (Optional Lower Level) Flooring

- ☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

367-9248 Lower Level Hall Flooring

- ☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

36-9248 Master Bedroom Flooring

- ☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

52-1078 Throughout Underpad

- ☐ Underpad STD

Ceramics

16-9103 Foyer Flooring

- ☒ Madison Series Light Grey Matte GE.MD.LGR.1818.MT UPG
1 18" X 18" Matte

17-7705 Foyer Grout

- ☒ Upgrade Grout (01) Alabaster U/G

- The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
- The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
- The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- Selections will not be processed unless signed by Heathwood Homes Head Office.
- The colour selections made on the Colour Chart are final and cannot be changed once submitted.
- The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 12/21

Date

Purchaser

Aug 12/21

Sonia Sharif

Date

Décor Consultant

Date

Purchaser

Date Approved

HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4



12-Aug-21

LOT 054-6

20-2505-CR ELEV A THE WORTHINGTON

PURCHASERS: PANAGIOTIS VELENTIS

CONTACT NO: 647-287-1509

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Ceramics

UPG

348-8623 Laundry Mud Room Flooring

☐ Corte Milia Grey GE.CM.GRY.1313 STD 13 x 13

349-2225 Laundry Mud Room Grout

☐ Grout (27) Silver STD

30-9257 Main Bathroom Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

31-2225 Main Bathroom Grout

☐ Grout (27) Silver STD

112-5420 Main Bathroom Tub Wall Tile

☐ Splendour Dark Grey QT.SP.DGR.0810 Std 8" x 10"
INSTALL VERTICALLY

113-2226 Main Bathroom Tub Wall Tile Grout

☐ Grout (00) White STD

23-9257 Master Ensuite Floor Tile

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

24-2225 Master Ensuite Floor Tile Grout

☐ Grout (27) Silver STD

73-8661 Master Ensuite Shower Floor Tile

☐ Ontario Series Mosaic Snow White Matte
OD.ON.SWT.0202.MT.N STD 2 x 2

74-2226 Master Ensuite Shower Floor Tile Grout

☐ Grout (00) White STD

147-8923 Master Ensuite Shower Jamb(s) and Sill(s)

☐ Shower Jamb / Sill Thassos White STD

104-5420 Master Ensuite Shower Wall Tile

☐ Splendour Dark Grey QT.SP.DGR.0810 Std 8" x 10"
INSTALL VERTICALLY

105-2226 Master Ensuite Shower Wall Tile Grout

☐ Grout (00) White STD

350-8262 Optional Lower Level Bath Flooring

☐ Serpentine Grey TR.ST.GRY.1313 STD 13x13

351-2225 Optional Lower Level Bath Grout

☐ Grout (27) Silver STD

352-8258 Optional Lower Level Bath Tub Wall Tile

☐ Serpentine Grey TR.ST.GRY.0810 STD 8 x 10
INSTALL VERTICALLY

353-2225 Optional Lower Level Bath Tub Wall Tile Grout

☐ Grout (27) Silver STD

32-9103 Powder Room Flooring

☒ Madison Series Light Grey Matte GE.MD.LGR.1818.MT UPG
1 18" X 18" Matte

33-7705 Powder Room Grout

☒ Upgrade Grout (01) Alabaster U/G

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 12/21

Date Purchaser

Aug 12/21

Sonia Sharif

Date

Décor Consultant

Date

Purchaser

Date Approved

HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4

LOT 054-6

20-2505-CR ELEV A THE WORTHINGTON

PURCHASERS: PANAGIOTIS VELENTIS

CONTACT NO: 647-287-1509

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Fireplace

136-9114 Great Room Fireplace Mantle

135-8865 Great Room Fireplace Type

- ☐ Paint Grade Mantel- Cabinet (Per Plan) WHITE NF 15 STD
☐ Dimplex FP3033HL Electric Fireplace

PAGE 15

Granite

2-8595 Kitchen Countertop

- ☒ Quartz-Caesarstone OCEAN FOAM #6141 Group 2 UPG 3/4" with Mitered Edge

Hardwood

99-7502 Dining Room Flooring

11-7502 Great Room Flooring

- ☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl PEWTER Red Oak Pearl 3/4" x 3 1/4"

338-7502 Kitchen Flooring

- ☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl PEWTER Red Oak Pearl 3/4" x 3 1/4"

98-7502 Main Hall Flooring

- ☒ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl PEWTER Red Oak Pearl 3/4" x 3 1/4"

368-7502 Study Niche Flooring

- ☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl PEWTER Red Oak Pearl 3/4" x 3 1/4"

35-7502 Upper Hall Flooring

- ☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl PEWTER Red Oak Pearl 3/4" x 3 1/4"

Interior Railings

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

- ☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

43-8148 Stairs to Upper Level Handrail/Pickets/Posts Type

- ☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

Interior Stairs

116-1713 Basement Stairs Type

- ☐ Paint Grade Stairs STD

45-1712 Stairs to Lower Level Type

- ☐ Oak Stairs UPG_1

39-1712 Stairs to Upper Level Type

- ☐ Oak Stairs UPG_1

Interior Trim

91-9374 Throughout Trim Size

- ☐ 4 1/4" Baseboards and 2 3/4" Integrated Backband Casings STD-Towns

Painting

- The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
- The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
- The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- Selections will not be processed unless signed by Heathwood Homes Head Office.
- The colour selections made on the Colour Chart are final and cannot be changed once submitted.
- The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

AUG 12/21

AUG 12/21

SANIA SHARIF

Date

Purchaser

Date

Décor Consultant

Date

Purchaser

Date Approved HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



12-Aug-21

Interior Finishing Selection Sheet

0 of 3

LOT 054-6 20-2505-CR ELEV A THE WORTHINGTON

PURCHASERS: PANAGIOTIS VELENTIS CONTACT NO: 647-287-1509

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Painting

46-7761 Stairs to Lower Level Colour

40-7761 Stairs to Upper Level Colour

240-1716 Throughout Trim - Paint Colour

51-1717 Throughout Walls - Paint Colour

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

149-1737 Master Ensuite Plumbing Fixture (colour)

362-1737 Optional Lower Level Bath Plumbing Fixture (Colour)

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT PEWTER HARDWOOD FLOORING SHADE WILL VARY FROM FLOORING

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT PEWTER HARDWOOD FLOORING SHADE WILL VARY FROM FLOORING

☐ Trim WHITE STD

☐ Wall WARM GREY 22 STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 12 / 21 Purchaser

Aug 12 / 21 Sonia Sitarif

Date **APPROVED** Date Décor Consultant *mfloren*

Date Purchaser Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



11-AUG-21

LOT	054-6	20-2505-CR ELEV A THE WORTHINGTON	
PURCHASERS: PANAGIOTIS VELENTIS		CONTACT NO: 647-287-1509	
VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4		HST #	

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances

2171	Cyclone 30" Wall Mount Chimney Hood SS	KITCHEN	Qty: 1
	SC851930	PAGES 22-23	

Cabinetry

1568	Optional Upgrade	Classic Kitchen	Qty: 1
	Optional Classic Kitchen (Top Drawers inlieu of Bank of Drawers, Crown Moulding, Deep Fridge Uppers, Soft Close Drawers and Soft Close Doors) VIKING I/II/III		
	SKETCH # 4 PAGE 13		

Ceramics

1945	Upgrade 1 Tile	Foyer Floor	Qty: 1
1945	Upgrade Grout	Foyer Floor	Qty: 1
1946	Upgrade 1 Tile	Powder Floor	Qty: 1
1946	Upgrade Grout	Powder Floor	Qty: 1
60	Optional Upgrade	GREAT ROOM	Qty: 1

Coffered Ceiling

Drywall

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

AUG 12/21		AUG 12/21	SANIA SHARIF
Date	Purchaser	Date	APPROVED - Décor Consultant
Date	Purchaser		

~~Date Approved~~ - HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



11-AUG-21

Sales Selection Sheet
of 3

LOT	054-6	20-2505-CR ELEV A THE WORTHINGTON
PURCHASERS:	PANAGIOTIS VELENTIS	CONTACT NO: 647-287-1509
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

450 Ceiling Upgrades Qty: 1
Smooth Ceilings Main Floor

Electrical

342 Optional Extras Qty: 1
Extra wall interior outlet on Existing Circuit (does not include kitchen outlets)
ABOVE FIRE PLACE ~~BESIDE THE CONDUIT~~ 16" +/- FROM FLOOR
SKETCH # 3 PAGE 12

338 GREAT ROOM Qty: 1

TO RELOCATE EXISTING LIGHT FROM KITCHEN TO CENTRE OF GREAT ROOM USING
THE EXISTING PLUG SWITCH SEE SKETCH 3 PAGE 12

340 Décor Package Qty: 1
GREAT ROOM AND KITCHEN

Potlight Bundle - 8 x T477GR-W 4" line voltage potlights installed on main floor
includes 2 switches
6X POTLIGHTS TO BE INSTALLED IN GREAT ROOM, 2 IN KITCHEN SEE SKETCH
3 PAGE 12

352 Potlights (NON-INSULATED) Qty: 3
T477GR-W 4" line voltage trim with flush adjustable gimbal ring (with LED Bulb)
FOR A TOTAL OF 5 ON SAME SWITCH SKETCH #3 PAGE 12

338 KITCHEN Qty: 1

TO RELOCATE EXISTING LIGHT FROM KITCHEN TO ABOVE ISLAND CENTERED +/-
SKETCH # 3 PAGE 12

342 Optional Extras Qty: 1
Extra wall interior outlet on Existing Circuit (does not include kitchen outlets)
SEE SKETCH 3 PAGE# 12 STANDARD HEIGHT FROM FLOOR

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug 12/21	Aug 12/21	SONIA SHARIF
Date	Date	Date
Purchaser	Décor Consultant	
	APPROVED -	
	08-28-2021	
Date	Date	Date
Purchaser	Purchaser	Purchaser
	Date Approved	HEATHWOOD HOMES (WHITBY)
		LIMITED - PHASE 4



Sales Selection Sheet
of 3

11-Aug-21

LOT	054-6	20-2505-CR ELEV A THE WORTHINGTON	
PURCHASERS: PANAGIOTIS VELENTIS		CONTACT NO: 647-287-1509	
VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4		HST #	

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Granite			
882	Optional Upgrade Countertop 3/4" GROUP 2 with double edge	Kitchen	Qty: 1
Hardwood			
1197	Vintage 3-1/4" Red Oak Select-V	KITCHEN	Qty: 1
Heating / Air			
331	Optional Extras ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (See specs) (Hook-up not included)Leave standard 120 volt electrical outlet on a separate circuit.		Qty: 1

SKETCH # 3 PAGE 12

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

8/12/21		Aug 12/21	Sonia Sharif
Date	Purchaser	Date	Décor Consultant
APPROVED -		mPosen	
-08-12-2021			
Date	Purchaser	Date Approved	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4


C2-COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

10 of 37
The Worthington

20-2505 CRN ELEV. A

ELEVATION A: 2,505 SQ FT

Sketch #1

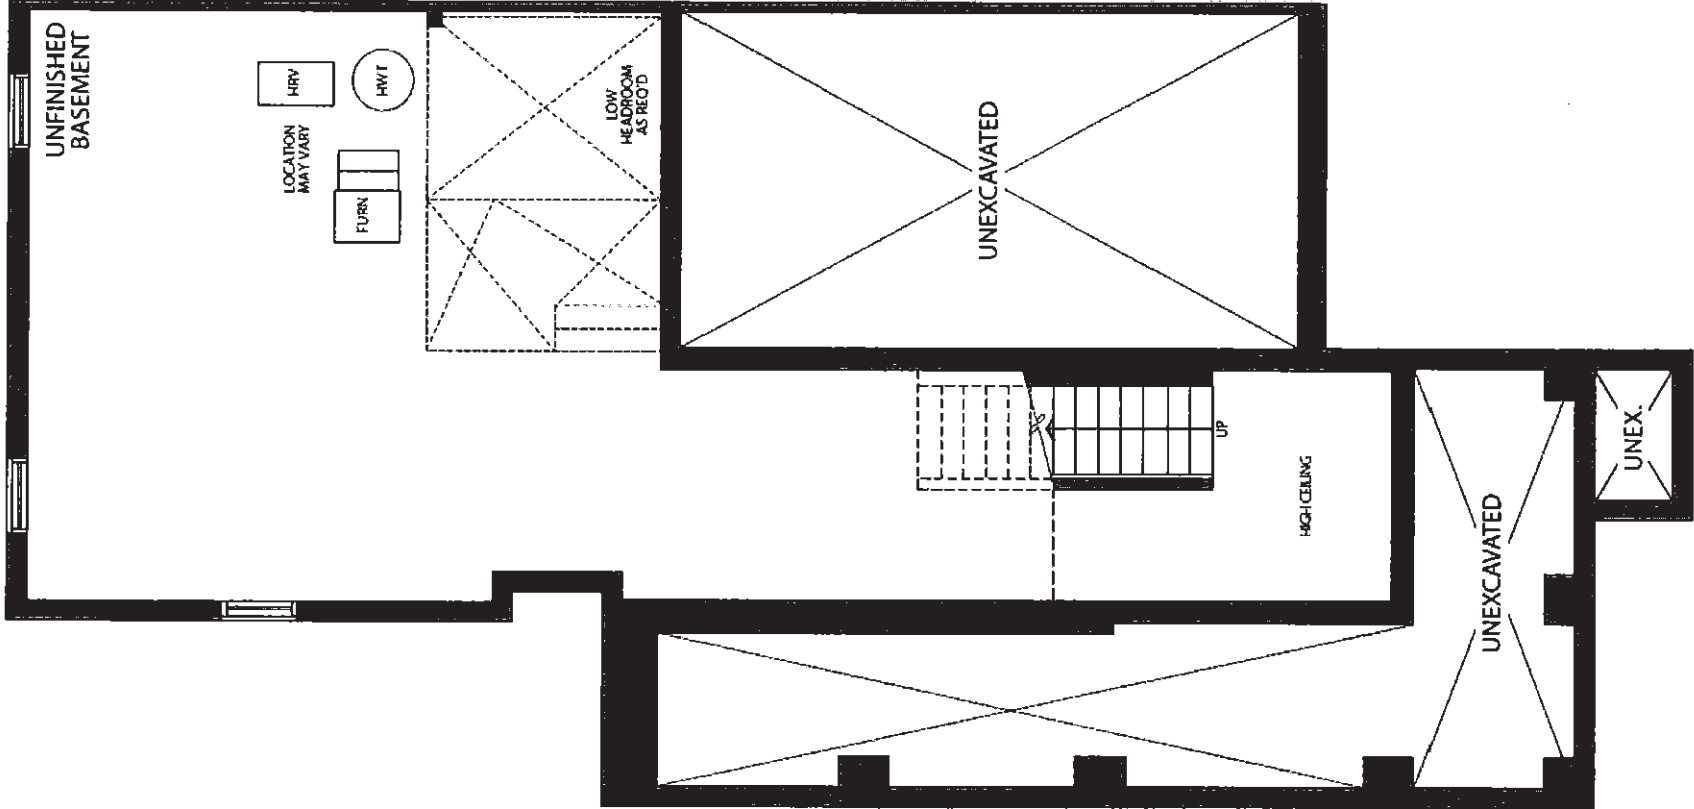

BASEMENT
ELEVATION A


C2- COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

11 of 37
The Worthington

20-2505 CRN ELEV. A

ELEVATION A: 2,505 SQ FT

Sketch #2

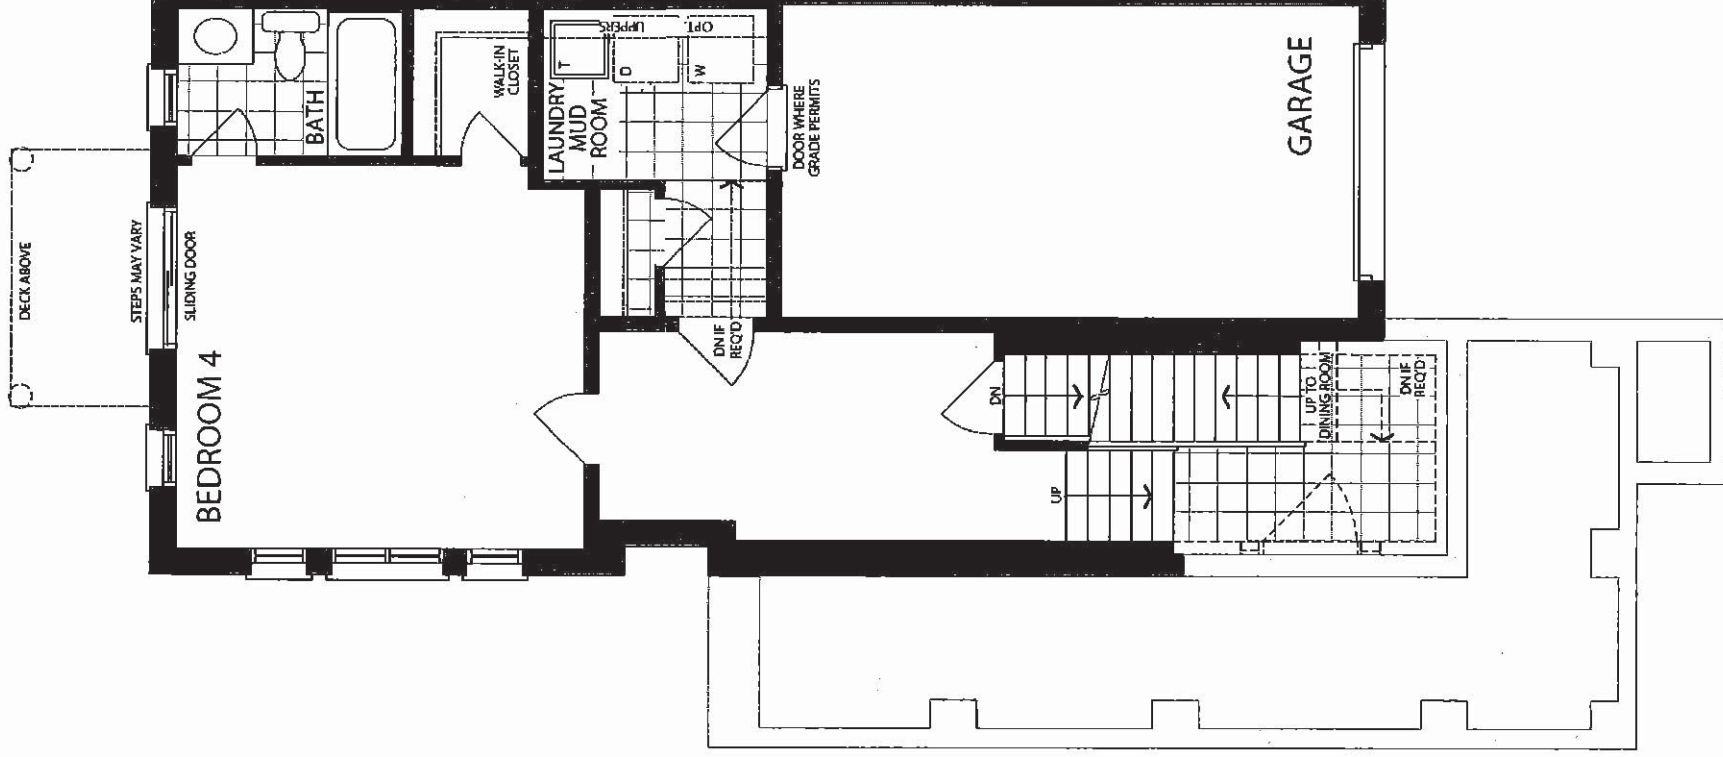

LOWER LEVEL
ELEVATION A


20-2505 CRN ELEV. A

ELEVATION A: 2,505 SQ FT





13 of 37

KITCHEN (GROUND FLOOR)

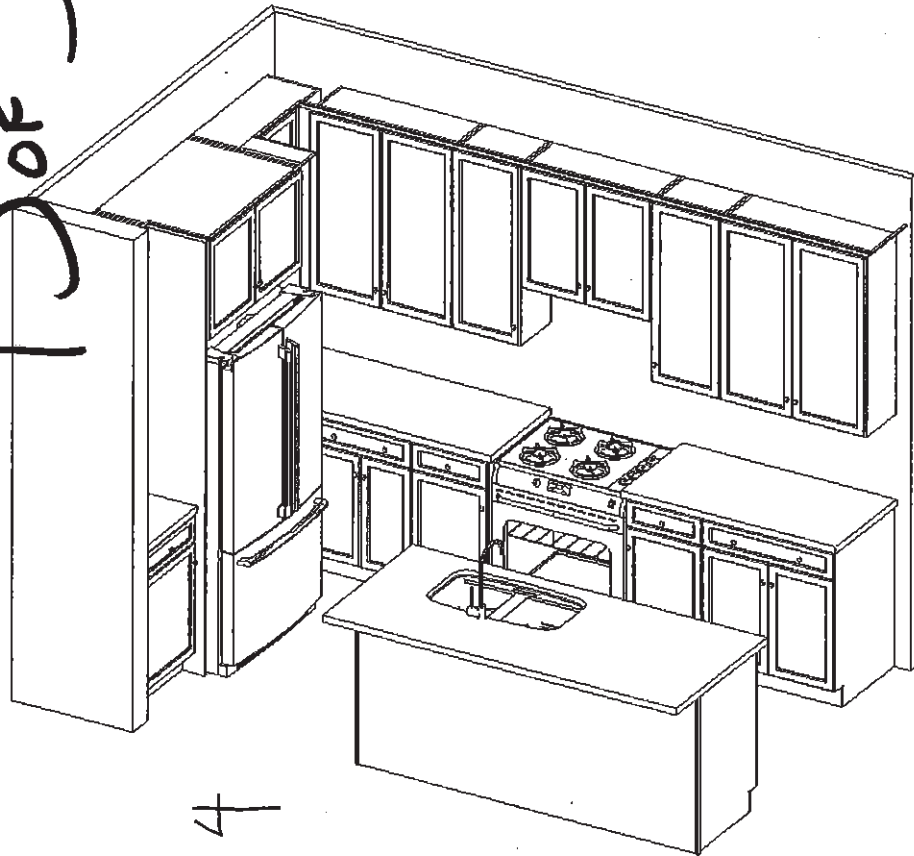

Sketch # 4

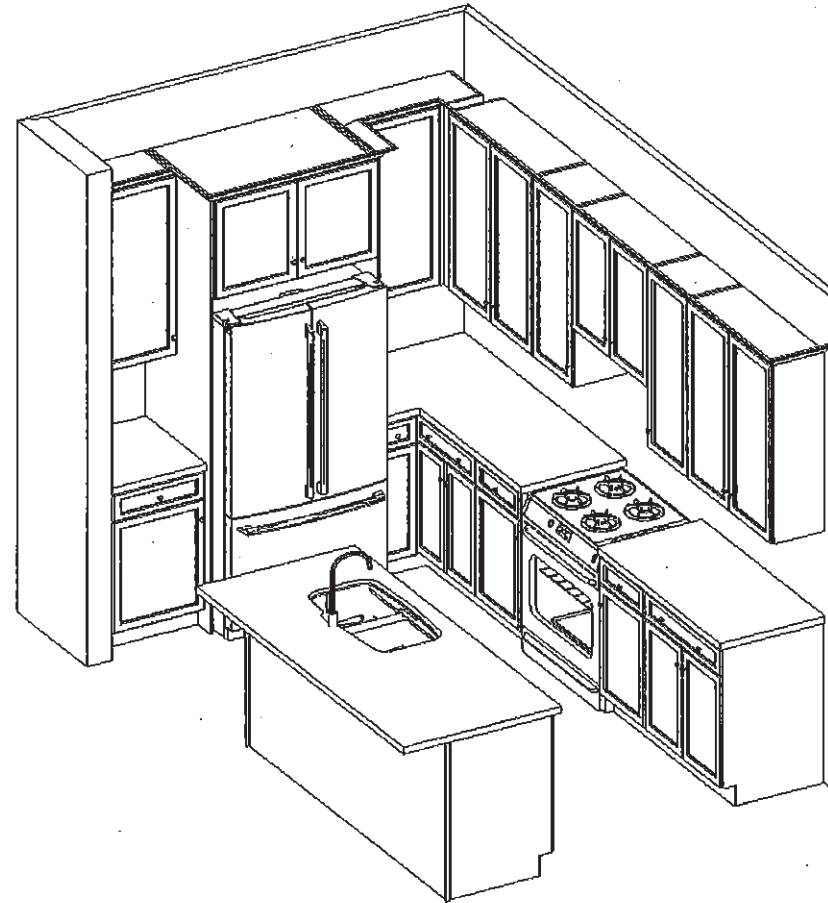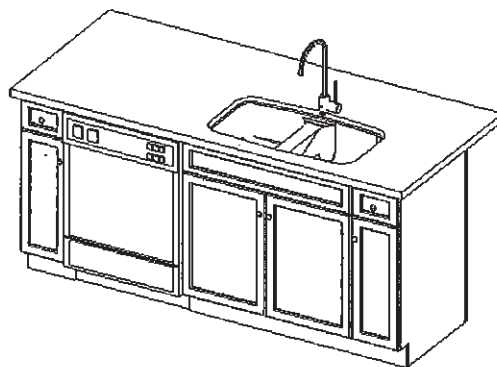

FRENDEL
KITCHENS LIMITED

1350 Shawson Drive, Mississauga, ON L4W 1C5

HEATHWOOD HOMES COUNTRY LANE, WHITBY MODEL: 20-2505 (2005)

STANDARD CONTRACT INCLUDES:

Appliance Openings

- Hood Opening: 30"W builder hood
- Fridge Opening: 37 3/8 "W X 73 3/8"
- Fridge cabinet: 30cm deep
- Stove Opening: 30" Freestanding
- Dishwasher Opening: 24"

Standard Kitchens Scope:

- 100cm H wall cabinets
- Std. Blum Hinges- **not soft close**
- Std. Metabox Drawers- **not soft close**
- Min 40cm W drawer
- Backing on all cabinets
- Countertop by others
- Upgrade applied paneled fridge & dishwashers supply only (appliance hardware by others)

Classic Collection ✓ P.V

Optional Upgrade to Includes:

- Top Drawer Construction (In lieu of Standard bank of drawers)
- Tandem Box **Soft Close Drawers**
- Blumotion **Soft Close Hinges for Doors**
- Crown Moulding
- Deep Fridge Upper w/Deep Panel
- Tall upper Cabinets

6/28/2021

THIS DRAWING IS FOR DESIGN PURPOSES ONLY.
IT IS NOT AN EXACT RENDITION.


C2- COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

14 of 37

Sketch #5 The Worthington

20-2505 CRN ELEV. A


ELEVATION A: 2,505 SQ. FT

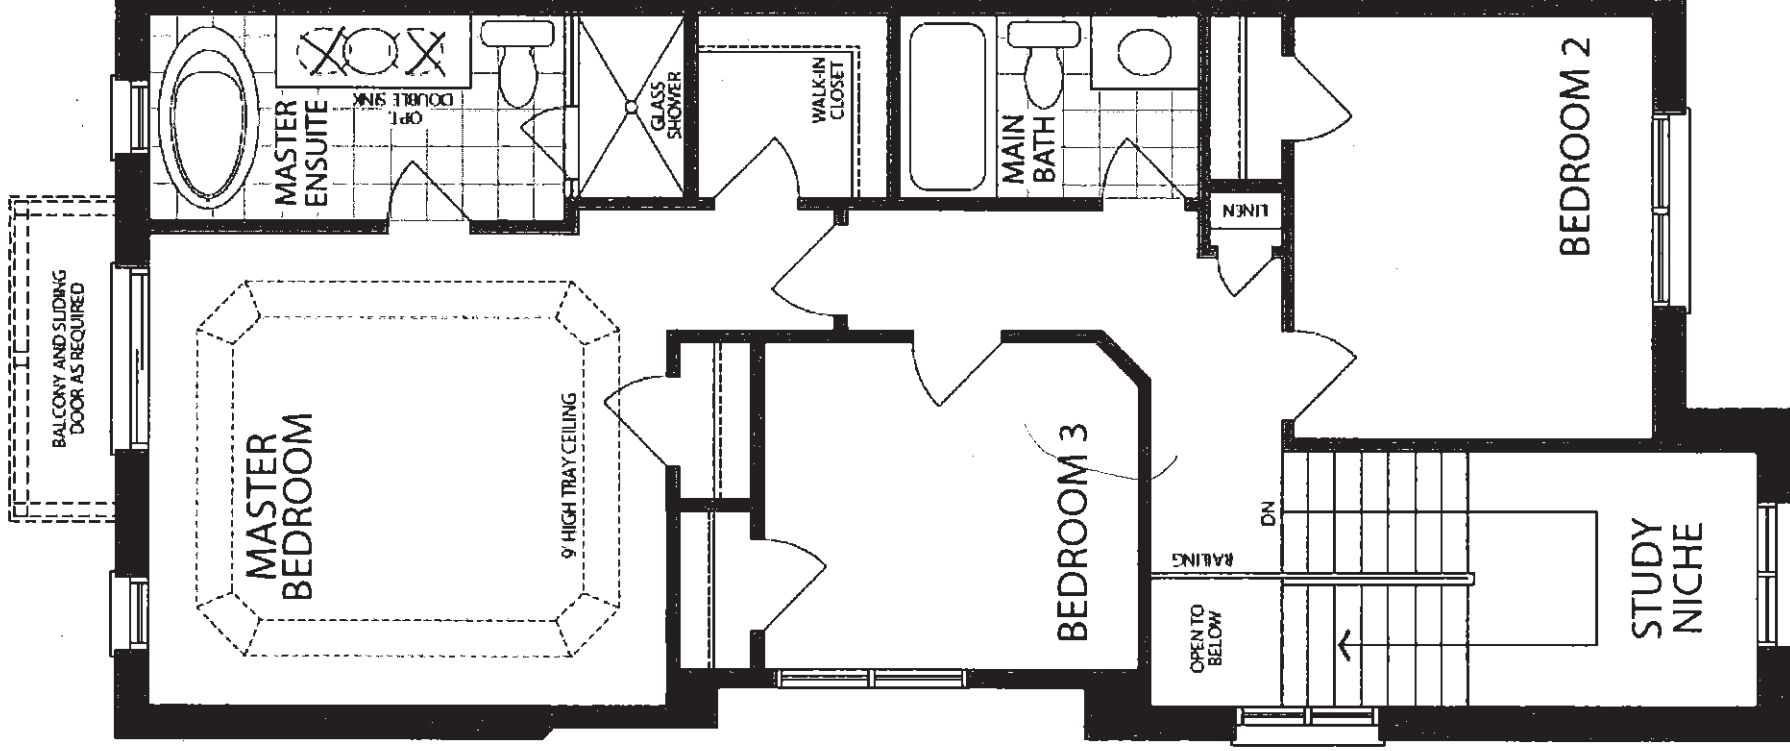

UPPER LEVEL
ELEVATION A

C2- COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

15 of 37

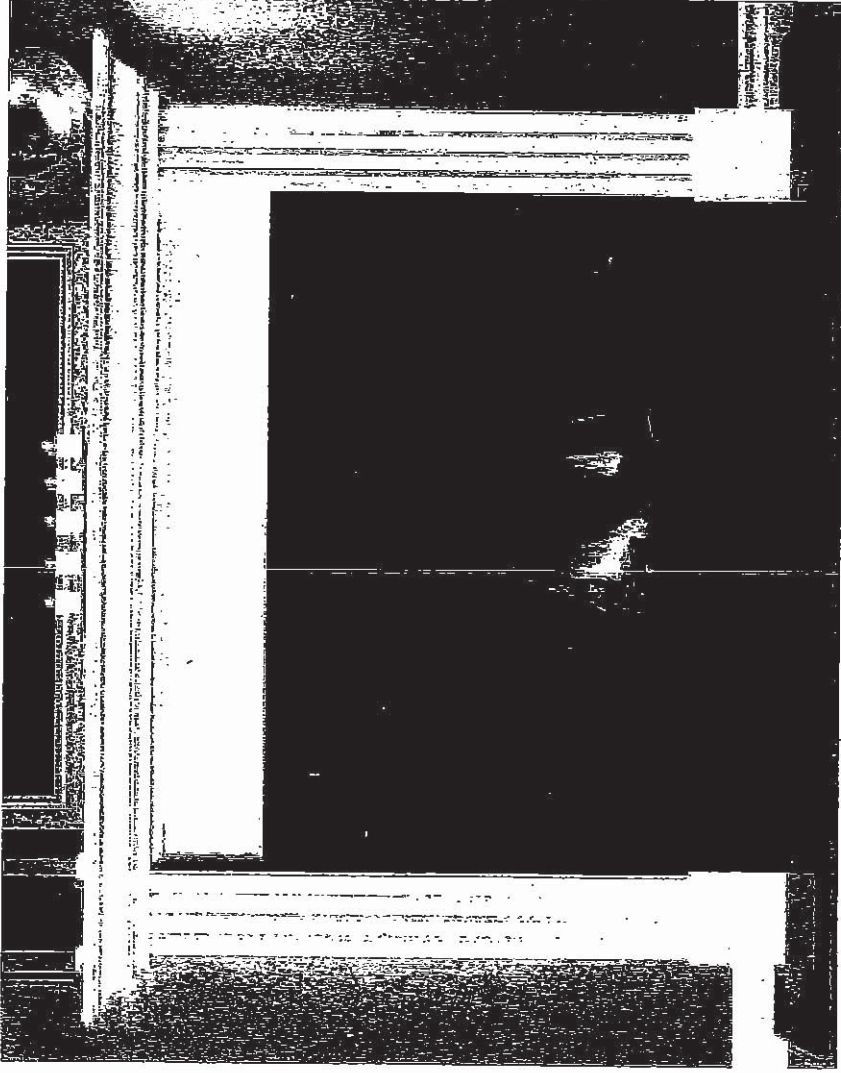


CABINET

STANDARD NF 15 Mantel

Clean apron finish with fluted legs

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

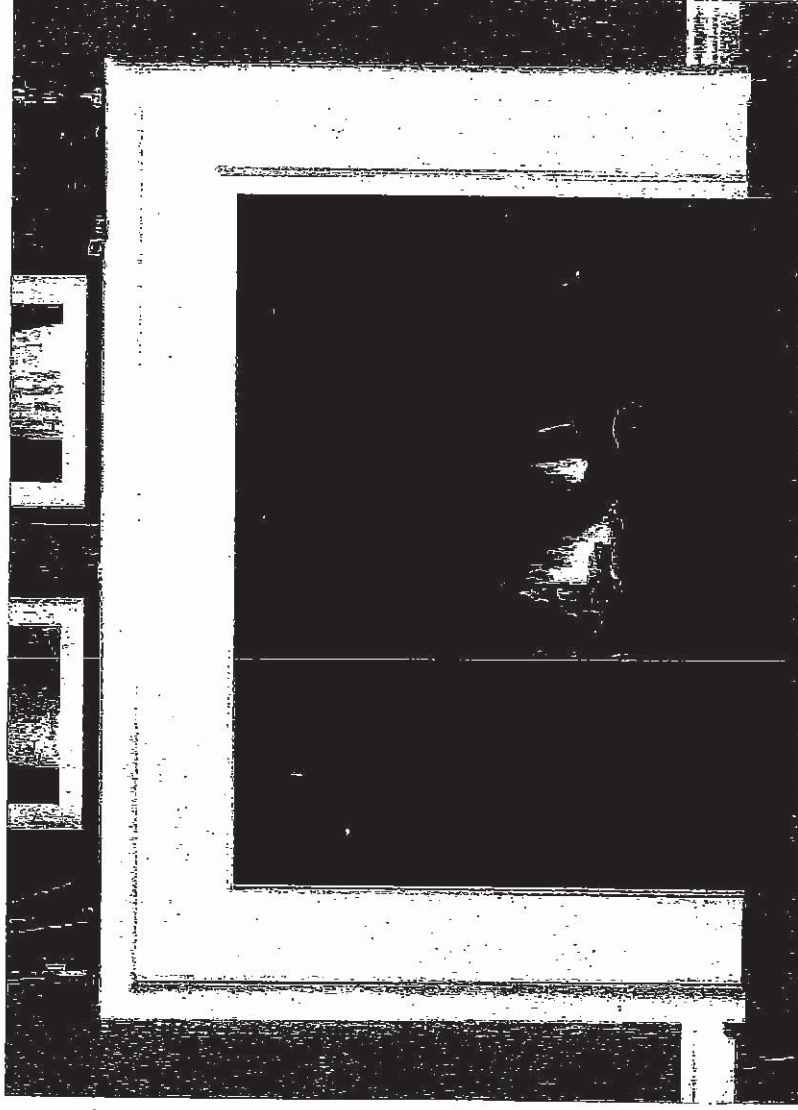

STANDARD NF 17 Mantel


C2-COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

16 of 37


Reginox

STANDARD KITCHEN SINK

ND1831UA/9

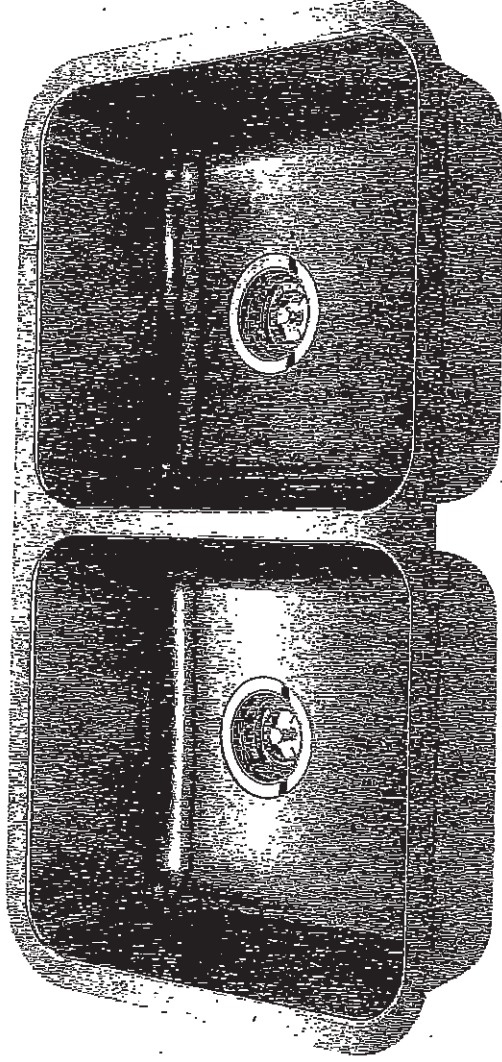

Optional Accessories

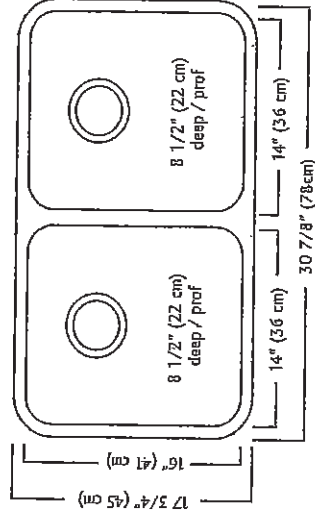

ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited
P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

P.V


C2- COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

17 of 37

STANDARD KITCHEN FAUCET

Align

Modern

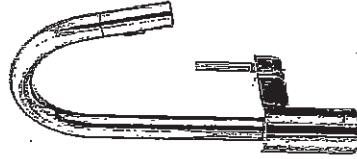

Single Handle Pull-Down Kitchen
Faucet*

Model 7565†

PV



BOULEVARD®
PEDESTAL SINK
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (illustrated).
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toller®
 - Bash has flat bottom to also allow use as an above-counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep


Compliance Certifications *

Meets or Exceeds the Following Specifications:
• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trep:
- ☐ Nipple:

* See faucet section for additional models available

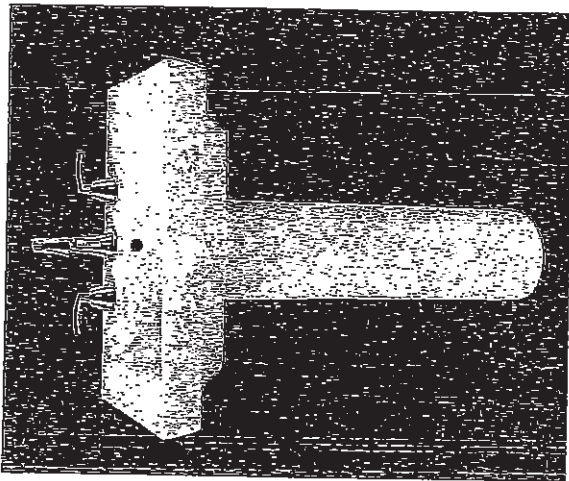

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

COLONY COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

- ☒ 0346 803
Faucet holes on 203mm (8") centres
- ☐ 0346 403 (Illustrated)
Faucet holes on 102mm (4") centres
- ☐ 0346 001
Centre hole only




Nominal Dimensions:
521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:
422mm (16-5/8") wide; 279mm (11") front to
back; 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS –
Meets or exceeds the following Specifications:
• ASME A112.19.2M for Vitreous China Fixtures.
• CAN/CSA B45 Series.

To Be Specified			
☐ Colour:	☒ White	☐ Bone	☐ Silver Gray
	☐ Linen		
☐ Faucet*:			
☐ Faucet Finish:			
☐ Supplies & Stops:			
☐ Trap 1-1/4" (32 mm):			

* See faucet section for additional models available

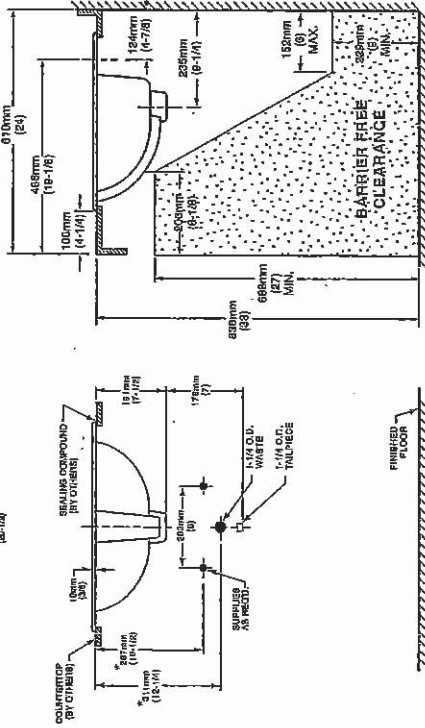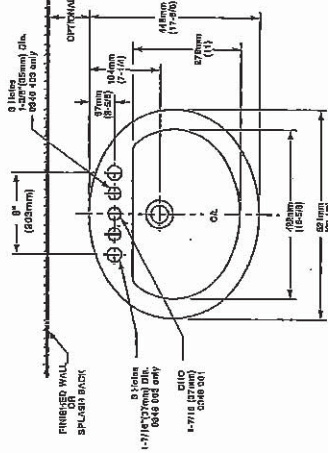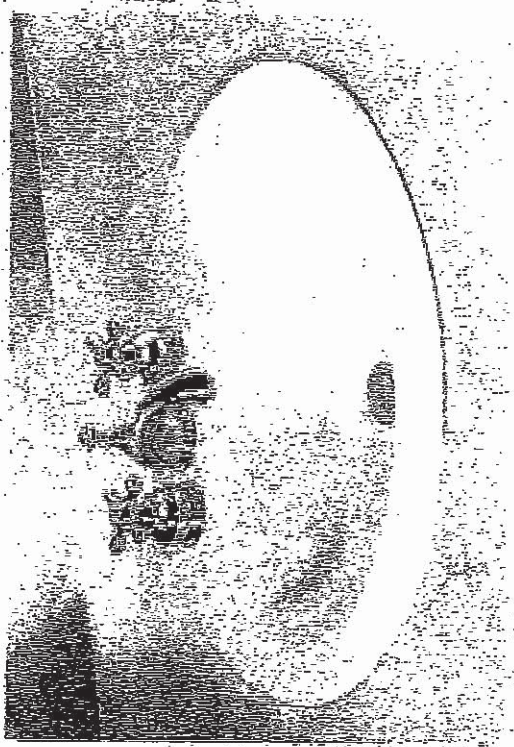


NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND *P* TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use
of superseded or voided pages.

P.V

C2- COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

20^{of} 37

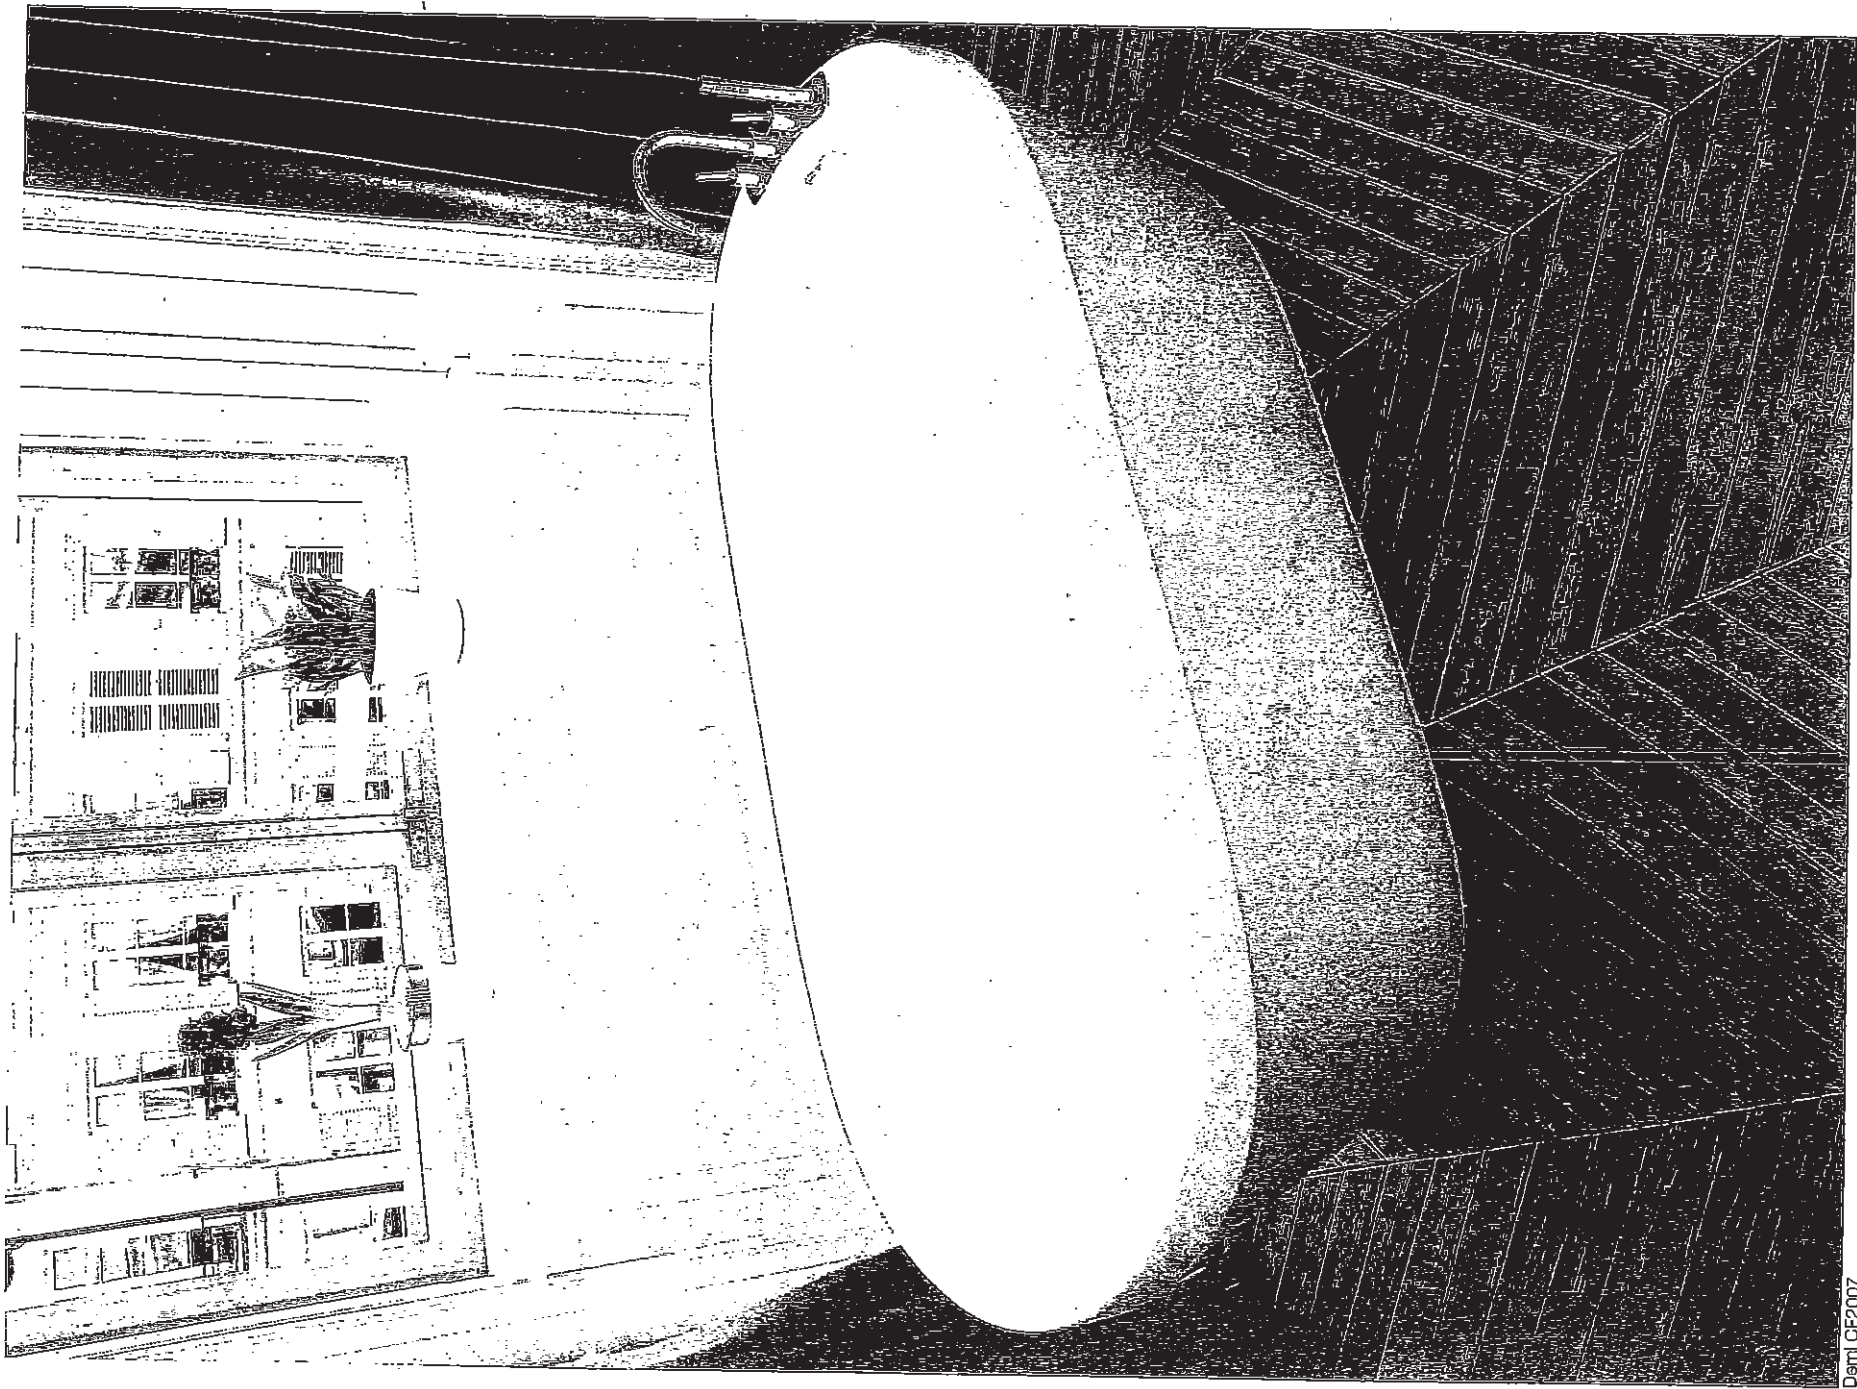

Demi CF2007


PV

C2-COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

21 of 37


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621+

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183+


OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP+

(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS

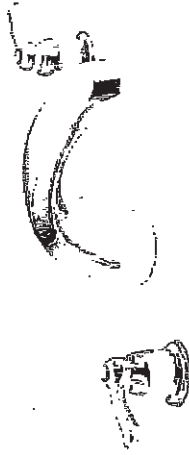

2 Handle Roman Tub with 9" Spout
Model 4796 / T990+

FREESTANDING TUB FAUCETS


21

C2 COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON


22 of 37

SC(B)519 | ALITO Collection

Cyclone[®]
Breathe Better

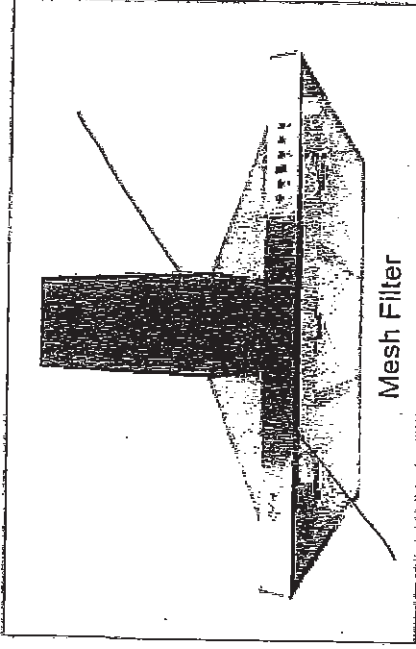

Mesh Filter

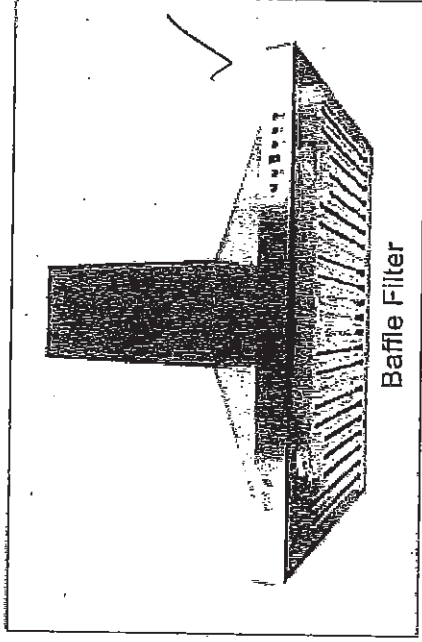

Baffle Filter

Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)519 is fitted with a time-delay OFF feature up to nine minutes, a 550 CFM fan, two bright front mounted LED lights and a digital three-speed push button control panel.

Green Features



3 Speed Push Button
Control Panel




Long-Lasting
LED Lights



Time-Delay
OFF Feature



Grease Cup

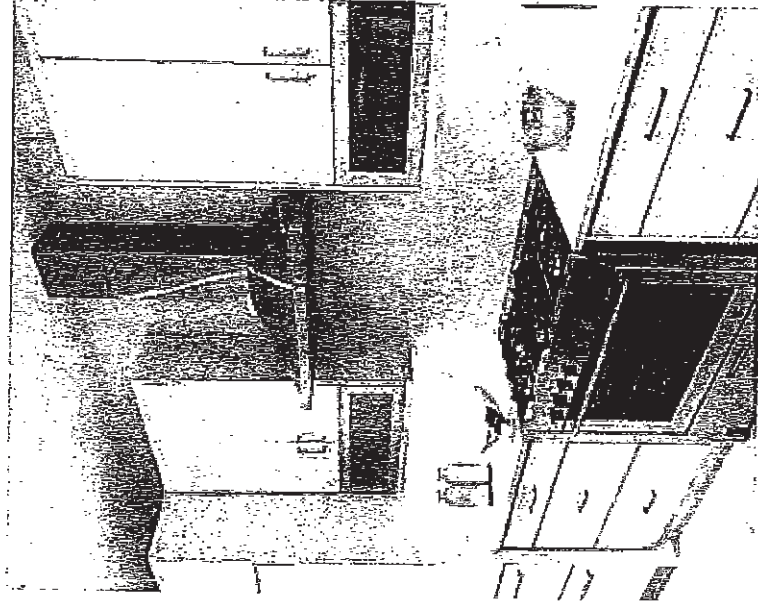

Model	Colour	Ducting	Filters	Size	CFM
SC51924	Stainless Steel	6"	Mesh	24"	550
SC51930	Stainless Steel	6"	Mesh	30"	550
SC51936	Stainless Steel	6"	Mesh	36"	550
SCB51924	Stainless Steel	6"	Baffle	24"	550
SCB51930	Stainless Steel	6"	Baffle	30"	550
SCB51936	Stainless Steel	6"	Baffle	36"	550

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16, Toronto, ON, M1S 3J1, Canada,
Toll Free. 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com

C2 COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON


23 of 37

SC(B)519 | ALITO Collection

Cyclone[®]
Breathe Better.


Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release aluminum mesh filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minutes time-delay OFF feature
- Plug-in connection

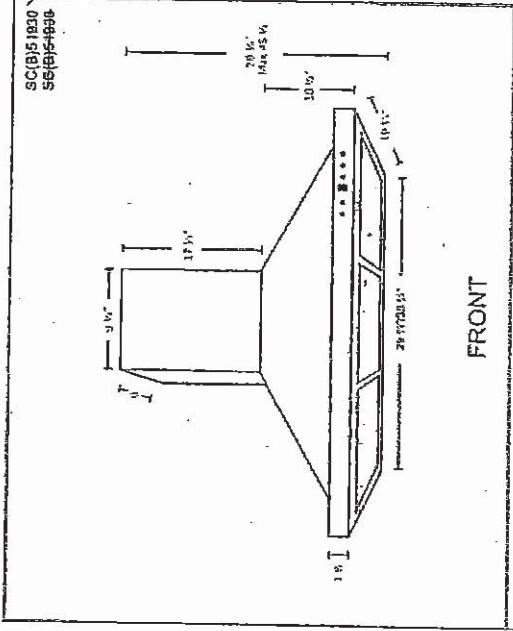

Options

- Filters:
 - SC519 - Quick Release Aluminum Mesh Filters
 - SCB519 - Quick Release Stainless Steel Baffle Filters**
- Chimney Flues:
 - A1.CH10 - short (7'-8' ceilings)
 - A1.CH18 - standard (8'-9' ceilings)
 - A1.CH30 - extended (9'-11' ceilings)
- Widths: 24", 30", 36"

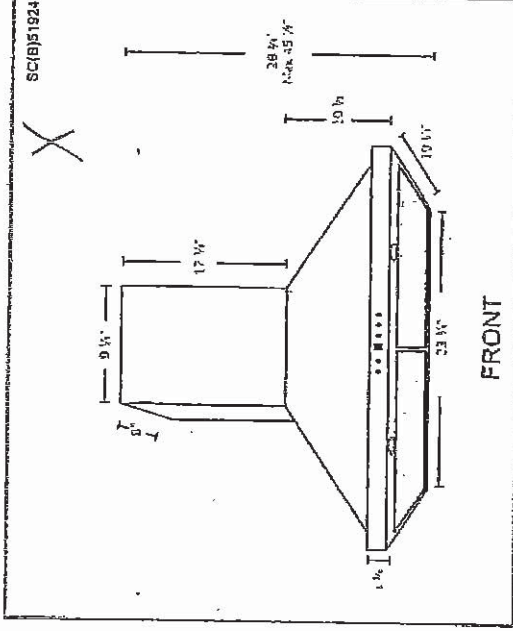

Specifications

- Air Flow Volume: 550 CFM
- Electrical Connection: 120 V/60 Hz
- Power Consumption: 300 Watts

- Current: 2.5 Amps
- Fan Speed: 1599 RPM
- Fan Type: Centrifugal Blower

- Finishes: Stainless Steel
- Ducting: 6" Round
- Noise Level: Min. 2 Sones

Max. 6 Sones



Toronto • Vancouver • Boston
www.CycloneRangeHoods.com

C2-COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

24 of 37

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

- WRT311FZD
- WRT511SZD
- WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

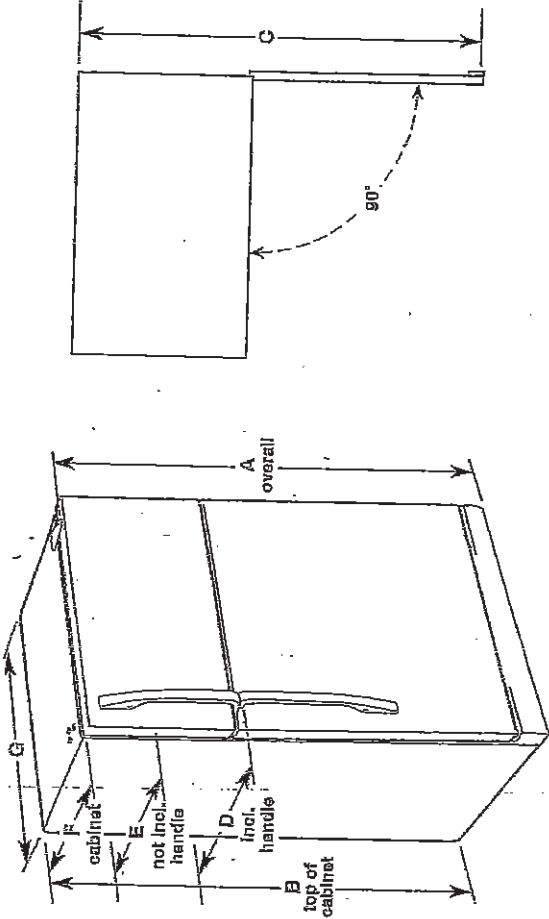

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	32 1/4" (83.5 cm)	30 5/8" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/4" (82.3 cm)	28 1/4" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

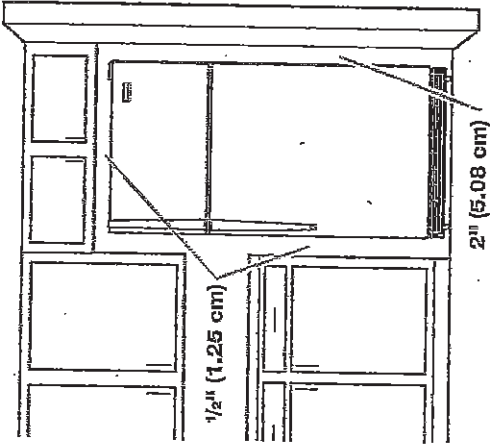

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.





Ref. W10674106
10/29/14

8.0

C2- COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

25 of 37

Refrigerator Door Swing Verification

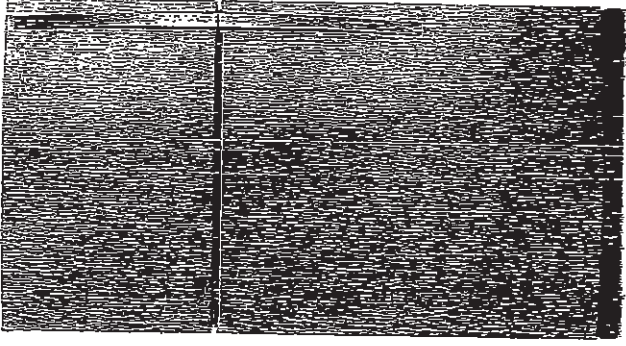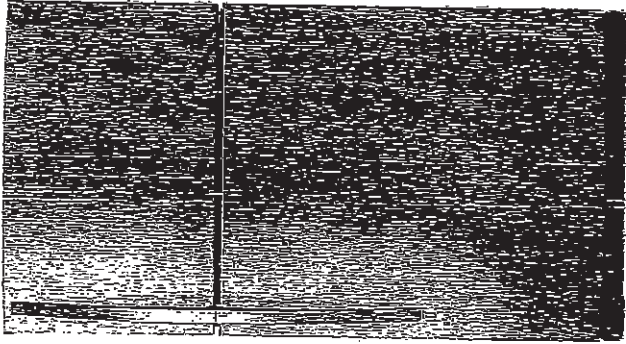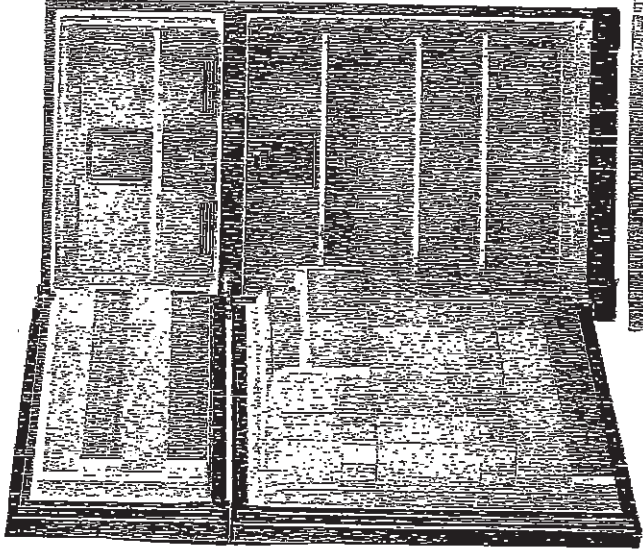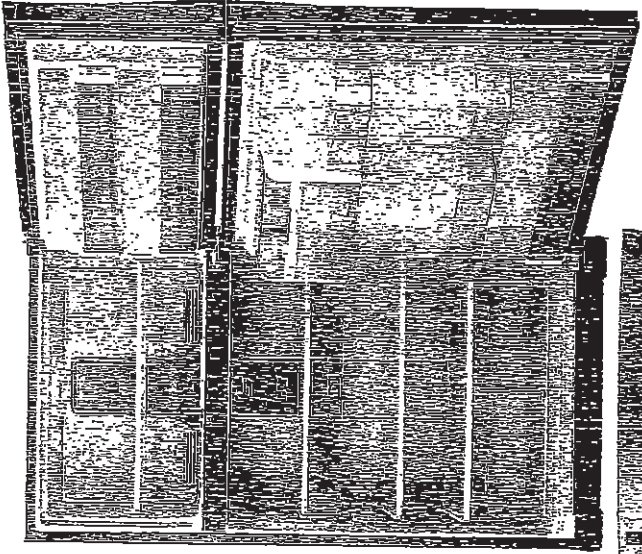

When facing the refrigerator

☒

RIGHT HAND
DOOR OPENING

- Hinges on right
- Handle on left

INITIAL

mf

☐

LEFT HAND
DOOR OPENING

- Hinges on left
- Handle on right

INITIAL

GARAGE LEFT

Please check and INITIAL your door swing selection.

PV

C2-COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

26 of 37


WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

5.3 cu. ft. Whirlpool® electric range with Frozen
Bake™ technology

YWFE515S0JS

Whirlpool®

Home > Kitchen Appliances > Cooking Appliances > Ranges > Single Oven Ranges > YWFE515S0JS

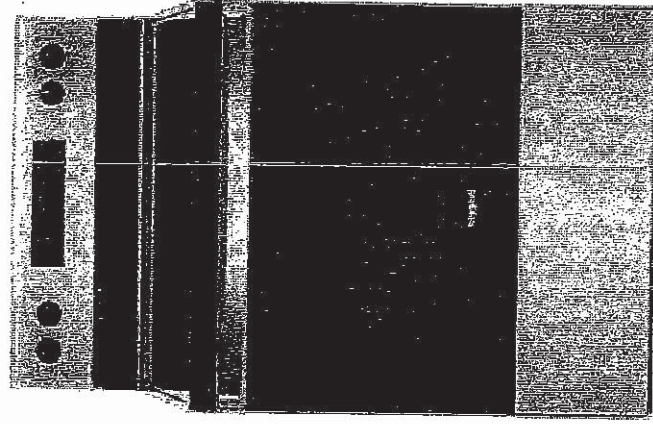


9/1

C2-COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

27 of 37

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions

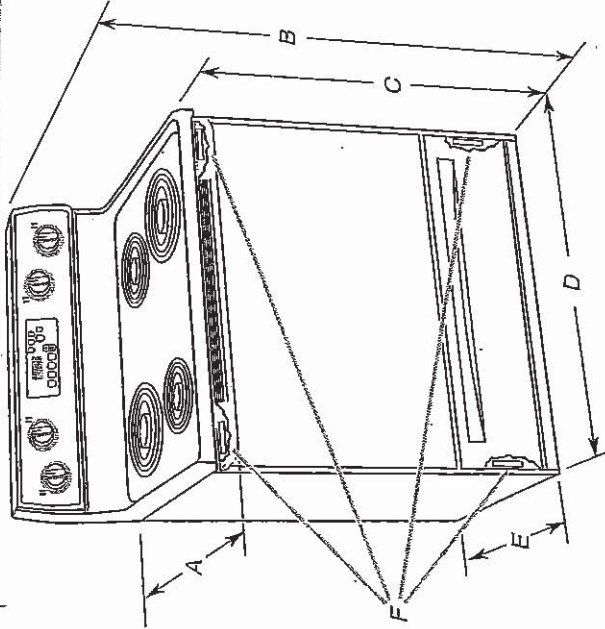

- A. 27³/₄" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₈" (75.9 cm) width
- E. 25⁵/₁₆" (64.3 cm) depth - back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

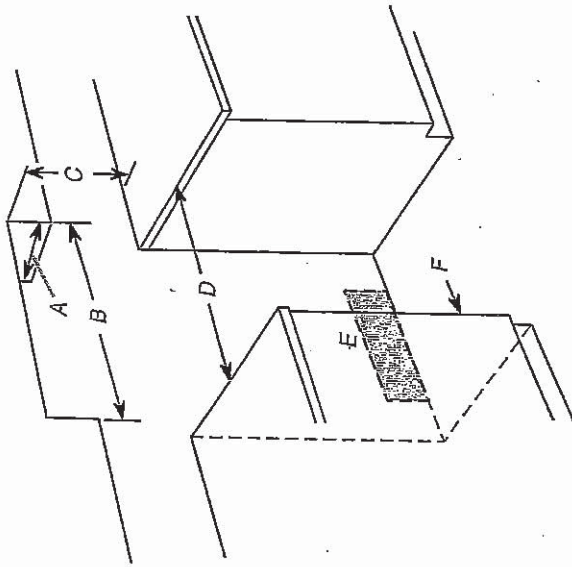

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

9.V
Jan 28/20

C2- COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

28 of 37

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Install Anti-Tip Bracket


! WARNING



Tip Over Hazard

A child or adult can tip the range and be killed.
Install anti-tip bracket to floor or wall per installation instructions.
Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.
Re-engage anti-tip bracket if range is moved.
Do not operate range without anti-tip bracket installed and engaged.
Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warning drawer.
2. Determine which mounting method to use: floor or wall.
If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/₁₆" (31.9 cm) from centerline as shown.

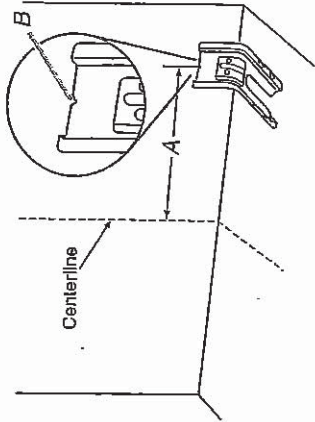


A. 12⁹/₁₆" (31.9 cm)
B. Bracket V-notch


4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting

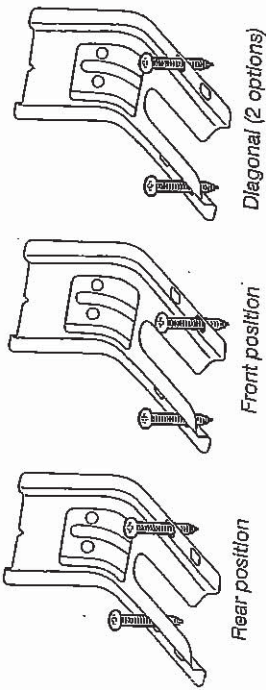

Wall Mounting



5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1⁵/₈" (4.1 cm) screws provided.
 6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
 7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.
- 
8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

C2-COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

29 of 37

With Pool Dishwasher With ENERGY STAR® Qualification





WDF310PAAS
Black-on-Stainless


OTHER AVAILABLE COLORS

Black
Model: WDF310PAAB

Black-on-Biscuit
Model: WDF310PAAT

White
Model: WDF310PAAW

Universal Silver
Model: WDF310PAAD

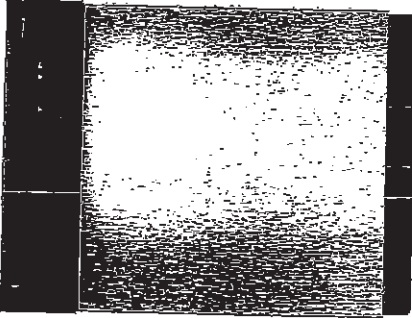

KEY FEATURES:

ENERGY STAR® Qualified
No One Has Fewer Repairs 17 Years In A Row
Resource - Efficient Wash System
CEE Tier 1 qualified
Tail Tub Design
White Plastic Interior
Quiet Partner(TM) | Sound Package
Auto Soil Sensor
Electronic Controls
3 Automatic Cycles
1-Hour Wash Cycle
Heavy Wash Cycle
Normal Cycle
4 Options
High Temperature Wash System
Heated Dry Option
4 Hour Delay Wash Option
4-Tier SheerClear® Direct Feed Wash System
Control Lock
Vinyl Racks
In-Rack Silverware Basket

DIMENSIONS

Maximum Height	34 1/2 Inches
Minimum Height	33 1/2 Inches
Height	34 1/2 Inches
Depth	24 1/2 Inches
Width	23 7/8 Inches

Dimensions shown are for planning purposes only. For complete information, see installation instructions packaged with product.

ELECTRICAL

15 Amps Amps, 60 Hz, 120 V, 16.

Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.

P.V.

C2-COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

30 of 37

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB
WDF111PAB
WDF120PAF
WDF121PAF
WDF310PCA

WDE310PLA
WDF320PAD
WDF670PAP
WDF670PAP
WDF670PAP
WDF670PAP

WDF630PSY
WDF640PAD
WDF730PAY
WDF710PAY
WDF720PAD
WDF770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use

with dishwashers. Follow the kit

instructions for installing the power supply cord.

Power supply cord must plug into a grounded

3 prong, outlet, located in the cabinet next to

the dishwasher opening. Outlet must meet all

local codes and ordinances.

Water Supply Requirements: A hot water line with 20 to

120 psi (138 to 862 kPa) water pressure. Water temperature

must be 120°F (49°C) water at dishwasher. Use 3/8" O.D.

copper tubing with compression fitting or flexible braided

water supply line (1/2" minimum plastic tubing is not

recommended). Use a 90° elbow with 3/4"N.P.T. external

pipe threads on one end. Do not solder within 6" (15.2 cm)

from water inlet valve.

Drain Requirements: A new drain hose is supplied with

your dishwasher. If this is not long enough, use a new

drain hose with a maximum length of 12' (3.7 m) (Part

No. 3385556) that meets all current AHAM/JAPMO test

standards, is resistant to heat and detergent, and fits the

1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or

disposer inlet above drain trap in house plumbing and

20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be

looped up and securely

fastened to the underside of

the counter or be connected

to an air gap.

Make sure to use an air

gap if the drain hose is

connected to house

plumbing lower than 20"

(50.8 cm) above subfloor

or floor.


Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance


with the air gap installation instructions. When connecting

the air gap, a rubber hose (not provided) will be needed

to connect to the waste tee or disposer inlet.



PRODUCT DIMENSIONS

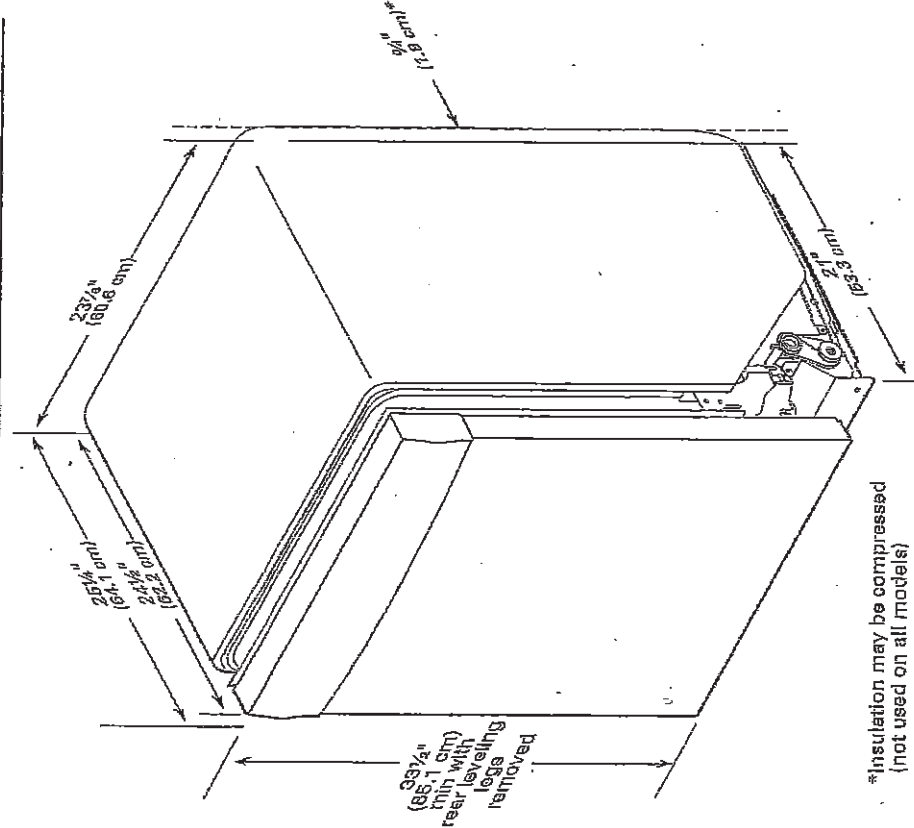

*Insulation may be compressed
(not used on all models)

QV

C2-COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

31 of 37


CABINET CUTOUT DIMENSIONS

WDF320PAB

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

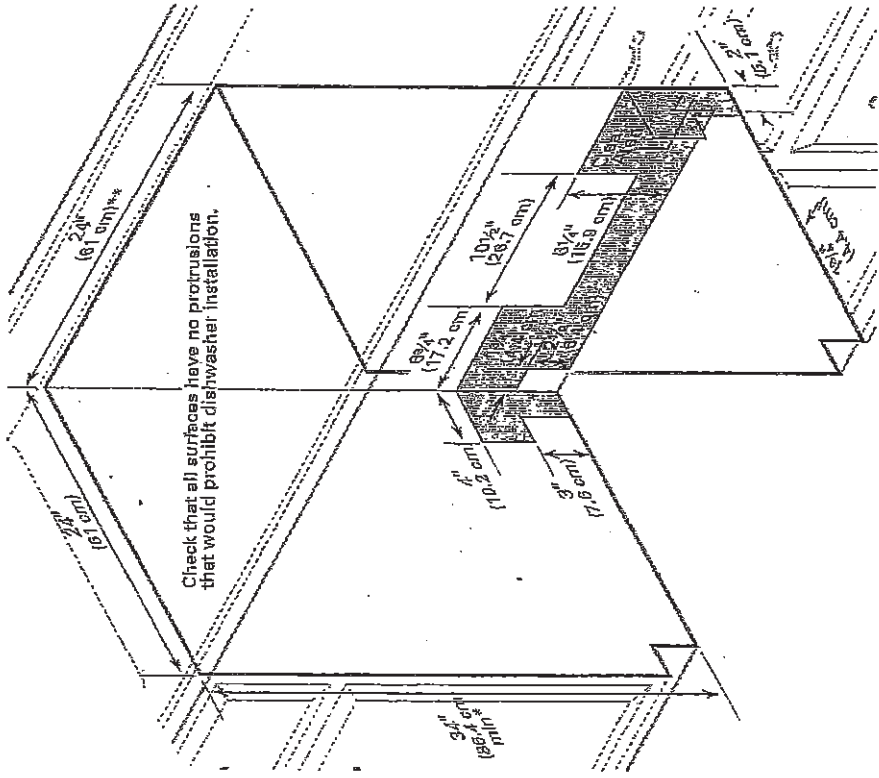


P.V

C2-COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

32 of 37

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Grand Care™ English | Washer and Dryer | Washer | Front Load Washer | WFW5620HW

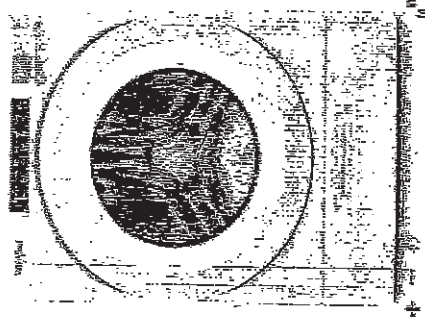

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	60.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	60.50 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

P.V

C2-COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

33 of 37

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS


Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).


IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models* ✓


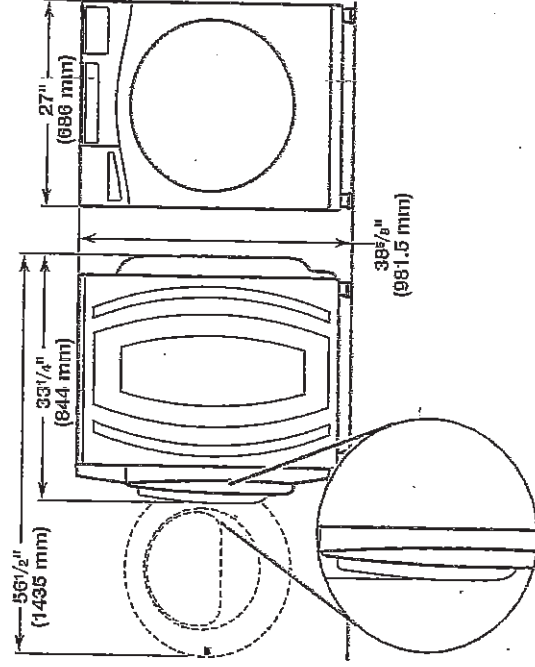


All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

✗
Recessed area or closet installation (stacked washer and dryer):

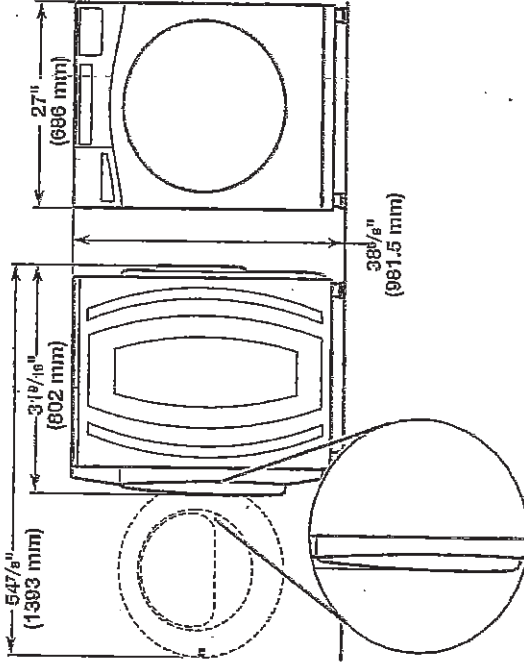

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

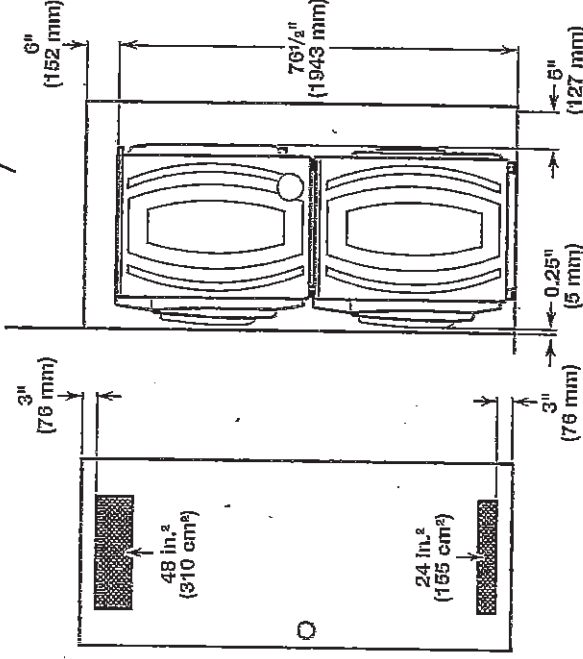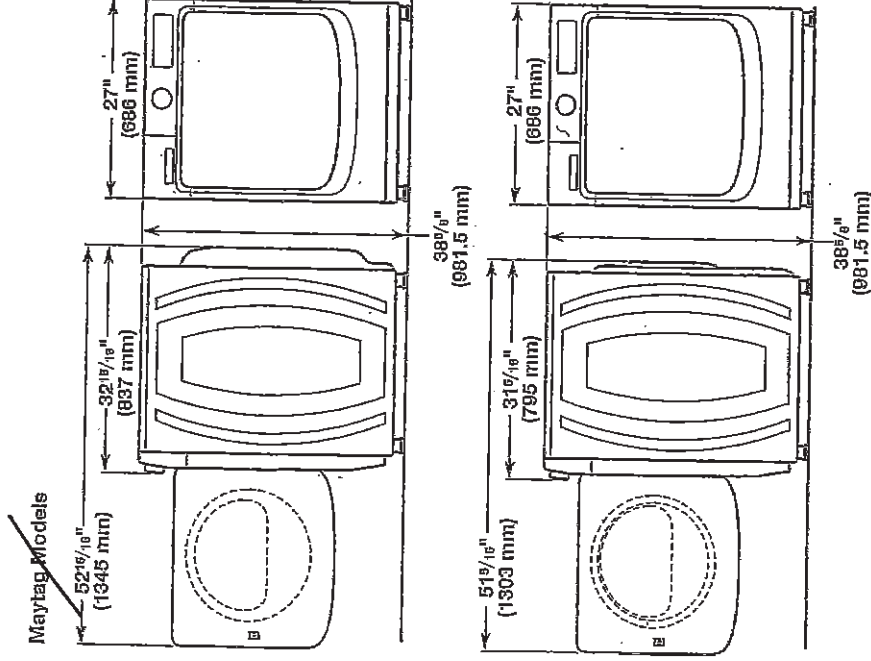


92V

C2-COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON


34 of 37

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation: X

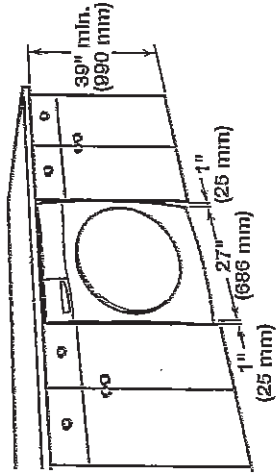

Recessed area or closet installation: X

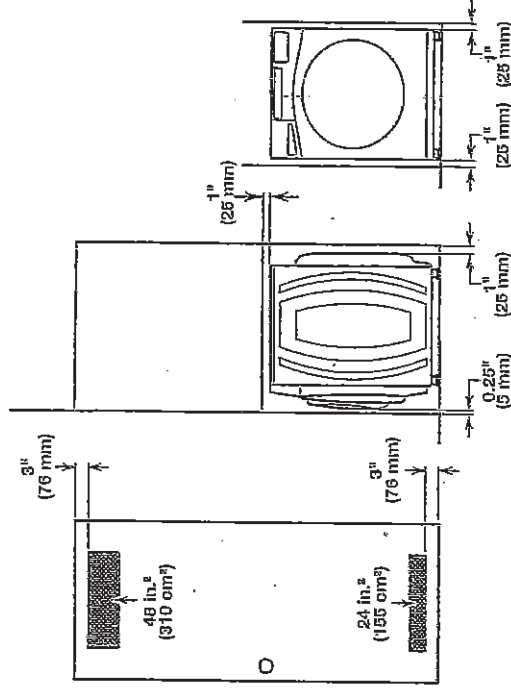

Custom cabinet installation: X

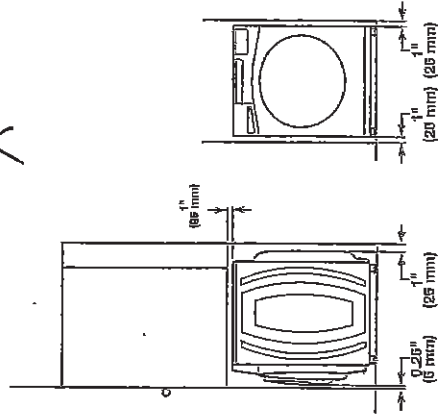


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

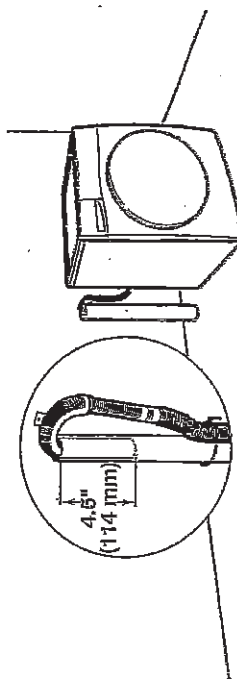


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

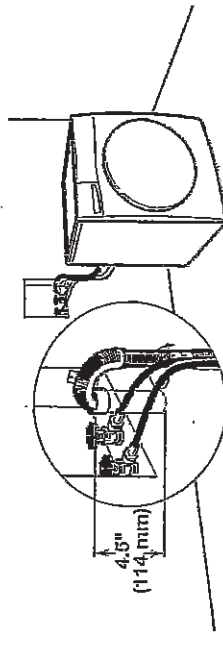

See requirements for floor standpipe drain system.

Laundry tub drain system

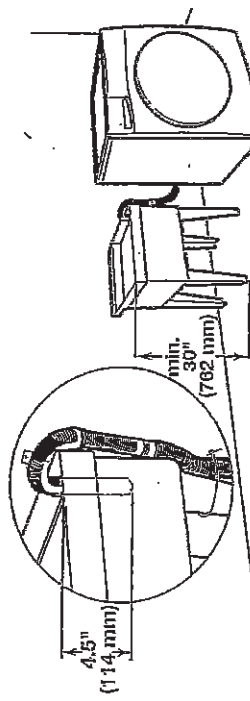

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


P.V.

C2-COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

35 of 37

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryer | Dryer | Electric Dryer | YWED5620HW

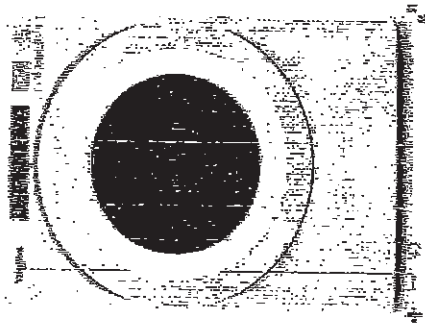

Define
Your Style
with Color

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	76.74 cm, 30.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-9/16 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Lint Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60
Power Cord Included	Yes


P.V

C2-COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

36 of 37

WHIRLPOOL DRYER Model #: YWED56201HW

Back view:

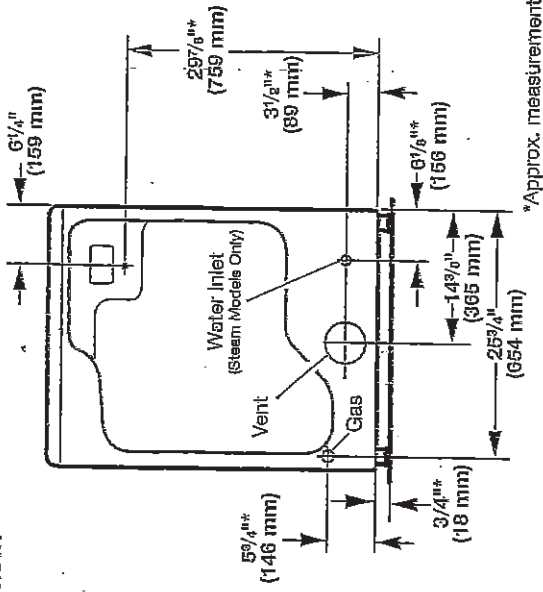

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

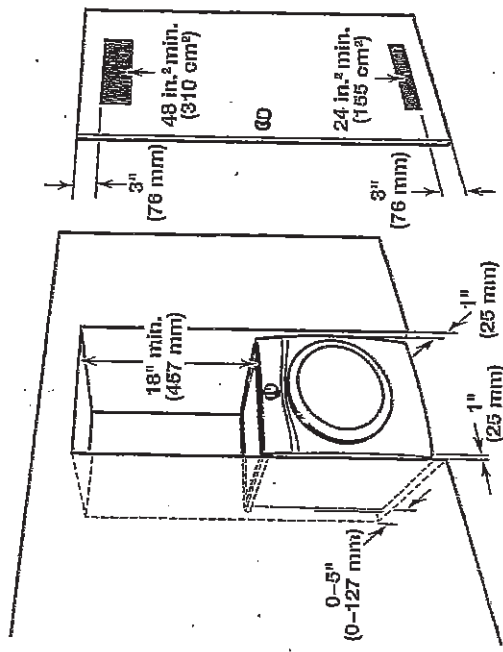

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

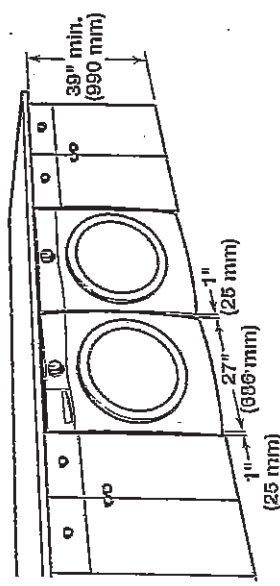

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH-1.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

2.1

C2-COUNTRY LANE
LOT 54-6
20-2505 CR ELEV A
THE WORTHINGTON

37 of 37

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.


Place dryer at least 18 inches (460 mm) above the floor for a garage installation.

Failure to do so can result in death, explosion, or fire.


You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
 - A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
 - If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
 - Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
 - Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
 - Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
 - For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
 - The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.
- IMPORTANT:** Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS
Front view:

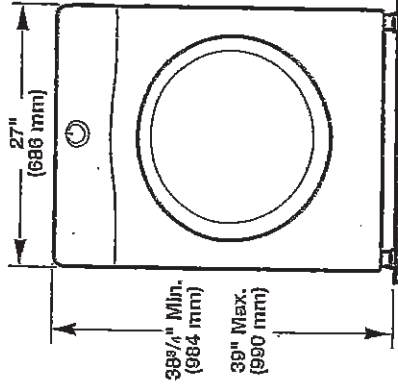

Side view:
Whirlpool Models

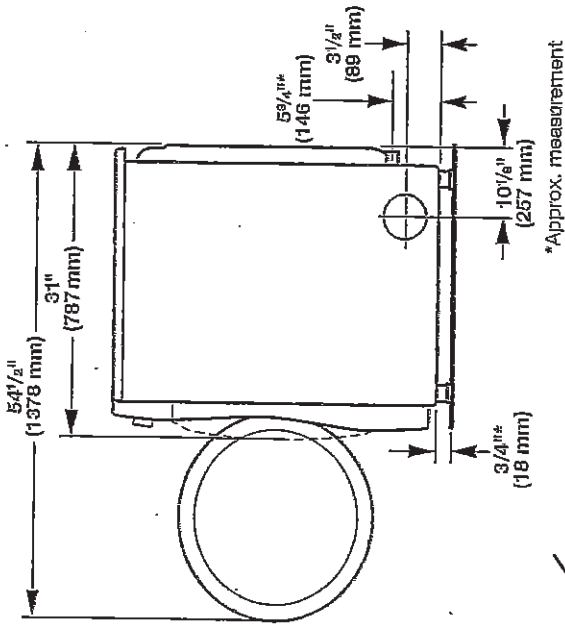

Maytag Models

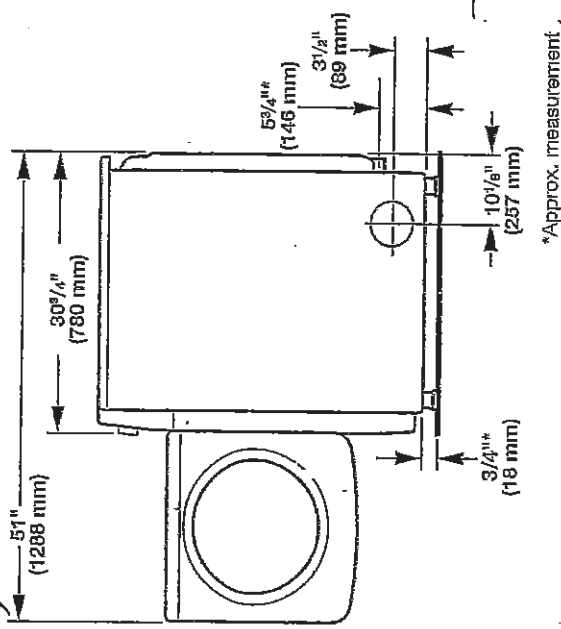

*Approx. measurement.

8.1V