



26-Aug-21

PRE-Sales Selection Sheet
CHECKLIST

7 of 44

LOT 002-1 * REUSED * 20-2505-CR ELEV B THE LAUREL

PURCHASERS: JOHANA KITA CONTACT NO: 416-476-5171

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

OPTIONAL DOUBLE SINKS IN MASTER ENSUITE BATHROOM *

- ☐ FINISHED BASEMENT
- ☐ COLD CELLAR
- UPGRADED / MODIFIED ELEVATION
- ☐ CORNER UPGRADE
- ☐ SIDE UPGRADE
- ☐ REAR UPGRADE
- CEILING UPGRADE - SMOOTH
- ☒ MAIN FLOOR *
- ☐ SECOND FLOOR
- ADDITIONAL ROUGH-INS
- ☒ 200 AMP SERVICE
- ☐ WET BAR ROUGH IN
- GAS ROUGH-IN
- ☐ STOVE
- ☒ BBQ *
- HOODFAN VENTING
- ☒ 6" ROUND DUCT *
- ☐ 7" ROUND DUCT
- ☐ WALK OUT DECK
- ☐ WALK OUT BASEMENT
- ☐ BASEMENT
- ☐ HUMIDIFIER
- ☒ AIRCON
- ☐ DRYER
- ☐ ADDITIONAL FIREPLACE

FULL BASEMENT STAIRS: PAINT GRADE

UPPER BASEMENT STAIRS: N/A

LOWER BASEMENT STAIRS: N/A

STAIRS TO LOWER LEVEL: ALL OAK

STAIRS TO UPPER LEVEL: N/A

MAIN STAIRS: ALL OAK

MEDIA STAIRS (if applicable): N/A

Aug 26/21 Signature on file Aug 26/21 Sonia Sharif

Date Purchaser Date Décor Consultant

- APPROVED -

Date Purchaser

Date Approved Heathwood Homes (UpCountry) Limited



26-Aug-21

Interior Finishing Selection Sheet

LOT 002-1

20-2505-CR ELEV B THE LAUREL

PURCHASERS: JOHANA KITA

CONTACT NO: 416-476-5171

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Appliances

6-4 Kitchen HoodFan

☒ Whirlpool Over-The-Range Microwave Hood Combination
STAINLESS STEEL YWMH31017AS 30" PAGES 27-30

Cabinetry

1-9166 Kitchen Cabinet Colour/Style

☐ CHARLESTON ORCHID Viking III STD 3DL KITCHEN CABINETS

1-9168 Kitchen Cabinet Colour/Style

☒ CHARLESTON MOONLIGHT Viking III STD 3DL KITCHEN ISLAND

3-2086 Kitchen Cabinet Hardware

☐ HARDWARE 9677 STD

25-9156 Main Bathroom Cabinet Colour/Style

☐ SIMCOE RAIN CLOUD Viking III STD 3DL

29-2080 Main Bathroom Cabinet Hardware

☐ HARDWARE 113B STD

28-8827 Main Bathroom Countertop

☐ Countertop CALCUTTA MARBLE 4925K-07 Wilsonart

20-9169 Master Ensuite Cabinet Colour/Style

☐ CHARLESTON NAVY BLUE Viking III STD 3DL

22-2080 Master Ensuite Cabinet Hardware

☐ HARDWARE 113B STD

21-8827 Master Ensuite Countertop

☐ Countertop CALCUTTA MARBLE 4925K-07 Wilsonart

Carpet

37-9245 Bedroom 2 Flooring

☐ Dynasty Tex 40 oz Poly OVERCAST DY 87354 STD

38-9245 Bedroom 3 Flooring

☐ Dynasty Tex 40 oz Poly OVERCAST DY 87354 STD

14-9245 Family Room Flooring

☐ Dynasty Tex 40 oz Poly OVERCAST DY 87354 STD

367-9245 Lower Level Hall Flooring

☐ Dynasty Tex 40 oz Poly OVERCAST DY 87354 STD

36-9245 Master Bedroom Flooring

☐ Dynasty Tex 40 oz Poly OVERCAST DY 87354 STD

52-1078 Throughout Underpad

☐ Underpad STD

Ceramics

16-9255 Foyer Flooring

☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13"

17-2225 Foyer Grout

☐ Grout (27) Silver STD

348-9257 Laundry Mud Room Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

349-2225 Laundry Mud Room Grout

☐ Grout (27) Silver STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 26/21 Signature *ow*
Date Purchaser *file*

Aug 26/21
Date APPROVED
Date

Décor Consultant

Sonia Sitarif

my Rosen

Date Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY)

LIMITED



26-Aug-21

Interior Finishing Selection Sheet

LOT 002-1

20-2505-CR ELEV B THE LAUREL

PURCHASERS: JOHANA KITA

CONTACT NO: 416-476-5171

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Ceramics

UPG

30-9255 Main Bathroom Flooring

☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13"

112-5411 Main Bathroom Wall Tile

☐ Splendour White QT.SP.WHT.0810 Std 8" x 10" TO BE INSTALLED VERTICALLY

113-2225 Main Bathroom Wall Tile Grout

☐ Grout (27) Silver STD

23-9106 Master Ensuite Floor Tile

☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte

24-2225 Master Ensuite Floor Tile Grout

☐ Grout (27) Silver STD

73-8661 Master Ensuite Shower Floor Tile

☐ Ontario Series Mosaic Snow White Matte OD.ON.SWT.0202.MT.N STD 2 x 2

74-2225 Master Ensuite Shower Floor Tile Grout

☐ Grout (27) Silver STD

147-8923 Master Ensuite Shower Jamb(s) and Sill(s)

☐ Shower Jamb / Sill Thassos White STD

104-5411 Master Ensuite Shower Wall Tile

☐ Splendour White QT.SP.WHT.0810 Std 8" x 10"

105-2225 Master Ensuite Shower Wall Tile Grout

☐ Grout (27) Silver STD

32-9255 Powder Room Flooring

☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13"

33-2225 Powder Room Grout

☐ Grout (27) Silver STD

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-9114 Great Room Fireplace Mantle

☐ Paint Grade Mantel- Cabinet (Per Plan) WHITE NF 15 STD
PAGE 20

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-7852 Kitchen Countertop

☒ Quartz-Caesarstone BLIZZARD # 2141 Group 4 UPG 3/4" with Mitered Edge

Hardwood

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 26/21 *Signature on file*
Date Purchaser

Aug 26/21
Date **APPROVED**

Décor Consultant

SANIA SHARIF

Date Purchaser

Date Approved **HEATHWOOD HOMES (UPCOUNTRY) LIMITED**



26-Aug-21

Interior Finishing Selection Sheet

LOT 002-1

20-2505-CR ELEV B THE LAUREL

PURCHASERS: JOHANA KITA

CONTACT NO: 416-476-5171

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Hardwood

UPG

99-9063 Dining Room Flooring

- ☒ White Oak UVF-Vintage Northern Solid Sawn : White Oak :
Sculpted UVF-GOTHAM-3/4 inch x 5 inch GOTHAM White Oak
UVF 3/4" x 5"

11-9063 Great Room Flooring

- ☒ White Oak UVF-Vintage Northern Solid Sawn : White Oak :
Sculpted UVF-GOTHAM-3/4 inch x 5 inch GOTHAM White Oak
UVF 3/4" x 5"

338-9063 Kitchen Flooring

- ☒ White Oak UVF-Vintage Northern Solid Sawn : White Oak :
Sculpted UVF-GOTHAM-3/4 inch x 5 inch GOTHAM White Oak
UVF 3/4" x 5"

98-9063 Main Hall Flooring

- ☒ White Oak UVF-Vintage Northern Solid Sawn : White Oak :
Sculpted UVF-GOTHAM-3/4 inch x 5 inch GOTHAM White Oak
UVF 3/4" x 5"

368-9063 Study Niche Flooring

- ☒ White Oak UVF-Vintage Northern Solid Sawn : White Oak :
Sculpted UVF-GOTHAM-3/4 inch x 5 inch GOTHAM White Oak
UVF 3/4" x 5"

35-9063 Upper Hall Flooring

- ☒ White Oak UVF-Vintage Northern Solid Sawn : White Oak :
Sculpted UVF-GOTHAM-3/4 inch x 5 inch GOTHAM White Oak
UVF 3/4" x 5"

Interior Railings

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

- ☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)
BLACK METAL STD

43-8148 Stairs to Upper Level Handrail/Pickets/Posts Type

- ☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)
BLACK METAL STD

Interior Stairs

116-1714 Basement Stairs Type

- ☐ Carpet Grade Stairs STD

45-1712 Stairs to Lower Level Type

- ☐ Oak Stairs UPG_1

39-1712 Stairs to Upper Level Type

- ☐ Oak Stairs UPG_1

Interior Trim

91-9374 Throughout Trim Size

- ☐ 4 1/4" Baseboards and 2 3/4" Integrated Backband Casings
STD-Towns

Painting

46-7761 Stairs to Lower Level Colour

- ☐ Stain handrail, stringers, treads,risers, nosing & posts. (Metal
pickets) STAIN TO COMPLEMENT GOTHAM HARDWOOD
SHADE WILL VARY FROM FLOORING

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 26/21

Signature on file

Date

Purchaser

Aug 26/21

SONIA SHARIF

APPROVED -
Date

Décor Consultant

M. P. Shaw

Date

Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY)

LIMITED



26-Aug-21

Interior Finishing Selection Sheet

LOT 002-1

20-2505-CR ELEV B THE LAUREL

PURCHASERS: JOHANA KITA

CONTACT NO: 416-476-5171

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Painting

40-7761 Stairs to Upper Level Colour

240-1716 Throughout Trim - Paint Colour

51-1717 Throughout Walls - Paint Colour

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

149-1737 Master Ensuite Plumbing Fixture (colour)

34-1737 Powder Room Plumbing Fixture (Colour)

UPG

☒ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT GOTHAM HARDWOOD
SHADE WILL VARY FROM FLOORING

☐ Trim WHITE STD

☐ Wall WARM GREY 22 STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 26/21		Signature on		Aug 26/21		SONIA SHARIF	
Date	Purchaser	file	Date	APPROVED -	Date	Décor Consultancy	
Date	Purchaser		Date	Approved	Date	HEATHWOOD HOMES (UPCOUNTRY)	LIMITED



10-Aug-21

Sales Selection Sheet
1 of 1

LOT	002-1	20-2505-CR ELEV B THE LAUREL
PURCHASERS: JOHANA KITA		CONTACT NO: 416-476-5171
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED	
		HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances	
794	WHIRLPOOL OTR SS YWMH31017HZ PAGES 27-30
KITCHEN	
Qty:	1
Cabinetry	
767	Optional Upgrade Optional Classic Kitchen (Top Drawers in lieu of Bank of Drawers, Crown Moulding, Deep Fridge Uppers, Soft Close Doors and Soft Close Drawers) VIKING I/II/III SKETCH # 8 PAGE 18
Classic Kitchen	
Qty:	1
406	Optional Extras 19B- 45cm wide pull-out door base cabinet waste/recycle centre with soft-close (12) 35L bins) (available only with 45cm wide cabinet) Viking SHIFT DISHWASHER TO END OF THE CABINET, RELOCATE KITCHEN SINK AND ADD RECYCLE BIN AT END SEE SKETCH 8 PAGE 18
KITCHEN	
Qty:	1
456	Optional Extras 40J- Two-tone colour/style selection for island (must be of equal or lower level to main selection) Viking SKETCH # 8 PAGE 18
KITCHEN	
Qty:	1
Ceramics	
840	Upgrade 1 Tile
M. Ensuite Floor	
Qty:	1
Drywall	
736	Ceiling Upgrades Smooth Ceilings Main Floor
MAIN FLOOR	
Qty:	1

Electrical

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug. 10, 2021	Aug. 10, 2021	Saint
Date	Date	Décor Consultant
Purchaser		
Aug. 10, 2021	Aug. 12, 2021	m. Lozen
Date	Date	

Date Approved: ~~HEATHWOOD HOMES (UPCOUNTRY)~~ LIMITED



10-Aug-21

Sales Selection Sheet
2 of 4

LOT 002-1

20-2505-CR ELEV B THE LAUREL

PURCHASERS: JOHANA KITA

CONTACT NO: 416-476-5171

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

286 Optional Extras GREAT ROOM
Ceiling rough-in (Capped) ON EXISTING SWITCHES PLUG Qty: 1

SKETCH# 7 PAGE # 17

286 Optional Extras KITCHEN
Ceiling rough-in (Capped) Qty: 1
ABOVE ISLAND CENTERED +/- ON A SEPARATE SWITCH SEE SKETCH 7 PAGE 17

287 Optional Extras KITCHEN Qty: 1
Additional switch
FOR THE LIGHT ABOVE ISLAND SKETCH: 7 PAGE: 17

Granite

745 Optional Upgrade Kitchen Qty: 1
Countertop 3/4" GROUP 4 with double edge

Hardwood

750 Vintage DINING Qty: 1
5" WHITE OAK SCULPTED NSS UV-Oil or Pearl

749 Vintage GREAT/BRK Qty: 1
5" WHITE OAK SCULPTED NSS UV-Oil or Pearl

760 Vintage KITCHEN Qty: 1
5" WHITE OAK SCULPTED NSS UV-Oil or Pearl

751 Vintage M. HALL Qty: 1
5" WHITE OAK SCULPTED NSS UV-Oil or Pearl

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug. 10, 2021

Purchaser

Aug. 10, 2021

Décor Consultant

Aug. 10, 2021

Purchaser

-03-12-2021

Date Approved -
Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



10-Aug-21

Sales Selection Sheet
3 of 6

LOT 002-1

20-2505-CR ELEV B THE LAUREL

PURCHASERS: JOHANA KITA

CONTACT NO: 416-476-5171

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

752	Vintage 5" WHITE OAK SCULPTED NSS UV-Oil or Pearl	STUDY/NICHE	Qty: 1
753	Vintage 5" WHITE OAK SCULPTED NSS UV-Oil or Pearl	UPR HALL	Qty: 1
275	Optional Extras ROUGH-IN GAS LINE FOR BBQ AT MAIN FLOOR UP TO 40' (Quick Connect Not Included) LOWER LEVEL ON THE RIGHT SIDE OF THE PATIO DOOR	SKETCH # 6 PAGE 16	Qty: 1

Mirrors/Glass Products

739	Shower Upgrade Upgrade to Frameless clear glass with D-Ring Handle in chrome	Master Ensuite	Qty: 1
-----	---	----------------	--------

Plumbing

267	Kitchen Sink Upgrade Blanco Kitchen Sink PRECIS U SUPER SINGLE (32" x 19") Undermount 1 Large Bowl 9-1/2" Deep COLOUR: ANTHRACITE Model#400890	KITCHEN PAGE 21	Qty: 1
500	OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET, STD COLONY SINK, ONE EXTRA VANITY LIGHT, ONE EXTRA PLUG AND CABINET CONVERSION VIKING	Master Ensuite SKETCH # 9 PAGE 19	Qty: 1

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug. 10, 2021

Purchaser

Date: APPROVED -

Décor Consultant

Aug. 10, 2021

Purchaser

Date Approved: HEATHWOOD HOMES (UPCOUNTRY)

LIMITED



10-Aug-21

~~Sales~~ Selection Sheet
of

LOT 002-1

20-2505-CR ELEV B THE LAUREL

PURCHASERS: JOHANA KITA

CONTACT NO: 416-476-5171

VENDOR:

HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug. 10, 2021

Date

Purchaser

Aug. 10, 2021

Date ~~APPROVED~~

Décor Consultant

Aug. 10, 2021

Date

Purchaser

~~Date Approved~~ - HEATHWOOD HOMES (UPCOUNTRY)
LIMITED


CU-UPCOUNTRY
LOT 2-1
20-2505 CR ELEV A
THE LAUREL

15 of 44
The Laurel

20-2505 CRN ELEV. B

ELEVATION B: 2,546 SQ FT

Sketch #5


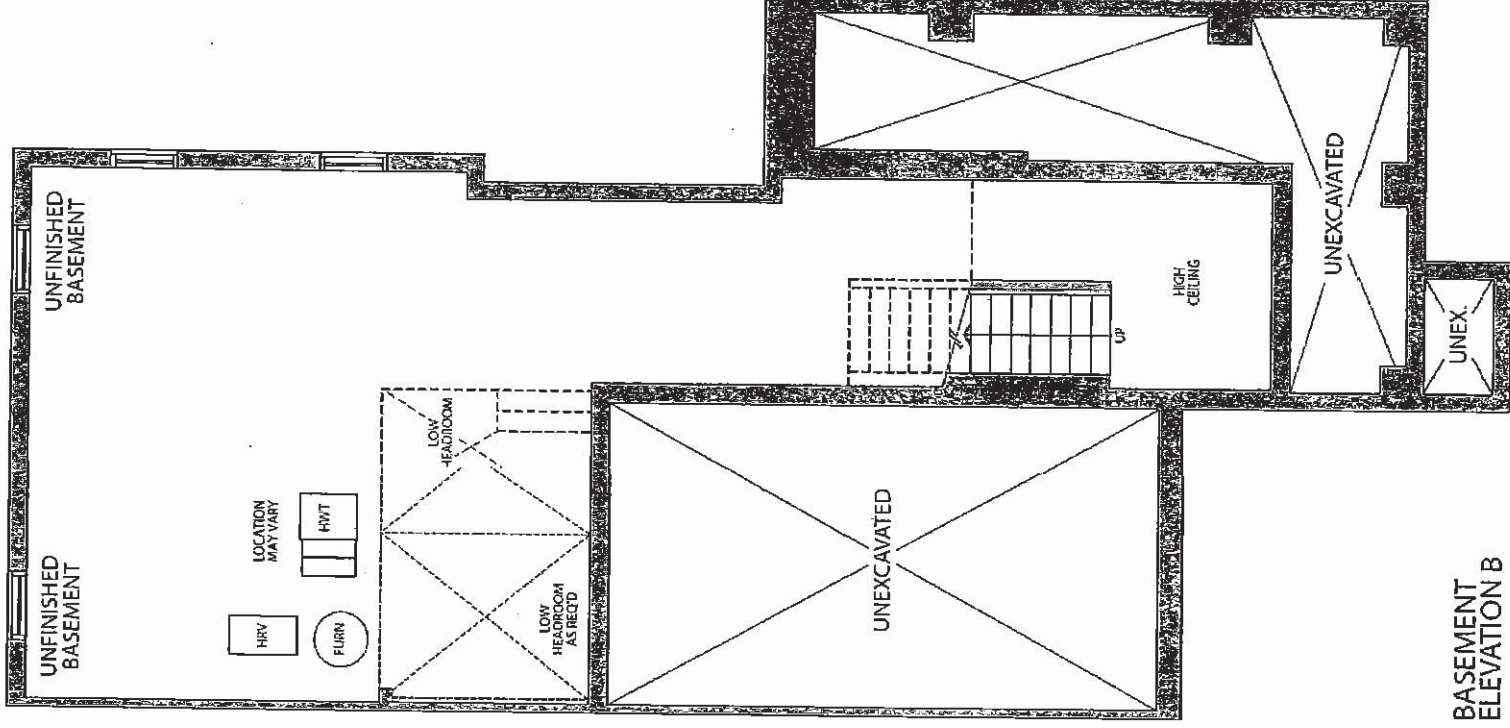


CU-UPCOUNTRY
LOT 2-1
20-2505 CR ELEV A
THE LAUREL

16 of 44
The Laurel

20-2505 CRN ELEV. B

ELEVATION B: 2,546 SQ FT

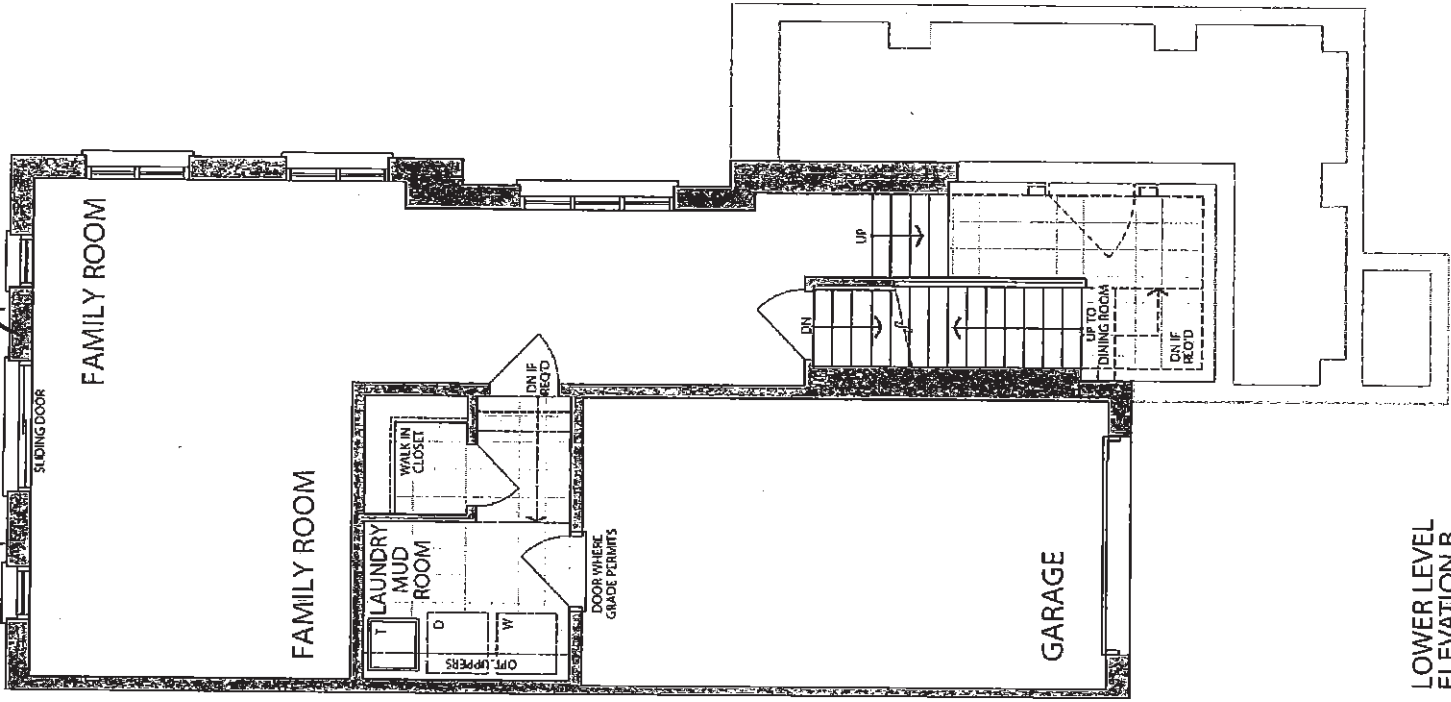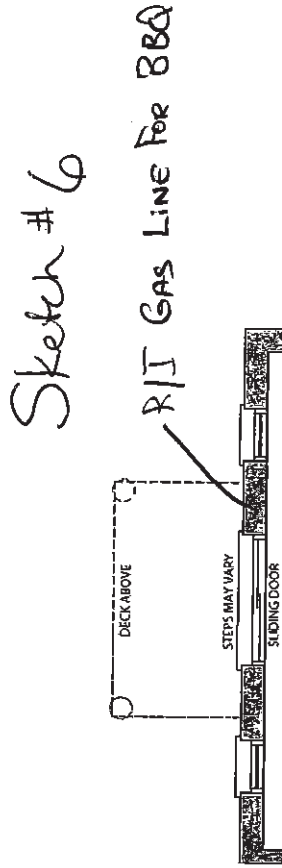

LOWER LEVEL
ELEVATION B

SN
JN

CU-UPCOUNTRY
LOT 2-1
20-2505 CR ELEV A
THE LAUREL


17 of 44
The Laurel

20-2505 CRN ELEV. B

ELEVATION B: 2,546 SQ FT

Sketch #7

CAPPED LIGHT ON
EXISTING SWITCH.

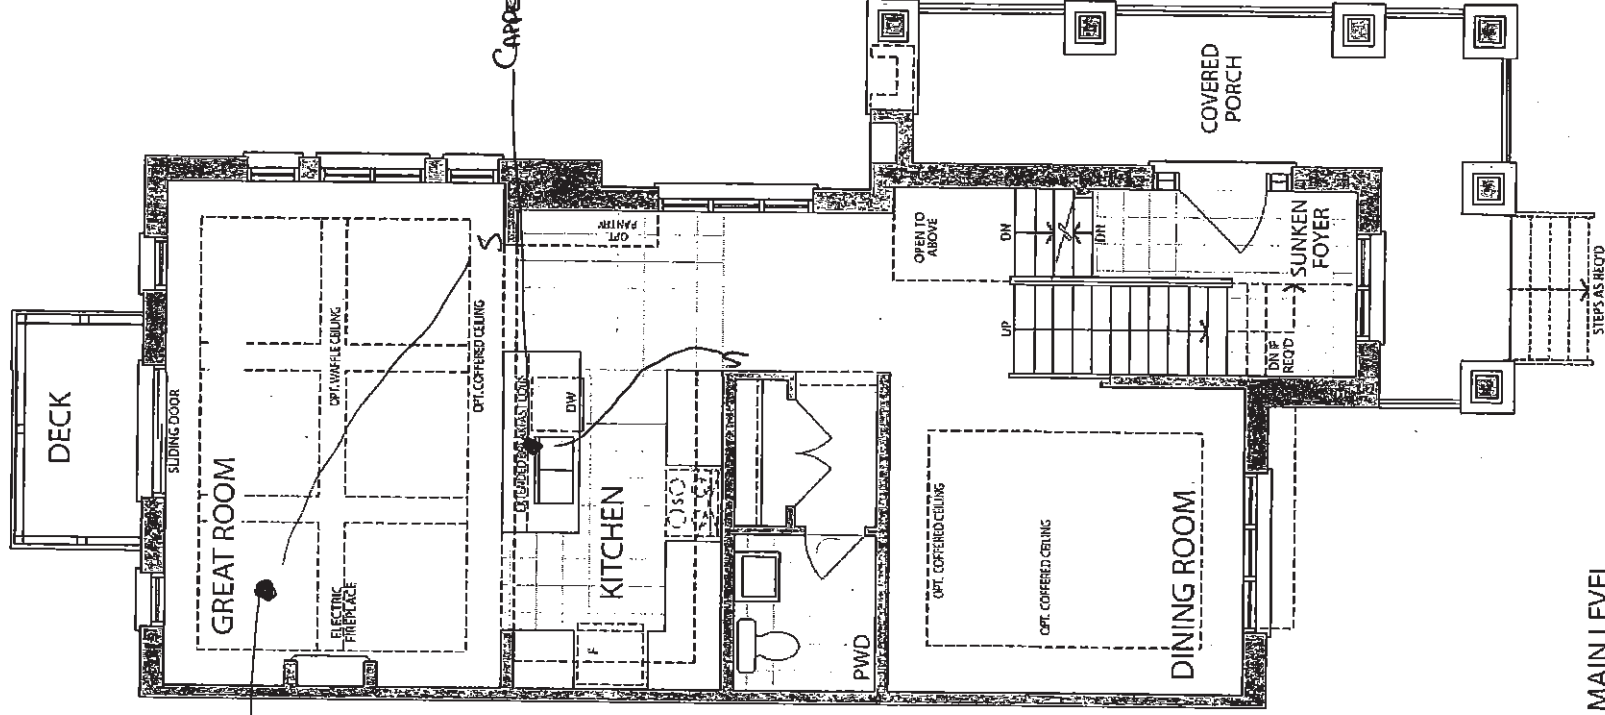


MAIN LEVEL
ELEVATION B

SW
JL

CU-UPCOUNTRY
LOT 2-1
20-2505 CR ELEV A
THE LAUREL

KITCHEN
(GROUND FLOOR)

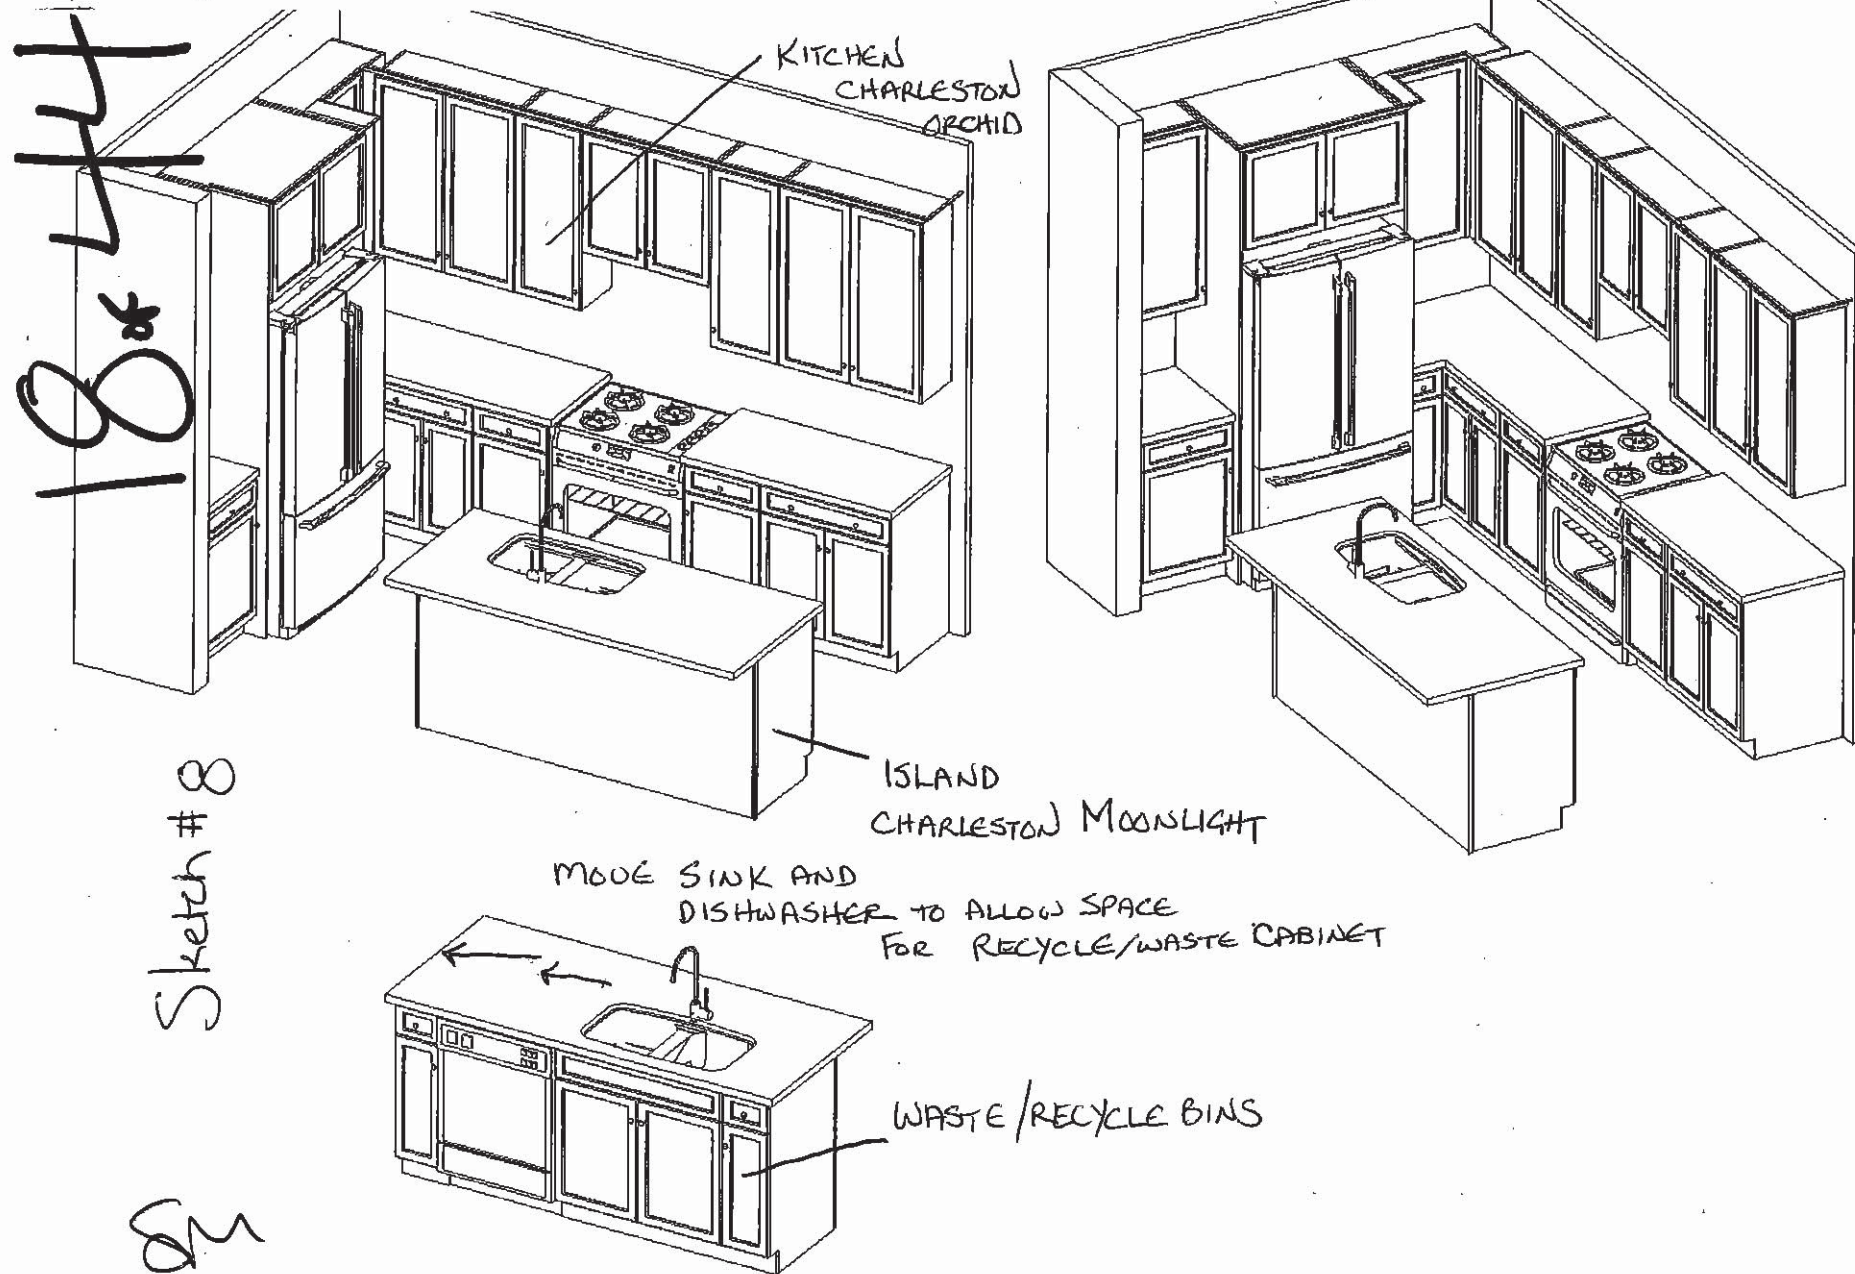

FRENDEL
KITCHENS LIMITED

1350 Shawson Drive, Mississauga, ON L4W 1C5

HEATHWOOD HOMES
COUNTRY LANE, WHITBY
MODEL: 20-2505 (2005)

STANDARD CONTRACT INCLUDES:

Appliance Openings

- Hood Opening: 30"W builder hood
- Fridge Opening: 37 3/8 "W X 73 3/8"
- Fridge cabinet: 30cm deep
- Stove Opening: 30" Freestanding
- Dishwasher Opening: 24"

Standard Kitchens Scope:

- 100cm H wall cabinets
- Std. Blum Hinges- **not soft close**
- Std. Metabox Drawers- **not soft close**
- Min 40cm W drawer
- Backing on all cabinets
- Countertop by others
- Upgrade applied paneled fridge & dishwashers supply only (appliance hardware by others)

Classic Collection ✓

Optional Upgrade to Includes:

- Top Drawer Construction (In lieu of Standard bank of drawers)
- Tandem Box **Soft Close Drawers**
- Blumotion **Soft Close Hinges for Doors**
- Crown Moulding
- Deep Fridge Upper w/Deep Panel
- Tall upper Cabinets

THIS DRAWING IS FOR DESIGN PURPOSES ONLY.
IT IS NOT AN EXACT RENDITION.

6/28/2021


CU-UPCOUNTRY
LOT 2-1
20-2505 CR ELEV A
THE LAUREL

19 of 44
The Laurel

20-2505 CRN ELEV. B

ELEVATION B: 2,546 SQ FT

Sketch #9

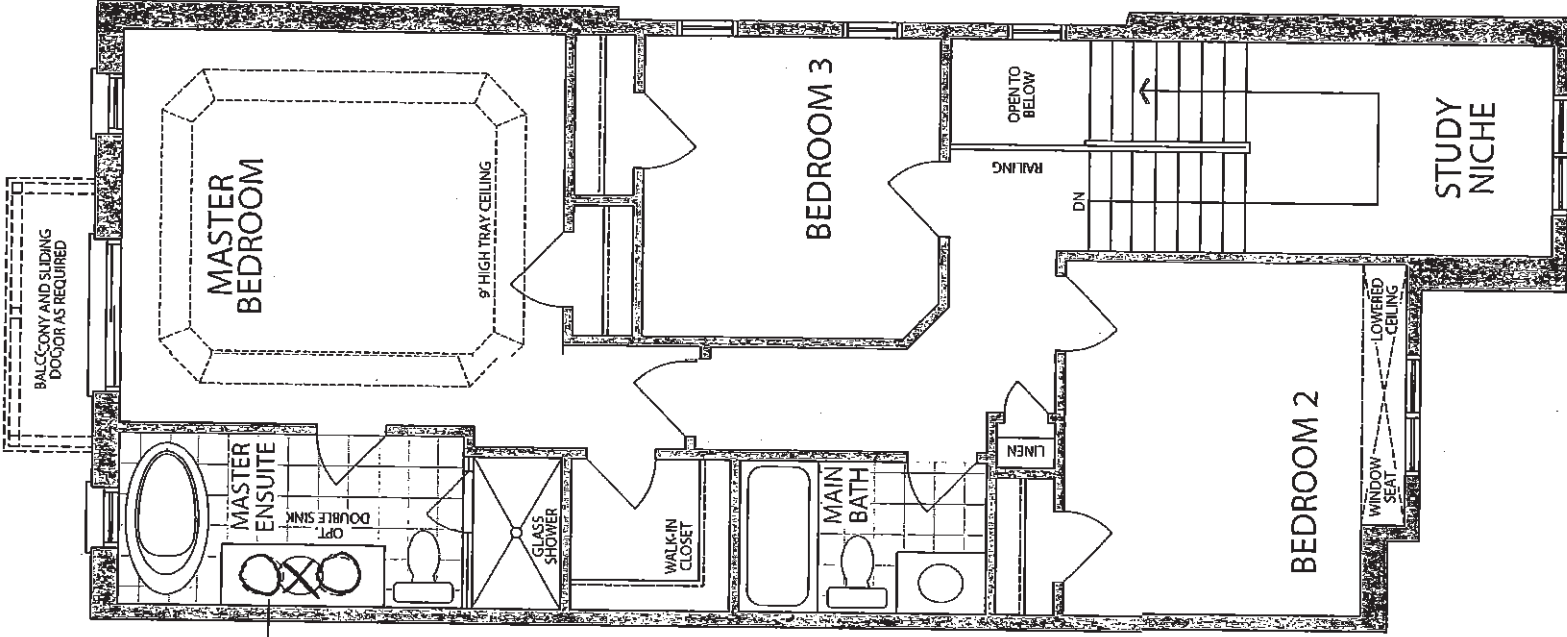


OPTIONAL DOUBLE SINK

Handwritten signature/initials.

CU-UPCOUNTRY
LOT 2-1
20-2505 CR ELEV A
THE LAUREL

20 of 24

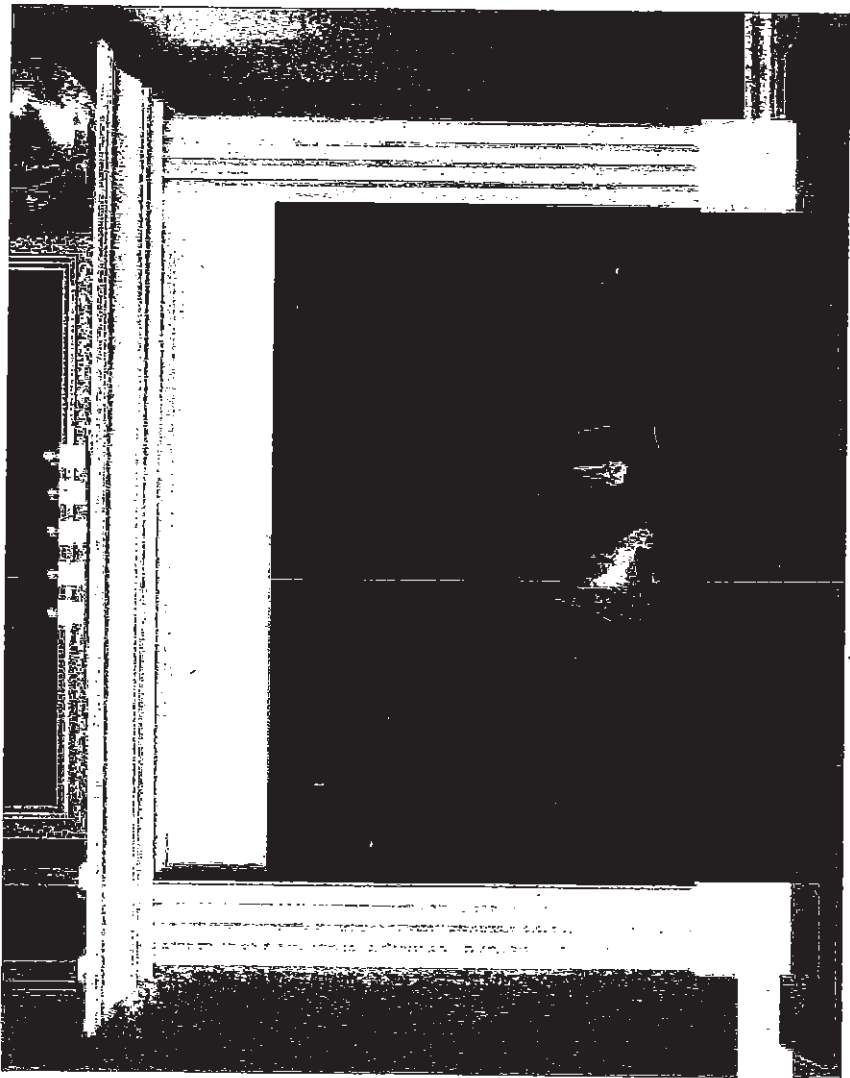


CABINET

STANDARD NF 15 Mantel ✓

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH - PRICED SEPARATELY)

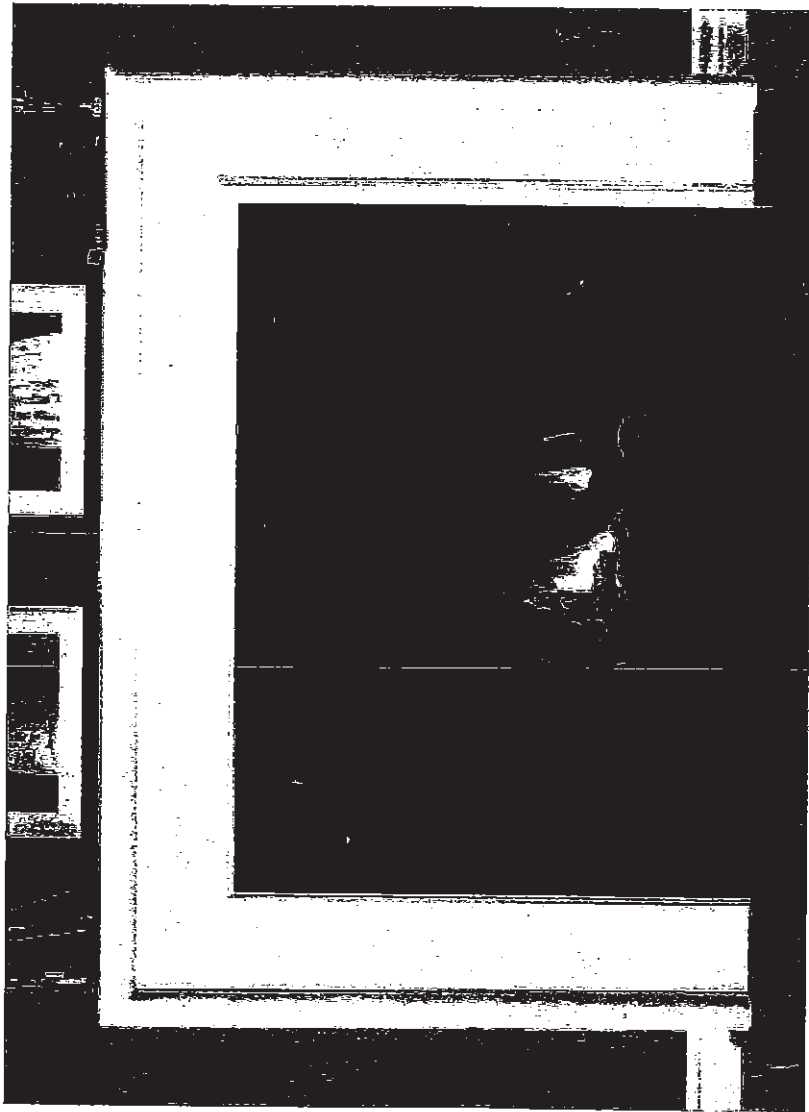

STANDARD NF 17 Mantel

WHITE PAINT GRADE FINISH


CU- UPCOUNTRY
LOT 2-1
20-2505 CR ELEV B
THE LAUREL

21 of 44

BLANCO

BLANCO QUATRUS U Maxi
Stainless Steel
Undermount Sink

This new German-engineered sink from
BLANCO features a 9-inch bowl depth
and zero-radius bowl corners. Made of
durable 18 gauge stainless steel.

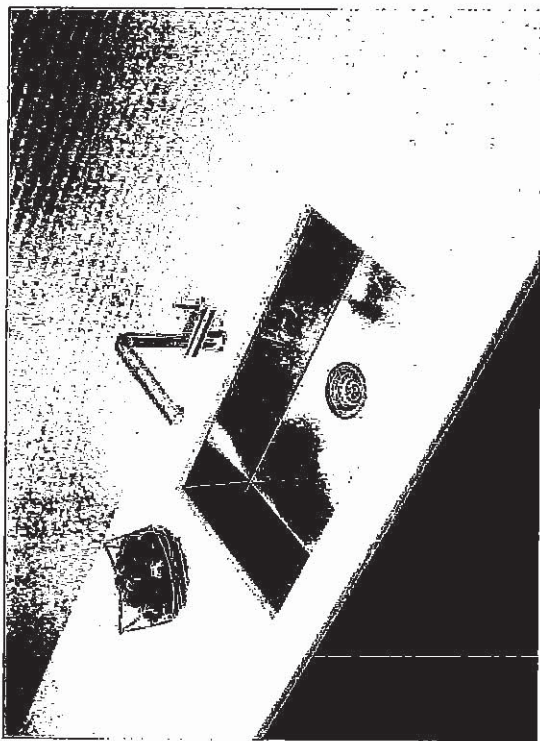

Model No.	Bowl Depth	
	Main	Secondary
401248	9" (230 mm)	

Material

Durable 18 gauge stainless steel
Brushed finish

Specifications

Minimum Cabinet Size: 33" (840 mm)

Undermount installation

Rear positioned drain hole for maximum usable bowl and cabinet storage space


Zero-radius corners and x-pattern drain grooves

Sound deadening system included

Template included

3 1/2" stainless steel strainer included

Limited Lifetime Warranty

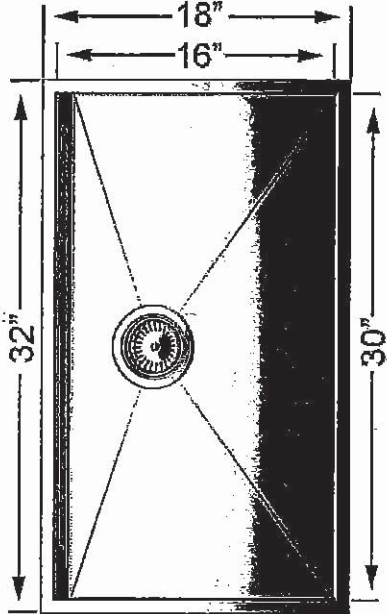

Accessories

Stainless Steel Grid

223192

Dr. SM


CU-UPCOUNTRY
LOT 2-1
20-2505 CR ELEV B
THE LAUREL

22 of 44

STANDARD KITCHEN FAUCET

Align

Modern

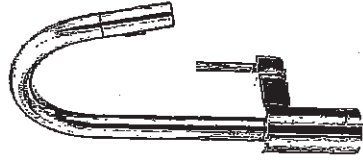

Single Handle Pull-Down Kitchen
Faucet*

Model 7565+

SM to

23 of 44



BOULEVARD®
PEDESTAL SINK
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (illustrated).
- * ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - **Design coordinates with Boulevard® Toilet**
 - Basin has flat bottom to also allow use as an **above counter sink** or a **drop-in sink** (with u-shaped cut out)

Nominal Dimensions:
24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only


Bowl sizes:
17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -
Meets or Exceeds the Following Specifications:
• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:

* See faucet section for additional models available

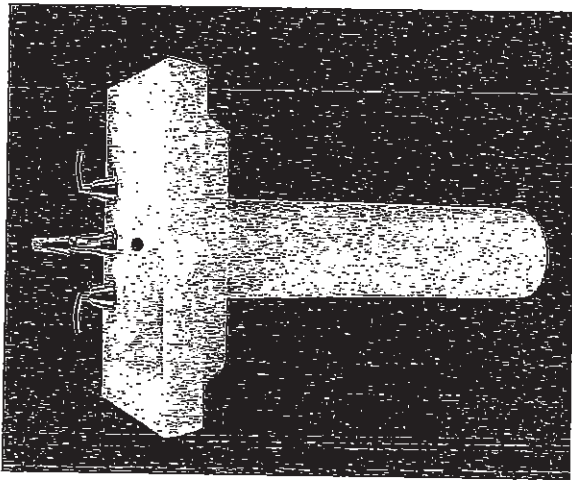

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

SM JV

COLONY COUNTERTOP SINK

- Vitreous china
- Self-rimming
- Front overflow
- Supplied with template
- Faucet deck

(Faucet shown not included)

-  0346 803
Faucet holes on 203mm (8") centres

- **0346 403 (Illustrated)**
Faucet holes on 102mm (4") centres

- 0346 001

Centre hole only

Nominal Dimensions:

521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A12.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.



To Be Specified

- ☐ Colour: ☒ White ☐ Bone ☐ Silver Gray
☐ Linen

- ☐ Faucet*:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

* See faucet section for additional models available

BAS-198

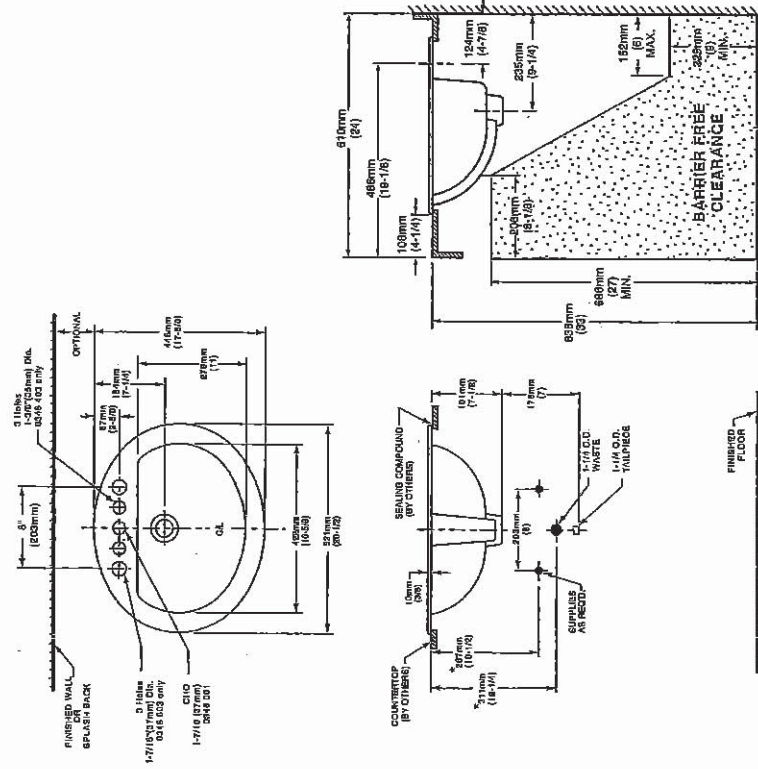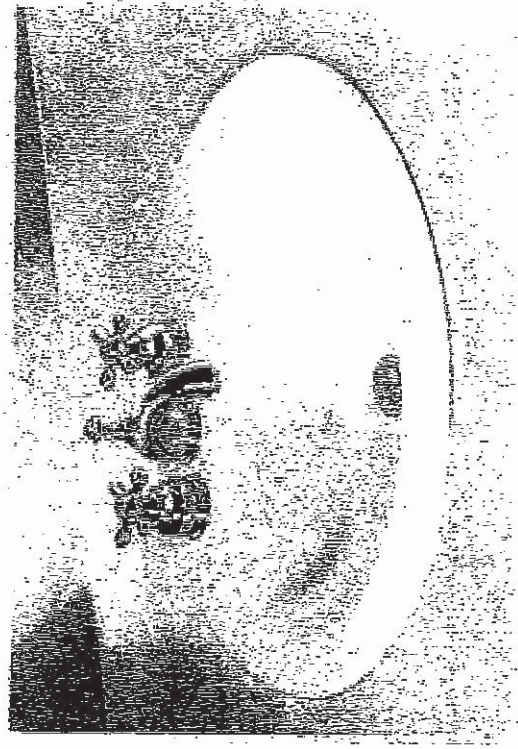

NOTES:

NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE

**SUPPLIED WITH SINK.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.**

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances FAUCET IS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.


established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



CU-UPCOUNTRY
LOT 2-1
20-2505 CR ELEV A
THE LAUREL

25 of 44

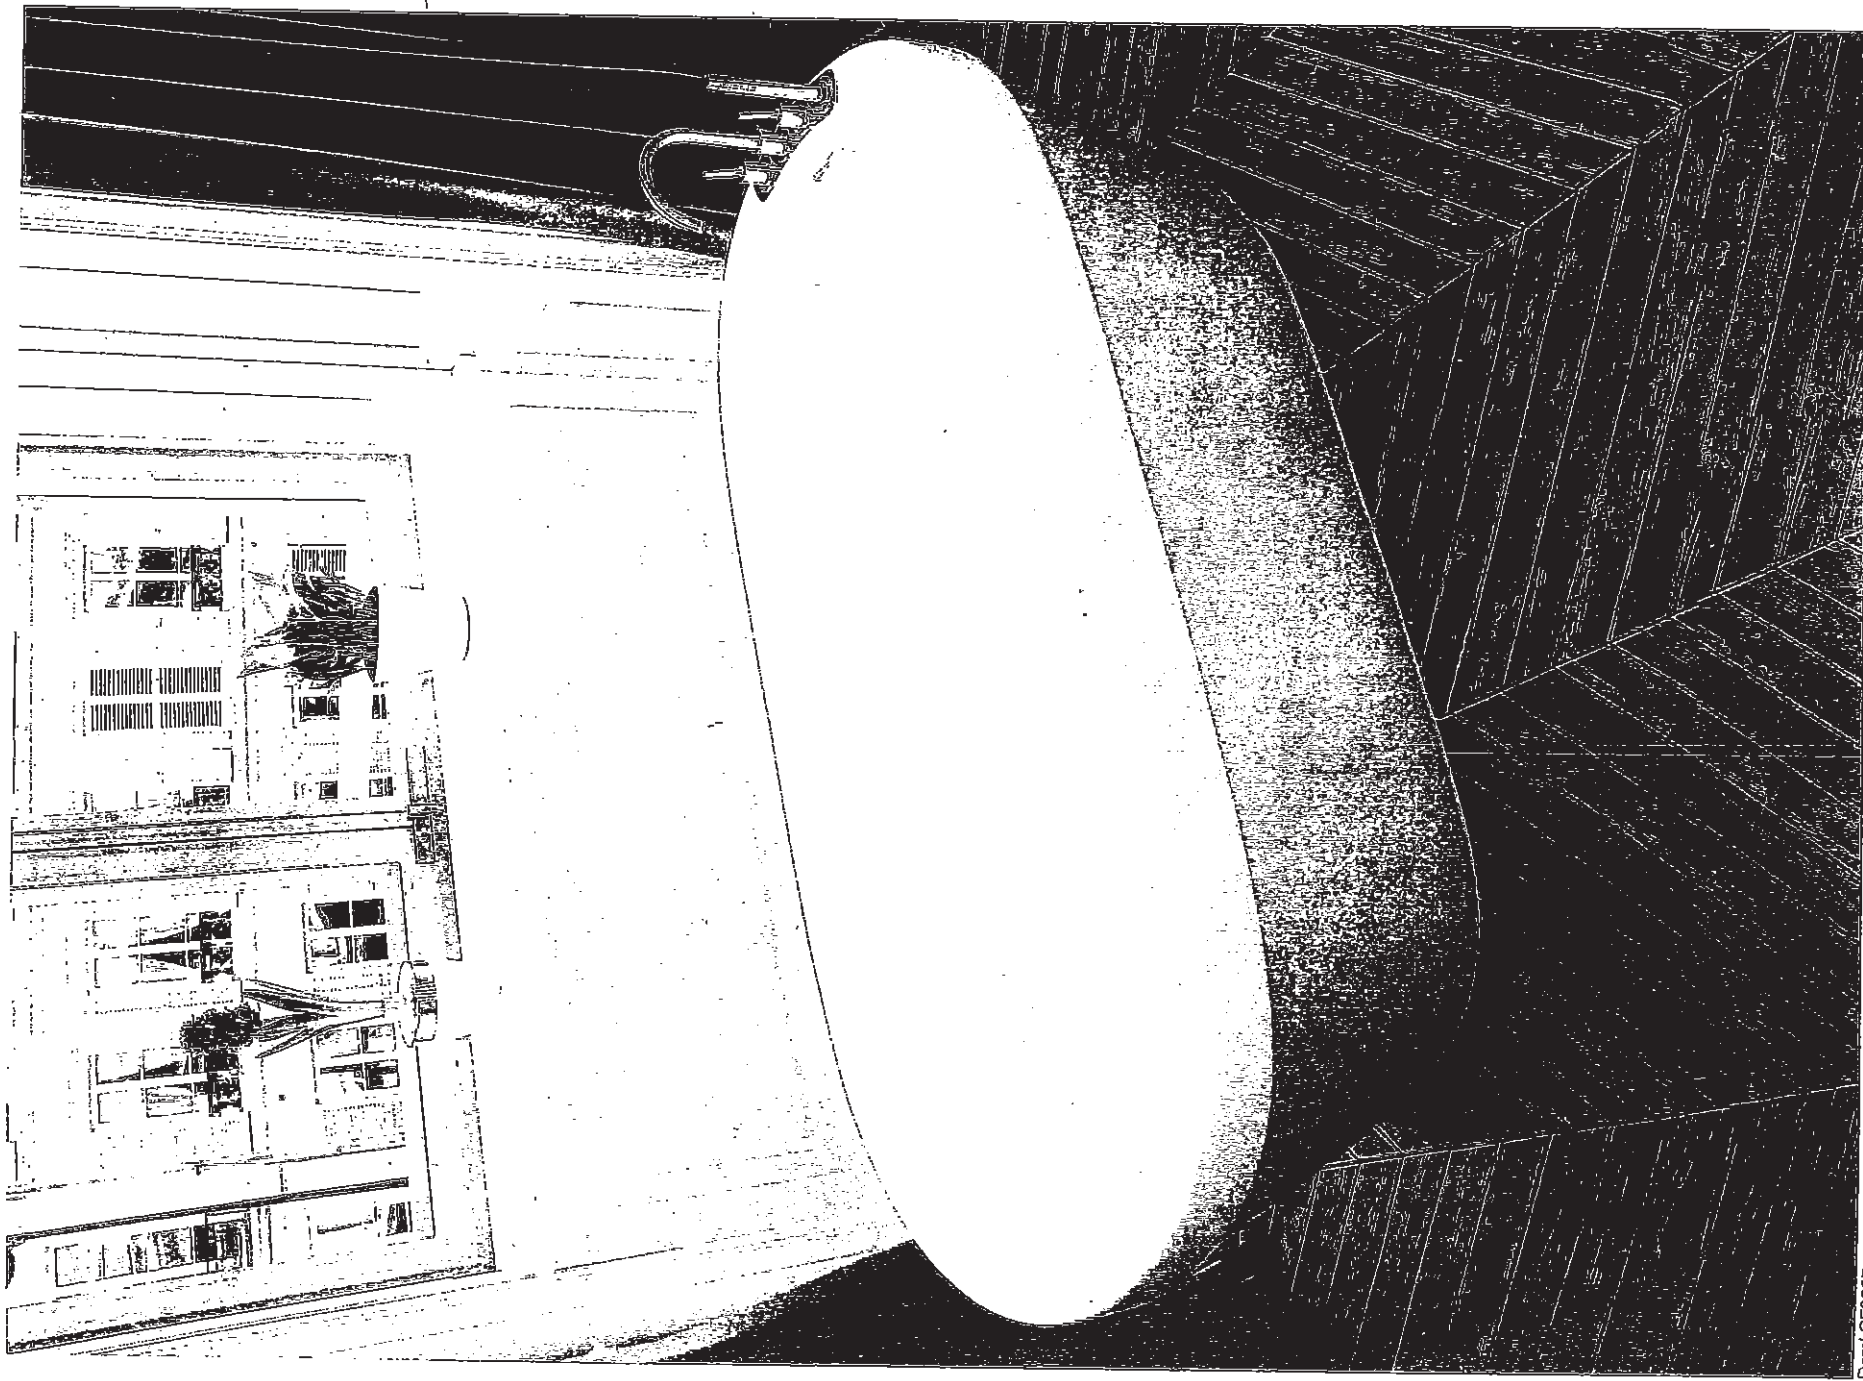

Deml CF2007


SM W

CU- UPCOUNTRY
LOT 2-1
20-2505 CR ELEV B
THE LAUREL

26 of 44


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL
Model 62320 / TL183EP†

[TL183EP not available in BC]

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†


FREESTANDING TUB FAUCETS

SM 20

CU-UPCOUNTRY
LOT 2-1
20-2505 CR ELEV A
THE LAUREL

27 of 44

WHIRLPOOL 101741
OVER-THE-RANGE MICROWAVE

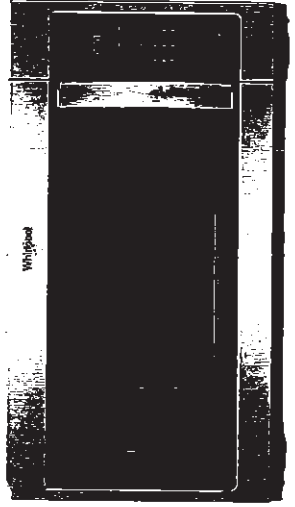

DISHWASHERS ARE AVAILABLE PLANE



Clean up spills on the turntable by simply putting it in the dishwasher.

2 SPEED CONVECTION COOKING



Match the right amount of ventilation to the dish being prepared and quickly get rid of cooking odors with two different fan speed settings.

MICROWAVE PRESETS




Get just the right amount of heat and time, whether you're cooking or defrosting, with specific preset options.

OTHER FEATURES

- Add 30 seconds option
- Electronic touch controls
- Adjustable cooktop lighting



White (W)



Black (B)



Fingerprint Resistant Stainless Steel (Z)



Silver (S)

Model	Whirlpool RW	Whirlpool RB	Whirlpool Z	Whirlpool S
Max height (in)	17-1/8"	17-1/8"	17-1/8"	17-1/8"
Width (in)	29-15/16"	29-15/16"	29-15/16"	29-15/16"
Depth (in)	15-9/16"	15-9/16"	15-9/16"	15-9/16"

*Performance varies based on installation.
©/™ ©2018 Whirlpool. All rights reserved. 1/18. WC170107A

Whirlpool®

SM Jr

CU-UPCOUNTRY
LOT 2-1
20-2505 CR ELEV A
THE LAUREL

28 of 44


Whirlpool® MICROWAVE HOOD INSTALLATION INSTRUCTIONS

PRODUCT MODEL NUMBERS
WMH31017H

LOCATION REQUIREMENTS

Installation Dimensions


NOTE: The grounded 3 prong outlet must be inside the upper cabinet.
See the "Electrical Requirements" section.

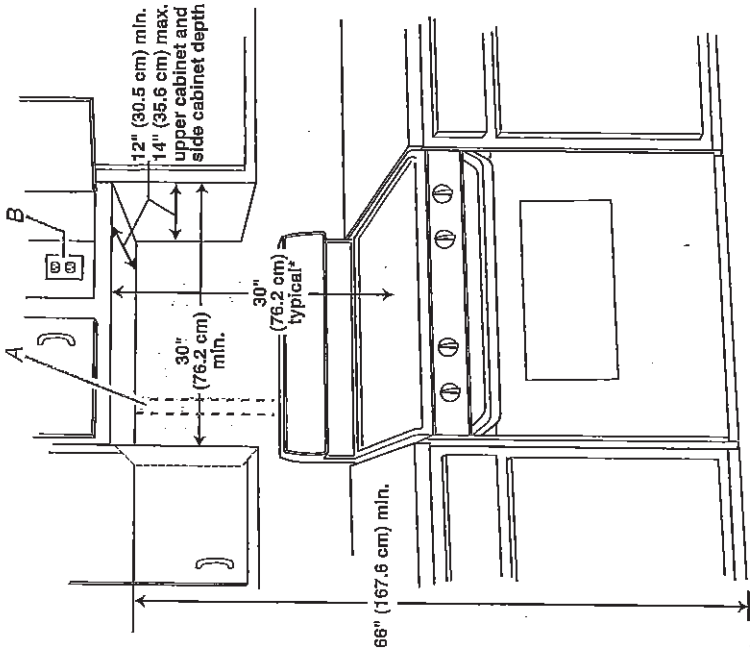

- A. 2" x 4" wall stud
- B. Grounded 3 prong outlet

*30" (76.2 cm) is typical for 66" (167.6 cm) installation height. Exact dimensions may vary depending on type of range/cooktop below.

PRODUCT DIMENSIONS

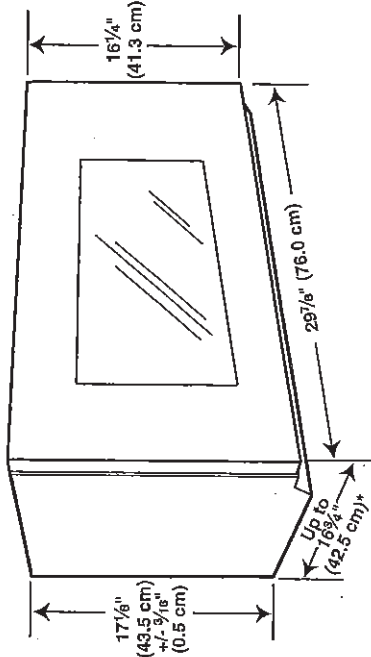

*Overall depth of product will vary slightly depending on door design.

PRODUCT DIMENSIONS

ELECTRICAL REQUIREMENTS

⚠ WARNING



Electrical Shock Hazard

- Plug into a grounded 3 prong outlet.
- Do not remove ground prong.
- Do not use an adapter.
- Do not use an extension cord.
- Failure to follow these instructions can result in death, fire, or electrical shock.

Observe all governing codes and ordinances.

Required:

- A 120-volt, 60 Hz, AC-only, 15- or 20-amp electrical supply with a fuse or circuit breaker

Recommended:

- A time-delay fuse or time-delay circuit breaker
- A separate circuit serving only this microwave oven

SM dr.

29 of 44

VENTING DESIGN SPECIFICATIONS

This section is intended for architectural designer and builder/ contractor reference only.

NOTES:


- Vent materials needed for installation are not provided with microwave hood combination.
- We do not recommend using a flexible metal vent.
- To avoid possible product damage, be sure to vent air outside, unless using recirculation installation. Do not vent exhaust air into concealed spaces, such as spaces within walls or ceilings, attics, crawl spaces, or garages.
- For optimal venting installation, we recommend:
 - Using roof or wall caps that have back draft dampers
 - Using a rigid metal vent
 - Using the most direct route by minimizing the length of the vent and number of elbows to provide efficient performance
 - Using uniformly sized vents
 - Using duct tape to seal all joints in the vent system
 - Using caulking compound to seal exterior wall or roof opening around cap

- Not installing 2 elbows together for optimal hood performance
- If venting through the wall, be sure that there is proper clearance within the wall for the damper to open fully.

If venting through the roof, and rectangular-to-round transition is used, be sure there are at least 3" (7.6 cm) of clearance between the top of the microwave oven and the transition piece. See "Rectangular-to-Round Transition" illustration.

Rectangular-to-Round Transition


NOTE: The minimum 3" (7.6 cm) clearance must exist between the top of the microwave oven and the rectangular to round transition piece so that the damper can open freely and fully.

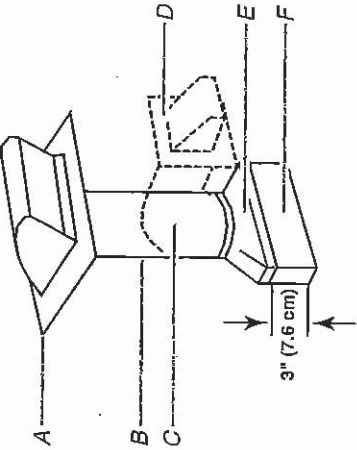



- A. Roof cap
- B. 6" (15.2 cm) min. diameter round vent
- C. Elbow (for wall venting only)
- D. Wall cap
- E. 3 1/4" x 10" to 6" (8.3 x 25.4 cm to 15.2 cm) rectangular to round transition piece
- F. Vent extension piece, at least 3" (7.6 cm) high

Recommended Standard Fittings

The following length equivalents are for use when figuring vent length. See the examples in "Recommended Vent Length."

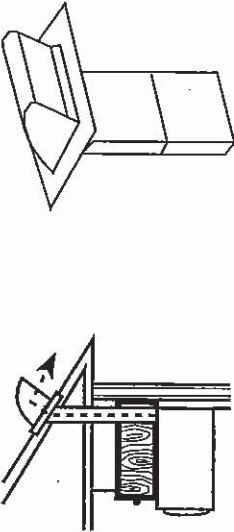


Roof venting

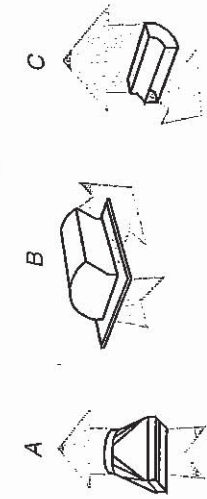

Wall venting

Wall cap



- A. Rectangular-to-round transition piece: 3 1/4" x 10" to 6" = 5 ft (8.3 x 25.4 cm to 15.2 cm = 1.5 m)
- B. Roof cap: 3 1/4" x 10" = 24 ft (8.3 x 25.4 cm = 7.3 m)
- C. 90° elbow: 3 1/4" x 10" = 25 ft (8.3 x 25.4 cm = 7.6 m)
- D. 90° elbow: 6" = 10 ft (15.2 cm = 3 m)
- E. Wall cap: 3 1/4" x 10" = 40 ft (8.3 x 25.4 cm = 12.2 m)
- F. 45° elbow: 6" = 5 ft (15.2 cm = 1.5 m)
- G. 90° flat elbow: 3 1/4" x 10" = 10 ft (8.3 x 25.4 cm = 3 m)

SM JV

30 of 44

Recommended Vent Length


A 3 1/4" x 10" (8.3 x 25.4 cm) rectangular or 6" (15.2 cm) round vent should be used.

The total length of the vent system including straight vent, elbow(s), transitions, and wall or roof caps must not exceed the equivalent of 140 ft (42.7 m) for either type of vent. See the "Recommended Standard Fittings" section for equivalent lengths.

For best performance, use no more than three 90° elbows.


To calculate the length of the system you need, add the equivalent lengths of each vent piece used in the system.
See the following examples:

3 1/4" x 10" (8.3 x 25.4 cm) vent system = 73 ft (22.2 m) total

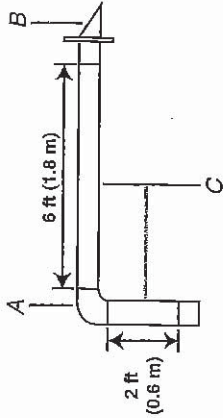

- A. One 3 1/4" x 10" (8.3 x 25.4 cm) 90° elbow = 25 ft (7.6 m)
- B. 1 wall cap = 40 ft (12.2 m)
- C. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

6" (15.2 cm) vent system = 73 ft (22.2 m) total

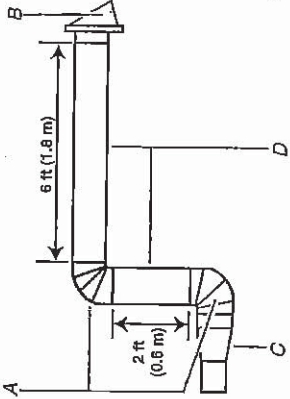

- A. Two 90° elbows = 20 ft (6.1 m)
- B. 1 wall cap = 40 ft (12.2 m)
- C. 1 rectangular-to-round transition piece = 5 ft (1.5 m)
- D. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

If the existing vent is round, a rectangular-to-round transition piece must be used. In addition, a rectangular 3" (7.6 cm) extension vent between the damper assembly and rectangular-to-round transition piece must be installed to keep the damper from sticking.

SM dn.

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT611SZD

WRT641SZD

PRODUCT DIMENSIONS


Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.


IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

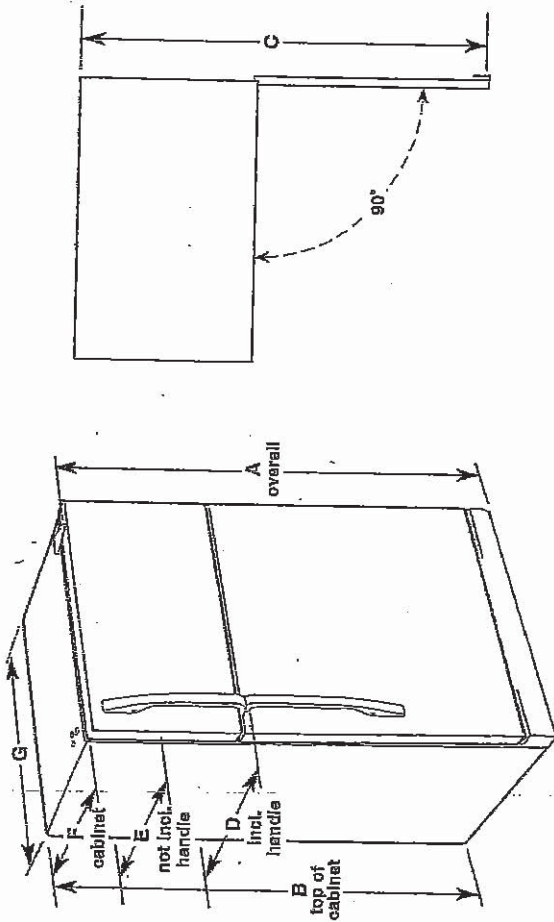

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (159.1 cm)	32 3/4" (83.5 cm)	30 3/4" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT611SZD WRT641SZD	21.9 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (159.1 cm)	34" (86.4 cm)	32 1/2" (82.3 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

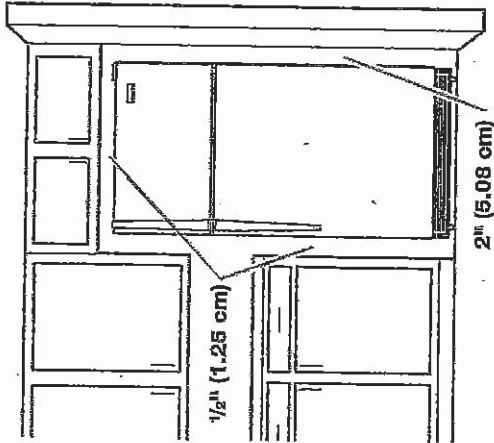

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.





NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

da SM

CU- UPCOUNTRY
LOT 2-1
20-2505 CR ELEV B
THE LAUREL

32 of 44

Refrigerator Door Swing Verification

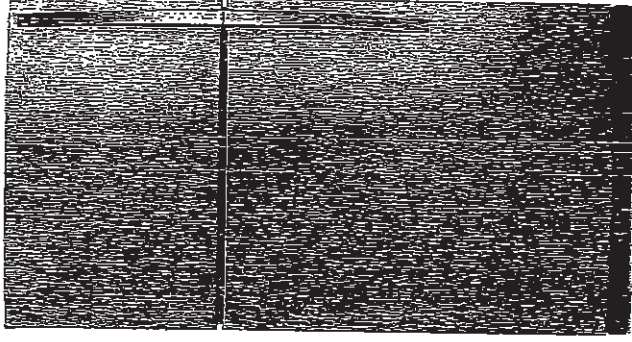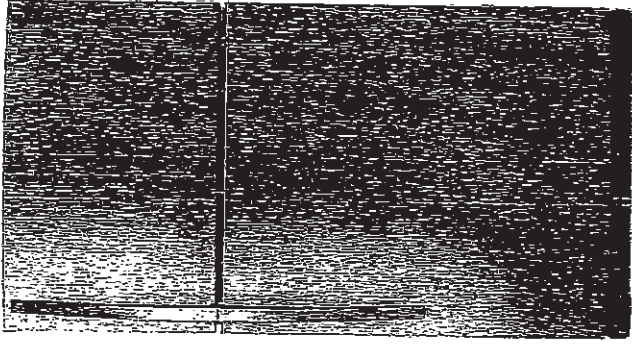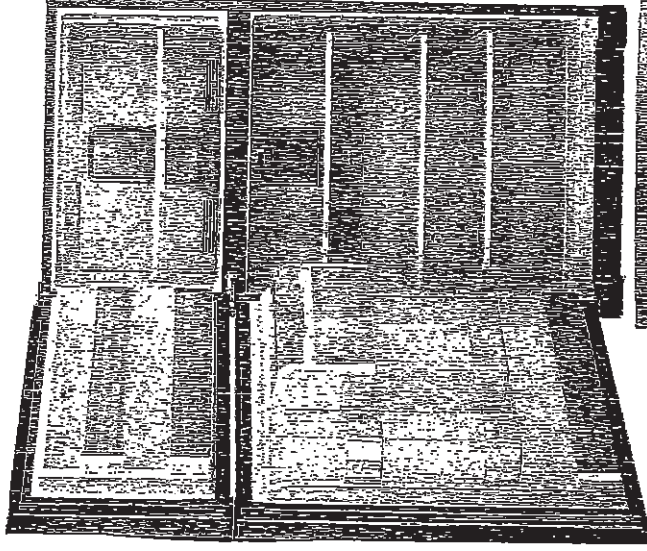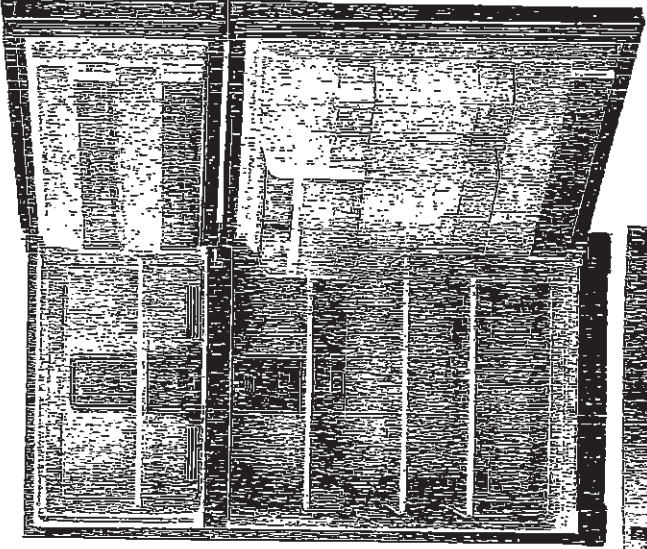

When facing the refrigerator

☐ RIGHT HAND
DOOR OPENING

- Hinges on right
- Handle on left

INITIAL

☒ LEFT HAND
DOOR OPENING

- Hinges on left
- Handle on right

INITIAL

GARAGE RIGHT

Please check and INITIAL your door swing selection.

ju. SM

CU- UPCOUNTRY
LOT 2-1
20-2505 CR ELEV B
THE LAUREL



33 of 44

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

5.3 cu. ft. Whirlpool® electric range with Frozen
Bake™ technology
YWFE515S0JS

Whirlpool

Home > Kitchen Appliances > Cooking Appliances > Ranges > Single Oven Ranges > YWFE515S0JS

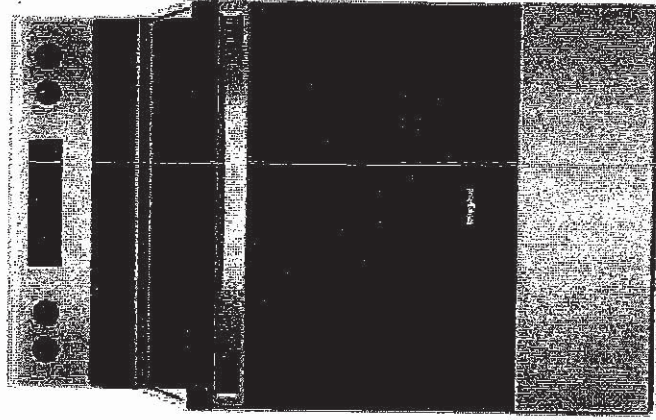


D. SM

34 of 44

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Product Dimensions

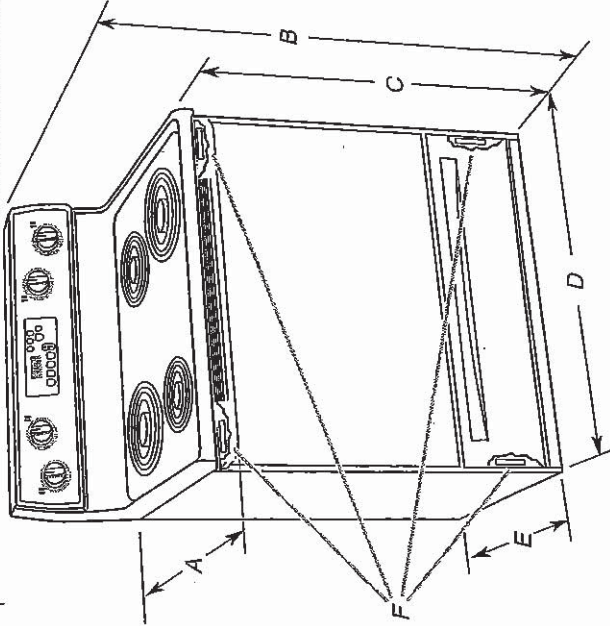

- A. 27¹/₄" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₈" (75.9 cm) width
- E. 25¹/₁₆" (64.3 cm) depth - back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

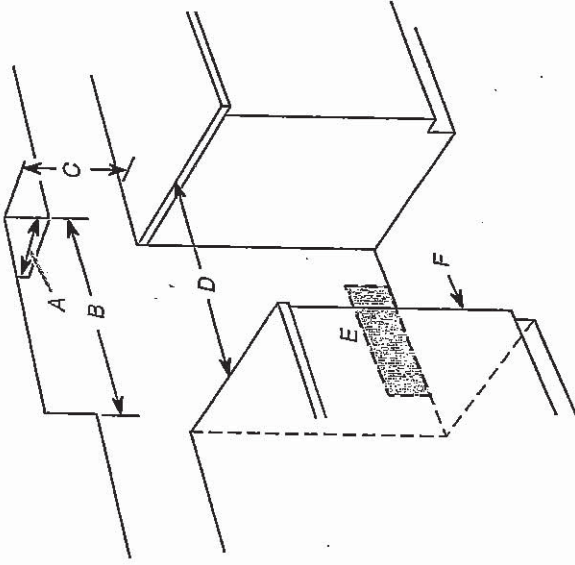

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

di SM

JAN 28/20

CU-UPCOUNTRY
LOT 2-1
20-2505 CR ELEV B
THE LAUREL

35 of 244

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Install Anti-Tip Bracket


A WARNING



Tip Over Hazard

A child or adult can tip the range and be killed.
Install anti-tip bracket to floor or wall per installation instructions.
Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.
Re-engage anti-tip bracket if range is moved.
Do not operate range without anti-tip bracket installed and engaged.
Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
2. Determine which mounting method to use: floor or wall.
If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/₁₆" (31.9 cm) from centerline as shown.

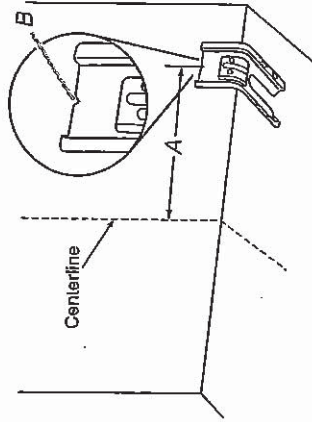


A. 12⁹/₁₆" (31.9 cm)
B. Bracket V-notch

4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.


Floor Mounting



Rear position




Front position




Diagonal (2 options)

Wall Mounting



5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1⁵/₈" (4.1 cm) screws provided.
6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

Dr 8M

36. 44

Σ

CU-UPCOUNTRY
LOT 2-1
20-2505 CR ELEV B
THE LAUREL

37.4
3 2 4 4

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF310PLA	WDF530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF310PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT110PAY
WDF310PAA	WDF530PAY	WDT120PAD
WDF310PCA	WDF530PLY	WDT170PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord: Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit



Instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.




Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4"N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 9385556) that meets all current AHAM/APMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

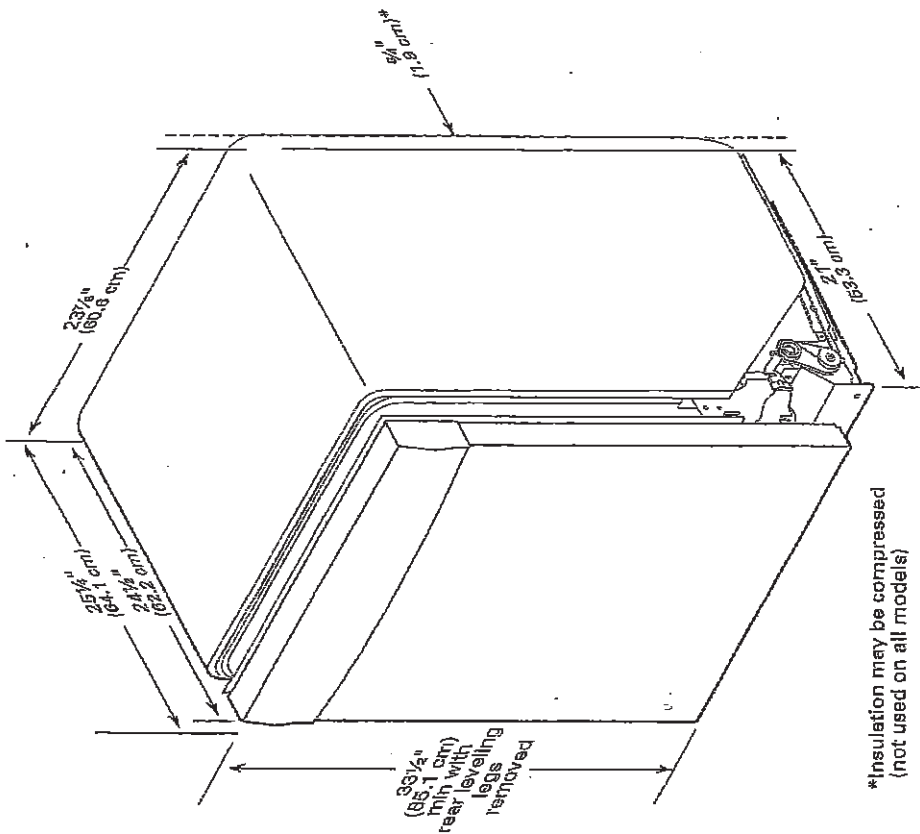

*Insulation may be compressed (not used on all models)

W. SW

CU- UPCOUNTRY
LOT 2-1
20-2505 CR ELEV B
THE LAUREL

38 of 44


CABINET CUTOUT DIMENSIONS

WIDE 320 DAD

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

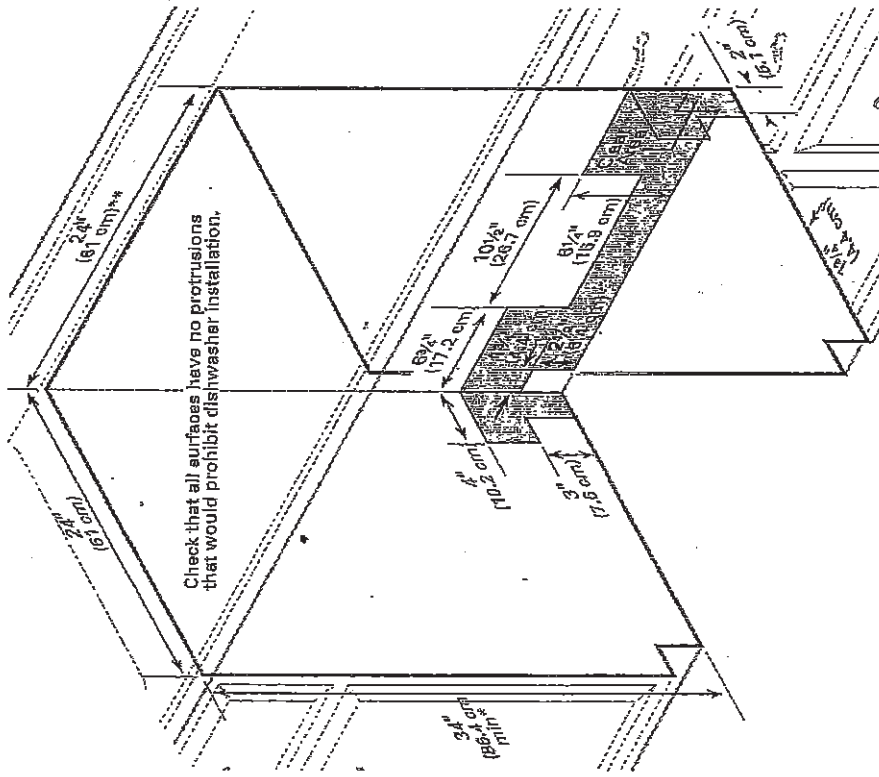

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


SM Jr

CU- UPCOUNTRY
LOT 2-1
20-2505 CR ELEV B
THE LAUREL

39 of 44

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Water and Dryer | Washers | Front Load Washers | WFW5620HW

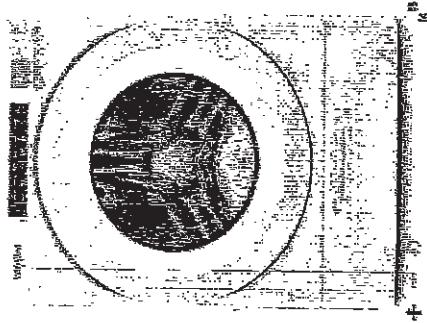

5.2 cu. ft. I.E.C. Closer-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closer-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	99.11 cm, 39-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LED Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	87
-----------------------	----

Electrical

Hz	60
----	----

Power Cord Included

Yes

SM dr

40 of 44

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper Installation is your responsibility.

You will need:



- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models* ✓

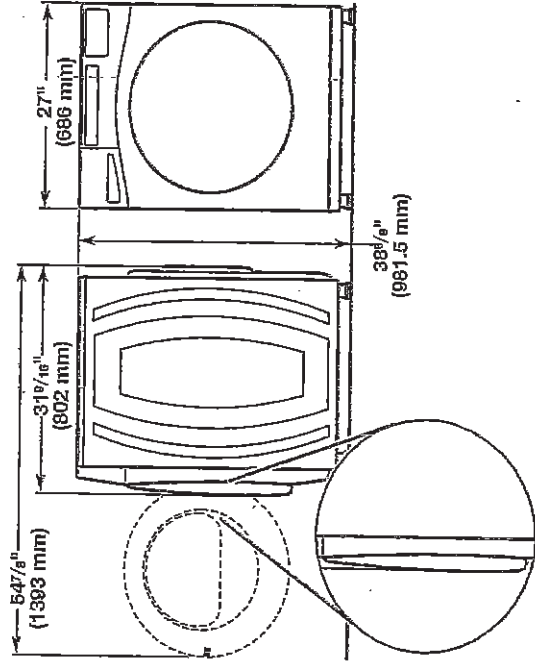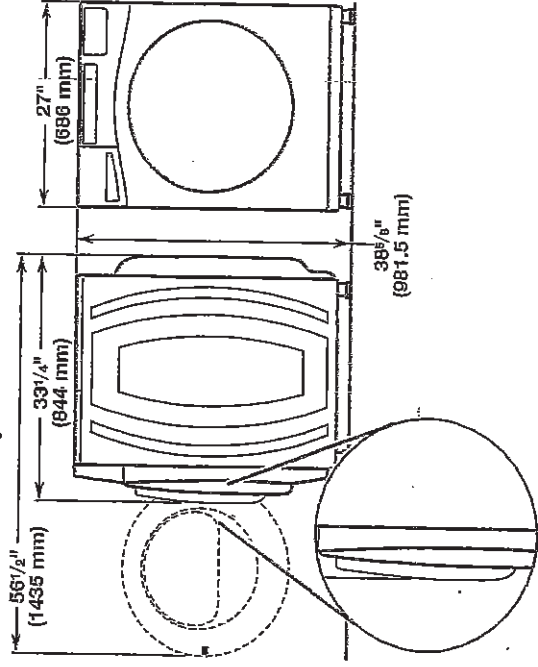


Maytag Models

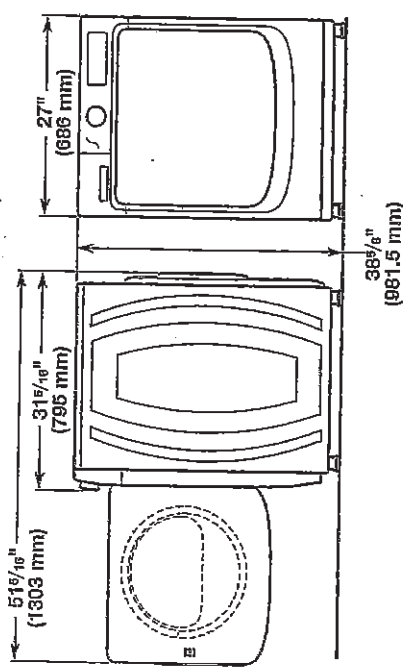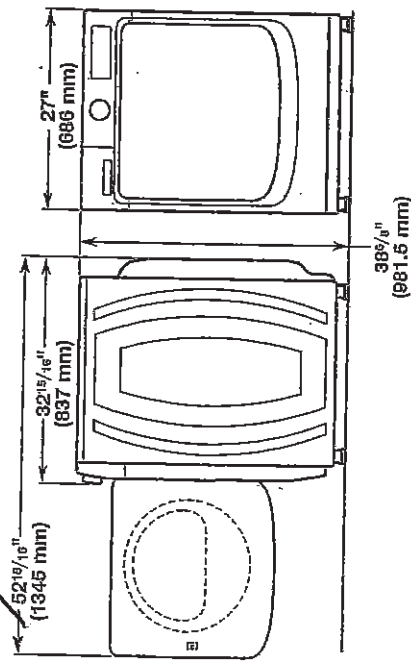

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

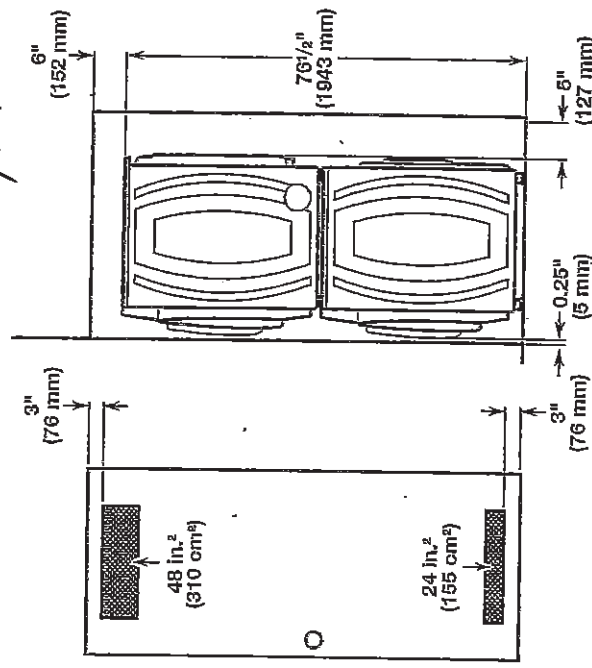


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

SM 20


41 of 44

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation: X

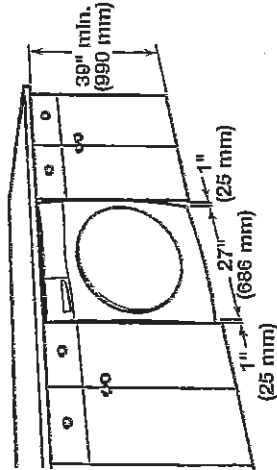

Recessed area or closet installation: X

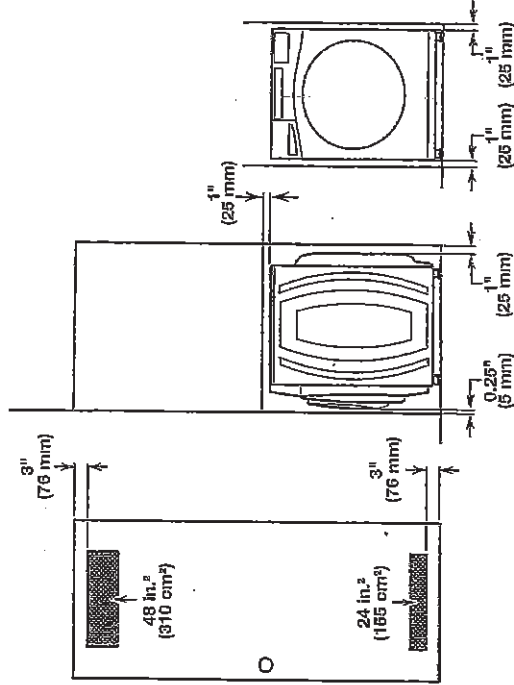

Custom cabinet installation: X

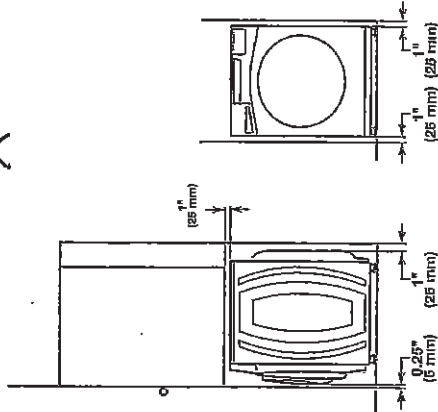


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

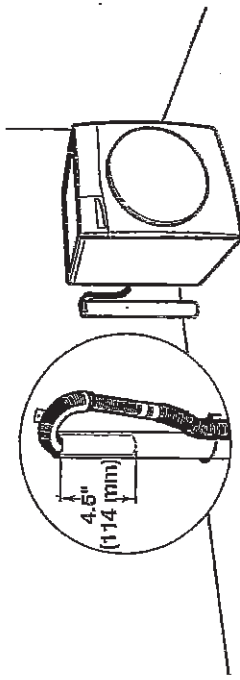


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

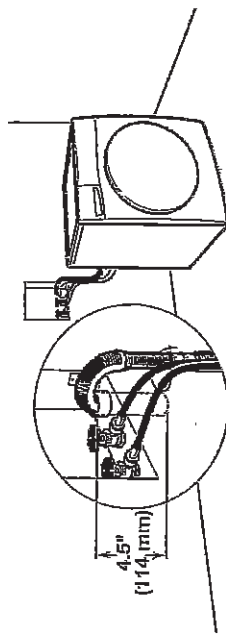

See requirements for floor standpipe drain system.

Laundry tub drain system

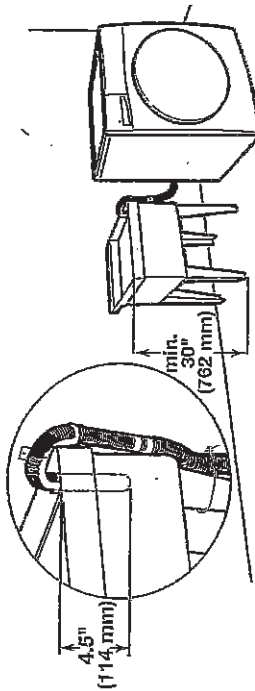

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


SM dr

CU-UPCOUNTRY
LOT 2-1
20-2505 CR ELEV B
THE LAUREL

42 of 44

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryer | Dryers | Electric Dryers | YWED5620HW

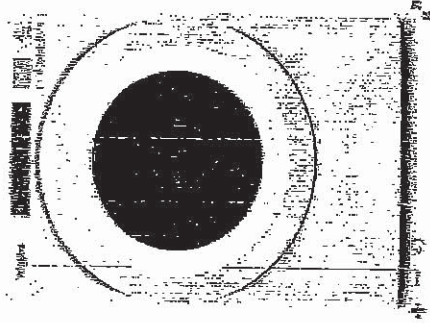

Electric
Unit Style
YWED5620HW

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	76.74 cm, 30.0 in
Depth With Door Open 90 Degree	139.43 cm, 54.12 in
Height	98.42 cm, 38.84 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical


Hertz	60
Power Cord Included	Yes

SM JV

43 of 44

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

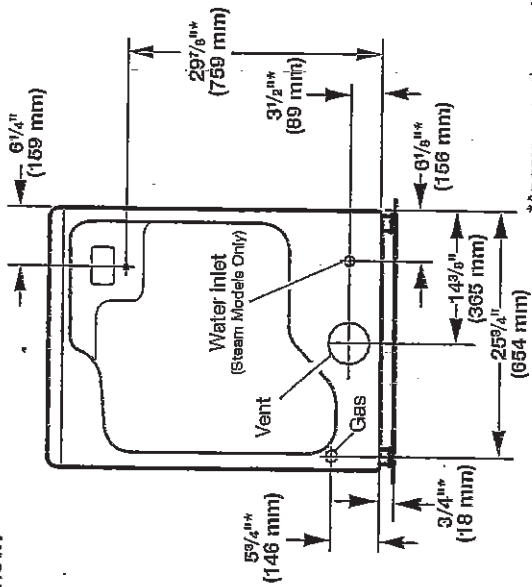

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

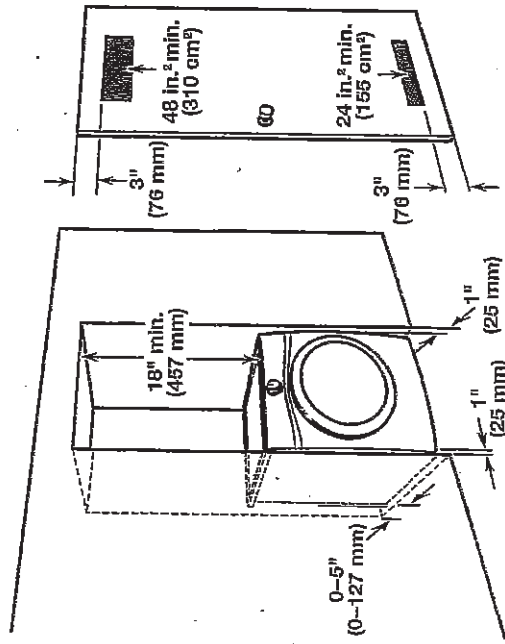

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

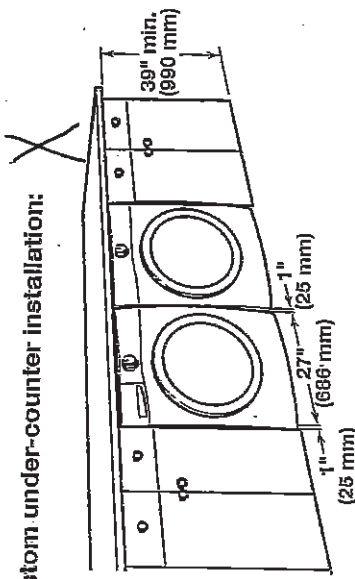

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

SM 2

44 of 44

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.

- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

! WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.


Failure to do so can result in death, explosion, or fire.

You will need:


- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS
Front view:

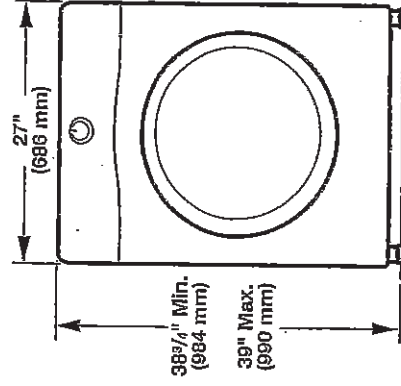

Side view:
Whirlpool Models

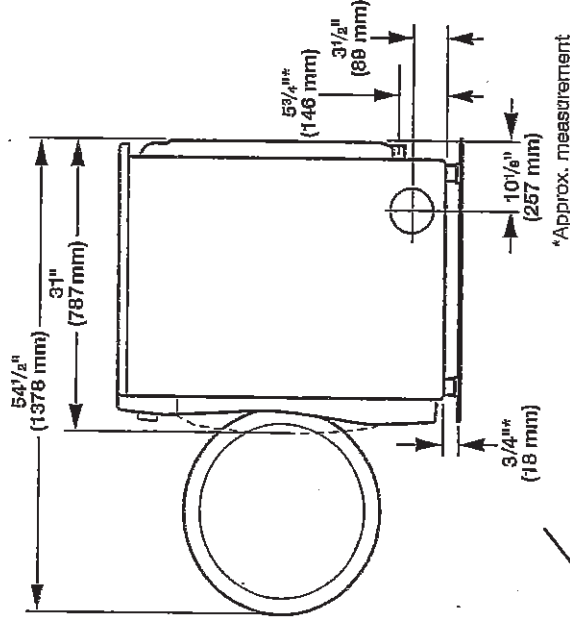

Maytag Models

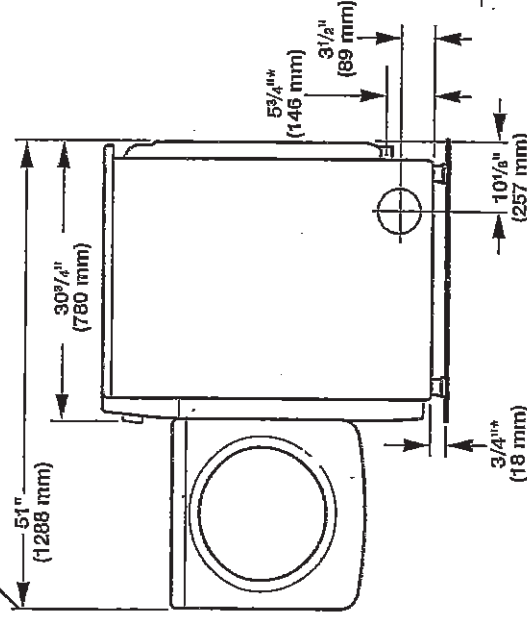

SM JV