



11-AUG-21

Interior Finishing Selection Sheet

LOT 003-4

20-2257 ELEV A THE CALVERTON

PURCHASERS: AMIN SULTAN VIRANI
SALLY VIRANI

CONTACT NO: 416-779-0106
416-779-0106

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Appliances

6-8894 Kitchen HoodFan

☒ CYCLONE 30" CANOPY CHIMNEY HOODFAN STAINLESS STEEL
SCB51430 STD PAGE 38

Cabinetry

1-9111 Kitchen Cabinet Colour/Style

☐ SIMCOE ORCHID VIKING III STD 3DL ISLAND TO BE 9158 -
NAVY BLUE

3-2086 Kitchen Cabinet Hardware

☐ HARDWARE 9677 STD

25-9111 Main Bathroom Cabinet Colour/Style

☐ SIMCOE ORCHID VIKING III STD 3DL

29-7672 Main Bathroom Cabinet Hardware

☐ HARDWARE 135 STD

28-8796 Main Bathroom Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

20-9111 Master Ensuite Cabinet Colour/Style

☐ SIMCOE ORCHID VIKING III STD 3DL

22-7672 Master Ensuite Cabinet Hardware

☐ HARDWARE 135 STD

21-8796 Master Ensuite Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

414-9157 Powder Room Lower Level Cabinet Colour/Style

☐ SIMCOE MOONLIGHT Viking III STD 3DL

416-7672 Powder Room Lower Level Cabinet Hardware

☐ HARDWARE 135 STD

415-8796 Powder Room Lower Level Countertop



11-Aug-21

HEATHWOOD

Interior Finishing Selection Sheet

LOT 003-4

20-2257 ELEV A THE CALVERTON

PURCHASERS: AMIN SULTAN VIRANI

CONTACT NO: 416-779-0106

SALLY VIRANI

416-779-0106

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Ceramics

17-2225 Foyer Grout	☐ Grout (27) Silver STD
4-8638 Kitchen Backsplash	☒ Chess Bevelled Tender Grey QT.CH.TGR.0412.BR UPG 3 4 x 12 INSTALL IN SUBWAY PATTERN
5-2226 Kitchen Backsplash Grout	☐ Grout (00) White STD
7-5691 Kitchen/Breakfast Flooring	☒ Regal Polished Shell White NY.RG.SLW.1224.PL.N. UPG_4 12 x 24 SEE SKETCH # 1 PAGE 26 FOR 12 X 24 TILE DIRECTION
8-2225 Kitchen/Breakfast Grout	☐ Grout (27) Silver STD
66-9257 Laundry Room Flooring	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13
67-2225 Laundry Room Grout	☐ Grout (27) Silver STD
30-9257 Main Bathroom Flooring	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13
31-2225 Main Bathroom Grout	☐ Grout (27) Silver STD
27-9020 Main Bathroom Tub Wall Tile	☐ Weave White QT.WV.WHT.0810 STD 8 x 10 INSTALL STACKED HORIZONTALLY
26-2226 Main Bathroom Tub Wall Tile Grout	☐ Grout (00) White STD
23-5694 Master Ensuite Floor Tile	☒ Regal Polished Charcoal Black NY.RG.CCB.1224.PL UPG_4 12 x 24 SEE SKETCH# 13 PAGE 28 FOR 12 X 24 TILE DIRECTION
24-7704 Master Ensuite Floor Tile Grout	☐ Grout (19) Pearl Gray STD
73-8666 Master Ensuite Shower Floor Tile	☒ Ontario Series Mosaic Dark Grey OD.ON.DGR.0202.MT.N UPG 1 2 x 2
74-2226 Master Ensuite Shower Floor Tile Grout	☐ Grout (00) White STD
104-9018 Master Ensuite Shower Wall Tile	☒ Brick Series White Glossy TH.BR.WHT.0812.GL UPG_2 8 x 12 INSTALL STACKED HORIZONTALLY
105-2226 Master Ensuite Shower Wall Tile Grout	☐ Grout (00) White STD
191-2225 Mud Room Flooring	☐ Grout (27) Silver STD
130-9257 Mud Room Grout	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13
32-5613 Powder Room Flooring	<



11-Aug-21

Interior Finishing Selection Sheet

LOT 003-4

20-2257 ELEV A THE CALVERTON

PURCHASERS: AMIN SULTAN VIRANI
SALLY VIRANI

CONTACT NO: 416-779-0106
416-779-0106

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Ceramics

33-2225 Powder Room Grout

☐ Grout (27) Silver STD

369-5613 Powder Room Lower Level Flooring

☒ Regal Polished Shell White NY.RG.SLW.1212 UPG_3 12 x 12

370-2225 Powder Room Lower Level Grout

☐ Grout (27) Silver STD

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-8891 Great Room Fireplace Mantle

☐ Paint Grade Mantle- Cabinet (Per Plan) WHITE NF-17 STD

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-9121 Kitchen Countertop

☒ MSI Quartz ICED WHITE Group 1 UPG 3/4" with Mitred Edge

Hardwood

11-9358 Great Room Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl TITANIUM Red Oak Pearl 3/4" X 3 1/4"

367-9358 Lower Level Hall Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl TITANIUM Red Oak Pearl 3/4" X 3 1/4"

100-9059 Main Stairs Landing(s) Flooring



11-Aug-21

Interior Finishing Selection sheet

LOT 003-4

20-2257 ELEV A THE CALVERTON

PURCHASERS: AMIN SULTAN VIRANI
SALLY VIRANI

CONTACT NO: 416-779-0106
416-779-0106

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Interior Stairs

116-1713 Basement Stairs Type

☐ Paint Grade Stairs STD

142-1712 Main Stairs Type

☐ Oak Stairs UPG_1

45-1712 Stairs to Lower Level Type

☐ Oak Stairs UPG_1

Interior Trim

91-9374 Throughout Trim Size

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings
STD-Towns

Painting

143-7761 Main Stairs Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIRS TO BE STAINED SAMBUCCA

46-7761 Stairs to Lower Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIRS TO BE STAINED SAMBUCCA

240-1716 Throughout Trim - Paint Colour

☐ Trim WHITE STD

31-1717 Throughout Walls - Paint Colour

☐ Wall WARM GREY 22 STD

Plumbing

246-1737 Main Bathroom Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

149-1737 Master Ensuite Plumbing Fixture (colour)

☐ Plumbing Fixtures WHITE STD

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

LOT 003-4

20-2257 ELEV A THE CALVERTON

PURCHASERS: AMIN SULTAN VIRANI
SALLY VIRANI

CONTACT NO: 416-779-0106
416-779-0106

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:
Appliances

790	Cyclone 30" Wall Mount Chimney Hood SS SCB51430	KITCHEN	Qty: 1
-----	--	----------------	--------

PAGE 38

Cabinetry

945	Optional Upgrade Optional Classic Kitchen (Top Drawers in lieu of Bank of Drawers, Crown Moulding, Deep Fridge Uppers, Soft Close Doors and Soft Close Drawers) VIKING I/II/III SKETCH # 12 PAGE 27	Classic Kitchen	Qty: 1
484	Optional Extras Combo: 12B+10B- Pots and pans drawers (width min. 60cm/max. 90cm) (size subject to floor plan)with upgraded drawers from Metabox to Tandembox Viking (on a Classic Series Kitchen) SEE SKETCH # 11 AND 12 PAGE 26 AND 27 FOR LOCATION	KITCHEN	Qty: 1

447	Optional Extras 30H- Wall cabinet with shelf for microwave (finished interior) (opening 24"W x 13 3/4"H x 17"D) * electrical priced separately Viking SEE SKETCH # 11 AND 12 PAGE 26 AND 27 FOR LOCATION	KITCHEN	Qty: 1
-----	---	----------------	--------

456	Optional Extras 40J- Two-tone colour/style selection for island (must be of equal or lower level to main selection) Viking ISLAND TO BE 9158 - SIMCOE NAVY BLUE	KITCHEN	Qty: 1
-----	--	----------------	--------

430	Optional Extras 09D- Vanity top drawer/lower drawer price per drawer (includes false drawer) Viking SEE SKETCH # 14 PAGE 29 FOR LOCTION	MAIN BATHROOM	Qty: 1
-----	--	----------------------	--------



11-Aug-21

Sales Selection Sheet
21 of 5

20-2257 ELEV A THE CALVERTON

LOT 003-4

PURCHASERS: AMIN SULTAN VIRANI CONTACT NO: 416-779-0106
SALLY VIRANI 416-779-0106

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Qty: 1

Valance

Optional Upgrade

944

Optional Valance (Trim Only) VIKING I/II/III

Ceramics

Qty: 1

Foyer Floor

Upgrade 4 Tile

SEE SKETCH # 10

24 TILE DIRECTION

PAGE 25

FOR 12 X

Qty: 1

Kit/Brk Floor

Upgrade 4 Tile

SEE SKETCH # 11

TILE DIRECTION

PAGE 26

FOR 12 X 24

Qty: 1

KITCHEN

Optional Extras Upgrade additional backsplash behind chimney hoodfan Upgrade 5

Qty: 1



11-Aug-21

Sales Selection Sheet

20-2257 ELEV A THE CALVERTON

LOT	003-4	20-2257 ELEV A THE CALVERTON
PURCHASERS:	AMIN SULTAN VIRANI SALLY VIRANI	CONTACT NO: 416-779-0106 416-779-0106
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED	HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

		AMOUNT:
953	M. Ensuite Shower Floor	Qty: 1
955	M.Flir.Pow Floor	Qty: 1
44	Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle. Purchasers acknowledge: Heathwood Homes and its contractors will not be liable for any damage on items placed/installed above a FP after closing	Qty: 1
967	Kitchen	Qty: 1
984	Master Ensuite	Qty: 1
350	Optional Extras - PAINT / STAIN - Custom	Qty: 2

Stain stair landing less than 25sq/ft in sambucca. For stair with metal or oak pickets only. Unfinished Pre-sanded smooth hardwood will be installed and to be stained in sambucca to match the stairs

- This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
- All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
- In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
- The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- Selections will not be processed unless signed by Heathwood Homes Head Office.
- The selections made on this schedule are final and cannot be changed once submitted.
- The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug 11, 2021 Amin Virani Purchaser
 Aug 11, 2021 Amin Virani Purchaser
 Date
 Date
 Approved - Décor Consultant
 Approved - Décor Consultant

Date Approved: HEALTHWOOD HOMES (UPCOUNTRY) LIMITED



11-AUG-21

Sales Selection Sheet 2 of 3

LOT	003-4	20-2257 ELEV A THE CALVERTON	
PURCHASERS: AMIN SULTAN VIRANI		CONTACT NO: 416-779-0106	
SALLY VIRANI		416-779-0106	
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED		HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Plumbing

226	STANDARD Kitchen Sink Option	Qty: 1
	KINDRED Kitchen Sink Collection - Reginox NS1930U/9 Stainless Kitchen Single Bowl Undermount Sink (or equivalent) PAGE 31	
264	Moen -METHOD	Qty: 1
	Chrome one-handle low arc bathroom faucet Single-Hole Faucet (no plate)- (Model: 6810) PAGE 35	
	MAIN POWDER ROOM	

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug 11, 2021 Amin Sultan Virani Purchaser

Date

DATE APPROVED -

Decor Consultant

Aug 11, 2021 Sally Virani Purchaser

Date

Purchaser

Date Approved: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

CU UPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON


24 of 51

The Calverton

ELEVATION A:
2,212 SQ FT

20-2257 ELEV. A

Sketch #9

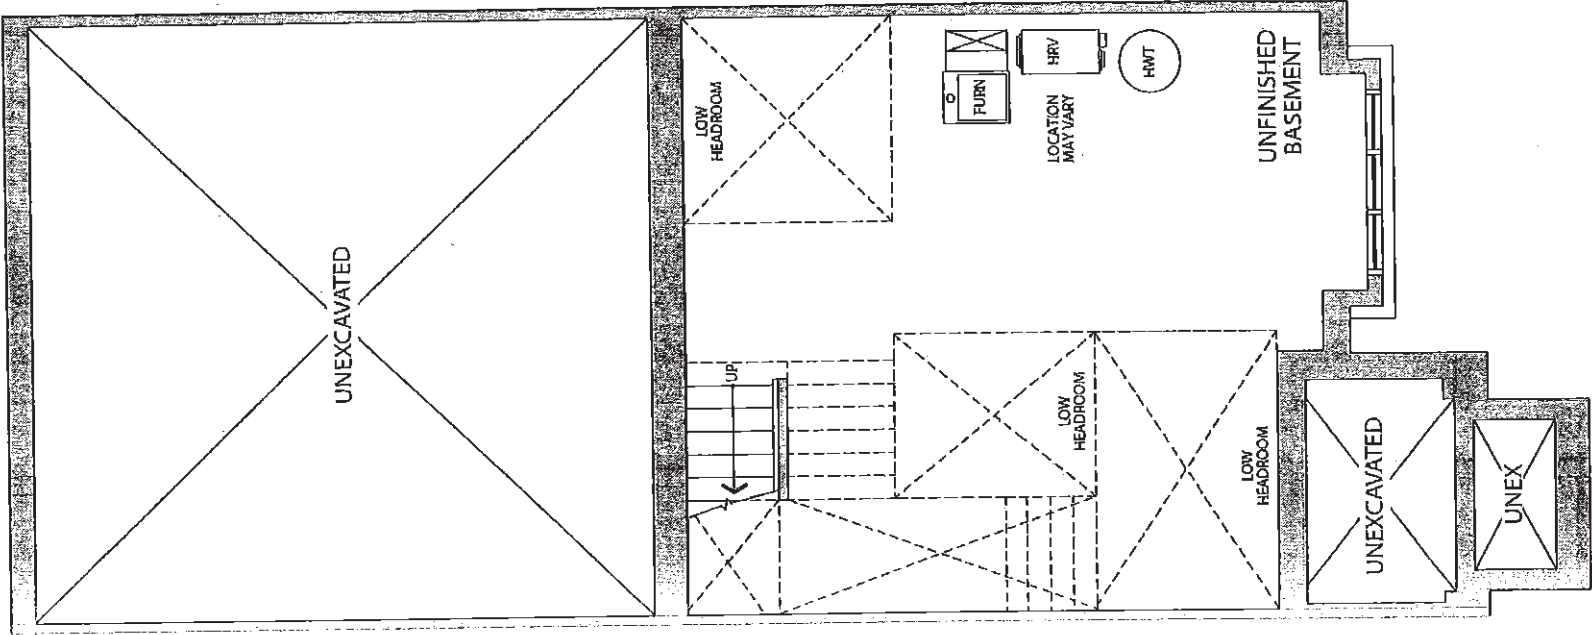

BASEMENT
ELEVATION A

CU-COUNTRY LANE/UPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON


25.51

The Calverton

20-2257 ELEV. A

ELEVATION A:
2,212 SQ FT

Sketch # 10

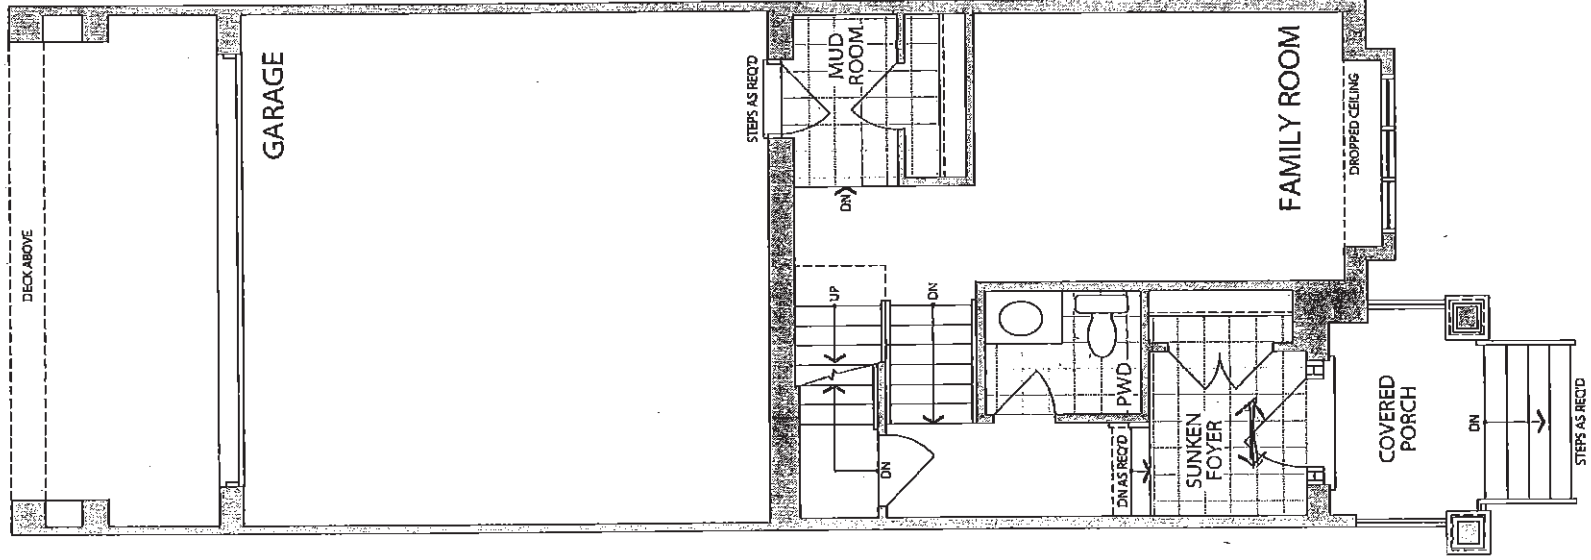

LOWER LEVEL
ELEVATION A



CU-COUNTRY LANE/UPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON


26051

The Calverton

20-2257 ELEV. A

ELEVATION A:
2,212 SQ FT

Sketch # 11

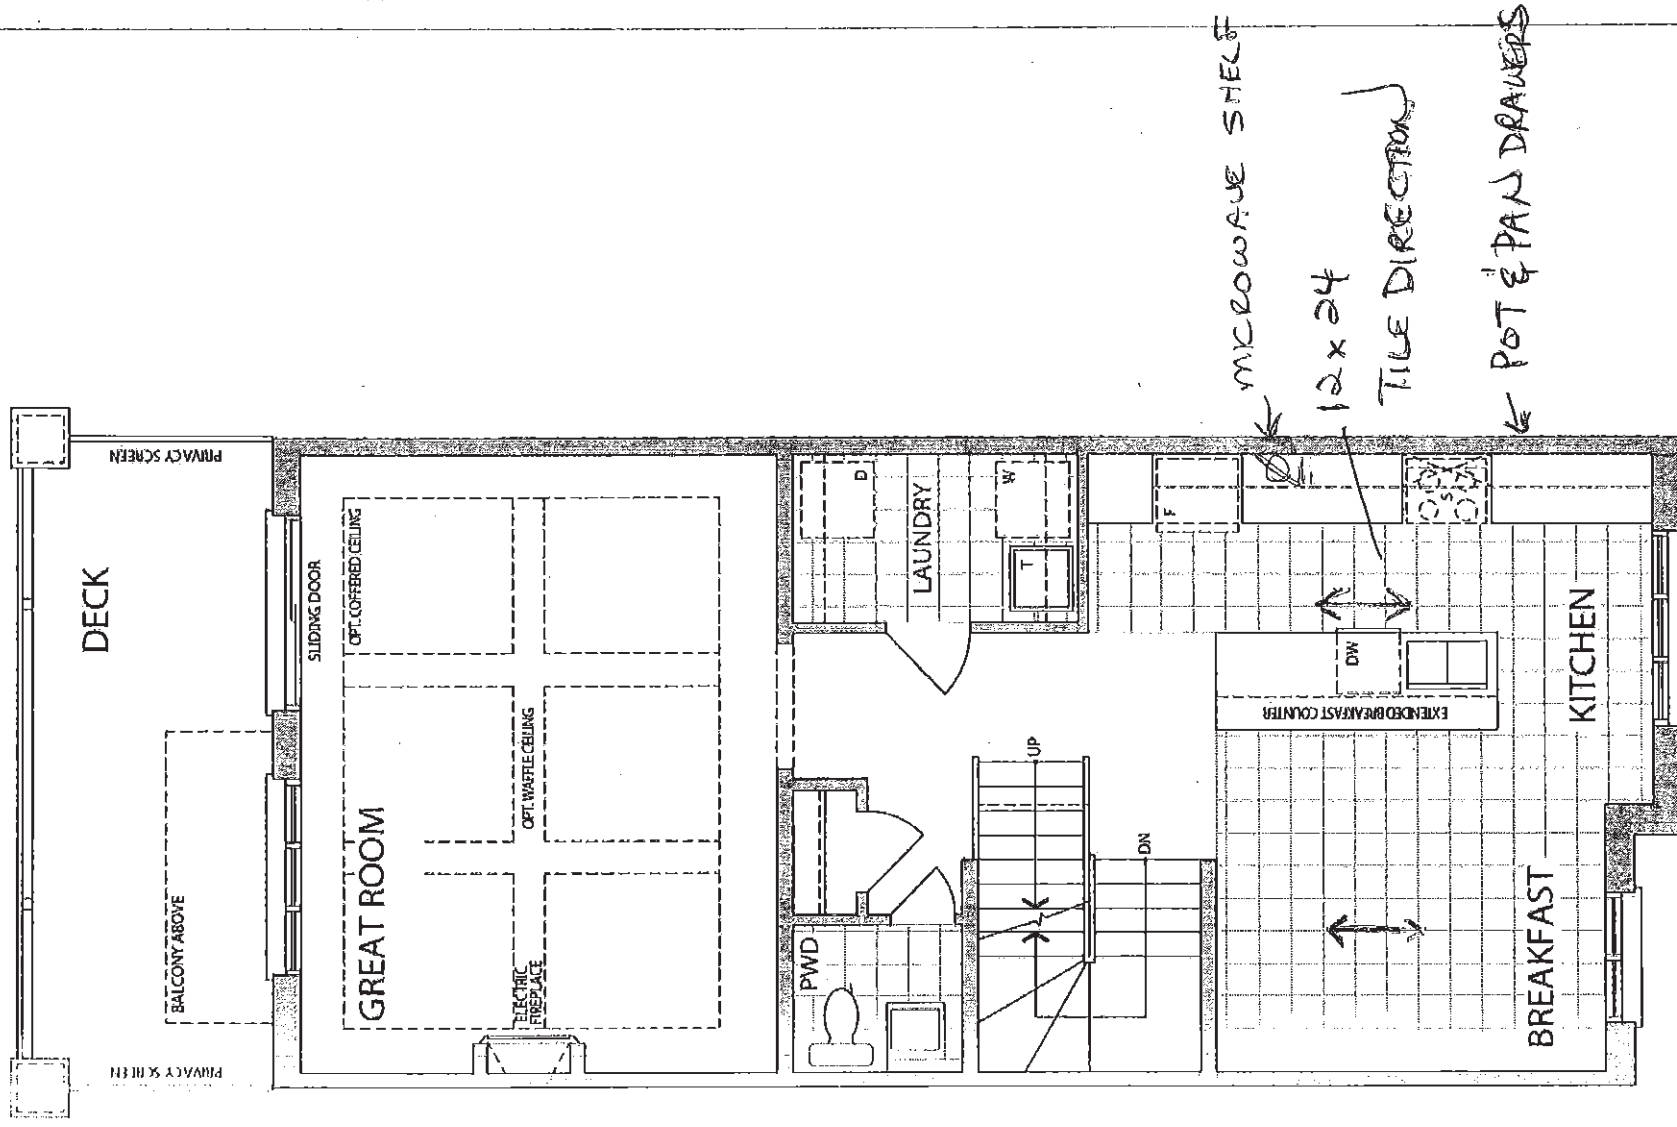

MAIN LEVEL
ELEVATION A



CU-COUNTRY LANE / UP COUNTRY
 LOT 3-4
 20-2257 ELEV A
 THE CALVERTON

27 of 51

Sketch #12

MICROWAVE SHELF & PLUG CLASSIC KITCHEN

BANK OF POT DRAWERS

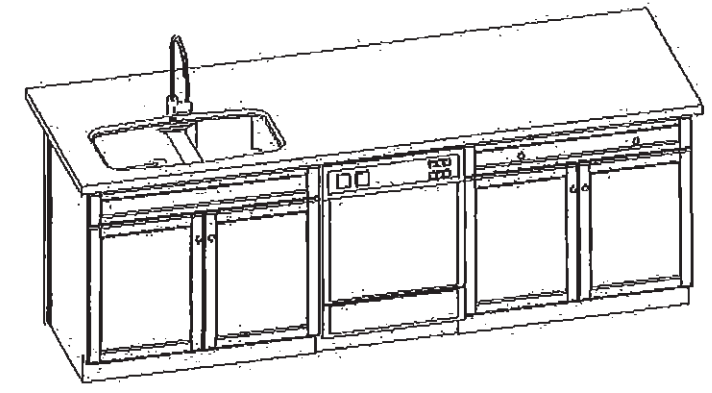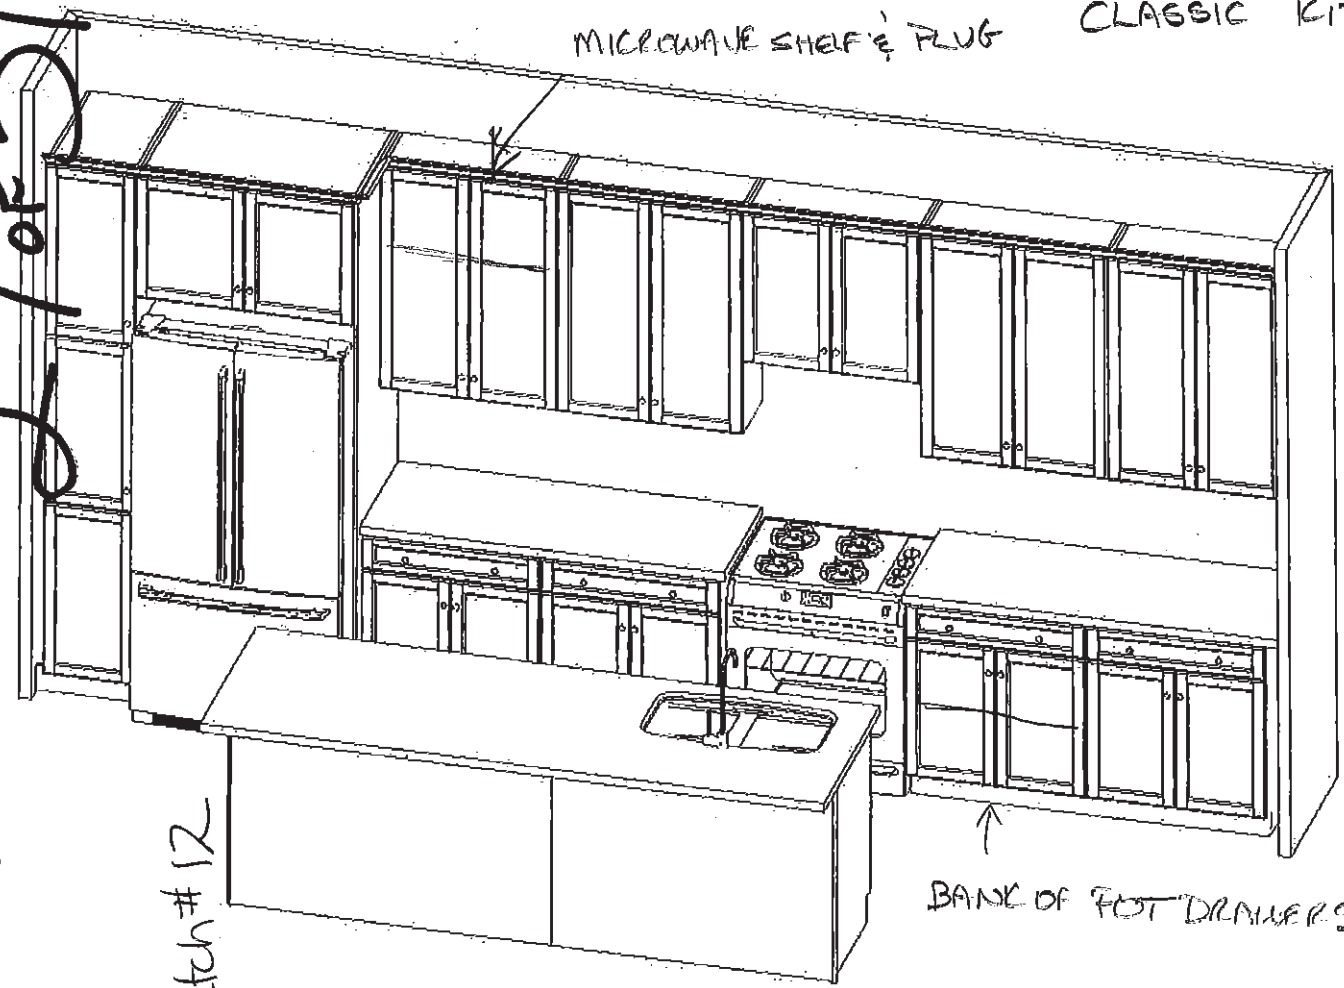

FRENDEL
 KITCHENS LIMITED
 1350 Shawson Drive, Whitby, ON L4W 1C5

HEATHWOOD HOMES
 COUNTRY LANE, WHITBY
 MODEL: 20-2257 (2007)

STANDARD CONTRACT INCLUDES:

Appliance Openings

- Hood Opening: 30" W builder hood
- Fridge Opening: 37 3/8 "W X 73 3/8"
- Fridge cabinet: 30cm deep
- Stove Opening: 30" Freestanding
- Dishwasher Opening: 24"

Standard Kitchens Scope:

- 100cm H wall cabinets
- Std. Blum Hinges- **not soft close**
- Std. Metabox Drawers- **not soft close**
- Min 40cm W drawer
- Backing on all cabinets
- Countertop by others
- Upgrade applied paneled fridge & dishwashers supply only (appliance hardware by others)

Classic Collection

Optional Upgrade to Includes:

- Top Drawer Construction (In lieu of Standard bank of drawers)
- Tandem Box **Soft Close Drawers**
- Blumotion **Soft Close Hinges for Doors**
- Crown Moulding
- Deep Fridge Upper w/Deep Panel
- Tall upper Cabinets

THIS DRAWING IS FOR DESIGN PURPOSES ONLY.
 IT IS NOT AN EXACT RENDITION.

28/2021

CU-COUNTRY LANE / UP COUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON


28 of 51

The Calverton

20-2257 ELEV. A

ELEVATION A:
2,212 SQ FT

Sketch # 13

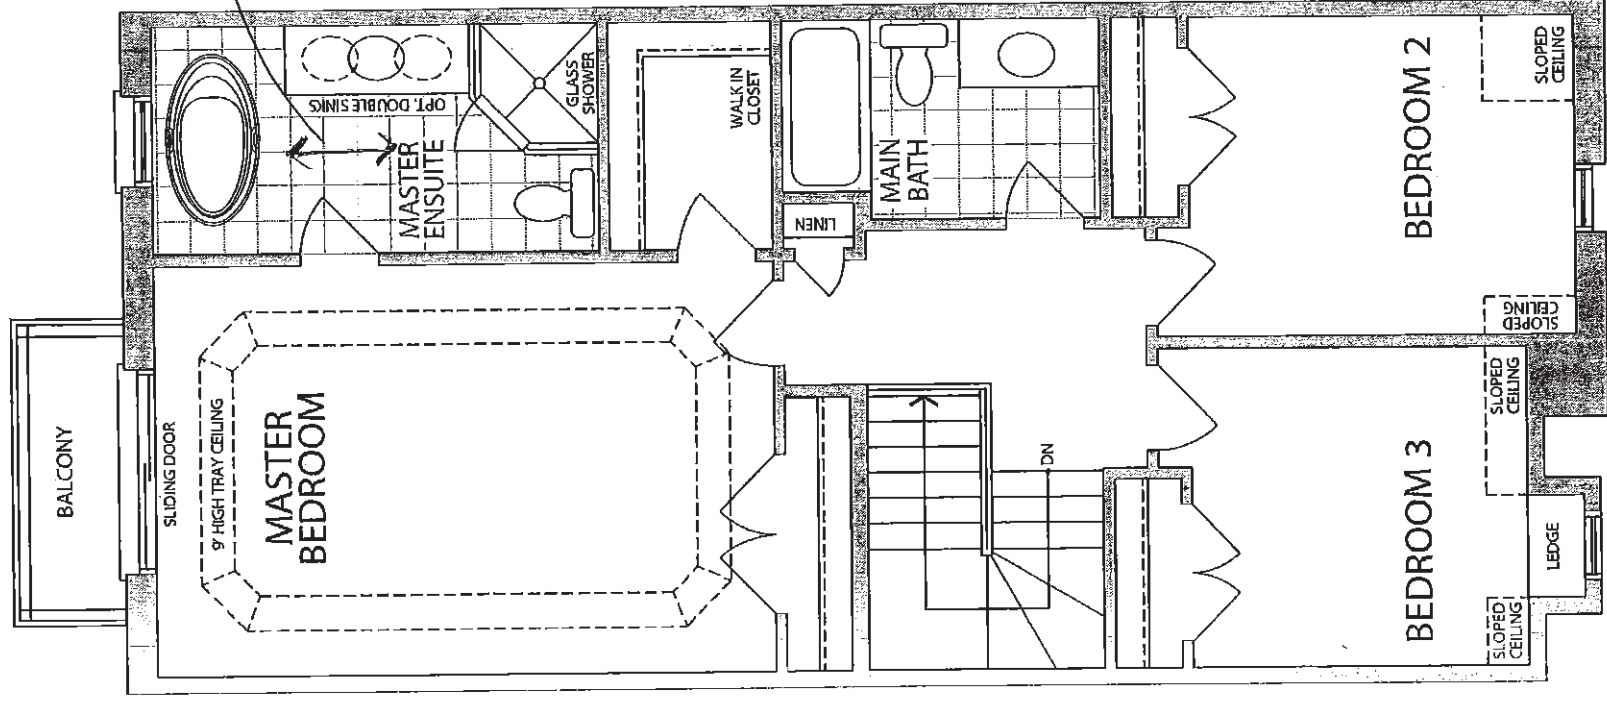


UPPER LEVEL
ELEVATION A




29 of 51

CU-COUNTRY LANE / UP-COUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON


MASTER ENSUITE
(2ND FLR)

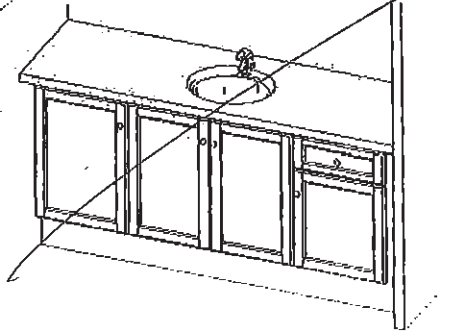

OPT. DOUBLE SINK

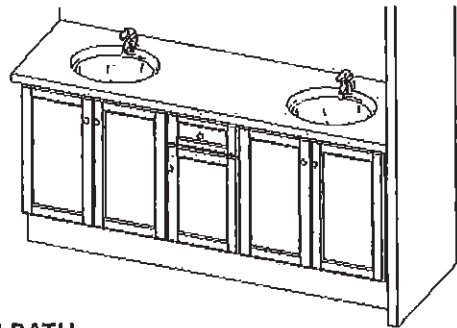


MAIN BATH
(2ND FLR)





TOP DRAWER

POWDER
(LOWER FLR)



OPT. LAUNDRY UPPERS
(MAIN FLR)

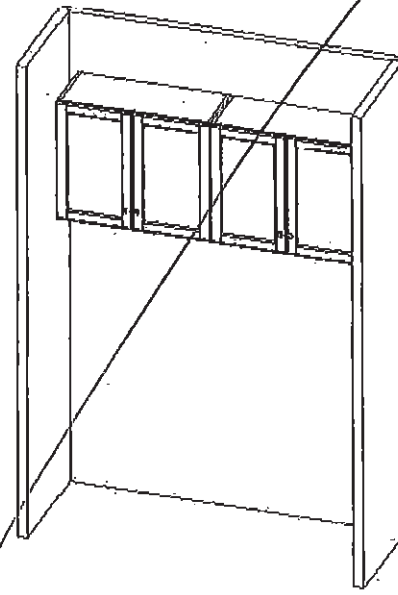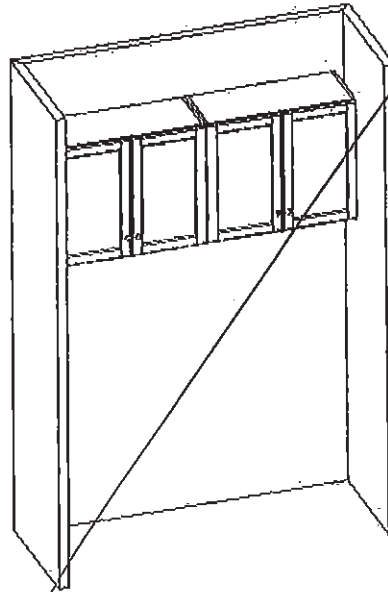

FRENDEL
KITCHENS LIMITED

1350 Shawson Drive, Mississauga, ON L4W 1C5

HEATHWOOD HOMES
COUNTRY LANE, WHITBY
MODEL: 20-2257 (2007)

STANDARD CONTRACT INCLUDES:

Standard Vanity & Laundry Scope:


- Powder by others, pedestal
- All vanities include laminate top
- Std. Blum Hinges- **not soft close**
- Std. Tandem Box Drawers- **Soft Closing**
- Master Ens: (x1) Top drawer
- Mains: Full height doors (top drawers added if Masters can't accommodate)
- Optional laundry base & wall cabinets

THIS DRAWING IS FOR DESIGN PURPOSES ONLY.
IT IS NOT AN EXACT RENDITION.

o/28/2021

CU-COUNTRY LANE / UPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

30 of 51

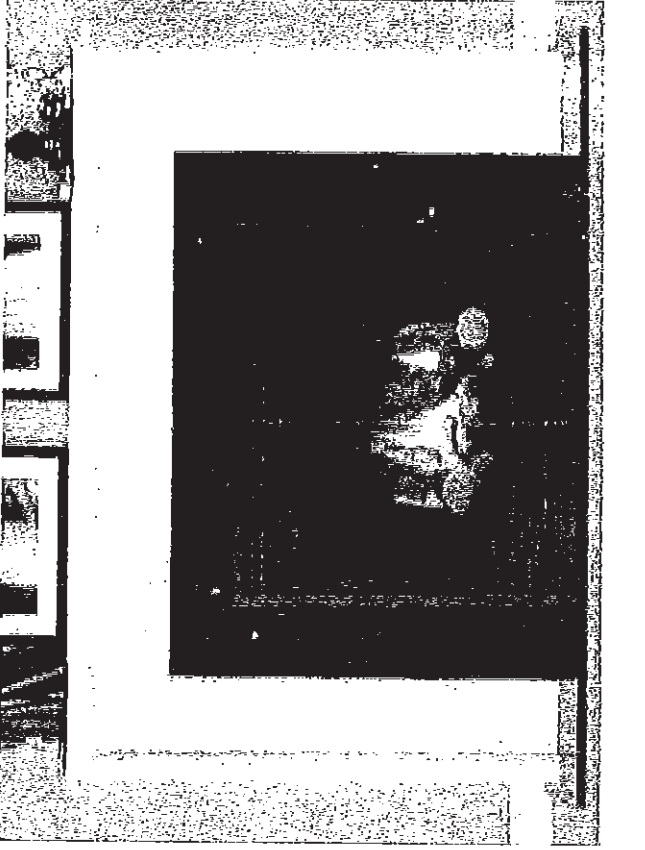

' CABINET'

NEAS NF17 Mantel



Handwritten signature or initials.

CU-COUNTRY LANE / UPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

31 of 51

Stainless Steel | 122.0264.716

FAMILY : Sinks | SERIES : Reginox | MODEL : NS1930U/9 | FINISH : Stainless Steel | INSTALLATION TYPE : Undermount

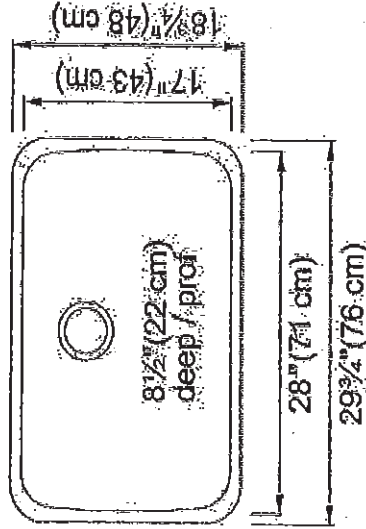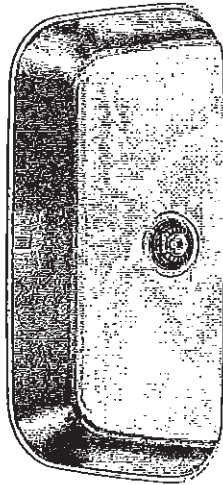

TECHNICAL DATA	
Width overall	18 3/4"
Length overall	29 3/4"
Width of large bowl	17"
Length of large bowl	28"
Depth of large bowl	8 1/2"
Cabinet Size	36"
Number of Bowls	1
Waste Outlet Diameter	3 1/2"
Cut-Out Template	Yes
Faucet Hole	None
Type of Material	18 Gauge Stainless Steel
Surface Finish	SILK
Special feature	Rear Drain Waste Hole Location
Waste Kit Included	YES




CU-COUNTRY LANE / upcountry
LOT 3-4
20-2257 ELEV A
THE CALVERTON

32 of 51

STANDARD KITCHEN FAUCET

Align

Modern

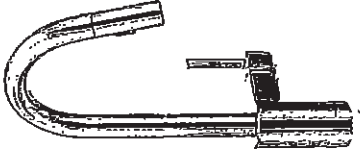

Single Handle Pull-Down Kitchen
Faucet*

Model 7565†

Handwritten signature or initials.

CU-COUNTRY LANE / UPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

33 of 51

*American
Standard*

**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)
- ☐ 0641.400 Faucet holes on 4" (102mm) centers
- ☒ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep


Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:	
☐ Color:	☐ White ☐ Linen
☐ Faucet Finish:	
☐ Supplies:	
☐ 1-1/4" Trap:	
☐ Nipple:	


* See faucet section for additional models available

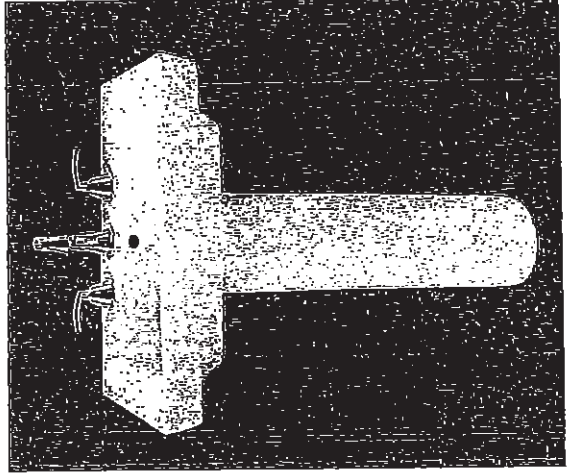

SEE REVERSE FOR ROUGHING-IN DIMENSIONS.

CU-COUNTRY LANE / OUPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

34 of 51

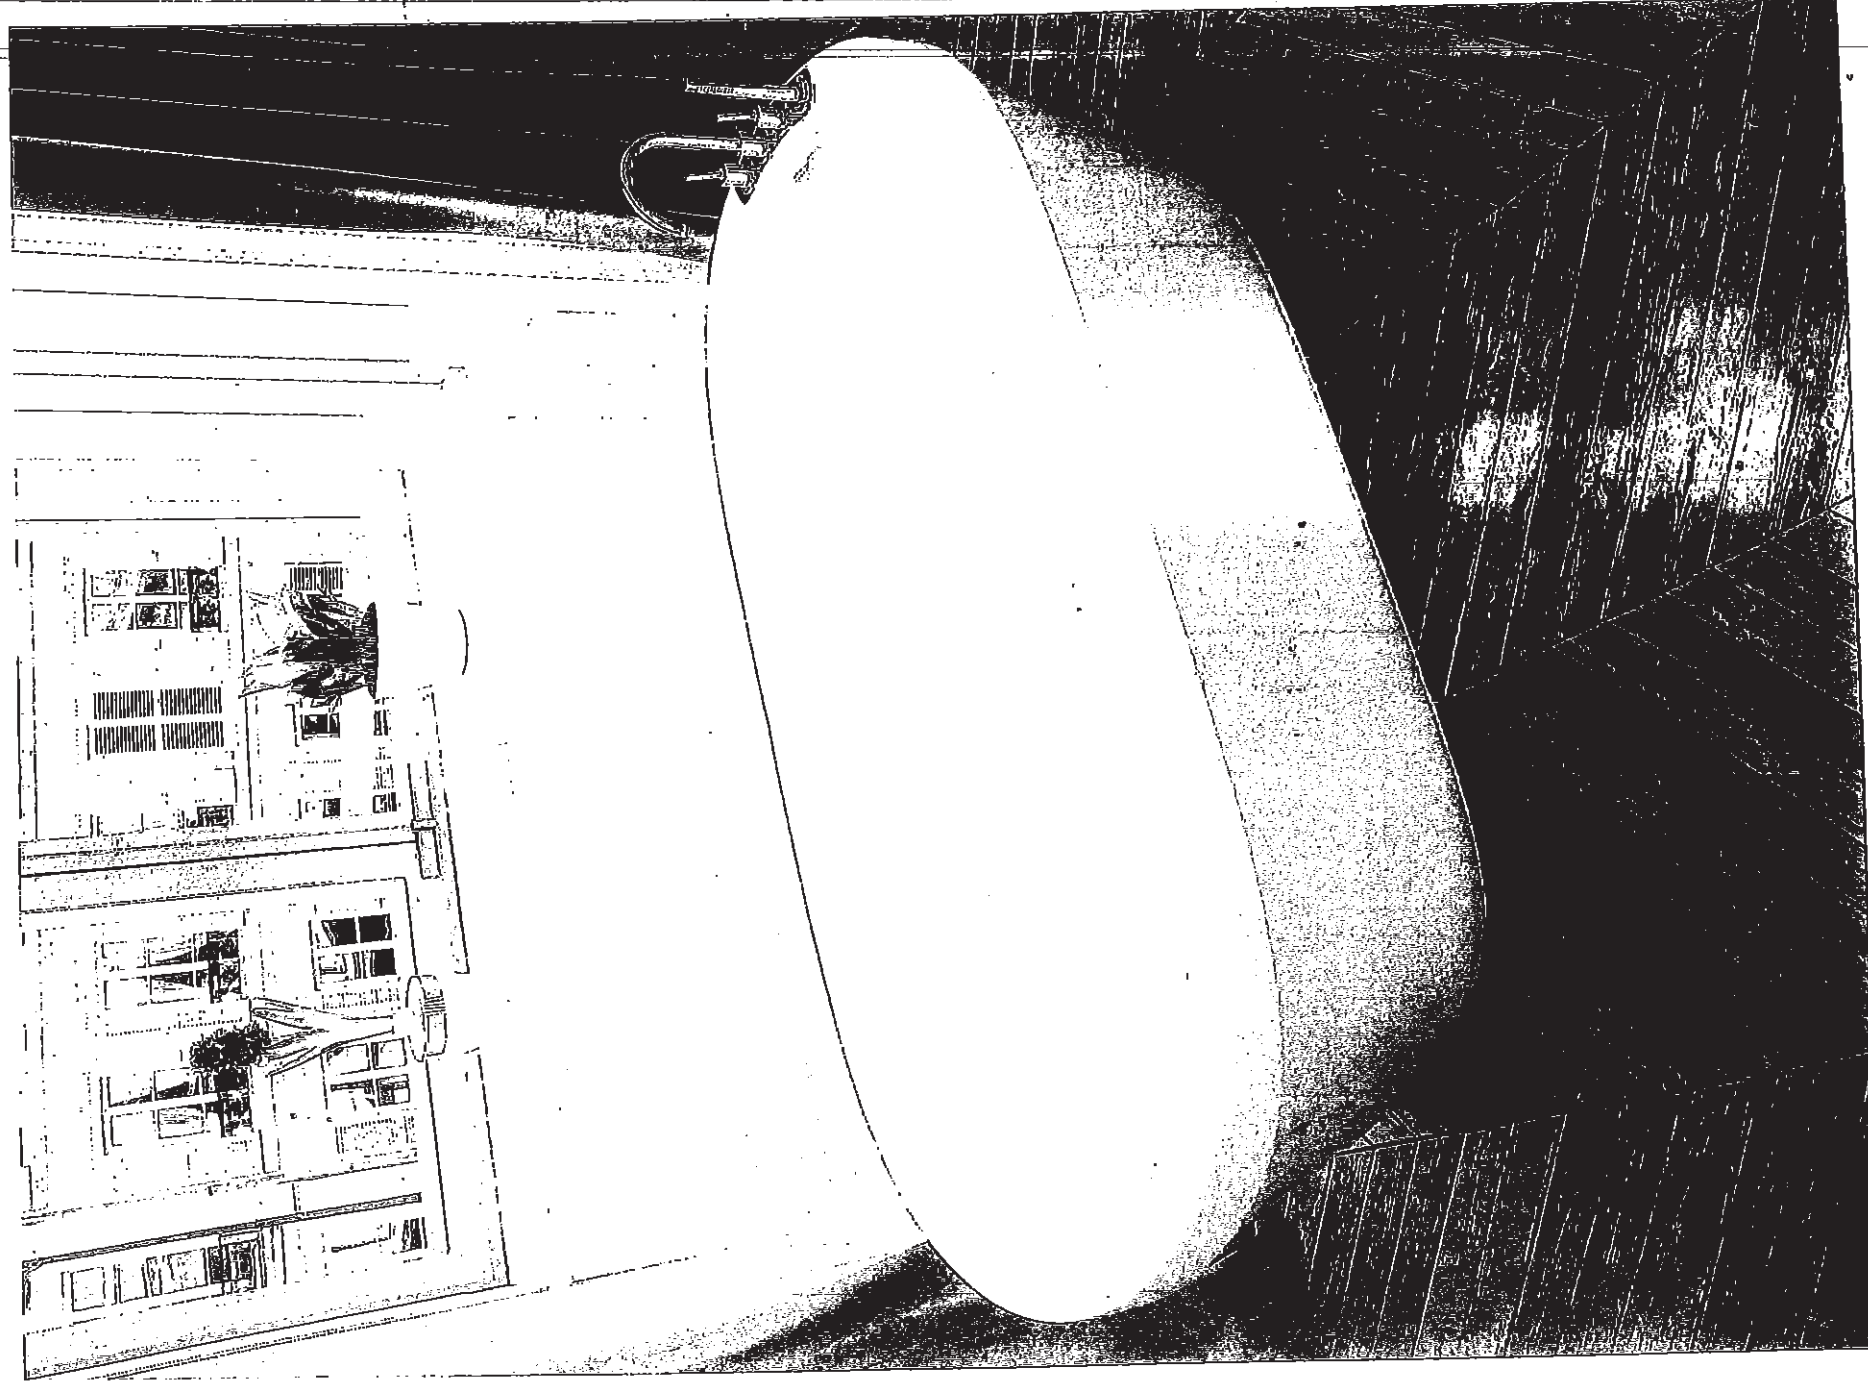

Demi CF2007


34 of 51

CU-COUNTRY LANE/UPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

35 of 51

Method™

Traditional | Transitional | Modern
A modern blend of flat planes and curves
gives Method faucets and accessories an chic look.

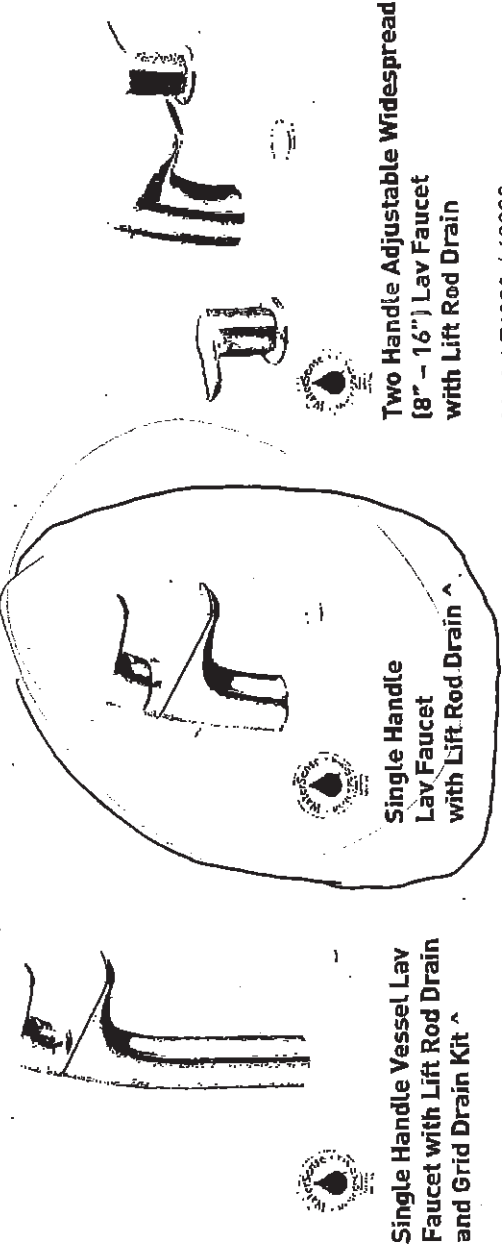

Model 6810 / A2020

Chrome
Other

Model 6810

Chrome
Other

Model T6820 / 69000

Chrome
Other



Two Handle
Roman Tub Faucet

Model T986 / 4796

Chrome
Other



Two Handle Roman Tub
with Hand Shower

Model T987 / 9796

Chrome
Other



Two Handle Adjustable Widespread
(18" - 16") Lav Faucet
with Lift Rod Drain

Model T6820 / 69000

Chrome
Other



Tub Drain Half Kits Available**

Chrome
Other



Tub Drain Half Kits Available**

Chrome
Other




CU-COUNTRY LANE / UPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

36 of 51

Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621+

VANITY SINKS AND PEDESTAL




Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183+

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP+
(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS

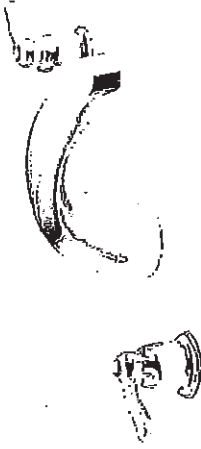

2 Handle Roman Tub with 9" Spout
Model 4796 / T990+

FREESTANDING TUB FAUCETS


Handwritten signature or mark.

SCB51430 Canopy Hood




Alito Collection

Makes a statement of strength and power as the stainless steel frame gleams under your kitchen lights. It features baffle filters, tow bright LED lights in each corner, a three speed control panel, and a quiet, powerful motor. The bold design and strong stainless steel frame encasing the fan will make this machine the focus of your kitchen. Fitted with time-delay "OFF" options up to nine minutes.

Cyclone

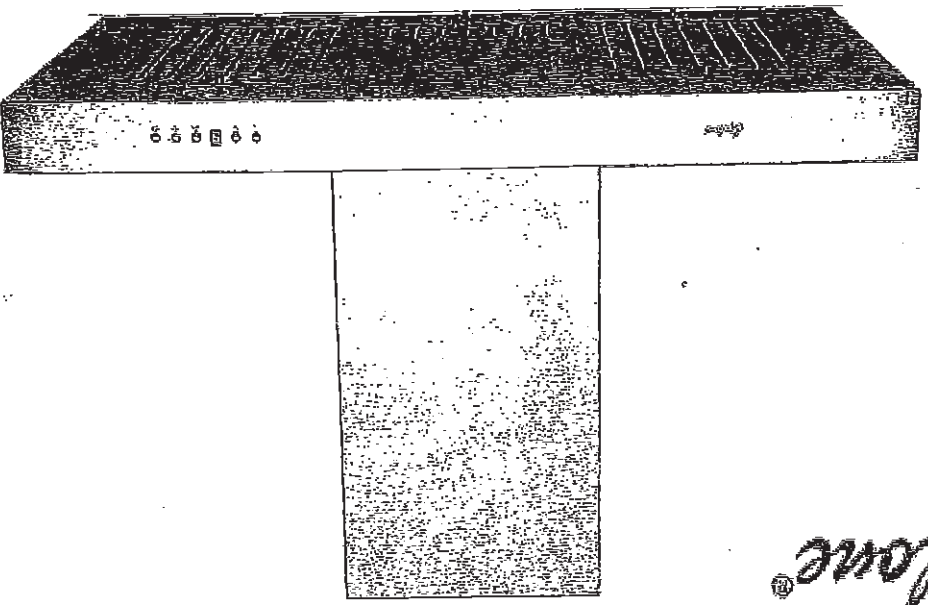

- Specifications**
- Air Flow Volume: 550 CFM
 - Colours: Stainless Steel
 - Dimensions: W:30" H:44.5" D:19.5"
 - Electrical Connection: 120V/60Hz
 - Electrical Consumption: 200 watts
 - Fan Speed: 1254 RPM
 - Sones: Min. at 2 and Max at 6
 - Venting: 6" Round (Top Only)

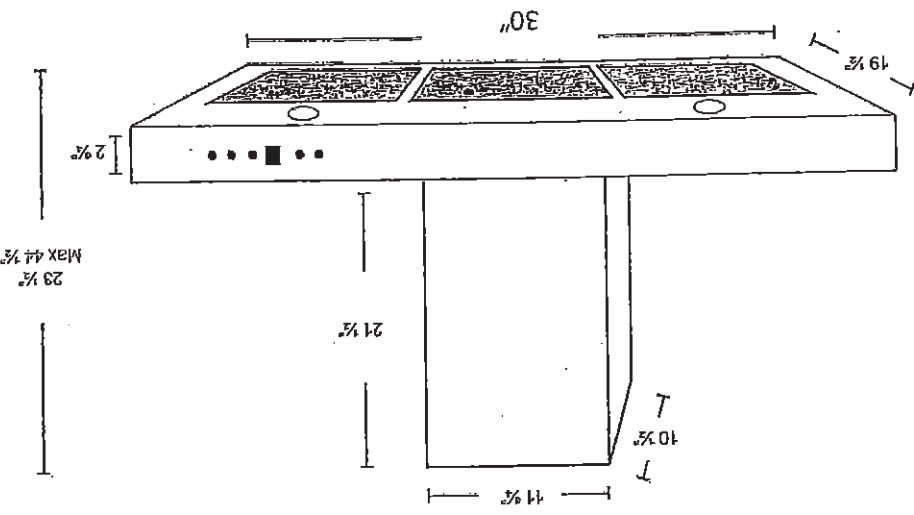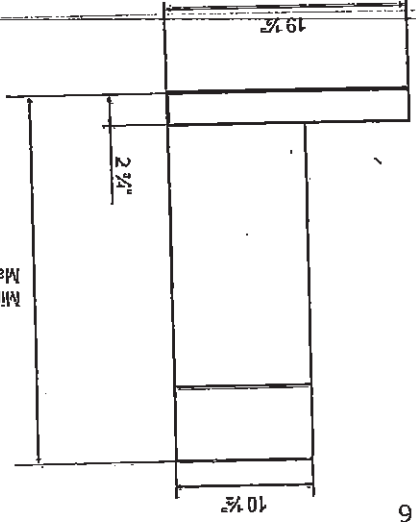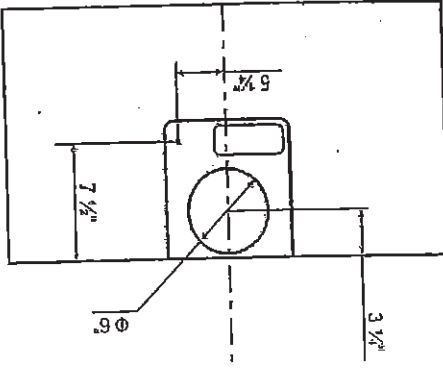

CU-COUNTRY LANE/upcountry
LOT 3-4
20-2257 ELEV A
THE CALVERTON

38 of 51

CU-COUNTRY LANE /UPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

39 of 51



Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

WRF53SMB
WRF53SMB

WRF53SMB
WRF540CWB



Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

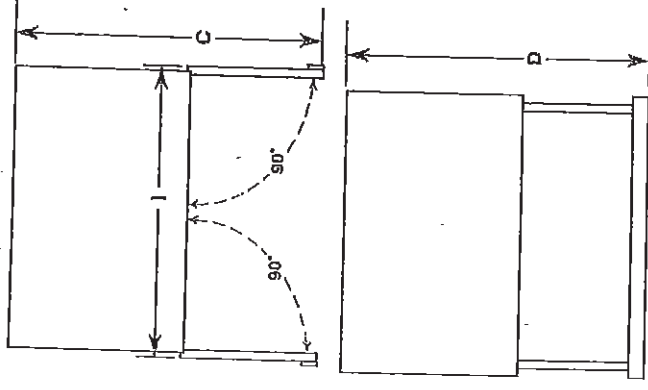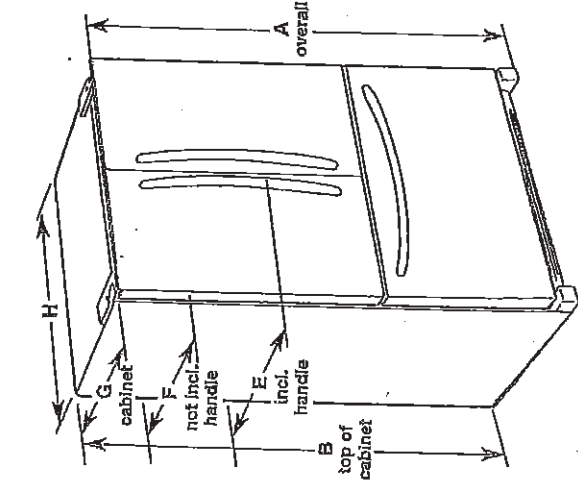

PRODUCT DIMENSIONS


Model Number/Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
WRF53SMB 25.2 cu. ft.	70 1/2" (178.1 cm)	68 3/4" (174.8 cm)	48 1/2" (122.1 cm)	53 1/2" (135 cm)	55 1/2" (90 cm)	32 1/2" (83.7 cm)	29 1/2" (74 cm)	35 1/2" (90.5 cm)	43 3/4" (110.2 cm)
WRF53SMB 25.2 cu. ft.	70 1/2" (178.1 cm)	68 3/4" (174.8 cm)	48 1/2" (122.1 cm)	53 1/2" (135 cm)	5				

CU-COUNTRY LANE / UPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

40 of 51

FRONT CONTROL
GAS RANGES

Whirlpool

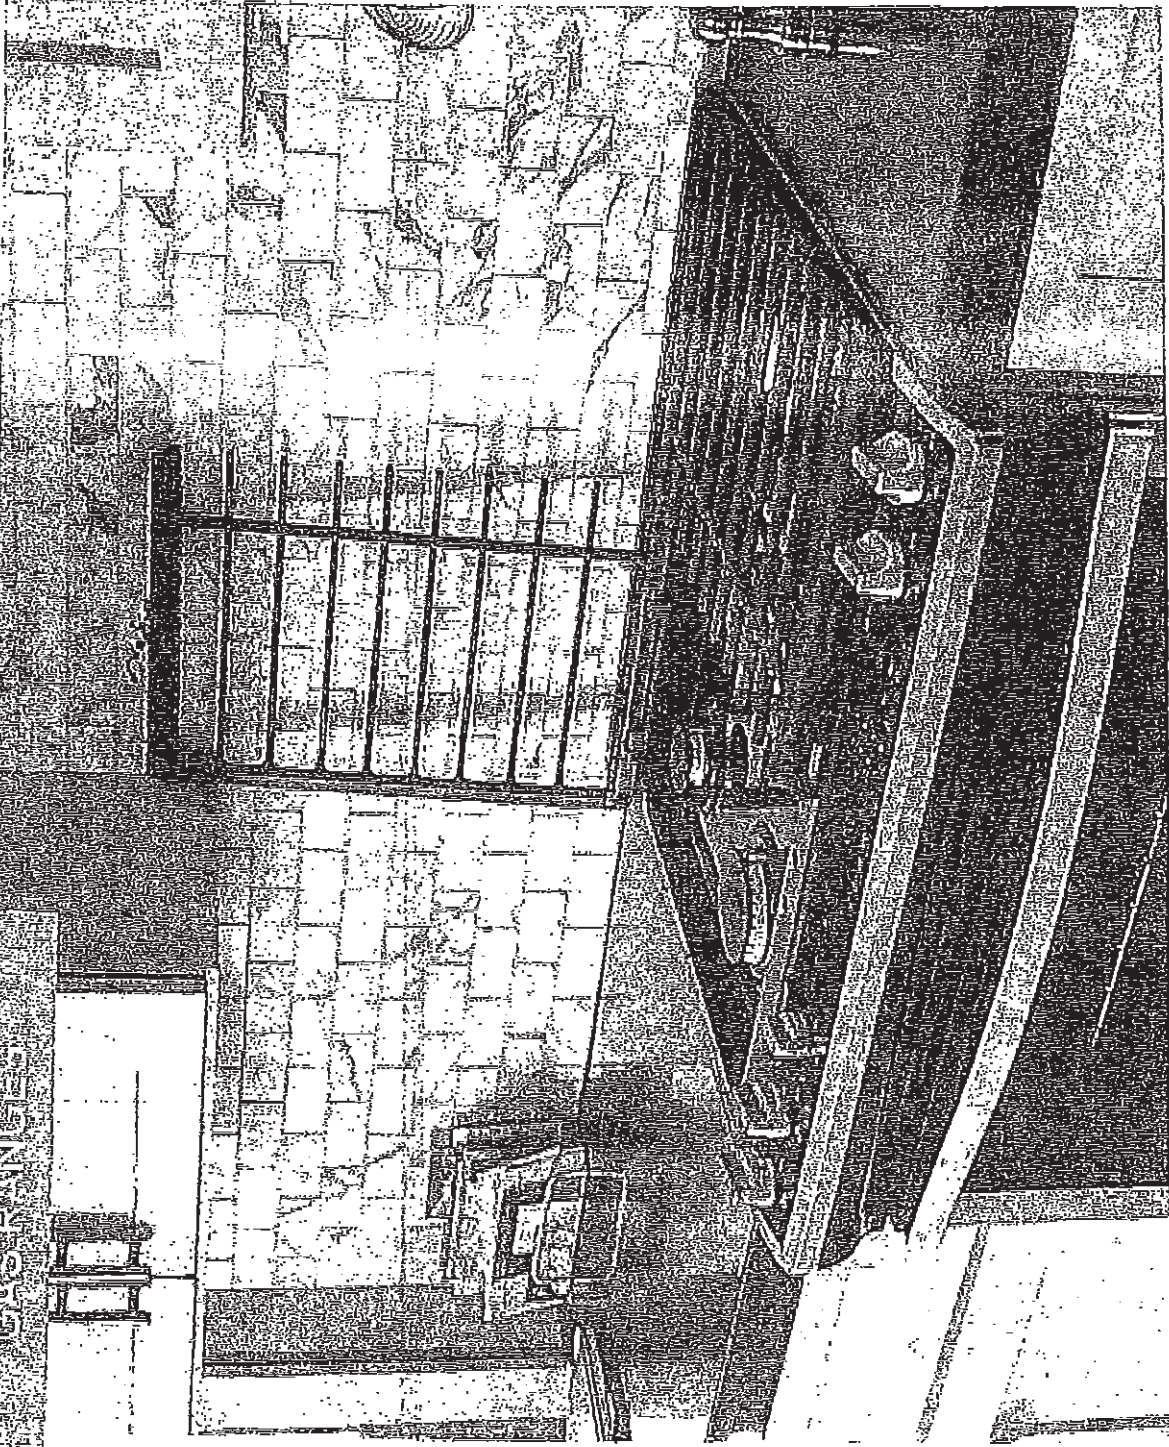

FEATURING



TimeSaver™ system

The TimeSaver™ system's Frozen Bake Technology allows you to skip preheating for favorites like pizza, lasagna, chicken nuggets, fries or pies so you can cook frozen foods faster.*



HeatRight™ system

The HeatRight™ system's True convection helps you to cook food faster* with a rear fan and third heating element to circulate hot air over, under, and around food.



CompleteClean™ system

The CompleteClean™ system's EZ-2-Lift™ hinged grates give you quick access to spills on the cooktop. The industry first hinged design allows you to wipe up under them without removing them entirely. For a more thorough clean, the grates are also dishwasher-safe.

Every day, care™

From the #1 Selling Appliance brand in the USA*

Handwritten signature and a circled 'A'.



30" (76.2 cm) Slide-in Gas Range

PRODUCT MODEL NUMBERS

WEG584HD

WEG760HD

WEG745H0F

GAS SUPPLY REQUIREMENTS

Gas supply line:

- Provide a gas supply line of $\frac{1}{2}$ " (1.3 cm) rigid pipe to the range location. A smaller size pipe or longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be $\frac{1}{2}$ " (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.

NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON[®] tape.

Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 to 5 ft (122 to 152.4 cm) long, $\frac{1}{2}$ " (1.3 cm) or $\frac{3}{4}$ " (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.




- A $\frac{1}{2}$ " (1.3 cm) male pipe thread is needed for connection to the female pipethreads of the inlet to the appliance pressure regulator.

- Do not kink or damage the flexible metal tubing when moving the range.

- Must include a shutoff valve.

The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



- A. Gas supply line
- B. Shutoff valve "open" position
- C. To range

Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

Natural gas:

Minimum pressure: 5" WCP



Maximum pressure: 14" WCP

LP gas:


CU-COUNTRY LANE / UP-COUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

42 of 51


Front Control Gas Ranges

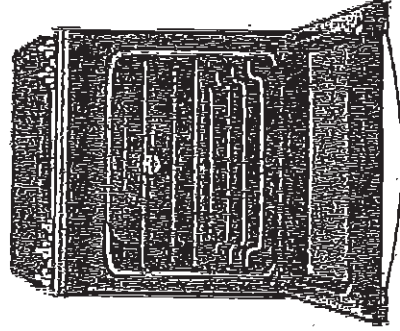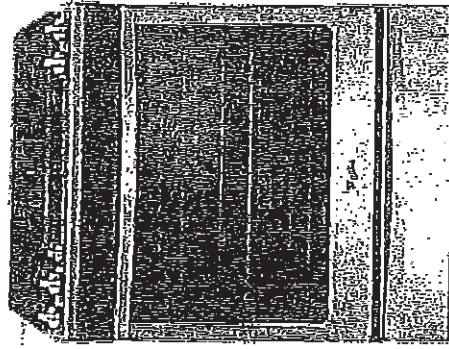

Available colors



S
Stainless
Steel



H
White
Finish



E
Black
Finish

WEG745HOF

30" Freestanding Range - 5.8 cu. ft.



TimeSaver™ system
• Frozen Bake™ Technology



HeatRight™ system
• True Convection
• Convection Conversion
• AccuSimmer™ burner
• Ceria. Oval burner
• Temperature Sensor




CompleteClean System
• EZ-2-Lift™ Hinged Grates
• AquadLift™ Self-cleaning Technology
• Dishwasher-safe knobs



ReadySet™ system
• (2) SpeedHeat™ burners
• Rapid Preheat
• Keep Warm
• Delay Cook

PRODUCT DIMENSIONS

The cabinet dimensions shown are for the standard 30" wide range. Cabinet dimensions for a 36" wide range are shown in parentheses.



1. 24" (24 1/2") high front panel
2. 24" (2

CU-COUNTRY LANE/SPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

43 of 51



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification



Whirlpool® Dishwasher with ENERGY STAR® qualification

CU-COUNTRY LANE/CPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

44 of 51

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDE310PLA	WDF530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF310PAF	WDF730PAY
WDF121PAF	WDF520PAD	WDT1710PAY
WDF310PAA	WDF530PAY	WDT1720PAD
WDF310PCA	WDF530PLY	WDT1770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit.

Instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.




Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 1/4" N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3985556) that meets all current AHAM/APMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.




CU-COUNTRY LANE/UPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

46 of 51

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool® Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW

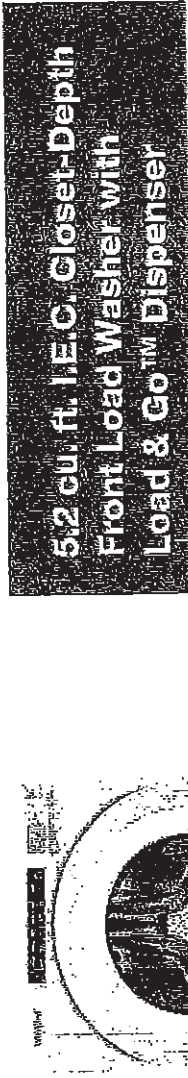

Whirlpool
5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser
Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
----	----

Power Cord Included

Yes

\$

CU-COUNTRY LANE/UPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

47 of 51

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS


Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.


Whirlpool Models* ✓

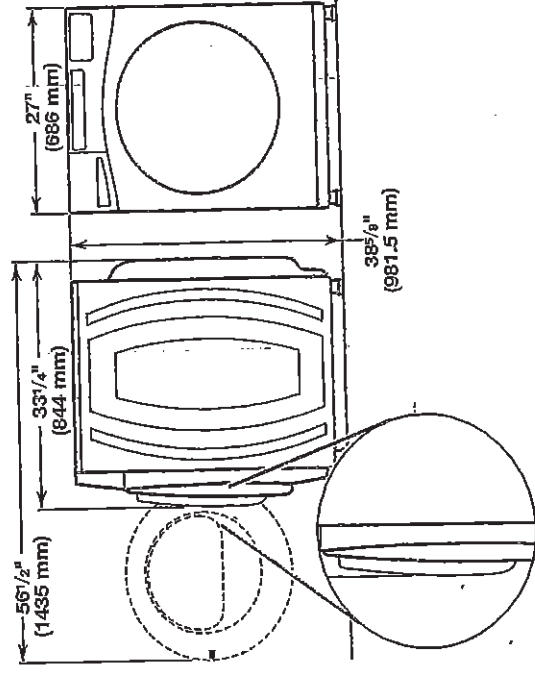

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

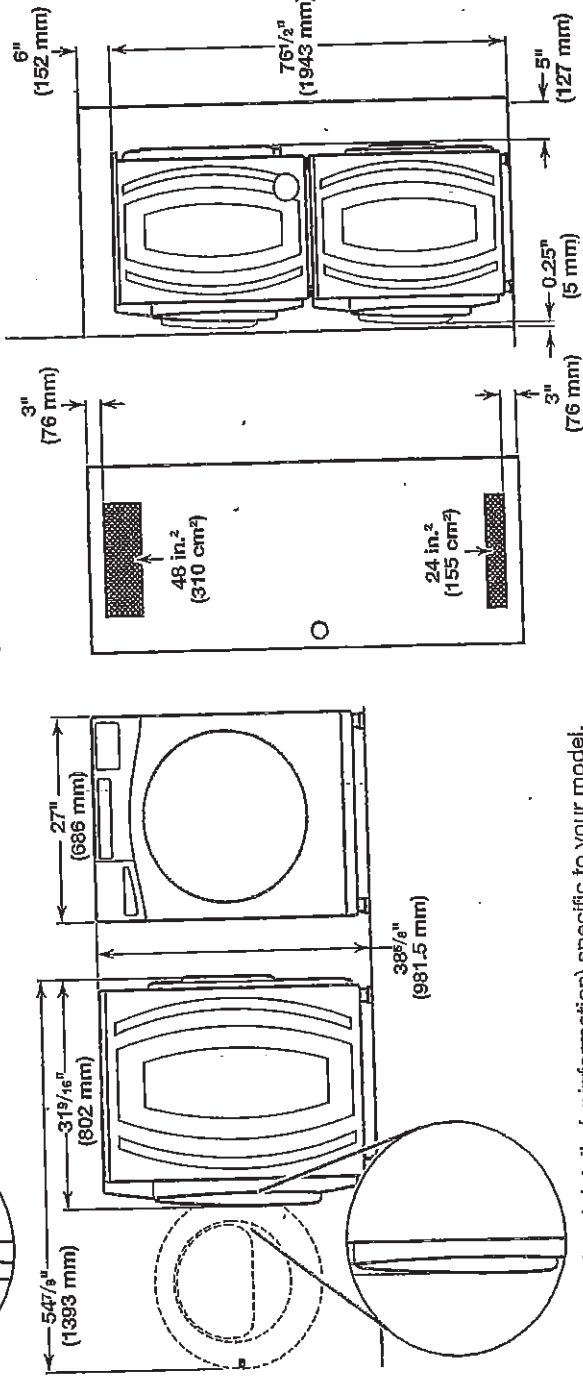


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

CU-COUNTRY LANE/UPCOUNTRY
 LOT 3-4
 20-2257 ELEV A
 THE CALVERTON


48 of 51

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation: X

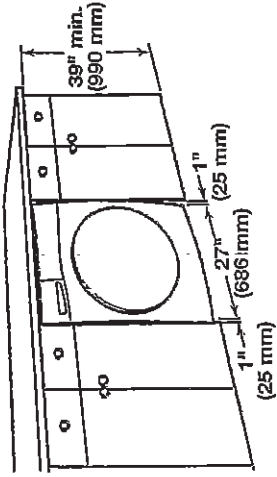

Recessed area or closet installation: X

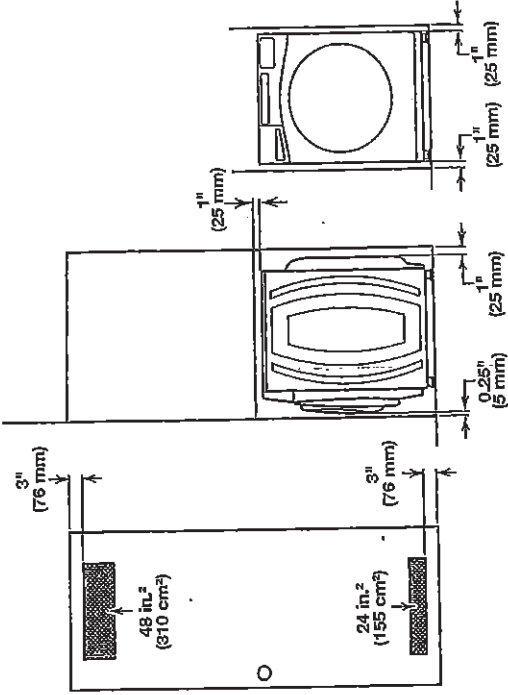

Custom cabinet installation: X

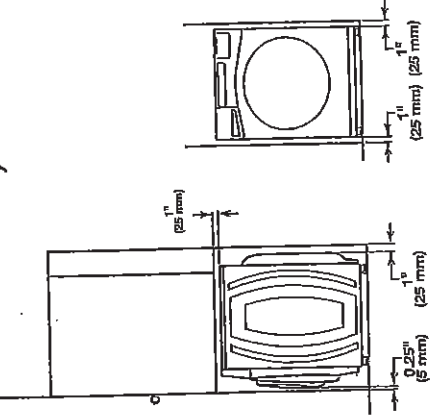


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

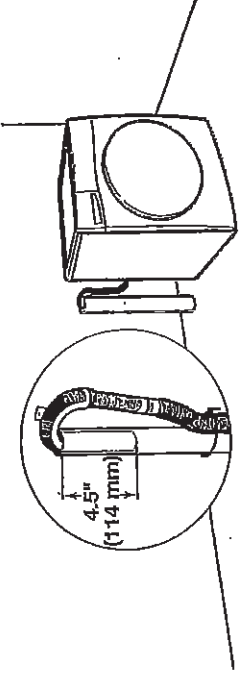


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

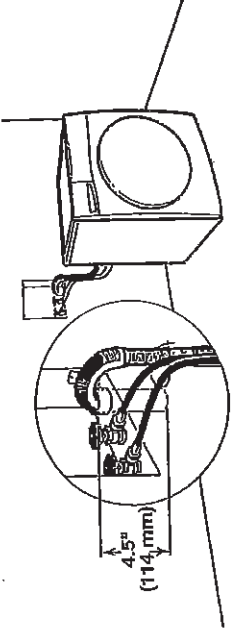

See requirements for floor standpipe drain system.

Laundry tub drain system

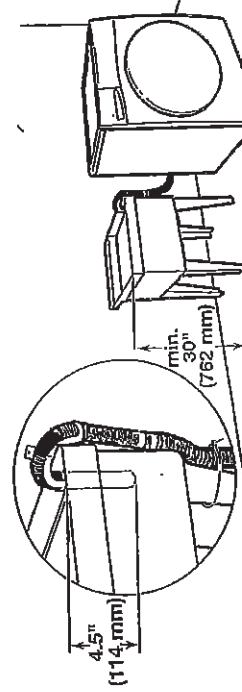


CU-COUNTRY LANE/UPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

49 of 51

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Certified English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW

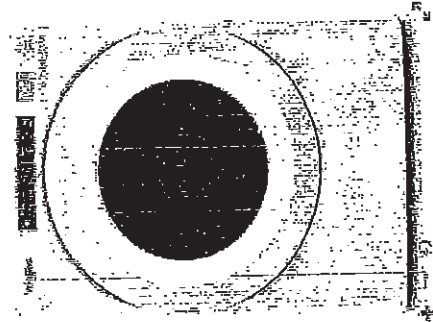

Electric
Touch-Style
Controls

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	139.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	69.53 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60
Power Cord Included	Yes


Handwritten signature and initials.

CU-COUNTRY LANE/COUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

50 of 51

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

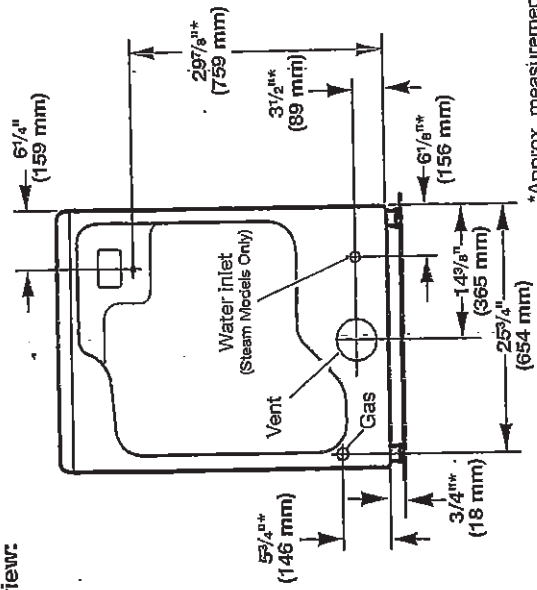

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances


For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required. Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector. **NOTE:** No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

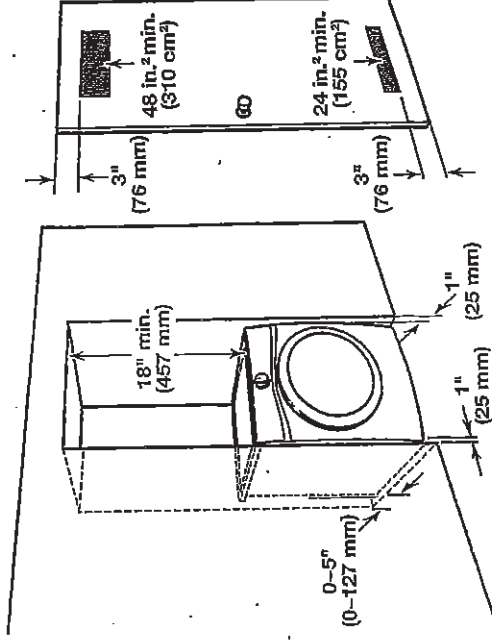

CU-COUNTRY LANE /UPCOUNTRY
LOT 3-4
20-2257 ELEV A
THE CALVERTON

51 of 51

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.

- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

! WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.

Failure to do so can result in death, explosion, or fire.

You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (4