

OPTIONAL DOUBLE SINKS IN MASTER ENSUITE BATHROOM

FULL BASEMENT STAIRS: PAINT GRADE

Date Approved _____

LOT 004-5

PURCHASERS: BITUPON BAROOAH
KUNJAN SHARMA

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

CONTACT NO: 647-219-7134
647-705-9937

Appliances

6-32 Kitchen HoodFan

Cabinetry

1-6236 Kitchen Cabinet Colour/Style

3-2086 Kitchen Cabinet Hardware

25-9166 Main Bathroom Cabinet Colour/Style

29-7672 Main Bathroom Cabinet Hardware

28-8801 Main Bathroom Countertop

20-9166 Master Ensuite Cabinet Colour/Style

22-7672 Master Ensuite Cabinet Hardware

21-8827 Master Ensuite Countertop

414-9166 Powder Room Lower Level Cabinet Colour/Style

416-7672 Powder Room Lower Level Cabinet Hardware

415-8796 Powder Room Lower Level Countertop

Carpet

37-9247 Bedroom 2 Flooring

38-9247 Bedroom 3 Flooring

14-9247 Family Room Flooring

36-9247 Master Bedroom Flooring

52-1079 Throughout Underpad

Ceramics

16-5480 Foyer Flooring

17-2225 Foyer Grout

UPG

☒ KITCHEN AID 600 CFM CHIMNEY STYLE WALL MOUNT HOOD
STAINLESS STEEL KWCU405SSS 30" Page 29

☐ CAMDEN CHOCOLATE CL Viking III MAPLE

☐ HARDWARE 9677 STD

☐ CHARLESTON ORCHID Viking III STD 3DL

☐ HARDWARE 135 STD

☐ Countertop INUKSHUK GREY P-344 LM Arborite

☐ CHARLESTON ORCHID Viking III STD 3DL

☐ HARDWARE 135 STD

☐ Countertop CALCUTTA MARBLE 4925K-07 Wilsonart

☐ CHARLESTON ORCHID Viking III STD 3DL

☐ HARDWARE 135 STD

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

☐ Dynasty Tex 40 oz Poly SANDY BEIGE DY 16611 STD

☐ Dynasty Tex 40 oz Poly SANDY BEIGE DY 16611 STD

☐ Dynasty Tex 40 oz Poly SANDY BEIGE DY 16611 STD

☐ Dynasty Tex 40 oz Poly SANDY BEIGE DY 16611 STD

☐ Underpad 500 Series STD

☐ Corte Milia Silver GE.CM.SIL.1313 Std 13 x 13

☐ Grout (27) Silver STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

08/20/2021

Date

Pragathi

Purchaser

Aug 20 21

Date

HS

Décor Consultant

08/20/2021

Date

Pr

Purchaser

-09-02-2021

MyRaen

Date Approved

HEATHWOOD HOMES (UPCOUNTRY) LIMITED

LOT 004-5

20-2257 ELEV B THE CALVERTON

PURCHASERS: BITUPON BAROOAH

CONTACT NO: 647-219-7134

KUNJAN SHARMA

647-705-9937

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Ceramics

4-5725 Kitchen Backsplash

☒ Colour and Dimension Bright Sand Beige QT.CD.SDB.0306.BR UPG_1 3 x 6 INSTALL IN BRICK PATTERN

5-2222 Kitchen Backsplash Grout

☐ Grout (105) Driftwood STD

7-9105 Kitchen/Breakfast Flooring

☒ Madison Series Beige Matte GE.MD.BGE.1818.MT UPG 1 18" X 18" Matte

8-2222 Kitchen/Breakfast Grout

☐ Grout (105) Driftwood STD

66-9105 Laundry Room Flooring

☒ Madison Series Beige Matte GE.MD.BGE.1818.MT UPG 1 18" X 18" Matte

67-2222 Laundry Room Grout

☐ Grout (105) Driftwood STD

30-9255 Main Bathroom Flooring

☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13"

31-2225 Main Bathroom Grout

☐ Grout (27) Silver STD

27-9020 Main Bathroom Tub Wall Tile

☐ Weave White QT.WV.WHT.0810 STD 8 x 10 INSTALL HORIZONTAL

26-2226 Main Bathroom Tub Wall Tile Grout

☐ Grout (00) White STD

23-9255 Master Ensuite Floor Tile

☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13"

24-2225 Master Ensuite Floor Tile Grout

☐ Grout (27) Silver STD

73-8661 Master Ensuite Shower Floor Tile

☐ Ontario Series Mosaic Snow White Matte OD.ON.SWT.0202.MT.N STD 2 x 2

74-2225 Master Ensuite Shower Floor Tile Grout

☐ Grout (27) Silver STD

147-8923 Master Ensuite Shower Jamb(s) and Sill(s)

☐ Shower Jamb / Sill Thassos White STD

104-9020 Master Ensuite Shower Wall Tile

☐ Weave White QT.WV.WHT.0810 STD 8 x 10 INSTALL VERTICALLY

105-2226 Master Ensuite Shower Wall Tile Grout

☐ Grout (00) White STD

191-2225 Mud Room Flooring

☐ Grout (27) Silver STD

190-5480 Mud Room Grout

☐ Corte Millia Silver GE.CM.SIL.1313 Std 13 x 13

32-9105 Powder Room Flooring

☒ Madison Series Beige Matte GE.MD.BGE.1818.MT UPG 1 18" X 18" Matte

33-2222 Powder Room Grout

☐ Grout (105) Driftwood STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

8/20/2021

Date

Purchaser

8/20/2021

Date

Décor Consultant

-09-02-2021

Date

Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY)

LIMITED

LOT 004-5

20-2257 ELEV B THE CALVERTON

PURCHASERS: BITUPON BAROOAH
KUNJAN SHARMA

CONTACT NO: 647-219-7134
647-705-9937

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Ceramics

369-5480 Powder Room Lower Level Flooring

☐ Corte Milia Silver GE.CM.SIL.1313 Std 13 x 13

370-2225 Powder Room Lower Level Grout

☐ Grout (27) Silver STD

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-8891 Great Room Fireplace Mantle

☐ Paint Grade Mantle- Cabinet (Per Plan) WHITE NF-17 STD

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-9130 Kitchen Countertop

☒ Quartz BAYSHORE SAND Group 1 UPG 3/4" with Mitered Edge

Hardwood

11-7501 Great Room Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl NATURAL Red Oak Pearl 3/4" x 3 1/4"

367-7501 Lower Level Hall Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl NATURAL Red Oak Pearl 3/4" x 3 1/4"

100-7501 Main Stairs Landing(s) Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl NATURAL Red Oak Pearl 3/4" x 3 1/4"

78-7501 Stair Landing to Lower Level Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl NATURAL Red Oak Pearl 3/4" x 3 1/4"

35-7501 Upper Hall Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl NATURAL Red Oak Pearl 3/4" x 3 1/4"

Interior Railings

145-8148 Main Stairs Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

Interior Stairs

116-1713 Basement Stairs Type

☐ Paint Grade Stairs STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

8/20/2021

Purchaser

Date

8/20/2021

Purchaser

Date

8/20/2021

Décor Consultant

Date

-09-02-2021

Date Approved **HEATHWOOD HOMES (UPCOUNTRY) LIMITED**



Interior Finishing Selection Sheet

LOT	004-5	20-2257 ELEV B THE CALVERTON	
PURCHASERS:	BITUPON BAROOAH KUNJAN SHARMA	CONTACT NO:	647-219-7134 647-705-9937
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED		

Interior Stairs

142-1712 Main Stairs Type

45-1712 Stairs to Lower Level Type

Interior Trim

91-9374 Throughout Trim Size

Painting

143-7761 Main Stairs Colour

46-7761 Stairs to Lower Level Colour

240-1716 Throughout Trim - Paint Colour

51-1717 Throughout Walls - Paint Colour

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

149-1737 Master Ensuite Plumbing Fixture (colour)

34-1737 Powder Room Plumbing Fixture (Colour)

371-1737 Powder Room Lower Level Plumbing Fixture (Colour)

UPG

☐ Oak Stairs

☐ Oak Stairs UPG 1

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings
STD-Towns

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl NATURAL HARDWOOD FLOORING SHADE WILL VARY FROM HARDWOOD

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl NATURAL HARDWOOD FLOORING SHADE WILL VARY FROM HARDWOOD

☐ Trim WHITE STD

Wall WARM GREY 22 STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD☐ Plumbing Fixtures WHITE STD

Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date: 8/20/2021

Purchaser

EXPERIENCE

Décor Consultant

8/20/2021

Purchaser

-09- 02 2021

Date Approved _____



20-Aug-21

Sales Selection Sheet

LOT 004-5

20-2257 ELEV B THE CALVERTON

PURCHASERS: BITUPON BAROOAH

CONTACT NO: 647-219-7134

KUNJAN SHARMA

647-705-9937

VENDOR:

HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein. It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances

795 Kitchenaid 30" Chimney Hood SS
KWWB600DSS PAGE 29

KITCHEN

Qty: 1

Cabinetry

992 Optional Upgrade

Classic Kitchen

Qty: 1

Optional Classic Kitchen (Top Drawers in lieu of Bank of Drawers, Crown Moulding, Deep Fridge Uppers, Soft Close Doors and Soft Close Drawers) VIKING I/II/III

SKETCH # 8 PAGE 19

406 Optional Extras

KITCHEN

Qty: 1

19B- 45cm wide pull-out door base cabinet waste/recycle centre with soft-close ([2] 35L bins) (available only with 45cm wide cabinet) VIKING

WITH TOP DRAWER SKETCH # 8 PAGE 19

448 Optional Extras

KITCHEN

Qty: 1

31H- Wall cabinet for built-in microwave/small appliance with trim kit (supply

specs) Viking SKETCH # 8 PAGE 19

SEE SPEC # PAGE SPECS TO FOLLOW

Cabinetry / Electrical

993 Optional Extras

Kitchen

Qty: 1

Kitchen lower valance trim with light including switch (Luminiz LED slimline strip light)

Ceramics

1006

Kit/Brk Floor

Qty: 1

Upgrade 1 Tile

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

08/20/2021

Date

P. Barooah
Purchaser

Aug. 20.21

Date **APPROVED** - Décor Consultant

08/20/2021

Date

M. Rosen

-09-02-2021

Date Approved **HEATHWOOD HOMES (UPCOUNTRY)**
LIMITED



20-Aug-21

3 Sales Selection Sheet of

LOT	004-5	20-2257 ELEV B THE CALVERTON
PURCHASERS:	BITUPON BAROOAH KUNJAN SHARMA	CONTACT NO: 647-219-7134 647-705-9937
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED	HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

493	Optional Extras Supply and install additional backsplash due to chimney hoodfan installation Upgrade 1	Kitchen	Qty: 1
1009	Upgrade 1 Tile	Kitchen Optional Backsplash	Qty: 1
1005	Upgrade 1 Tile	Laundry Floor	Qty: 1
1002	Upgrade 1 Tile	M.Flr.Pow Floor	Qty: 1
1013	Ceiling Upgrades Smooth Ceilings Main Floor		Qty: 1
284	Optional Extras Extra wall interior outlet on Existing Circuit (does not include kitchen outlets) INSTALL ABOVE FIREPLACE 70" +/- FROM FLOOR SKETCH # 7 PAGE 18	GREAT ROOM	Qty: 1
281		KITCHEN	Qty: 1

RELOCATE STANDARD KITCHEN LIGHT TO BE CENTERED +/- ABOVE ISLAND FOR FUTURE PENDANT LIGHTS SKETCH # 7 PAGE 18

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

08/20/2021	A. Barood	Aug 20, 21	
Date	Purchaser	Date	Décor Consultant
8/20/2021	Arif	-09-02 2021	my Rosen
Date	Purchaser		

Date Approved: ~~HEATHWOOD HOMES (UPCOUNTRY)~~ LIMITED



20-Aug-21

Sales Selection Sheet
if

LOT	004-5	20-2257 ELEV B THE CALVERTON	
PURCHASERS: BITUPON BAROOAH		CONTACT NO: 647-219-7134	
KUNJAN SHARMA		647-705-9937	
VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED		HST #	

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein. It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

314	Optional Extras	KITCHEN	Qty: 1
Extra wall interior outlet (120V/15A) on a Separate Circuit (on arcfault) TO BE USED FOR A BUILT IN MICROWAVE SEE SKETCH 7, 8 PAGES 18 AND 19			
282	Décor Package	MAIN FLOOR	Qty: 1
Potlight Bundle - 8 x T477GR-W 4" line voltage potlights installed on main floor includes 2 switches INSTALL 4X GREAT ROOM ON SEPARATE SWITCH AND 4 X KITCHEN ON SEPARATE SWITCH SKETCH # 7 PAGE 18			
Granite			
1014	Optional Upgrade	Kitchen	Qty: 1
Countertop 3/4" GROUP 1 with double edge			
Mirrors/Glass Products			
1031	Shower Upgrade	Master Ensuite	Qty: 1
Upgrade to Frameless clear glass with D-Ring Handle in chrome			
Plumbing			
217	Kitchen Sink Upgrade	KITCHEN	Qty: 1
Blanco Kitchen Sink Quattrus U 2 #401247 (32" x 18") Undermount 2 Bowl Equal Size 9" Deep in Stainless Steel PAGE 23			
500		Master Ensuite	Qty: 1
OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET, STD COLONY SINK, ONE EXTRA VANITY LIGHT, ONE EXTRA PLUG AND CABINET CONVERSION VIKING SKETCH # 9 PAGE 20 AND SKETCH # 10 PAGE 24			

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

08/20/2021	Pr. March	Aug 20, 21	Heathwood
Date	Purchaser	Date	Décor Consultant
8/20/2021	A. Y.	-09-02-2021	Pr. March
Date	Purchaser	Date	

Date Approved: HEATHWOOD HOMES (UPCOUNTRY) LIMITED



20-Aug-21

Sales Selection Sheet

LOT 004-5

20-2257 ELEV B THE CALVERTON

PURCHASERS: BITUPON BAROOAH
KUNJAN SHARMA

CONTACT NO: 647-219-7134
647-705-9937

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

Structured Wiring

501

Optional Extra

GREAT ROOM

Qty: 1

HDMI to above fireplace Rough-in

INSTALL ABOVE FIREPLACE 70" +/- FROM FLOOR TO STD RG6 CABLE SKETCH # 7

PAGE 18

AMOUNT:

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

8/20/2021 P. Pooval
Date Purchaser

Aug 20, 21 AEEL
Date **APPROVED** - Décor Consultant

8/20/2021 P. Pooval
Date Purchaser

-09-02-2021 M. Rao

Date Approved HEATHWOOD HOMES (UPCOUNTRY)
LIMITED

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON


16 of 43
The Calverton

20-2257 ELEV. B

ELEVATION B:
2,217 SQ FT

Sketch #5

B.I.

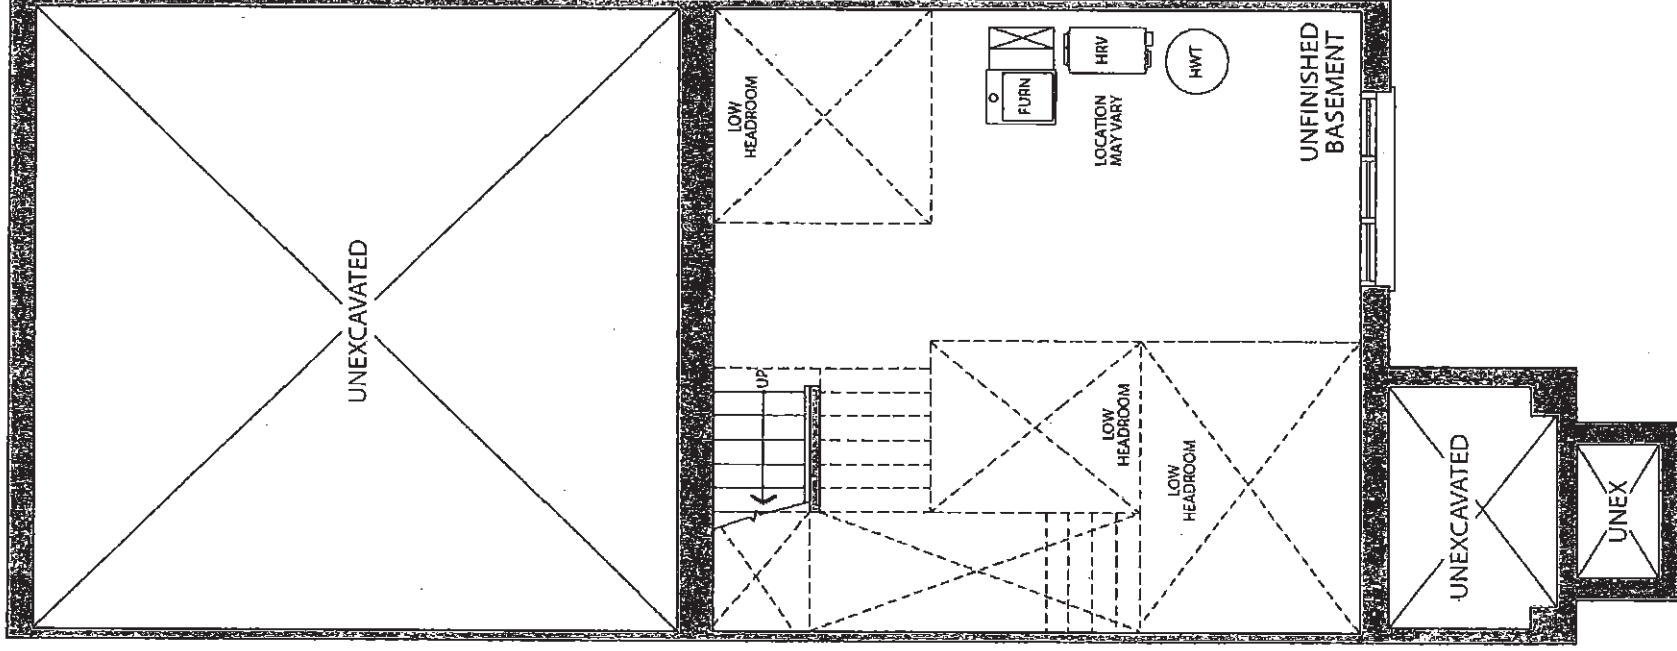

BASEMENT
ELEVATION B

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

17^{or} 43
The Calverton


20-2257 ELEV. B

ELEVATION B:
2,217 SQ FT

Sketch # 6

B.F.

4-1

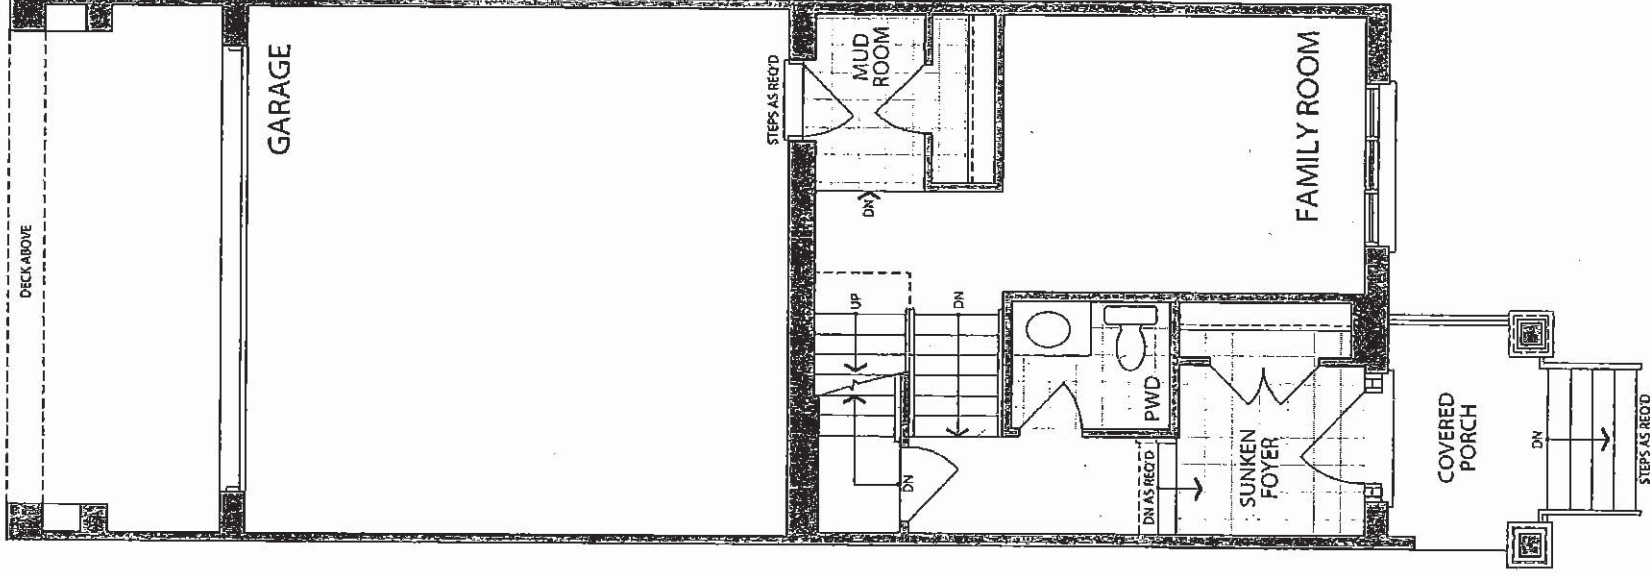

LOWER LEVEL
ELEVATION B


CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

18 of 43
The Calverton

20-2257 ELEV. B

ELEVATION B:
2,217 SQ FT

Sketch # 7

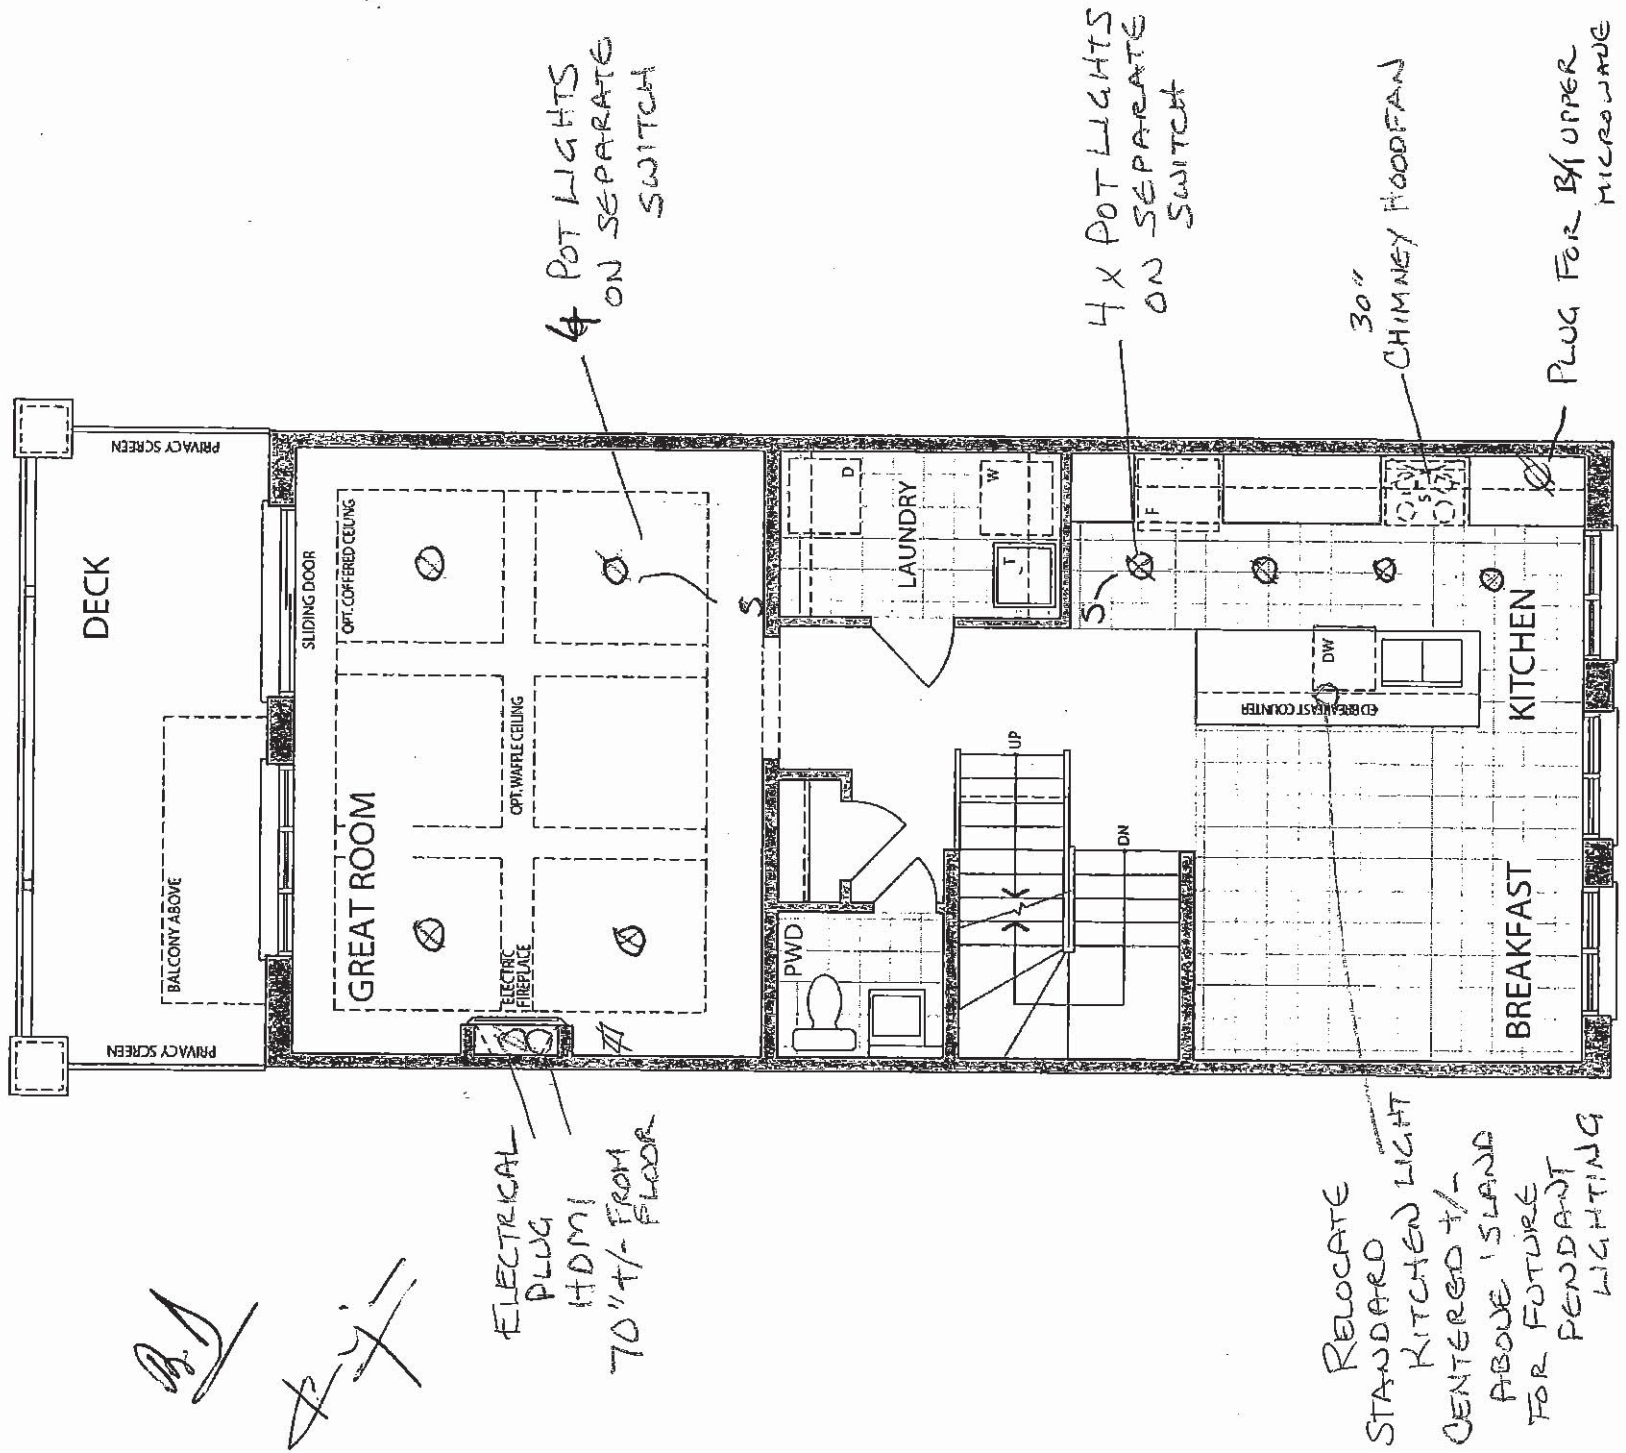


MAIN LEVEL
ELEVATION B

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON


6/28/2021

Sketch #8

19 of 43

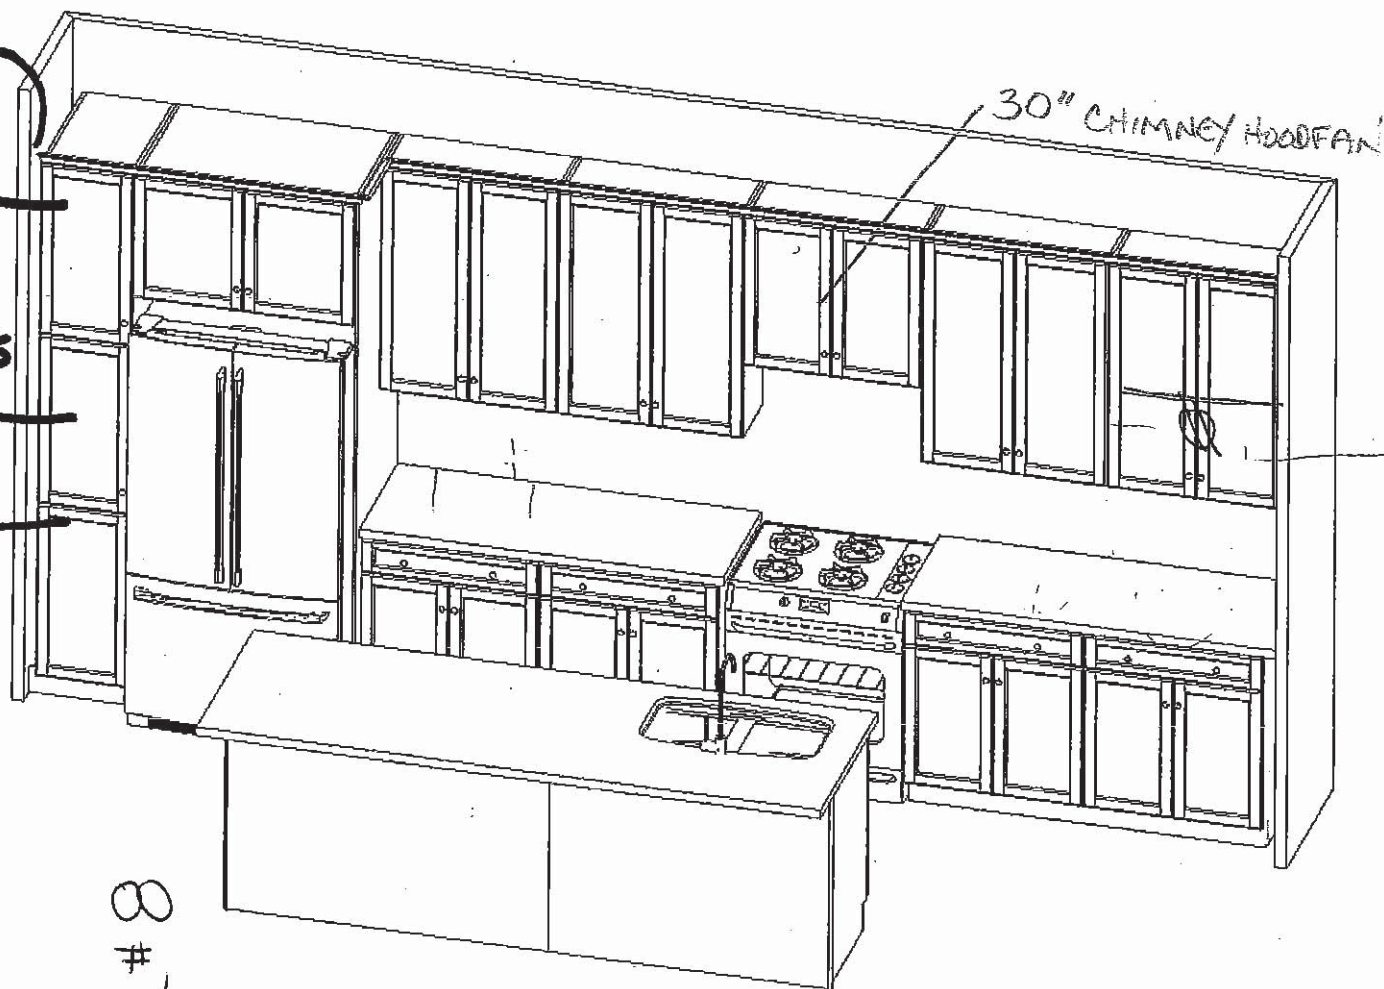

BUILT IN
MICROWAVE
& ELECTRICAL PLUG

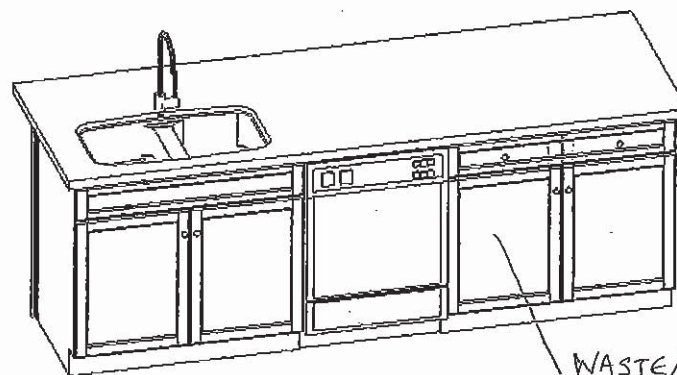

WASTE/RECYCLE
BINS WITH TOP
DRAWER



FRENDEL
KITCHENS LIMITED

1350 Shawson Drive, Mississauga, ON L4W 1C5

HEATHWOOD HOMES
COUNTRY LANE, WHITBY
MODEL: 20-2257 (2007)

STANDARD CONTRACT INCLUDES:

Appliance Openings

- Hood Opening: 30"W builder hood
- Fridge Opening: 37 3/8 "W X 73 3/8"
- Fridge cabinet: 30cm deep
- Stove Opening: 30" Freestanding
- Dishwasher Opening: 24"

Standard Kitchens Scope: X

- 100cm H wall cabinets
- Std. Blum Hinges- **not soft close**
- Std. Metabox Drawers- **not soft close**
- Min 40cm W drawer
- Backing on all cabinets
- Countertop by others
- Upgrade applied paneled fridge & dishwashers supply only (appliance hardware by others)

Classic Collection ✓

Optional Upgrade to Includes:

- Top Drawer Construction (In lieu of Standard bank of drawers)
- Tandem Box **Soft Close Drawers**
- Blumotion **Soft Close Hinges for Doors**
- Crown Moulding
- Deep Fridge Upper w/Deep Panel
- Tall upper Cabinets

THIS DRAWING IS FOR DESIGN PURPOSES ONLY.
IT IS NOT AN EXACT RENDITION.


CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

20 of 43
The Calverton

20-2257 ELEV. B

ELEVATION B:
2,217 SQ FT

Sketch #9


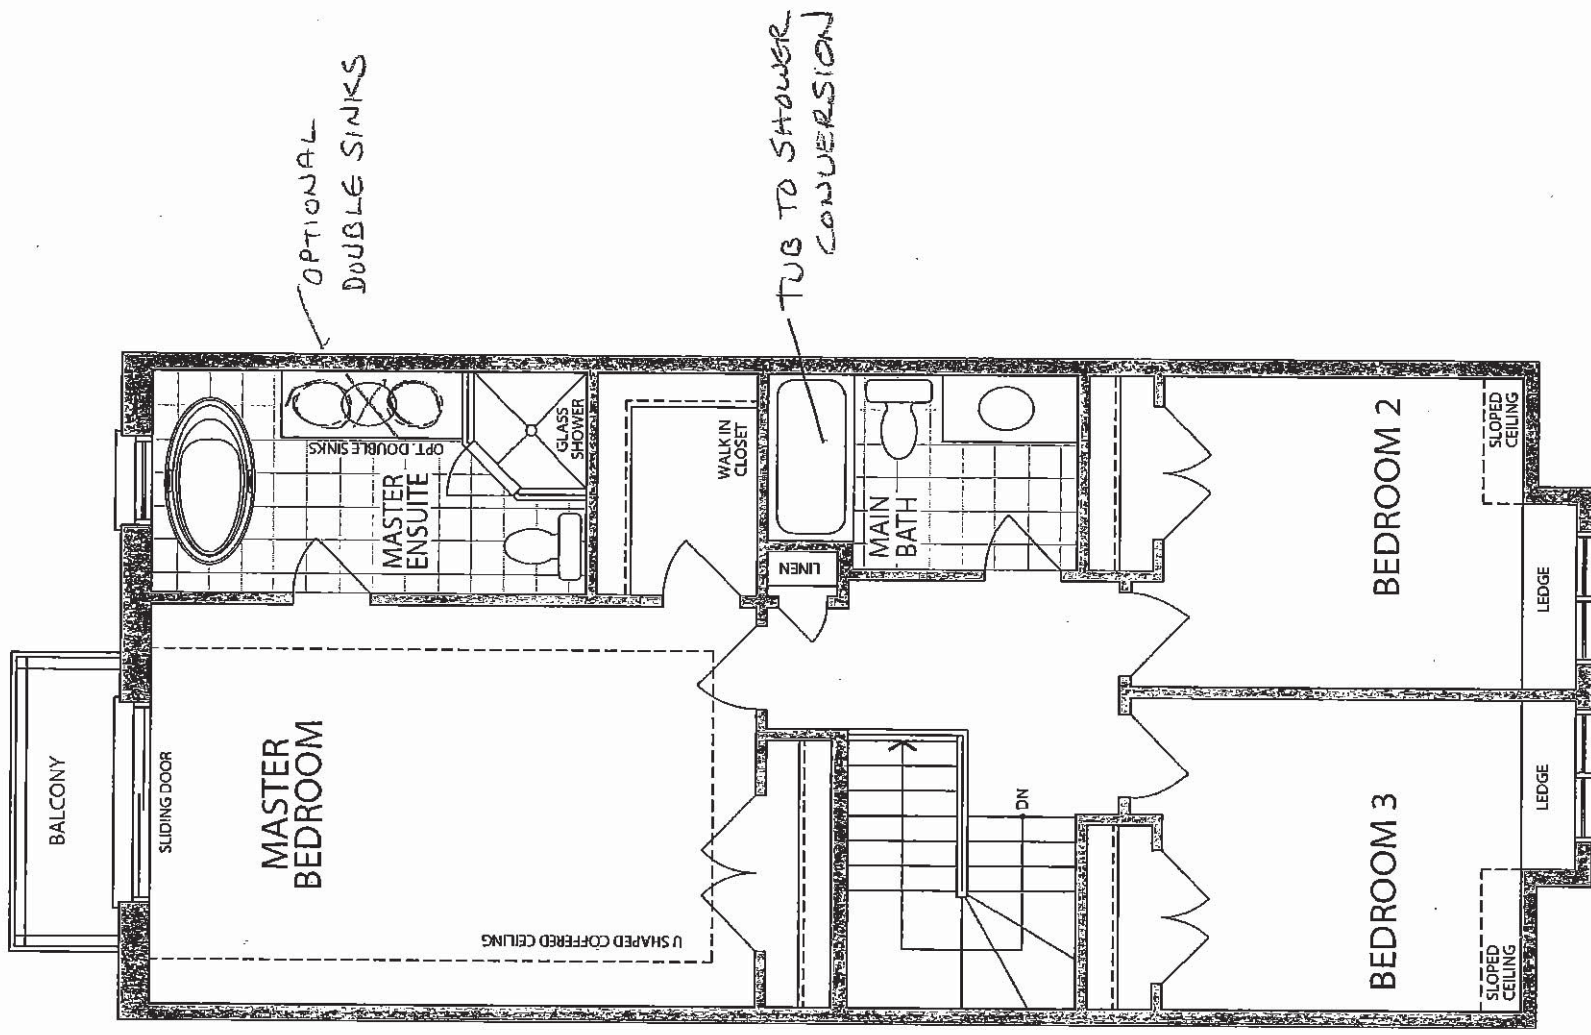


UPPER LEVEL
ELEVATION B




CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

21043

Sketch #10

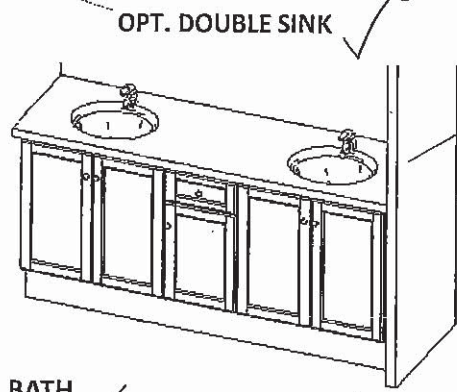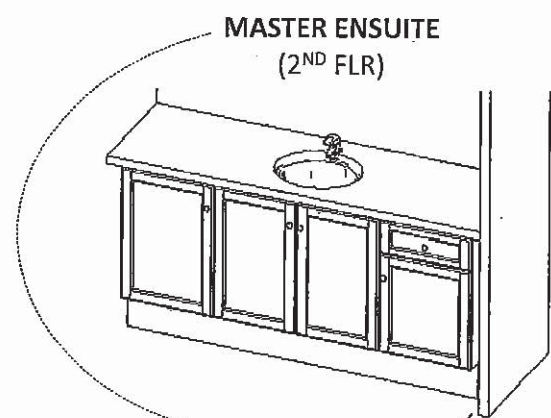

OPTIONAL
DOUBLE SINKS

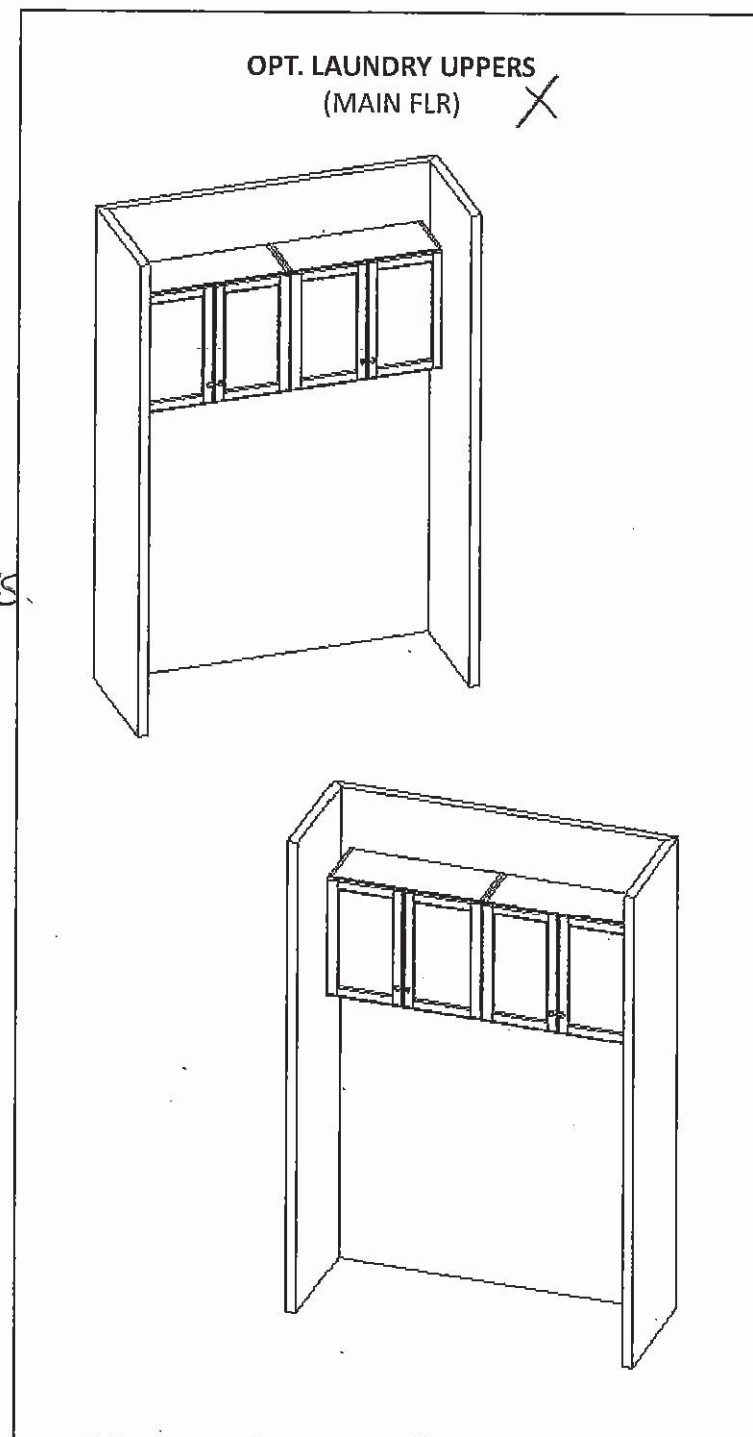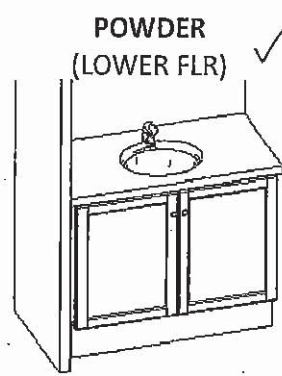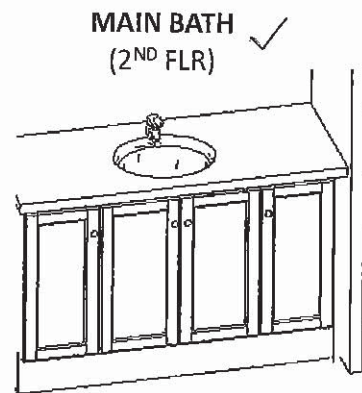

FRENDEL
KITCHENS LIMITED
1350 Shawson Drive, Mississauga, ON L4W 1C5

HEATHWOOD HOMES
COUNTRY LANE, WHITBY
MODEL: 20-2257 (2007)

STANDARD CONTRACT INCLUDES:

Standard Vanity & Laundry Scope:

- Powder by others, pedestal
- All vanities include laminate top
- Std. Blum Hinges- **not soft close**
- Std. Tandem Box Drawers- **Soft Closing**
- Master Ens: (x1) Top drawer
- Mains: Full height doors (top drawers added if Masters can't accommodate)
- Optional laundry base & wall cabinets


Handwritten signature and initials.

6/28/2021

THIS DRAWING IS FOR DESIGN PURPOSES ONLY.
IT IS NOT AN EXACT RENDITION.

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON


22 of 43

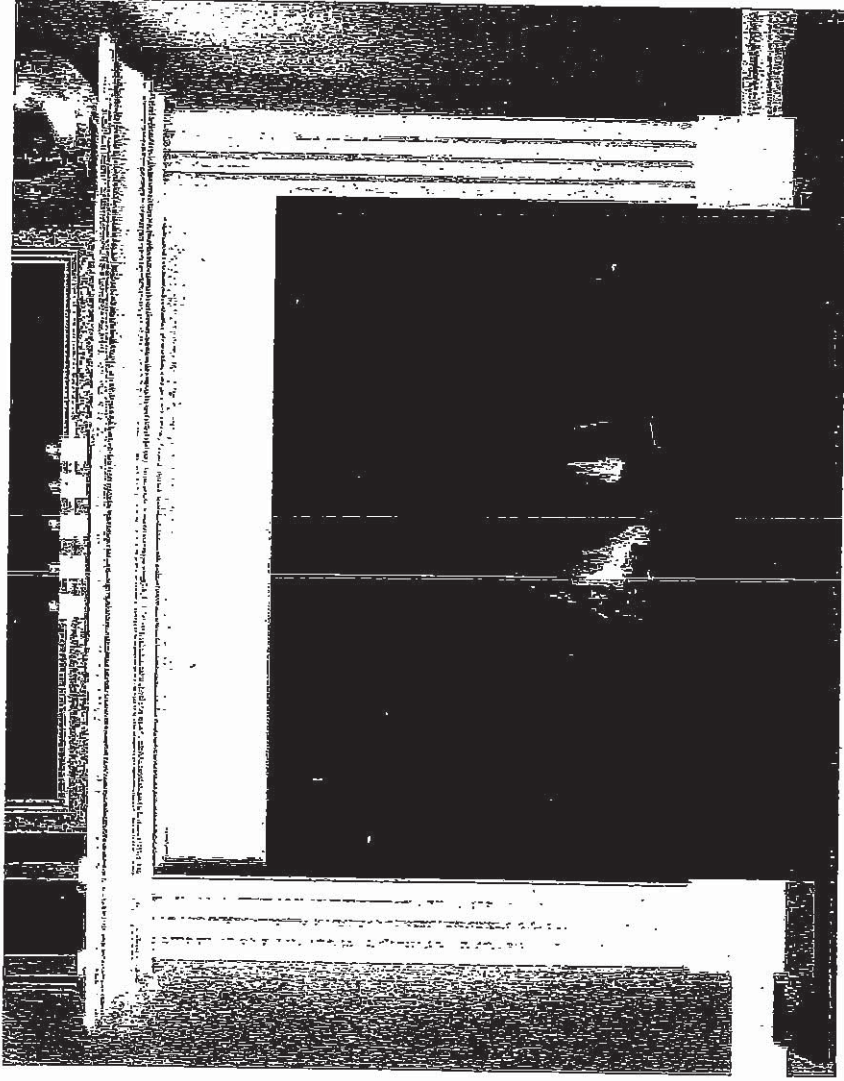

STANDARD NF 15 Mantel

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

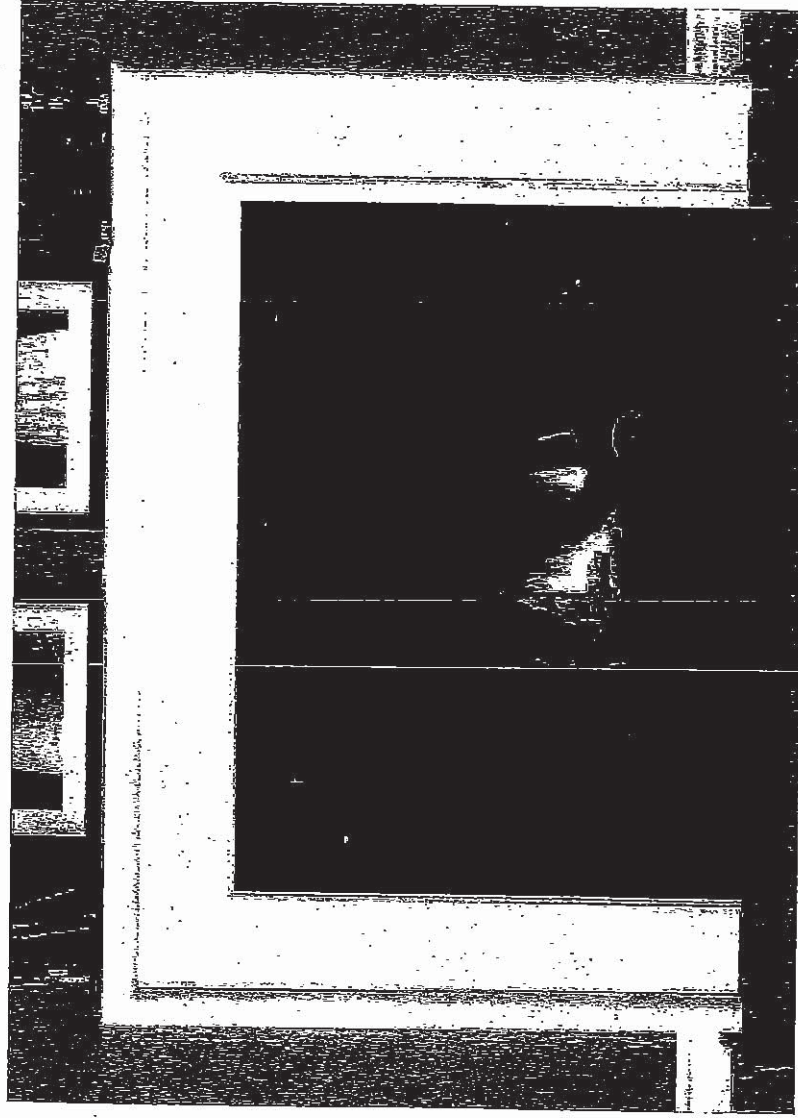

1 CABINET ✓

STANDARD NF 17 Mantel



CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

23 of 43

BLANCO

BLANCO QUATRUS U2
Stainless Steel
Undermount Sink

This new German-engineered sink from BLANCO features 9-inch bowl depths and zero-radius bowl corners. Made of durable 18 gauge stainless steel.

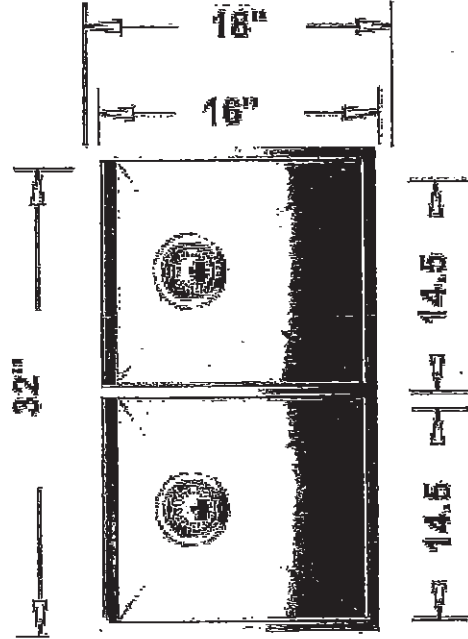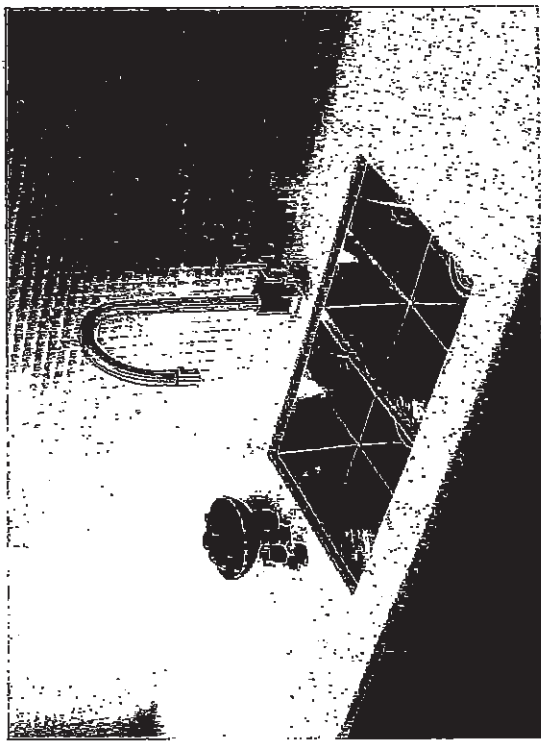

Model No.	Bowl Depth	
	Main	Secondary
401247	9" (230 mm)	9" (230 mm)

Material
Durable 18 gauge stainless steel Brushed finish

Specifications
Minimum Cabinet Size: 33" (840 mm) Undermount installation Rear positioned drain holes for maximum usable bowl and cabinet storage space Zero-radius corners and x-pattern drain grooves Sound deadening system included Triplate included 3 1/2" stainless steel strainers included

Accessories
Stainless Steel Grid 224403

BLANCO CANADA INC.
100 Corporation Drive, Brampton, ON L4V 1R3
Tel: 905-494-2400 Toll Free: 1-877-425-2626
Fax: 905-494-2425 Toll Free: 1-877-825-2626
www.blancocanada.com


CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

24 of 43

STANDARD KITCHEN FAUCET

Align

Modern

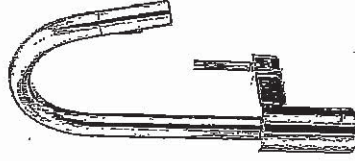

Single Handle Pull-Down Kitchen
Faucet#

Model 7565+

Dr. B.

5/

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

25 of 43

*American
Standard*

**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (illustrated).
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above-counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications *


Meets or Exceeds the Following Specifications:

- ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:

* See faucet section for additional models available

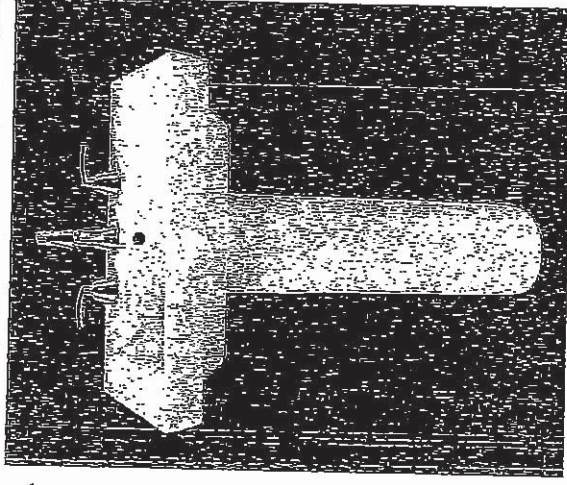

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

Handwritten notes:
P.O. /
X-7

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

26⁰⁰ COLONYTM
COUNTERTOP SINK
VITREOUS CHINA

COLONY COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

- ☒ 0346 803
Faucet holes on 203mm (8") centres
- ☐ 0346 403 (Illustrated)
Faucet holes on 102mm (4") centres
- ☐ 0346 001
Centre hole only

Nominal Dimensions:
521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:
422mm (16-5/8") wide, 279mm (11") front to
back, 143mm (5-5/8") deep




COMPLIANCE CERTIFICATIONS –
Meets or exceeds the following Specifications:
• ASME A112.19.2M for Vitreous China Fixtures.
• CAN/CSA B45 Series.

To Be Specified	
☐ Colour:	☒ White ☐ Bone ☐ Silver Gray
	☐ Linen
☐ Faucet*:	
☐ Faucet Finish:	
☐ Supplies & Stops:	
☐ Trap 1-1/4" (32 mm):	

* See faucet section for additional models available
BAS-198

© 2000 American Standard Inc.

01/07

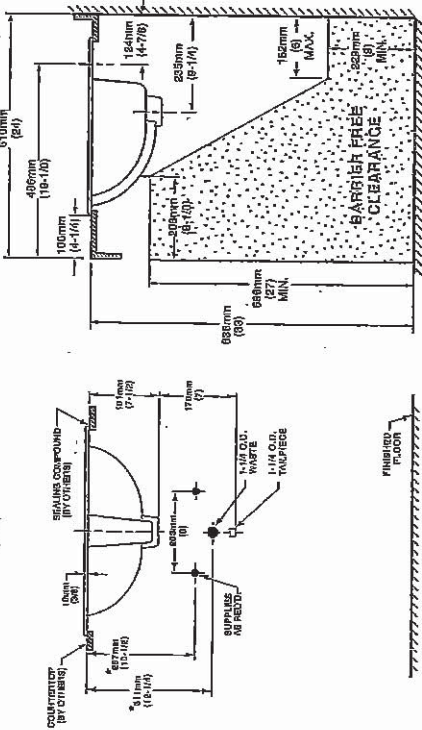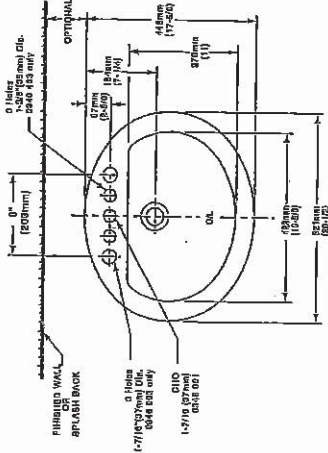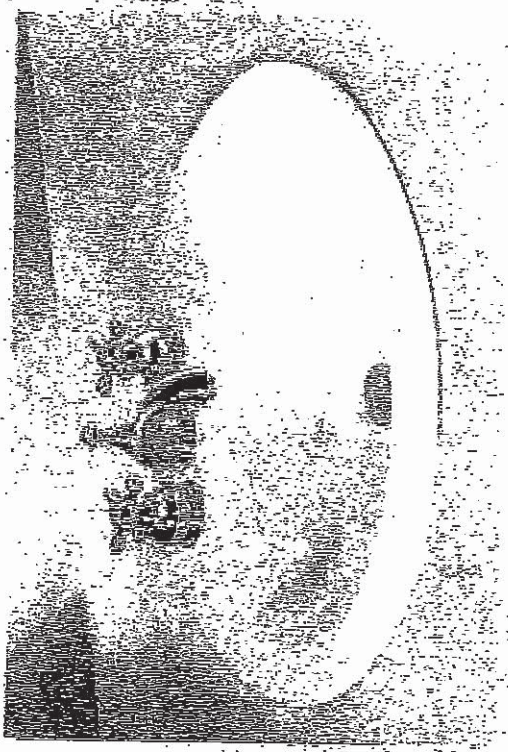


NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.
IMPORTANT: DIMENSIONS OF FIXTURES ARE NOMINAL AND MAY VARY WITHIN THE RANGE OF TOLERANCES ESTABLISHED BY ANSI STANDARD A112.19.2. THESE MEASUREMENTS ARE SUBJECT TO CHANGE OR CANCELLATION. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERSEDED OR VOIDED PAGES.

Handwritten signature and initials.

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

27 of 43

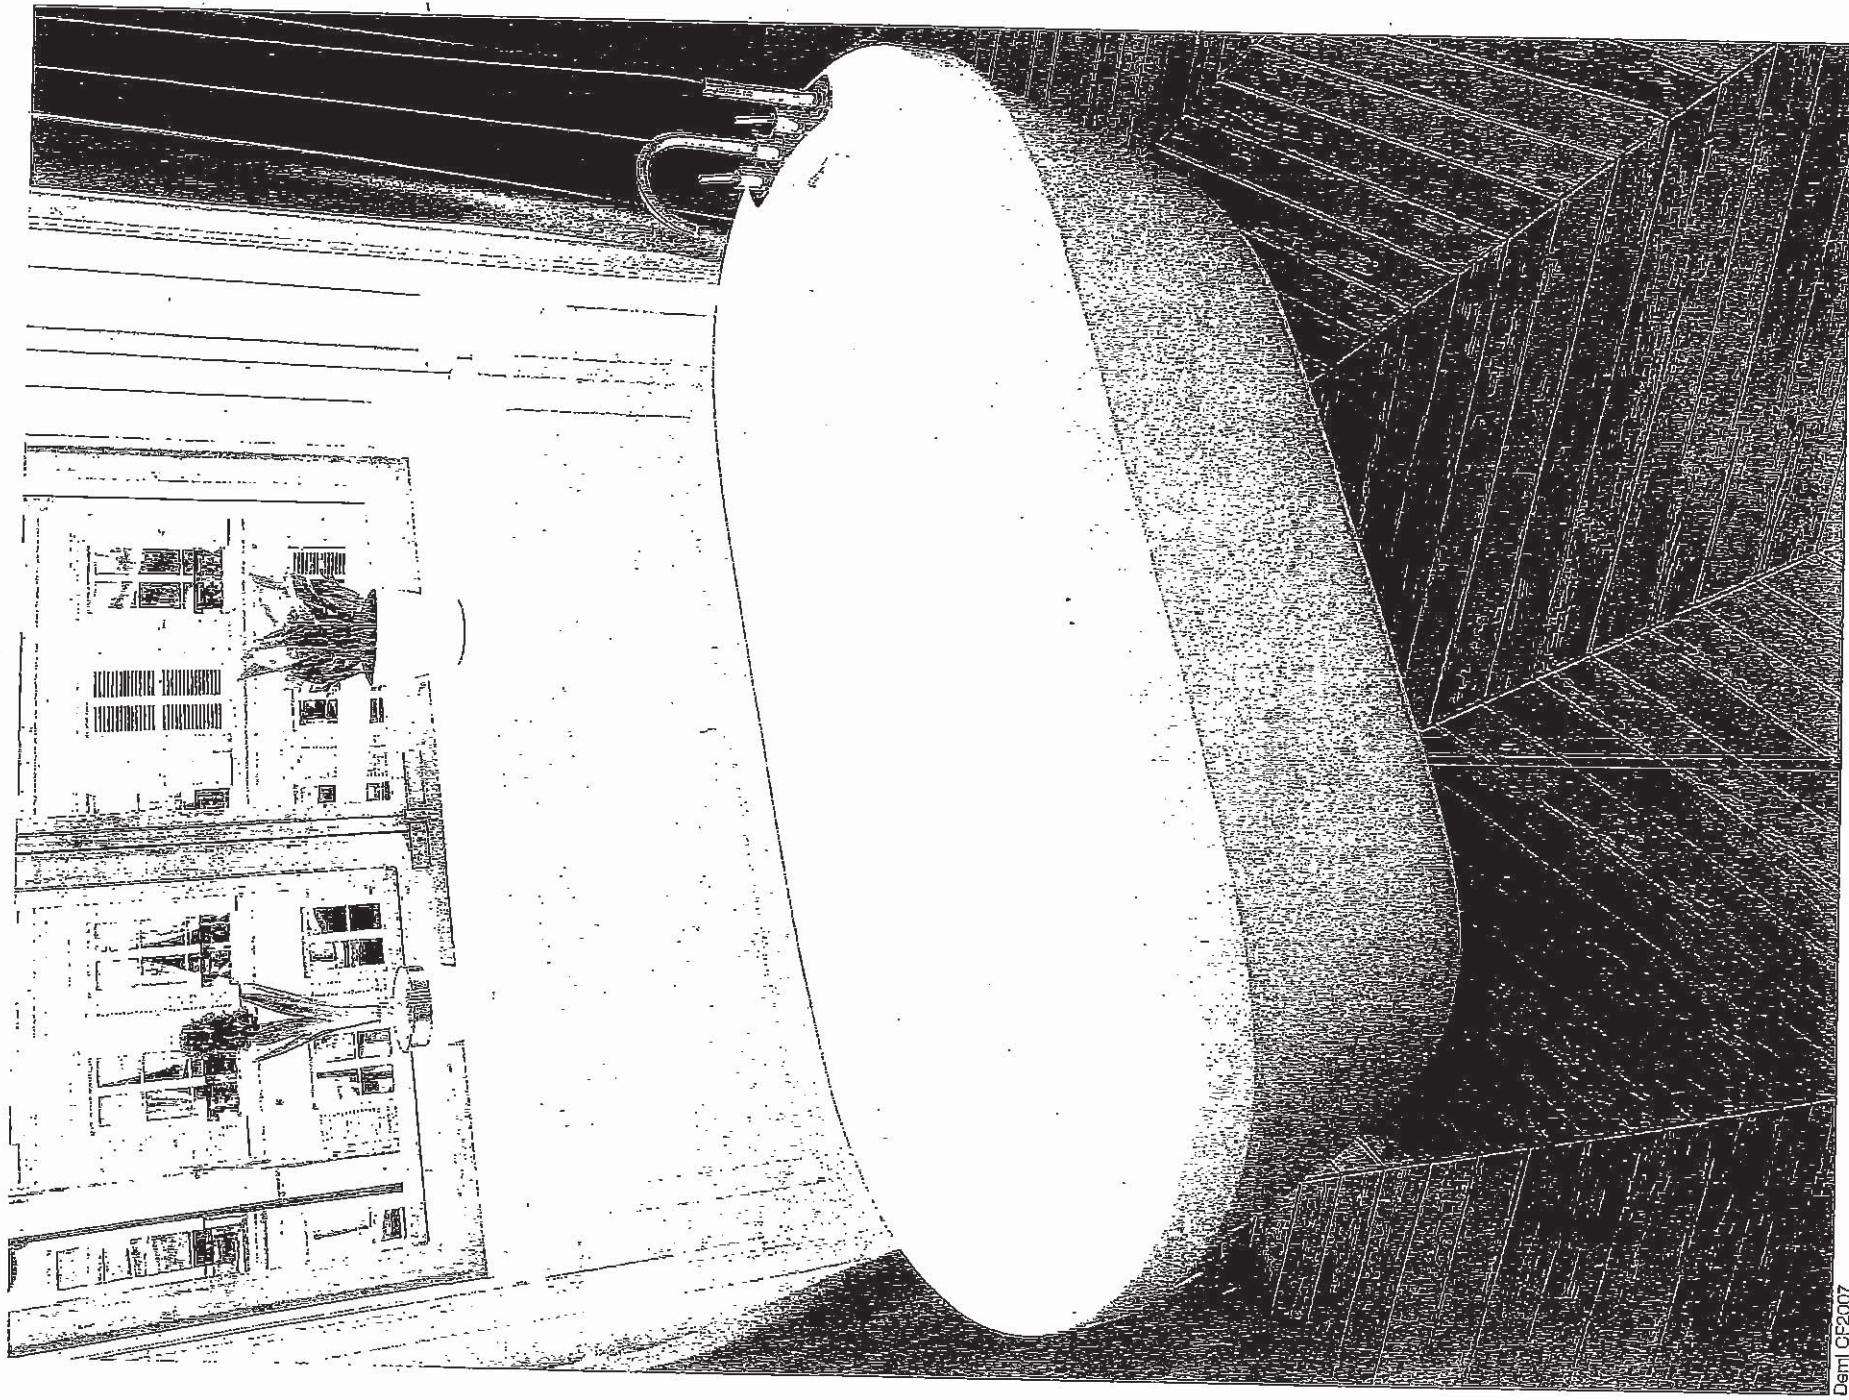

Deml CF2007


10/1/07
X-5

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

28 of 43


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621+

VANITY SINKS AND PEDESTAL




Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183+

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL
Model 62320 / TL183EP+
[TL183EP not available in BC]

SHOWER AND 5' TUB FAUCETS

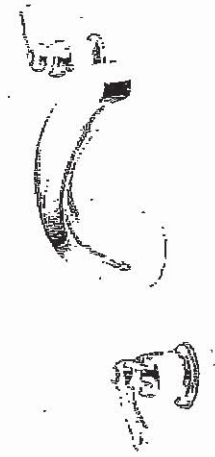

2 Handle Roman Tub with 9" Spout
Model 4796 / T990+

FREESTANDING TUB FAUCETS

Handwritten signature and initials.


29 of 43



FOR THE WAY IT'S MADE.
FOR THE WAY IT'S USED.

MODEL: KVWB600DSS

30-In. Width | Wall-Mount Canopy | 600 CFM Motor

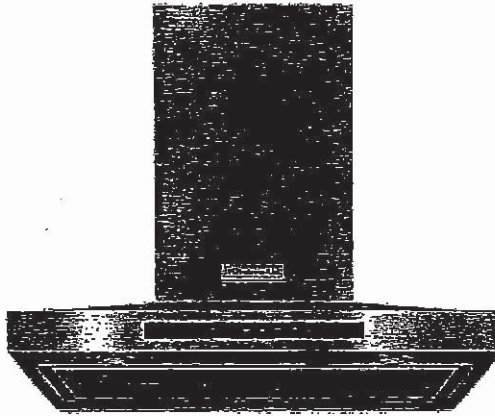

This 3-speed vent hood has power to effectively vent an output of up to 65K BTUs. Auto speed sensing keeps the vent at the proper fan speed by sensing the amount of heat coming from the cooktop. This 30-inch wall-mount canopy hood has both LED and halogen lights to brighten almost any work area.

PRODUCT FEATURES

600 CFM/65K BTU Threshold

Allows installation over any KitchenAid regular 30-inch range or cooktop, and some commercial-style cooking surfaces with outputs up to 65K BTU

Perimeter Ventilation

Increases ventilation system efficiency by pulling air from the edges of the hood and speeding up the movement of air at the center, allowing it to efficiently handle up to a 65K BTU total output

Auto Speed Setting


Takes the guesswork out of protecting cabinets from steam, grease, and moisture by automatically adjusting fan speed to ventilation needs depending on the heat being produced

LED Task Lights

Provide extra lighting over the cooking surface to help in the cooking process

Halogen Night Lights

Enhances the style of the ventilation system by providing soft, accent lighting in the kitchen

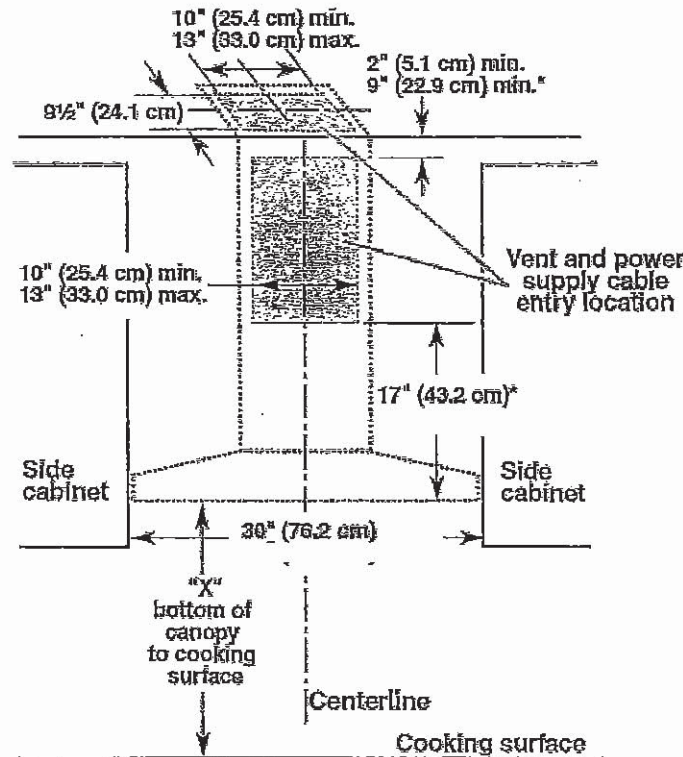

*For non-vented (recirculating) installations

IMPORTANT:

Minimum distance "X": 24" (61.0 cm) from electric cooking surface.

Minimum distance "X": 27" (68.6 cm) from gas cooking surfaces.

Suggested maximum distance "X": 36" (91.4 cm)


PERFORMANCE

Duct Outlet Type
Duct Outlet Size

Round
6"

ELECTRICAL

15amp, 60 Hz. 120 V.

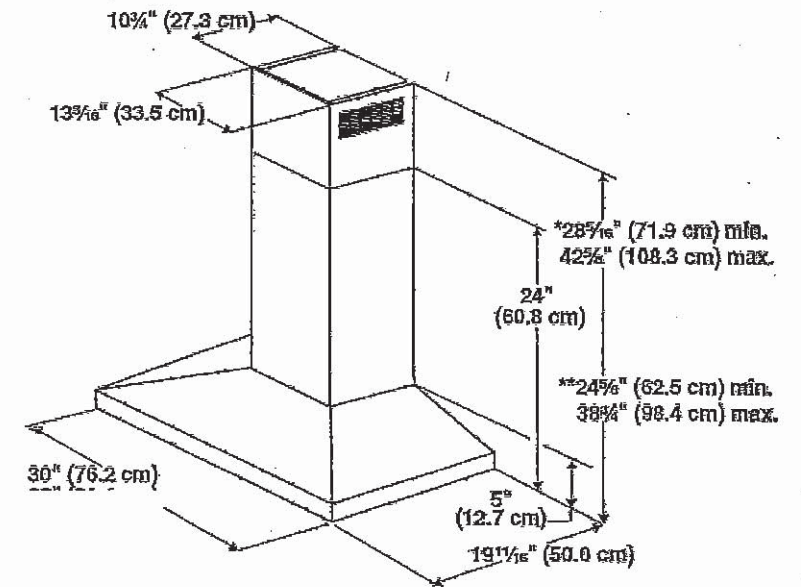

*For non-vented (recirculating) installations

**For vented installations

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

30³⁴ or 43

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT641SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

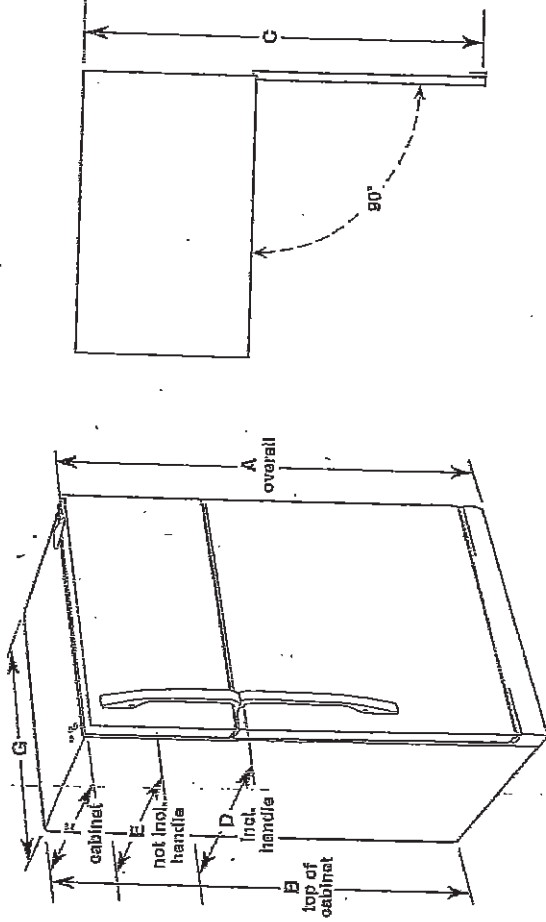

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	32 1/4" (82.5 cm)	30 3/4" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT611SZD WRT641SZD	21.3 cu. ft.	Yes	66 1/2" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/2" (82.3 cm)	28 1/4" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

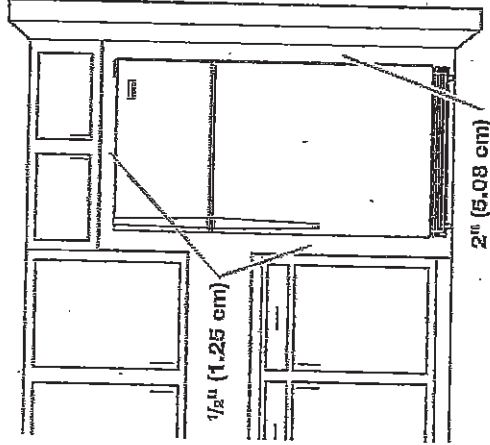

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.





Rev. W10674106
10/29/14

Handwritten signature and date: 10/29/14

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

31 of 43

Refrigerator Door Swing Verification

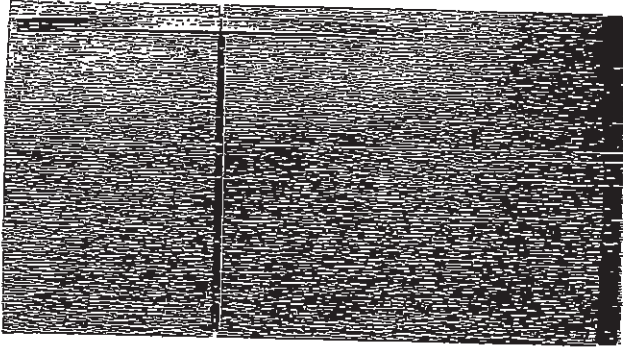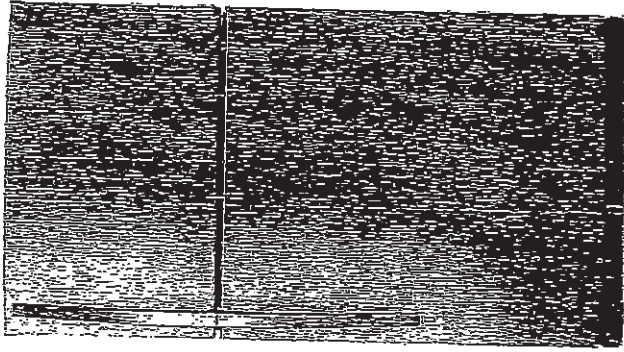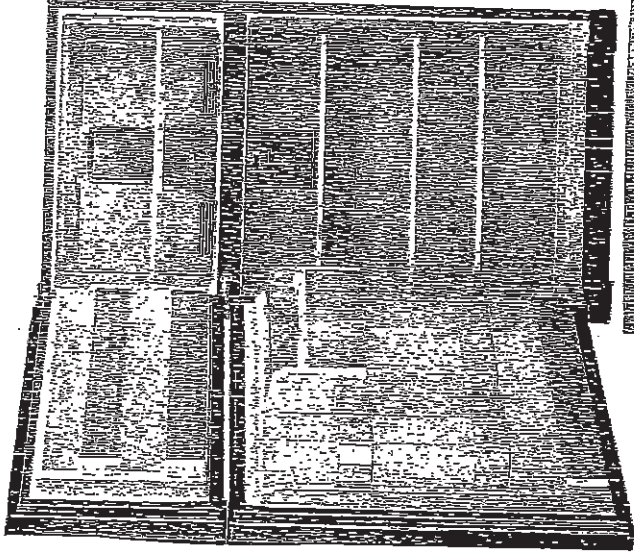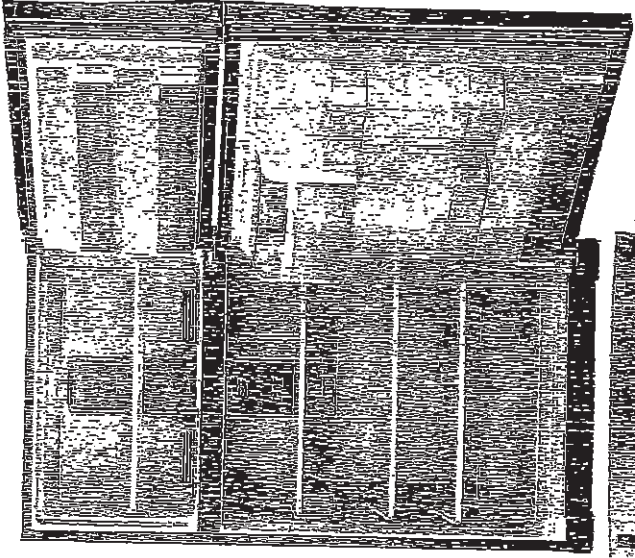

When facing the refrigerator

☐

RIGHT HAND
DOOR OPENING

- Hinges on right
- Handle on left

INITIAL

☒

LEFT HAND
DOOR OPENING

- Hinges on left
- Handle on right

INITIAL

PORCH LEFT

Please check and INITIAL your door swing selection.

31 of 43

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

32.43



WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

5.3 cu. ft. Whirlpool® electric range with Frozen
Bake™ technology

YWFE515S0JS

Whirlpool®

Home > Kitchen Appliances > Cooking Appliances > Ranges > Single Oven Ranges > YWFE515S0JS

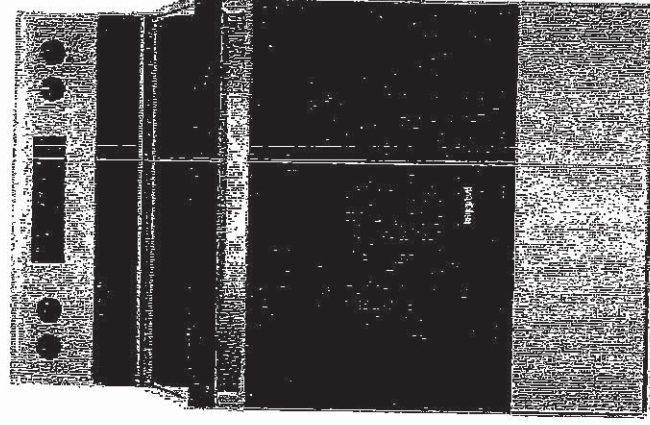


Handwritten signature
✓

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions

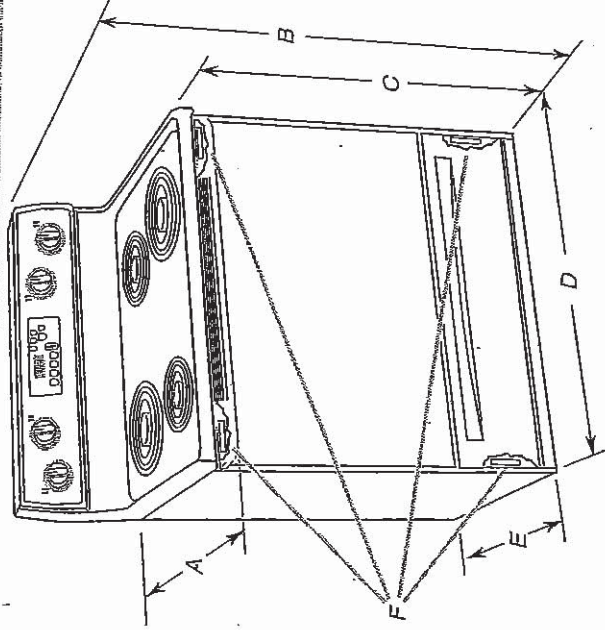

- A. 27³/₁₆" (70.5 cm) max. depth with handle
- B. 46⁷/₁₆" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₁₆" (75.9 cm) width
- E. 25⁹/₁₆" (64.3 cm) depth - back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

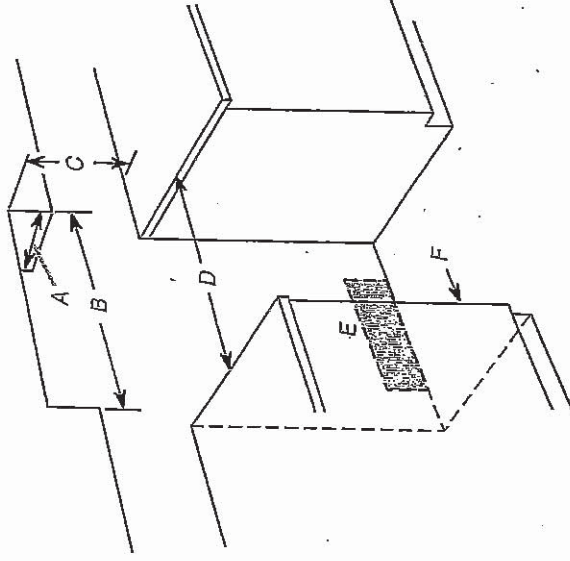

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

34 of 43

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Install Anti-Tip Bracket


! WARNING



Tip Over Hazard

A child or adult can tip the range and be killed.
Install anti-tip bracket to floor or wall per installation instructions.
Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.
Re-engage anti-tip bracket if range is moved.
Do not operate range without anti-tip bracket installed and engaged.
Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
2. Determine which mounting method to use: floor or wall. If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/₁₆" (31.9 cm) from centerline as shown.

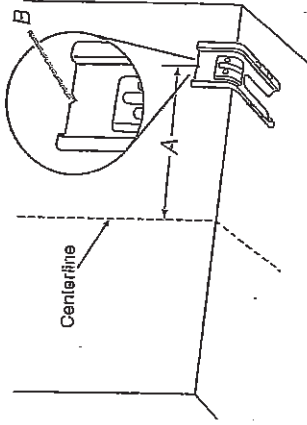


A. 12⁹/₁₆" (31.9 cm)
B. Bracket V-notch

4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.


Floor Mounting



Rear position




Front position




Diagonal (2 options)

Wall Mounting



5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1⁹/₁₆" (4.1 cm) screws provided.
6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.
8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.




4.8 / 4.8

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

35 of 43

Whirlpool
ENERGY STAR
Qualification



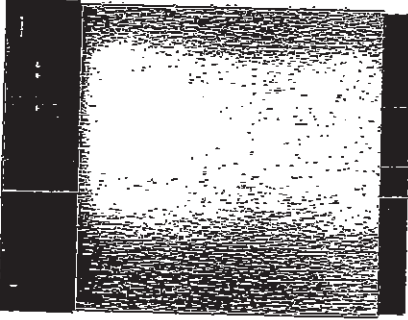

WDF310PAAS
Black-on-Stainless

OTHER AVAILABLE COLORS

Black
Model: WDF310FAAB

Black-on-Blauw
Model: WDF310FAAT

White
Model: WDF310PAAW

Universal Silver
Model: WDF310FAAD

DIMENSIONS		KEY FEATURES
Maximum Height	34 1/2 Inches	ENERGY STAR® Qualified
Minimum Height	33 1/2 Inches	No One Has Fewer Repairs 17 Years In A Row
Height	34 1/2 Inches	Resource - Efficient Wash System
Depth	24 1/2 Inches	CEE Tier 1 qualified
Width	23 7/8 Inches	Tall Tub Design
Dimensions shown are for planning purposes only. For complete information, see installation instructions packaged with product.		White Plastic Interior
		Quiet Partner(TM) / Sound Package
		Auto Soil Sensor
		Electronic Controls
		3 Automatic Cycles
		1-Hour Wash Cycle
		Heavy Wash Cycle
		Normal Cycle
		4 Options
		High Temperature Wash System
		Heated Dry Option
		4 Hour Delay Wash Option
		4-Tier SheerClean Direct Feed Wash System
		Control Lock
		Vinyl Racks
		In-Rack Silverware Basket
ELECTRICAL		
15 Amps Amps, 60 Hz, 120 V, 15,		
Before purchasing the appliance, read the instructions and label for the estimated annual energy consumption and energy efficiency rating that is available from your dealer.		

B. B. / 7-17

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

36 or 43

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB
WDF111PAB
WDF120PAF
WDF121PAF
WDF310PAA
WDF310PCA

WDE310ELA
WDF320PAD
WDF330PAP
WDF330PAY
WDF330PAD
WDF330PAA
WDF330PLY

WDF530PSY
WDF540PAD
WDF730PAY
WDF710PAY
WDF720PAD
WDF770PAY

Electrical Requirements: 120-volt, 60-Hz, AG only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.




If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit




instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4"N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/JAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

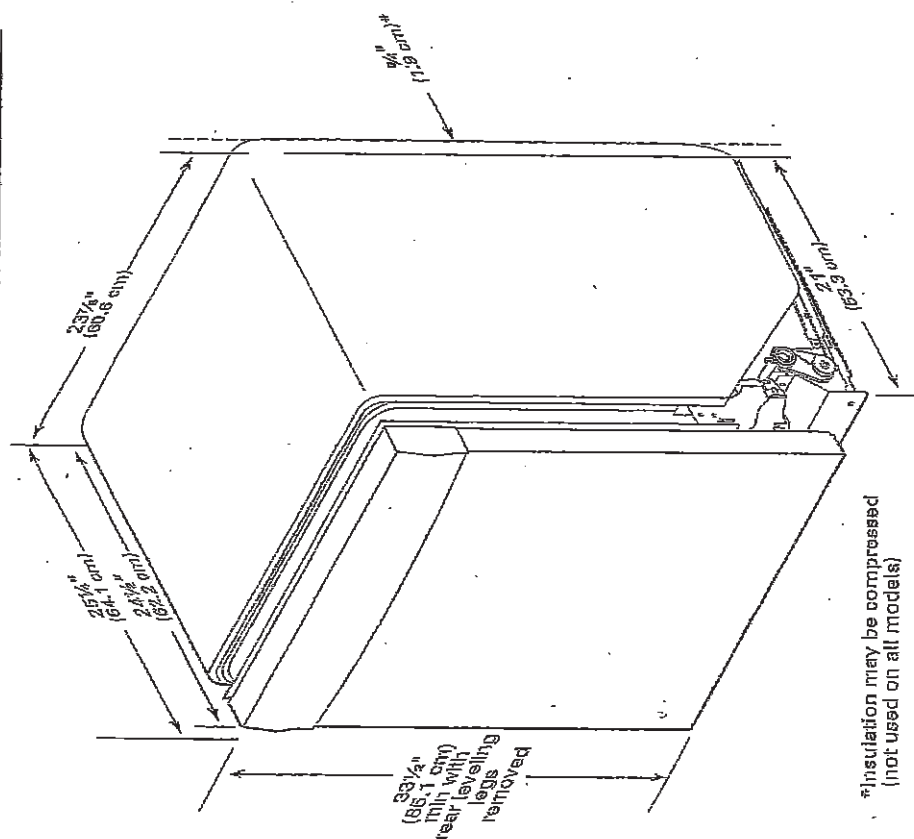

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

37.43


CABINET CUTOUT DIMENSIONS

WDF320DAB

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

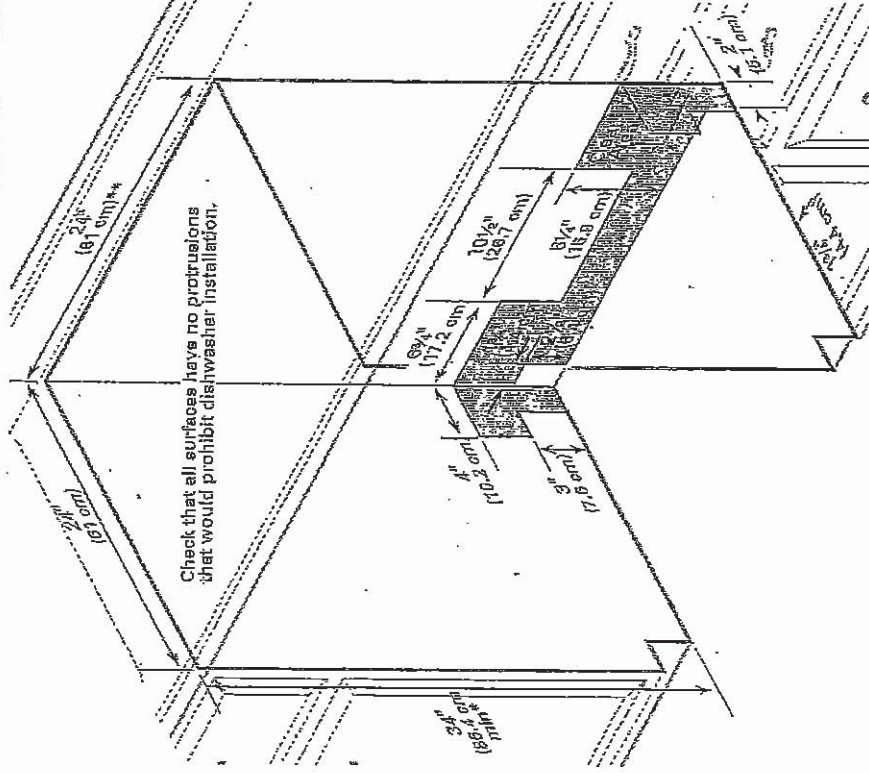


8.3.17.4

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

38^{or} 43

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryer | Washers | Front Load Washers | WFW5620HW

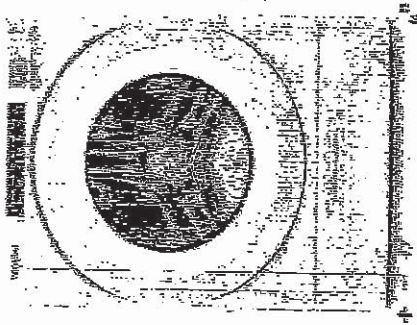

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool
5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser
Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	88.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes


A.B.
J.H.

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON


39.43

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

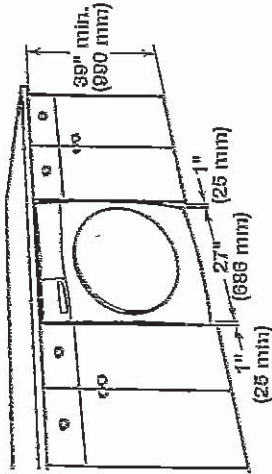

Recessed area or closet installation:

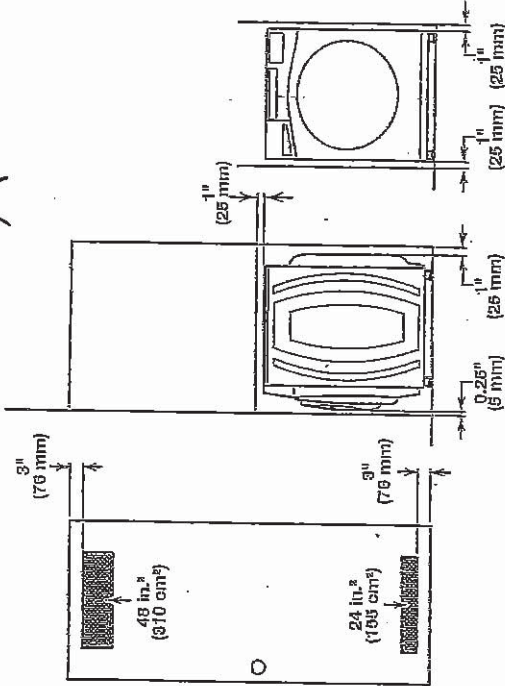

Custom cabinet installation:

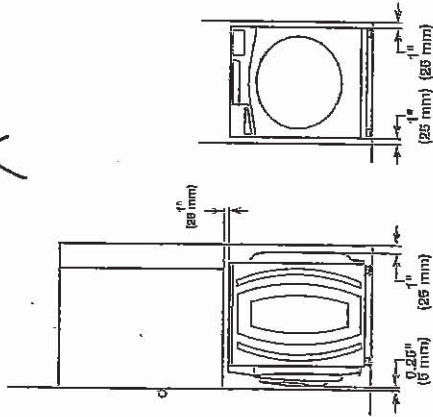


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

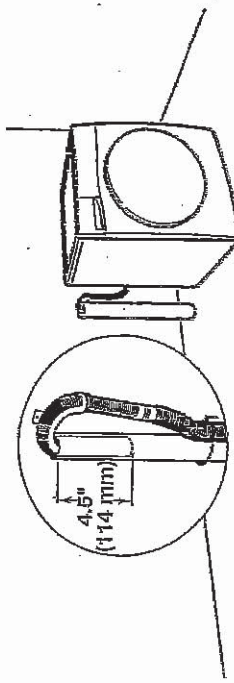


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

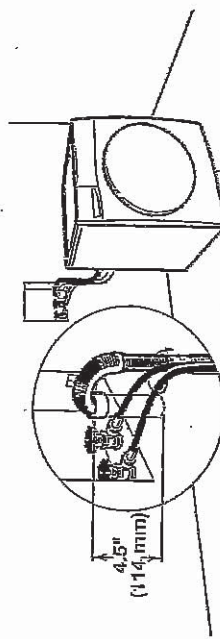

See requirements for floor standpipe drain system.

Laundry tub drain system

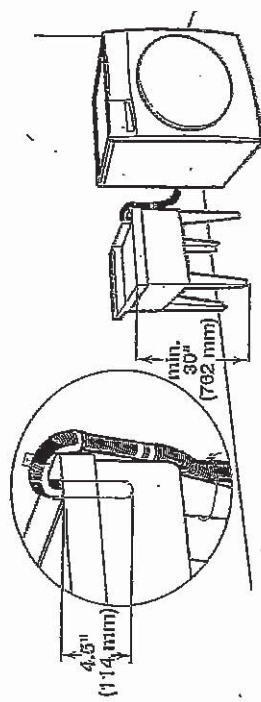

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

P.C. / X

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

40 of 43

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS




Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kg).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.


Whirlpool Models*

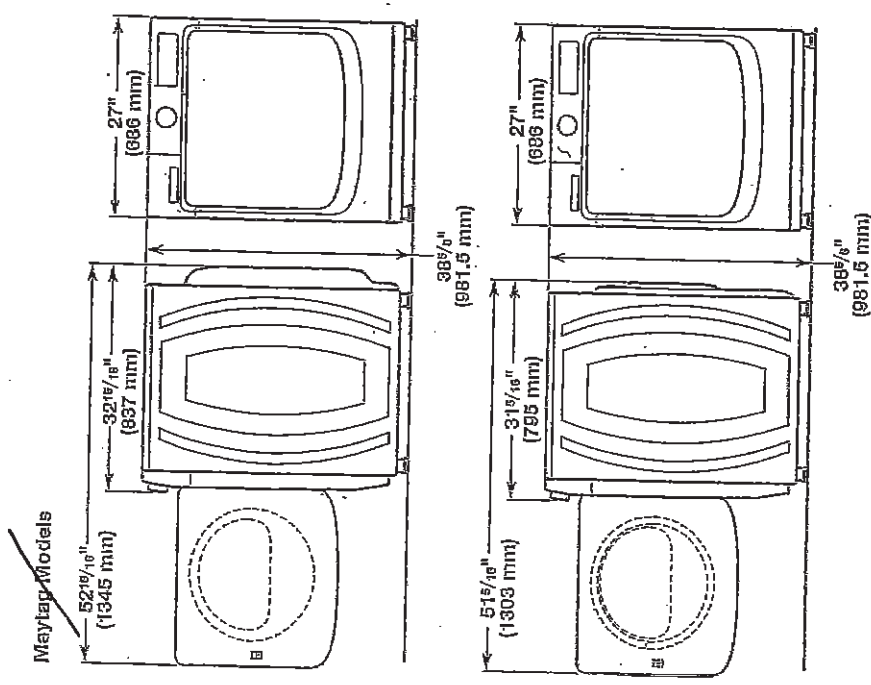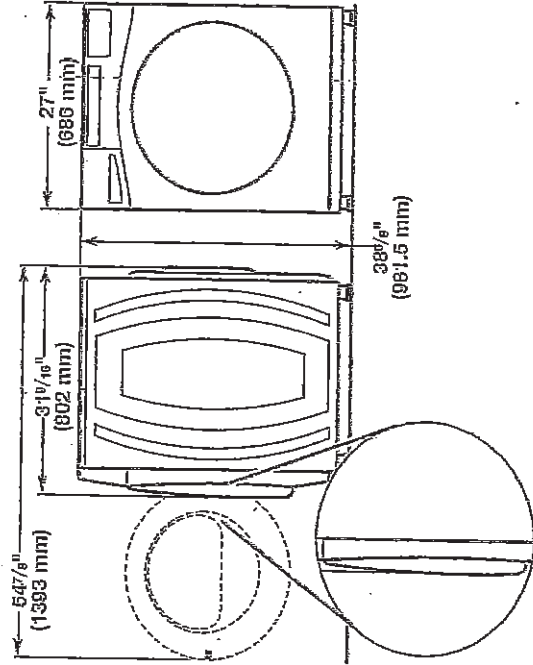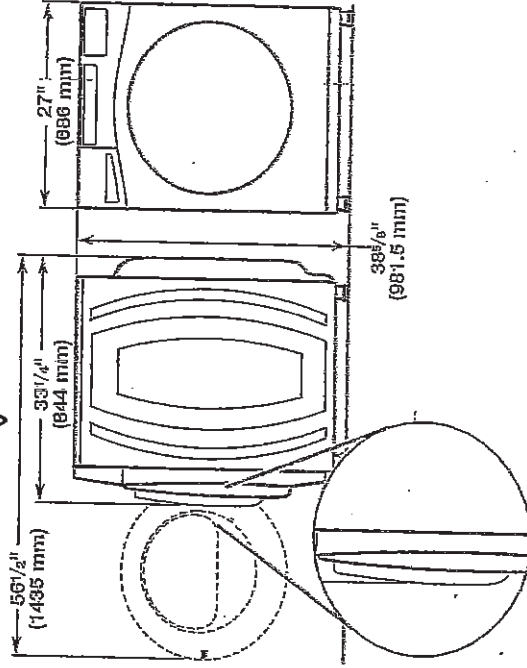

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

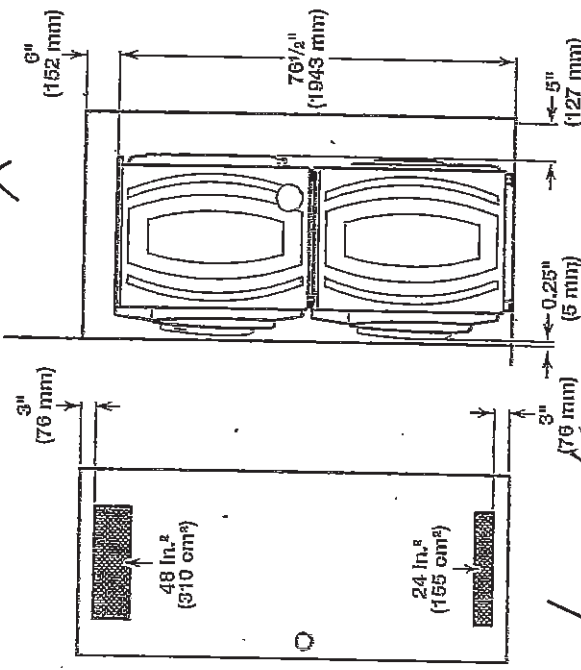


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

41 of 43

[illegible]

**7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls**



Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-9/16 in
Width	68.50 cm, 27.0 in

Font Type

Font Size

Cycle Time Remaining	Yes	No
Last Filter Indicator		
Number of Dryer Cycles	48	
Number of Dryness Levels	3	

Lotting View	No
Maximum View Length	84
Viewing Direction	Left, Right, Extrem, Rear

100

總人

[Handwritten signature]

12 1/2 13

Back view:



0" (0 mm) rear spacing is allowed for straight back venting only.
For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

X

Technical drawing of a rectangular box. The overall height is labeled as 39" min. (990 mm). The width of the box is labeled as 27" (686 mm). The depth of the box is labeled as 1" (25 mm). The drawing shows two circular openings on the front face, each with a diameter of 1" (25 mm). There are also two small rectangular openings on the side face, each with a width of 1" (25 mm). The box is shown in a perspective view, with the top and side faces visible.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

■ Companion appliance spacing should also be considered.

This dryer is suitable for mobile home installations.

The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24, CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

CU UPCOUNTRY
LOT 4-5
20-2257 ELEV B
THE CALVERTON

43 of 43

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.


Failure to do so can result in death, explosion, or fire.

You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.


IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.

DRYER DIMENSIONS
Front view:

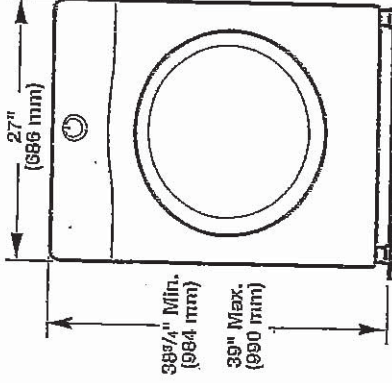

Side view:

Whirlpool Models

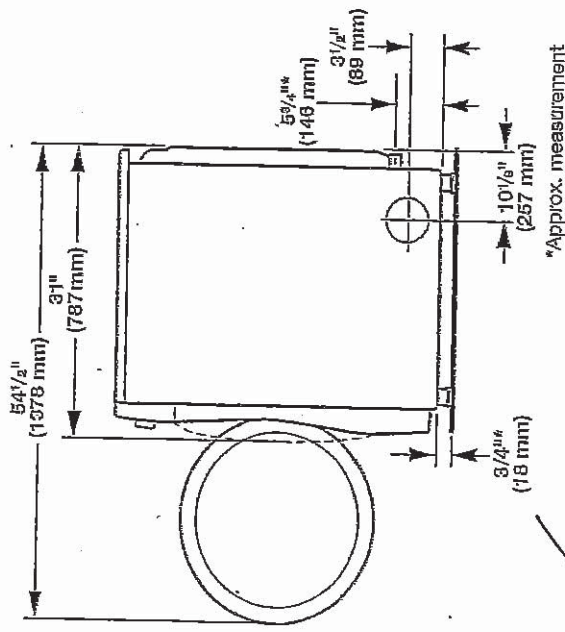

Maytag Models

