



09-Aug-21

LOT	001-7	* REUSED *	20-2447-UG ELEV A THE JAMESPORT
PURCHASERS: HUSNA ARGHANDEWAL		CONTACT NO: 647-394-3004	
VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED			

OPTIONAL COFFERED CEILING IN GREAT ROOM *

OPTIONAL COFFERED CEILING IN LIVING ROOM

- ☒ FINISHED BASEMENT
- ☐ COLD CELLAR
- UPGRADED / MODIFIED ELEVATION
- ☐ CORNER UPGRADE
- ☐ SIDE UPGRADE
- ☐ REAR UPGRADE
- CEILING UPGRADE - SMOOTH
- ☒ MAIN FLOOR *
- ☐ SECOND FLOOR
- ADDITIONAL ROUGH-INS
- ☒ 200 AMP SERVICE
- ☐ WET BAR ROUGH IN
- GAS ROUGH-IN
- ☒ STOVE *
- ☐ BBQ
- HOODFAN VENTING
- ☐ 6" ROUND DUCT
- ☒ 7" ROUND DUCT *
- ☐ WALK OUT DECK
- ☐ WALK OUT BASEMENT
- ☐ BASEMENT
- ☐ HUMIDIFIER
- ☒ AIRCON
- ☐ DRYER
- ☐ ADDITIONAL FIREPLACE

FULL BASEMENT STAIRS: PAINT GRADE

UPPER BASEMENT STAIRS: N/A

LOWER BASEMENT STAIRS: N/A

STAIRS TO LOWER LEVEL: ALL OAK

STAIRS TO UPPER LEVEL: N/A

MAIN STAIRS: ALL OAK

MEDIA STAIRS (if applicable): N/A

Date	Aug 9/21	Signature on file	Aug 9/21	TINA LEFUR
Date		Purchaser	Date	Décor Consultant
		* APPROVED *		
Date		Purchaser	Date	-03-09-2021
		mRoun		

Date Approved

HEATHWOOD HOMES (UPCOUNTRY) LIMITED



Interior Finishing Selection Sheet

26-Jul-21

LOT 001-7

20-2447-UG ELEV A THE JAMESPORT

PURCHASERS: HUSNA ARGHANDEWAL

CONTACT NO: 647-394-3004

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Appliances

6-34 Kitchen HoodFan

☐ Air King Under Cabinet Range Hood STAINLESS STEEL AV1308 STD 30" PAGE 26

Cabinetry

1-9176 Kitchen Cabinet Colour/Style

☐ TRINITY VIVA WEEKEND GETAWAY Viking III STD

3-2086 Kitchen Cabinet Hardware

☐ HARDWARE 9677 STD

2-9156 Main Bathroom Cabinet Colour/Style

☐ SIMCOE RAIN CLOUD Viking III STD 3DL

2-2086 Main Bathroom Cabinet Hardware

☐ HARDWARE 9677 STD

2-8796 Main Bathroom Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46 Formica

2-0157 Master Ensuite Cabinet Colour/Style

☐ SIMCOE MOONLIGHT Viking III STD 3DL

2-2086 Master Ensuite Cabinet Hardware

☐ HARDWARE 9677 STD

2-1-8796 Master Ensuite Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46 Formica

414-9156 Powder Room Lower Level Cabinet Colour/Style

☐ SIMCOE RAIN CLOUD Viking III STD 3DL

416-2086 Powder Room Lower Level Cabinet Hardware

☐ HARDWARE 9677 STD

415-8796 Powder Room Lower Level Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46 Formica

Carpet

37-9248 Bedroom 2 Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

38-9248 Bedroom 3 Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

14-9248 Family Room Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

367-9248 Lower Level Hall Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

36-9248 Master Bedroom Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

52-1079 Throughout Underpad

☐ Underpad 500 Series STD

Ceramics

16-9106 Foyer Flooring

☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte

- The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
- The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
- The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- Selections will not be processed unless signed by Heathwood Homes Head Office.
- The colour selections made on the Colour Chart are final and cannot be changed once submitted.
- The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

26.7.2021

Date Purchaser

Date -03-09-2021

Décor Consultant

TINA LEFUR

Date Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



Interior Finishing Selection Sheet

26-Jul-21

LOT 001-7

20-2447-UG ELEV A THE JAMESPORT

PURCHASERS: HUSNA ARGHANDEWAL

CONTACT NO: 647-394-3004

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Ceramics		UPG
17-2225 Foyer Grout	☐ Grout (27) Silver STD	
4-8104 Kitchen Backsplash	☒ ONTARIO HEXAGON MATTIE TAUPE OD.ON.TPE.02.HEX.MT UPG_2	
5-2226 Kitchen Backsplash Grout	☐ Grout (00) White STD	
7-9106 Kitchen/Breakfast Flooring	☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte	
8-2225 Kitchen/Breakfast Grout	☐ Grout (27) Silver STD	
348-9257 Laundry Mud Room Flooring	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13	
349-2225 Laundry Mud Room Grout	☐ Grout (27) Silver STD	
30-9257 Main Bathroom Flooring	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13	
31-2225 Main Bathroom Grout	☐ Grout (27) Silver STD	
112-9020 Main Bathroom Wall Tile	☐ Weave White QT.WV.WHT.0810 STD 8 x 10 INSTALL STACKED HORIZONTAL	
113-2226 Main Bathroom Wall Tile Grout	☐ Grout (00) White STD	
23-9257 Master Ensuite Floor Tile	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13	
24-2226 Master Ensuite Floor Tile Grout	☐ Grout (00) White STD	
73-8661 Master Ensuite Shower Floor Tile	☐ Ontario Series Mosaic Snow White Matte OD.ON.SWT.0202.MT.N STD 2 x 2	
74-2226 Master Ensuite Shower Floor Tile Grout	☐ Grout (00) White STD	
147-8923 Master Ensuite Shower Jamb(s) and Sill(s)	☐ Shower Jamb / Sill Thassos White STD	
104-9020 Master Ensuite Shower Wall Tile	☐ Weave White QT.WV.WHT.0810 STD 8 x 10 INSTALL STACKED HORIZONTAL	
105-2226 Master Ensuite Shower Wall Tile Grout	☐ Grout (00) White STD	
32-9106 Powder Room Flooring	☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte	
33-2225 Powder Room Grout	☐ Grout (27) Silver STD	
349-9257 Powder Room Lower Level Flooring	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13	

- The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
- The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
- The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- Selections will not be processed unless signed by Heathwood Homes Head Office.
- The colour selections made on the Colour Chart are final and cannot be changed once submitted.
- The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

26.07.2021

Husna

7/26/21

T. W. A. L. E. F. U. R.

Date

Purchaser

Date APPROVED

Décor Consultant

myraen

-03-09-2021

Date

Purchaser

Date Approved

HEATHWOOD HOMES (UPCOUNTRY)

LIMITED



Interior Finishing Selection Sheet

26-Jul-21

LOT 001-7

20-2447-UG ELEV A THE JAMESPORT

PURCHASERS: HUSNA ARGHANDEWAL

CONTACT NO: 647-394-3004

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Ceramics

370-2225 Powder Room Lower Level Grout

☐ Grout (27) Silver STD

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-9114 Great Room Fireplace Mantle

☐ Paint Grade Mantel- Cabinet (Per Plan) WHITE NF 15 STD
PAGE 19

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-9069 Kitchen Countertop
4121

☐ MSI Quartz ICED WHITE Group 1 STD 3/4" WITH MITERED
B/L EDGE

Hardwood

11-9358 Great Room Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl
TITANIUM Red Oak Pearl 3/4" X 3 1/4"

12-9358 Living Room Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl
TITANIUM Red Oak Pearl 3/4" X 3 1/4"

98-9358 Main Hall Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl
TITANIUM Red Oak Pearl 3/4" X 3 1/4"

78-9059 Stair Landing to Lower Level Flooring

☒ Red Oak-Vintage 3 1/4 inch Pre-Sanded Smooth Unfinished Red
Oak-Unfinished-3/4 inch x 3 1/4inch 3/4" x 3 1/4"

77-9059 Stair Landing to Upper Level Flooring

☒ Red Oak-Vintage 3 1/4 inch Pre-Sanded Smooth Unfinished Red
Oak-Unfinished-3/4 inch x 3 1/4inch 3/4" x 3 1/4"

35-9358 Upper Hall Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl
TITANIUM Red Oak Pearl 3/4" X 3 1/4"

Interior Railings

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)
BLACK METAL STD

43-8148 Stairs to Upper Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)
BLACK METAL STD

Interior Stairs

116-1713 Basement Stairs Type

☐ Paint Grade Stairs STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

26.07.2021
Date Purchaser

7/26/21
Date
TINA LEFUR
Décor Consultant

Date Purchaser

Date Approved
HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



26-Jul-21

Interior Finishing Selection Sheet

LOT 001-7

20-2447-UG ELEV A THE JAMESPORT

PURCHASERS: HUSNA ARGHANDEWAL

CONTACT NO: 647-394-3004

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG	
Interior Stairs	
45-1712 Stairs to Lower Level Type	☐ Oak Stairs UPG_1
39-1712 Stairs to Upper Level Type	☐ Oak Stairs UPG_1
Interior Trim	
91-9374 Throughout Trim Size	☐ 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings STD-Towns
Painting	
46-7761 Stairs to Lower Level Colour	☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIRS TO BE STAINED SAMBUCCA
40-7761 Stairs to Upper Level Colour	☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIRS TO BE STAINED SAMBUCCA
240-1716 Throughout Trim - Paint Colour	☐ Trim WHITE STD
51-1717 Throughout Walls - Paint Colour	☐ Wall WARM GREY 22 STD
Plumbing	
266-1737 Main Bathroom Plumbing Fixture (Colour)	☐ Plumbing Fixtures WHITE STD
149-1737 Master Ensuite Plumbing Fixture (colour)	☐ Plumbing Fixtures WHITE STD
34-1737 Powder Room Plumbing Fixture (Colour)	☐ Plumbing Fixtures WHITE STD
371-1737 Powder Room Lower Level Plumbing Fixture (Colour)	☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

26.07.2021 Purchaser

7/26/27 Décor Consultant
Date APPROVED -
-09-09-2021

TINA LEFOR

Date Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



26-Jul-21

Sales Selection Sheet

LOT 001-7

20-2447-UG ELEV A THE JAMESPORT

PURCHASERS: HUSNA ARGHANDEWAL

CONTACT NO: 647-394-3004

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Cabinetry		Qty:
440	Optional Extras 03H- 66cm deep fridge cabinet (counter depth)(66cm fridge gable(s) sold separately) Viking SKETCH #7 PAGE 17	1
Ceramics		
773	Upgrade 1 Tile	1
777	Upgrade 1 Tile	1
1197	Upgrade 2 Tile	1
774	Upgrade 1 Tile	1
Coffered Ceiling		
629	Optional Upgrade	1
630	Optional Upgrade	1
Drywall		

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.

2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.

3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.

4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.

5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.

6. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.

7. Selections will not be processed unless signed by Heathwood Homes Head Office.

8. The selections made on this schedule are final and cannot be changed once submitted.

9. The Purchaser has checked and acknowledges the accuracy of this schedule.

26.07.2021

Date
Purchaser

7/26/21

Date APPROVED - Décor Consultant
TINA LEFUR

Date
Purchaser

-08-09-2021

Date Approved HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



26-Jul-21

Sales Selection Sheet
3 of 10

LOT 001-7

20-2447-UG ELEV A THE JAMESPORT

PURCHASERS: HUSNA ARGHANDEWAL

CONTACT NO: 647-394-3004

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein. It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

634 Ceiling Upgrades
Smooth Ceilings Main Floor

Qty: 1

Electrical

284 Optional Extras
Extra wall interior outlet on Existing Circuit (does not include kitchen outlets)
TO BE CENTERED +/- ABOVE FIREPLACE 70" +/- FROM FLOOR. SEE SKETCH
7 PAGE 17

Qty: 1

286 Optional Extras

Ceiling rough-in (Capped)
TO BE CENTERED ON ISLAND. SEE SKETCH # 7 PAGE 17
ON EXISTING KITCHEN SWITCH

Qty: 3

Fireplace

44
Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle. Purchasers acknowledge: Heathwood Homes and its contractors will not be liable for any damage on items placed/installed above a FP after closing

Qty: 1

Granite

656 Optional Upgrade
Countertop 3/4" GROUP 1 with double edge

Qty: 1

Heating / Air

277 Optional Extras
ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (See specs) (Hook-up not included) Leave standard 120 volt electrical outlet on a separate circuit. SKETCH # 7 PAGE 17
STOVE SPECS PAGES 28-31

Qty: 1

- This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
- All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
 - In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
 - The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
 - Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
 - The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
 - The Vendor reserves the right to be processed unless signed by Heathwood Homes Head Office.
 - The selections made on this schedule are final and cannot be changed once submitted.
 - The Purchaser has checked and acknowledges the accuracy of this schedule.

26.07.2021
Date
Purchaser

7/26/21
Date APPROVED - Décor Consultant

Date
Purchaser

-08-09-2021
Date Approved
HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



26-Jul-21

Sales Selection Sheet

LOT 001-7

20-2447-UG ELEV A THE JAMESPORT

PURCHASERS: HUSNA ARGHANDEWAL

CONTACT NO: 647-394-3004

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Painting

350 Optional Extras - PAINT / STAIN - Custom Qty: 2
Stain stair landing less than 25sq/ft in sambucca. For stair with metal pickets only.
5" (Unfinished Pre-sanded) smooth hardwood will be installed and to be stained in sambucca to match the stairs

Plumbing

225 STANDARD Kitchen Sink Option Qty: 1
KINDRED Kitchen Sink Collection - Reginox ND1831 UA/9 Stainless Kitchen Double (equal size) Bowl Undermount Sink (or equivalent) PAGE 20

Security

335 Optional Extra Qty: 1
Security Camera Rough-in
TO BE LOCATED OUTSIDE SLIDER ON LOWER LEVEL. SEE SKETCH
6 PAGE 16 FOR LOCATION.

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

26-07-2021 Purchaser

7/26/21 Tina Lefur
Date APPROVED - Décor Consultant

Date Purchaser

M. Rosen

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED

CU COUNTRY LANE
LOT 1-7
20-2447 ELEV A UPG END
THE JAMESPORT


15 of 40

The Jamesport

20-2447 ELEV. A UPG END

ELEVATION A & B
UPGRADE END: 2,504 SQ FT

Lot 1-1 and 1-7 Sketch #5

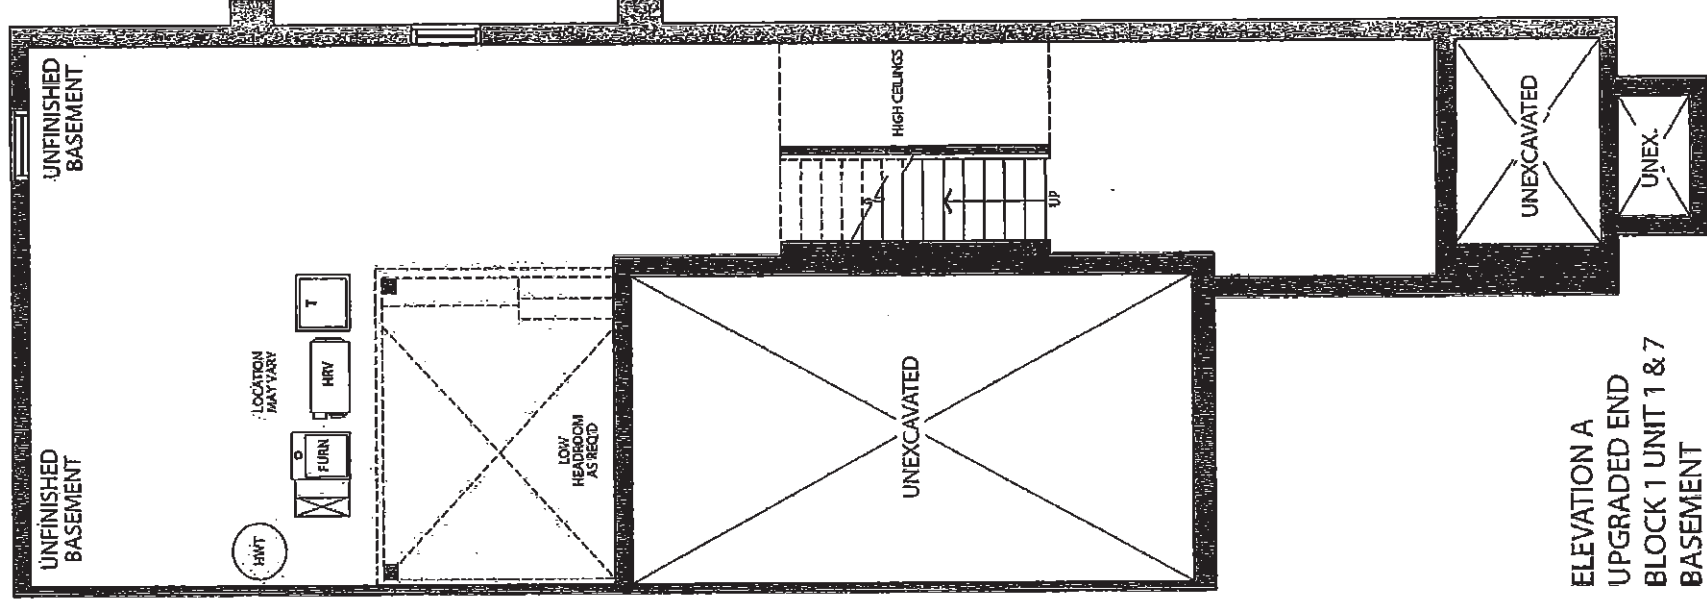

ELEVATION A
UPGRADED END
BLOCK 1 UNIT 1 & 7
BASEMENT

CU COUNTRY LANE
LOT 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

16 of 40


The Jamesport

20-2447 ELEV. A UPG END

ELEVATION A & B
UPGRADE END: 2,504 SQ FT

Lot 1-1 and 1-7 Sketch #6

SECURITY
CAMERA R/I

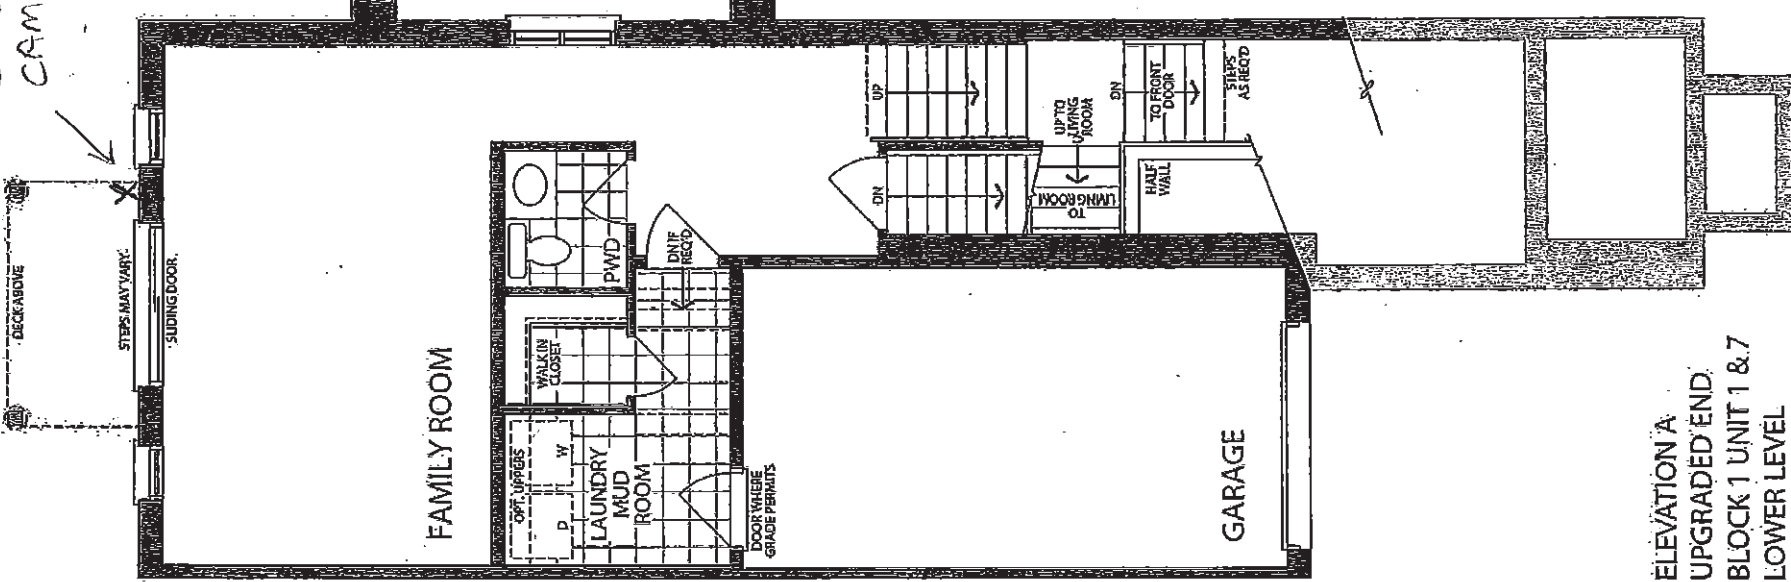

ELEVATION A
UPGRADED END
BLOCK 1 UNIT 1 & 7
LOWER LEVEL

CU COUNTRY LANE
LOT 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

17 of 40

The Jamesport

20-2447 ELEV. A UPG END

ELEVATION A & B
UPGRADE END: 2,504 SQ FT.


Lot 1-1 and 1-7

Sketch #7



PLUG & 1/2" ABOVE
FIREPLACE AT 70" +/-
FROM THE FLOOR

3X
CARPED
ELECTICAL
& 1/2" ON ISLAND
GAS LINE
R/I
DEEP FRIDGE
UPPERS

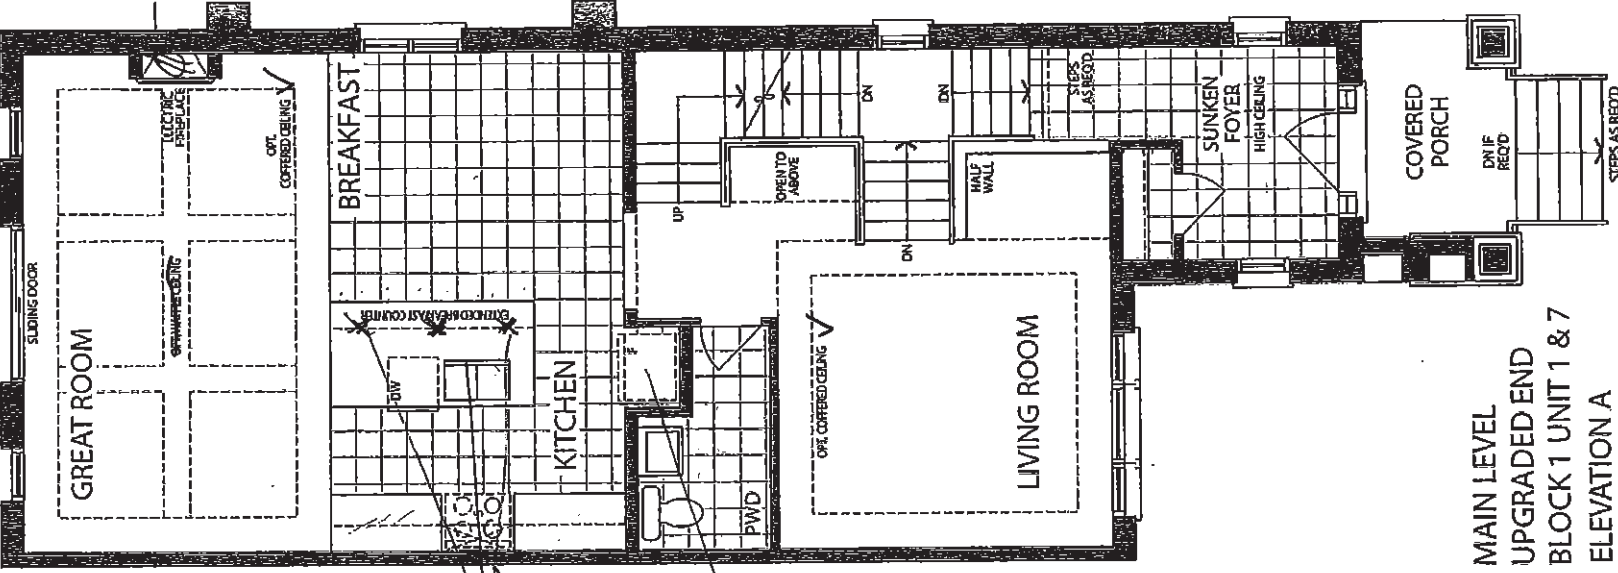

MAIN LEVEL
UPGRADED END
BLOCK 1 UNIT 1 & 7
ELEVATION A

CU COUNTRY LANE
LOT 1-7
20-2447 ELEV A UPG END
THE JAMESPORT


18 of 40

The Jamesport

ELEVATION A & B
UPGRADE END: 2,504 SQ FT

20-2447 ELEV. A UPG END

Lot 1-1 and 1-7 Sketch #8

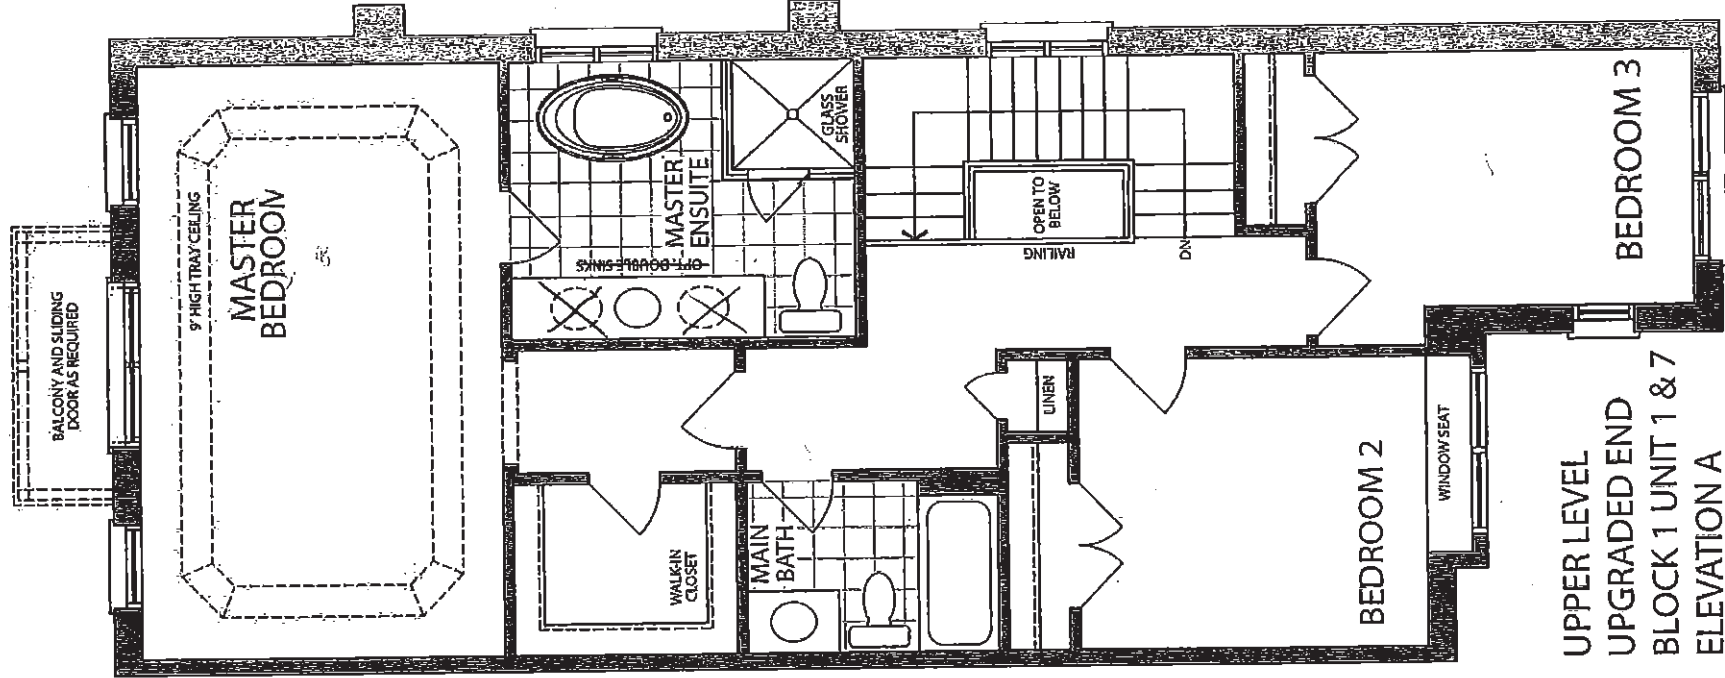


18A

UPPER LEVEL
UPGRADED END
BLOCK 1 UNIT 1 & 7
ELEVATION A

CU COUNTRY LANE
LOT 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

19 of 40

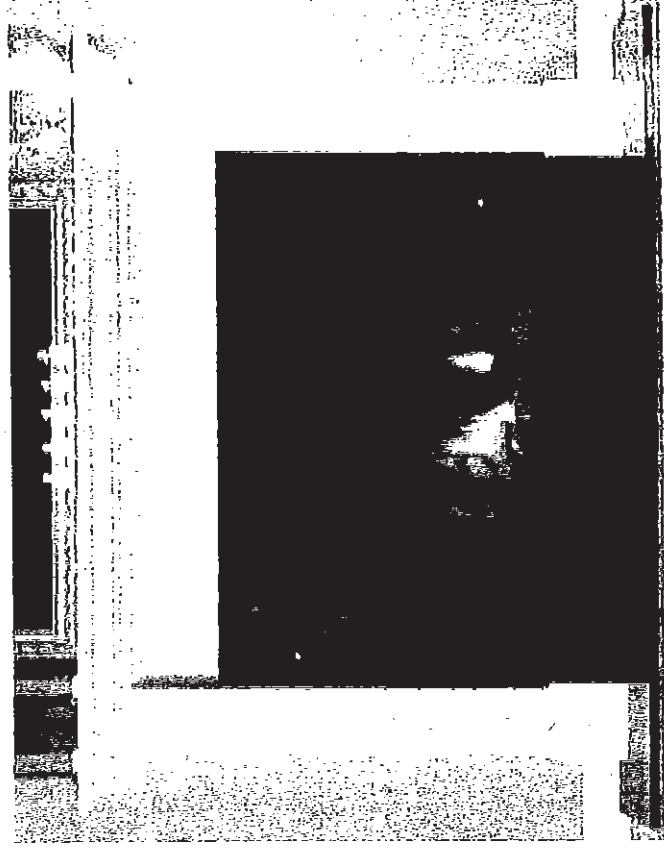

'CABINET'

NEAS NF15 Mantel

H


CU COUNTRY LANE
 LOT 1-7
 20-2447 ELEV A UPG END
 THE JAMESPORT

20 of 40



Regatta

STANDARD KITCHEN SINK

ND1831UA/9

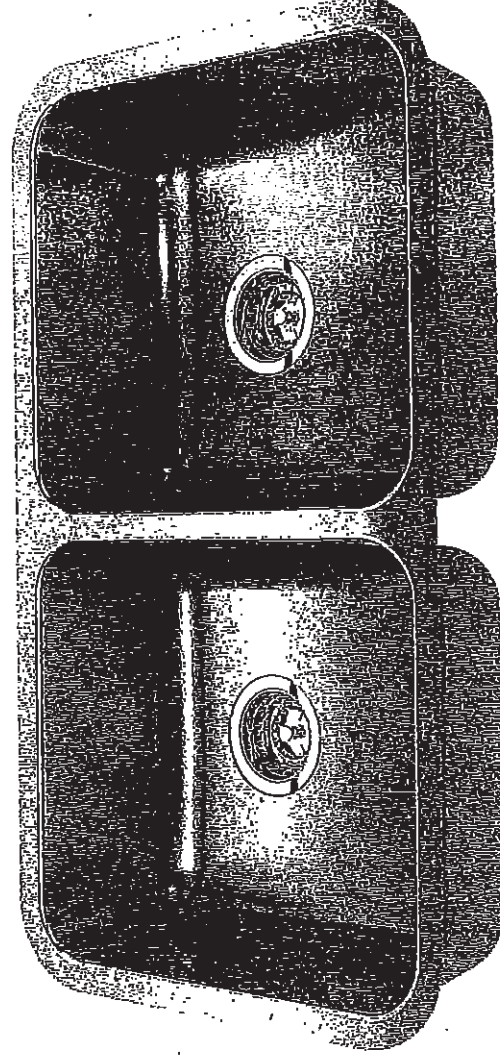

Optional Accessories

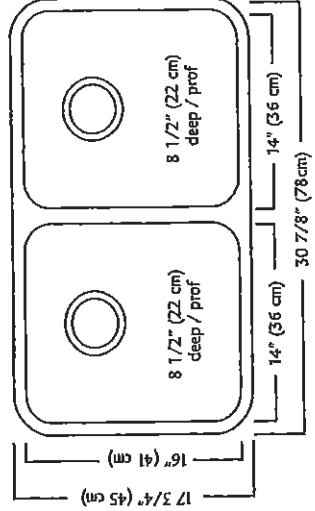

ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2\", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4\" x 30 7/8\" x 8 1/2\" (45 x 78 x 22 cm)
- Recommended for minimum 36\" cabinet

Franke Kindred Canada Limited
 P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

20 of 40


CU COUNTRY LANE
LOT 1-7
202447 ELEV A UPG END
THE JAMESPORT

21 of 140

STANDARD KITCHEN FAUCET

Align

Modern

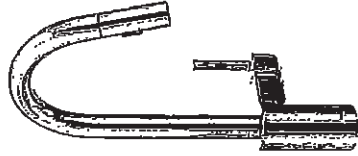

Single Handle Pull-Down Kitchen
Faucet#

Model 7565+

CU COUNTRY LANE
LOT 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

22 of 40

American
Standard

BOULEVARD®
PEDESTAL SINK
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (illustrated)
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:
24" x 19" x 35-1/2"
(610 x 483 x 902mm)


- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:
17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -
Meets or Exceeds the Following Specifications:
• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:
☐ Color: ☐ White ☐ Linen
☐ Faucet Finish:
☐ Supplies:
☐ 1-1/4" Trap:
☐ Nipple:

* See faucet section for additional models available

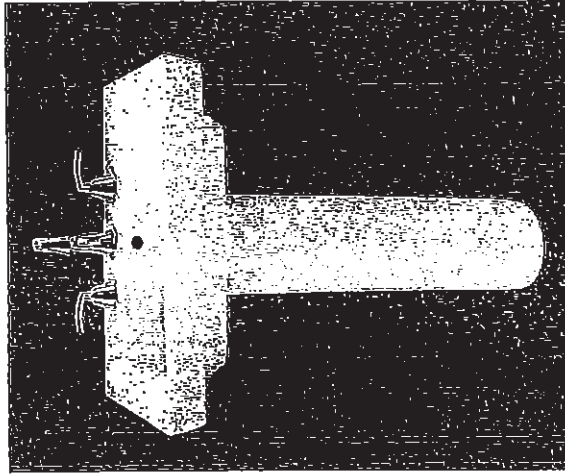

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

CU COUNTRY LANE
LO 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

COLONY COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

- ☒ 0346 803
Faucet holes on 203mm (8") centres
- ☐ 0346 403 (Illustrated)
Faucet holes on 102mm (4") centres
- ☐ 0346 001
Centre hole only

Nominal Dimensions:
521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:
422mm (16-5/8") wide, 279mm (11") front to
back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS –
Meets or exceeds the following Specifications:
• ASME A112.19.2M for Vitreous China Fixtures.
• CAN/CSA B45 Series.

To Be Specified

☐ Colour: ☒ White

☐ Bone

☐ Silver Gray

☐ Linen

Faucet*:

☐ Faucet Finish:

☐ Supplies & Stops:

☐ Trap 1-1/4" (32 mm):





• See faucet section for additional models available

BAS-198

© 2000 American Standard Inc.

01/07


23 of 1 COLONY™
COUNTERTOP SINK
VITREOUS CHINA

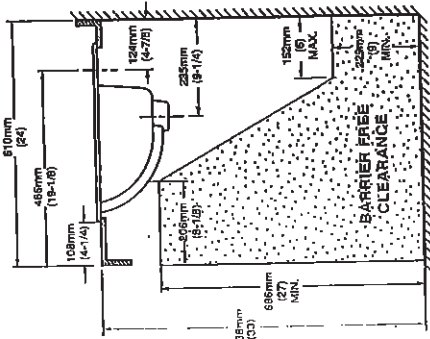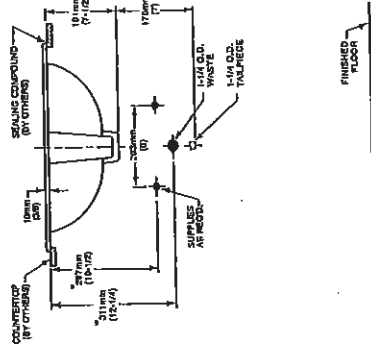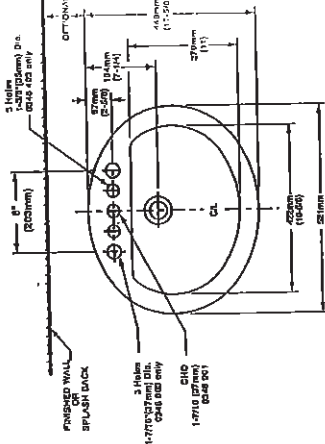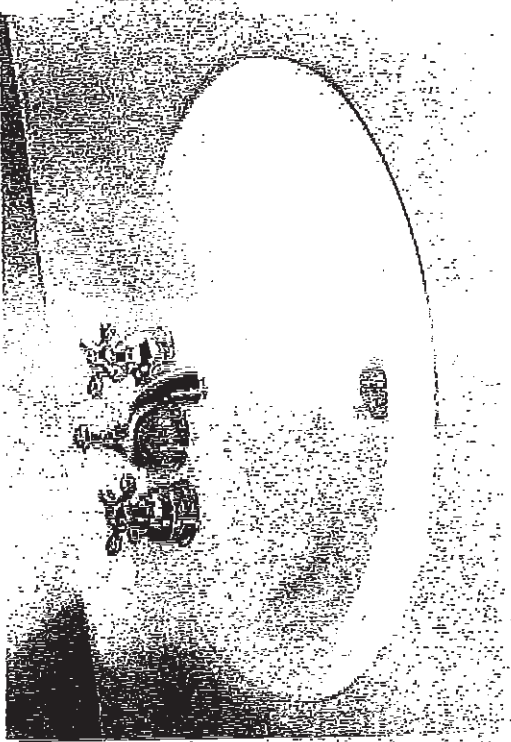

NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use
of superseded or voided pages.

CU COUNTRY LANE
LOT 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

24 of 40

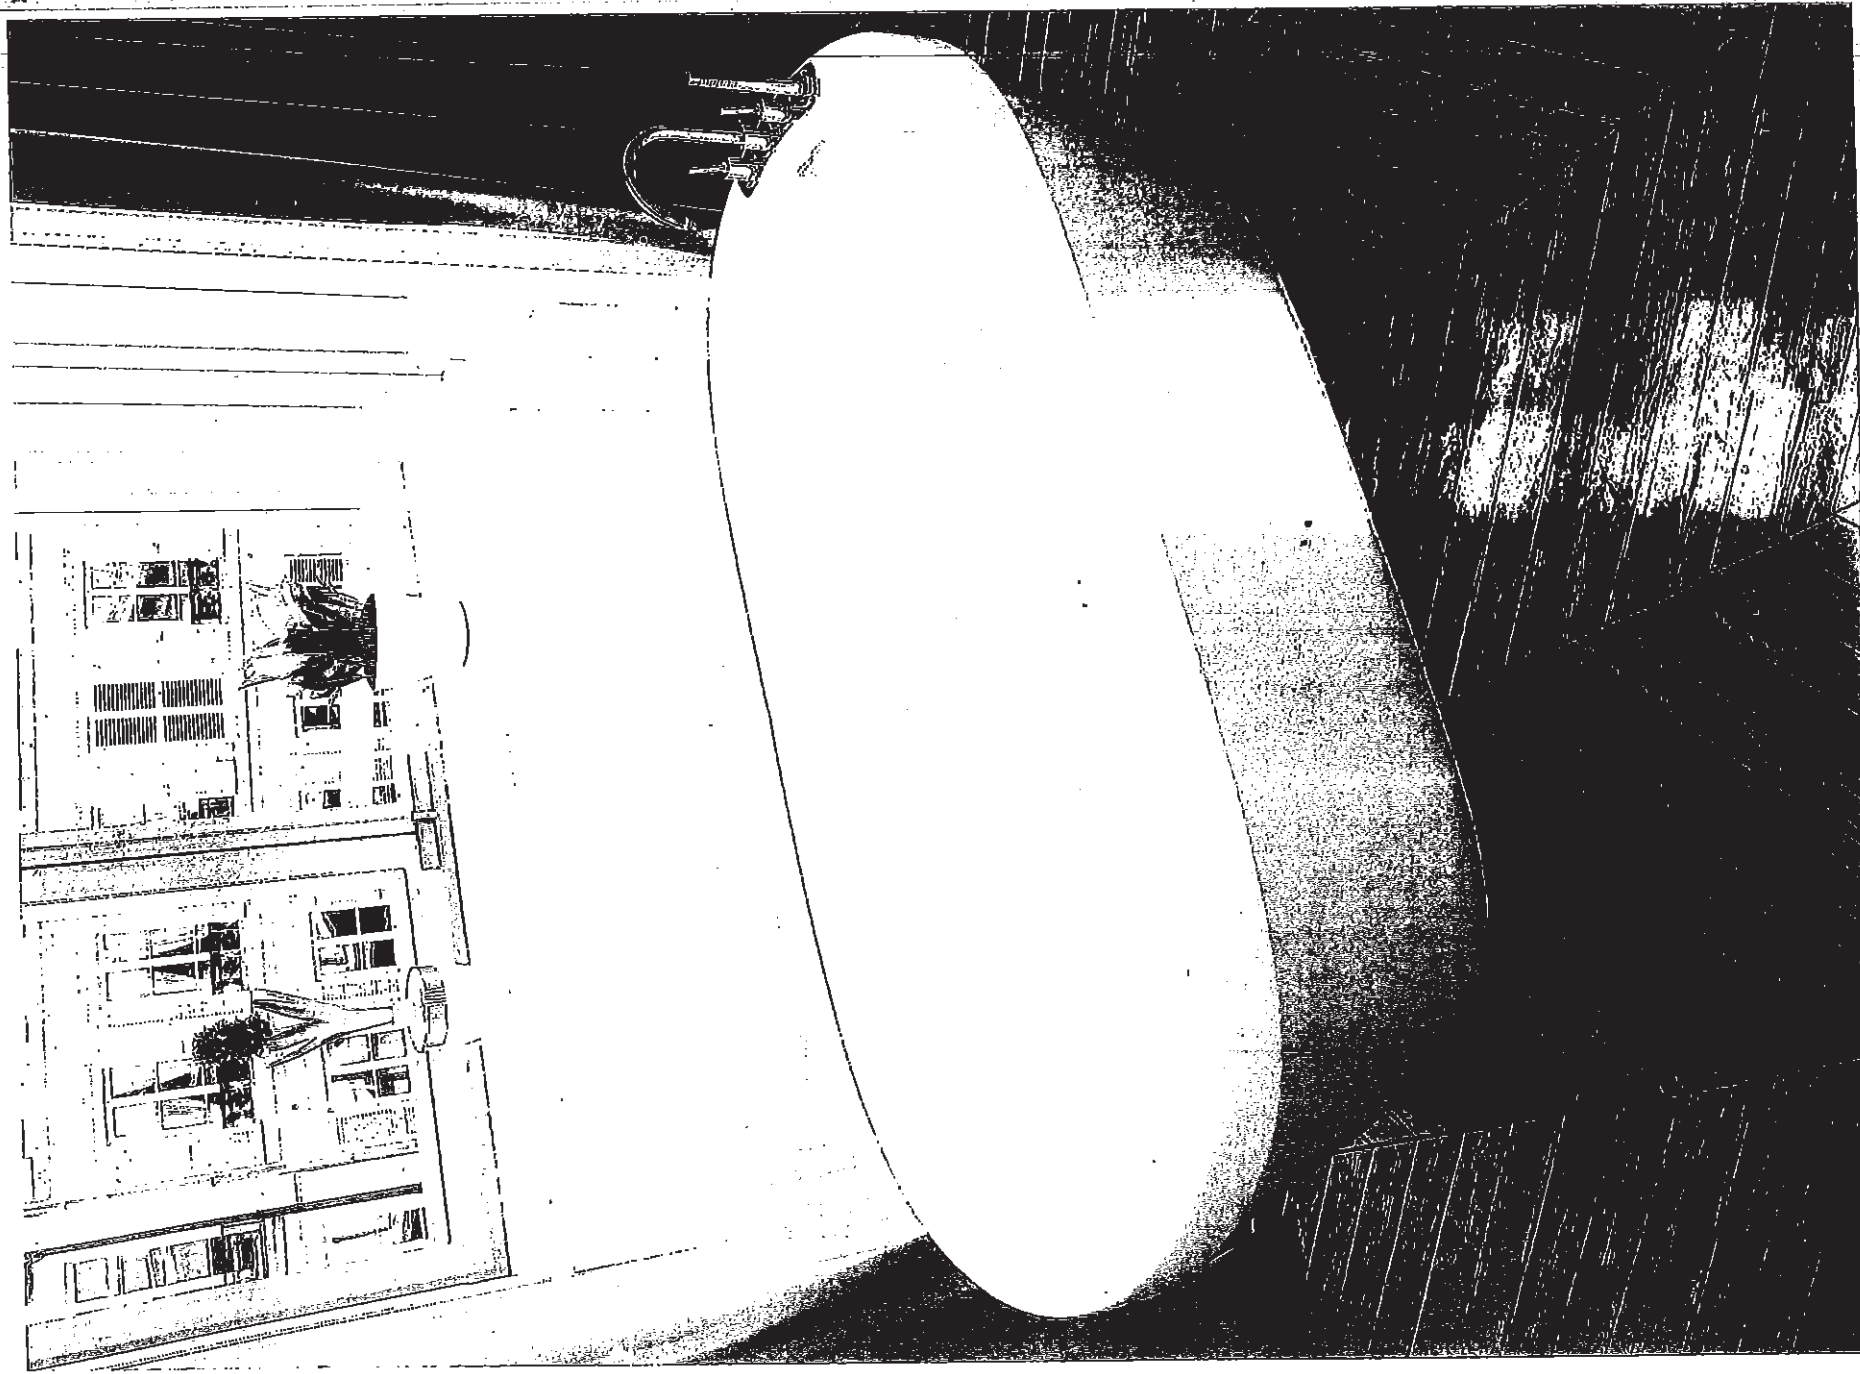


Demi CF2007

CU COUNTRY LANE
LOT 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

25 of 40


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP†

(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

CU COUNTRY LANE
LOT 1-7
20-2447 ELEV A UPG END
THE JAMESPORT


26 of 40




SPECIFICATIONS
AV SERIES
RANGE HOODS

HVI CERTIFIED	180 CFM/7.0 Sones @ 0.10" SP. Horizontal
	180 CFM/7.5 Sones @ 0.10" SP. Vertical

- Dimensions**
Overall bottom projection - 18 3/8"
Overall top projection - 12"
Height - 6"
Available widths: 21", 24", 30", 36" & 42"
- Hood Body**
Stainless Steel: 24 gauge, grade 430 stainless steel.
Painted: 23 gauge cold rolled commercial grade (CROQ) steel, auto welded, coated with a baked enamel finish.
- Motor**
2 speed, single coil, thermally protected, permanently lubricated.
Rated 120 volts, 60 Hz. Complete with 200°C lead wires.
- Lighting**
Single 60 watt cook light capacity (bulb not included).
- Ducting Options**
Horizontal ducting: 3 1/4"x10" (duct adapter and damper included).
Vertical ducting: 3 1/4"x10" (duct adapter and damper included).
Vertical ducting: 7" round (duct adapter and damper not included).
Ductless: removable front vent (charcoal filter not included).
- Fan Blade**
One piece polymeric, electronically balanced blade. 65/8" diameter with 5 paddles.
- Electrical connection**
Hood top - 7/8" knockout hole for use with 1/2" cable clamp
Hood back - 7/8" knockout hole for use with 1/2" cable clamp

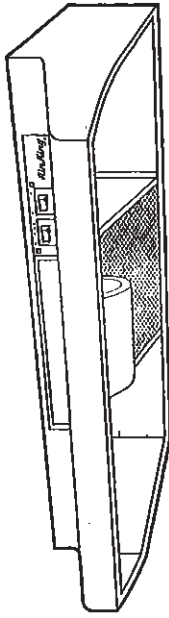

AV SERIES

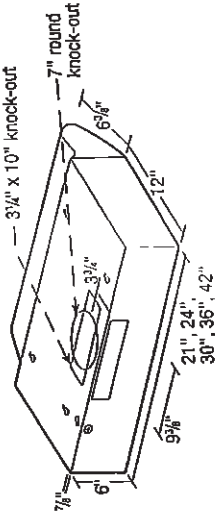

- Filters**
UL rated, class 2 filter.
Grease Filter: RF35 - 87/8"x103/8" (included).
Charcoal Filter: RF34 (not included).
Combo Grease/Charcoal: RF55 (not included).
- Available Finishes**
White, Biscuit, Almond, Black & Stainless Steel.

EXPANDED PERFORMANCE									
Air Flow - CFM	Static Pressure (inches of w.g.)					Sones @ .1 SP	Fan Speed RPM	Power Watts	Amps
	0	0.05	0.1	0.15	0.2				
	246	232	218	203	181				
	225	210	180	175	155				
Vertical Ducting High	246	232	218	203	181	147	7.5	2973	87.0
Horizontal Ducting High	225	210	180	175	155	120	7.0	3024	87.0

PROJECT	ARCHITECT						
LOCATION	ENGINEER						
CONTRACTOR	SUBMITTED BY						
	DATE						
FAN MODEL NUMBER	CFM	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS



Air King: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada: Brampton, Ontario
Tel: 905-456-2033
Fax: (905) 456-1015

Specifications subject to change without notice.

Updated 2-18

CU COUNTRY LANE
LO 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

27 of 40



WRF 555SDFX
French Door w/Ice Dispenser Refrigerator

PRODUCT MODEL NUMBERS

WRF555SDF

Electrical: A 115-volt, 60 Hz, AC-only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator and approved accessories be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.


NOTE: If the water pressure is less than what is required, the flow of water from the water dispenser could decrease or ice cubes could be hollow or irregular shaped.

Reverse Osmosis Water Supply:

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

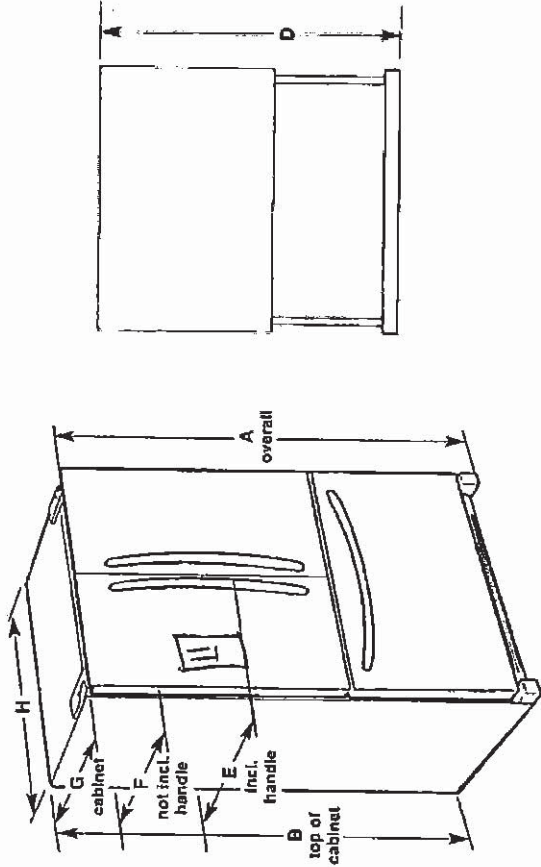

Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Dep't. - Door Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"
24.7 cu. ft.	70 1/2" (178.1 cm)	68 1/2" (173.3 cm)	48" (121.9 cm)	54" (137.2 cm)	35 7/8" (89.5 cm)	32 1/8" (83.5 cm)	29" (73.7 cm)	35 1/2" (90.5 cm)

LOCATION REQUIREMENTS

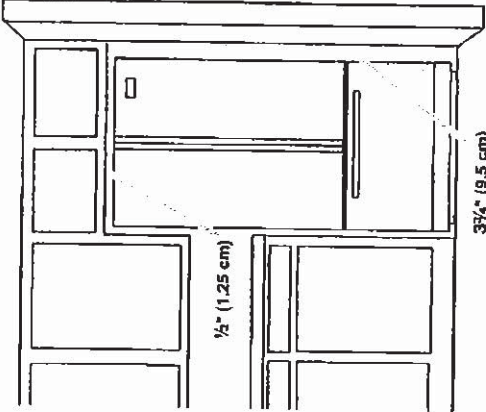

IMPORTANT: This refrigerator is designed for indoor, household use only. To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) of space on each side and at the top. Allow for a 1" (2.54 cm) space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 3 3/4" (9.5 cm) minimum space between the refrigerator and wall to allow the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.



Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Ref. W10855065A
5/16

CU COUNTRY LANE
LOT 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

28 of 40

Front Control Gas Ranges

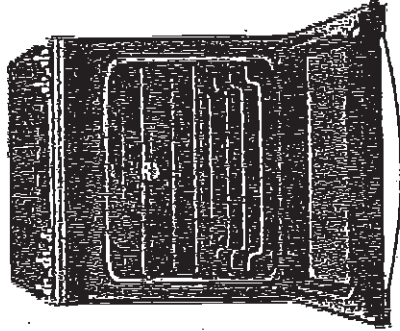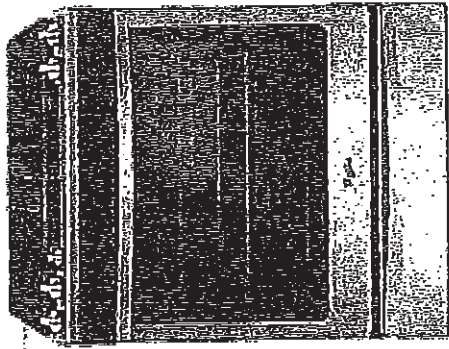

WEG745H0F

30" Freestanding Range - 5.8 cu. ft.



TimeSavor™ system
• Frozen Bake™ Technology



HeatRight™ system
• True Convection
• Convection Conversion
• AccuSimmer™ burner
• Gentle Oval burner
• Temperature Sensor




CompleteClean System
• EZ-2-Lift™ Hinged Grates
• Actualize™ Self-cleaning Technology
• Dishwasher-safe knobs



ReadySet™ system
• (2) SpeedHeat™ burners
• Rapid Preheat
• Keep Warm
• Delay Cook



Available colors




S
Stainless Steel



E
Black

PRODUCT DIMENSIONS

The standard listed dimensions are for the range as shown. Dimensions may vary slightly due to manufacturing tolerances.




- A. 24 1/4" (610 mm) height from floor to top of hood
- B. 24 1/4" (610 mm) height from floor to top of oven door
- C. 24 1/4" (610 mm) height from floor to top of broiler
- D. 24 1/4" (610 mm) height from floor to top of cooktop
- E. 24 1/4" (610 mm) height from floor to top of oven door
- F. 24 1/4" (610 mm) height from floor to top of broiler
- G. 24 1/4" (610 mm) height from floor to top of cooktop
- H. 24 1/4" (610 mm) height from floor to top of oven door
- I. 24 1/4" (610 mm) height from floor to top of broiler
- J. 24 1/4" (610 mm) height from floor to top of cooktop

NOTE: (A) and (B) are minimum dimensions for installation. (C) and (D) are maximum dimensions for installation. (E) and (F) are minimum dimensions for installation. (G) and (H) are maximum dimensions for installation. (I) and (J) are minimum dimensions for installation.

Type of Gas

NOTE: (A) and (B) are minimum dimensions for installation. (C) and (D) are maximum dimensions for installation. (E) and (F) are minimum dimensions for installation. (G) and (H) are maximum dimensions for installation. (I) and (J) are minimum dimensions for installation.

CABINET OPENING DIMENSIONS

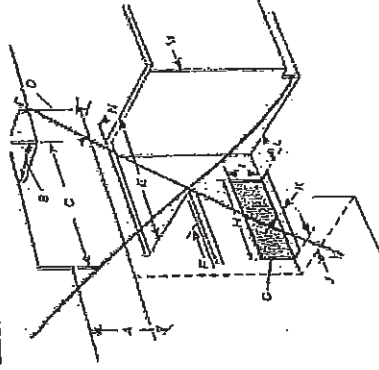

NOTE: (A) and (B) are minimum dimensions for installation. (C) and (D) are maximum dimensions for installation. (E) and (F) are minimum dimensions for installation. (G) and (H) are maximum dimensions for installation. (I) and (J) are minimum dimensions for installation.

NOTE: (A) and (B) are minimum dimensions for installation. (C) and (D) are maximum dimensions for installation. (E) and (F) are minimum dimensions for installation. (G) and (H) are maximum dimensions for installation. (I) and (J) are minimum dimensions for installation.

INSTALLATION

NOTE: (A) and (B) are minimum dimensions for installation. (C) and (D) are maximum dimensions for installation. (E) and (F) are minimum dimensions for installation. (G) and (H) are maximum dimensions for installation. (I) and (J) are minimum dimensions for installation.

NOTE: (A) and (B) are minimum dimensions for installation. (C) and (D) are maximum dimensions for installation. (E) and (F) are minimum dimensions for installation. (G) and (H) are maximum dimensions for installation. (I) and (J) are minimum dimensions for installation.

NOTE: (A) and (B) are minimum dimensions for installation. (C) and (D) are maximum dimensions for installation. (E) and (F) are minimum dimensions for installation. (G) and (H) are maximum dimensions for installation. (I) and (J) are minimum dimensions for installation.

NOTE: (A) and (B) are minimum dimensions for installation. (C) and (D) are maximum dimensions for installation. (E) and (F) are minimum dimensions for installation. (G) and (H) are maximum dimensions for installation. (I) and (J) are minimum dimensions for installation.

ACCESSORIES & REPLACEMENT PARTS

- Part number 8273882A Anti-Tip Kit for Range
- Part number 4375577 Brick Baking Stone
- Part number 4396623 Porcelain Broiler Pan & Grid
- Part number W10123310 Premium Broil Pan & Roasting Rack
- Part number 8002 Appliance Light Bulb - 40 Watt



*Compared to a national electrical and building code for ranges, refrigerators, and laundry appliances. Testmark, 2014.

© 2014 Whirlpool. All rights reserved. 576. Form No. WEG745H0F

L-A

CU COUNTRY LANE
LO 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

29 of 40

WEA745 HØFS

Mobile Home - Additional Installation Requirements

The installation of this range must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home Construction and Safety, Title 24, HUD Part 280). When such standard is not applicable, use the Standard for Manufactured Home Installations, ANSI A225.1/NFPA 501A or with local codes.

In Canada, the installation of this range must conform with the current standards CAN/CSA-A240-latest edition, or with local codes.


Mobile Home Installations Require:

- When this range is installed in a mobile home, it must be secured to the floor during transit. Any method of securing the range is adequate as long as it conforms to the standards listed above.

Product Dimensions

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

Model KSGB900

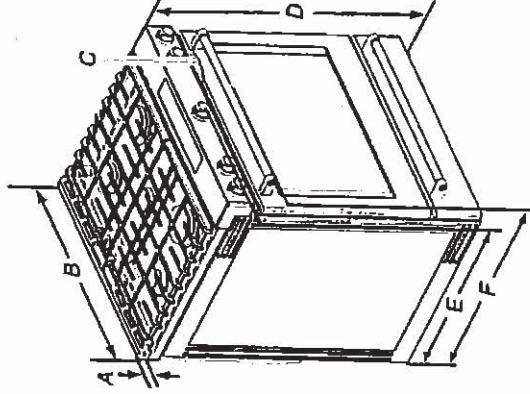

A. 1 7/8" (3.0 cm) height from cooktop to top of vent

B. 29 1/2" (75.9 cm)

C. Model serial rating plate (located behind the oven door on the top right-hand side of the oven frame)

D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed in all the way*

E. 28 3/8" (71.9 cm) max. depth from front of console to back of range

F. 28 1/2" (73.3 cm) max. depth from handle to back of range

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

CU COUNTRY LANE
LO 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

30 of 40


WEG745HØFS

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.


IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.
Range may be installed next to combustible walls with zero clearance.

NOTE: When installed in a slide-in cutout, the front of oven door may protrude beyond the base cabinet.
Slide-In Cutout

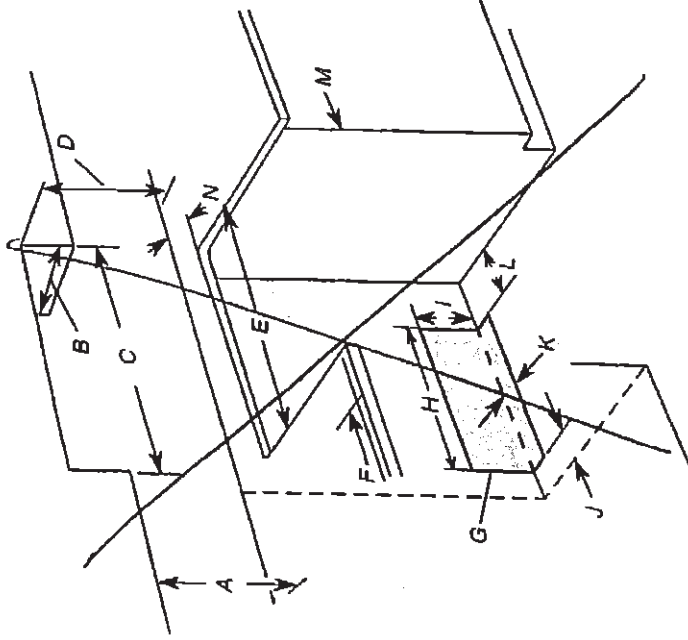

- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE*
- E. 30" (76.2 cm) min. opening width
- F. 3" (7.6 cm) min. clearance from both sides of range to side wall or other combustible material
- G. The shaded area is recommended for installation of rigid gas pipe and grounded outlet.
- H. 13 1/8" (33.3 cm)
- I. 7 1/16" (19.5 cm)
- J. 4 13/16" (12.2 cm)
- K. 3 1/16" (9.4 cm) plus measurement of N
- L. 12" (30.5 cm)
- M. Cabinet door or hinges should not extend into the cutout.
- N. Remaining counter depth should not exceed 2 1/4" (5.7 cm).

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is shielded by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.
30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

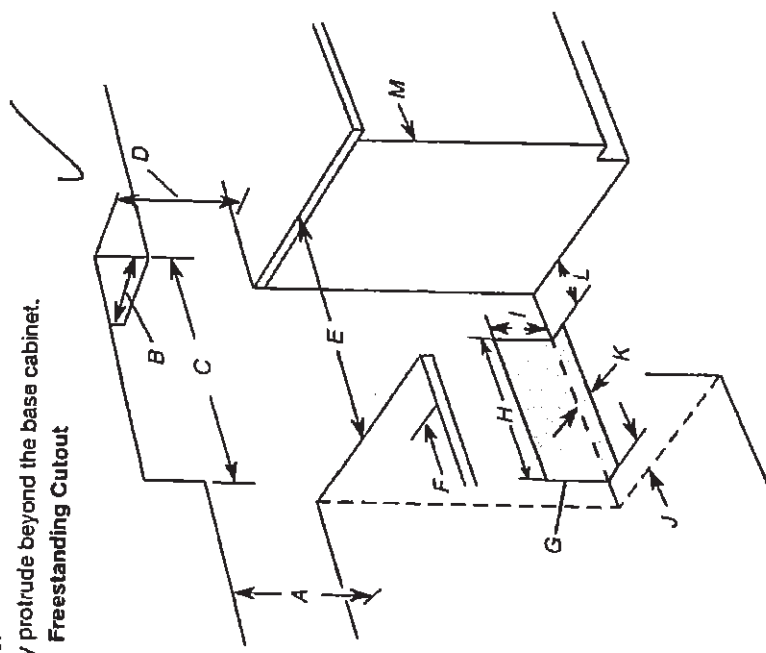

- A. 18" (45.7 cm) upper side cabinet to countertop
- B. 13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE*
- E. 30" (76.2 cm) min. opening width
- F. 3" (7.6 cm) min. clearance from both sides of range to side wall or other combustible material
- G. The shaded area is recommended for installation of rigid gas pipe and grounded outlet.
- H. 13 1/8" (33.3 cm)
- I. 7 1/16" (19.5 cm)
- J. 4 13/16" (12.2 cm)
- K. 3 1/16" (9.4 cm)
- L. 12" (30.5 cm)
- M. Cabinet door or hinges should not extend into the cutout.

CU COUNTRY LANE

LO 1-7

20-2447 ELEV A UPG END
THE JAMESPORT

31 of 40

WEG 745 H Ø FS

Electrical Requirements

⚠ WARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

IMPORTANT: The range must be electrically grounded in accordance with local codes and ordinances, or in the absence of local codes, with the National Electrical Code, ANSI/NFPA 70 or Canadian Electrical Code, CSA C22.1.

This range is equipped with an electronic ignition system that will not operate properly if plugged into an outlet that is not properly polarized.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate.

A copy of the above code standards can be obtained from:

National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02269-7471

CSA International
8501 East Pleasant Valley Road
Cleveland, OH 44131-5575

- A 120 volt, 60 Hz., AC only, 15-amp fused, ground and polarized electrical circuit is required. A time-delay fuse or circuit breaker is also recommended. It is recommended that a separate circuit serving only this range be provided.
- Electronic ignition systems operate within wide voltage limits, but proper grounding and polarity are necessary. Check that the outlet provides 120-volt power and is correctly grounded.
- This gas range is not required to be plugged into a GFCI (Ground-Fault Circuit Interrupter) outlet. It is recommended that you not plug an electric spark ignition gas range or any other major appliance into a GFCI wall outlet as it may cause the GFCI to trip during normal cycling.
- Performance of this range will not be affected if operated on a GFCI-protected circuit. However, occasional nuisance tripping of the GFCI breaker is possible due to the normal operating nature of electronic gas ranges.
- The tech sheet and wiring diagram are located on the back of the range in a plastic bag.

NOTE: The metal chassis of the range must be grounded in order for the control panel to work. If the metal chassis of the range is not grounded, no keypads will operate. Check with a qualified electrician if you are in doubt as to whether the metal chassis of the range is grounded.

Gas Supply Requirements

⚠ WARNING



Explosion Hazard

Use a new CSA International approved gas supply line.

Install a shut-off valve.

Securely tighten all gas connections.

If connected to LP, have a qualified person make sure gas pressure does not exceed 14" (36 cm) water column.

Examples of a qualified person include:
licensed heating personnel,
authorized gas company personnel, and
authorized service personnel.

Failure to do so can result in death, explosion, or fire.

Observe all governing codes and ordinances.

IMPORTANT: This installation must conform with all local codes and ordinances. In the absence of local codes, installation must conform with American National Standard, National Fuel Gas Code ANSI Z223.1 - latest edition or CAN/CGA B149 - latest edition.

IMPORTANT: Leak testing of the range must be conducted according to the manufacturer's instructions.

Type of Gas

Natural Gas:

- This range is factory-set for use with Natural gas. See "Gas Conversions" section. The model/serial/rating plate located on the oven frame behind the top right-hand side of the oven door has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP Gas Conversion:

Conversion must be done by a qualified service technician.

No attempt shall be made to convert the appliance from the gas specified on the model/serial/rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

Gas Supply Line


- Provide a gas supply line of ¾" (1.9 cm) rigid pipe to the range location. A smaller size pipe on longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be ½" (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.

NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON™ tape.

†TEFLON is a registered trademark of E.I. Du Pont de Nemours and Company.

32.40

Product and Cabinet Opening Dimensions

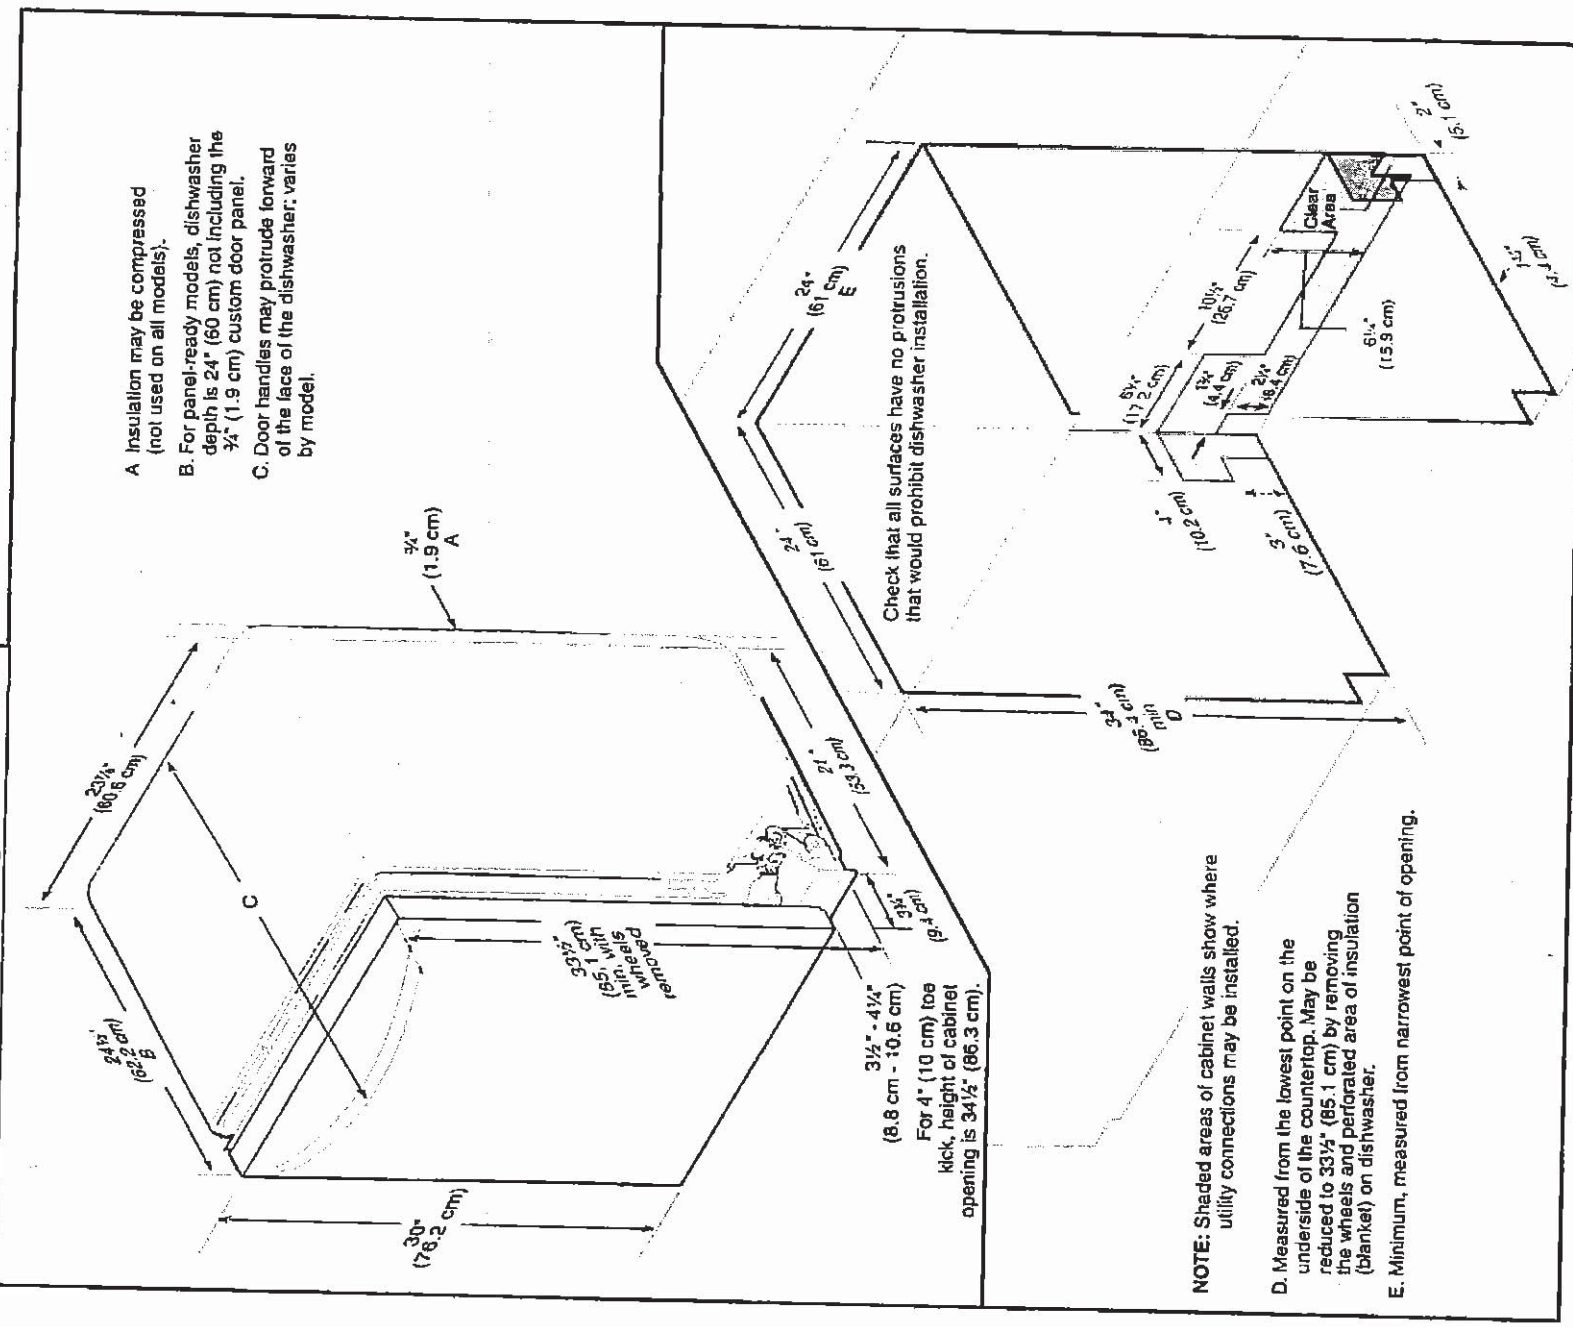

CU COUNTRY LANE

LO 1-7

20-2447 ELEV A UPG END
THE JAMESPORT

33 of 40

WDF560SAFM

Location Requirements

Dishwasher must be fully enclosed (top, sides, back, and floor) upon installation. A side panel kit is available from your dealer for installing your dishwasher at the end of your cabinetry.

An optional moisture barrier accessory is also available for installing underneath a wooden countertop. See the "Tools and Parts" section at the front of the guide for part details and orders. Check location where dishwasher will be installed. The location must provide:

- Convenient access for loading and unloading dishes. Corner locations require a 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.
- Easy access to water, electricity and drain.
- Grounded electrical supply required.
- Make sure pipes, wires and drain hose are within the shaded area shown in the "Product and Cabinet Opening Dimensions" section.
- Do not run drain lines, water lines or electrical wiring where they can interfere with or contact dishwasher motor or legs.
- Shelter dishwasher and water lines leading to dishwasher against freezing. Damage from freezing is not covered by the warranty.


NOTE: If dishwasher will be left unused for a period of time or in a location where it may be subject to freezing, have it winterized by authorized service personnel.

- A square opening for proper operation and appearance.
- The cabinet front to be perpendicular to floor.
- A level floor.
Helpful Hint: If floor at front of opening is not level with floor at rear of opening, shims may be used to level dishwasher.
NOTE: To avoid shifting during dishwasher operation, shims must be securely attached to the floor.
- The location where the dishwasher will be installed must provide clearance between motor and flooring. Motor should not touch the floor.
- Do not install dishwasher over carpeted flooring.

CU COUNTRY LANE
LO 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

Drain Requirements

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter, or be connected to an air gap.

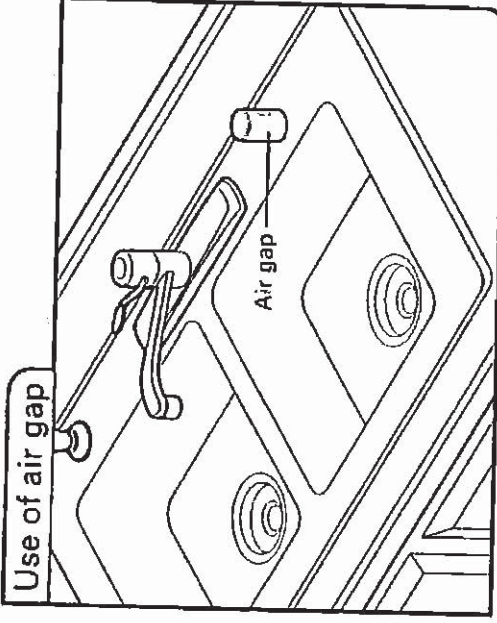

- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above sub floor or floor.
- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings

Water Supply Requirements

- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher.
- 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.
- NOTE: 1/2" minimum plastic tubing is not recommended.
- A 90° elbow with 3/4" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (15.2 cm) of the water inlet valve.

34 of 40

WDF 560 SAFM

Electrical Requirements

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70 - latest edition and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02169-7471

You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply.
- Copper wire only.
- A maximum of two field wiring supply conductors (12 AWG largest size) plus one grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker.
- A separate circuit.

If Connecting Dishwasher With A Power Cord:

- Use UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Power cord must plug into a grounded 3 prong outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



If Connecting Dishwasher With Direct Wiring:

- Use flexible, armored or nonmetallic sheathed, copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief. See the "Tools and Parts" section at the front of the guide for part details and orders.




CU COUNTRY LANE
LOT 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

35 of 40

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washers and Dryers | Washers | Front Load Washers | WFW5620HW

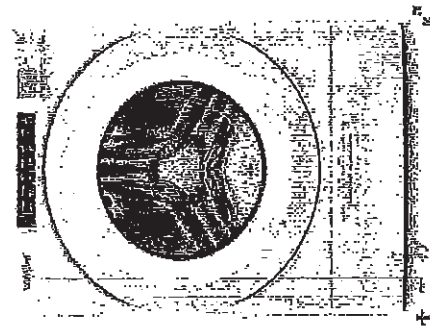

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm; 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm; 56-1/2 in
Minimum Height	98.11 cm; 38-5/8 in
Width	68.58 cm; 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

CU COUNTRY LANE
LOT 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

36 or 40

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS


Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).


IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

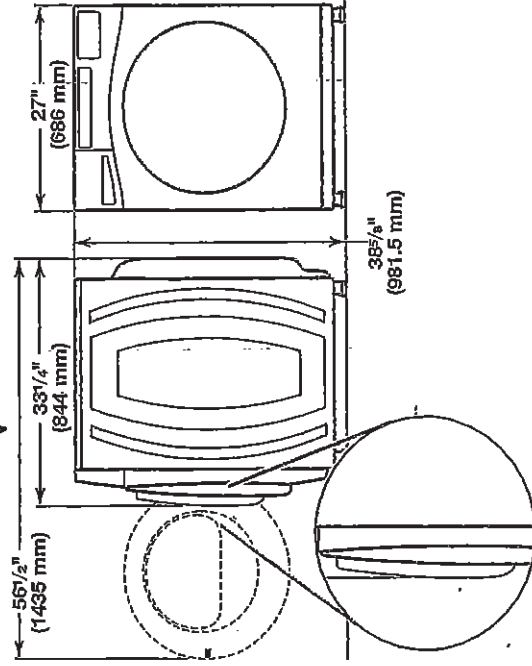



All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

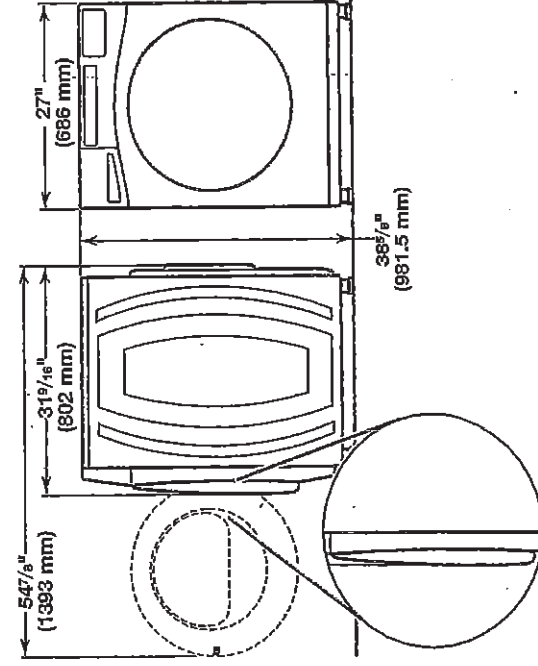

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

Maytag Models

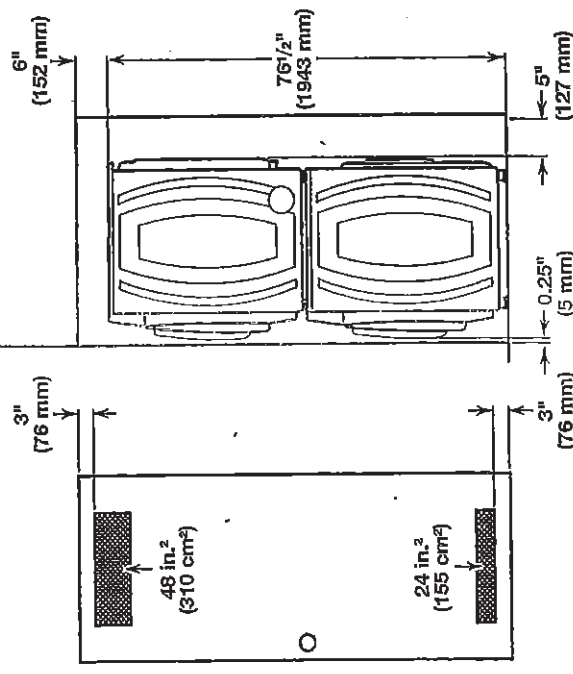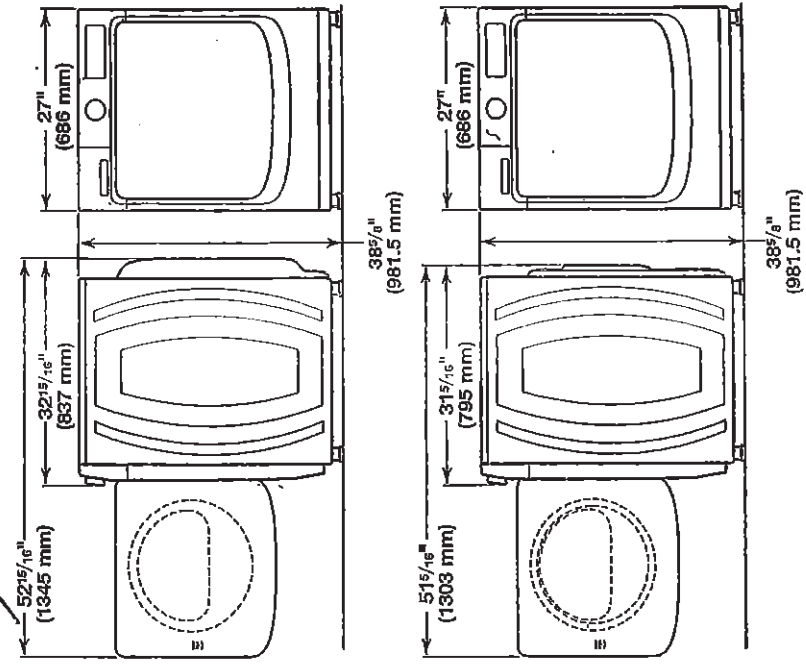


H-5

CU COUNTRY LANE
 LOT 1-7
 20-2447 ELEV A UPG END
 THE JAMESPORT


37 of 40

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation: X

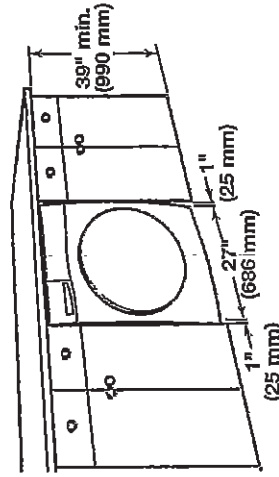

Recessed area or closet installation: X

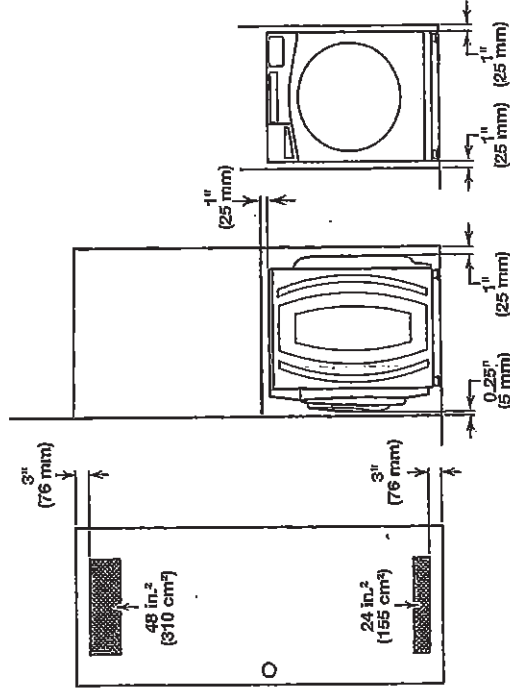

Custom cabinet installation: X

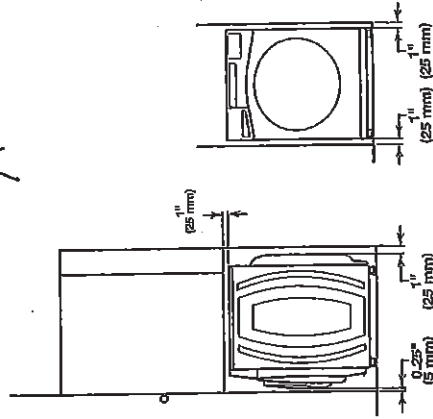


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

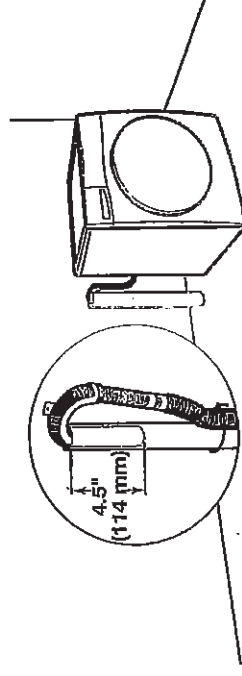


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

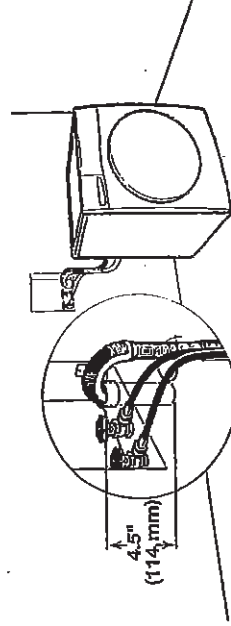

See requirements for floor standpipe drain system.

Laundry tub drain system

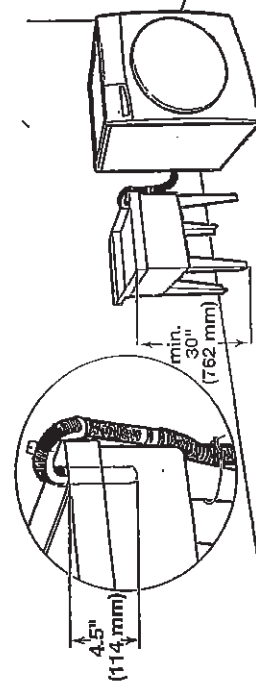

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


HA

CU COUNTRY LANE
LOT 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

38 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Weather and Dryers | Dryers | Best's Dryers | YWED5620HW

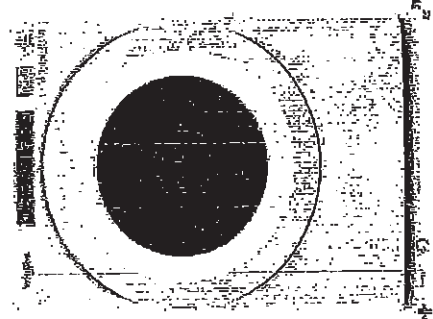

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions	
Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	198.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	69.53 cm, 27.0 in

Configuration and Overview	
Fuel Type	Electric

Cycles and Options	
Cycle Time Remaining	Yes
Last Filter Indicator	No
Number of Dryer Cycles	96
Number of Dryness Levels	3

Ventilation System	
Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear


Electrical	
Hz	60
Power Cord Included	Yes

CU COUNTRY LANE
LOT 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

39 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

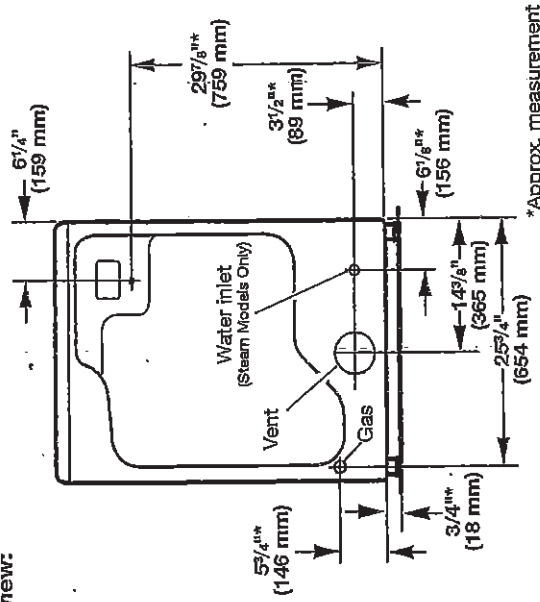

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

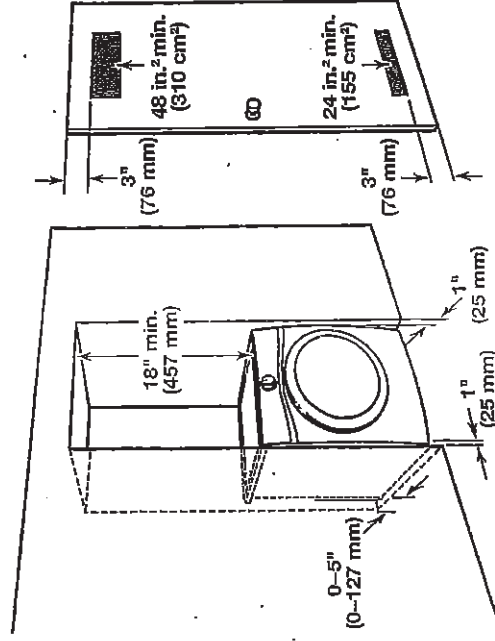

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

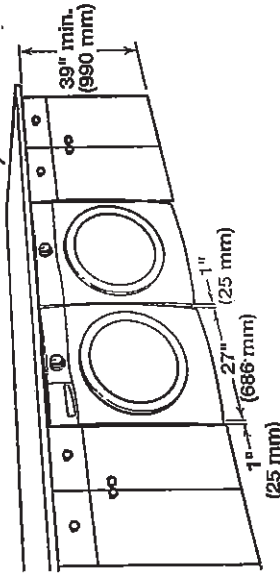

Mobile home – Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
 - Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.
- For mobile home installation of gas dryers:**
- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

A.

CU COUNTRY LANE
LOT 1-7
20-2447 ELEV A UPG END
THE JAMESPORT

40 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.

- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING

Explosion Hazard
Keep flammable materials and vapors, such as gasoline, away from dryer.
Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
Failure to do so can result in death, explosion, or fire.


You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view:

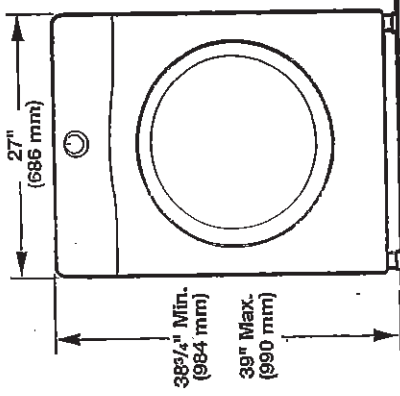


Side view:

Whirlpool Models

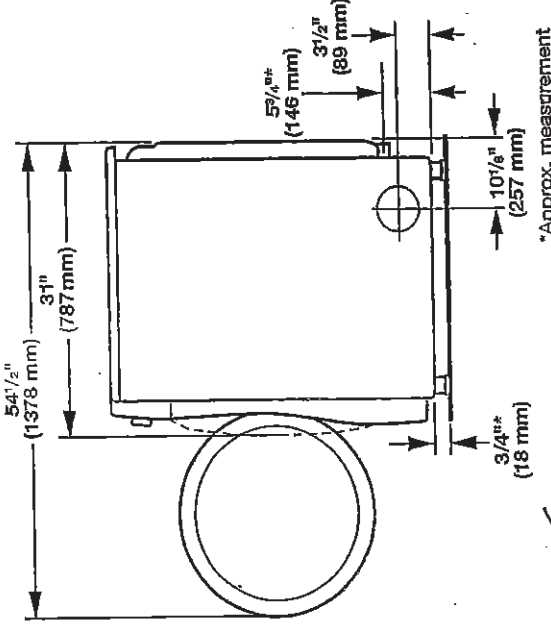

*Approx. measurement

Maytag Models

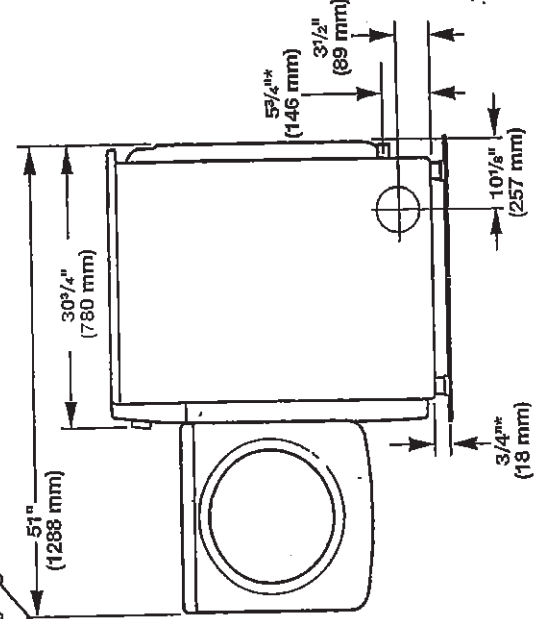

*Approx. measurement

A.A