



01-Sep-21

LOT	004-1	* REVISED *	20-2257-UG ELEV A THE CALVERTON
PURCHASERS: NATASHA A. GORDON		CONTACT NO: 416-875-7826	
SHARON V. JOHNSON		905-626-7073	
VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED			

- OPTIONAL DOUBLE SINKS IN MASTER ENSUITE BATHROOM *
- MOVE KITCHEN SINK TO CENTRE OF ISLAND/MOVE DISHWASHER DOWN *
- OPTIONAL COFFERED CEILING IN GREAT ROOM *

- ☐ FINISHED BASEMENT
- ☐ COLD CELLAR
- UPGRADED / MODIFIED ELEVATION
- ☐ CORNER UPGRADE
- ☐ SIDE UPGRADE
- ☐ REAR UPGRADE
- CEILING UPGRADE - SMOOTH
- ☒ MAIN FLOOR *
- ☐ SECOND FLOOR
- ADDITIONAL ROUGH-INS
- ☒ 200 AMP SERVICE
- ☐ WET BAR ROUGH IN
- GAS ROUGH-IN
- ☐ STOVE
- ☐ BBQ
- HOODFAN VENTING
- ☐ 6" ROUND DUCT
- ☒ 7" ROUND DUCT
- ☐ HUMIDIFIER
- ☒ AIRCON
- ☐ DRYER
- ☐ ADDITIONAL FIREPLACE
- ☐ WALK OUT DECK
- ☐ WALK OUT BASEMENT
- ☐ BASEMENT

FULL BASEMENT STAIRS:	<u>PAINT GRADE</u>
UPPER BASEMENT STAIRS:	<u>N/A</u>
LOWER BASEMENT STAIRS:	<u>N/A</u>
STAIRS TO LOWER LEVEL:	<u>ALL OAK</u>
STAIRS TO UPPER LEVEL:	<u>N/A</u>
MAIN STAIRS:	<u>ALL OAK</u>
MEDIA STAIRS (if applicable):	<u>N/A</u>

Date	Sept 1/21	Signature of	Sept 1/21	Décor Consultant	1217 Salem
Date		Purchaser	file		
Date		Purchaser		Date Approved	HEATHWOOD HOMES (UPCOUNTRY) LIMITED



Interior Finishing Selection Sheet

13-Aug-21

LOT 004-1

20-2257-UG ELEV A THE CALVERTON

PURCHASERS: NATASHA A. GORDON
SHARON V. JOHNSON

CONTACT NO: 416-875-7826
905-626-7073

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Appliances

6-34 Kitchen HoodFan

☐ Air King Under Cabinet Range Hood STAINLESS STEEL AV1308
STD 30" PAGE 29

Cabinetry

1-9111 Kitchen Cabinet Colour/Style

☒ SIMCOE ORCHID VIKING III STD 3DL ISLAND TO BE
STD.SIMCO MOON LIGHT 9157

3-2086 Kitchen Cabinet Hardware

☐ HARDWARE 9677 STD

25-9158 Main Bathroom Cabinet Colour/Style

☐ SIMCOE NAVY BLUE Viking III STD 3DL

29-7672 Main Bathroom Cabinet Hardware

☐ HARDWARE 135 STD

28-8796 Main Bathroom Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

20-9111 Master Ensuite Cabinet Colour/Style

☐ SIMCOE ORCHID VIKING III STD 3DL

22-7676 Master Ensuite Cabinet Hardware

☐ HARDWARE 12843 STD

414-9111 Powder Room Lower Level Cabinet Colour/Style

☐ SIMCOE ORCHID VIKING III STD 3DL

416-7672 Powder Room Lower Level Cabinet Hardware

☐ HARDWARE 135 STD

415-8800 Powder Room Lower Level Countertop

☐ Countertop INUKSHUK TAUPE P-345 LM Arborite

Carpet

37-9246 Bedroom 2 Flooring

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

38-9246 Bedroom 3 Flooring

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

14-9246 Family Room Flooring

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

36-9246 Master Bedroom Flooring

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

52-1079 Throughout Underpad

☐ Underpad 500 Series STD

Ceramics

16-9255 Foyer Flooring

☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13"

17-2225 Foyer Grout

☐ Grout (27) Silver STD

7-8913 Kitchen/Breakfast Flooring

☒ Biel Bianco (White) UN.BL.BIA.1224 UPG 2 12 x 24 TO BE
INSTALL FROM FRONT TO BACK SKETCH #7 PAGE 18

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.

3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.

4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.

5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.

6. Selections will not be processed unless signed by Heathwood Homes Head Office.

7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.

8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date

Purchaser

Date

Décor Consultant

Date

Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



Interior Finishing Selection Sheet

13-Aug-21

LOT 004-1

20-2257-UG ELEV A THE CALVERTON

PURCHASERS: NATASHA A. GORDON
SHARON V. JOHNSON

CONTACT NO: 416-875-7826
905-626-7073

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG


Ceramics


- | | |
|--|--|
| 8-2225 Kitchen/Breakfast Grout | ☐ Grout (27) Silver STD |
| 66-5609 Laundry Room Flooring | ☐ Sauble Grey GE.SU.GRY.1313 STD 13" X 13" |
| 67-7704 Laundry Room Grout | ☐ Grout (19) Pearl Gray STD |
| 30-9255 Main Bathroom Flooring | ☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13" |
| 31-2225 Main Bathroom Grout | ☐ Grout (27) Silver STD |
| 27-9020 Main Bathroom Tub Wall Tile | ☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED HORIZONTALLY |
| 26-2226 Main Bathroom Tub Wall Tile Grout | ☐ Grout (00) White STD |
| 23-8248 Master Ensuite Floor Tile | ☒ Carrara X White Polished OV.CX.WHT.2424.PL UPG_6 24 x 24 |
| 24-2225 Master Ensuite Floor Tile Grout | ☐ Grout (27) Silver STD |
| 73-8996 Master Ensuite Shower Floor Tile | ☒ ONTARIO HEXAGON MATTE White/Taupe OD.ON.W/T.02.HEX.MT UPG_2 2 x 2 HEX |
| 74-2226 Master Ensuite Shower Floor Tile Grout | ☐ Grout (00) White STD |
| 147-8923 Master Ensuite Shower Jamb(s) and Sill(s) | ☐ Shower Jamb / Sill Thassos White STD |
| 104-9020 Master Ensuite Shower Wall Tile | ☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED VERTICALLY |
| 105-2226 Master Ensuite Shower Wall Tile Grout | ☐ Grout (00) White STD |
| 191-9255 Mud Room Flooring | ☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13" |
| 190-2225 Mud Room Grout | ☐ Grout (27) Silver STD |
| 32-8915 Powder Room Flooring | ☒ Biel Antracita (Dark Grey) UN.BL.ATR.1224 UPG_2 12 x 24 TO BE INSTALL FRONT TO BACK SKETCH # 7 PAGE 18 |
| 33-7704 Powder Room Grout | ☐ Grout (19) Pearl Gray STD |
| 369-9255 Powder Room Lower Level Flooring | ☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13" |
| 370-2225 Powder Room Lower Level Grout | ☐ Grout (27) Silver STD |
| 53-2232 Throughout Thresholds | ☐ Metal Thresholds STD |

Electrical

- The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
- The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
- The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- Selections will not be processed unless signed by Heathwood Homes Head Office.
- The colour selections made on the Colour Chart are final and cannot be changed once submitted.
- The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 13, 2021  Purchaser

Aug 13, 2021  Purchaser

Aug 12, 2021  Decor Consultant

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



HEATHWOOD

13-Aug-21

Interior Finishing Selection Sheet

of 3

13-Aug-21

LOT 004-1

20-2257-UG ELEV A THE CALVERTON

PURCHASERS: NATASHA A. GORDON
SHARON V. JOHNSON

CONTACT NO: 416-875-7826

905-626-7073

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Electrical

90-5796 Throughout Switches and Plug

Fireplace

136-8865 Great Room Fireplace Mantle

135-9114 Great Room Fireplace Type

Granite

2-7852 Kitchen Countertop

21-9122 Master Ensuite Countertop

Hardwood

11-9359 Great Room Flooring

367-9359 Lower Level Hall Flooring

367-9359 Lower Level Hall Flooring

100-9059 Main Stairs Landing(s) Flooring

78-9059 Stair Landing to Lower Level Flooring

35-9359 Upper Hall Flooring

Interior Railings

145-8148 Main Stairs Handrail/Pickets/Posts Type

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

Interior Stairs

116-1713 Basement Stairs Type

121-1713 Basement Stairs Landing(s) Flooring

☐ Decora White Switches and Plugs STD

☐ Dimplex FP3033HL Electric Fireplace

☐ Paint Grade Mantel- Cabinet (Per Plan) WHITE NF 15 STD

PAGE 21

☒ Quartz-Caesarstone BLIZZARD # 2141 Group 4 UPG 3/4" with Mitered Edge

☒ MSI Quartz ICED GREY Group 1 UPG 3/4" with Mitered Edge

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl BARISTA Red Oak Pearl 3/4" X 3 1/4"

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl BARISTA Red Oak Pearl 3/4" X 3 1/4"

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl BARISTA Red Oak Pearl 3/4" X 3 1/4"

☒ Red Oak-Vintage 3 1/4 inch Pre-Sanded Smooth Unfinished Red Oak-Unfinished-3/4 inch x 3 1/4inch 3/4" x 3 1/4" STAIN SAMBUCA- COLOUR IS DIFFERENT THEN HARDWOOD FLOOR

☒ Red Oak-Vintage 3 1/4 inch Pre-Sanded Smooth Unfinished Red Oak-Unfinished-3/4 inch x 3 1/4inch 3/4" x 3 1/4" STAIN SAMBUCA- COLOUR IS DIFFERENT THEN HARDWOOD FLOOR

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl BARISTA Red Oak Pearl 3/4" X 3 1/4"

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

☐ Paint Grade Stairs STD

☐ Paint Grade Stairs STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale. The Purchaser agrees to reselect from the currently available selections immediately upon request.

2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.

3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.

4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.

5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.

6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.

7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.

8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 13 2021

Purchaser

Date

Décor Consultant

Date

Aug 13 2021

Purchaser

Date

HEATHWOOD HOMES (UPCOUNTRY)

LIMITED



Interior Finishing Selection Sheet

13-Aug-21

LOT 004-1

20-2257-UG ELEV A THE CALVERTON

PURCHASERS: NATASHA A. GORDON
SHARON V. JOHNSON

CONTACT NO: 416-875-7826

905-626-7073

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Interior Stairs

142-1712 Main Stairs Type

45-1712 Stairs to Lower Level Type

Interior Trim

91-9374 Throughout Trim Size

Painting

143-7761 Main Stairs Colour

45-7761 Stairs to Lower Level ~~Handrail/Pickets/Posts~~ Colour

240-1716 Throughout Trim - Paint Colour

51-1717 Throughout Walls - Paint Colour

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

149-1737 Master Ensuite Plumbing Fixture (colour)

34-1737 Powder Room Plumbing Fixture (Colour)

371-1737 Powder Room Lower Level Plumbing Fixture (Colour)

☐ Oak Stairs UPG_1

☐ Oak Stairs UPG_1

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings
STD-Towns

☒ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets)
STAIN SAMBUCA- COLOUR IS DIFFERENT THEN
HARDWOOD FLOOR

☒ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets)
STAIN SAMBUCA- COLOUR IS DIFFERENT THEN
HARDWOOD FLOOR

☐ Trim WHITE STD

☐ Wall WARM GREY 22 STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 13, 2021

Date

Purchaser

Aug 13, 2021

Date

Purchaser

Date

Décor Consultant

Date Approved: HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



13-AUG-21

Sales Selection Sheet

LOT 004-1

20-2257-UG ELEV A THE CALVERTON

PURCHASERS: NATASHA A. GORDON
SHARON V. JOHNSON

CONTACT NO: 416-875-7826

905-626-7073

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Cabinetry

456

Optional Extras

40J- Two-tone colour/style selection for island (must be of equal or lower level to main selection) Viking SKETCH # 8 PAGE 19

Qty: 1

448

Optional Extras

31H- Wall cabinet for built-in microwave/small appliance with trim kit (supply specs) Viking

Qty: 1

SEE SKETCH # 7 & 8 PAGE# 18 & 19 SPECS AND TRIM KIT TO FOLLOW

Ceramics

1100

Upgrade 2 Tile

SKETCH # 7 PAGE 18 TILE DIRECTION

Kit/Brk Floor

Qty: 1

1101

Upgrade 6 Tile

M. Ensuite Floor

Qty: 1

1094

Upgrade 2 Tile

M. Ensuite Shower Floor

Qty: 1

1096

Upgrade 2 Tile

M. Flr. Pow Floor

Qty: 1

SKETCH # 7 PAGE 18 TILE DIRECTION

Coffered Ceiling

1106

Optional Upgrade

GREAT ROOM

Qty: 1

Drywall

- This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
- All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
 - In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
 - The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
 - Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
 - The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
 - Selections will not be processed unless signed by Heathwood Homes Head Office.
 - The selections made on this schedule are final and cannot be changed once submitted.
 - The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug 13, 2021

Date

Purchaser

Aug 13, 2021

Date

Décor Consultant

Aug 13, 2021

Date

Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



13-Aug-21

Sales Selection Sheet
of

LOT 004-1

20-2257-UG ELEV A THE CALVERTON

PURCHASERS: NATASHA A. GORDON
SHARON V. JOHNSON

CONTACT NO: 416-875-7826
905-626-7073

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1107 Ceiling Upgrades
Smooth Ceilings Main Floor

Qty: 1

Electrical

284 Optional Extras

Extra wall interior outlet on Existing Circuit (does not include kitchen outlets)
TO BE INSTALL IN THE CENTRE OF THE FIRE PLACE 70" FROM FLOOR
SEE SKETCH # 7 PAGE# 18

GREAT ROOM

Qty: 1

286 Optional Extras

Ceiling rough-in (Capped)
TO BE INSTALL IN THE CEILING - USE STD. EXISTING SWITCH PLUG
SEE SKETCH # 7 PAGE 18

GREAT ROOM

Qty: 1

286 Optional Extras

Ceiling rough-in (Capped)
TO BE INSTALLED ABOVE THE BREAKFAST BAR- USE STD. KITCHEN LIGHT SWITCH
SKETCH # 7 PAGE 18

KITCHEN

Qty: 1

314 Optional Extras

Extra wall interior outlet (120V/15A) on a Separate Circuit (on arcfault)
TO BE USED FOR THE MICROWAVE
SEE SKETCH # 7 & 8 PAGE 18 & 19

KITCHEN

Qty: 1

Fireplace

44

Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle. Purchasers acknowledge: Heathwood Homes and its contractors will not be liable for any damage on items placed/installed above a FP after closing

Qty: 1

GREAT ROOM

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug 13, 2021

Purchaser

Date

Aug 13, 2021

Date - Décor Consultant

Aug 13, 2021

Purchaser

Date

Date-Approved: HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



13-Aug-21

Sales Selection Sheet
OF

LOT 004-1 20-2257-JUG ELEV A THE CALVERTON

PURCHASERS: NATASHA A. GORDON CONTACT NO: 416-875-7826
SHARON V. JOHNSON 905-626-7073

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Granite	
1108	Optional Upgrade Countertop 3/4" GROUP 4 with double edge Qty: 1 Kitchen
357	Optional Extras Granite cutout w/ straight edge polish to accommodate under mount vanity sink SINK SPECS PAGE 25 Qty: 2 MASTER BATHROOM
1109	Optional Upgrade Countertop upgrade with 4" backsplash 3/4" GROUP 1 with double edge Qty: 1 Master Ensuite
Mirrors/Glass Products	
1125	Shower Upgrade Upgrade to Frameless clear glass with D-Ring Handle in chrome Qty: 1 Master Ensuite
Modifications	
40	KITCHEN Qty: 1 INSTALL SINK IN THE CENTRE OF THE ISLAND MOVE DISHWASHER DOWN SEE SKETCH # 7 & 8 PAGE 18 & 19 ACCORDINGLY
Painting	
350	Optional Extras - PAINT / STAIN - Custom Stain stair landing less than 25sq/ft in sambucca. For stair with metal or oak pickets only. Unfinished Pre-sanded smooth hardwood will be installed and to be stained in sambucca to match the stairs Qty: 2 STAIRS LANDING
Plumbing	

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug 13 2021 Purchaser

Date

Aug 13 21 Décor Consultant

Aug 13 2021 Purchaser

Date

myk

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



13-AUG-21

Sales Selection Sheet

LOT 004-1

20-2257-UG ELEV A THE CALVERTON

PURCHASERS: NATASHA A. GORDON
SHARON V. JOHNSON

CONTACT NO: 416-875-7826

905-626-7073

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

216 Kitchen Sink Upgrade KITCHEN Qty: 1

Blanco Kitchen Sink Quatrus U 1 Maxi #401248 (32" x 18") Undermount 1 Bowl 9" Deep in Stainless Steel PAGE 22

59 AMERICAN STANDARD - SINK OPTIONS - MASTER BATHROOM Qty: 2

Undermount Sink

BOXE - White - Model 0315 000 020

PAGE 25

500 OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET, STD Master Ensuite Qty: 1

COLONY SINK, ONE EXTRA VANITY LIGHT, ONE EXTRA PLUG AND CABINET CONVERSION VIKING

SKETCH # 9 PAGE 20

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug 13, 2021 N. Gordon Purchaser

Date

Aug 13, 2021 Sharon V. Johnson Purchaser

Date

Aug 13, 2021 H. A. Gordon

Date

Decor Consultant

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED


CW COUNTRY LANE - UPG COUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

16 of 43
The Calverton

ELEVATION A
END UPGRADE:
2,264 SQ FT

20-2257 ELEV. A UPG END

Sketch #5

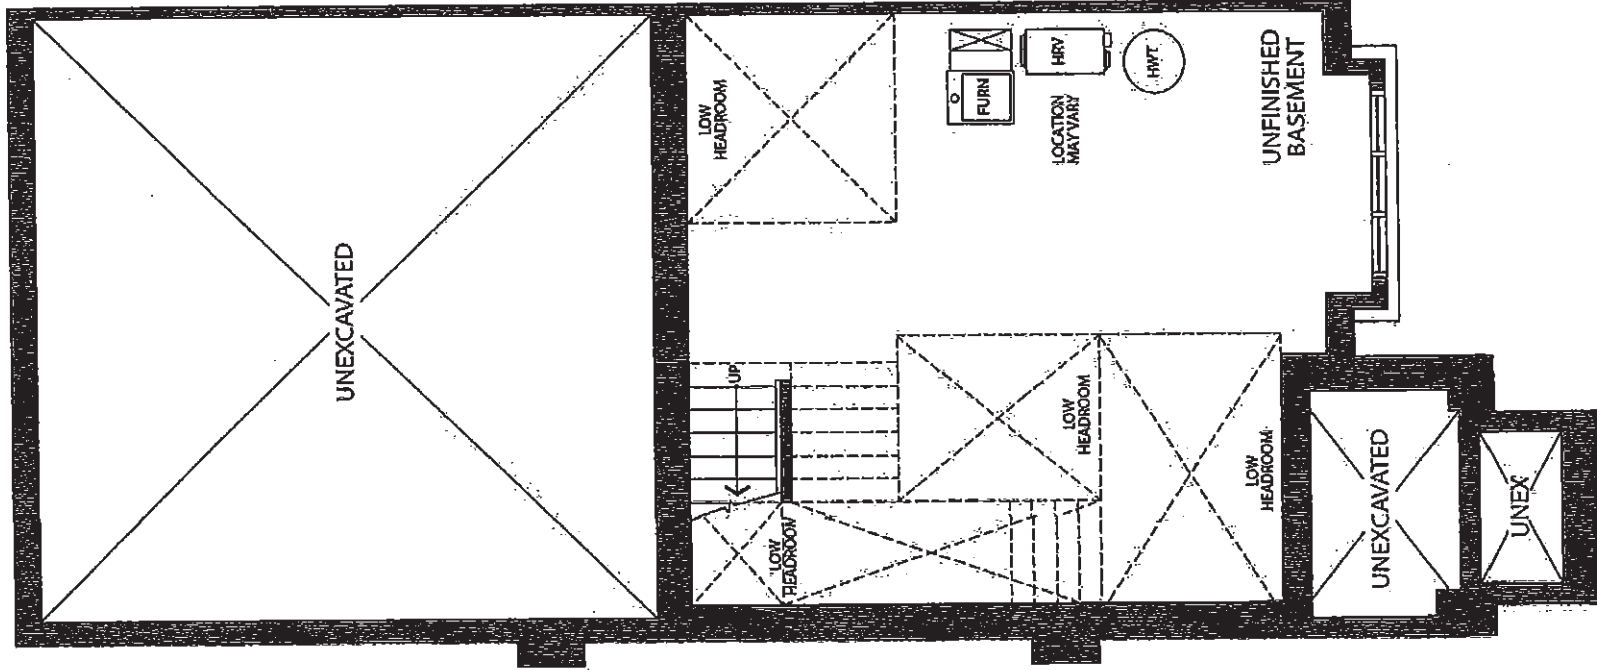

BASEMENT
ELEVATION A
UPGRADE - END

NSV


CU - COUNTRY LANE-UPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

17 of 43
The Calverton

20-2257 ELEV. A UPG END

ELEVATION A
END UPGRADE:
2,264 SQ FT

Sketch #6

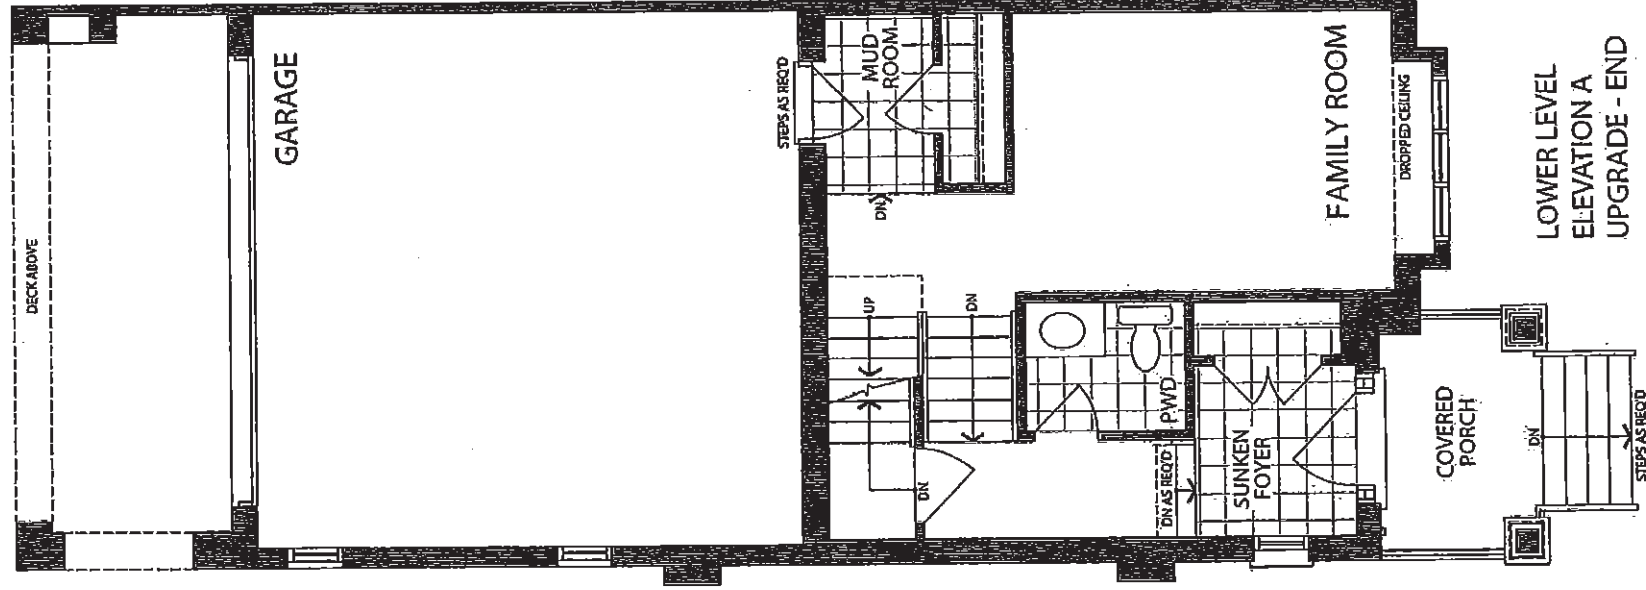

LOWER LEVEL
ELEVATION A
UPGRADE - END

SA NG


CLC COUNTRY LANE - UPG COUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

20-2257 ELEV. A UPG END

Sketch #7

ELEVATION A
END UPGRADE:
2,264 SQ FT


18 of 43
The Calverton

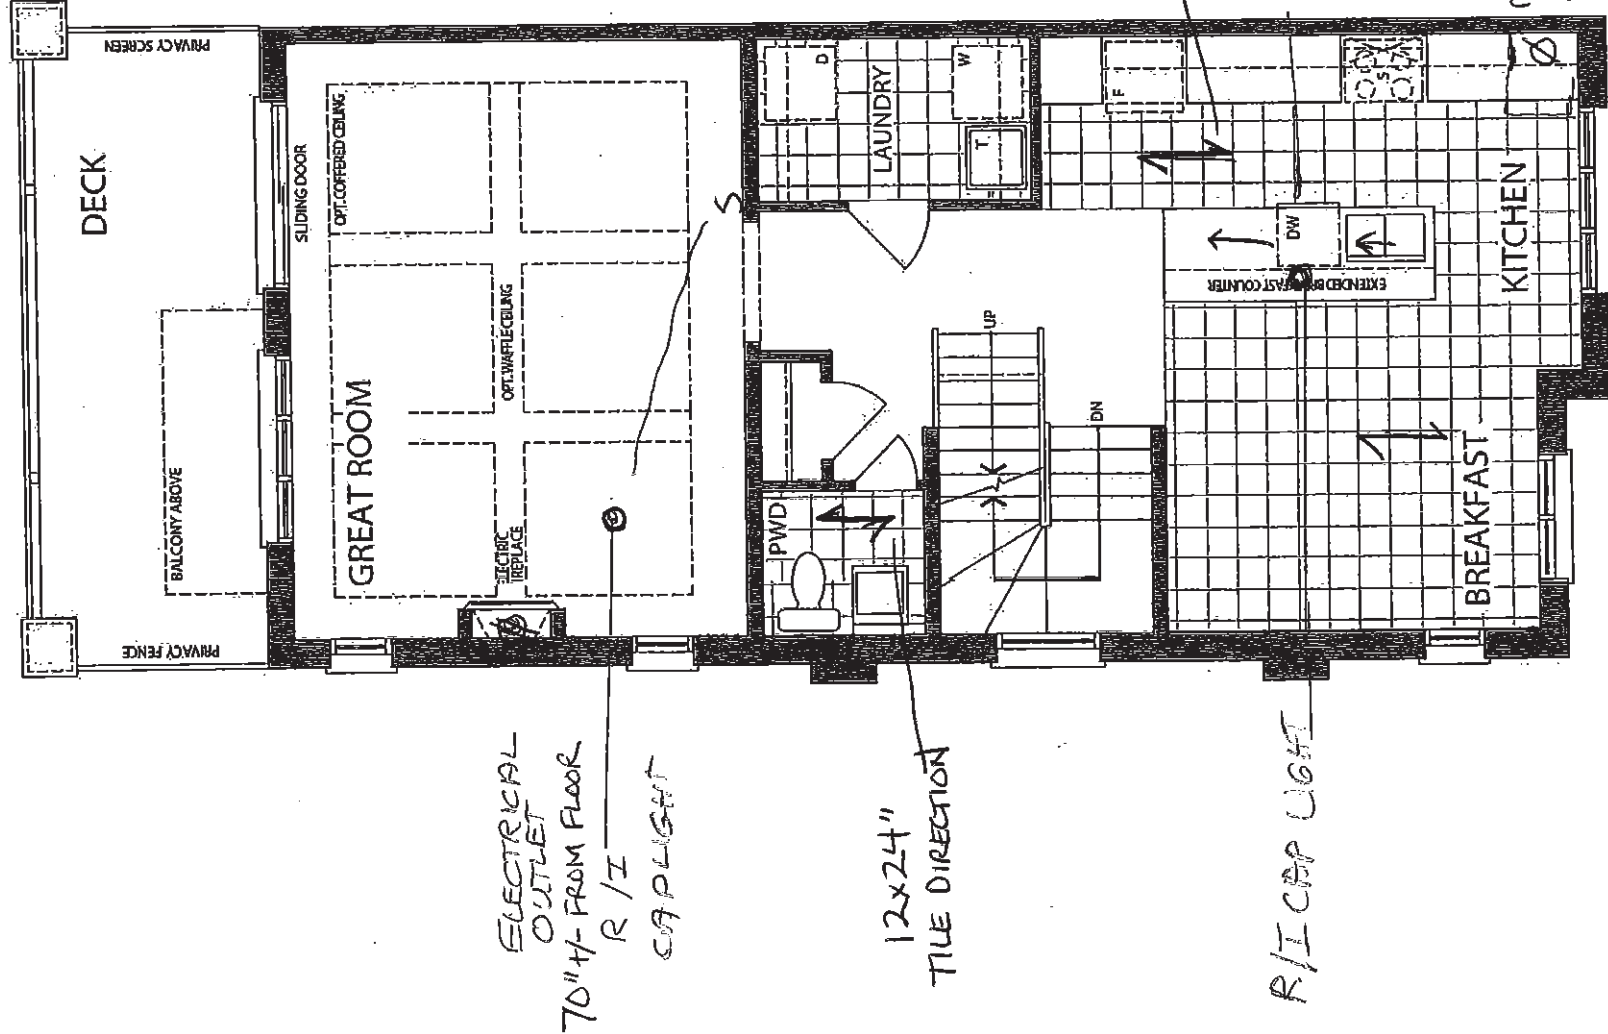

MAIN LEVEL
ELEVATION A
UPGRADE - END

26
Sib

CU COUNTRY LANE - UPCOUNTRY
 LOT 4-1
 20-2257 UG ELEV A
 THE CALVERTON



HEATHWOOD HOMES
 COUNTRY LANE, WHITE
 MODEL: 20-2257 (2007)

STANDARD CONTRACT INCLUDES:

- Appliance Openings**
- Hood Opening: 30" W builder hood
 - Fridge Opening: 37 3/8" W X 73 3/4" D
 - Fridge cabinet: 30cm deep
 - Stove Opening: 30" Freestanding
 - Dishwasher Opening: 24"

Standard Kitchens Scope:

- 100cm H wall cabinets
- Std. Blum Hinges - not soft close
- Std. Metabox Drawers - not soft close
- Min 40cm W drawer
- Backing on all cabinets
- Countertop by others
- Upgrade applied paneled fridge & dishwashers supply only (appliance hardware by others)


Classic Collection

- Optional Upgrade to Includes:**
- Top Drawer Construction (in lieu of Standard bank of drawers)
 - Tandem Box Soft Close Drawers
 - Blumotion Soft Close Hinges for Doors
 - Crown Moulding
 - Deep Fridge Upper w/ Deep Panel
 - Tall upper Cabinets

THIS DRAWING IS FOR DESIGN PURPOSES ONLY. IT IS NOT AN EXACT REPRESENTATION.

Part 3

Sketch # 8

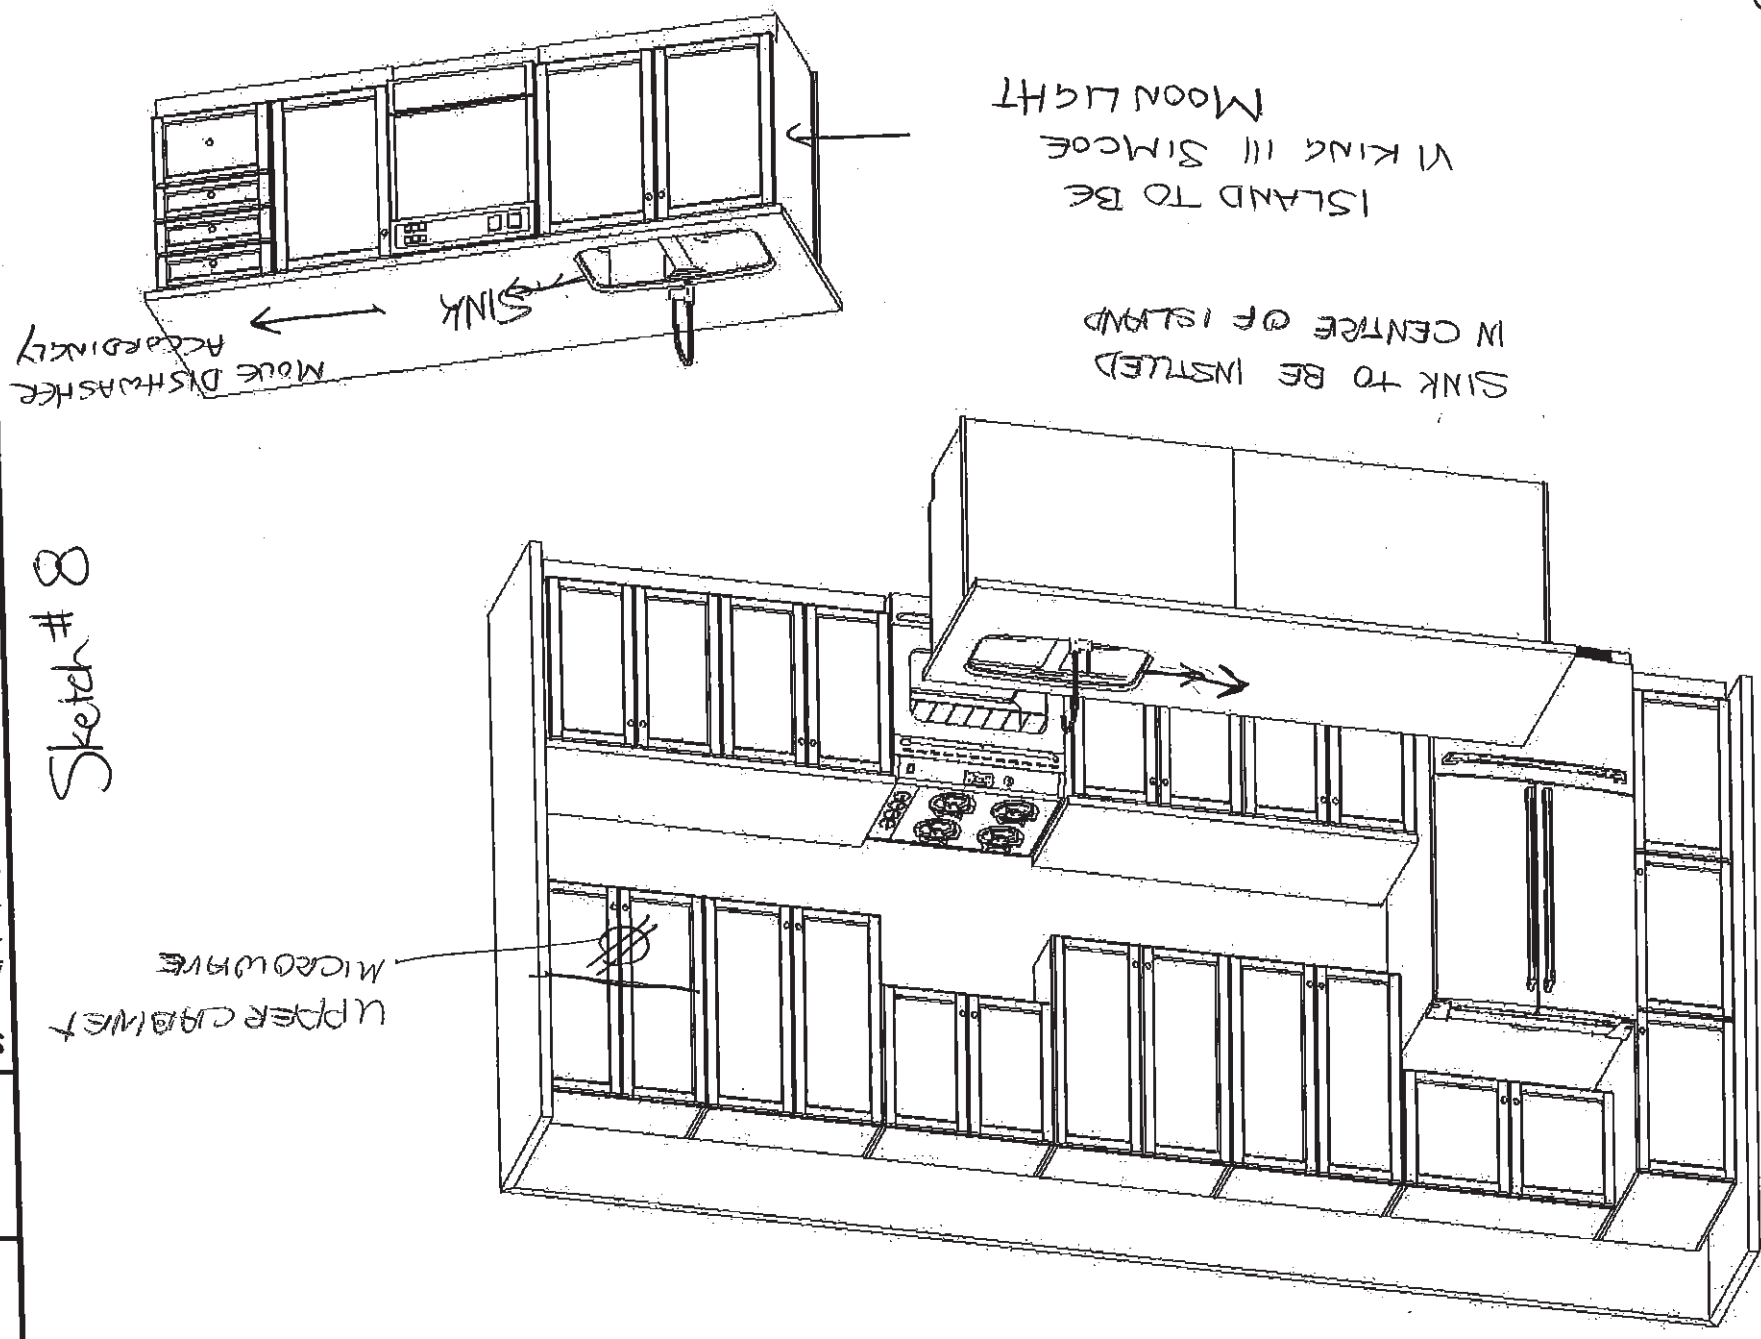

6/28/2021

26
 SA

CU COUNTRY LANE - UPGOUNTRY
LOT 4-1

20-2257 UG ELEV A
THE CALVERTON


20 of 43

The Calverton

ELEVATION A
END UPGRADE:
2,264 SQ FT

20-2257 ELEV. A UPG END


Sketch #9

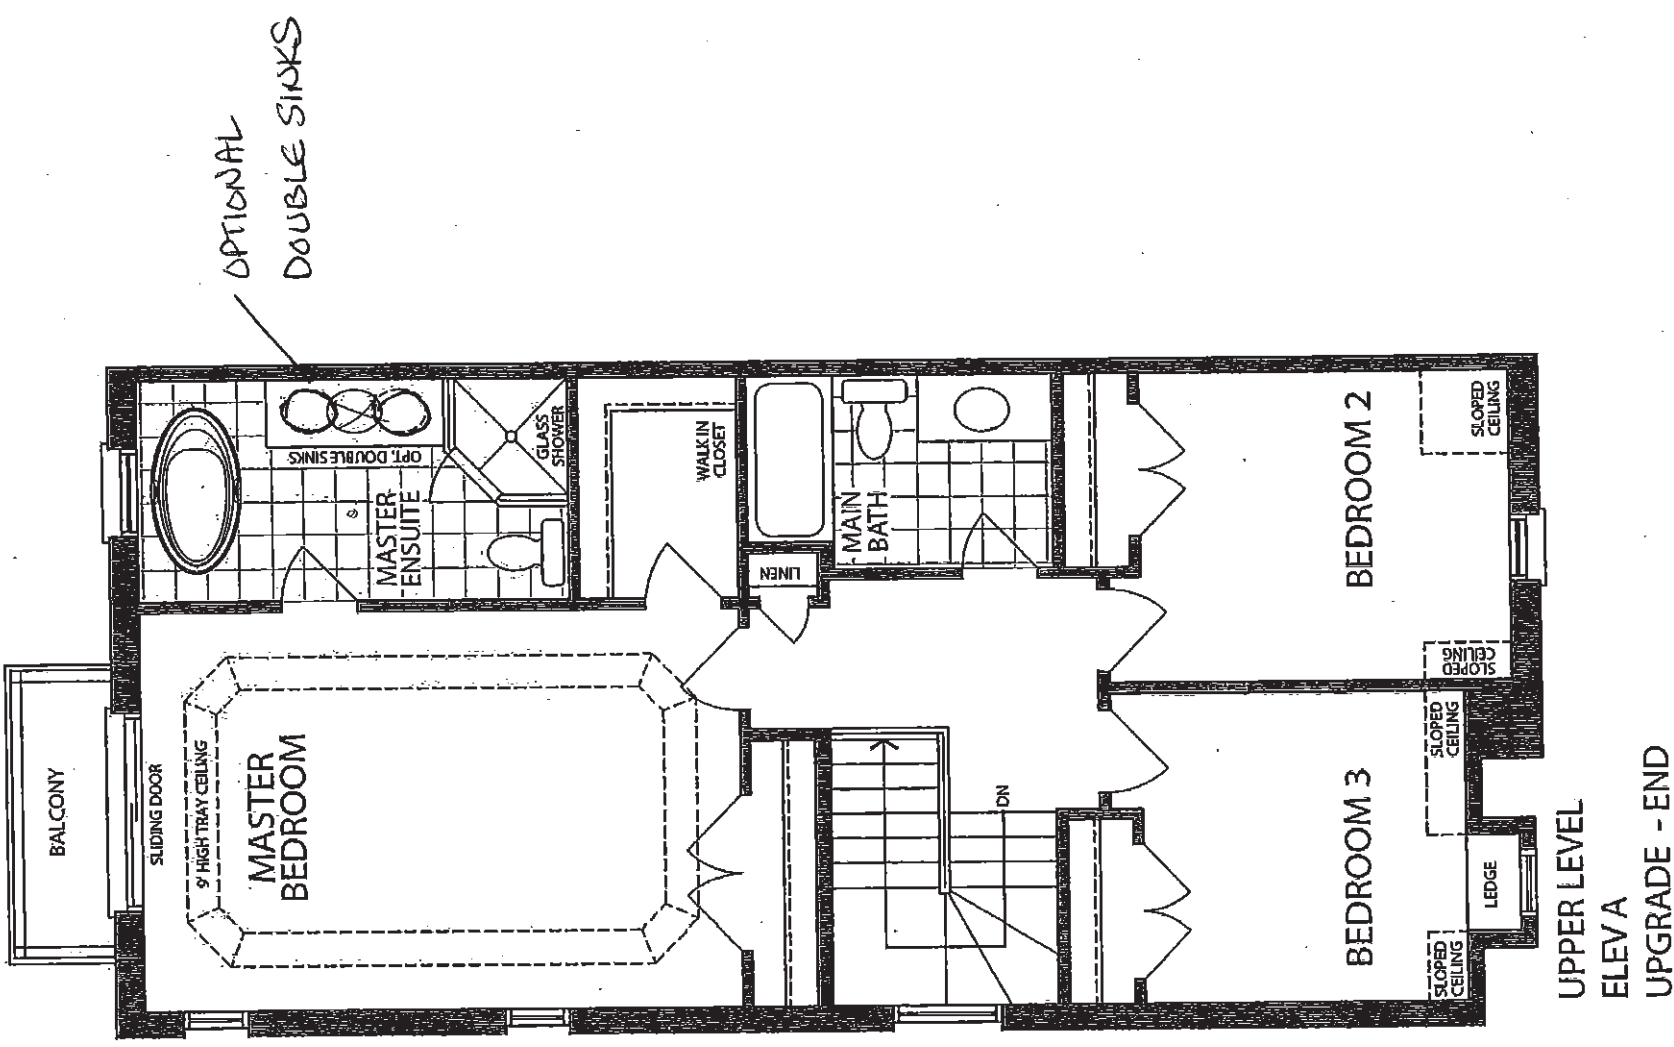

2550

CV. COUNTRY LANE - UPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

21 of 43

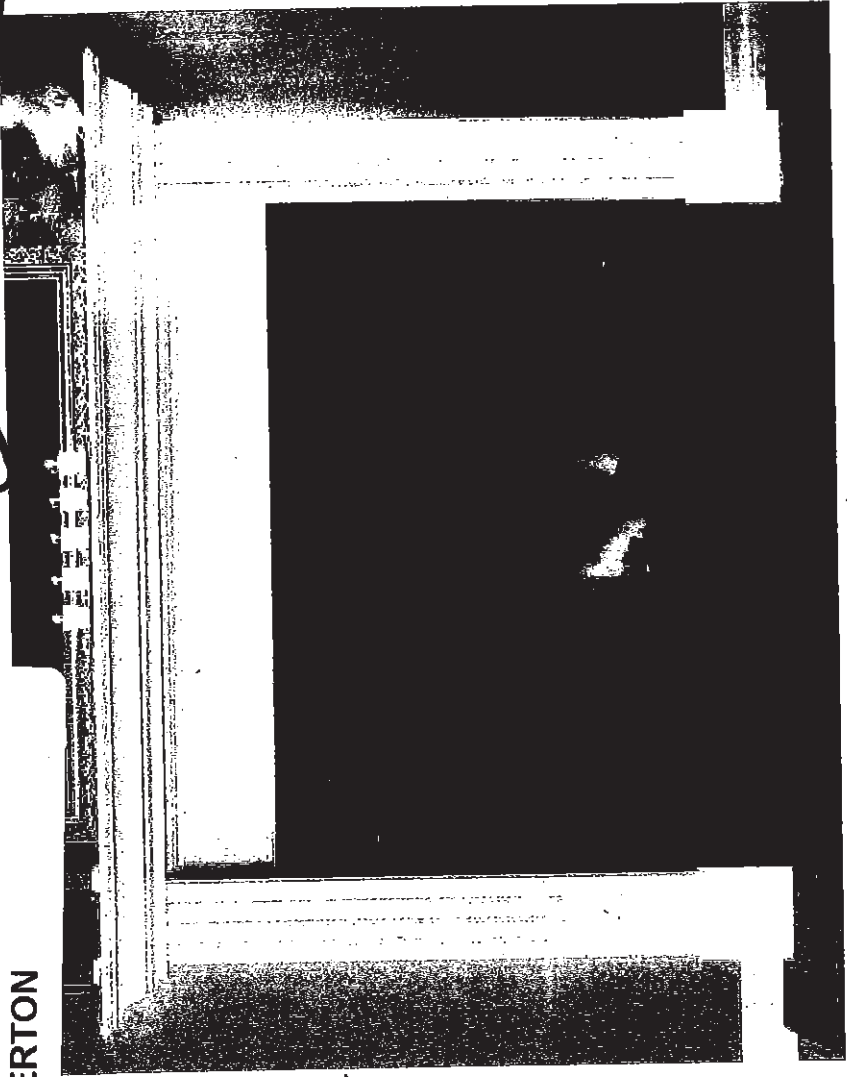


'CABINET'

STANDARD NF 15 Mantel ✓

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH - PRICED SEPARATELY)

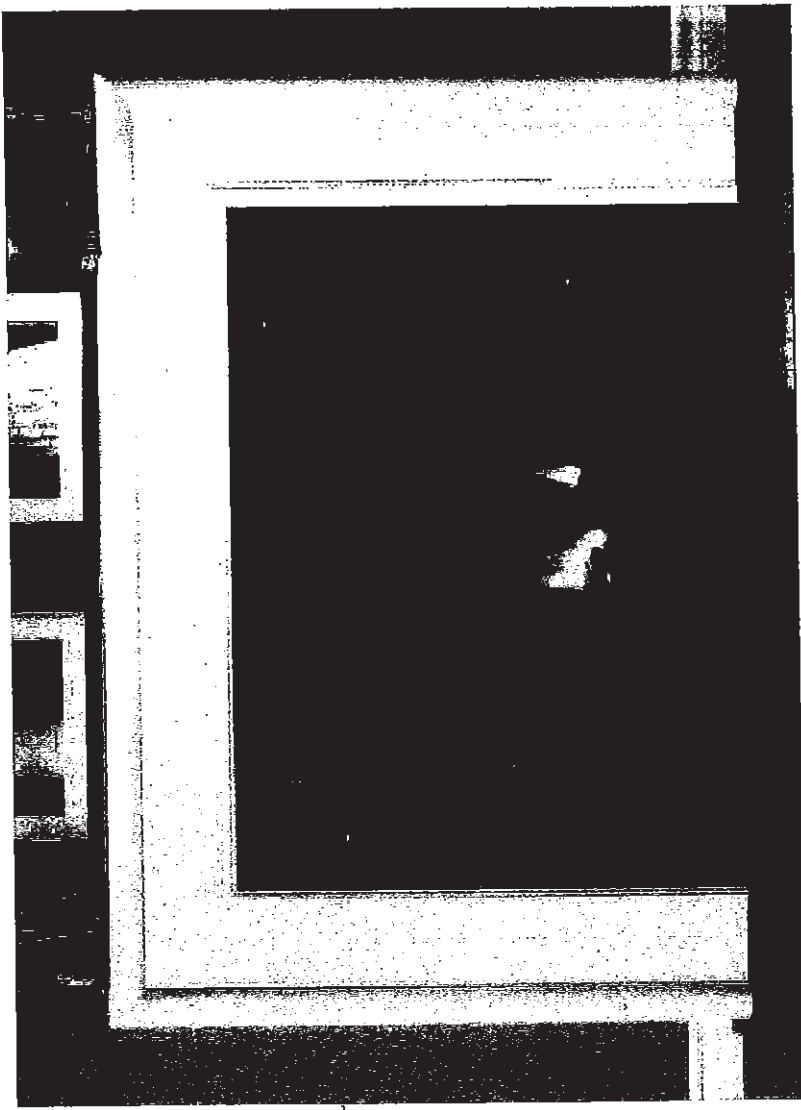

STANDARD NF 17 Mantel X

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH - PRICED SEPARATELY)

Price



CU COUNTRY LANE - UPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

22 of 43

BLANCO

BLANCO QUATRUS U Maxi
Stainless Steel
Undermount Sink

This new German-engineered sink from BLANCO features a 9-inch bowl depth and zero-radius bowl corners. Made of durable 18 gauge stainless steel.

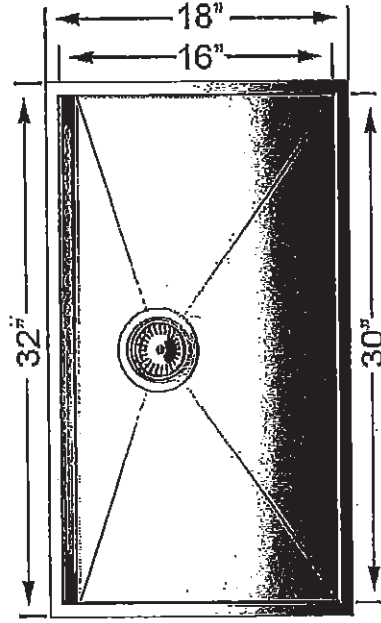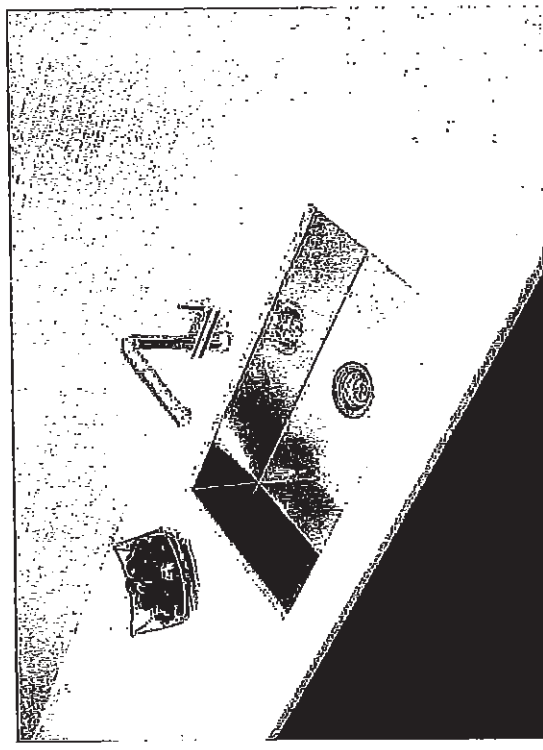

Model No.	Main	Bowl Depth
401248	9" (230 mm)	

Material

Durable 18 gauge stainless steel
Brushed finish

Specifications

Minimum Cabinet Size: 33" (840 mm)

Undermount installation

Rear positioned drain hole for maximum usable bowl and cabinet storage space

Zero-radius corners and x-pattern drain grooves

Sound deadening system included

Template included

3 1/2" stainless steel strainer included

Limited Lifetime Warranty

Accessories

Stainless Steel Grid

223192

NSR


CU COUNTRY LANE - UPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

23 of 43

STANDARD KITCHEN FAUCET

Align

Modern

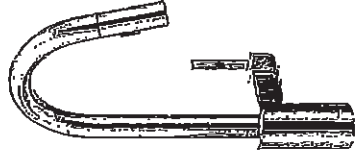

Single Handle Pull-Down Kitchen
Faucet[®]

Model 7565+

25 SA

COUNTRY LANE - UPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

24th 43

*American
Standard*

**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep


Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:
☐ Color: ☐ White ☐ Linen
☐ Faucet Finish:
☐ Supplies:
☐ 1-1/4" Trap:
☐ Nipple:

* See faucet section for additional models available

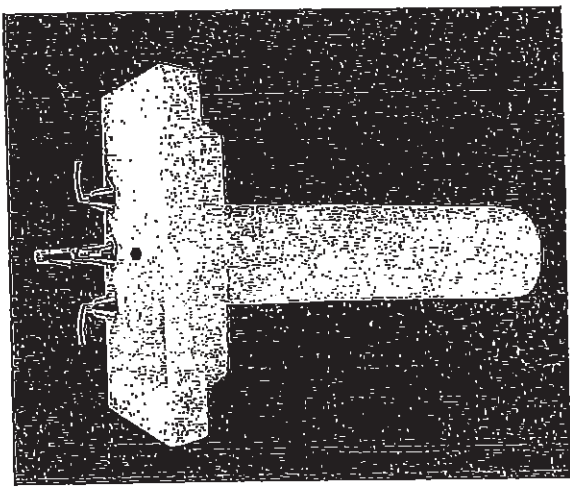

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

24th 43

CU COUNTRY LANE - UPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

25 of 43

MASTER BATHROOM
X 2

American Standard

Style That Works Better

 BARRIER FREE


BOXE
UNDERCOUNTER SINK
VITREOUS CHINA

BOXE UNDERCOUNTER SINK

- Vitreous china
- Rectangular undercounter mount sink with rectangular interior and flat bottom design bowl
- Unglazed rim
- Front overflow
- Supplied with template
- Meets OBC requirement when sink is installed with overflow to the rear
- Mounting clips available separately (P031006000) (Faucet not included)

- ☐ 0315 000 Unglazed Rim
508 x 406mm (20" x 16")

Bowl size:
438mm (17-1/4") wide,
337mm (13-1/4") front to back,
127mm (5") deep

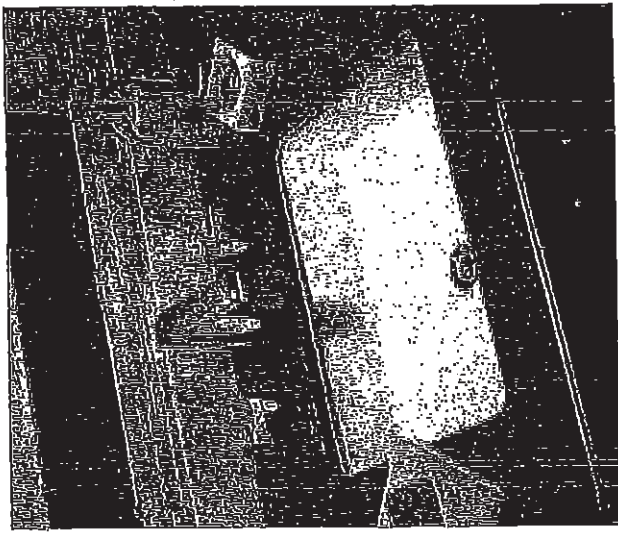

COMPLIANCE CERTIFICATIONS -

- Meets or exceeds the following Specifications:
- ASME A112.19.2M for Vitreous China Fixtures.
 - CAN/CSA B45 Series.

To Be Specified

- ☐ Colour: ☐ White
- ☐ Faucet*:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):


* See faucet section for additional models available



- Countertop 864mm (34") from finished floor. Sink installed 102mm (4") from front edge of countertop. Countertop thickness to be 25mm (1") maximum. MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

NOTES:
WE RECOMMEND USING SINK AS A TEMPLATE TO DETERMINE PROPER COUNTERTOP CUT. COUNTERTOP 38MM (1-1/2") INSIDE SINK CONTOUR. FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.

✓ UNDERCOUNTER MOUNTING KIT SUPPLIED SEPARATELY. IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

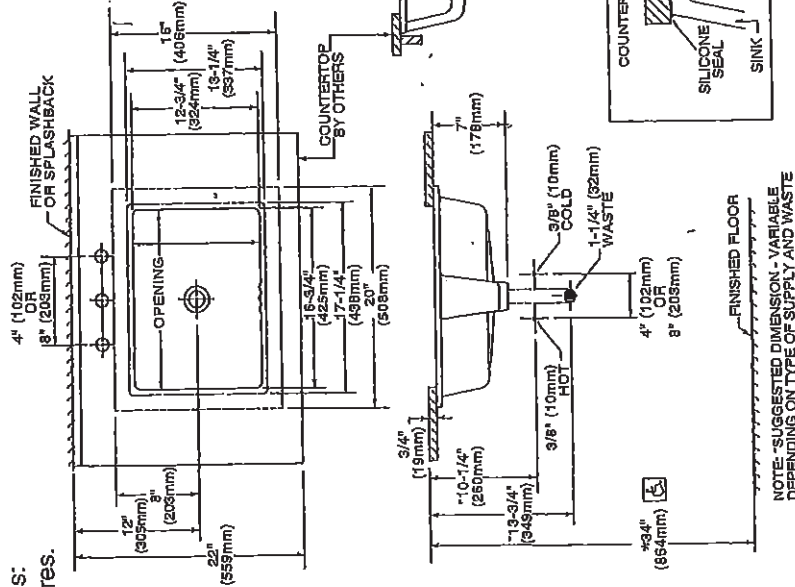

NOTE: *SUGGESTED DIMENSION - VARIABLE DEPENDING ON TYPE OF SUPPLY AND WASTE

* To comply with ADA standards, overflow hole must face back.

25 of 43

 BARRIER FREE

COLONY COUNTERTOP SINK

MAIN + LOWER POWDER ROOM

- Vitreous china
- Self-rimming
- Front overflow
- Supplied with template
- Faucet deck
- (Faucet shown not included)

- ☒ 0346 803
Faucet holes on 203mm (8") centres
- ☐ 0346 403 (Illustrated)
Faucet holes on 102mm (4") centres
- ☐ 0346 001
Centre hole only

Nominal Dimensions:
521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:
422mm (16-5/8") wide, 279mm (11") front to
back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS -
Meets or exceeds the following Specifications:
• ASME A112.19.2M for Vitreous China Fixtures.
• CAN/CSA B45 Series.

To Be Specified

☐ Colour: ☒ White

☐ Bone

☐ Silver Gray

☐ Linen



☐ Faucet*

☐ Faucet Finish:

☐ Supplies & Stops:

☐ Trap 1-1/4" (32 mm):

* See faucet section for additional models available
BAS-198

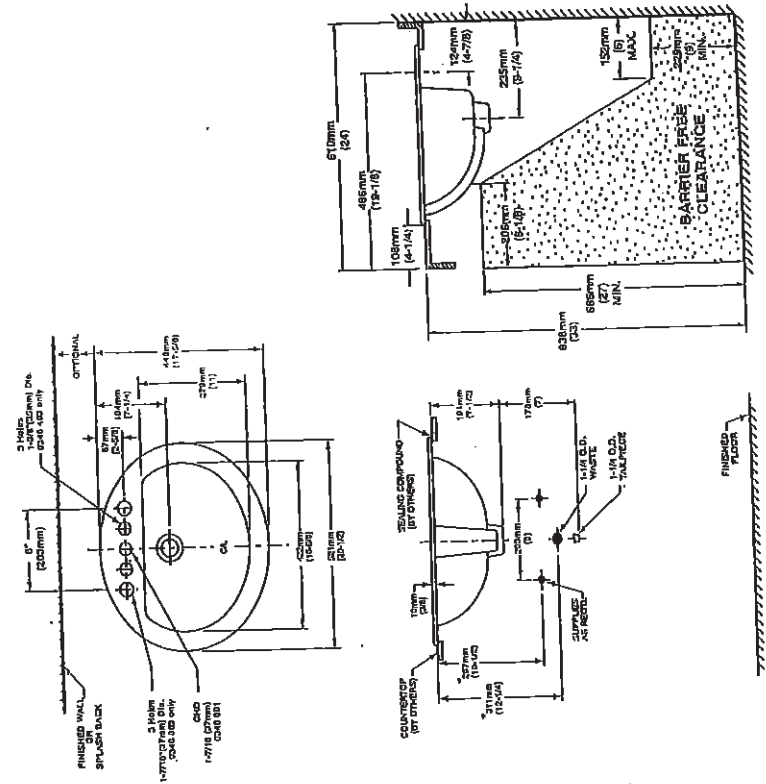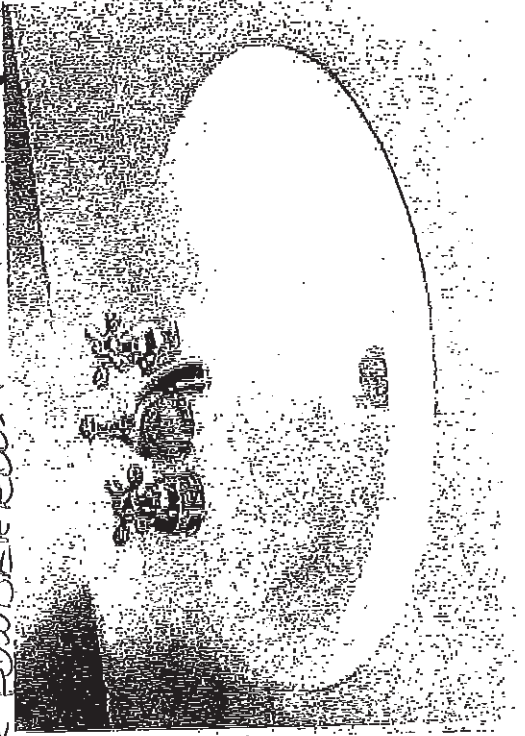


NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use
of superseded or voided pages.

25
SD

27 of 43

CV. COUNTRY LANE - UPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

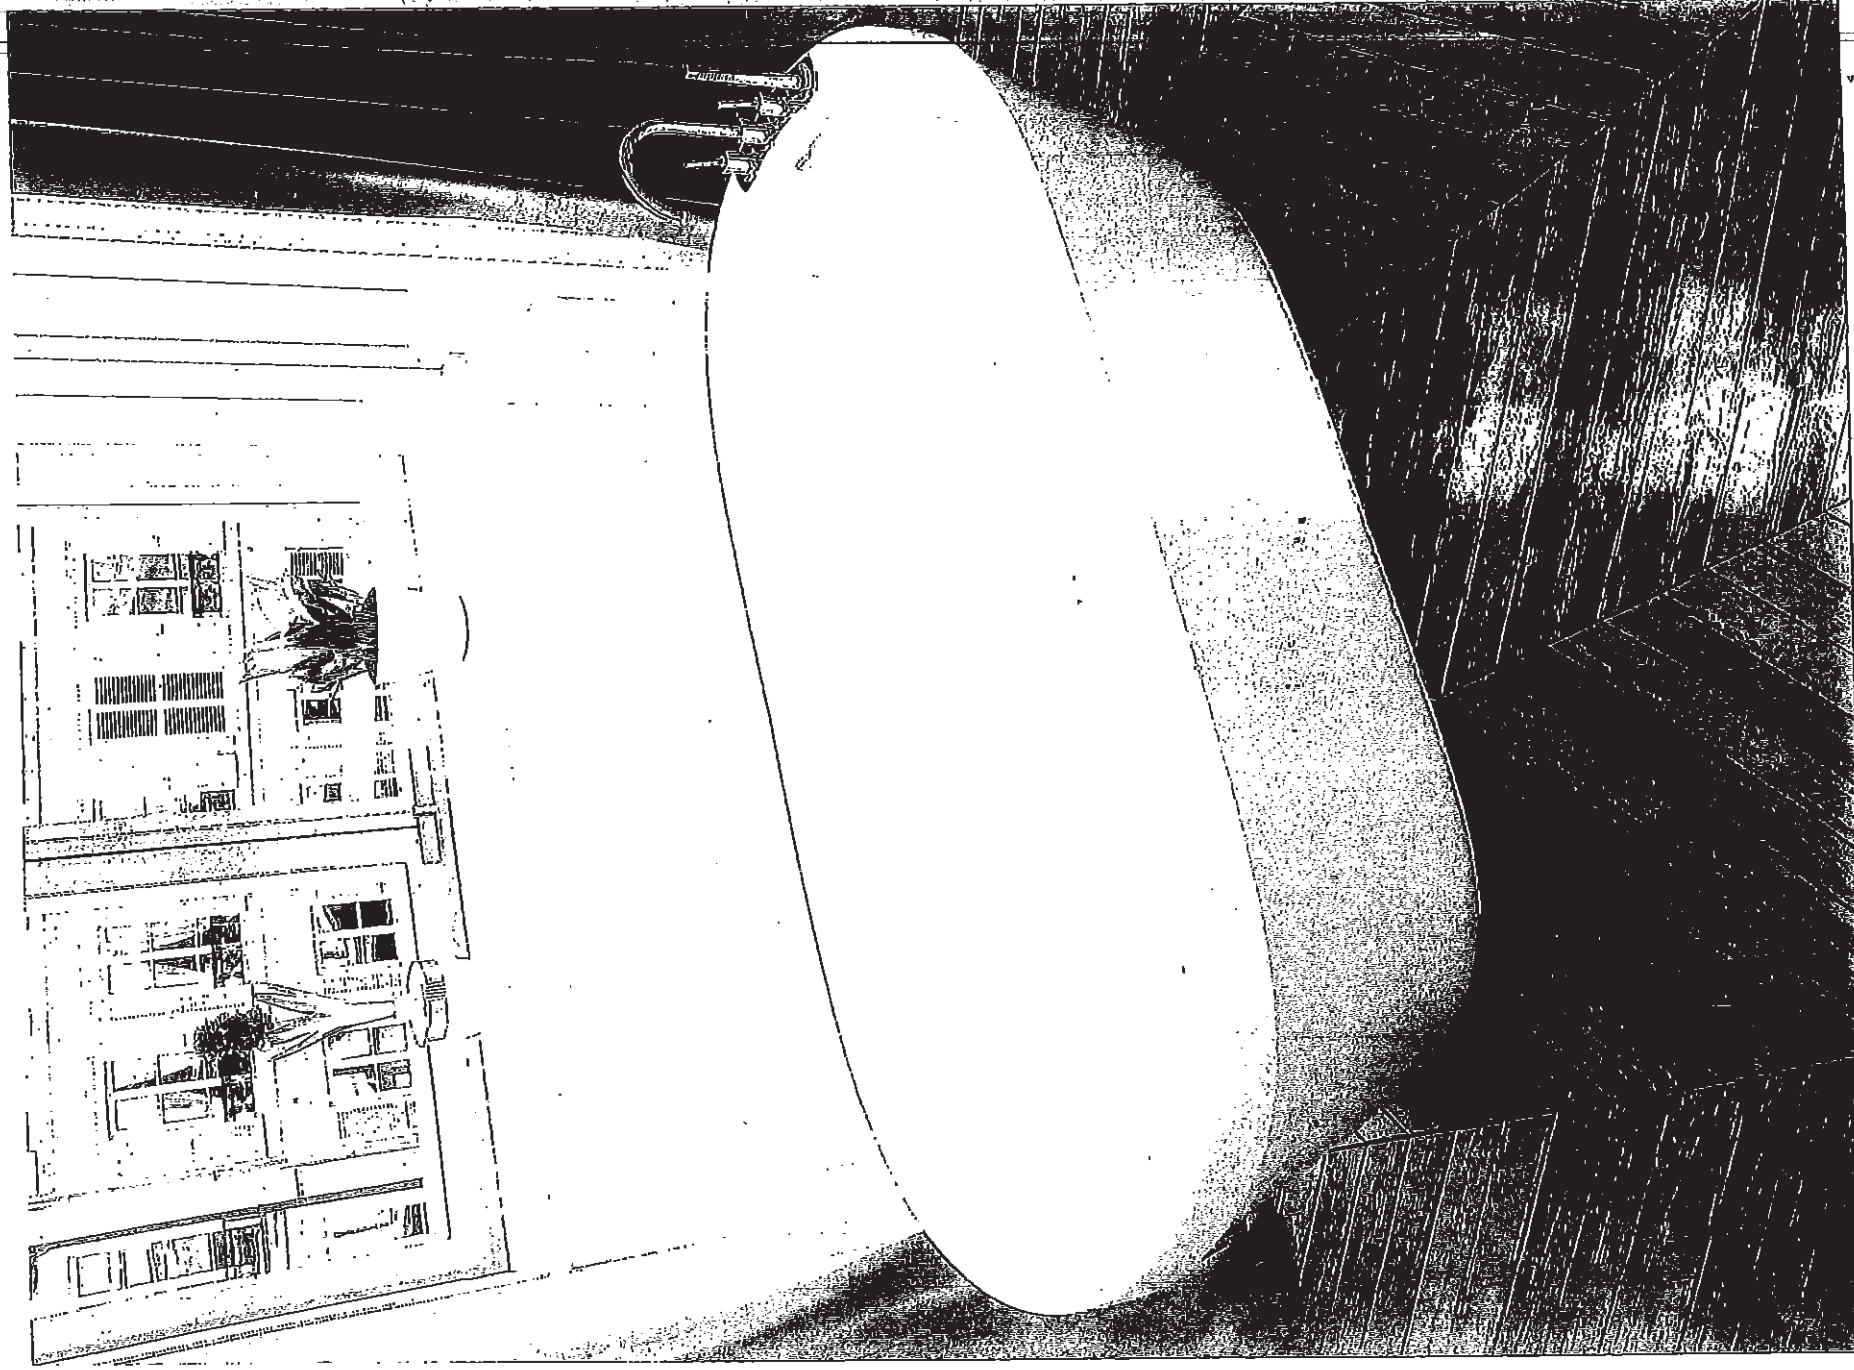

Demt CP2007


257

CV COUNTRY LANE - UP COUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

28 of 13


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL

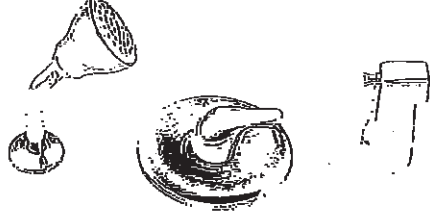

Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP†
(TL183EP not available in BC)

SHOWER AND 5" TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model L4796 / T990†

FREESTANDING TUB FAUCETS

Ms Sub

CU COUNTRY LANE - UP COUNTRY
LOT 4-1

LOT 4-1

20-2257 UG ELEV A

THE CALVERTON

29/3



SPECIFICATIONS

AV SERIES


RANGE HOODS




180 CFM/7.0 Sones @ 0.10" SP. Horizontal
400 CFM/7.5 Sones @ 0.10" SP. Vertical

400 CEM/75 Sones @ 0.10" SP. Vertical

- **Dimensions**
Overall bottom projection - 183/8"
Overall top projection -12"
Height - 6"
Available widths: 21" , 24" , 30" , 36" & 42"
- **Hood Body**
Stainless Steel: 24 gauge, grade 430 stainless steel.
Painted: 23 gauge cold rolled commercial grade (CRCC) steel, auto welded, coated with a baked enamel finish.
- **Motor**
2 speed, single coil, thermally protected, permanently lubricated.
Rated 120 volts, 60 hz. Complete with 200°C lead wires.
- **Lighting**
Single 60 watt cook light capacity (bulb not included).
- **Ducting Options**
Horizontal ducting: 3 1/4"x10" (duct adapter and damper included).
Vertical ducting: 3 1/4"x10" (duct adapter and damper included).
Vertical ducting: 7" round (duct adapter and damper not included).
Ductless: removable front vent (charcoal filter not included).
- **Fan Blade**
One piece polymeric, electronically balanced blade. 65/8" diameter with 5 paddles.
- **Electrical connection**
Hood top - 7/8" knockout hole for use with 1/2" cable clamp
Hood back - 7/8" knockout hole for use with 1/2" cable clamp

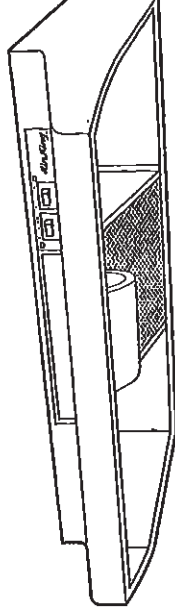

AV SERIES

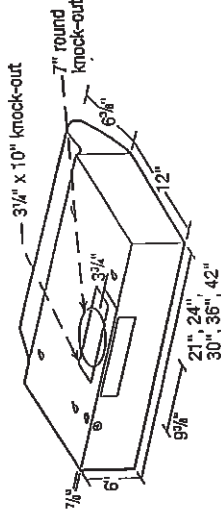

- **Filters**
UL rated, class 2 filter.
Grease Filter: RF35 - 87/8" x 103/8" (included).
Charcoal Filter: RF34 (not included).
Combo Grease/Charcoal: RF55 (not included).
- **Available Finishes**
White, Biscuit, Almond, Black & Stainless Steel.

EXPANDED PERFORMANCE

EXPANDED PERFORMANCE									
	Static Pressure (inches of w.g.)					Sones @ 1 SP	Fan Speed RPM	Power Watts	Amps
Air Flow - CFM	0	0.05	0.1	0.15	0.2	0.25			
Vertical Ducting High	246	232	218	203	181	147	2973	87.0	2.1
Horizontal Ducting High	225	210	180	175	155	120	3024	87.0	2.1

PROJECT	ARCHITECT									
LOCATION	ENGINEER									
CONTRACTOR	SUBMITTED BY					DATE		OPTIONAL EQUIPMENT & REMARKS		
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY		



Canada:

Air King: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Fax: (905) 456-1015

Applications subject to change without notice.

Updated 2-18

52.

COUNTRY LANE - UPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

30 of 43

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

LOCATION REQUIREMENTS

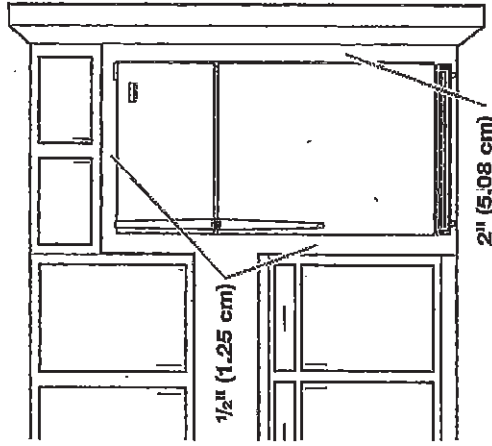


To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

PRODUCT DIMENSIONS

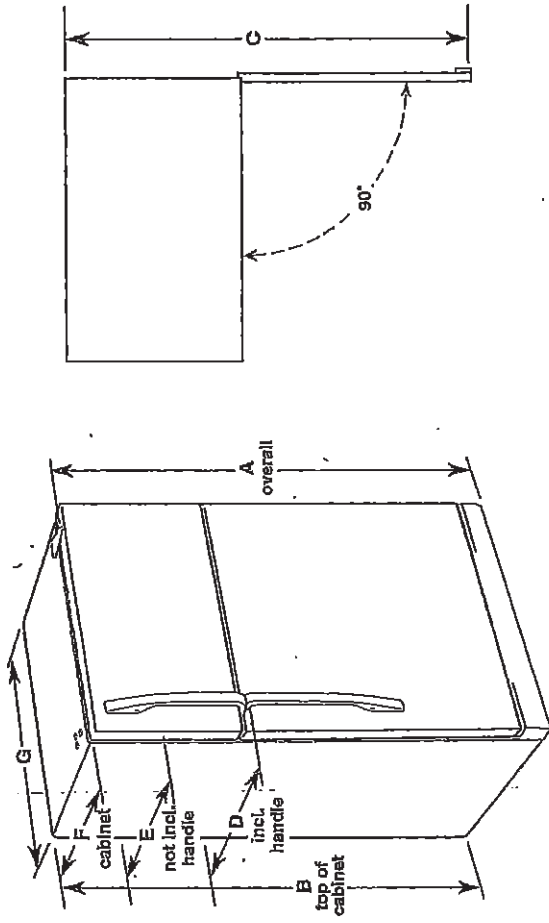

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	65 1/4" (166.3 cm)	55 1/2" (141.3 cm)	62 1/4" (158.1 cm)	32 1/4" (83.5 cm)	30 5/8" (77.8 cm)	28 1/4" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	65 1/4" (166.3 cm)	55 1/2" (141.3 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/2" (82.3 cm)	28 1/4" (72.4 cm)	32 3/4" (83.2 cm)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.





Ref. W10674106
10/29/14

SJB
NIG

CU - COUNTRY LANE-UPCOUNTRY
LOT 4-1
20-2257 UGELEV A
THE CALVERTON

31 of 43

Refrigerator Door Swing Verification

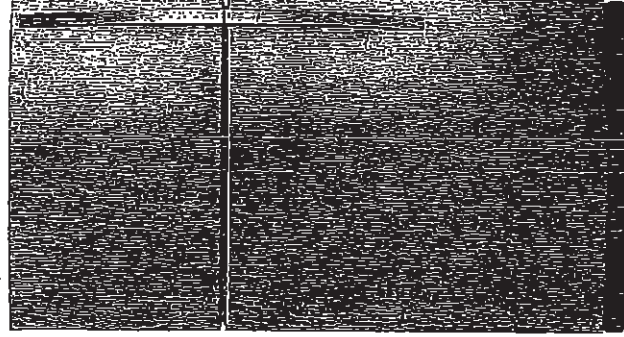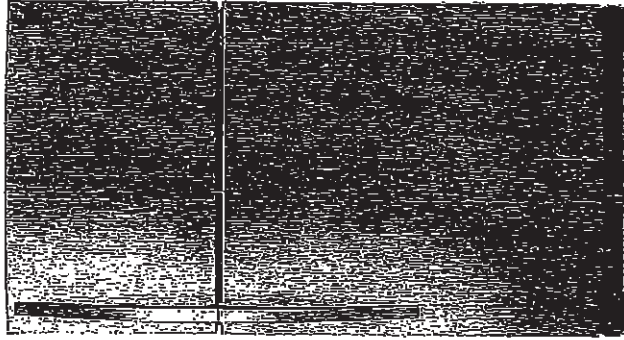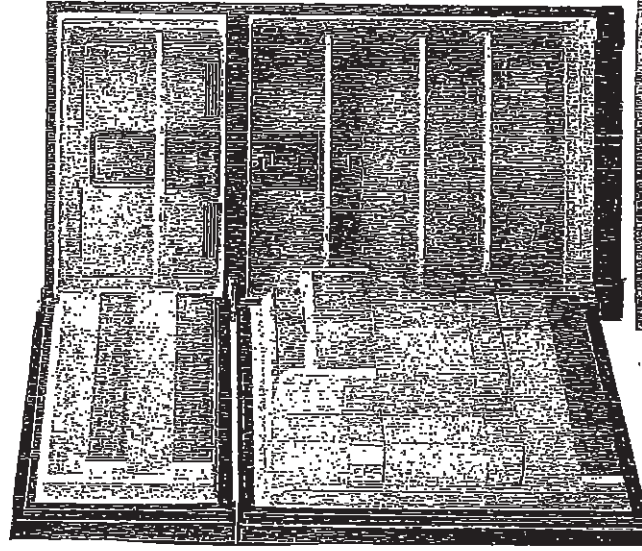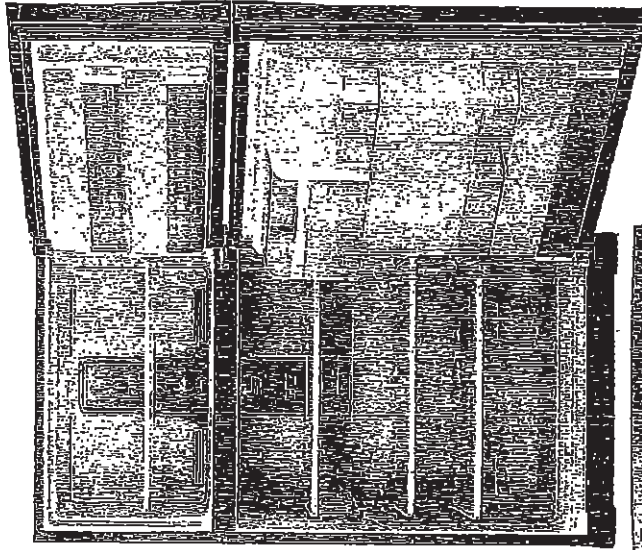

When facing the refrigerator

☐

RIGHT HAND
DOOR OPENING

- Hinges on right
- Handle on left

INITIAL

☒

LEFT HAND
DOOR OPENING

- Hinges on left
- Handle on right

INITIAL

PORCH LEFT

Please check and INITIAL your door swing selection.

Sub
226

COUNTRY LANE - UPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

32 of 43

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

5.3 cu. ft. Whirlpool® electric range with Frozen

Bake™ technology

YWFE515S0JS

Whirlpool®

Home > Kitchen Appliances > Cooking Appliances > Ranges > Single Oven Ranges > YWFE515S0JS



PS
232


CLCOUNTRY LANE -UPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

33 of 43

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES

Model YWFE515S0JS

Product Dimensions

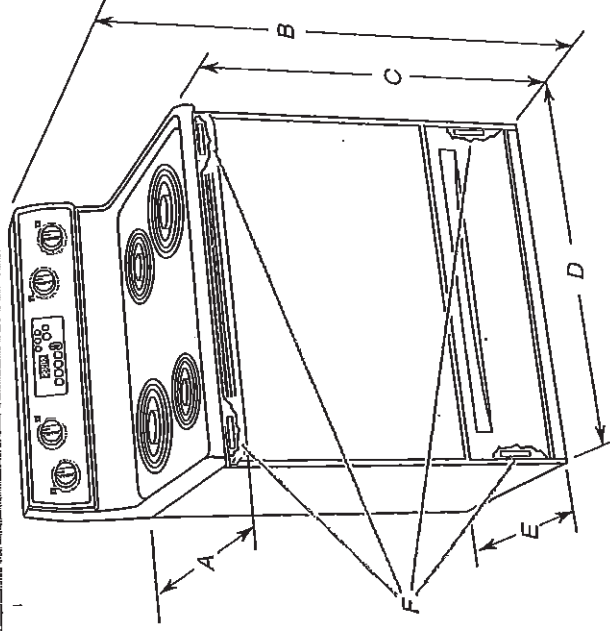

- A. 27¹/₄" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₈" (75.9 cm) width
- E. 25¹/₈" (64.3 cm) depth - back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

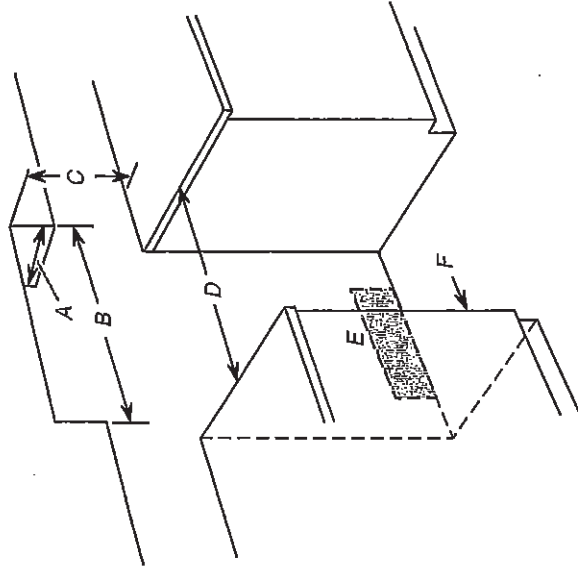

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

MS
SVD

JAN 28/20

CU - COUNTRY LANE-UPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

34043

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES

Model YWFE515S0JS

Install Anti-Tip Bracket

! WARNING



Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
2. Determine which mounting method to use: floor or wall. If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is $12\frac{3}{16}$ " (31.9 cm) from centerline as shown.

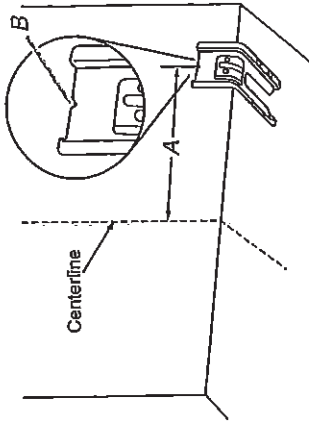

A. $12\frac{3}{16}$ " (31.9 cm)
B. Bracket V-notch

4. Drill two $1/8$ " (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting




Rear position


Front position

Diagonal (2 options)

Wall Mounting



5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two $\#12 \times 1\frac{1}{8}$ " (4.1 cm) screws provided.
6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.




8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

NSA

CITY COUNTRY LANE - UPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

35 of 3

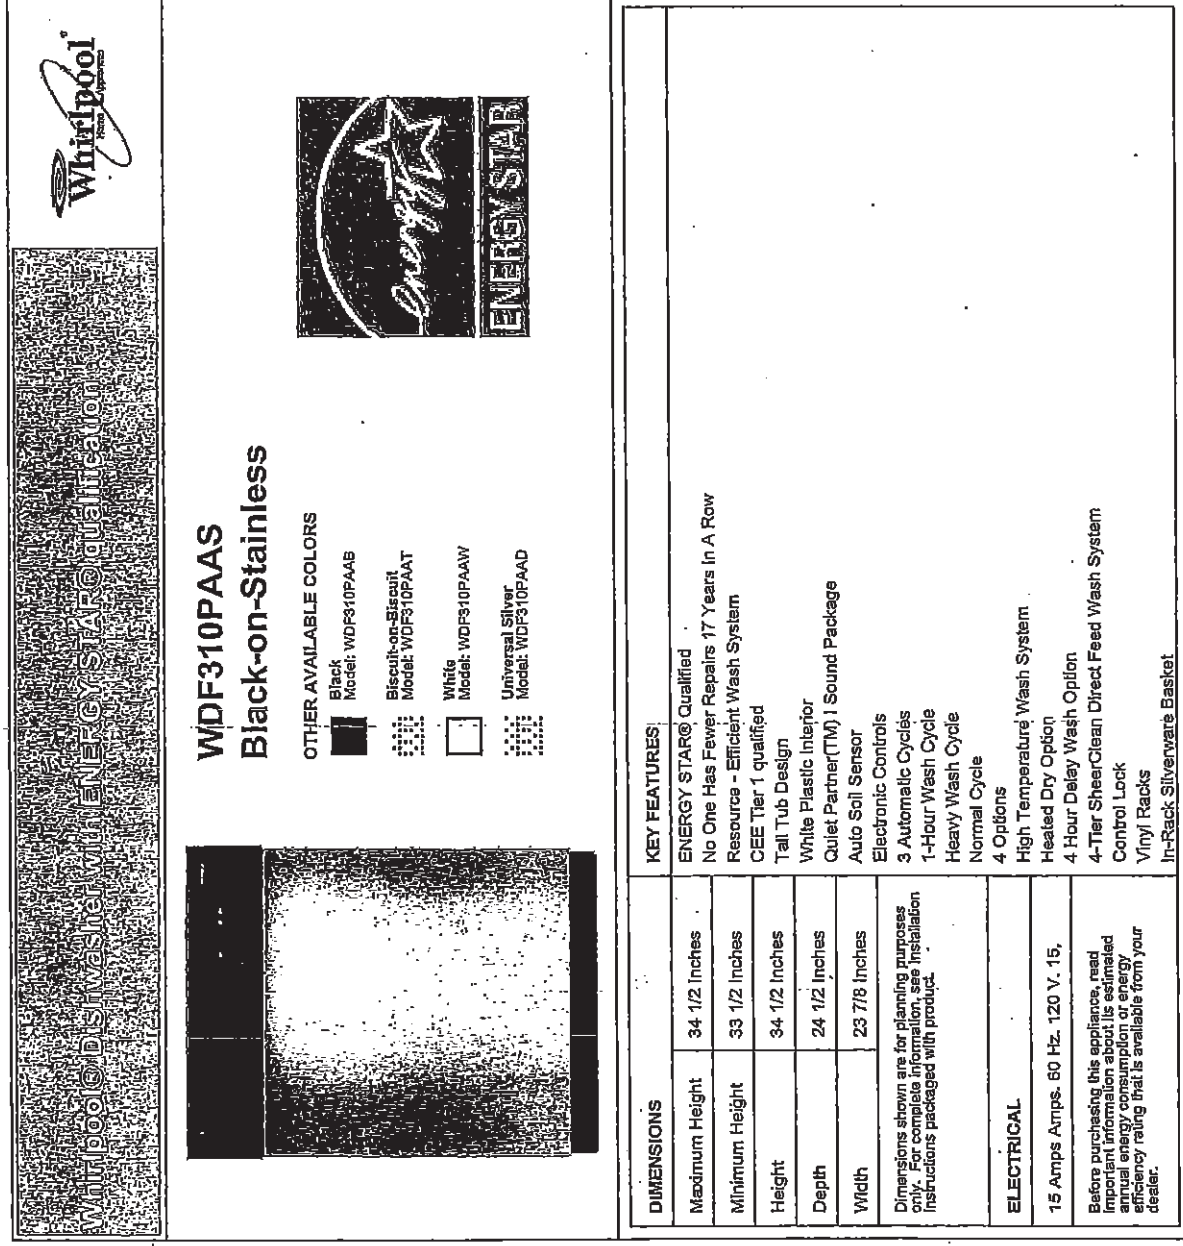

28

CU. COUNTRY LANE - UPCOUNTRY
 LOT 4-1
 20-2257 UG ELEV A
 THE CALVERTON

36 of 43

Whirlpool Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDFI10PAB	WDE30LPLA	WDFE30PSY
WDFI11PAB	WDF320PAD	WDFE40PAD
WDFI20PAE	WDF730PAY	WDF730PAY
WDFI21PAF	WDF710PAY	WDTI710PAY
WDF310PAA	WDFE30PAD	WDTI720PAD
WDF310PAA	WDFE30FLY	WDTI770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.



If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit's instructions for installing the power supply cord.



Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.




Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4" N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/JAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended


that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

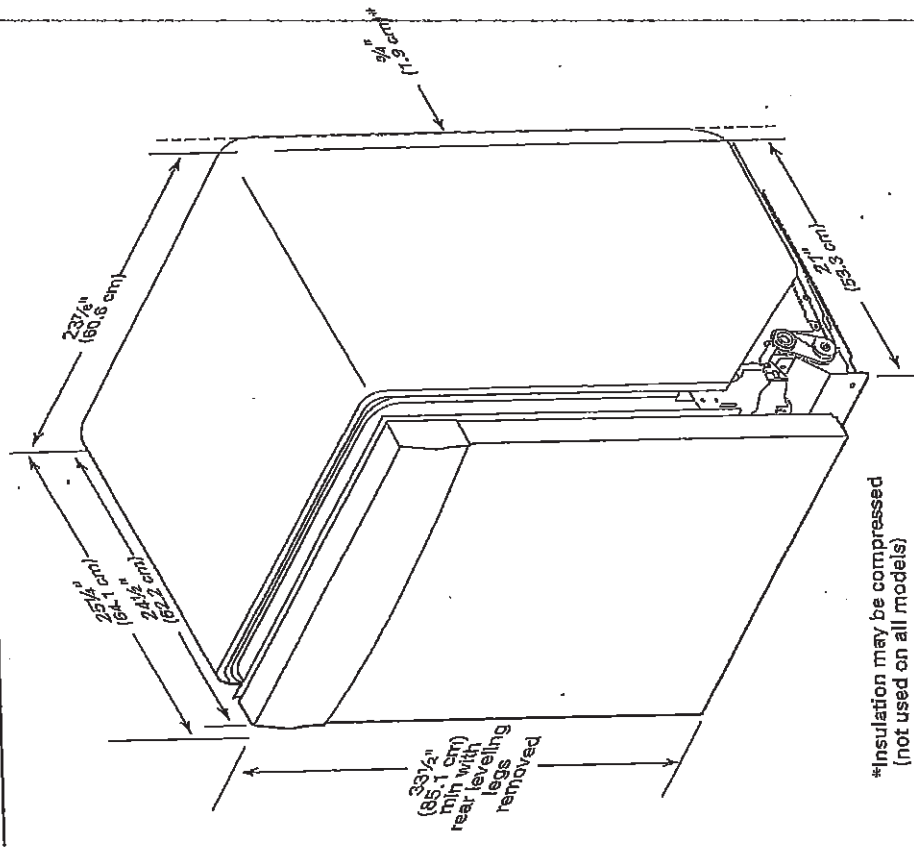

*Insulation may be compressed (not used on all models)

NSA

CJ. COUNTRY LANE - UPCOUNTRY
 LOT 4-1
 20-2257 UG ELEV A
 THE CALVERTON

37 of 43


CABINET CUTOUT DIMENSIONS

WIDE 320 PAB

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

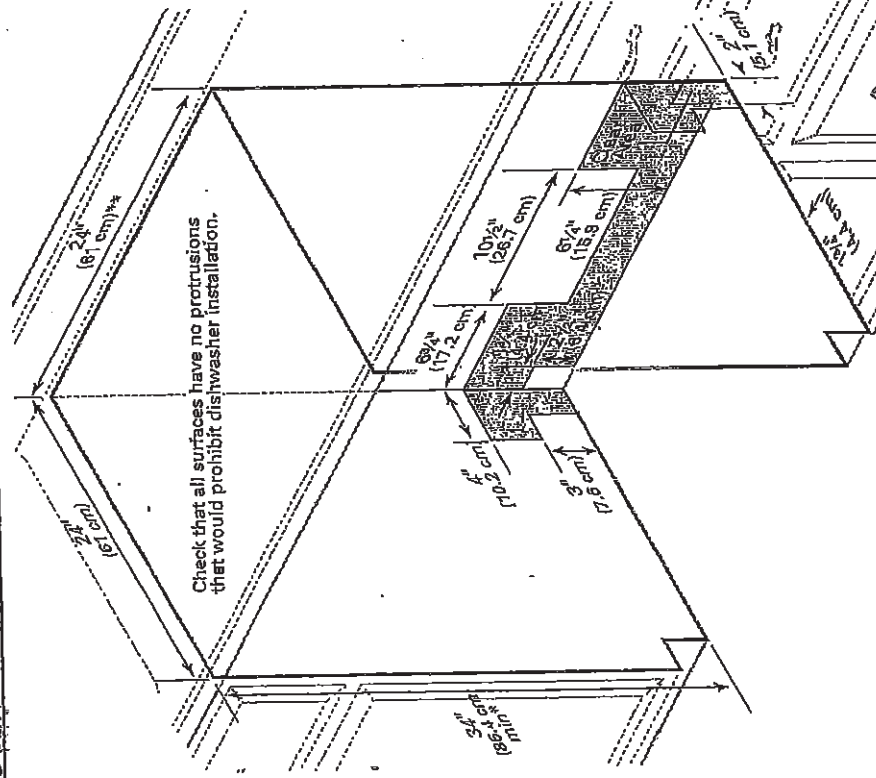


SP
 2/5

COUNTRY LANE - UPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

38 of 43

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryer | Whirlpool Front Load Washers | WFW5620HW

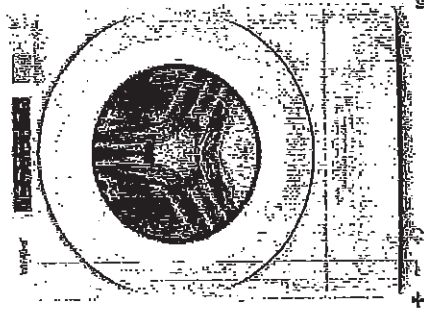

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm; 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm; 56-1/2 in
Minimum Height	98.11 cm; 38-5/8 in
Width	68.58 cm; 27.0 in

Appearance

LCD Touch Screen	No
------------------	----

Window

Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

NGS

COUNTRY LANE - UPCOUNTRY
 LOT 4-1
 20-2257 UG ELEV A
 THE CALVERTON

39 of 43

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS


Proper installation is your responsibility.

You will need:


- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

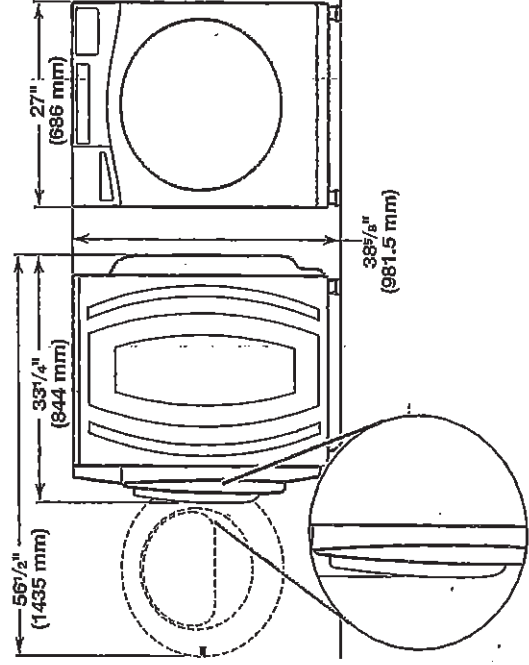


Maytag Models

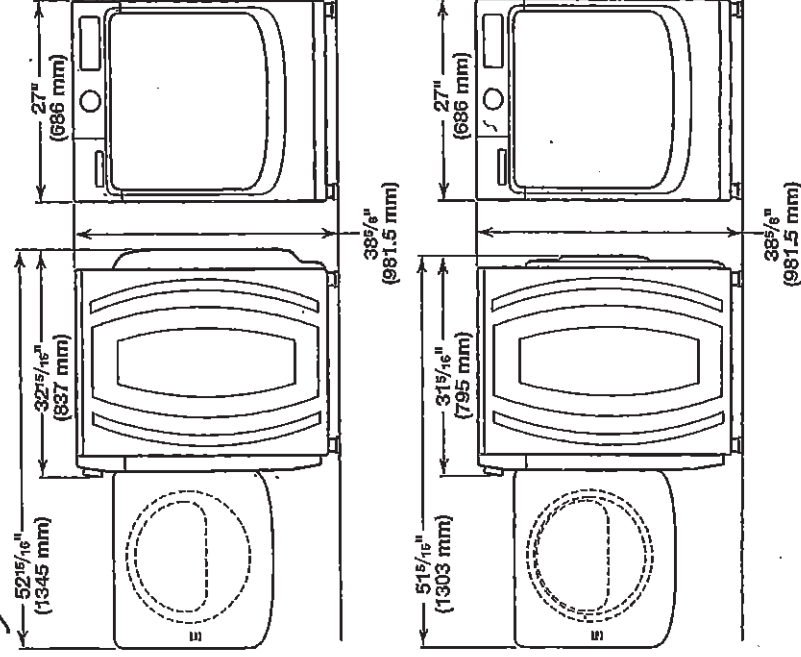

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

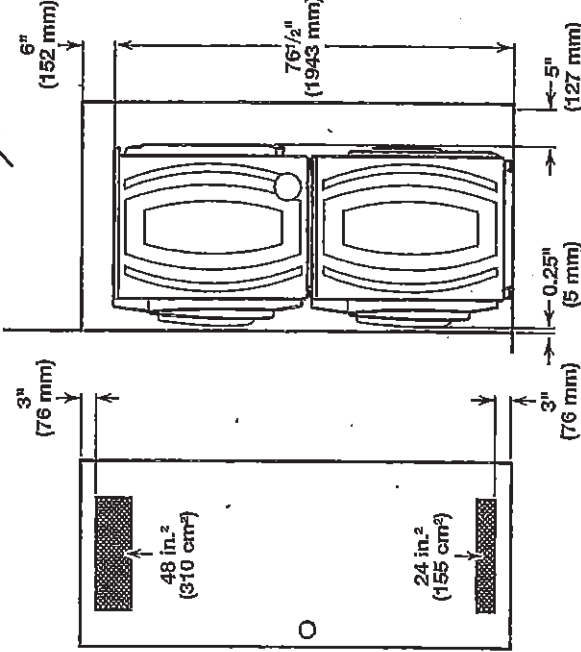

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.


NSA

CU COUNTRY LANE - UPCOUNTRY
 LOT 4-1
 20-2257 UG ELEV A
 THE CALVERTON


40 of 43

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

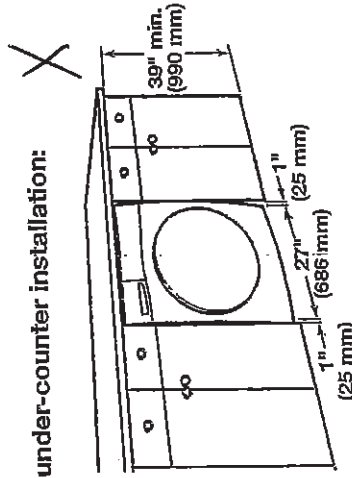

Recessed area or closet installation:

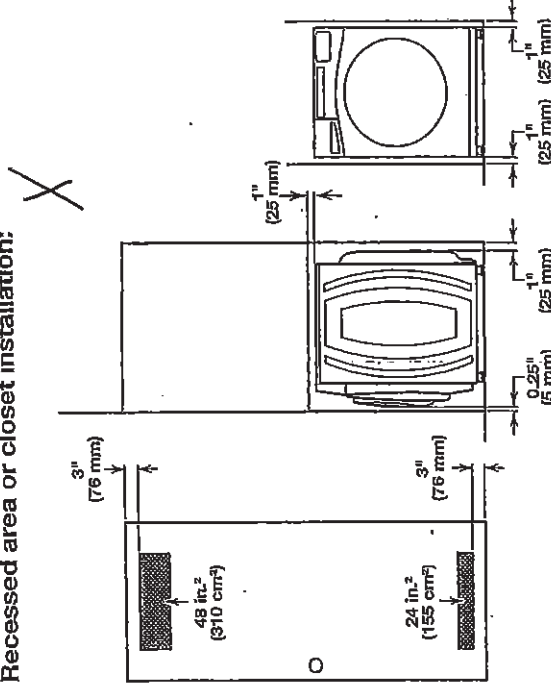

Custom cabinet installation:

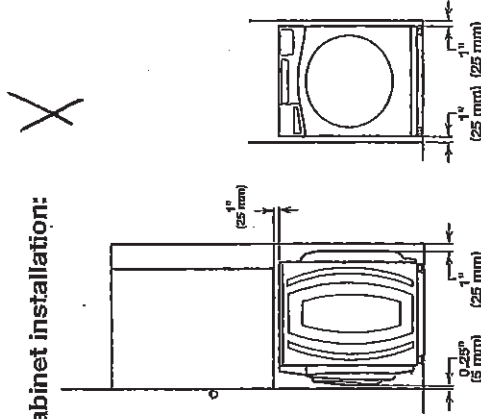


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

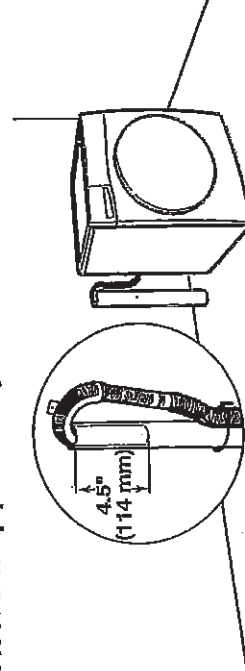


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

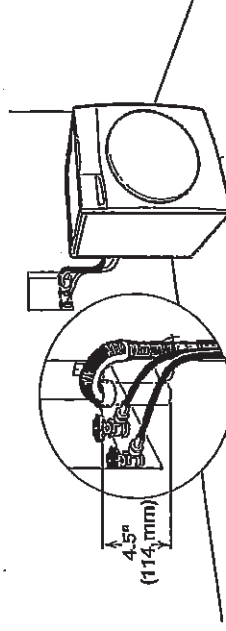

See requirements for floor standpipe drain system.

Laundry tub drain system

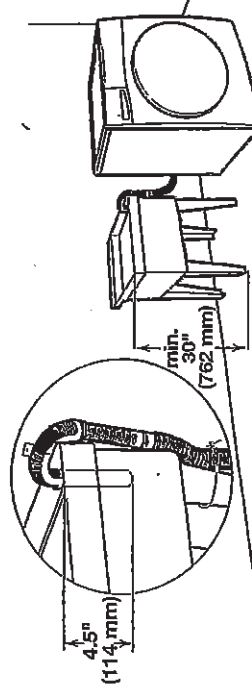

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


25 of 43

CU-COUNTRY LANE - OPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

41 of 43

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Controls English | Washers and Dryers | Dryers | Electric Dryers | YWED5620HW

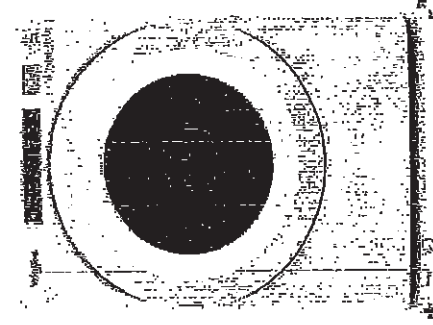

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	139.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	69.53 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical


Hz	60
Power Cord Included	Yes

NGA

COUNTRY LANE - UPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

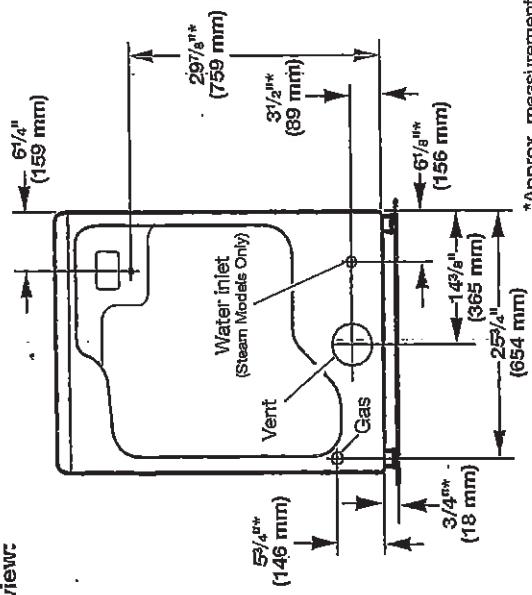

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

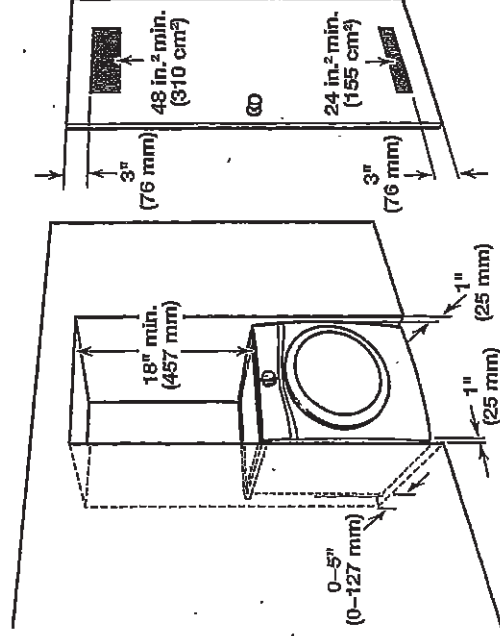

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

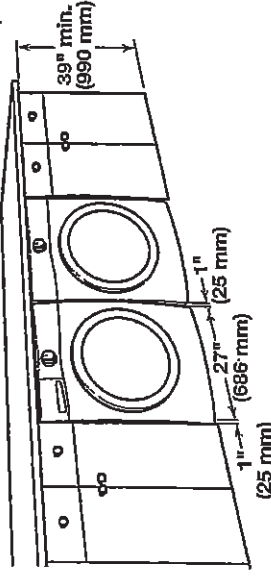

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFF, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

26 Sub

CU - COUNTRY LANE-UPCOUNTRY
LOT 4-1
20-2257 UG ELEV A
THE CALVERTON

43 of 43

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

! WARNING



Explosion Hazard

- Keep flammable materials and vapors, such as gasoline, away from dryer.
- Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
- Failure to do so can result in death, explosion, or fire.

You will need:


- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


W6 SVD

DRYER DIMENSIONS

Front view:

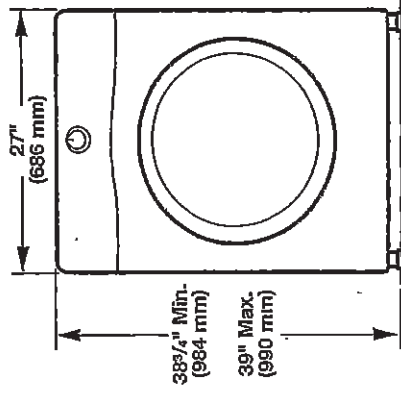

Side view:
Whirlpool Models

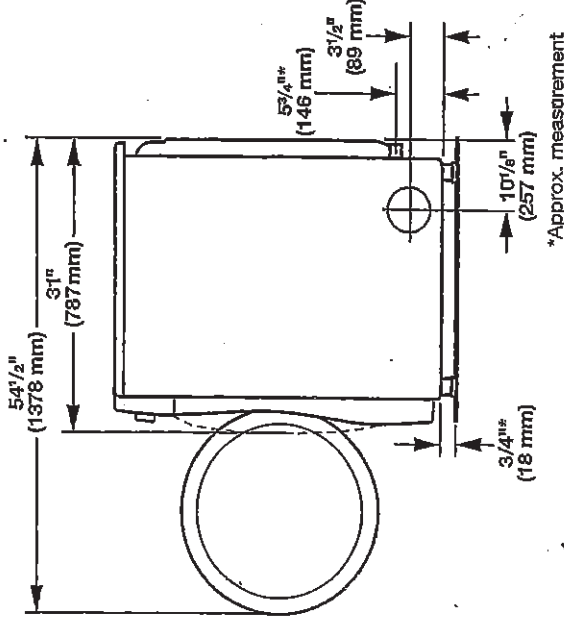

Maytag Models

