



30-Aug-21

PRE-Sales Selection Sheet

CHECKLIST

7 of 4

LOT	004-7	* REVISED *	20-2257-EN ELEV A THE CALVERTON
PURCHASERS: SACHIN SINGH BALIAN		CONTACT NO: 647-679-0142	
SRIVIDYA KALPATHY RANGANATHAN		647-679-8282	
VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED			

OPTIONAL DOUBLE SINKS IN MASTER ENSUITE BATHROOM *

- ☐ FINISHED BASEMENT
- ☐ COLD CELLAR
- UPGRADED / MODIFIED ELEVATION
- ☐ CORNER UPGRADE
- ☐ SIDE UPGRADE
- ☐ REAR UPGRADE
- CEILING UPGRADE - SMOOTH
- ☒ MAIN FLOOR *
- ☒ SECOND FLOOR *
- ADDITIONAL ROUGH-INS
- ☒ 200 AMP SERVICE
- ☐ WET BAR ROUGH IN
- GAS ROUGH-IN
- ☐ STOVE
- ☐ BBQ
- HOODFAN VENTING
- ☐ 6" ROUND DUCT
- ☒ 7" ROUND DUCT *
- ☐ HUMIDIFIER
- ☒ AIRCON
- ☐ DRYER
- ☐ ADDITIONAL FIREPLACE
- ☐ WALK OUT DECK
- ☐ WALK OUT BASEMENT
- ☒ BASEMENT *

FULL BASEMENT STAIRS:	<u>PAINT GRADE</u>
UPPER BASEMENT STAIRS:	<u>N/A</u>
LOWER BASEMENT STAIRS:	<u>N/A</u>
STAIRS TO LOWER LEVEL:	<u>ALL OAK</u>
STAIRS TO UPPER LEVEL:	<u>N/A</u>
MAIN STAIRS:	<u>ALL OAK</u>
MEDIA STAIRS (if applicable):	<u>N/A</u>

Date	Aug 30/21	Signature	Aug 30/21	IBIT	SALEM
Date		Purchaser	file	Date	Aug 30/21
Date		Purchaser		Date	Aug 30/21

Date Approved _____ HEATHWOOD HOMES (UPCOUNTRY) LIMITED



Interior Finishing Selection Sheet

06-Aug-21

LOT 004-7

20-2257-EN ELEV A THE CALVERTON

PURCHASERS: SACHIN SINGH BALIAN

CONTACT NO: 647-679-0142

SRIVIDYA KALPATHY RANGANATHAN

647-679-8282

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Appliances

6-34 Kitchen HoodFan

UPG

☐ Air King Under Cabinet Range Hood STAINLESS STEEL AV1308
STD 30" PAGE 27

Cabinetry

1-9111 Kitchen Cabinet Colour/Style

☐ SIMCOE ORCHID VIKING III STD 3DL

3-2086 Kitchen Cabinet Hardware

☐ HARDWARE 9677 STD

25-6243 Main Bathroom Cabinet Colour/Style

☐ CAMDEN OYSTER CL Viking III MAPLE

29-2084 Main Bathroom Cabinet Hardware

☐ HARDWARE 171 STD

28-8796 Main Bathroom Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

20-9166 Master Ensuite Cabinet Colour/Style

☐ CHARLESTON ORCHID Viking III STD 3DL

22-2084 Master Ensuite Cabinet Hardware

☐ HARDWARE 171 STD

414-6247 Powder Room Lower Level Cabinet Colour/Style

☐ CAMDEN SHALE GREY CL Viking III MAPLE

416-2084 Powder Room Lower Level Cabinet Hardware

☐ HARDWARE 171 STD

415-8822 Powder Room Lower Level Countertop

☐ Countertop WHITE CARRARA 4924-38 Wilsonart

Carpet

37-9248 Bedroom 2 Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

38-9248 Bedroom 3 Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

14-9248 Family Room Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

36-9248 Master Bedroom Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

52-1079 Throughout Underpad

☐ Underpad 500 Series STD

Ceramics

16-5609 Foyer Flooring

☐ Sauble Grey GE.SU.GRY.1313 STD 13" X 13"

17-2222 Foyer Grout

☐ Grout (105) Driftwood STD

4-8103 Kitchen Backsplash

☒ ONTARIO HEXAGON MATTE SNOW WHITE
OD.ON.SWT.02.HEX.MT UPG_2

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available materials and equipment immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date

Purchaser

Date

Décor Consultant

Date

Purchaser

Date Approved

HEATHWOOD HOMES (UPCOUNTRY)

LIMITED



06-Aug-21

LOT 004-7

Interior Finishing Selection Sheet

20-2257-EN ELEV A THE CALVERTON

PURCHASERS: SACHIN SINGH BALIAN

CONTACT NO: 647-679-0142

SRIVIDYA KALPATHY RANGANATHAN

647-679-8282

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Ceramics

UPG

5-2226 Kitchen Backsplash Grout

☐ Grout (00) White STD

7-9255 Kitchen/Breakfast Flooring

☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13"

8-2225 Kitchen/Breakfast Grout

☐ Grout (27) Silver STD

66-8261 Laundry Room Flooring

☐ Serpentine Beyaz/White TR.ST.BYZ.1313 STD 13x13

67-7705 Laundry Room Grout

☒ Upgrade Grout (01) Alabaster U/G

30-5490 Main Bathroom Flooring

☐ La Riserva Grey GE.IR.GRY.1313 Std 13 x 13

31-2222 Main Bathroom Grout

☐ Grout (105) Driftwood STD

27-9020 Main Bathroom Tub Wall Tile

☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED HORIZONTALLY

26-2226 Main Bathroom Tub Wall Tile Grout

☐ Grout (00) White STD

23-8262 Master Ensuite Floor Tile

☐ Serpentine Grey TR.ST.GRY.1313 STD 13x13

24-7704 Master Ensuite Floor Tile Grout

☐ Grout (19) Pearl Gray STD

73-8665 Master Ensuite Shower Floor Tile

☐ Ontario Series Mosaic Taupe Matte OD.ON.TPE.0202.MT.N UPG 1 2 x 2

74-7704 Master Ensuite Shower Floor Tile Grout

☐ Grout (19) Pearl Gray STD

147-8923 Master Ensuite Shower Jamb(s) and Sill(s)

☐ Shower Jamb / Sill Thassos White STD

104-9020 Master Ensuite Shower Wall Tile

☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALL VERTICALLY

105-2226 Master Ensuite Shower Wall Tile Grout

☐ Grout (00) White STD

191-5609 Mud Room Flooring

☐ Sauble Grey GE.SU.GRY.1313 STD 13" X 13"

190-2222 Mud Room Grout

☐ Grout (105) Driftwood STD

32-8261 Powder Room Flooring

☐ Serpentine Beyaz/White TR.ST.BYZ.1313 STD 13x13

33-7705 Powder Room Grout

☒ Upgrade Grout (01) Alabaster U/G

369-8261 Powder Room Lower Level Flooring

☐ Serpentine Beyaz/White TR.ST.BYZ.1313 STD 13x13

370-7705 Powder Room Lower Level Grout

☒ Upgrade Grout (01) Alabaster U/G

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date

Purchaser

Date

Décor Consultant

Date

Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



06-Aug-21

LOT 004-7

Interior Finishing Selection Sheet

20-2257-EN ELEV A THE CALVERTON

PURCHASERS: SACHIN SINGH BALIAN

CONTACT NO: 647-679-0142

SRIVIDYA KALPATHY RANGANATHAN

647-679-8282

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Ceramics

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

50-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-9114 Great Room Fireplace Mantle

☐ Paint Grade Mantel- Cabinet (Per Plan) WHITE NF 15 STD
PAGE 20

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-9125 Kitchen Countertop

☒ GRIGIO SARDO Group 1 UPG 3/4" with Mitered Edge

21-9122 Master Ensuite Countertop

☒ MSI Quartz ICED GREY Group 1 UPG 3/4" with Mitered Edge

Hardwood

11-9358 Great Room Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl
TITANIUM Red Oak Pearl 3/4" X 3 1/4"

367-9358 Lower Level Hall Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl
TITANIUM Red Oak Pearl 3/4" X 3 1/4"

100-9059 Main Stairs Landing(s) Flooring

☐ Red Oak-Vintage 3 1/4 inch Pre-Sanded Smooth Unfinished Red Oak-Unfinished-3/4 inch x 3 1/4inch 3/4" x 3 1/4" STAIN
SAMBUCA- COLOUR IS DIFFERENT THEN HARDWOOD FLOOR

78-9059 Stair Landing to Lower Level Flooring

☐ Red Oak-Vintage 3 1/4 inch Pre-Sanded Smooth Unfinished Red Oak-Unfinished-3/4 inch x 3 1/4inch 3/4" x 3 1/4" STAIN
SAMBUCA- COLOUR IS DIFFERENT THEN HARDWOOD FLOOR

35-9358 Upper Hall Flooring

☐ Vintage Pioneered Solid Collection Select V : Red Oak Pearl
TITANIUM Red Oak Pearl 3/4" X 3 1/4"

Interior Railings

145-8148 Main Stairs Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)
BLACK METAL STD

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)
BLACK METAL STD

Interior Stairs

146-1713 Basement Stairs Type

☐ Paint Grade Stairs STD

121-1713 Basement Stairs Landing(s) Flooring

☐ Paint Grade Stairs STD

- The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
- The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
- The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- Selections will not be processed unless signed by Heathwood Homes Head Office.
- The colour selections made on the Colour Chart are final and cannot be changed once submitted.
- The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date

Purchaser

Date

Décor Consultant

Date

Purchaser

Date Approved

HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



Interior Finishing Selection Sheet

06-Aug-21

LOT 004-7

20-2257-EN ELEV A THE CALVERTON

PURCHASERS: SACHIN SINGH BALIAN

CONTACT NO: 647-679-0142

SRIVIDYA KALPATHY RANGANATHAN

647-679-8282

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Interior Stairs

142-1712 Main Stairs Type

☐ Oak Stairs UPG_1

45-1712 Stairs to Lower Level Type

☐ Oak Stairs UPG_1

Interior Trim

51-9374 Throughout Trim Size

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings STD-Towns

Painting

143-7761 Main Stairs Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN SAMBUCA- COLOUR IS DIFFERENT THEN HARDWOOD FLOOR

146-7761 Main Stairs Handrail/Pickets/Posts Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN SAMBUCA- COLOUR IS DIFFERENT THEN HARDWOOD FLOOR

46-7761 Stairs to Lower Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN SAMBUCA- COLOUR IS DIFFERENT THEN HARDWOOD FLOOR

50-7761 Stairs to Lower Level Handrail/Pickets/Posts Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN SAMBUCA- COLOUR IS DIFFERENT THEN HARDWOOD FLOOR

240-1716 Throughout Trim - Paint Colour

☐ Trim WHITE STD

51-1717 Throughout Walls - Paint Colour

☐ Wall WARM GREY 22 STD

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

149-1737 Master Ensuite Plumbing Fixture (colour)

☐ Plumbing Fixtures WHITE STD

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

371-1737 Powder Room Lower Level Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date

Purchaser

Date

Décor Consultant

Date

Purchaser

Date Approved

HEATHWOOD HOMES (UPCOUNTRY)

LIMITED



Sales Selection Sheet
of

06-Aug-21

LOT 004-7

20-2257-EN ELEV A THE CALVERTON

PURCHASERS: SACHIN SINGH BALIAN CONTACT NO: 647-679-0142
SRIVIDYA KALPATHY RANGANATHAN 647-679-8282

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Cabinetry

475	Optional Extras	Qty: 1
	04H- 66cm deep fridge enclosure (counter depth)includes [1] 66cm deep cabinet and [1] 66cm deep gable(1-wall beside fridge) (note: this is not a zero clearance enclosure. Standard heights and widths will be used) SKETCH # 7 PAGE 18	
405	Optional Extras	Qty: 1
	12B- Pots and pans drawers (width min. 60cm/max. 90cm) (size subject to floor plan) Viking SKETCH # 7 PAGE 18	

Cabinetry / Electrical

1040	Optional Extras	Qty: 1
	Kitchen lower valance trim with light including switch (Luminiz LED slimline strip light)	

Ceramics

1056	Upgrade 2 Tile	Qty: 1
1050	Upgrade Grout	Qty: 1
1052	Upgrade Grout	Qty: 1
1049	Upgrade Grout	Qty: 1
	Kitchen Optional Backsplash	Qty: 1
	L. Flr.Pow Floor	Qty: 1
	Laundry Floor	Qty: 1
	M.Flr.Pow Floor	Qty: 1

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date Purchaser

Date: APPROVED - Décor Consultant

Date Purchaser

APPROVED

Date Approved: HEATHWOOD HOMES (UPCOUNTRY) LIMITED



Sales Selection Sheet

06-Aug-21

LOT 004-7

20-2257-EN ELEV A THE CALVERTON

PURCHASERS: SACHIN SINGH BALIAN CONTACT NO: 647-679-0142
SRIVIDYA KALPATHY RANGANATHAN 647-679-8282

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Drywall

Qty: 1

1060 Ceiling Upgrades
Smooth Ceilings Main Floor

Qty: 1

1060 Ceiling Upgrades
Smooth Ceilings Basement

Qty: 1

1060 Ceiling Upgrades
Smooth Ceilings Second Floor

Electrical

Qty: 1

286 Optional Extras
Ceiling rough-in (Capped)
TO BE INSTALLED IN THE CENTR OF THE GREAT ROOM- USE EXISTING SWITCH PLUG
SEE SKETCH # 7 PAGE 18

Qty: 1

284 Optional Extras
Extra wall interior outlet on Existing Circuit (does not include kitchen outlets)
TO BE INSTALLED ABOVE THE FIRE PLACE 70" FROM FLOOR
SEE SKETCH # 7 PAGE 18

Qty: 1

286 Optional Extras
Ceiling rough-in (Capped)
TO BE INSTALLED ABOVE THE BREAKFAST BAR - USE A SEPARATE SWITCH
SEE SKETCH # 7 PAGE 18

Qty: 1

287 Optional Extras
Additional switch
TO BE USED FOR THE R/I CAP LIGHT

- This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
- All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
 - In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
 - The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
 - The Vendor acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
 - The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
 - Selections will not be processed unless signed by Heathwood Homes Head Office.
 - The selections made on this schedule are final and cannot be changed once submitted.
 - The Purchaser has checked and acknowledges the accuracy of this schedule.

Date

Purchaser

Date r **APPROVED** - Décor Consultant

Date

Purchaser

Date Approved **HEATHWOOD HOMES (UPCOUNTRY) LIMITED**



Sales Selection Sheet
of

06-Aug-21

20-2257-EN ELEV A THE CALVERTON

LOT 004-7

PURCHASERS: SACHIN SINGH BALIAN CONTACT NO: 647-679-0142
SRIVIDYA KALPATHY RANGANATHAN 647-679-8282

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Granite

1061 Optional Upgrade Kitchen Qty: 1
Countertop 3/4" GROUP 1 with double edge

1062 Optional Upgrade Master Ensuite Qty: 1
Countertop upgrade with 4" backsplash 3/4" GROUP 1 with double edge

Painting

350 Optional Extras - PAINT / STAIN - Custom LANDING Qty: 2
Stain stair landing less than 25sq/ft in sambucca. For stair with metal or oak pickets only. Unfinished Pre-sanded smooth hardwood will be installed and to be stained in sambucca to match the stairs

Plumbing

225 STANDARD Kitchen Sink Option Qty: 1
KINDRED Kitchen Sink Collection - Reginox ND1831 UA/9 Stainless Kitchen Double (equal size) Bowl Undermount Sink (or equivalent) PAGE 21

500 Master Ensuite Qty: 1
OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET, STD COLONY SINK, ONE EXTRA VANITY LIGHT, ONE EXTRA PLUG AND CABINET CONVERSION VIKING SKETCH # 8 PAGE 19

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date Purchaser

Date: APPROVED - Décor Consultant

Approved Aug 6 21 RIT Salem

Date Purchaser

Approved

Date: Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



Sales Selection Sheet

06-Aug-21

20-2257-EN ELEV A THE CALVERTON

LOT 004-7

PURCHASERS: SACHIN SINGH BALIAN CONTACT NO: 647-679-0142
SRIVIDYA KALPATHY RANGANATHAN 647-679-8282

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. The Vendor will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date	<u>06/08/21</u>	Purchaser	<u>SRIVIDYA KALPATHY RANGANATHAN</u>	Date	<u>Aug 6, 21</u>	Décor Consultant	<u>DR. SATEEN SINGH</u>
Date		Purchaser		Date	<u>APPROVED</u>		<u>SRIVIDYA KALPATHY RANGANATHAN</u>
Date		Purchaser		Date	<u>APPROVED</u>		<u>SACHIN SINGH BALIAN</u>
				Date	<u>APPROVED</u>		<u>HEATHWOOD HOMES (UPCOUNTRY) LIMITED</u>


C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

160^{sf} 41
The Calverton

20-2257 ELEV. A END

ELEVATION A END:
2,257 SQ FT

Sketch # 5

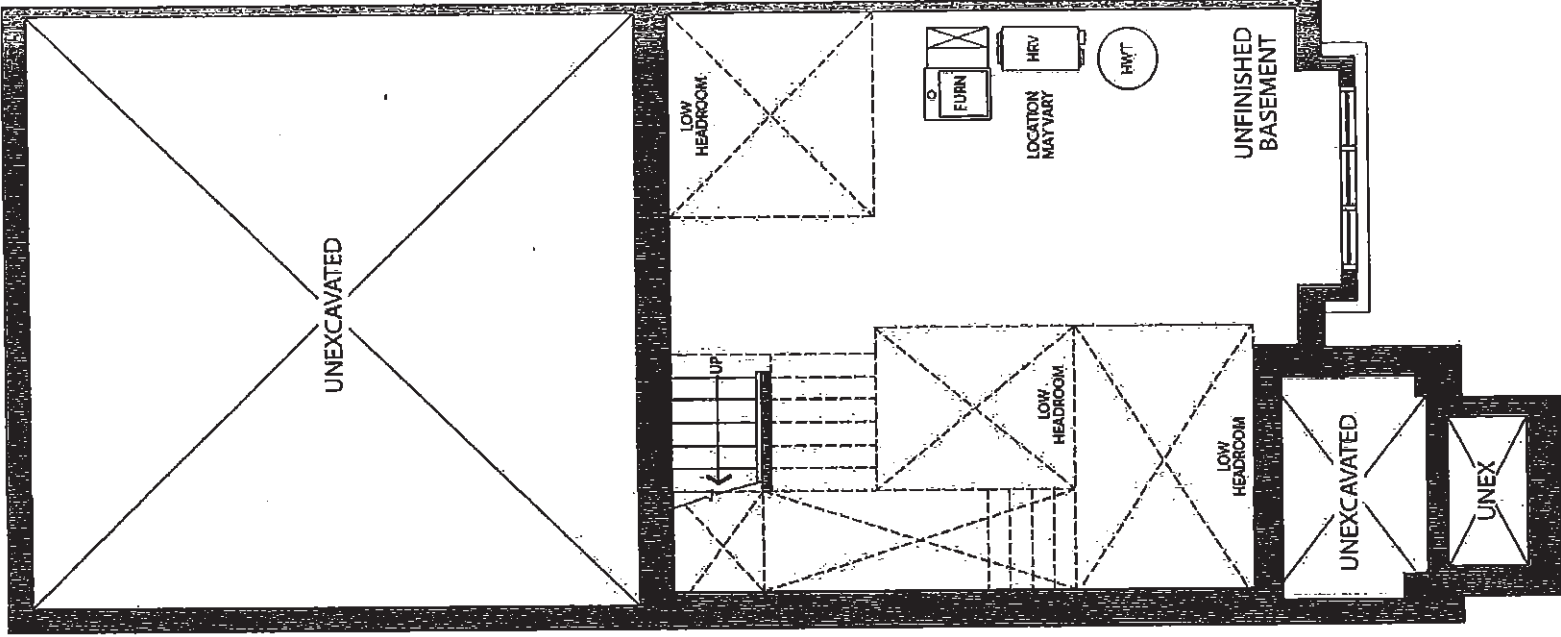

BASEMENT
ELEVATION A
END


C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

17 of 41
The Calverton

20-2257 ELEV. A END

ELEVATION A END:
2,257 SQ FT

Sketch #6

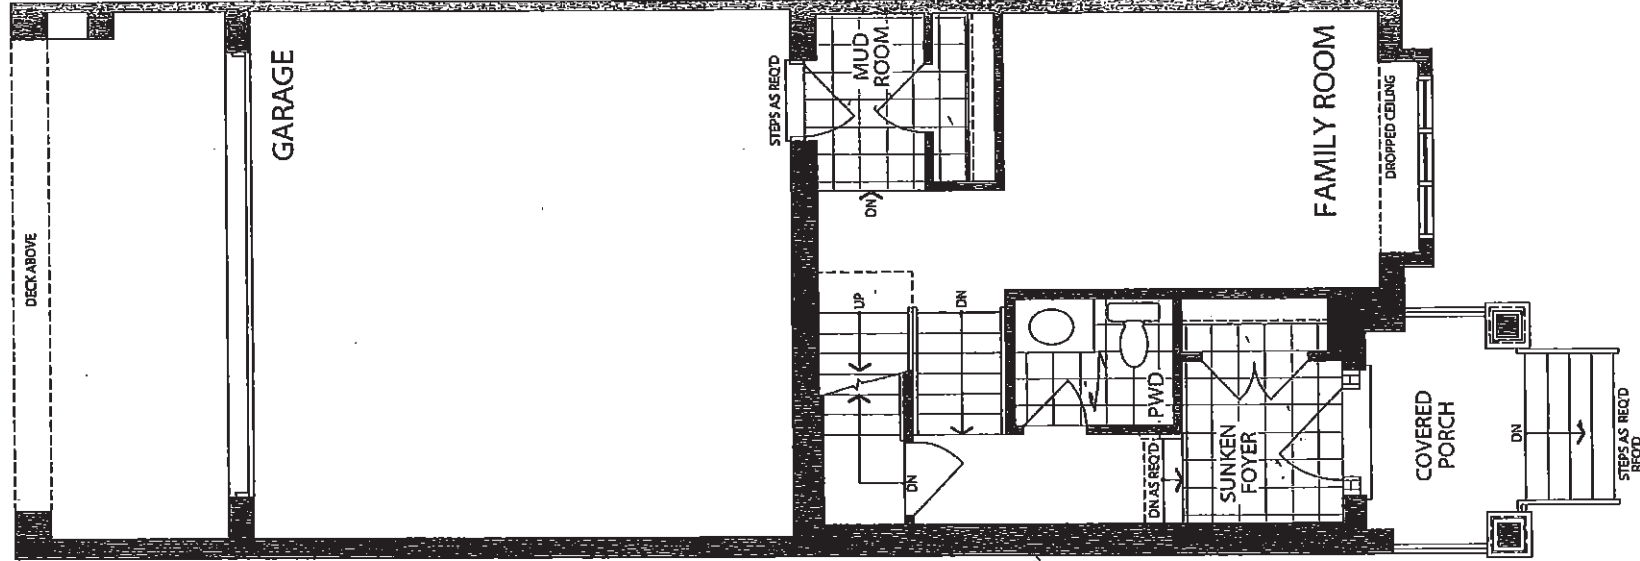

LOWER LEVEL
ELEVATION A - END


C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

18 of 41
The Calverton

20-2257 ELEV. A END

ELEVATION A END:
2,257 SQ FT

Sketch # 7

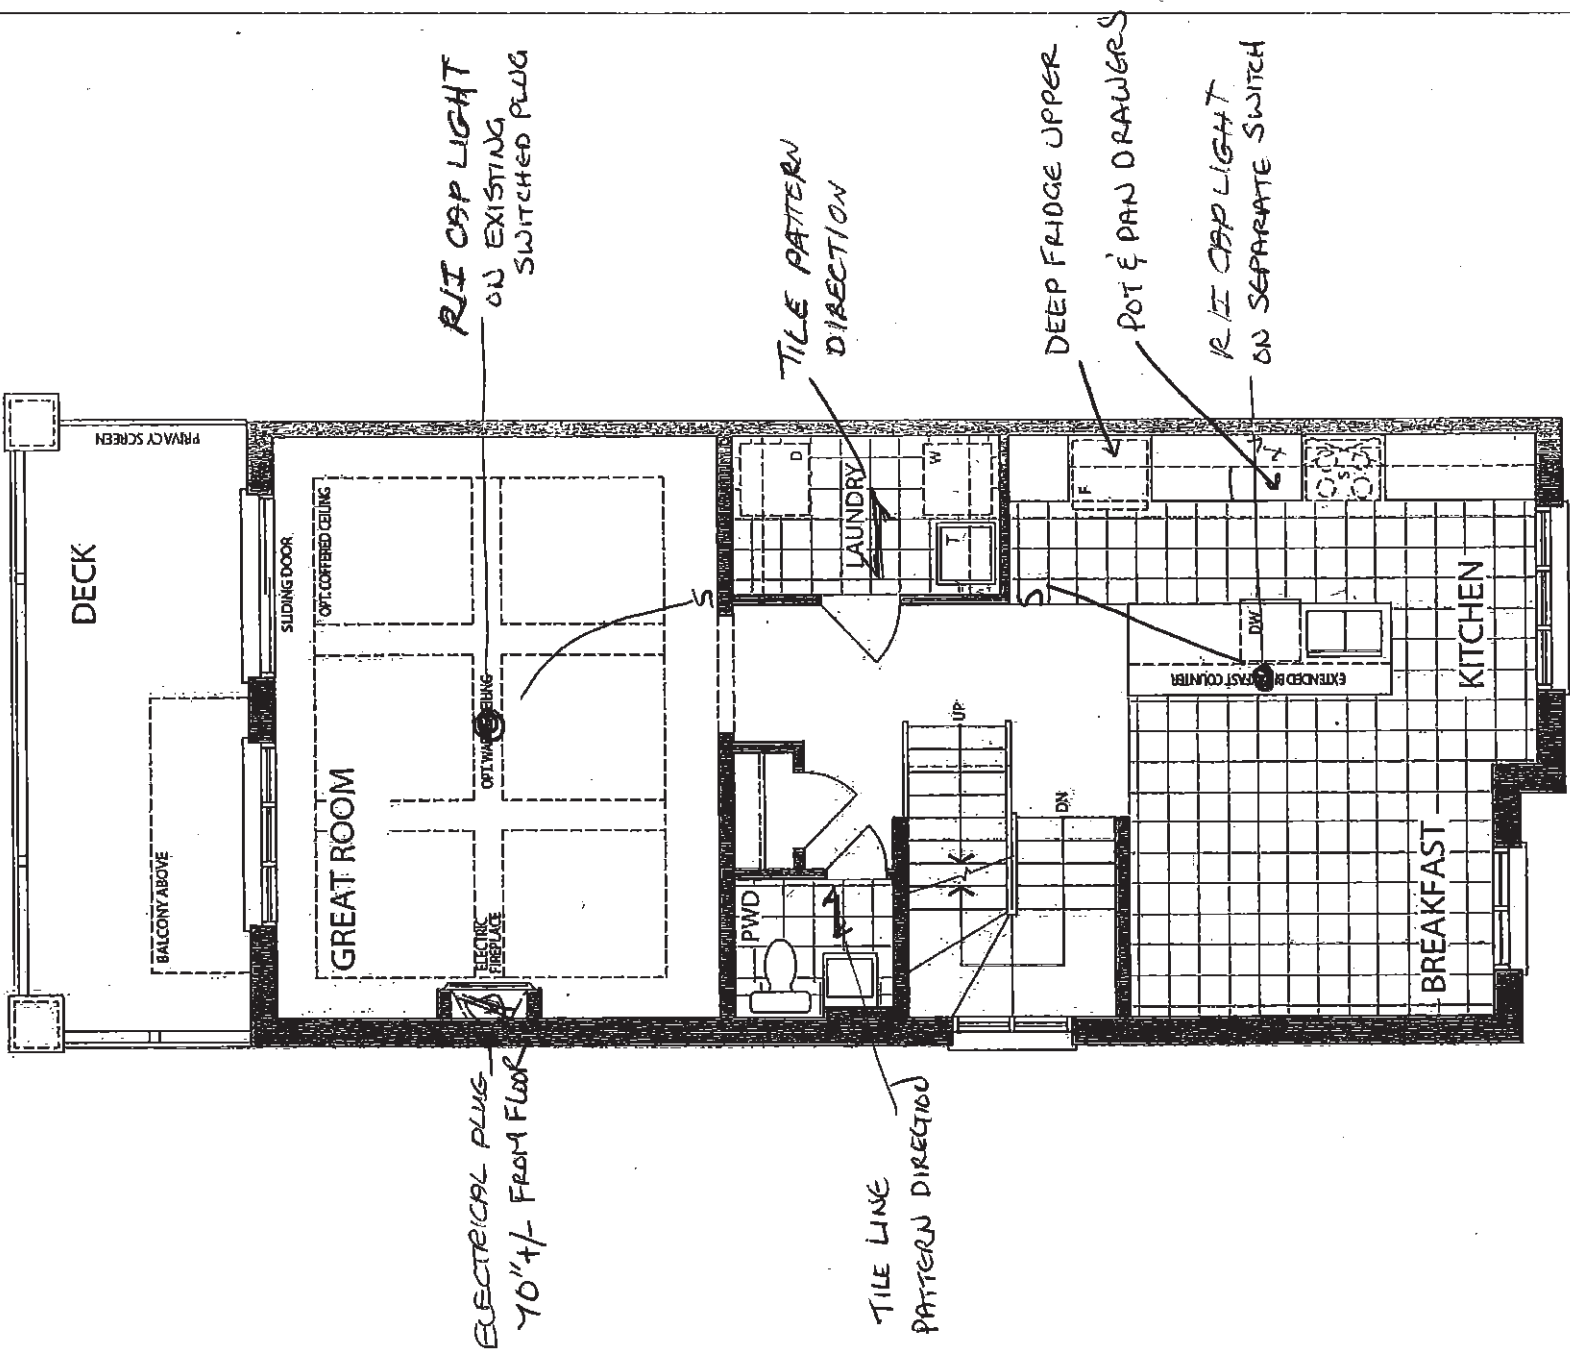

MAIN LEVEL
ELEV A - END

C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON


19 of 41

The Calverton

20-2257 ELEV. A END

ELEVATION A END:
2,257 SQ FT


Sketch #8

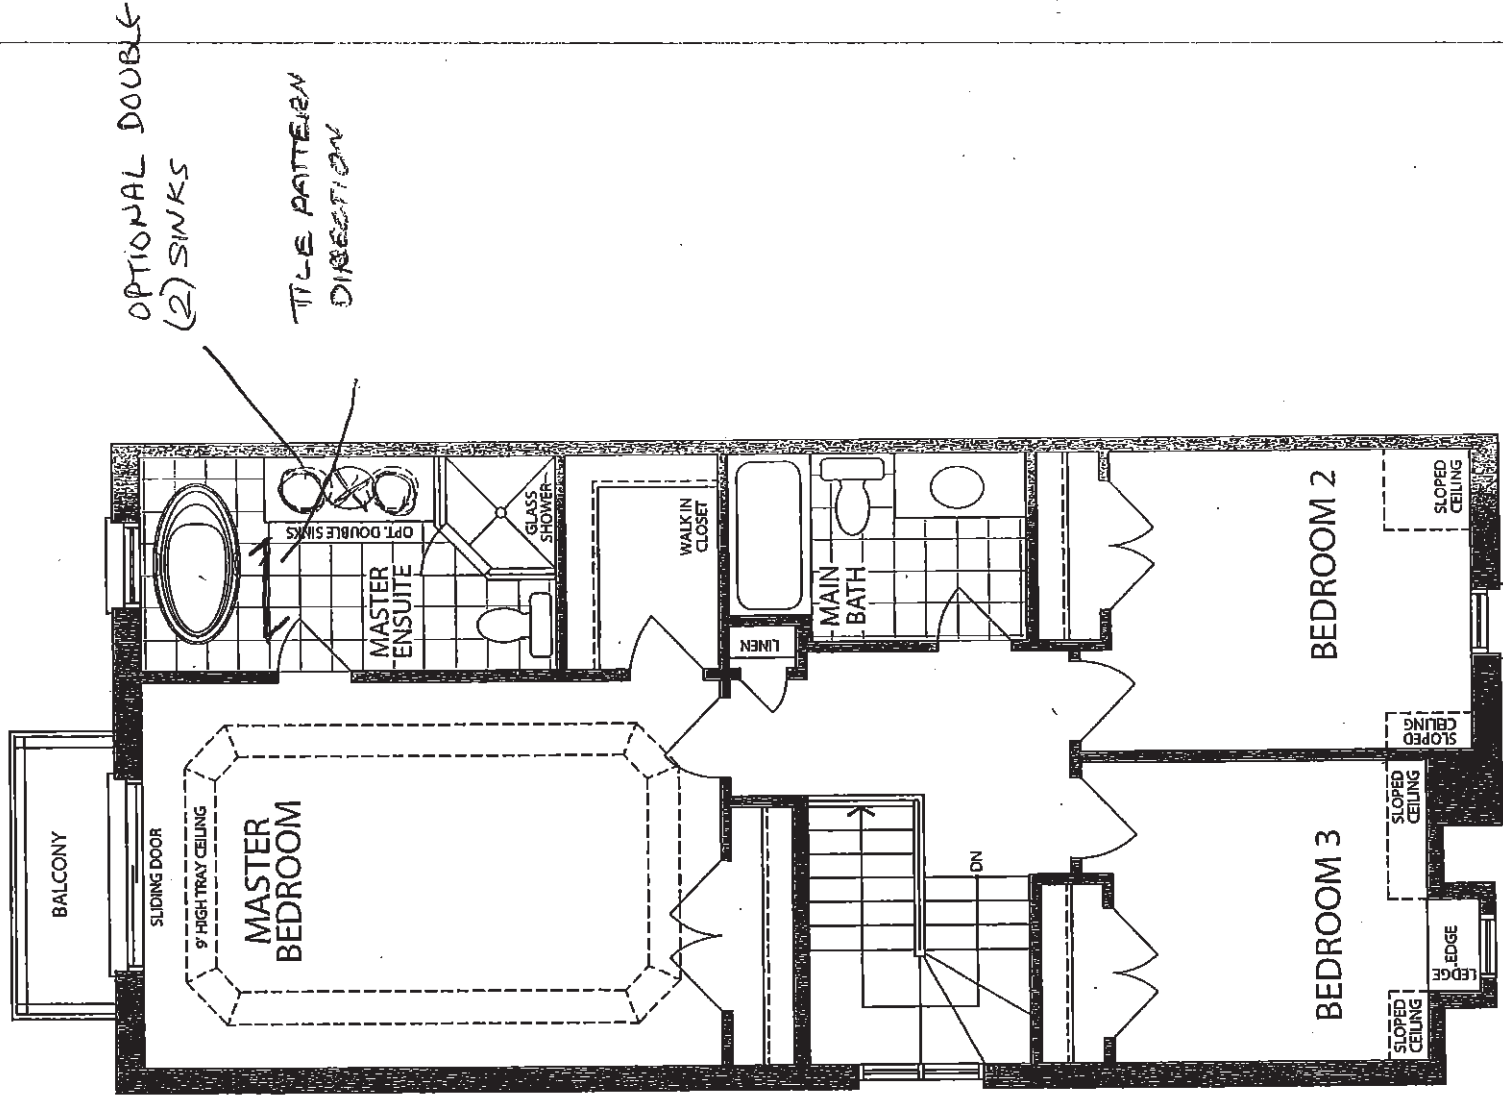

UPPER LEVEL
ELEV A - END

C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

20 of 41

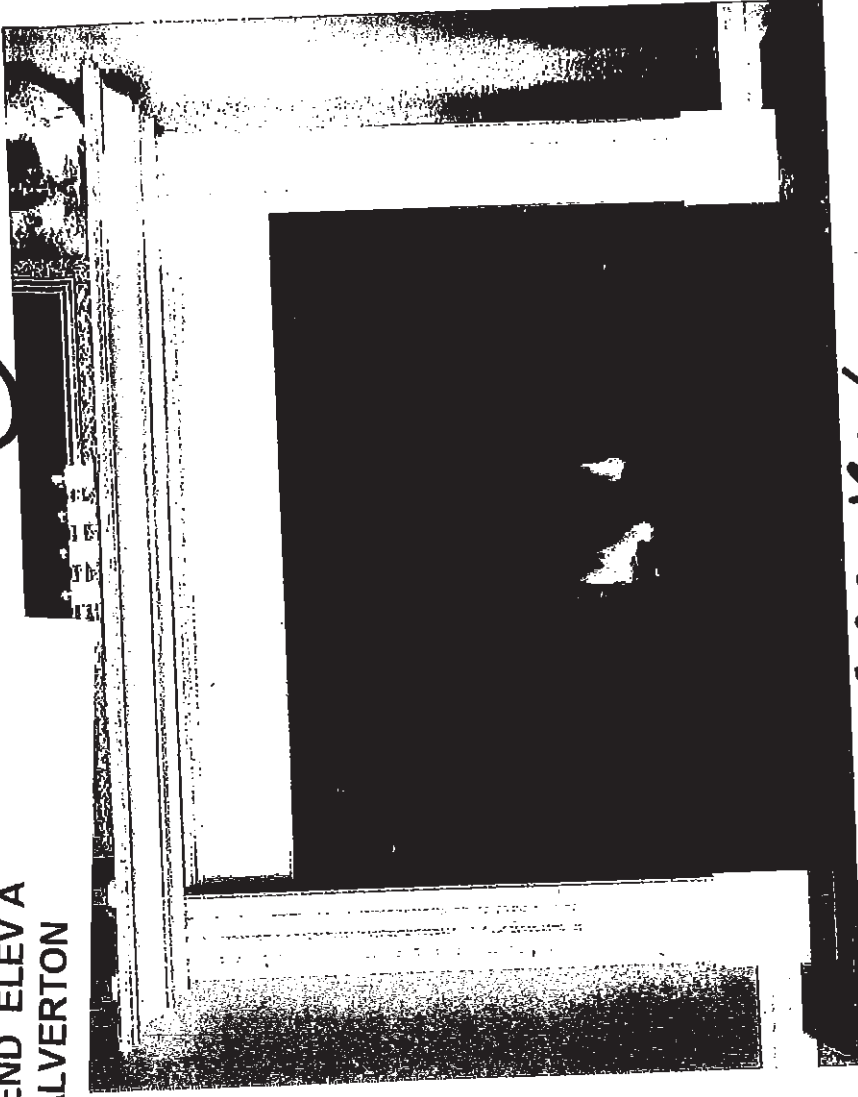

CABINET
STANDARD NF 15 Mantel ✓

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)



STANDARD NF 17 Mantel X

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)


22-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

21 of 41

Regency

STANDARD KITCHEN SINK

ND1831UA/9

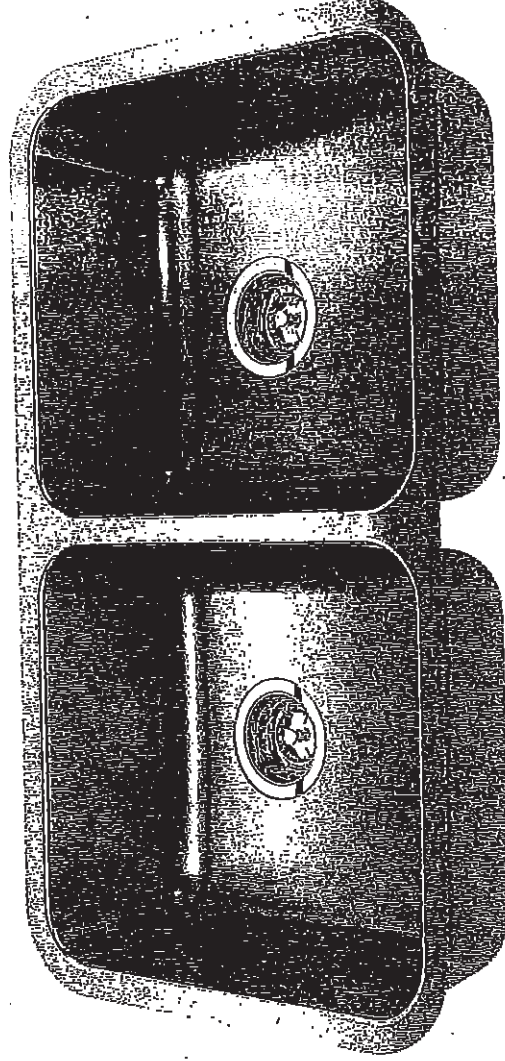

Optional Accessories



BG10S



BG10S




MB100



CATW



DBR10S

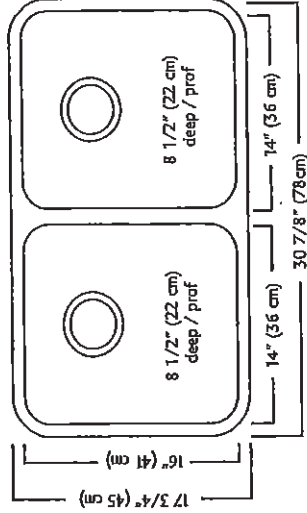

8 1/2" (22 cm)

ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited
P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408


C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

22 of 41

STANDARD KITCHEN FAUCET

Align

Modern



Single Handle Pull-Down Kitchen
Faucet*

Model 7565†

C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

23 of 41

*American
Standard*

BOULEVARD®
PEDESTAL SINK
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (illustrated)
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:
24" x 19" x 35-1/2"
(610 x 483 x 902mm)


- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:
17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -
Meets or Exceeds the Following Specifications:
• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:	
☐ Color:	☐ White ☐ Linen
☐ Faucet Finish:	
☐ Supplies:	
☐ 1-1/4" Trap:	
☐ Nipple:	

* See faucet section for additional models available

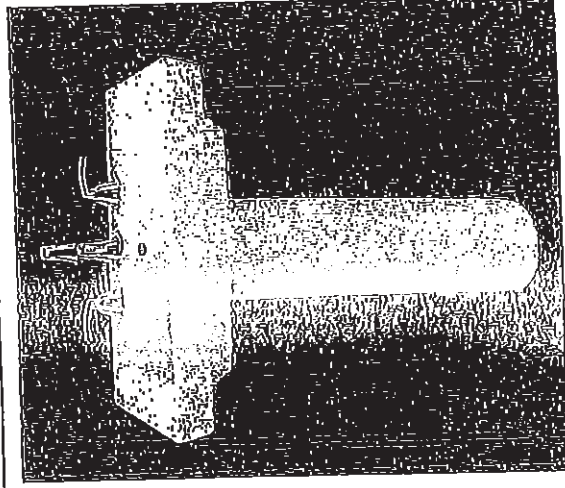

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

COLONY COUNTERTOP SINK

- Vitreous china
- Self-rimming
- Front overflow
- Supplied with template
- Faucet deck
- (Faucet shown not included)

- ☒ 0346 803
Faucet holes on 203mm (8") centres
- ☒ 0346 403 (Illustrated)
Faucet holes on 102mm (4") centres
- ☒ 0346 001
Centre hole only

Nominal Dimensions:
521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:
422mm (16-5/8") wide, 279mm (11") front to
back, 143mm (5-5/8") deep



COMPLIANCE CERTIFICATIONS –
Meets or exceeds the following Specifications:
- ASME A112.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.

- To Be Specified
- ☐ Colour: ☒ White ☐ Bone ☐ Silver Gray
- ☐ Linen
- ☐ Faucet*:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

* See faucet section for additional models available
BAS-198

© 2000 American Standard Inc.


01/07

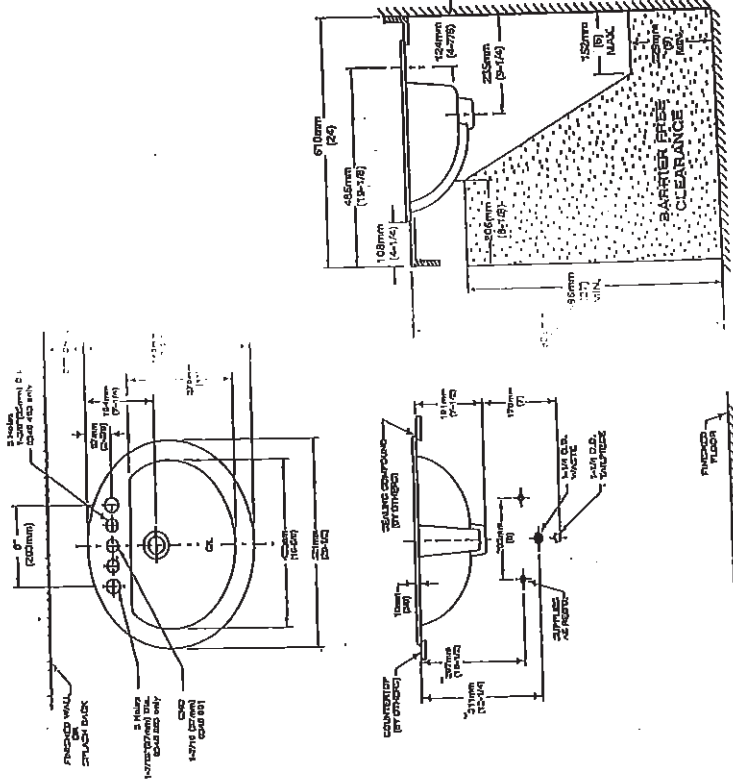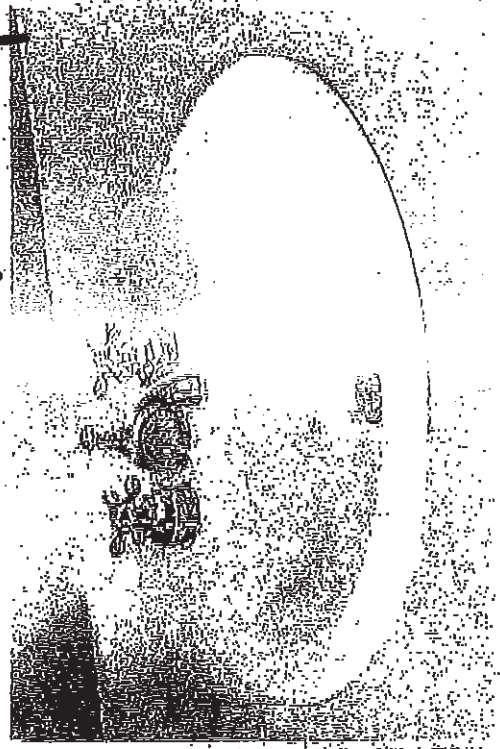

NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or discontinuation. No responsibility is assumed for use
of superseded or voided pages.

C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

25.41

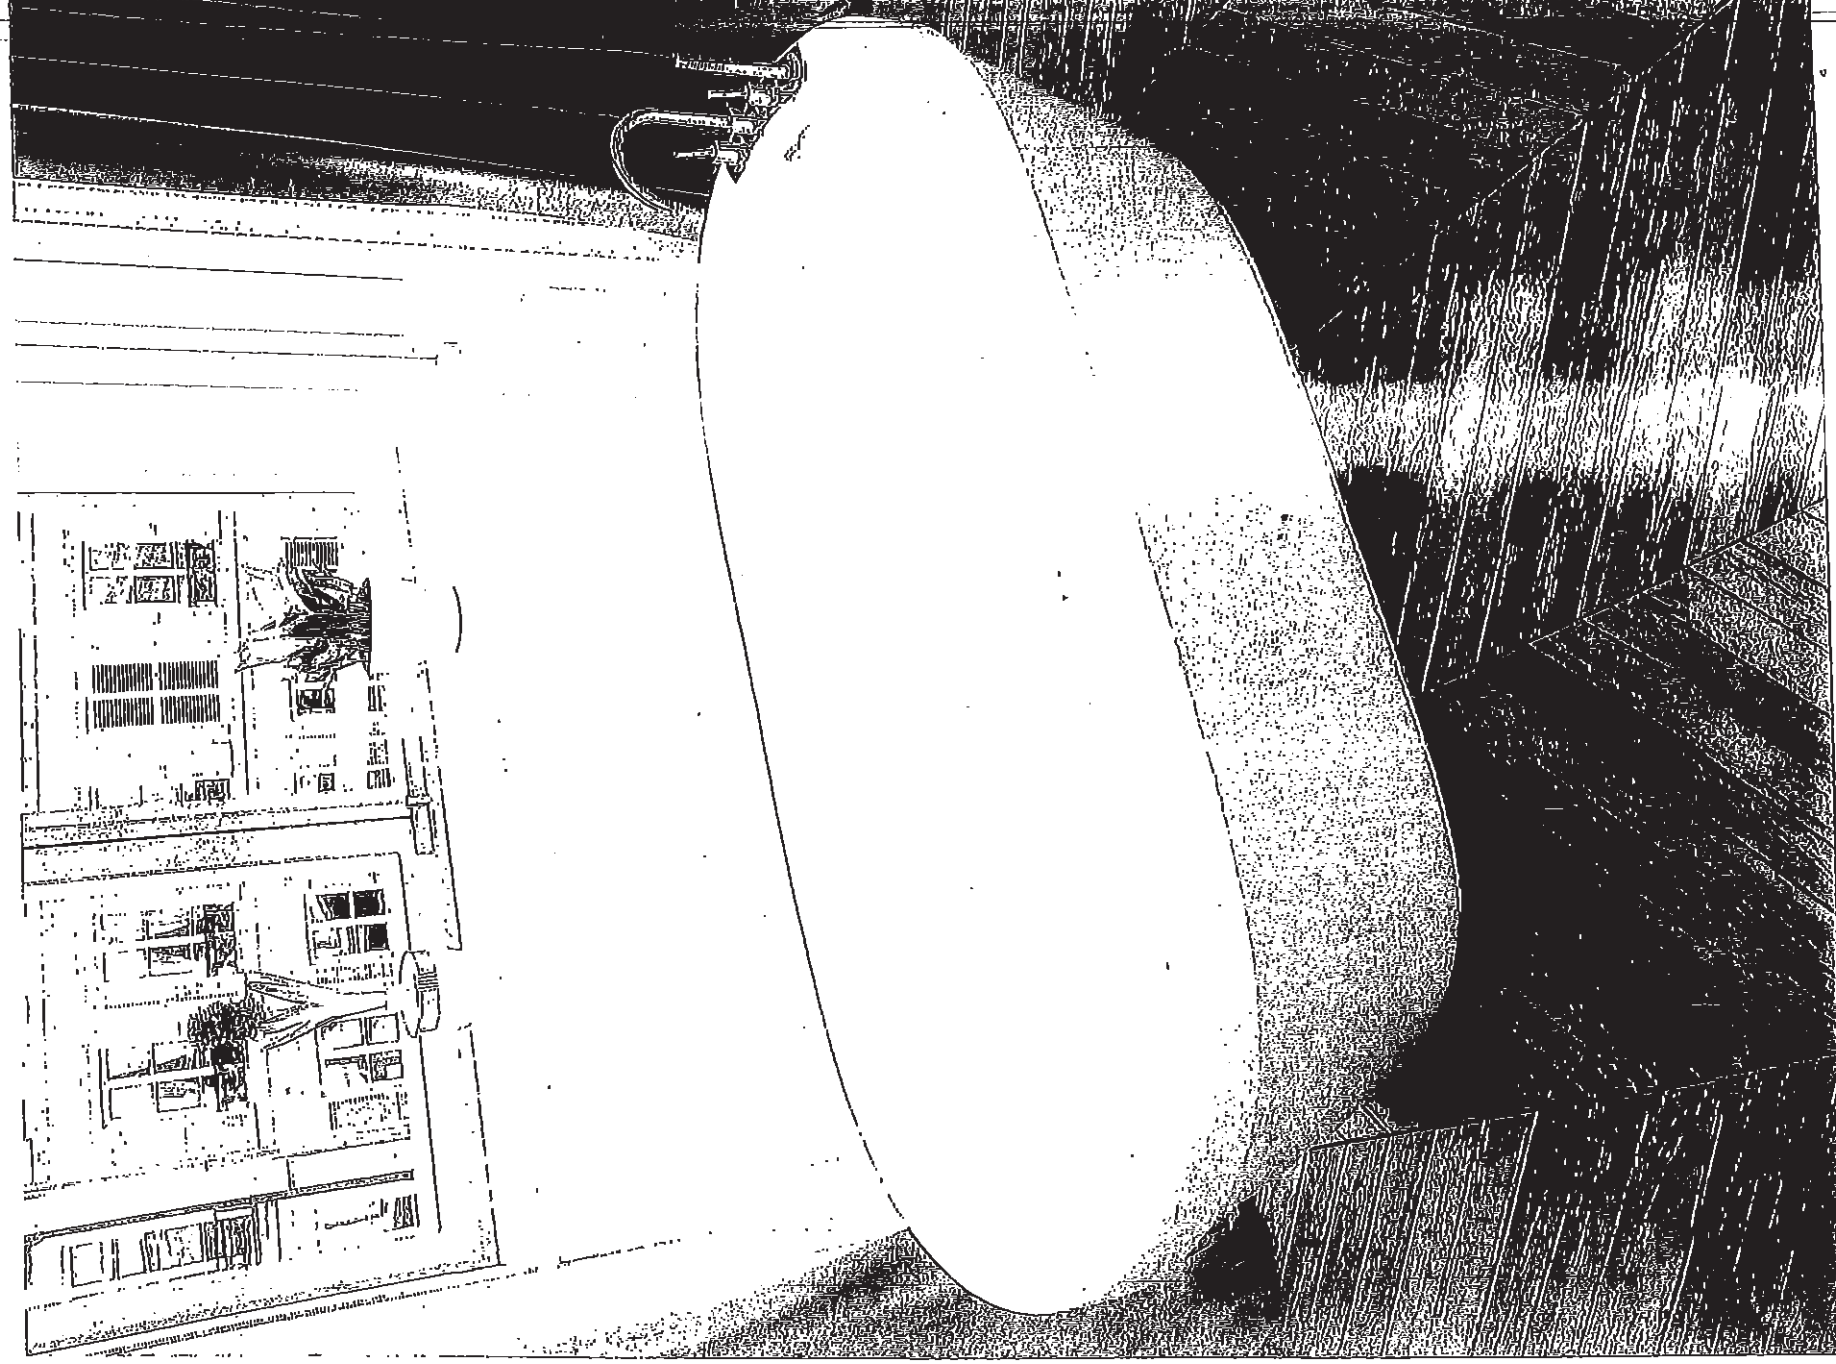


Dentl CP2007

C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

26041


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL

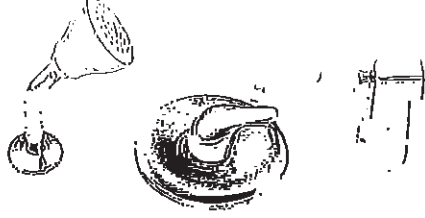

Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL
Model 62320 / TL183EP†

(TL183EP not available in SC)

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

274




-

Diagram of a 3 1/4" x 10" knock-out. Dimensions shown include 7 1/8", 6", 9 5/8", 21", 24", 30", 36", 42", 12", 6 3/4", 3 1/4", and 7" round knock-out.

- **Available Finishes**

FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS
CONTRACTOR									
							SUBMITTED BY	DATE	
LOCATION						ENGINEER			
PROJECT						ARCHITECT			



Updated 2-18

C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT54HSZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

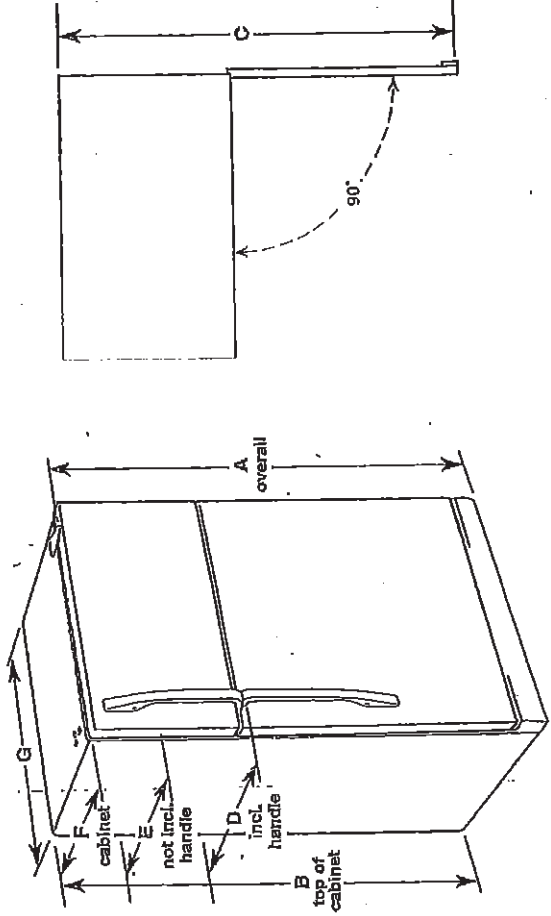

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	65 1/2" (168.3 cm)	65 1/2" (168.4 cm)	62 1/4" (158.1 cm)	32 1/8" (83.5 cm)	30 5/8" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT54HSZD	21.3 cu. ft.	Yes	66 1/2" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/2" (82.3 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

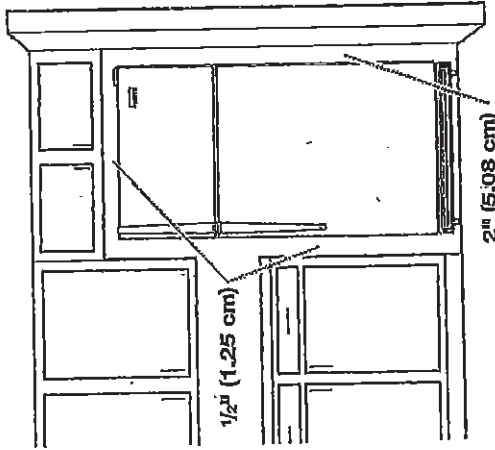

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.





Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Ref. W10674106
10/29/14

C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

29 of 41

Refrigerator Door Swing Verification

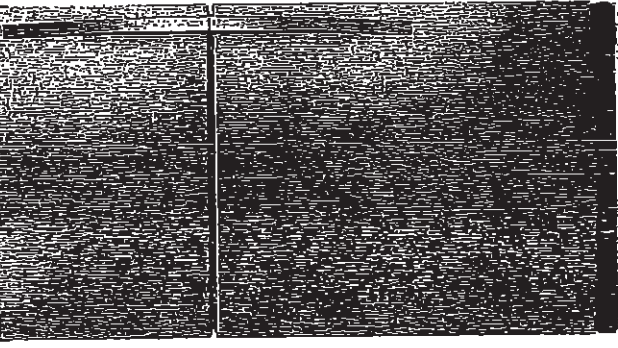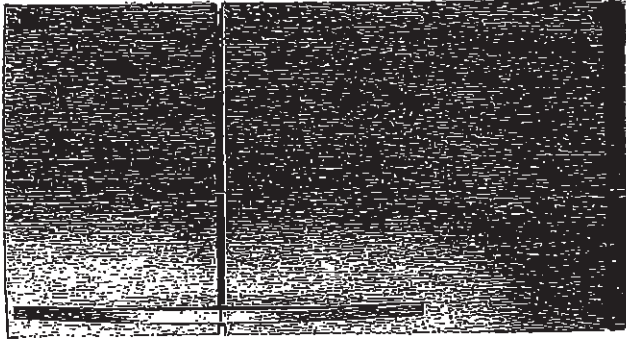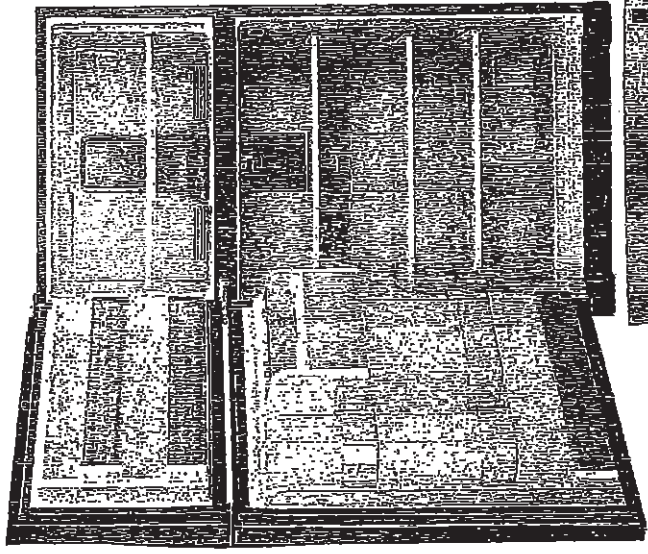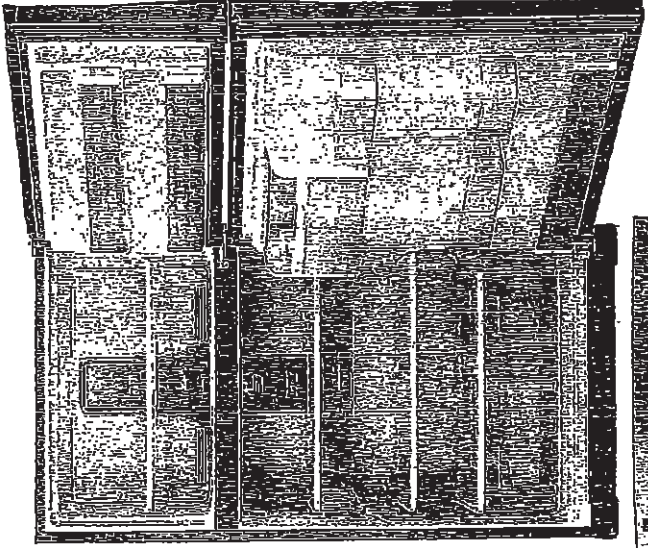

When facing the refrigerator

☐

RIGHT HAND
DOOR OPENING

- Hinges on right
- Handle on left

INITIAL

☒

LEFT HAND
DOOR OPENING

- Hinges on left
- Handle on right

INITIAL

' PORCH RIGHT '

Please check and INITIAL your door swing selection.

22-COUNTRY LANE
LOT 4-7
0-2257 END ELEV A
THE CALVERTON


30 of 41

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

5.3 cu. ft. Whirlpool® electric range with Frozen
Bake™ technology
YWFE515S0JS

Whirlpool®

Home > Kitchen Appliances > Cooking Appliances > Ranges > Single Oven Ranges > YWFE515S0JS

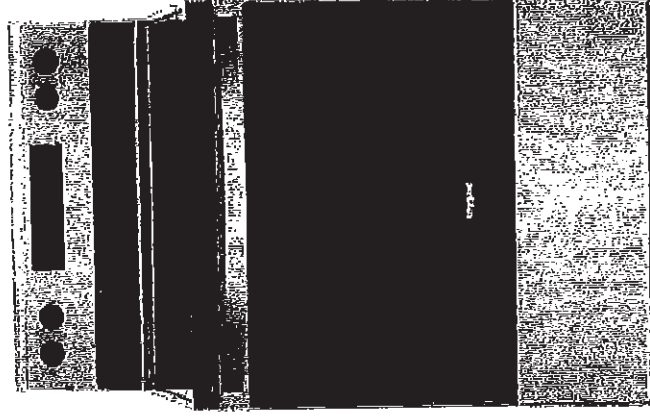

2



SS

SS


2-COUNTRY LANE
OT 4-7
0-2257 END ELEVA
HE CALVERTON

31 of 41

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES

Model YWFE515S0JS

Product Dimensions

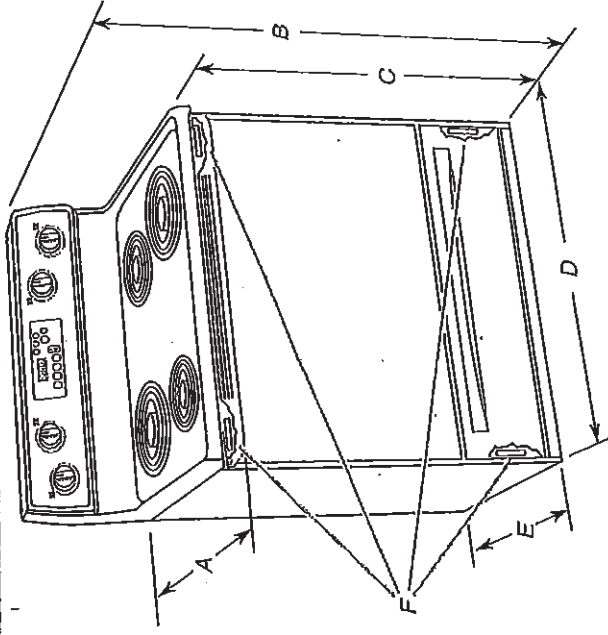

- A. 27¹/₄" (70.5 cm) max. depth with handle
- B. 46⁷/₁₆" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₁₆" (75.9 cm) width
- E. 25⁵/₁₆" (64.3 cm) depth - back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

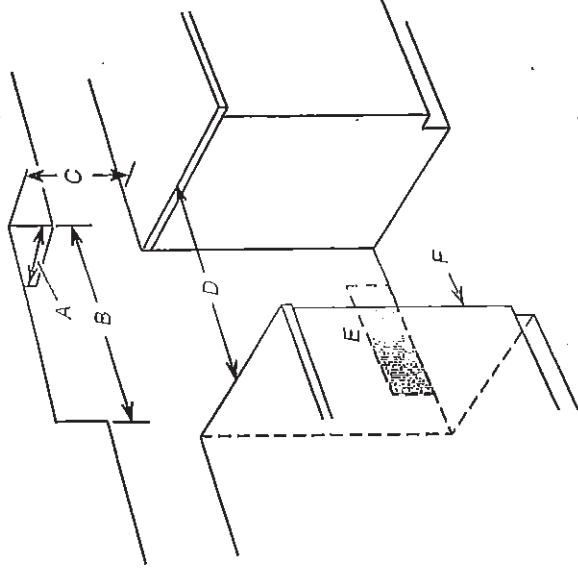

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.
30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

SSB
SKR

Jan 28/20

32 of 41

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES

Model YWFE515S0JS

Install Anti-Tip Bracket

! WARNING



Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warning drawer.
2. Determine which mounting method to use: floor or wall. If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/₁₆" (31.9 cm) from centerline as shown.

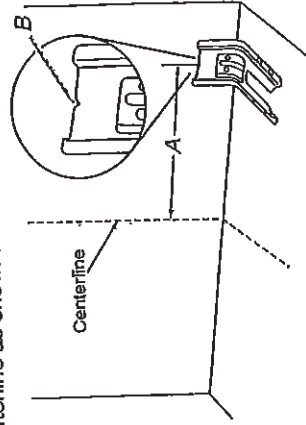

A. 12⁹/₁₆" (31.9 cm)
B. Bracket V-notch

4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting




Rear position

Front position

Diagonal (2 options)


Wall Mounting



5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1⁵/₈" (4.1 cm) screws provided.

6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.

7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

33 of 41



OTHER AVAILABLE COLORS

Black
Model: WDF310PAB

[illegible]

Biscuit-on-Biscuit

THE 2019 LEADERSHIP

white

Model: WDF-310F-AV

Universal Silver

Model: WDF310PAAAD

DIMENSIONS		KEY FEATURES: ENERGY STAR® Qualified No One Has Fewer Repairs 17 Years In A Row Resource - Efficient Wash System CEE Tier 1 qualified Tail Tub Design White Plastic Interior Quiet Partner(TM) Sound Package Auto Soil Sensor Electronic Controls 3 Automatic Cycles 1-Hour Wash Cycle Heavy Wash Cycle Normal Cycle 4 Options High Temperature Wash System Heated Dry Option 4 Hour Delay Wash Option 4-Hour SheerClean Direct Feed Wash System Control Lock Vinyl Racks In-Rack Silverware Basket
Maximum Height	34 1/2 Inches	
Minimum Height	33 1/2 Inches	
Height	34 1/2 Inches	
Depth	24 1/2 Inches	
Width	23 7/8 Inches	
Dimensions shown are for planning purposes only. Actual dimensions may vary. Installation instructions packaged with product.		
ELECTRICAL		
15 Amps Amps. 60 Hz. 120 V. 15.		
Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.		

C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

35x41


CABINET CUTOUT DIMENSIONS

WDF-320-PAN

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

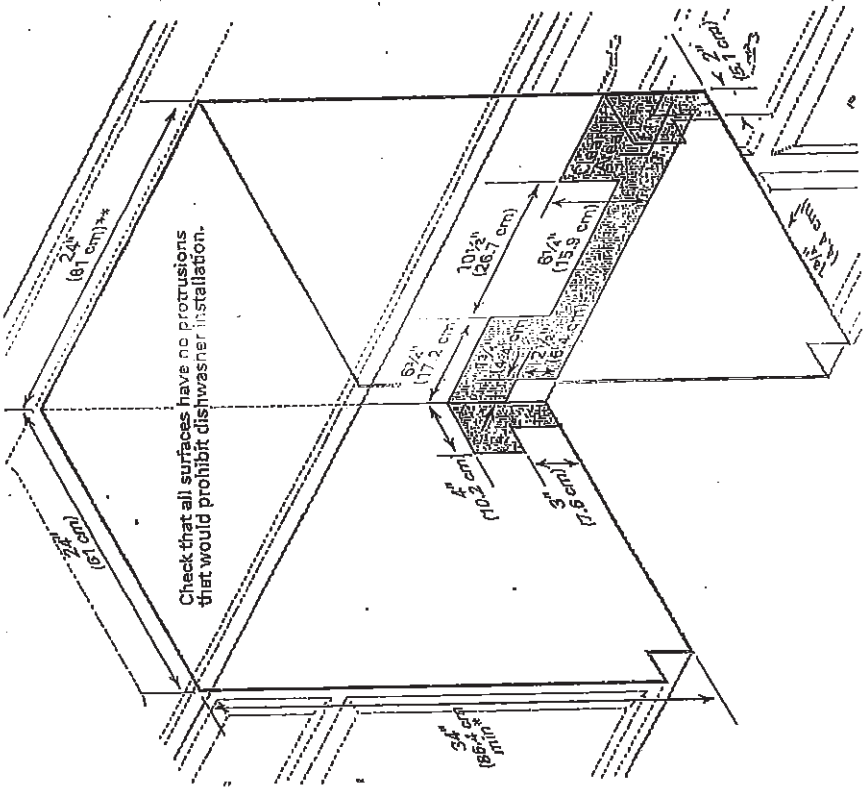


C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

36.41

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryer | Washers | Front Load Washers | WFW5620HW

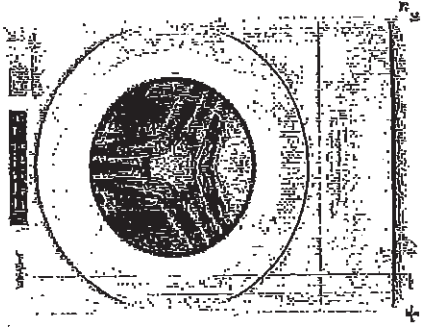

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool
5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

2-COUNTRY LANE
 LOT 4-7
 20-2257 END ELEV A
 THE CALVERTON

37 of 41

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.


Whirlpool Models*

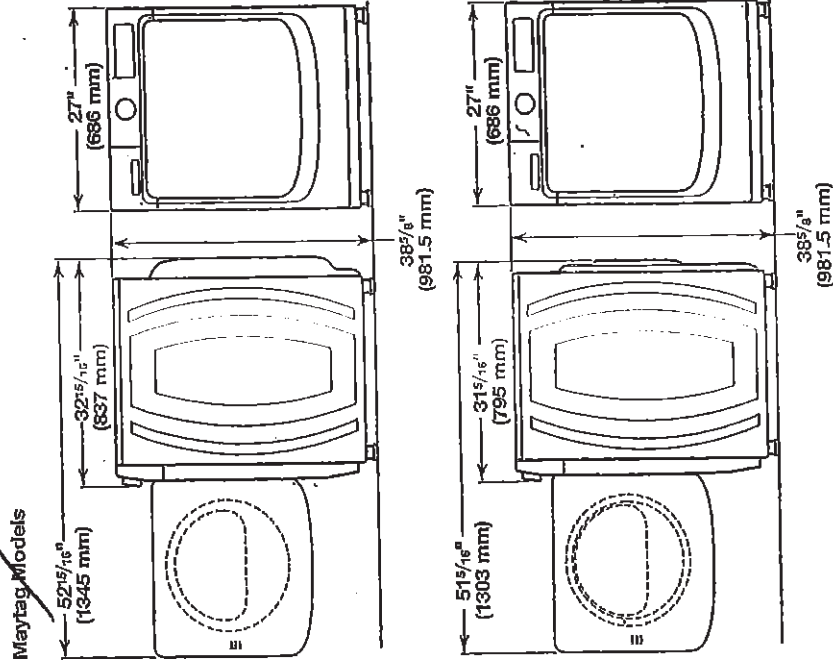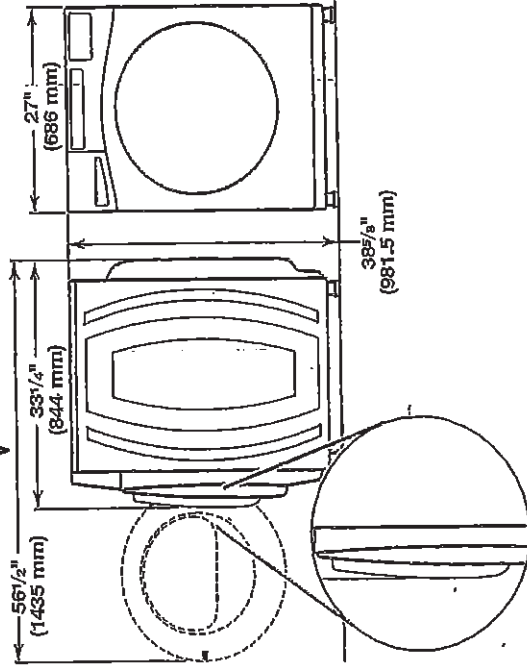

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

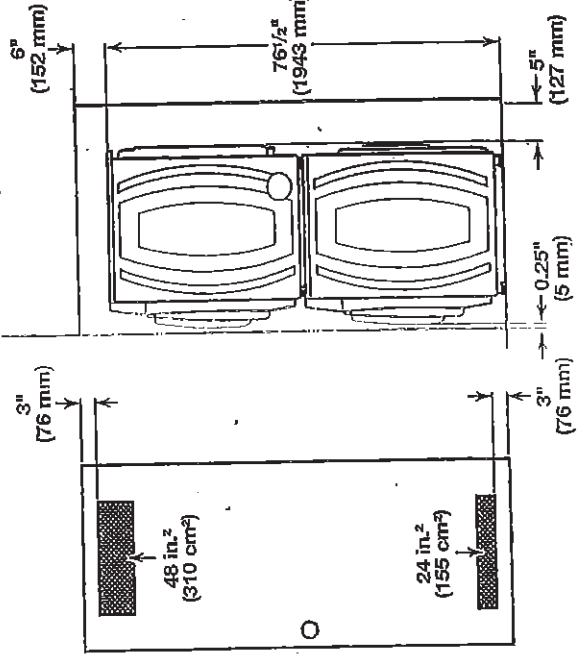


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON


38 of 41

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

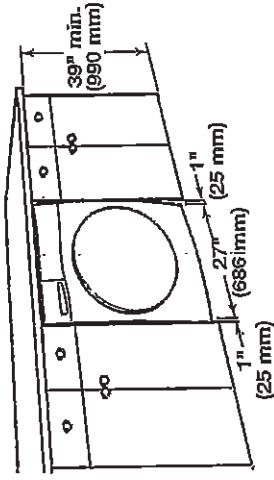

Recessed area or closet installation:

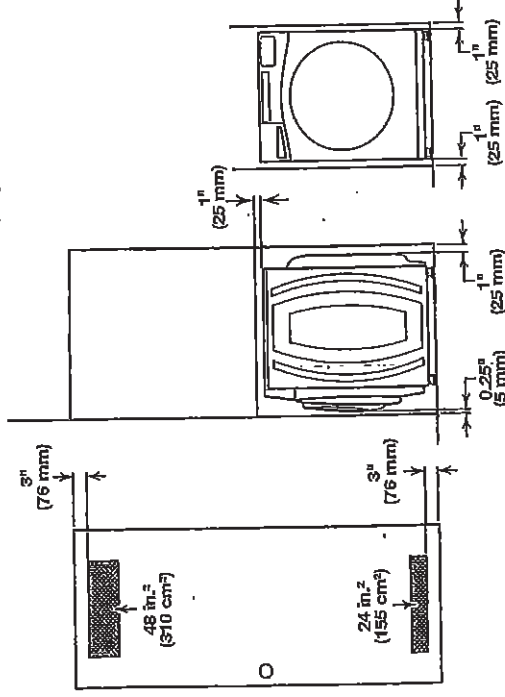

Custom cabinet installation:

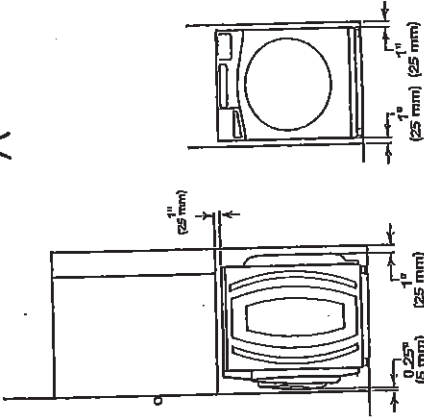


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

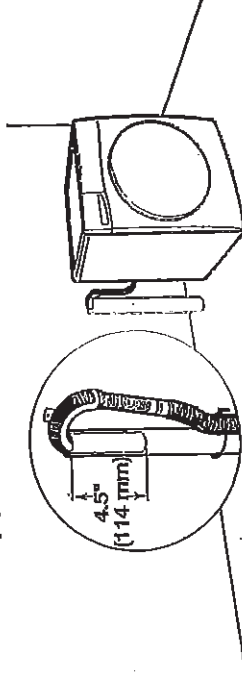


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

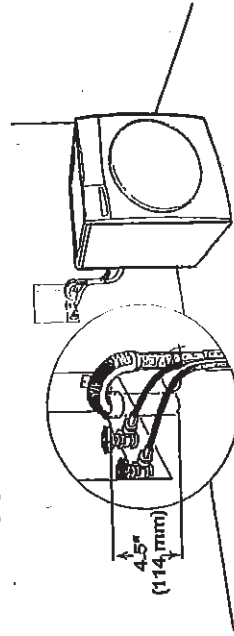

See requirements for floor standpipe drain system.

Laundry tub drain system

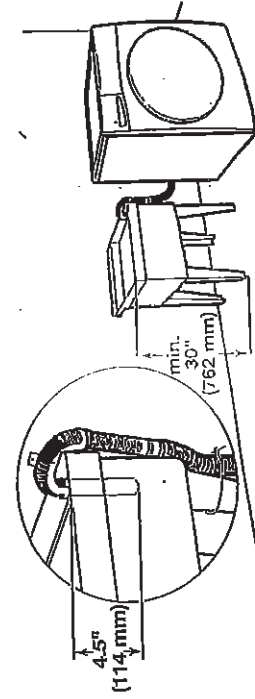


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

39 of 41

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washers and Dryers | Dryers | Electric Dryers | YWED5620HW

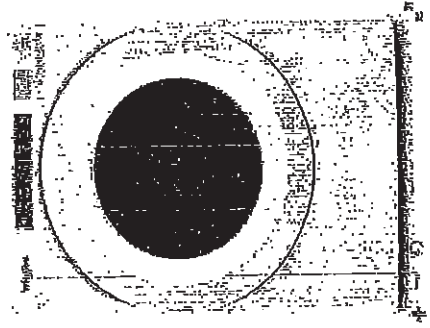

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions	
Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in

Configuration and Overview	
Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	56
Number of Dryness Levels	3

Ventilation System	
Lint Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical	
Hz	60
Power Cord Included	Yes


BB
122

C2- COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

4 of 4

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

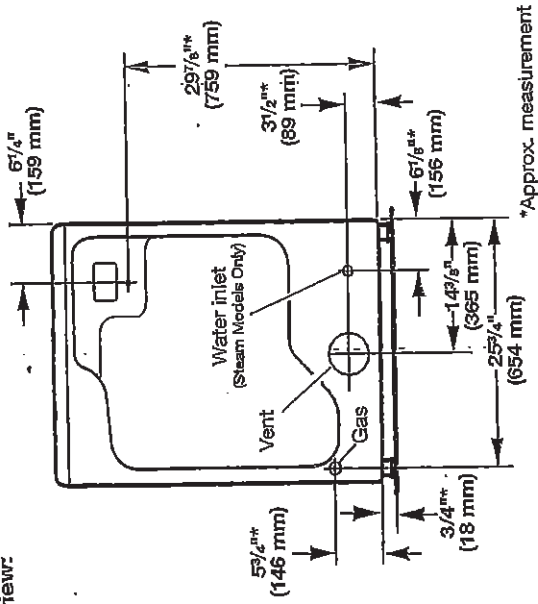

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

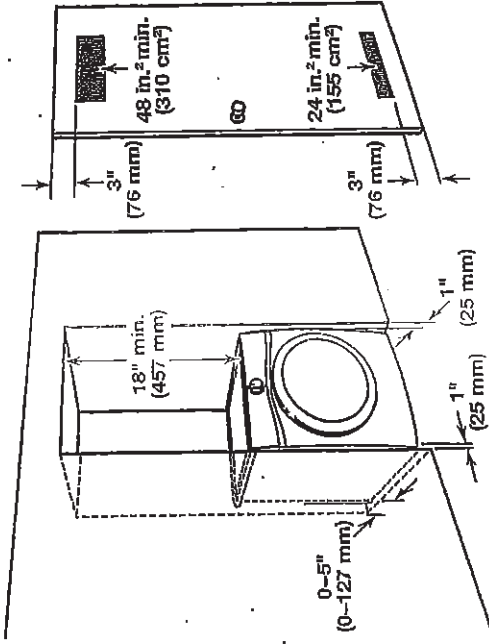

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

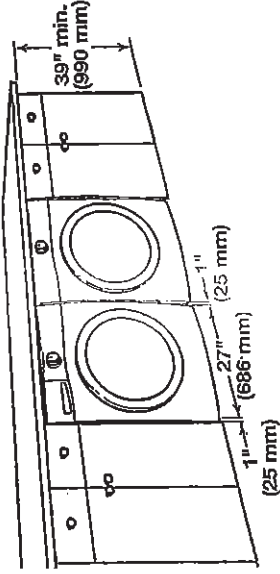

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home Construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

C2-COUNTRY LANE
LOT 4-7
20-2257 END ELEV A
THE CALVERTON

41 of 41

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.

- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

! WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.


Failure to do so can result in death, explosion, or fire.

You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
 - A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
 - If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
 - Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
 - Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
 - Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
 - For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
 - The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.
- IMPORTANT:** Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view:

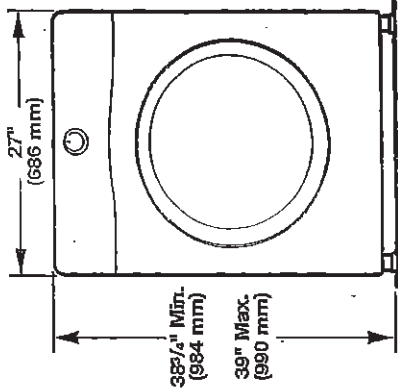


Side view:

Whirlpool Models

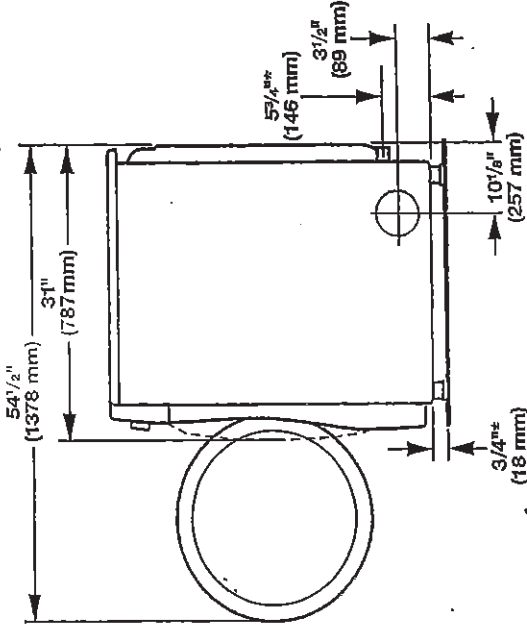

*Approx. measurement

Maytag Models

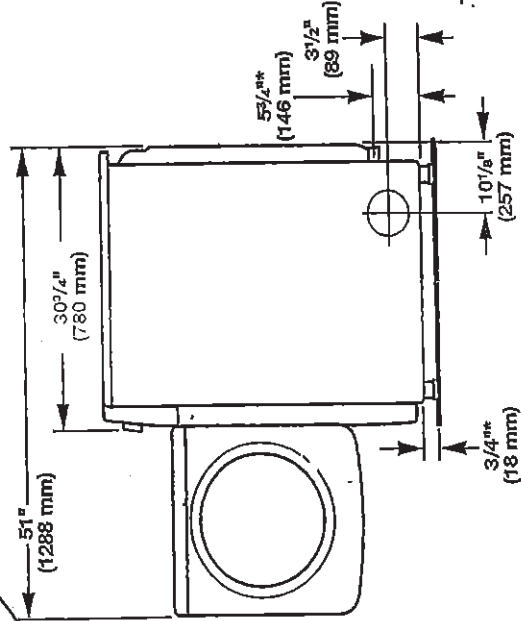

*Approx. measurement